
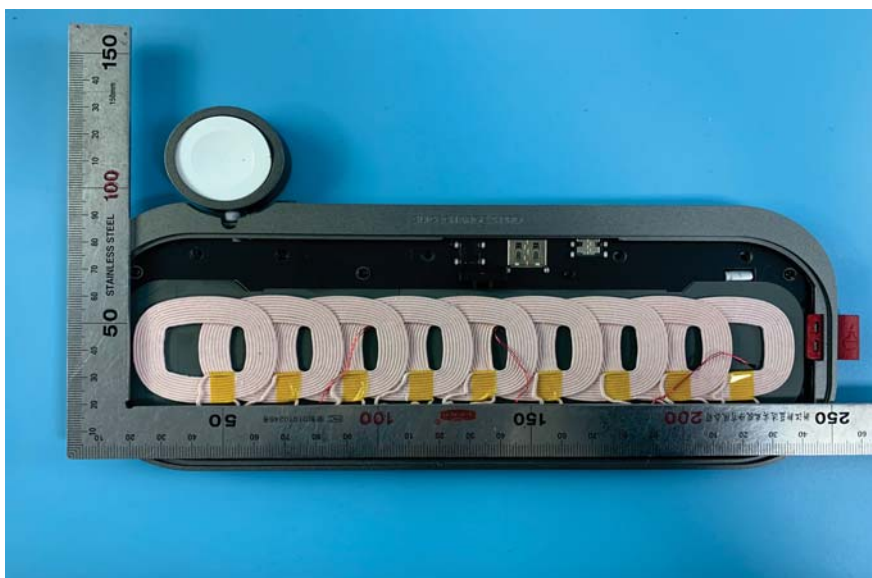


		产品规格/BOM表 Product specification/BOM table			业 体	NO:	ZY6103-1006
						EDITION:	A/0
						PAGE:	1/1
客户编号 Customer No	ZY6103	线材 wire rod	样品使用线材: 0.08x105P Use wire:			Use equipment	Uniaxial
客户品名 NAME	PW3665DL	规格 TP	(Leader) 引线107+(Adhesive) 背胶			绕线方向 Winding direction	CCW

1、Specification requirements: (unit mm)

PROJECT	Number of turns	inductance	resistance	internal diameter	external diameter	Lead length	Solder length	Coil thickness	Module thickness		
Standard value	9TS	6.0uH	38mΩ	27	47	107	2~5	1.3	2.88		
tolerance	fixed	±10%	±20%	±0.5	±1	±2	/	MAX	MAX		

2、Drawing description: (unit mm)

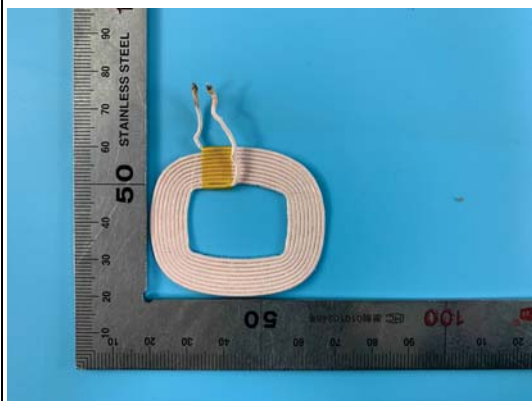

3、BOM 物料清单

Material name	Specification/model	Company	dosage	supplier	Note
wire rod	0.08x105P	g	6.3±0.3		
glue	Strong adhesive	mL	0.5		
HT tape	Width 8.0mm tan	mm	38		
Magnet isolator	PR49.5x5.3x1.0 (external diameter 50+0/-1, thickness 1.0±0.1)	PCS	1		
two sides glue	D48.5x0.08mm, Removable	PCS	1		
Edition	Change content	Rev Date	Note		


4、Insulation class

Specifications	insulation	Heat resistance	thermal rating
Basic insulation	Polyamide, polyester	105℃	A

确认栏/Approval

MADE	ENGINEERING	field	quality	create	trade	approval	Customer Approval	
杨颖								

Form No: ZYQSPE007 (06)

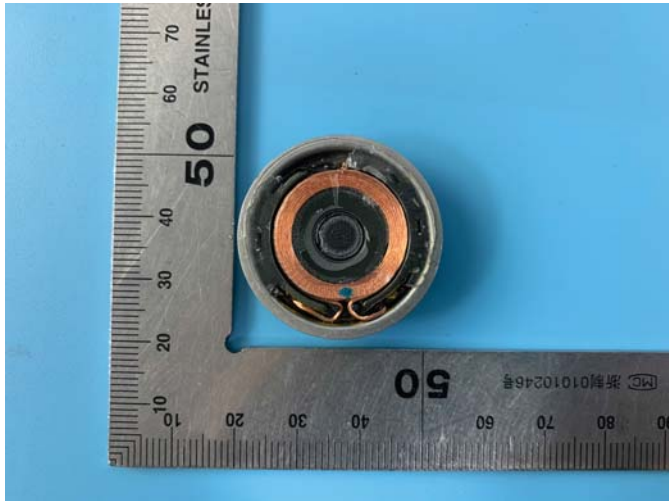

Material: copper wire

Inner diameter:15mm

Outer diameter:20mm

Thickness:2mm