

Report No.: TW2211112-03E

Applicant: Mego Afek AC ltd

Product: Tablet PC

Model No.: M-TA7

Trademark: N/A

Test Standards: FCC Part 15.247

Test result:

It is herewith confirmed and found to comply with the

requirements set up by ANSI C63.10, FCC Part 15.247 for the

evaluation of electromagnetic compatibility

Approved By

Terry Tong

Terry Tang

Manager

Dated: December 09, 2022


Results appearing herein relate only to the sample tested

The technical reports is issued errors and omissions exempt and is subject to withdrawal at

SHENZHEN TIMEWAY TESTING LABORATORIES

Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le Village, Nanshan District, Shenzhen, China

Tel (755) 83448688, Fax (755) 83442996, E-Mail:info@timeway-lab.com



Report No.: TW2211112-03E Page 2 of 86

Date: 2022-12-09



Special Statement:

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19.

The testing quality system of our laboratory meet with ISO/IEC-17025 requirements, which is approved by CNAL. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

CNAL-LAB Code: L2292

The EMC Laboratory has been assessed and in compliance with CNAL/AC01:2002 accreditation criteria for testing Laboratories (identical to ISO/IEC 17025:2017 General Requirements) for the Competence of testing Laboratories.

FCC-Registration No.: 744189

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 744189.

Industry Canada (IC) —Registration No.:5205A

The EMC Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 5205A.

A2LA (Certification Number:5013.01)

The EMC Laboratory has been accredited by the American Association for Laboratory Accreditation (A2LA). Certification Number:5013.01

Page 3 of 86

Report No.: TW2211112-03E

Date: 2022-12-09



Test Report Conclusion

Content

1.0	General Details	4
1.1	Test Lab Details.	4
1.2	Applicant Details	4
1.3	Description of EUT	4
1.4	Submitted Sample	5
1.5	Test Duration.	5
1.6	Test Uncertainty.	5
1.7	Test By	5
2.0	List of Measurement Equipment	6
3.0	Technical Details	8
3.1	Summary of Test Results	8
3.2	Test Standards.	8
4.0	EUT Modification	8
5.0	Power Line Conducted Emission Test.	9
5.1	Schematics of the Test.	9
5.2	Test Method and Test Procedure.	9
5.3	Configuration of the EUT	9
5.4	EUT Operating Condition.	10
5.5	Conducted Emission Limit.	10
5.6	Test Result.	10
6.0	Radiated Emission test	13
5.1	Test Method and Test Procedure.	13
5.2	Configuration of the EUT	14
6.3	EUT Operation Condition.	14
6.4	Radiated Emission Limit.	14
7.0	6dB Bandwidth Measurement	24
8.0	Maximum Output Power	44
9.0	Power Spectral Density Measurement.	47
10.0	Out of Band Measurement	65
11.0	Antenna Requirement	83
12.0	FCC ID Label.	84
13.0	Photo of Test Setup and EUT View	85

Date: 2022-12-09



1.0 General Details

1.1 Test Lab Details

Name: SHENZHEN TIMEWAY TESTING LABORATORIES.

Address: Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le

Village, Nanshan District, Shenzhen, China

Telephone: (755) 83448688 Fax: (755) 83442996

Site Listed with Federal Communications commission (FCC)

Registration Number:744189 For 3m Anechoic Chamber

Site Listed with Industry Canada of Ottawa, Canada

Registration Number: IC: 5205A

For 3m Anechoic Chamber

1.2 Applicant Details

Applicant: Mego Afek AC ltd

Address: Kibbutz Afek, 3004200, Israel

Telephone: +972-779084361

Fax: --

1.3 Description of EUT

Product: Tablet PC

Manufacturer: Crystel HK Limited

Address: Rm1803, 18th/F, Block East, YiHai Plaza, No.90 ChuangYe Rd, NanShan

District, 518054, ShenZhen, China

Trademark: N/A
Model Number: M-TA7
Additional Model Number: N/A

Hardware Version: AK47-BT-V4.2
Software Version: M-TA7_20210728
Serial No.: 7290016330199
Rating: DC5V, 2.0 A

Type of Modulation IEEE 802.11b: DSSS (CCK, QPSK, DBPSK)

IEEE 802.11g/n (HT20, HT40): OFDM (64QAM, 16QAM, QPSK, BPSK)

Frequency range IEEE 802.11b/g/n (HT20): 2412-2462MHz;

IEEE 802.11n HT40: 2422-2452MHz

Channel Spacing 5MHz for IEEE 802.11b/g/n (HT20, HT40)

Air Data Rate IEEE 802.11b: 11, 5.5, 2, 1 Mbps

IEEE 802.11g: 54, 48,36, 24, 18, 12, 9, 6 Mbps

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No.: TW2211112-03E

Date: 2022-12-09



Page 5 of 86

IEEE 802.11n HT20/HT40: mcs0-mcs15

Frequency Selection By software

Channel Number IEEE 802.11b/g/n (HT20): 11 Channels;

IEEE 802.11n (HT40): 7 Channels;

Antenna: FPC antenna with gain 3.03dBi Max (Get from the antenna specification)

1.4 Submitted Sample: 2 Samples

1.5 Test Duration

2022-11-10 to 2022-12-09

1.6 Test Uncertainty

Conducted Emissions Uncertainty = 3.6dB

Radiated Emissions below 1GHz Uncertainty =4.7dB

Radiated Emissions above 1GHz Uncertainty =6.0dB

Conducted Power Uncertainty = 6.0dB

Occupied Channel Bandwidth Uncertainty = 5%

Note: The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.

1.7 Test Engineer

The sample tested by

Print Name: Andy Xing

Andy - Xing

Page 6 of 86

Report No.: TW2211112-03E

Date: 2022-12-09



2.0 Test Equipment							
Instrument Type	Manufacturer	Model	Serial No.	Date of Cal.	Due Date		
ESPI Test Receiver	R&S	ESPI 3	100379	2022-07-15	2023-07-14		
LISN	R&S	EZH3-Z5	100294	2022-07-18	2023-07-17		
LISN	R&S	EZH3-Z5	100253	2022-07-18	2023-07-17		
Impuls-Begrenzer	R&S	ESH3-Z2	100281	2022-07-18	2023-07-17		
Loop Antenna	EMCO	6507	00078608	2022-07-18	2025-07-17		
Spectrum	R&S	FSIQ26	100292	2022-07-15	2023-07-14		
Horn Antenna	A-INFO	LB-180400-KF	J211060660	2022-07-18	2025-07-17		
Horn Antenna	R&S	BBHA 9120D	9120D-631	2022-07-18	2024-07-17		
Power meter	Anritsu	ML2487A	6K00003613	2022-07-18	2023-07-17		
Power sensor	Anritsu	MA2491A	32263	2022-07-18	2023-07-17		
Bilog Antenna Schwarebec		VULB9163	9163/340	2022-07-18	2025-07-17		
9*6*6 Anechoic			N/A	2022-07-26	2025-07-25		
EMI Test Receiver	RS	ESVB	826156/011	2022-07-15	2023-07-14		
EMI Test Receiver	RS	ESCS 30	834115/006	2022-07-15	2023-07-14		
Spectrum	HP/Agilent	E4407B	MY50441392	2022-07-15	2023-07-14		
Spectrum	RS	FSP	1164.4391.38	2022-07-15	2023-07-14		
RF Cable	Zhanadi	ZT26-NJ-NJ-8		2022-07-15	2023-07-14		
RF Cable Zhengdi		M/FA					
RF Cable	Zhengdi	7m	1	2022-07-15	2023-07-14		
Pre-Amplifier	Schwarebeck	BBV9743	#218	2022-07-15	2023-07-14		
Pre-Amplifier	HP/Agilent	8449B	3008A00160	2022-07-15	2023-07-14		
LISN	SCHAFFNER	NNB42	00012	2022-08-18	2023-07-17		

2.2 Automation Test Software

For Conducted Emission Test

Name	Version	
EZ-EMC	Ver.EMC-CON 3A1.1	

For Radiated Emissions

Name	Version
EMI Test Software BL410-EV18.91	V18.905
EMI Test Software BL410-EV18.806 High Frequency	V18.06

Page 7 of 86

Report No.: TW2211112-03E

Date: 2022-12-09



3. DESCRIPTION OF TEST MODES

IEEE 802.11b, 802.11g, 802.11n (HT20) mode

The EUT had been tested under operating condition. There are three channels have been tested as following:

Channel	Frequency (MHz)
Low	2412
Middle	2437
High	2462

IEEE 802.11b mode: 1Mbps data rate (worst case) was chosen for full testing. IEEE 802.11g mode: 6Mbps data rate (worst case) was chosen for full testing. IEEE 802.11n (HT20) mode: mcs0 (worst case) were chosen for full testing;

IEEE 802.11n (HT40) mode

The EUT had been tested under operating condition. There are three channels have been tested as following:

Channel	Frequency (MHz)
Low	2422
Middle	2437
High	2452

IEEE 802.11n (HT40) mode: mcs0 data rate (worst case) were chosen for full testing

Note: During the test, the duty cycle was set up to >98%

Page 8 of 86

Report No.: TW2211112-03E

Date: 2022-12-09



3.0 **Technical Details**

3.1 **Summary of test results**

Standard	Test Type	Result	Notes
FCC Part 15, Paragraph15.203	Antenna Requirement	Pass	Complies
FCC Part 15, Paragraph15.207	Conducted Emission Test	Pass	Complies
FCC Part 15 Subpart C Paragraph 15.247(a)(2) Limit	Spectrum bandwidth of a Orthogonal Frequency Division Multiplex System Limit: 6dB bandwidth>500kHz	Pass	Complies
FCC Part 15, Paragraph 15.247(b)	Maximum peak output power Limit: max. 30dBm	Pass	Complies
FCC Part 15, Paragraph 15.109,15.205 & 15.209	Transmitter Radiated Emission Limit: Table 15.209	Pass	Complies
FCC Part 15, Paragraph 15.247(e)	Power Spectral Density Limit: max. 8dBm/3kHz	Pass	Complies
FCC Part 15, Paragraph 15.247(d)	Out of Band Emission and Restricted Band Radiation Limit: 20dB less than peak value of fundamental frequency Restricted band limit: Table 15.209	Pass	Complies

3.2 **Test Standards**

FCC Part 15 Subpart & Subpart C, Paragraph 15.247

4.0 **EUT Modification**

No modification by SHENZHEN TIMEWAY TESTING LABORATORIES.


Report No.: TW2211112-03E

Date: 2022-12-09



5.0 Power Line Conducted Emission Test

5.1 Schematics of the test




EUT: Equipment Under Test

5.2 Test Method and test Procedure

The EUT was tested according to ANSI C63.10-2013. The Frequency spectrum From 0.15MHz to 30MHz was investigated. The LISN used was 50ohm/50uH as specified by section 5.1 of ANSI C63.10-2013.

Test Voltage: 120V~, 60Hz Block diagram of Test setup

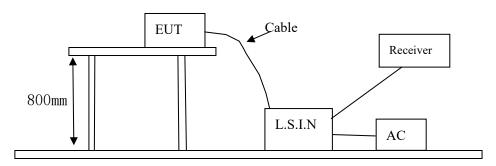

5.3 Configuration of the EUT

The EUT was configured according to ANSI C63.10-2013. All interface ports were connected to the appropriate peripherals. All peripherals and cables are listed below.

A. EUT

Device	Manufacturer	Model	FCC ID		
Tablet PC	Crystel HK Limited	M-TA7	2A9CI-M-TA7		

B. Internal Device

Device	Manufacturer	Model	FCC ID/DOC
N/A			

C. Peripherals

Device	Manufacturer	Model	FCC ID/DOC	Cable
	-		-	-1

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No.: TW2211112-03E Page 10 of 86

Date: 2022-12-09



5.4 **EUT Operating Condition**

Operating condition is according to ANSI C63.10-2013.

- Setup the EUT and simulators as shown on follow Α
- В Enable AF signal and confirm EUT active to normal condition

5.5 Power line conducted Emission Limit according to Paragraph 15.207

Frequency	Limits (dB μ V)			
(MHz)	Quasi-peak Level	Average Level		
$0.15 \sim 0.50$	66.0~56.0*	56.0~46.0*		
$0.50 \sim 5.00$	56.0	46.0		
5.00 ~ 30.00	60.0	50.0		

Notes:

- 1. *Decreasing linearly with logarithm of frequency.
- 2. The tighter limit shall apply at the transition frequencies

5.6 Test Results

The frequency spectrum from 0.15MHz to 30MHz was investigated. All reading are quasi-peak values with a resolution bandwidth of 9kHz.

Note: Only the worst case was recorded in the test report.

Report No.: TW2211112-03E

Date: 2022-12-09



Conducted Emission on Live Terminal (150kHz to 30MHz) A:


EUT Operating Environment

Temperature: 26℃ Humidity: 65%RH Atmospheric Pressure: 101 kPa

EUT set Condition: Keep WIFI Transmitting

Results: Pass

Please refer to following diagram for individual

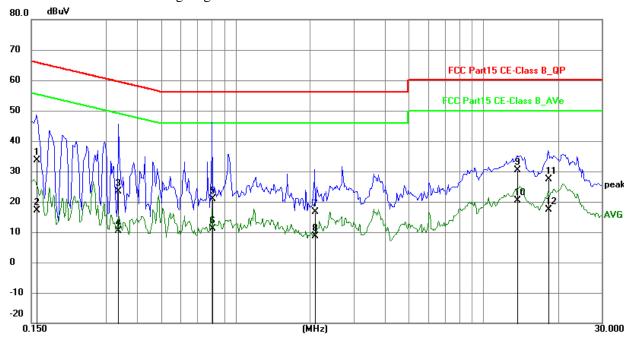

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1578	23.90	9.78	33.68	65.58	-31.90	QP	Р
2	0.1578	7.24	9.78	17.02	55.58	-38.56	AVG	Р
3	0.3372	13.59	9.76	23.35	59.27	-35.92	QP	Р
4	0.3372	0.62	9.76	10.38	49.27	-38.89	AVG	Р
5	0.8052	11.16	9.78	20.94	56.00	-35.06	QP	Р
6	0.8052	1.37	9.78	11.15	46.00	-34.85	AVG	Р
7	2.0883	6.94	9.80	16.74	56.00	-39.26	QP	Р
8	2.0883	-1.07	9.80	8.73	46.00	-37.27	AVG	Р
9	13.6548	20.08	10.32	30.40	60.00	-29.60	QP	Р
10	13.6548	10.09	10.32	20.41	50.00	-29.59	AVG	Р
11	18.2958	16.86	10.58	27.44	60.00	-32.56	QP	Р
12	18.2958	6.70	10.58	17.28	50.00	-32.72	AVG	Р

Date: 2022-12-09



B: Conducted Emission on Neutral Terminal (150kHz to 30MHz)


EUT Operating Environment

Temperature: 26°C Humidity: 65%RH Atmospheric Pressure: 101 kPa

EUT set Condition: Keep WIFI Transmitting

Results: Pass

Please refer to following diagram for individual

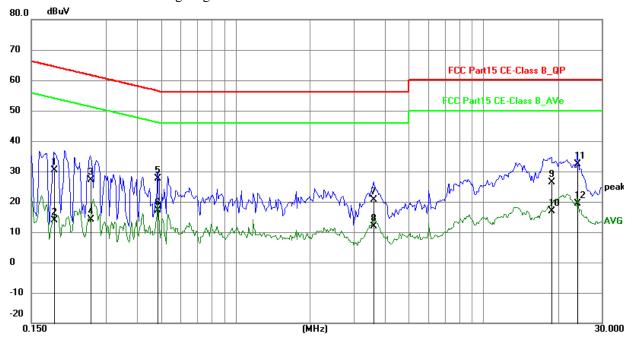

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1850	20.67	9.76	30.43	64.26	-33.83	QP	Р
2	0.1850	4.10	9.76	13.86	54.26	-40.40	AVG	Р
3	0.2592	17.31	9.75	27.06	61.46	-34.40	QP	Р
4	0.2592	4.34	9.75	14.09	51.46	-37.37	AVG	Р
5	0.4854	17.79	9.77	27.56	56.25	-28.69	QP	Р
6	0.4854	7.30	9.77	17.07	46.25	-29.18	AVG	Р
7	3.6045	10.82	9.87	20.69	56.00	-35.31	QP	Р
8	3.6045	2.06	9.87	11.93	46.00	-34.07	AVG	Р
9	18.8457	15.87	10.61	26.48	60.00	-33.52	QP	Р
10	18.8457	6.36	10.61	16.97	50.00	-33.03	AVG	Р
11	23.9703	21.46	10.93	32.39	60.00	-27.61	QP	Р
12	23.9703	8.41	10.93	19.34	50.00	-30.66	AVG	Р

Report No.: TW2211112-03E Page 13 of 86

Date: 2022-12-09




6 Radiated Emission Test

- 6.1 Test Method and test Procedure:
- (1) The EUT was tested according to ANSI C63.10-2013. The radiated test was performed at Timeway EMC Laboratory. This site is on file with the FCC laboratory division, Registration No. 744189
- (2) The EUT, peripherals were put on the turntable which table size is 1m x 1.5 m, table high 0.8 m. All set up is according to ANSI C63.10-2013.
- (3) The frequency spectrum from 30 MHz to 25 GHz was investigated. All readings from 30 MHz to 1 GHz are Quasi-peak values with a resolution bandwidth of 120 kHz. F For measurement above 1GHz, peak values with RBW=1MHz VBW=3MHz and PK detector. AV value with RBW=1MHz, VBW=3MHz and RMS detector. Measurements were made at 3 meters.
- (4) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (5) Maximizing procedure was performed on the six (6) highest emissions to ensure EUT compliance is with all installation combinations. All data was recorded in the peak detection mode. Quasi-peak readings was performed only when an emission was found to be marginal (within -4 dB of specification limit), and are distinguished with a "QP" in the data table.
- (6) The antenna polarization: Vertical polarization and Horizontal polarization.

Block diagram of Test setup

For radiated emissions from 9kHz to 30MHz

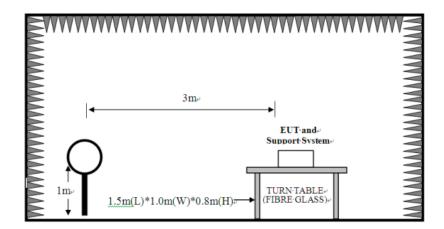


Report No.: TW2211112-03E


Date: 2022-12-09



For radiated emissions from 30MHz to1GHz

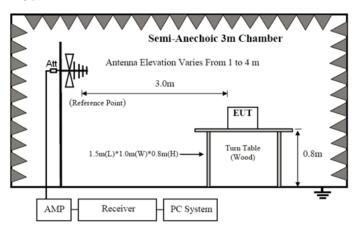

For radiated emissions above 1GHz

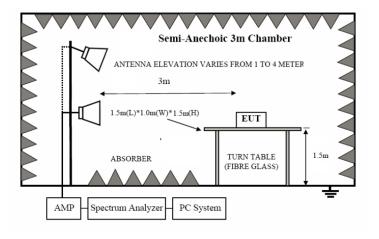

- 6.2 Configuration of The EUT
 Same as section 5.3 of this report
- 6.3 EUT Operating Condition

 Same as section 5.4 of this report.
- 6.4 Radiated Emission Limit

All emission from a digital device, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strength specified below:

Report No.: TW2211112-03E Page 15 of 86

Date: 2022-12-09



Frequencies in restricted band are complied to limit on Paragraph 15.209

	<u> </u>	8 1
Frequency Range (MHz)	Distance (m)	Field strength (dB μ V/m)
0.009-0.049	3	20log(2400/F(kHz)) +40log (300/3)
0.490-1.705	3	20log(24000/F(kHz)) +40log (30/3)
1.705-30	3	69.5
30-88	3	40.0
88-216	3	43.5
216-960	3	46.0
Above 960	3	54.0

Note:

- 1. RF Voltage $(dBuV) = 20 \log RF \text{ Voltage } (uV)$
- 2. In the Above Table, the tighter limit applies at the band edges.
- 3. Distance refers to the distance in meters between the measuring instrument antenna and the EUT
- 4. All scanning using PK detector. And the final emission level was get using QP detector for frequency range from 30-1000MHz.As to 1G-25G, the final emission level got using PK. For fundamental measurement, PK detector used.
- 5. For radiated emissions from 9kHz to 30MHz, the emission level is much less than the limit for more than 20dB. No necessary to take down the record.
- 6. Worse case were recorded in the test report. 802.11g was the worst case.
- 7. This is a handhold device. The radiated emissions should be tested under 3-axes position (Lying, Side, and Stand), After pre-test. It was found that the worse radiated emission was get at the lying position.

Page 16 of 86

Report No.: TW2211112-03E

Date: 2022-12-09




Test result General Radiated Emission Data and Harmonics Radiated Emission Data

Radiated Emission In Horizontal (30MHz----1000MHz)

EUT set Condition: Keep Transmitting

Results: Pass

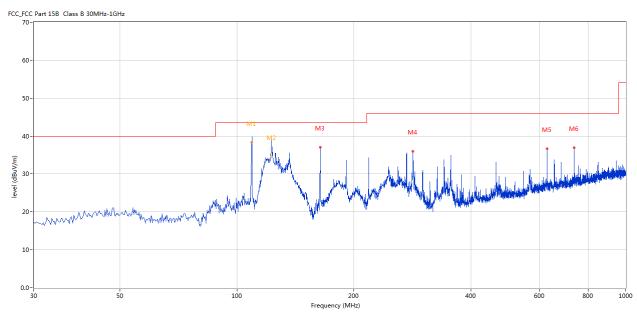

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
1*	109.183	38.41	-13.56	43.5	-5.09	QP	360.00	194	Horizontal	Pass
2*	122.853	34.59	-15.86	43.5	-8.91	QP	360.00	119	Horizontal	Pass
3	163.827	37.02	-16.31	43.5	-6.48	Peak	346.00	200	Horizontal	Pass
4	283.349	35.99	-11.38	46.0	-10.01	Peak	0.00	100	Horizontal	Pass
5	627.856	36.63	-4.97	46.0	-9.37	Peak	360.00	200	Horizontal	Pass
6	736.953	36.86	-3.60	46.0	-9.14	Peak	360.00	200	Horizontal	Pass

Page 17 of 86 Report No.: TW2211112-03E

Date: 2022-12-09




Test result General Radiated Emission Data and Harmonics Radiated Emission Data

Radiated Emission In Vertical (30MHz----1000MHz)

EUT set Condition: Keep Transmitting

Results: Pass

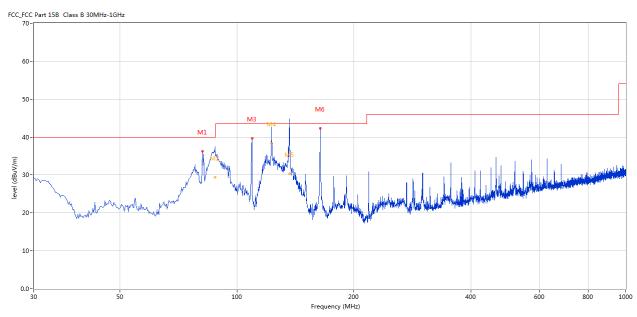

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	81.640	36.29	-17.22	40.0	-3.71	Peak	178.00	100	Vertical	Pass
2*	87.879	29.34	-15.67	40.0	-10.66	QP	30.00	179	Vertical	Pass
3	109.278	39.65	-13.56	43.5	-3.85	Peak	310.00	100	Vertical	Pass
4*	122.846	38.38	-15.83	43.5	-5.12	QP	235.00	107	Vertical	Pass
5*	136.481	30.27	-17.16	43.5	-13.23	QP	0.00	100	Vertical	Pass
6	163.827	42.30	-16.31	43.5	-1.20	Peak	356.00	100	Vertical	Pass

Page 18 of 86


Report No.: TW2211112-03E

Date: 2022-12-09



Please refer to the following test plots for details:

CH01 for 11g at 6Mbps: Horizontal

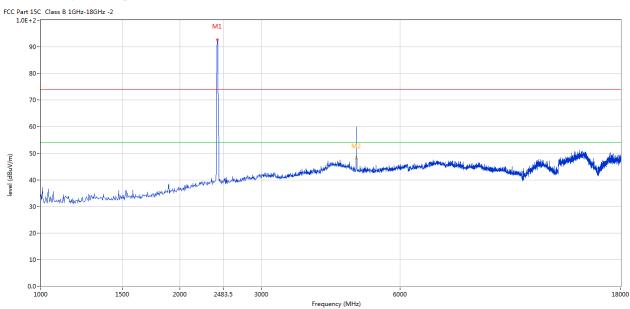


No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	2410.647	92.73	-3.57	74.0	18.73	Peak	300.00	100	Horizontal	N/A
2	4824.044	59.80	3.14	74.0	-14.20	Peak	300.00	100	Horizontal	Pass
2**	4824.044	47.78	3.14	54.0	-6.22	AV	300.00	100	Horizontal	Pass

Page 19 of 86 Report No.: TW2211112-03E

Date: 2022-12-09



CH01 for 11g at 6Mbps: Vertical

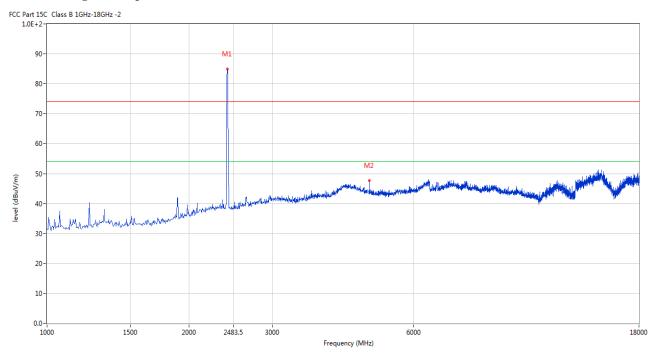


No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
1	2410.647	84.99	-3.57	74.0	10.99	Peak	162.00	100	Vertical	N/A
2	4824.044	47.66	3.14	74.0	-26.34	Peak	182.00	100	Vertical	Pass

Page 20 of 86 Report No.: TW2211112-03E

Date: 2022-12-09



CH06 for 11g at 6Mbps: Horizontal

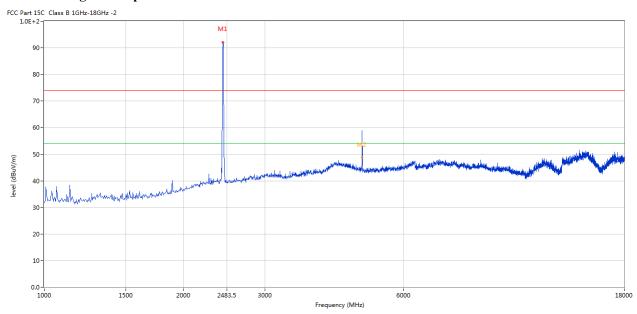


No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	2436.141	92.16	-3.57	74.0	18.16	Peak	113.00	100	Horizontal	N/A
2	4875.031	58.89	3.19	74.0	-15.11	Peak	113.00	100	Horizontal	Pass
2**	4875.031	48.81	3.19	54.0	-5.19	AV	113.00	100	Horizontal	Pass

Page 21 of 86 Report No.: TW2211112-03E

Date: 2022-12-09



CH06 for 11g at 6Mbps: Vertical

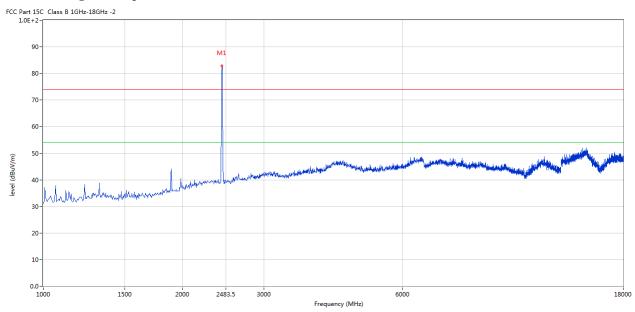


No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	2436.141	82.77	-3.57	74.0	8.77	Peak	164.00	100	Vertical	N/A

Page 22 of 86 Report No.: TW2211112-03E

Date: 2022-12-09



CH11 for 11g at 6Mbps: Horizontal

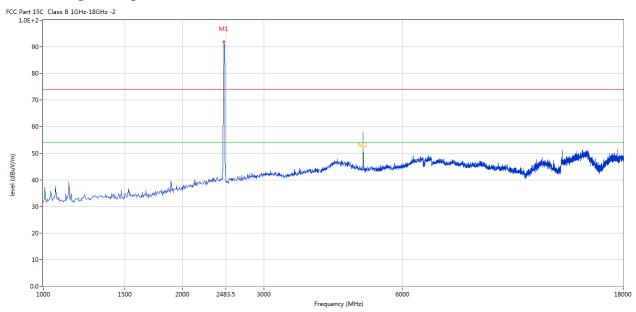


No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	2461.635	91.89	-3.57	74.0	17.89	Peak	125.00	100	Horizontal	N/A
2	4921.770	58.06	3.27	74.0	-15.94	Peak	305.00	100	Horizontal	Pass
2**	4921.770	48.02	3.27	54.0	-5.98	AV	305.00	100	Horizontal	Pass

Report No.: TW2211112-03E Page 23 of 86

Date: 2022-12-09



CH11 for 11g at 6Mbps: Vertical

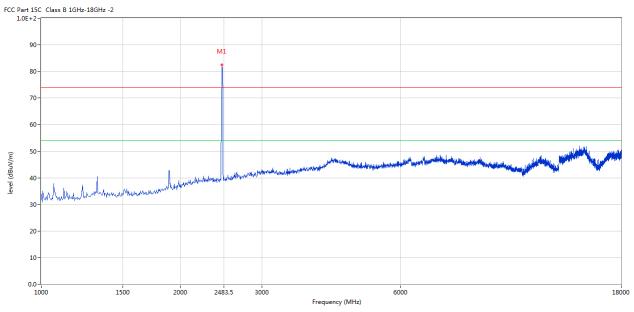

N	o. Frequency	Results	Factor	Limit	Over	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	Limit (dB)		(o)	(cm)		
1	2461.635	82.54	-3.57	74.0	8.54	Peak	355.00	100	Vertical	N/A

Note: 1. Result Level = Reading + Factor

- 2. Factor= AF + Cable Loss- Preamp
- 3. Margin = Result– Limit
- 4. For radiated Emissions from 18-25GHz and below 30MHz, it is only the floor noise and less than the limit for more than 20dB. No necessary to take down.
- 5. Note: the final peak measurement results less than the AV limit. No necessary to take down the final AV measurement result

Page 24 of 86


Report No.: TW2211112-03E

Date: 2022-12-09



7.0 6dB Bandwidth Measurement

7.1 Test Setup



7.2 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is >500 kHz

7.3 Test Procedure

- 1. Set resolution bandwidth (RBW) = 100 kHz
- 2. Set the video bandwidth (VBW) \geq 3 x RBW.
- 3. Detector = Peak.
- 4. Trace mode = \max hold.
- 5. Sweep = auto couple.
- 6. Allow the trace to stabilize.
- 7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

7.4 Test Result

Report No.: TW2211112-03E Page 25 of 86

Date: 2022-12-09



6dB Occupied Bandwidth


EUT			Tablet P	С	Model]	M-TA7
Mode			802.111)	Test Voltage	Ι	OC5.0V
Temperat	ure		24 deg. (C,	Humidity	56% RH	
Channel		el Frequency (MHz)	Data Transfer Rate (Mbps)	6 dB Bandwidth (MHz)	Minimum (MHz		Pass/ Fail
1		2412	1	9.05	0.5	0.5	
6		2437 1		9.02	0.5		Pass
11		2462	1	9.02	0.5		Pass
1		2412	11	8.74	0.5		Pass
6		2437	11	8.84	0.5		Pass
11		2462	11 9.50		0.5		Pass

Report No.: TW2211112-03E Page 26 of 86

Date: 2022-12-09



1. 802.11b at 1Mbps of CH01

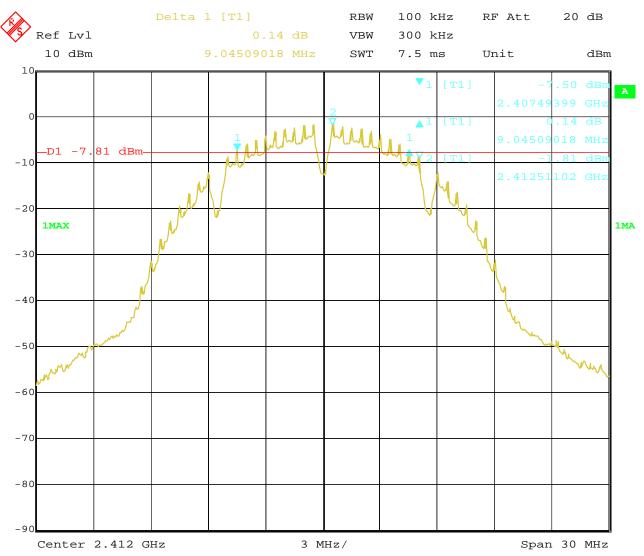


Date: 5.DEC.2022 15:23:28 Report No.: TW2211112-03E Page 27 of 86

Date: 2022-12-09



2. 802.11b at 1Mbps of CH06

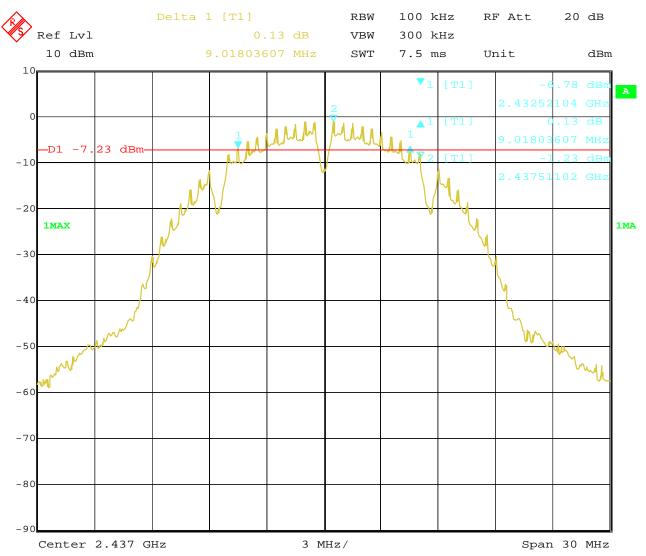


Date: 5.DEC.2022 16:18:42 Report No.: TW2211112-03E Page 28 of 86

Date: 2022-12-09



3. 802.11b at 1Mbps of CH11

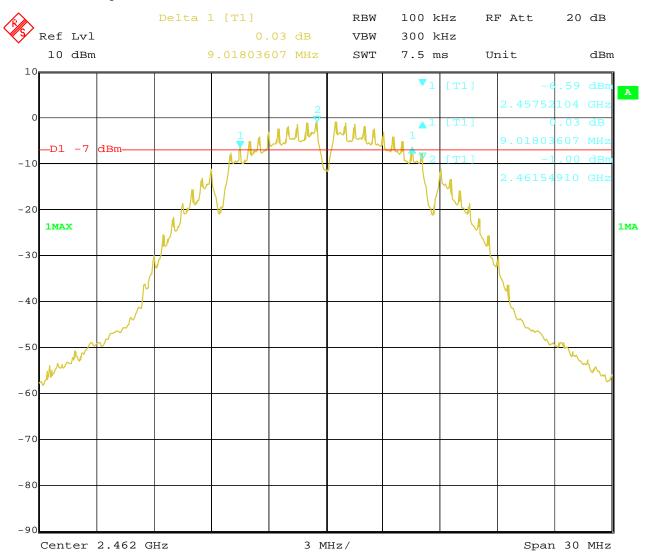


Date: 5.DEC.2022 16:27:36 Report No.: TW2211112-03E Page 29 of 86

Date: 2022-12-09



4. 802.11b at 11Mbps of CH01

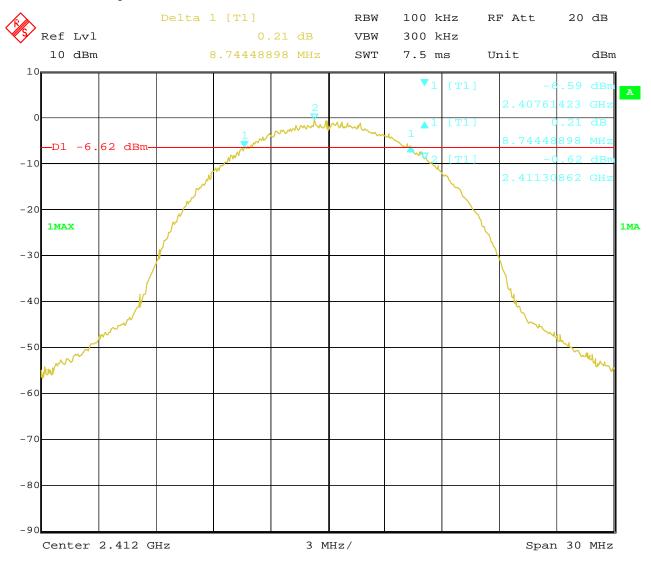


Date: 5.DEC.2022 15:39:45 Report No.: TW2211112-03E Page 30 of 86

Date: 2022-12-09



5. 802.11b at 11Mbps of CH06

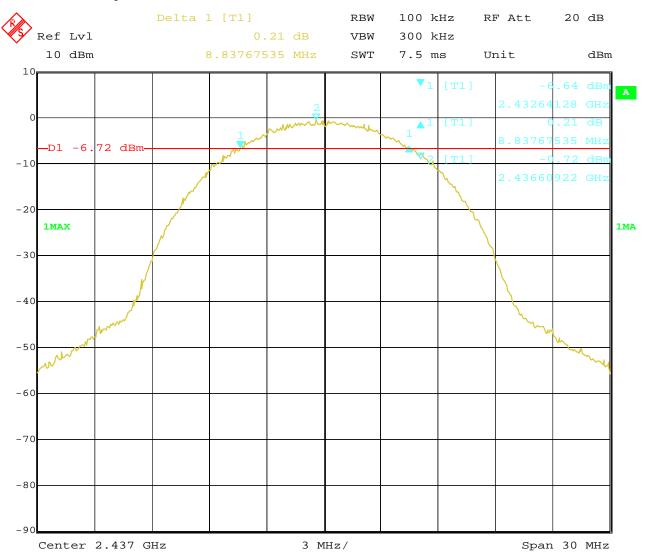


Date: 5.DEC.2022 16:01:08 Report No.: TW2211112-03E Page 31 of 86

Date: 2022-12-09



6. 802.11b at 11Mbps of CH11

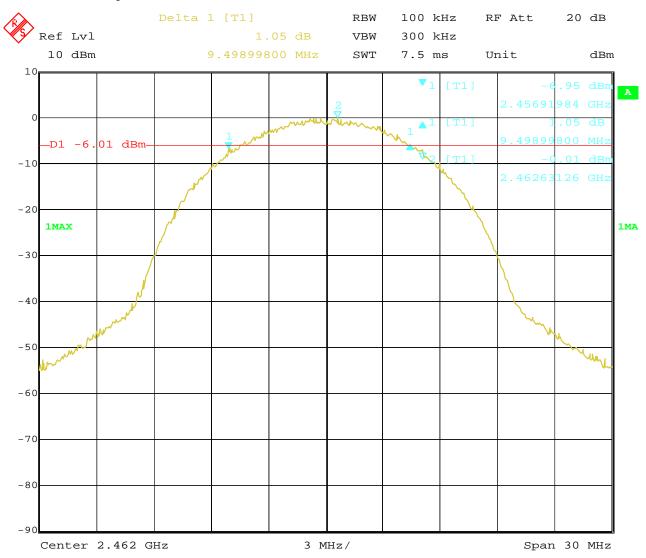

Date: 5.DEC.2022 16:47:01 Report No.: TW2211112-03E Page 32 of 86

Date: 2022-12-09



6dB Occupied Bandwidth

EUT			Tablet P	PC	Model	M-TA7
Mode			802.11	g	Test Voltage	DC5.0V
Temperat	ure		24 deg.	C,	Humidity	56% RH
Channel		el Frequency (MHz)	Data Transfer Rate (Mbps)	6 dB Bandwidth (MHz)	Minimum Lim (MHz)	it Pass/ Fail
1		2412	6	16.44	0.5	Pass
6		2437	6	16.35	0.5	Pass
11		2462	6	16.35	0.5	Pass


Report No.: TW2211112-03E Page 33 of 86

Date: 2022-12-09



Test Plots:

1. 802.11g at 6Mbps of CH01

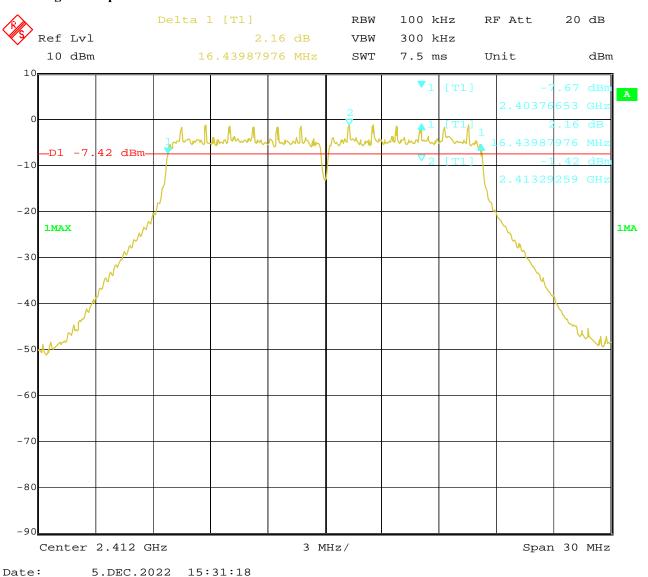


Report No.: TW2211112-03E Page 34 of 86

Date: 2022-12-09



2. 802.11g at 6Mbps of CH06

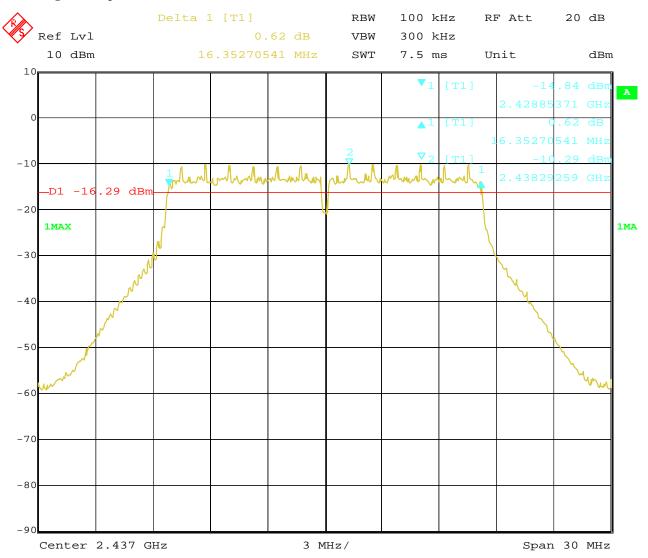


Date: 5.DEC.2022 16:15:25 Report No.: TW2211112-03E Page 35 of 86

Date: 2022-12-09



3. 802.11g at 6Mbps of CH11

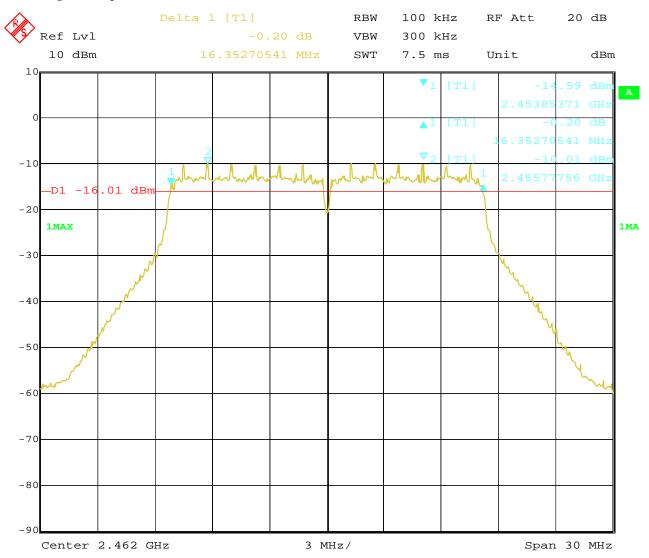

Date: 5.DEC.2022 16:35:49 Report No.: TW2211112-03E Page 36 of 86

Date: 2022-12-09



6dB Occupied Bandwidth

EUT		Tablet PC			Model	M-TA7	
Mode		802.11n HT20			Test Voltage	DC5.0V	
Temperature		24 deg. C,			Humidity	56% RH	
Channel	Channel Frequency (MHz)		Data Transfer Rate (Mbps)	6 dB Bandwidth (MHz)		Minimum Limit (MHz)	
1		2412	mcs0	17.56	0.5	0.5	
6		2437	mcs0	17.56	0.5		Pass
11		2462	mcs0	17.56	0.5	0.5	


Report No.: TW2211112-03E Page 37 of 86

Date: 2022-12-09



Test Plots:

1. 802.11n at HT20 of CH01

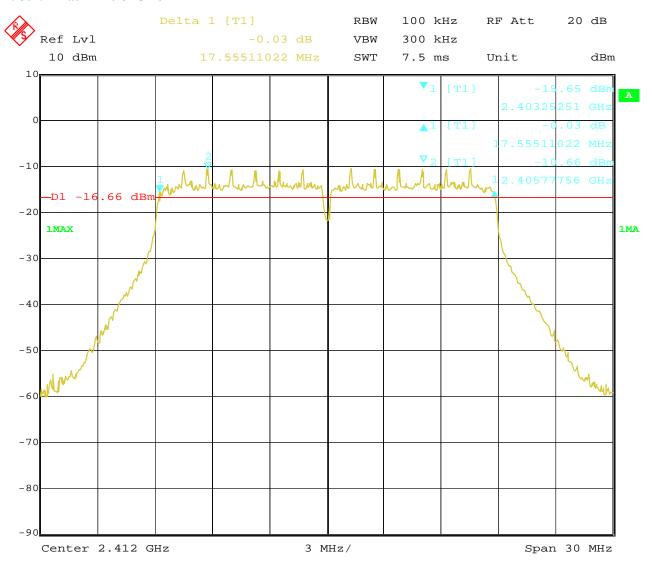


5.DEC.2022 17:39:36 Date:

Report No.: TW2211112-03E Page 38 of 86

Date: 2022-12-09



2. 802.11n at HT20 of CH06

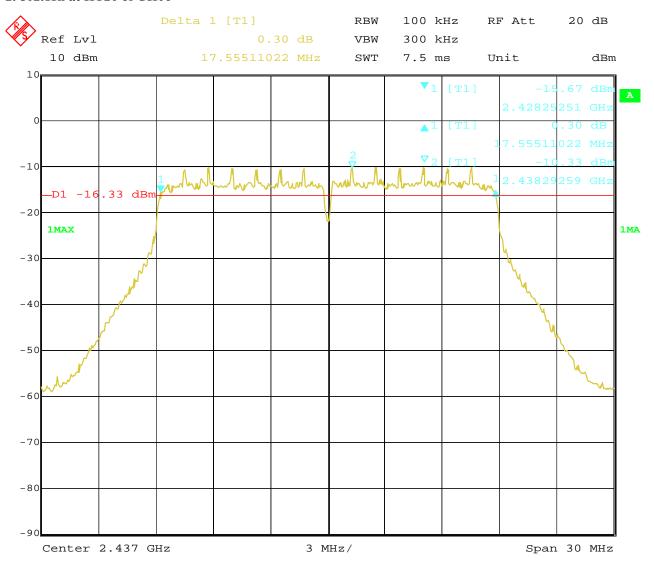


Date: 5.DEC.2022 17:37:45 Report No.: TW2211112-03E Page 39 of 86

Date: 2022-12-09



3. 802.11n at HT20 of CH11

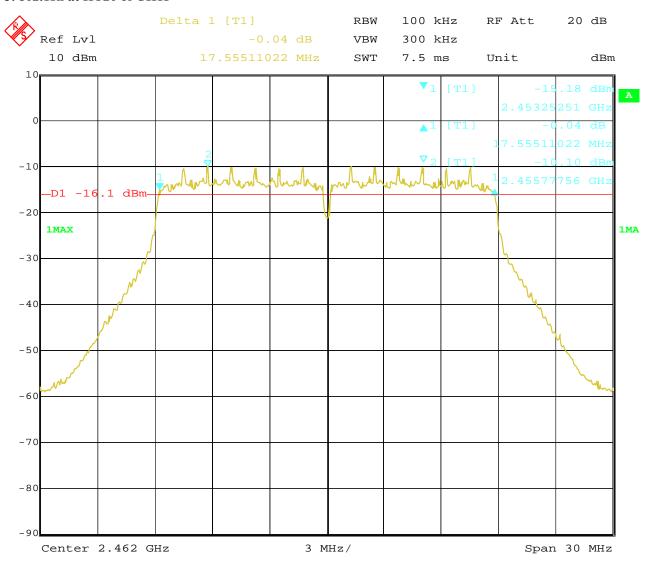

Date: 5.DEC.2022 17:08:30 Report No.: TW2211112-03E Page 40 of 86

Date: 2022-12-09



6dB Occupied Bandwidth

EUT			С	Model		M-TA7	
Mode			802.11n H	T40	Test Voltage	est Voltage DC5.0	
Temperati	ure		24 deg. (C,	Humidity		56% RH
Channel		el Frequency (MHz)	Data Transfer Rate (Mbps)	6 dB Bandwidth (MHz)	Minimum Lin	nit	Pass/ Fail
3		2422	mcs0	35.95	0.5		Pass
6		2437		35.76	0.5		Pass
9	2452		mcs0	35.79	0.5		Pass

Page 41 of 86


Report No.: TW2211112-03E

Date: 2022-12-09



Test Plots:

1. 802.11n at HT40 of CH03

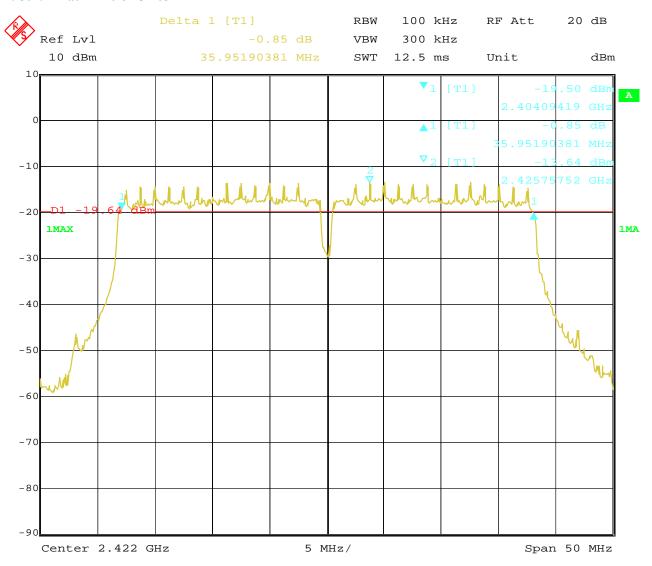


5.DEC.2022 17:45:20 Date:

Report No.: TW2211112-03E Page 42 of 86

Date: 2022-12-09



2. 802.11n at HT40 of CH06

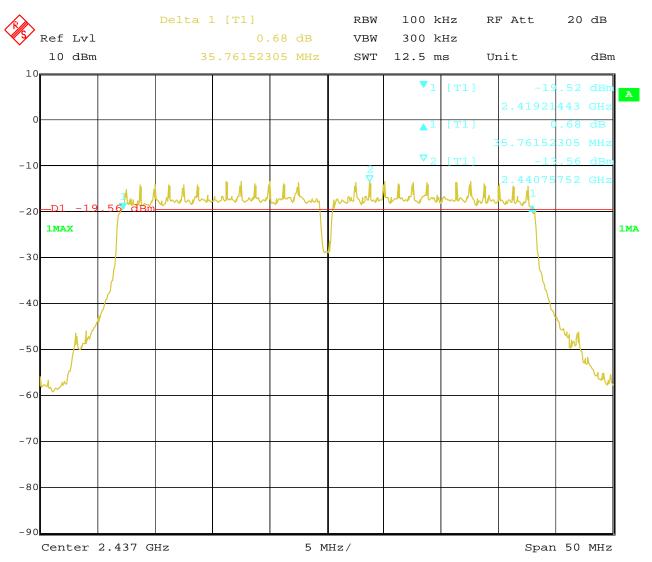


Date: 5.DEC.2022 17:48:52 Report No.: TW2211112-03E Page 43 of 86

Date: 2022-12-09



3. 802.11n at HT40 of CH09

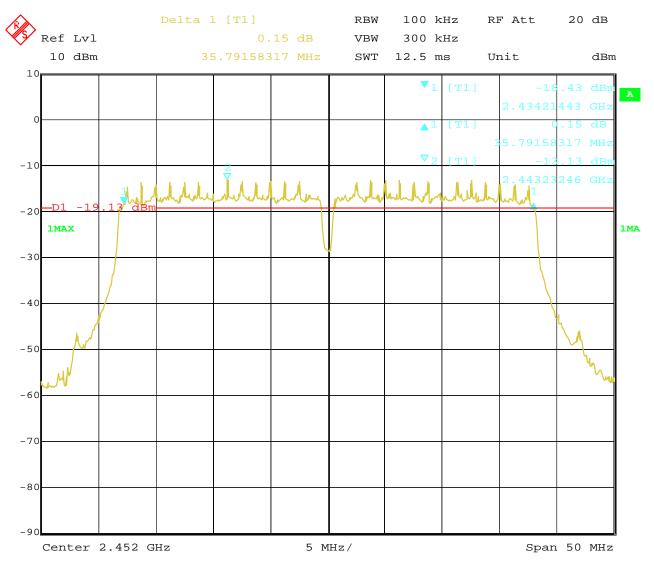

Date: 5.DEC.2022 17:53:03 Report No.: TW2211112-03E


Date: 2022-12-09



Page 44 of 86

8. Maximum Output Power

8.1 Test Setup



8.2 Limits of Maximum Output Power

The Maximum Output Power Measurement is 30dBm.

8.3 Test Procedure

The RF power output was measured with a Power meter connected to the RF Antenna connector (conducted measurement) while EUT was operating in transmit mode at the appropriate centre frequency.

Note: The AV power was measured

Page 45 of 86

Report No.: TW2211112-03E

Date: 2022-12-09



8.4Test Results

EUT		Tablet PC		Model		M-TA7	
Mode			802.11b	Test Voltage		DC5.0V	
Temperat	ure		24 deg. C,	Humidity 5		56% RH	
Channel	Freque	uency z)	AV Power (dBm)	Power Lin (dBm)	nit	Pass/ Fail	
1	2412		0.94	30		Pass	
6	2437		0.18	30		Pass	
11	1 2462		0.12	30		Pass	

Note: 1. At finial test to get the worst-case emission at 1Mbps for CH01, CH06 and CH11

2. The result basic equation calculation as follow: Power Output = Power Reading + Cable loss + Attenuator

3. The worse case was recorded

EUT	Т		Tablet PC	Model	M-TA7
Mode	Mode		802.11g	Test Voltage	DC5.0V
Temperat	emperature 24 deg. C,		Humidity	56% RH	
Channel	Channel Frequency (MHz)		AV Power (dBm)	Power Limit (dBm)	Pass/ Fail
1	2412		0.35	30	Pass
6	2437		0.45	30	Pass
11	11 2462		0.20	30	Pass

Note: 1. At finial test to get the worst-case emission at 6Mbps for CH01, CH06 and CH11

- 2. The result basic equation calculation as follow: Power Output = Power Reading + Cable loss + Attenuator
- 3. The worse case was recorded

Report No.: TW2211112-03E Page 46 of 86

Date: 2022-12-09



EUT			Tablet PC		Model		M-TA7	
Mode		802.11n (HT20) Test Voltage		Voltage	DC5.0V			
Temperat	ure		24 deg. C,	Hur	Humidity		56% RH	
Channel	Frequ (MH	uency z)	AV Power (dBm)		Power Lin (dBm)		Pass/ Fail	
1	1 2412		-3.40		30		Pass	
6	6 2437		-3.00	-3.00		30		
11	11 2462		-2.82	-2.82		30		

Note: 1. At finial test to get the worst-case emission at mcs0 of 11n HT20 for CH01, CH06 and CH11

2. The result basic equation calculation as follow: Power Output = Power Reading + Cable loss + Attenuator

3. The worse case was recorded

EUT			Tablet PC		Model		M-TA7	
Mode		802.11n (HT40)		Test V	Test Voltage		DC5.0V	
Temperat	ure		24 deg. C,	Hum	idity 5		56% RH	
Channel	Freque	uency z)	AV Power (dBm)		Power l		Pass/ Fail	
3	2422		-3.32		30		Pass	
6	2437	-3.12		30		Pass		
9	2452		-2.99	-2.99			Pass	

Note: 1. At finial test to get the worst-case emission at msc0 of 11n HT40 for CH03, CH06 and CH09

2. The result basic equation calculation as follow: Power Output = Power Reading + Cable loss + Attenuator

3. The worse case was recorded


Report No.: TW2211112-03E Page 47 of 86

Date: 2022-12-09



9. Power Spectral Density Measurement

9.1 Test Setup



9.2 Limits of Power Spectral Density Measurement

The Maximum Power Spectral Density Measurement is 8dBm/3kHz.

9.3 Test Procedure

- 1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
- 2. Set the RBW = 10 kHz.
- 3. Set the VBW \geq 30 kHz.
- 4. Set the span to 1.5 times the DTS channel bandwidth.
- 5. Detector = peak.
- 6. Sweep time = auto couple.
- 7. Trace mode = max hold.
- 8. Allow trace to fully stabilize.
- 9. Use the peak marker function to determine the maximum amplitude level.
- 10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.
- 11. The resulting peak PSD level must be $\leq 8 \text{ dBm/3kHz}$.

Report No.: TW2211112-03E Page 48 of 86

Date: 2022-12-09



9.4Test Result

EUT			Tablet PC	Model	M-TA7		
Mode		802.11b 11Mbps		Test Voltage	DC:	5.0V	
Temperat	ure		24 deg. C,	Humidity	56%	56% RH	
Channel	Freq	uency	Power Spectral Density (dBm/10kHz)		Limit	Pass/ Fail	
	(M	(Hz)			(dBm/3kHz)		
1	24	412	-14.27		8	Pass	
6	24	137	-13.41		8	Pass	
11	24	162	-13.38		8	Pass	

EUT			Tablet PC	Model	M-T	`A7	
Mode			802.11b 1Mbps	Test Voltage	DC5	.0V	
Temperat	ure		24 deg. C,	Humidity	56%	56% RH	
Channel	Freq	uency	Power Spectral Density (dB	Power Spectral Density (dBm/10kHz)		Pass/ Fail	
	(M	Hz)			(dBm/3kHz)		
1	24	112	-13.00		8	Pass	
6	24	137	-11.99	-11.99		Pass	
11	24	162	-11.73		8	Pass	

EUT			Tablet PC	Model	M-T	A7	
Mode			802.11g 6Mbps	Test Voltage	DC5	DC5.0V	
Temperat	ure		24 deg. C,	Humidity	56%	RH	
Channel	Freq	uency	Power Spectral Density (dBm	n/10kHz)	Limit	Pass/ Fail	
	(M	Hz)			(dBm/3kHz)		
1	24	112	-18.22		8	Pass	
6	24	137	-17.86		8	Pass	
11	24	162	-17.61		8	Pass	

Report No.: TW2211112-03E Page 49 of 86

Date: 2022-12-09



EUT			Tablet PC	Model	M-T	`A7
Mode		802.11n HT20 mcs0		Test Voltage	DC5	.0V
Temperat	ure		24 deg. C,	Humidity	56%	RH
Channel	Freq	uency	Power Spectral Density (dBm	Power Spectral Density (dBm/10kHz)		Pass/ Fail
	(M	Hz)			(dBm/3kHz)	
1	24	112	-18.19		8	Pass
6	24	137	-17.83		8	Pass
11	24	162	-17.61		8	Pass

EUT			Tablet PC	Model	M-T	`A7
Mode		802.11n HT40 mcs0		Test Voltage	DC5	.0V
Temperat	ure	24 deg. C,		Humidity	56%	RH
Channel	Freq	uency	Power Spectral Density (dBm	Power Spectral Density (dBm/10kHz)		Pass/ Fail
	(M	Hz)			(dBm/3kHz)	
3	24	122	-18.06		8	Pass
6	24	137	-17.83		8	Pass
9	24	152	-17.78		8	Pass


Page 50 of 86 Report No.: TW2211112-03E

Date: 2022-12-09



9.5 Photo of Power Spectral Density Measurement

1.802.11b at 11Mbps of CH01

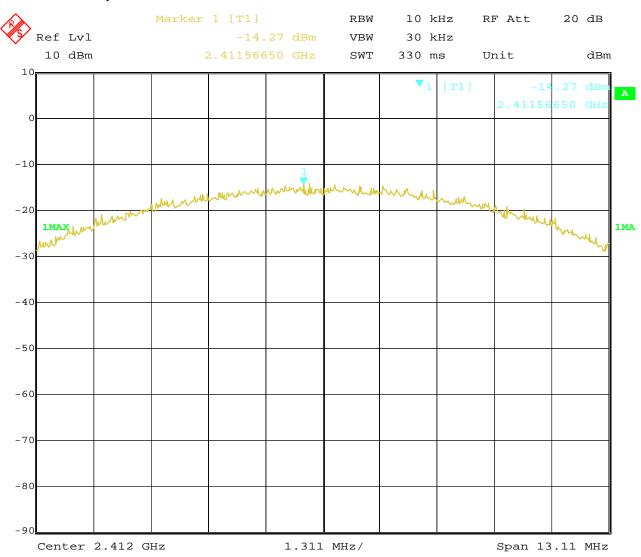


6.DEC.2022 14:56:11 Date:

Report No.: TW2211112-03E Page 51 of 86

Date: 2022-12-09



2. 802.11b at 11Mbps at CH06

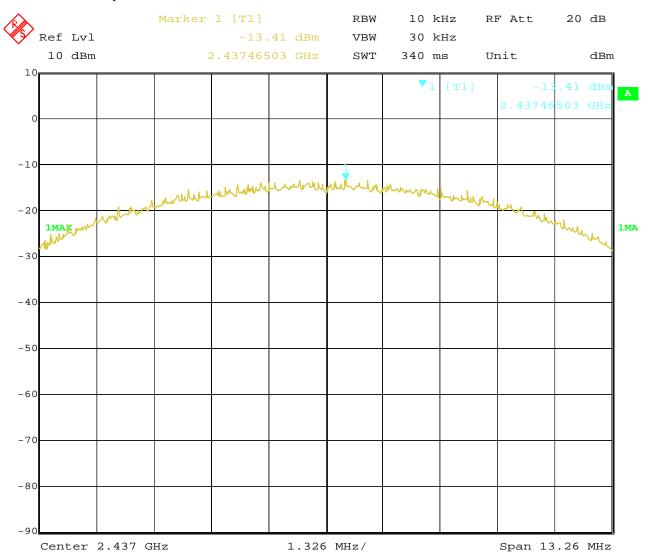


Date: 6.DEC.2022 14:35:08 Report No.: TW2211112-03E Page 52 of 86

Date: 2022-12-09



3. 802.11b at 11Mbps of CH11

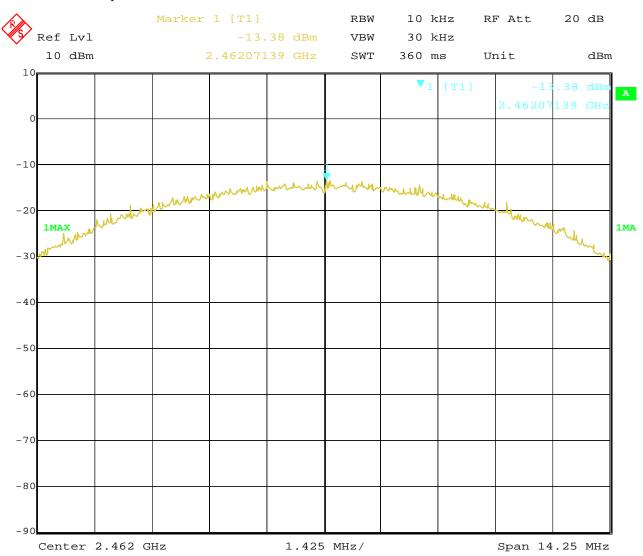


Date: 6.DEC.2022 14:27:21 Report No.: TW2211112-03E Page 53 of 86

Date: 2022-12-09



4. 802.11b at 1Mbps of CH1

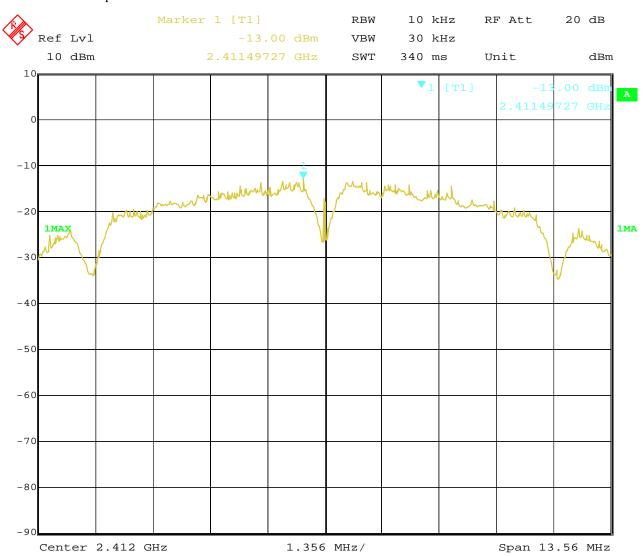

Date: 6.DEC.2022 14:50:01


Page 54 of 86

Report No.: TW2211112-03E

Date: 2022-12-09



5. 802.11b at 1Mbps of CH6

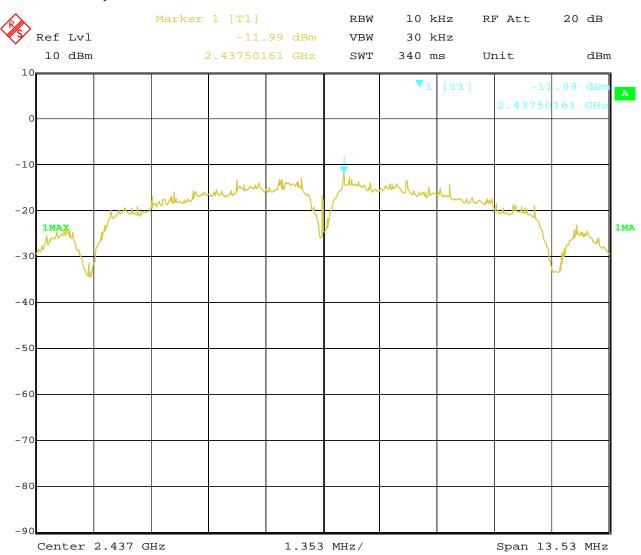


Date: 6.DEC.2022 14:45:54 Page 55 of 86

Report No.: TW2211112-03E

Date: 2022-12-09



6. 802.11b at 1Mbps of CH11

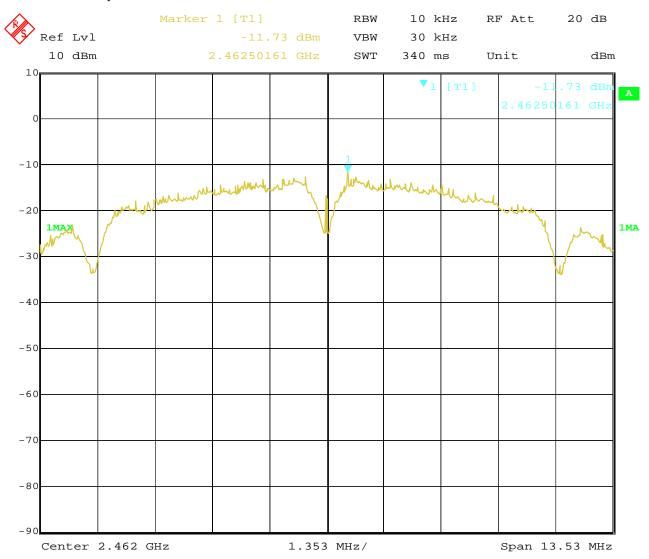

Date: 6.DEC.2022 14:14:07


Page 56 of 86

Report No.: TW2211112-03E

Date: 2022-12-09



7. 802.11g at 6Mbps of CH1

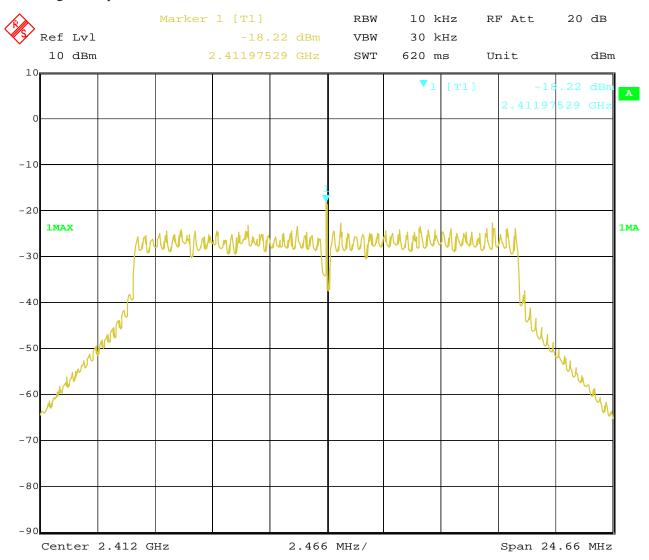

Date: 6.DEC.2022 14:53:24


Page 57 of 86

Report No.: TW2211112-03E

Date: 2022-12-09



8. 802.11g at 6Mbps of CH6

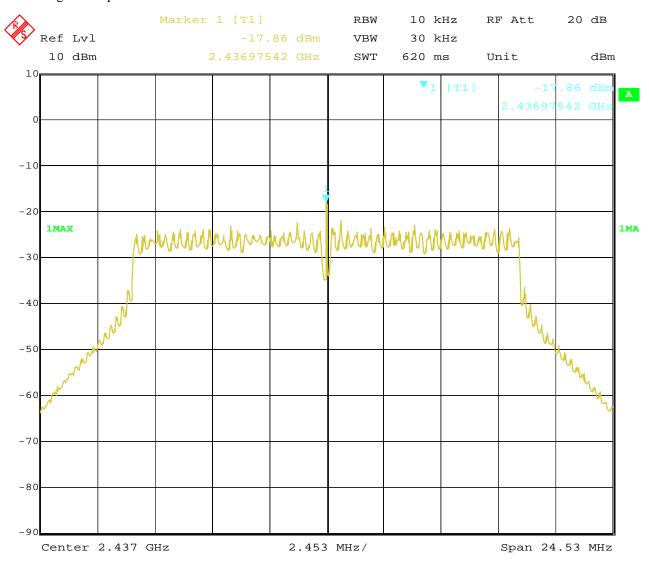

Date: 6.DEC.2022 14:41:10


Page 58 of 86

Report No.: TW2211112-03E

Date: 2022-12-09



9. 802.11g at 6Mbps of CH11

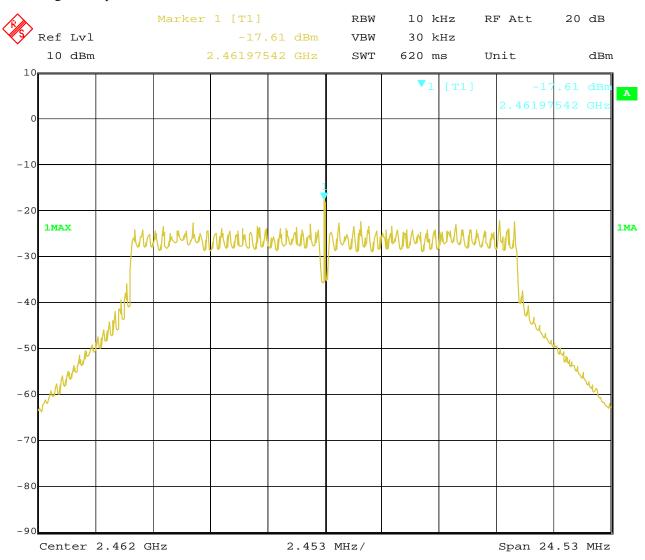

Date: 6.DEC.2022 14:21:50


Page 59 of 86

Report No.: TW2211112-03E

Date: 2022-12-09



10. 802.11n at HT20 of CH01

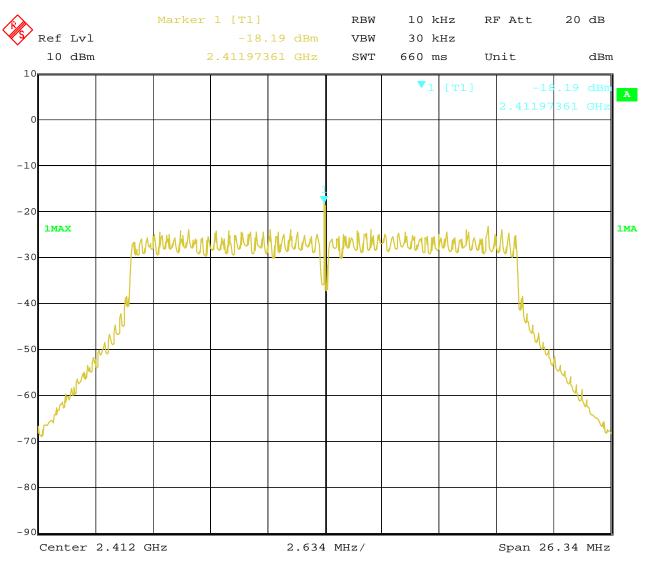


Date: 6.DEC.2022 13:27:22

Page 60 of 86 Report No.: TW2211112-03E

Date: 2022-12-09



11. 802.11n at HT20 of CH06

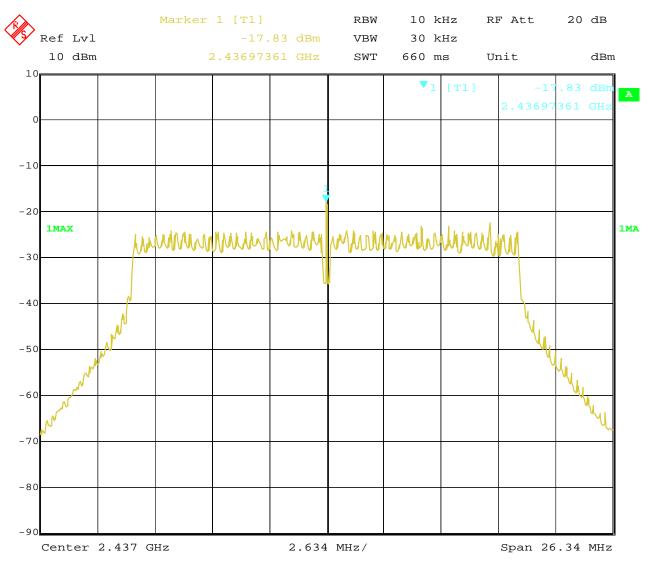


Date: 6.DEC.2022 13:56:08 Report No.: TW2211112-03E Page 61 of 86

Date: 2022-12-09



12. 802.11n at HT20 of CH11

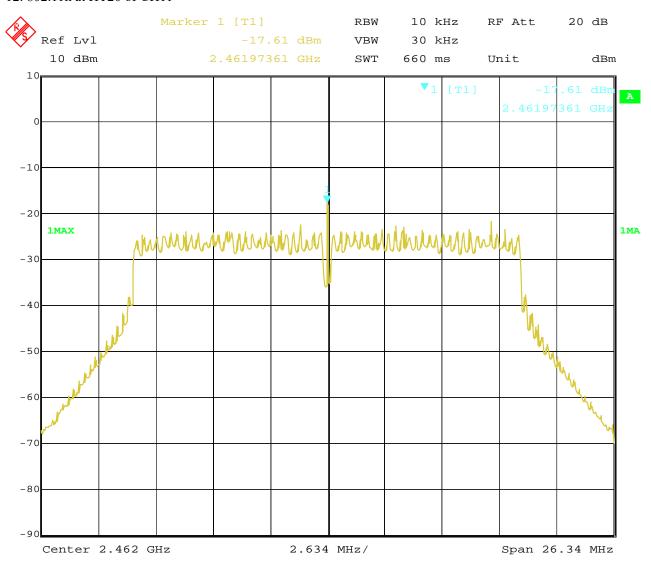


6.DEC.2022 14:07:36 Date:

Report No.: TW2211112-03E Page 62 of 86

Date: 2022-12-09



13. 802.11n at HT40 of CH03

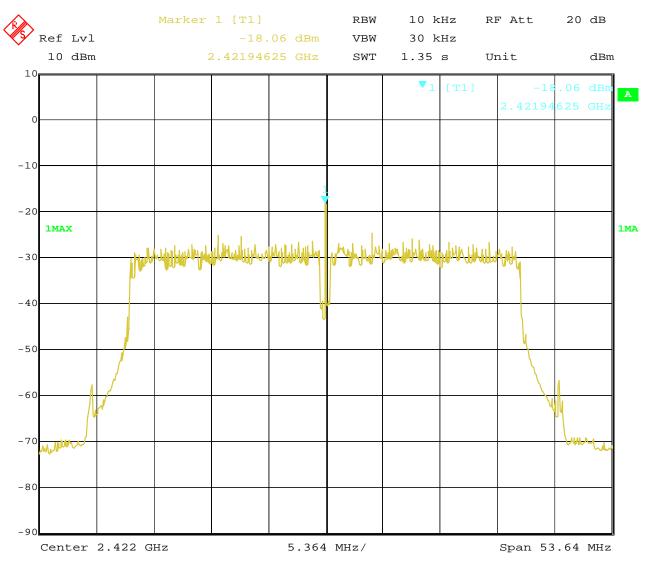


Date: 6.DEC.2022 13:23:26 Report No.: TW2211112-03E Page 63 of 86

Date: 2022-12-09



14. 802.11n at HT40 of CH06

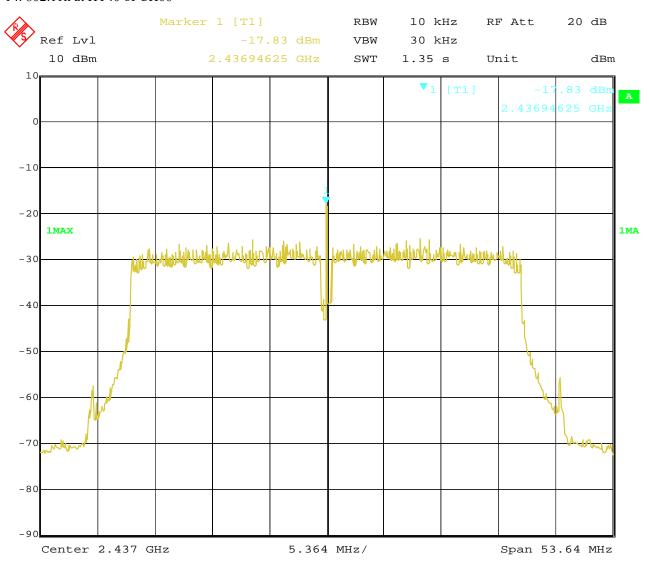


Date: 6.DEC.2022 13:19:01 Report No.: TW2211112-03E Page 64 of 86

Date: 2022-12-09



15. 802.11n at HT40 of CH09

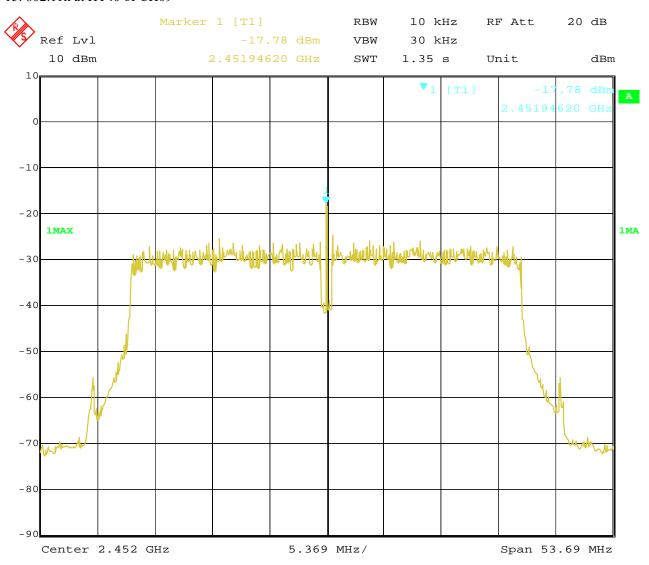


Date: 6.DEC.2022 13:12:25 Report No.: TW2211112-03E Page 65 of 86

Date: 2022-12-09



10 Out of Band Measurement

10.1 Test Setup for band edge



The restricted band requirement based on radiated emission test; please see the clause 6 for the test setup

10.2 Limits of Out of Band Emissions Measurement

- 1. Below –20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).
- 2. Fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209.

10.3 Test Procedure

For signals in the restricted bands above and below the 2.4-2.483GHz allocated band a measurement was made of radiated emission test. (Peak values with RBW=VBW=1MHz and PK detector. AV value with RBW=1MHz, VBW=10Hz and PK detector)

For bandage test, the spectrum set as follows: RBW=100, VBW=300 kHz. A conducted measurement used

10.4 Test Result

Please see next pages

Note: 1. For band-edge measurement, the frequency from 30MHz-25GHz was tested. And It met the FCC rule.

Page 66 of 86

Report No.: TW2211112-03E

Date: 2022-12-09




For 802.11b mode

CH01 at 1Mbps

10.4 Band-edge Measurement

EUT	Tablet PC	Model	M-TA7
Mode	Keeping Transmitting	Test Voltage	DC5.0V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

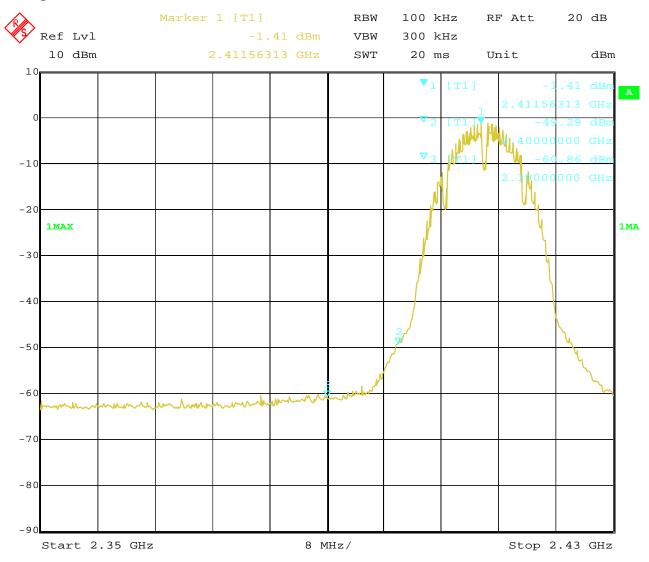

6.DEC.2022 15:38:10 Date:

Page 67 of 86

Report No.: TW2211112-03E

Date: 2022-12-09




CH11 at 1Mbps

10.4 Band-edge Measurement

EUT	Tablet PC	Model	M-TA7
Mode	Keeping Transmitting	Test Voltage	DC5.0V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

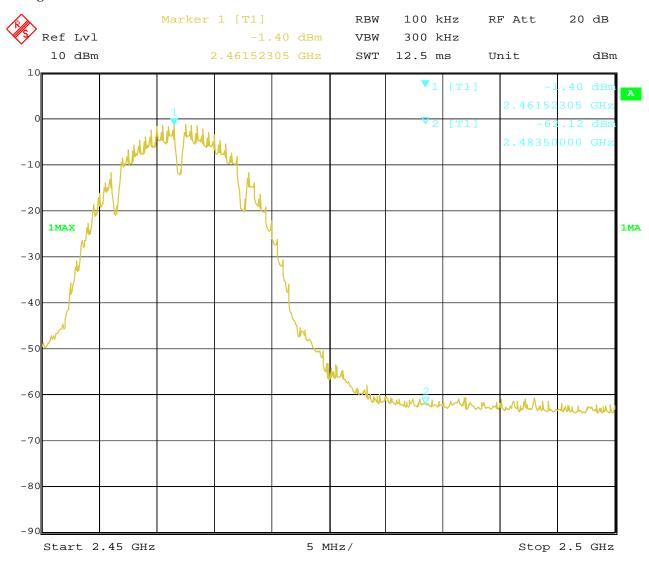

6.DEC.2022 15:40:38 Date:

Page 68 of 86

Report No.: TW2211112-03E

Date: 2022-12-09




For 802.11b mode

CH01 at 11Mbps

10.4 Band-edge Measurement

EUT	Tablet PC	Model	M-TA7
Mode	Keeping Transmitting	Test Voltage	DC5.0V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

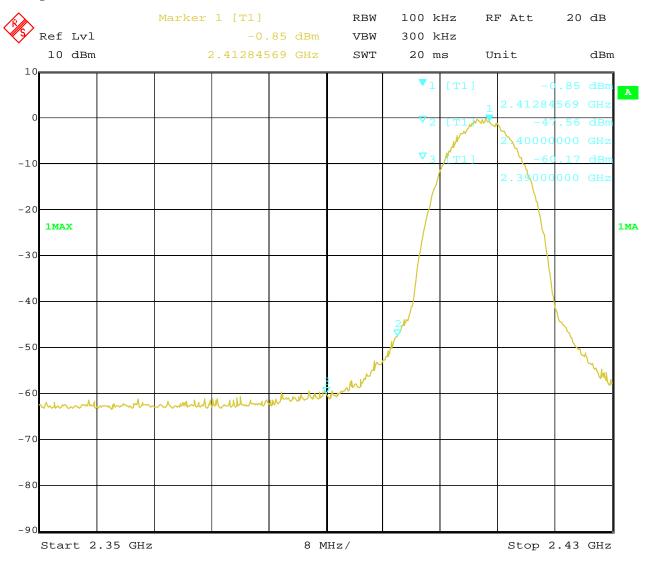

6.DEC.2022 15:19:25 Date:

Page 69 of 86

Report No.: TW2211112-03E

Date: 2022-12-09




CH11 at 11Mbps

10.4 Band-edge Measurement

EUT	Tablet PC	Model	M-TA7
Mode	Keeping Transmitting	Test Voltage	DC5.0V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

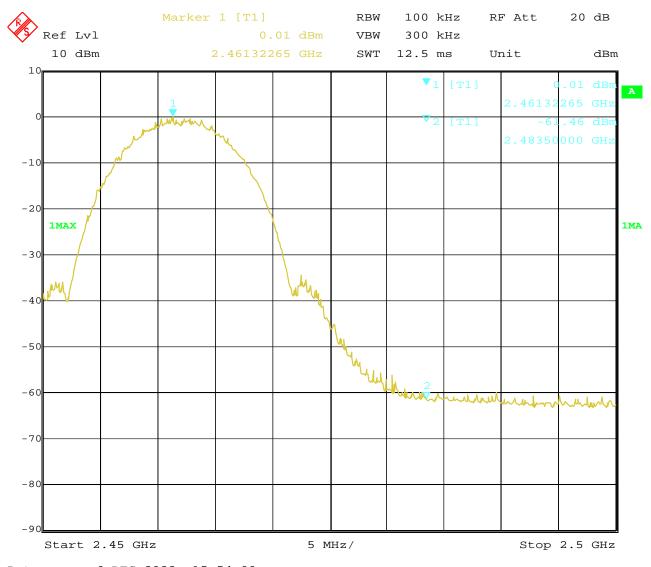

6.DEC.2022 15:54:09 Date:

Page 70 of 86

Report No.: TW2211112-03E

Date: 2022-12-09




For 802.11g mode

CH01 at 6Mbps

10.4 Band-edge Measurement

EUT	Tablet PC	Model	M-TA7
Mode	Keeping Transmitting	Test Voltage	DC5.0V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

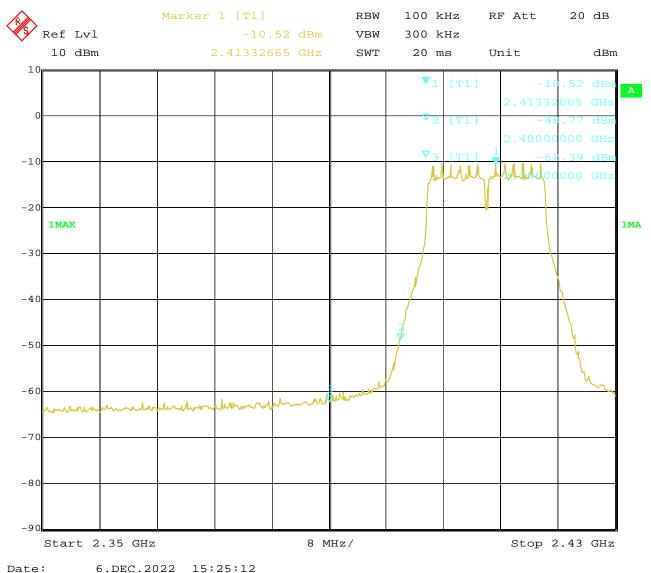

Date:

Page 71 of 86

Report No.: TW2211112-03E

Date: 2022-12-09




CH11 at 6Mbps

Band-edge Measurement 10.4

EUT	Tablet PC	Model	M-TA7
Mode	Keeping Transmitting	Test Voltage	DC5.0V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

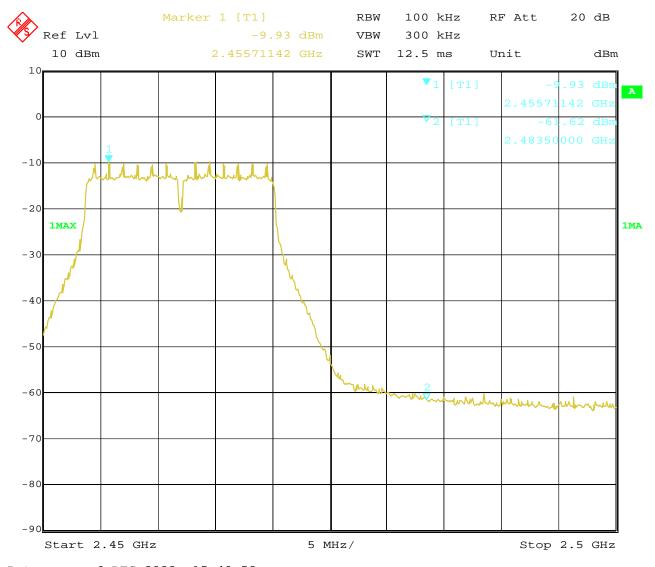

6.DEC.2022 Date: 15:49:52

Page 72 of 86

Report No.: TW2211112-03E

Date: 2022-12-09




For 802.11n (HT20) mode

CH01 at mcs0

10.4 Band-edge Measurement

EUT	Tablet PC	Model	M-TA7
Mode	Keeping Transmitting	Test Voltage	DC5.0V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

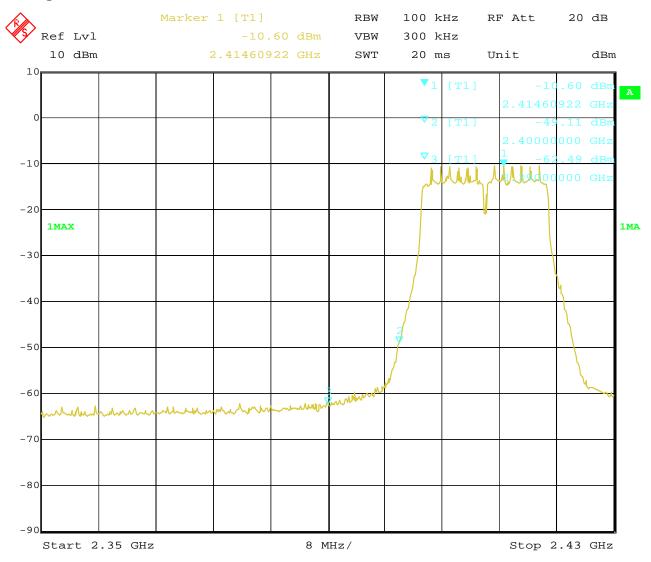

6.DEC.2022 15:58:06 Date:

Page 73 of 86

Report No.: TW2211112-03E

Date: 2022-12-09




CH11 at mcs0

10.4 Band-edge Measurement

EUT	Tablet PC	Model	M-TA7
Mode	Keeping Transmitting	Test Voltage	DC5.0V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

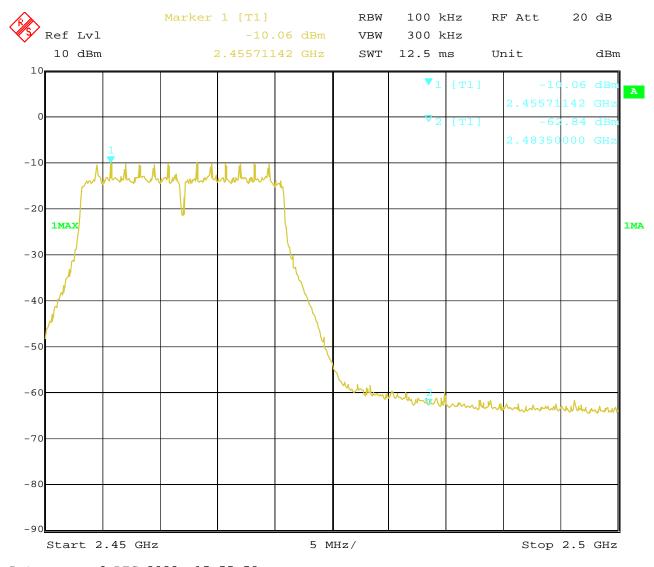

6.DEC.2022 Date: 15:55:58

Page 74 of 86

Report No.: TW2211112-03E

Date: 2022-12-09




For 802.11n (HT40) mode

CH03 at msc0

10.4 Band-edge and Restricted band Measurement

EUT	Tablet PC	Model	M-TA7
Mode	Keeping Transmitting	Test Voltage	DC5.0V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

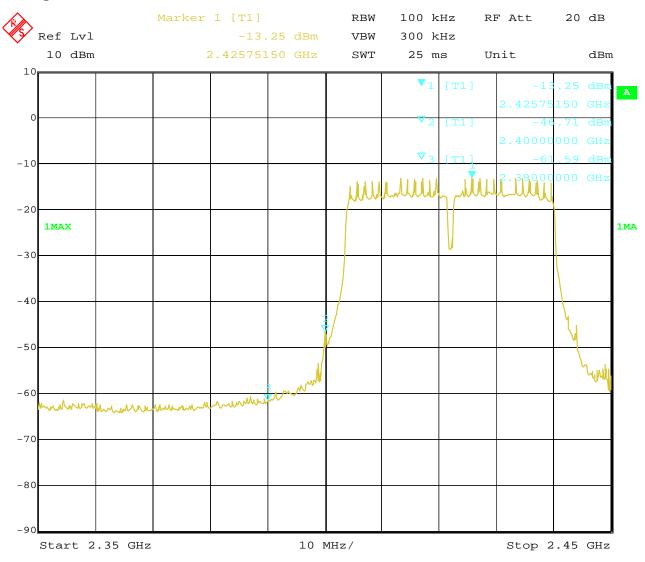

Date: 6.DEC.2022 16:02:05

Page 75 of 86

Report No.: TW2211112-03E

Date: 2022-12-09




CH09 at msc0

10.4 Band-edge and Restricted band Measurement

EUT	Tablet PC	Model	M-TA7
Mode	Keeping Transmitting	Test Voltage	DC5.0V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

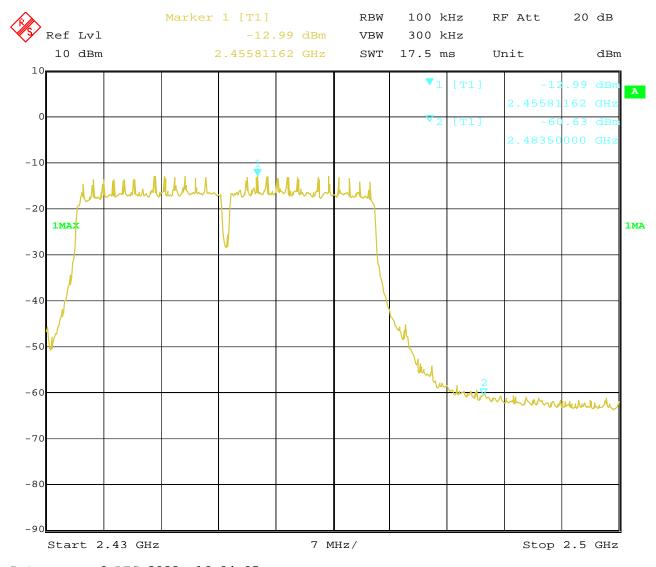

6.DEC.2022 Date: 16:04:05 Report No.: TW2211112-03E Page 76 of 86

Date: 2022-12-09



10.5 Restricted band Measurement

EUT		Tablet PC				M-TA7			
Mode	Kee	Keeping Transmitting				DC5.0V			
Temperature		24 deg. C,				56% RH			
Test Result:		Pass				PK			
802.11b mode, Low Channel, Horizontal									
2390	PK (dBµV/m)	38.68	т:.			$74(dB\mu V/m)$			
	AV (dBμV/m)		Lii	nit		54(dBµV/m)			
		802.11b mode, Low	Channel,	Vertical					
2390	PK (dBμV/m)	37.75	т.:.	T: '		74(dBµV/m)			
	AV (dBμV/m)		Limit			54(dBµV/m)			

Restricted band Measurement 10.5

EUT		Tablet PC		M	odel	M-TA7		
Mode	Ke	eping Transmitting		Test Voltage		DC5.0V		
Temperature		24 deg. C,		Humidity		56% RH		
Test Result:		Pass				PK		
802.11b mode, High Channel, Horizontal								
2483.5	PK (dBµV/m)	38.23	т::	:4		$74(dB\mu V/m)$		
	AV (dBμV/m)		Limi	Ιt	54(dBµV/m)			
		802.11b mode, High	Channel, V	Vertical				
2483.5	PK (dBµV/m)	37.47	Limi	T		74(dBμV/m)		
	AV (dBμV/m)		Limit			$54(dB\mu V/m)$		

Report No.: TW2211112-03E Page 77 of 86

Date: 2022-12-09



10.5 Restricted band Measurement

EUT			Mo	del	M-TA7			
Mode	Keeping Transmitting				oltage/	DC5.0V		
Temperature		24 deg. C,			nidity	56% RH		
Test Result:			Dete	ector	PK			
802.11g mode, Low Channel, Horizontal								
2390	PK (dBµV/m)	39.03	т.	٠,		$74(dB\mu V/m)$		
	AV (dBμV/m)		Lii	nit		54(dBµV/m)		
		802.11g mode, Low	Channel,	Vertical				
2390	PK (dBµV/m)	37.34	т.:.	Limit		74(dBµV/m)		
	AV (dBμV/m)		Lli			54(dBµV/m)		

Restricted band Measurement 10.5

EUT		Tablet PC		M	odel	M-TA7		
Mode	Ke	eping Transmitting		Test Voltage		DC5.0V		
Temperature		24 deg. C,		Humidity		56% RH		
Test Result:		Pass				PK		
802.11g mode, High Channel, Horizontal								
2483.5	PK (dBµV/m)	38.14	т::	:4		$74(dB\mu V/m)$		
	AV (dBμV/m)		Limi	Ιt	54(dBµV/m)			
		802.11g mode, High	Channel, V	Vertical				
2483.5	PK (dBµV/m)	37.12	Limi	T		74(dBμV/m)		
	AV (dBμV/m)		Limit			$54(dB\mu V/m)$		

Report No.: TW2211112-03E Page 78 of 86

Date: 2022-12-09



10.5 Restricted band Measurement

EUT		Tablet PC				M-TA7		
Mode	Kee	eping Transmitting		Test Voltage		DC5.0V		
Temperature		24 deg. C,				56% RH		
Test Result:		Pass				PK		
802.11n HT20 mode, Low Channel, Horizontal								
2390	PK (dBμV/m)	38.61	т:.			$74(dB\mu V/m)$		
	AV (dBμV/m)		Liı	nit	$54(dB\mu V/m)$			
		302.11n HT20 mode, Lo	ow Chanr	nel, Vertic	al			
2390	PK (dBμV/m)	37.58	т:.	T		74(dBµV/m)		
	AV (dBμV/m)		Limit			54(dBµV/m)		

10.5 Restricted band Measurement

EUT		Tablet PC		M	odel	M-TA7		
Mode	Ke	eping Transmitting		Test Voltage		DC5.0V		
Temperature		24 deg. C,		Humidity		56% RH		
Test Result:		Pass		Det	Detector PK			
802.11n HT20 mode, High Channel, Horizontal								
2483.5	PK (dBμV/m)	37.86	т::			$74(dB\mu V/m)$		
	AV (dBμV/m)		Limi	IT		$54(dB\mu V/m)$		
	8	02.11n HT20 mode, Hi	igh Channe	l, Vertic	al			
2483.5	PK (dBµV/m)	37.02	Limi	•,		74(dBµV/m)		
	AV (dBμV/m)	Limi		iit		54(dBµV/m)		

Page 79 of 86

Report No.: TW2211112-03E


Date: 2022-12-09



10.5 Restricted band Measurement

EUT		Tablet PC				M-TA7		
Mode	Kee	eping Transmitting		Test Voltage		DC5.0V		
Temperature		24 deg. C,				56% RH		
Test Result:		Pass	tector	PK				
802.11n HT40 mode, Low Channel, Horizontal								
2390	PK (dBμV/m)	39.24	т.	.,		$74(dB\mu V/m)$		
	AV (dBμV/m)		Lii	mit		54(dBµV/m)		
		802.11n HT40 mode, L	ow Chan	nel Vertic	al			
2390	PK (dBμV/m)	37.91	1.5	T 1 1		74(dBμV/m)		
	AV (dBμV/m)		Limit			$54(dB\mu V/m)$		

Test Plots

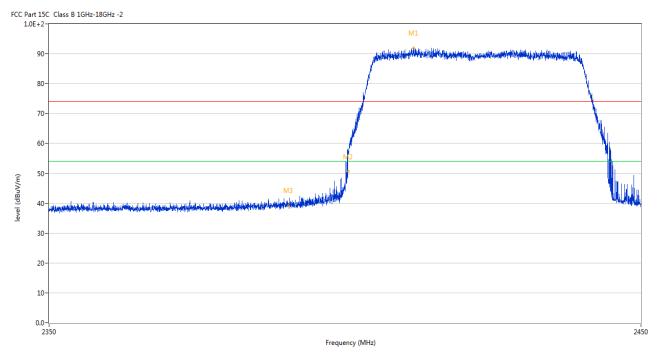

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
1	2411.135	91.94	-3.57	74.0	17.94	Peak	303.00	100	Horizontal	N/A
2	2400.000	50.57	-3.57	74.0	-23.43	Peak	169.50	100	Horizontal	Pass
3	2390.000	39.24	-3.53	74.0	-34.76	Peak	137.40	100	Horizontal	Pass

The report refers only to the sample tested and does not apply to the bulk.

This report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it. or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to


adopt any other remedies which may be appropriate.

Page 80 of 86

Report No.: TW2211112-03E

Date: 2022-12-09



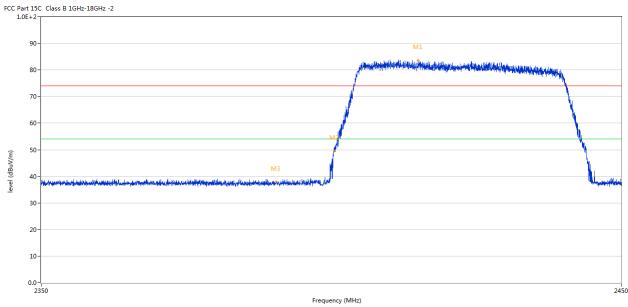

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	2414.484	83.55	-3.57	74.0	9.55	Peak	163.00	100	Vertical	N/A
2	2400.000	49.53	-3.57	74.0	-24.47	Peak	163.00	100	Vertical	Pass
3	2390.000	37.91	-3.53	74.0	-36.09	Peak	215.60	100	Vertical	Pass

Page 81 of 86


Report No.: TW2211112-03E

Date: 2022-12-09



10.5 Restricted band Measurement

EUT	Tablet PC				Iodel	M-TA7			
Mode	Keeping Transmitting				Voltage	DC5.0V			
Temperature	24 deg. C,				midity	56% RH			
Test Result:		Pass	De	etector	PK				
802.11n HT40 mode, High Channel, Horizontal									
2483.5	PK (dBµV/m)	38.80	т.	Limit		$74(dB\mu V/m)$			
	AV (dBμV/m)		Lim			$54(dB\mu V/m)$			
802.11n HT40 mode, High Channel, Vertical									
2483.5	PK (dBμV/m)	37.40	т ::	T ::4		74(dBμV/m)			
	AV (dBμV/m)		Limit		_	$54(dB\mu V/m)$			

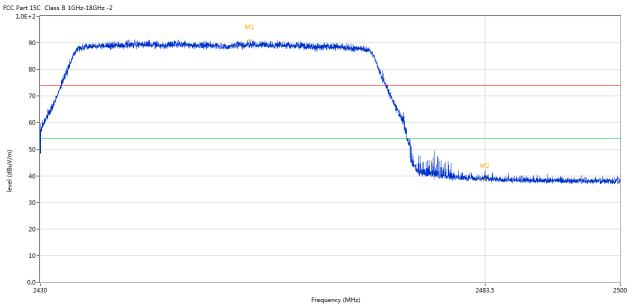


No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	2455.106	90.88	-3.57	74.0	16.88	Peak	121.00	100	Horizontal	N/A
2	2483.500	38.80	-3.57	74.0	-35.20	Peak	109.22	100	Horizontal	Pass

Report No.: TW2211112-03E Page 82 of 86

Date: 2022-12-09



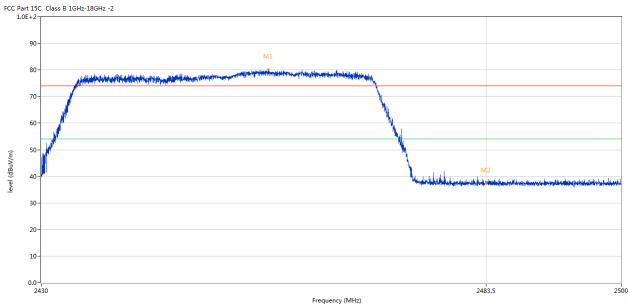

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	2457.188	80.28	-3.57	74.0	6.28	Peak	355.00	100	Vertical	N/A
2	2483.500	37.40	-3.57	74.0	-36.60	Peak	19.44	100	Vertical	Pass

Report No.: TW2211112-03E

Date: 2022-12-09



Page 83 of 86

11.0 Antenna Requirement

11.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitter antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the mount in dB that the directional gain of the antenna exceeds 6 dBi.

11.2 Antenna Connected construction

FPC antenna with gain 3.03dBi Max (Get from the antenna specification)

Report No.: TW2211112-03E Page 84 of 86

Date: 2022-12-09




12.0 FCC ID Label

FCC ID: 2A9CI-M-TA7

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation

The label must not be a stick-on paper label. The label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

Mark Location:

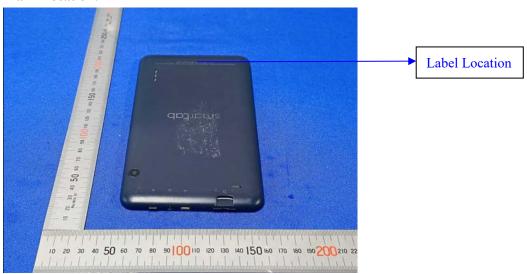

Page 85 of 86

Report No.: TW2211112-03E

Date: 2022-12-09



13.0 **Photo of testing**

Conducted Emission Test Setup:




Report No.: TW2211112-03E

Date: 2022-12-09



Radiated Emission Test Setup:

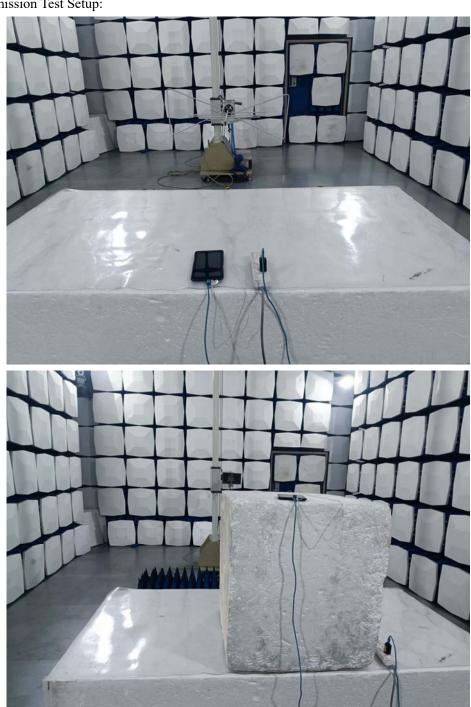

Photographs - EUT

Please refer test report TW2211112-01E

-End of the report-

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it. or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report. discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.