

HLX 20125025 A05

Manufacturer : TESAN ILETISIM A.S.



Features

1. Surface Mounted Devices with a small dimension of $2.0 \times 1.25 \times 0.25 \text{ mm}^3$ meet future miniaturization trend.
2. Embedded and (Low Temperature Co-fired Ceramic) technology is able to future integrate with system design as well as beautifying the housing of final product.
3. High Stability in Temperature / Humidity Change

Applications


1. Bluetooth
2. Wireless LAN
3. HormRF
4. ISM band 2.4GHz wireless applications

Dimensions (Unit: mm)

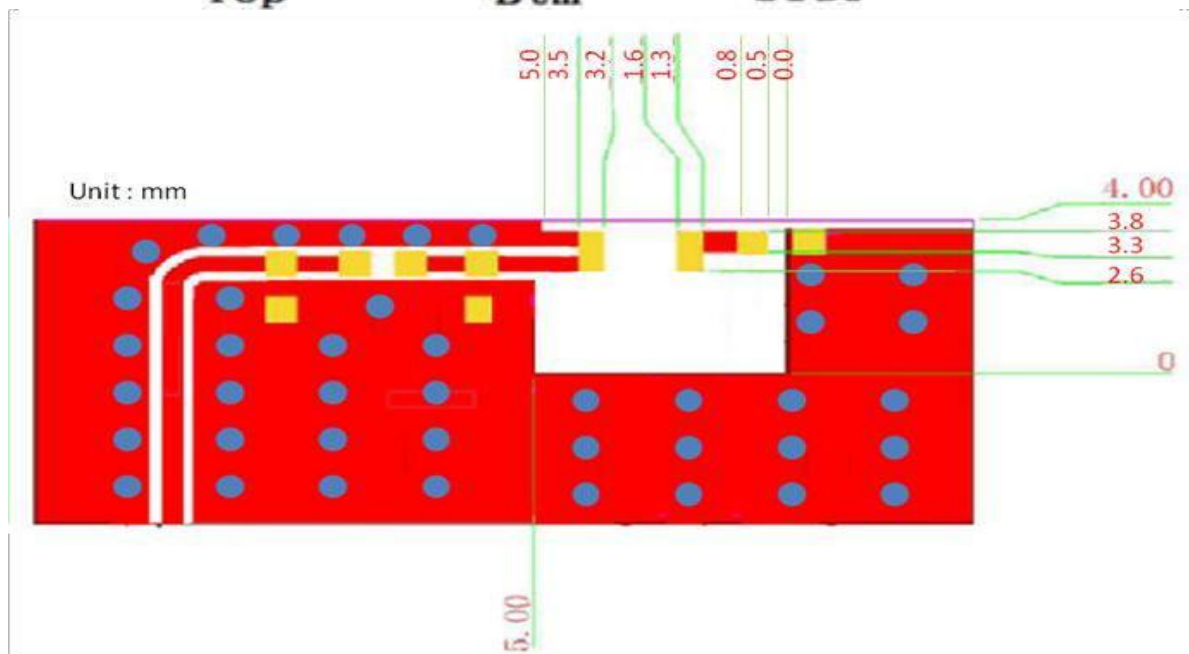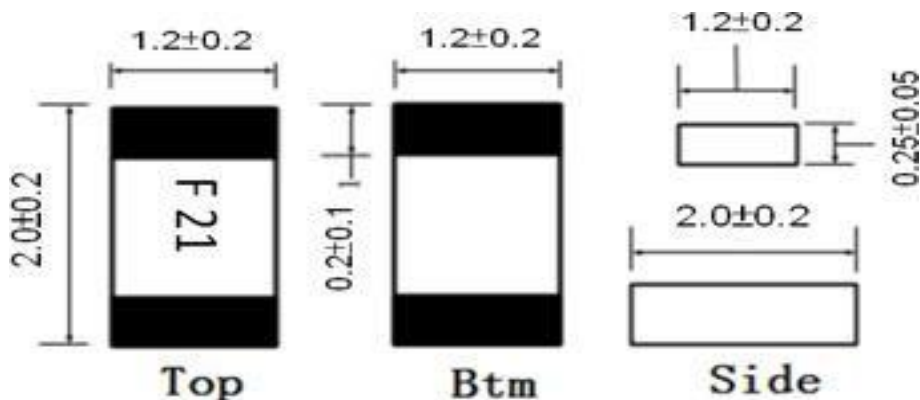


H L X 20125025 A05


Type2:

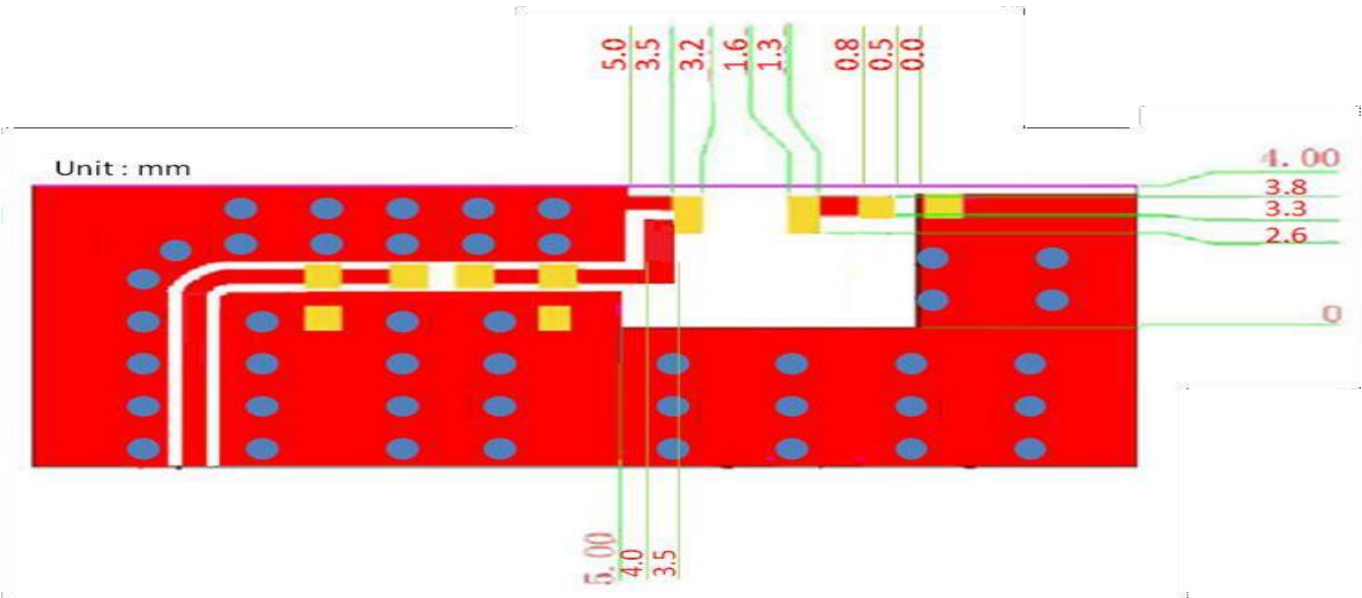

Type3:

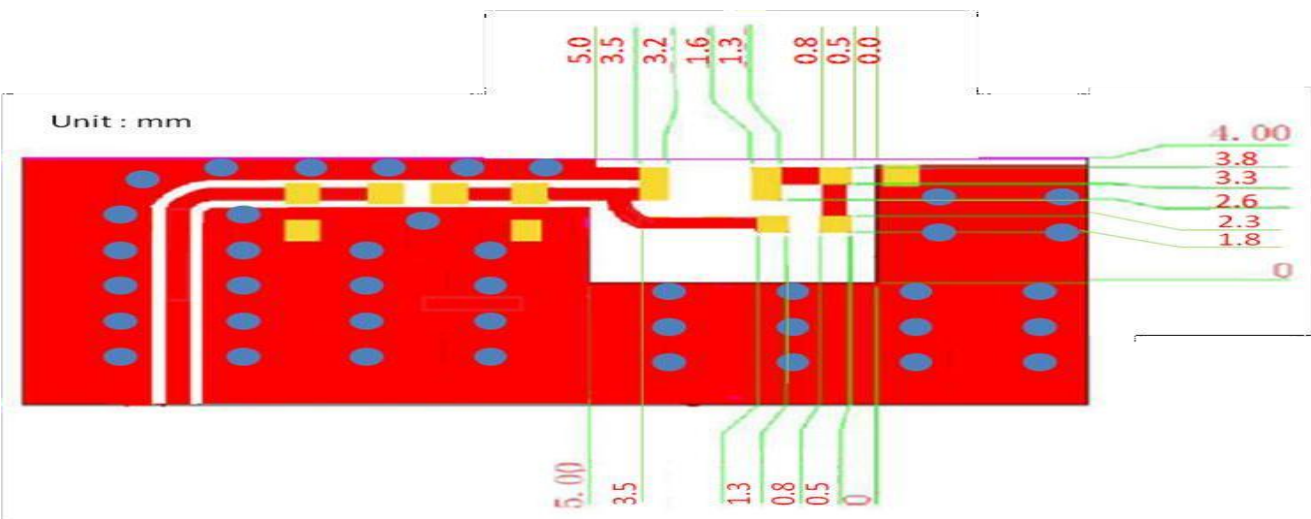


PCB Bottom View :

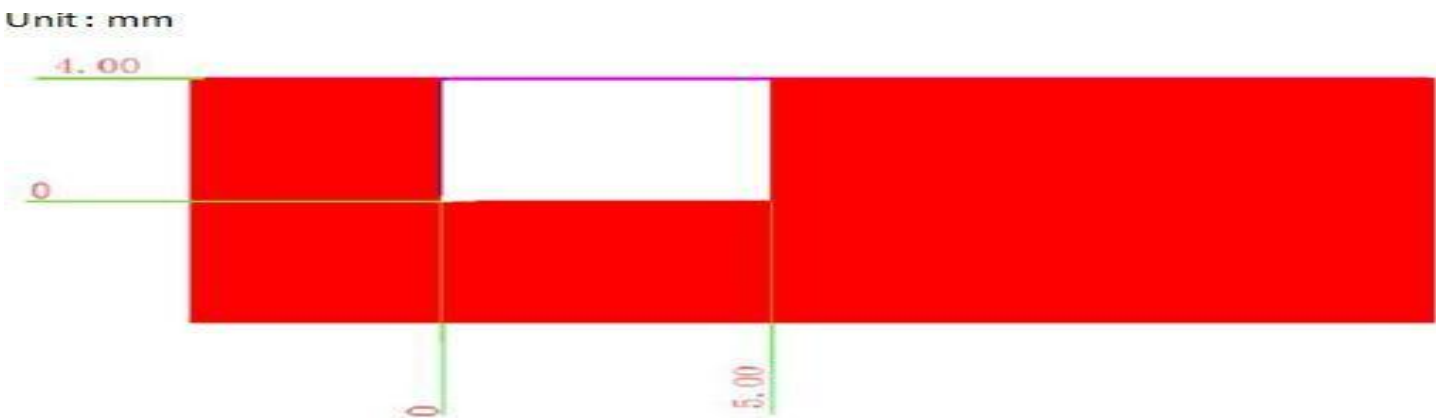

H L X 20125025 A05

Evaluation Board and Matching Circuits

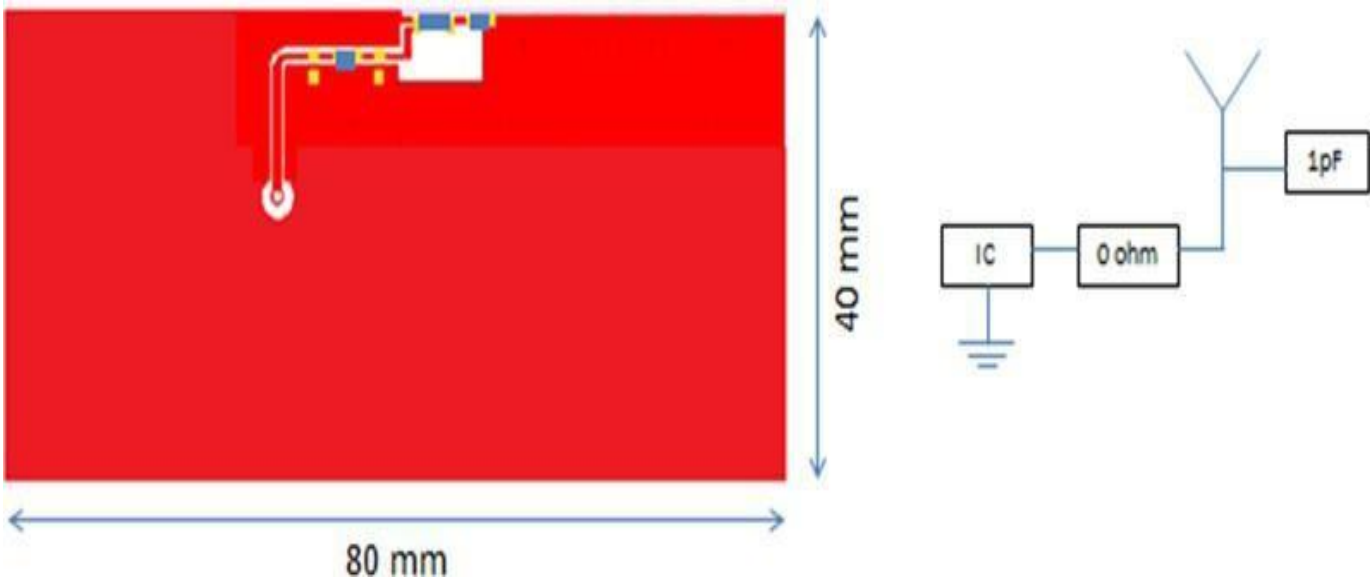


Electrical Characteristics

No.	Item	Specifications
5.1	Working Central Frequency (After matching)	2450 MHz
5.2	Band Width	86MHz typ.
5.3	Peak Gain	1.72 dBi
5.4	R.L.	≥7
5.5	Polarization	Linear
5.6	Azimuth Beam width	Omni-directional
5.7	Impedance	50 Ω


HLX 20125025 A05

Characteristic curve

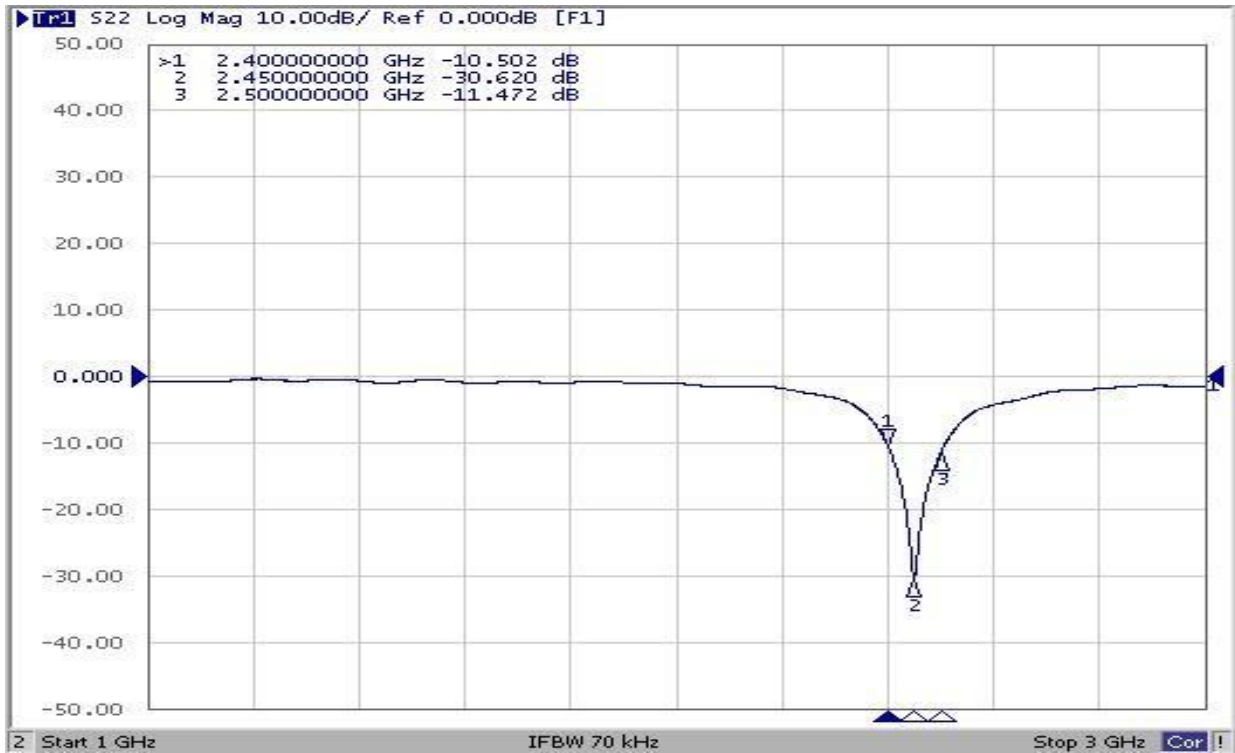


Radiation Pattern

Frequency(MHz)	2400	2450	2500
Efficiency (dB)	-2.82	-2.04	-2.41
Efficiency (%)	52.19	62.42	58,21
Gain (dBi)	1.72	1.41	1.63

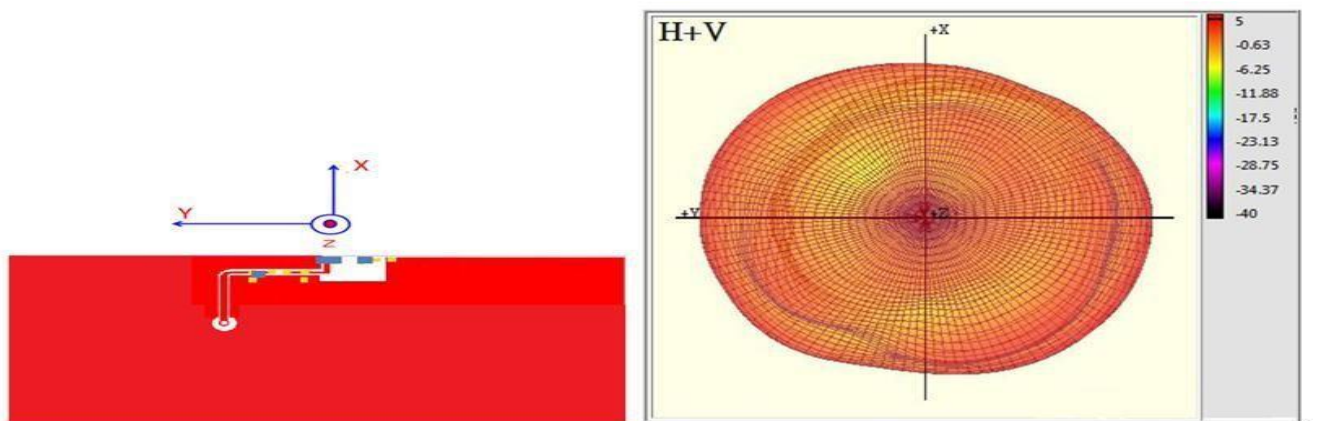

HLX 20125025 A05

Bending Resist Test

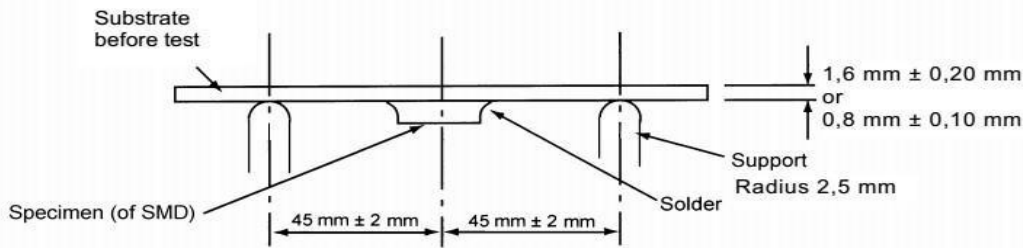

Weld the product to the center part of the PCB with the thickness $1.6 \pm 0.2 \text{ mm}$ or $0.8 \pm 0.1 \text{ mm}$ as the illustration shows, and keep exerting force arrow-ward on it at speed of 1 mm/S , and hold for $5 \pm 1 \text{ S}$ at the position of 1.5 mm bending distance, so far, any peeling off of the product metal coating should not be detected.

Dependability Test

Temperature range	$25 \pm 5^\circ \text{C}$
Relative Humidity range	$55 \sim 75\% \text{RH}$
Operating Temperature range	$-40^\circ \text{C} \sim +85^\circ \text{C}$
Storage Temperature range	$-40^\circ \text{C} \sim +85^\circ \text{C}$

Vibration Resist

The device should fulfill the electrical specification after applied to the vibration of 10 to 55Hz with amplitude of 1.5mm for 2 hours each in X, Y and Z directions.

Drop Shock

The device should have no mechanical damage after dropping onto the hard wooden board from the height of 100cm for 3 times each facet of the 3 dimensions of the device.

Solder Heat Proof

The device should be satisfied after preheating at $120^\circ \text{C} \sim 150^\circ \text{C}$ for 120 seconds and dipping in soldering Sn at $255^\circ \text{C} + 10^\circ \text{C}$ for 5 ± 0.5 seconds, or electric iron $300^\circ \text{C} - 10^\circ \text{C}$ for 3 ± 0.5 seconds, without damage.

Adhesive Strength of Termination

The device have no remarkable damage or removal of the termination after horizontal force of 5 N (≤ 0603); 10 N (> 0603) with 10 ± 1 seconds.

H L X 20125025 A05

Moisture Proof

The device should fulfill the electrical specification after exposed to the temperature $60\pm 2^{\circ}\text{C}$ and the relative humidity 90~95% RH for 96 hours and 1~2 hours recovery time under normal condition.

High Temperature Endurance

The device should fulfill the electrical specification after exposed to temperature $85\pm 5^{\circ}\text{C}$ for 96 ± 2 hours and 1~2 hours recovery time under normal temperature.


Low Temperature Endurance

The device should fulfill the electrical specification after exposed to the temperature $-40^{\circ}\text{C}\pm 5^{\circ}\text{C}$ for 96 ± 2 hours and to 2 hours recovery time under normal temperature.

Temperature Cycle Test

The device should fulfill the electrical specification after exposed to the low temperature -40°C and high temperature $+85^{\circ}\text{C}$ for 30 ± 2 min each by 5 cycles and 1 to 2 hours recovery time under normal temperature.


Reflow Soldering Standard Condition

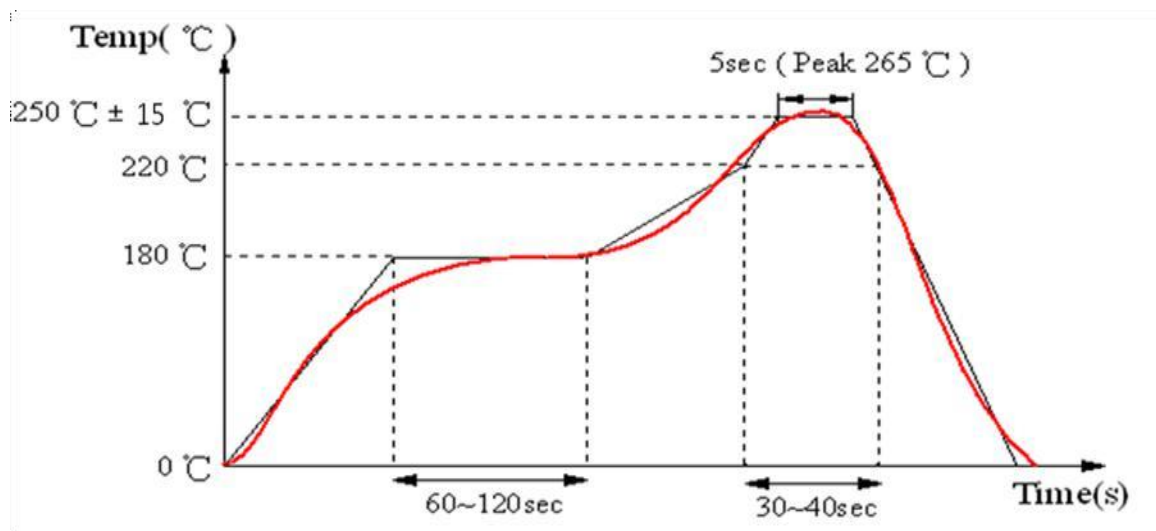

HLX 20125025 A05

Packaging and Dimensions (2012)


Plastic Tape

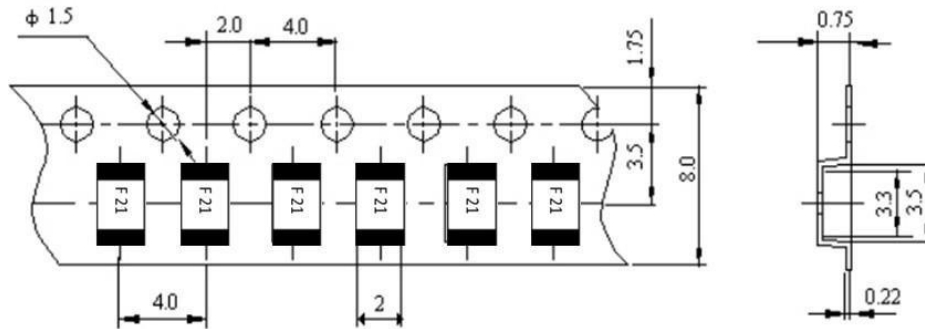

Remarks for Package

Reserve a length of 150~200mm for the trailer of the carrier and 250~300 mm for the leader of the carrier and further 250mm of cover tape at the leading part of the carrier.

Reel (6000 pcs/Reel)

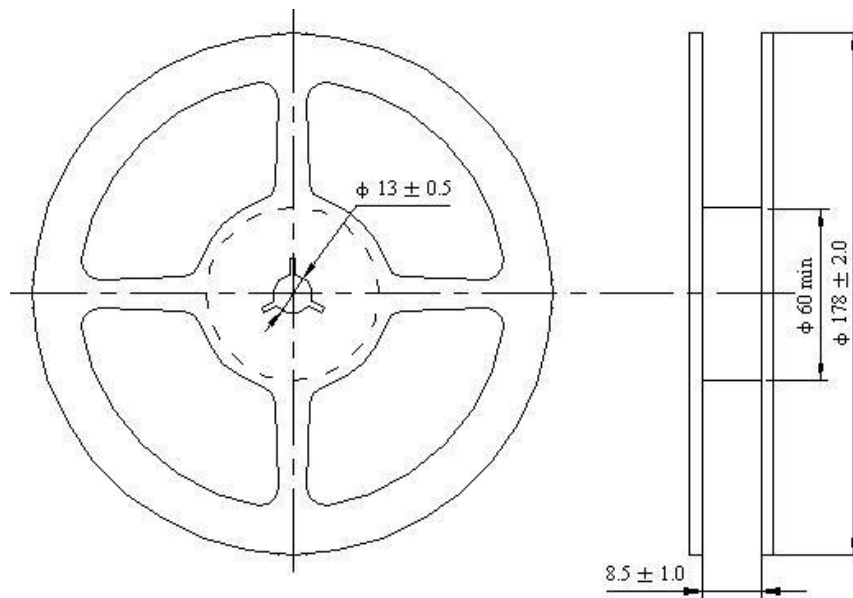

Storage Period

Product should be used within six months of receipt.

MSL 1 / Storage Temperature Range : <30 degree C, Humidity : <85%RH