

RF Exposure Exemption

Applicant : Droople SA

Product Name : LoRa communication device for smart sensors

Trade Name : iLink

Model Number : iLink V4.1

Blockchain verified

QR code



Applicable Standard : 47 CFR §2.1093

Received Date : Dec. 08, 2022 Issue Date : Apr. 26, 2023

Issued by

Approved By	:		

Eurofins E&E Wireless Taiwan Co., Ltd. No. 140-1, Changan Street, Bade District, Taoyuan City 334025, Taiwan (R.O.C.)

Tel: +886-3-2710188 / Fax: +886-3-2710190





Taiwan Accreditation Foundation accreditation number: 1330

Test Firm MRA designation number: TW0010

Note

- 1. The test results are valid only for samples provided by customers and under the test conditions described in this report.
- 2. This report shall not be reproduced except in full, without the written approval of Eurofins E&E Wireless Taiwan Co., Ltd.
- 3.The relevant information is provided by customers in this test report. According to the correctness, appropriateness or completeness of the information provided by the customer, if there is any doubt or error in the information which affects the validity of the test results, the laboratory does not take the responsibility.

Page 1 of 8 Report Number: 2301FS11



Revision History

Version	Issued Date	Revisions	Revised By
00	Apr. 26, 2023	Initial Issue	Yiying Chiang

Page 2 of 8 Report Number: 2301FS11



Contents

1.	Reference Applicable Standard	4
2.	Description of Equipment under Test (EUT)	
3.	RF Exposure Limit	
4.	Exemption Evaluation	
5.	Maximum Tune-up Power	8
6.	Test Result	8
7.	Conclusion	8



1. Reference Applicable Standard

1.1 Reference Applicable Standard

Standard	Description			
47 CFR §2.1093	Radiofrequency radiation exposure evaluation: portable devices	-		
IEEE Standard for Safety Levels with Respect to Human Exposure to Electric, Magnetic, and Electromagnetic Fields, 0 Hz to 300 GHz		1992		
KDB 447498 D04	RF exposure procedures and equipment authorization policies for mobile and portable devices	v01		

1.2 Testing Location

Site Name: Site Name: Eurofins E&E Wireless Taiwan Co., Ltd.

Site Address: No. 140-1, Changan Street, Bade District, Taoyuan City 334025, Taiwan (R.O.C.)

Site Address:
No. 2, Wuquan 5th Rd. Wugu Dist., New Taipei City, Taiwan (R.O.C.)

Page 4 of 8 Report Number: 2301FS11



2. Description of Equipment under Test (EUT)

	Dragala CA					
Applicant	Droople SA					
- 11	Route du Verney 18, 1070 Puidoux, Switzerland					
Manufacturer	Droople SA					
Manufacturer	Route du Verney 18, 1070 Puidoux, Switzerland					
Product Name	LoRa communication device for smart sensors					
Trade Name	iLink					
Model Number	iLink V4.1					
FCC ID	2A9M4DRP-ILK-V4-1					
Frequency Range	LoRa: 902 - 928 MHz					
Supported Modulations	LoRa: CCS					
Blockchain verified QR code	BLOCKCHAIN VERIFIED					

Note:

The above information of DUT was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

Antenna Information						
Frequency Range (MHz) Model Number Type Max. Gain (dBi)						
902 - 928 MHz	2111400100	Flexible Antenna	1			

Page 5 of 8 Report Number: 2301FS11



3. RF Exposure Limit

Table 1 Safety Limits for Controlled / Uncontrolled Environment Exposure

SAR Exposure Limit							
	General Population / Uncontrolled Exposure ¹ (W/kg)	Occupational / Controlled Exposure ² (W/kg)					
Spatial Peak SAR ³ (head or Body)	1.60	8.00					
Spatial Peak SAR ⁴ (Whole Body)	0.08	0.40					
Spatial Peak SAR ⁵ (Hands / Feet / Ankle / Wrist)	4.00	20.00					

Notes:

- General Population / Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.
- Occupational / Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation).
- 3. The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.
- 4. The Spatial Average value of the SAR averaged over the whole body.
- 5. The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.


Page 6 of 8 Report Number: 2301FS11



4. Exemption Evaluation

Exemption evaluation was performed according to the appendix A and B in KDB447498 D04.

The General Sequence for Determination of Procedure demonstrated in Figure A.1 of KDB447498 D04 was applied.

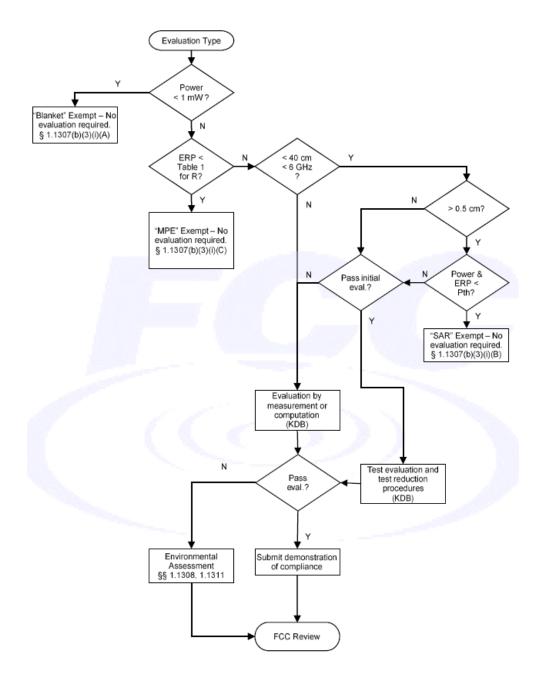

Page 7 of 8 Report Number: 2301FS11 Version: 00



5. Maximum Tune-up Power

Operate Band	Frequency (MHz)	ANT 0
LoRa	902 - 928	14.60

6. Test Result

Band	Frequency (MHz)	Distance (cm) [R]	Antenna	Tune- up Power (dBm)	Tune- up Power (mW)	ANT Gain (dBi)	ERP (W)	<§1.1307(b)(3)(i)(C)> Exemption Minimum Distance (m)	<§1.1307(b)(3)(i)(C)> Exemption Threshold ERP (W)	<§1.1307(b)(3)(i)(C)> Exemption considerations	<§1.1307(b)(3)(i)(C)> ERP / ERP _{th}
LoRa	902 - 928	20.00	ANT 0	14.60	28.84	1.00	0.022	0.053	0.033	Qualified	0.66

Note:

This device is qualified for exemption under § 1.1307(b)(3)(i)(C).

7. Conclusion

The result shows that this device is qualified for SAR-Based Exemption in KDB 447498. Therefore, SAR testing is not required.

---END---

Page 8 of 8 Report Number: 2301FS11