





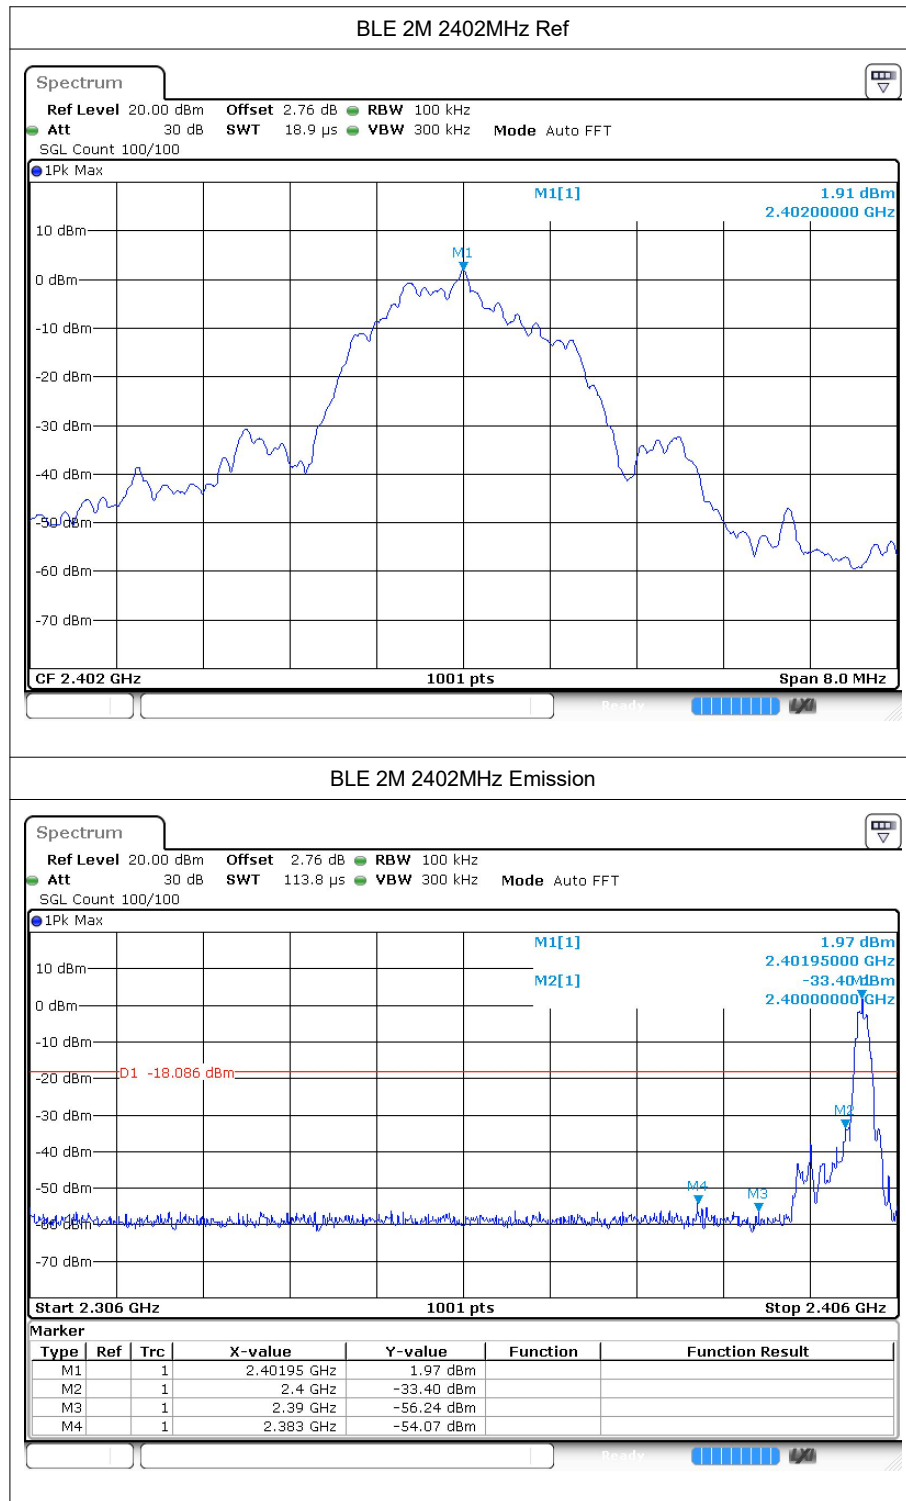

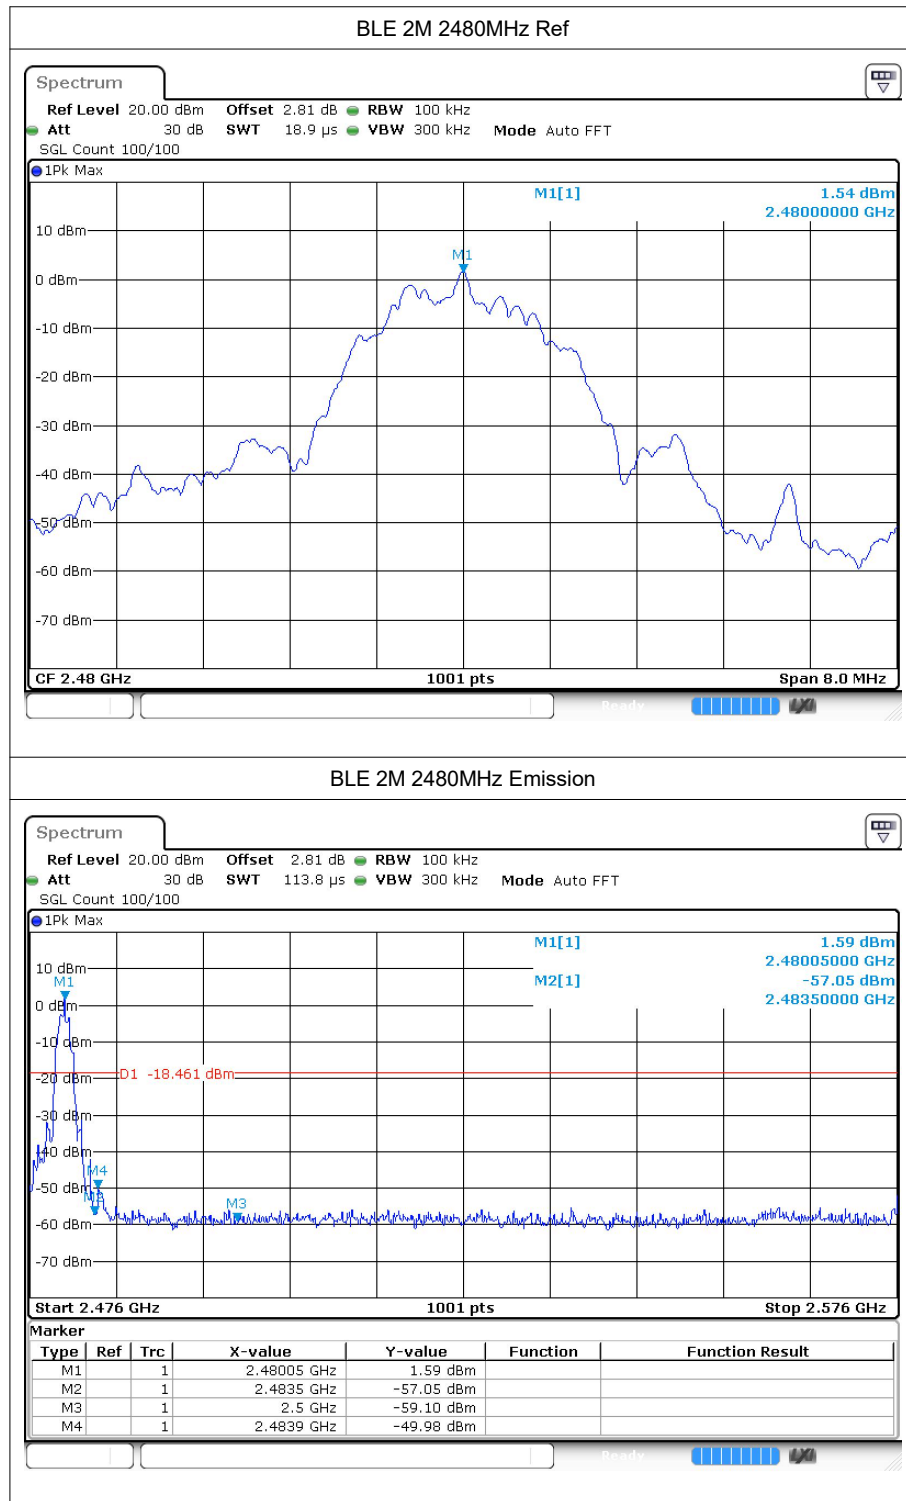



6 Conducted RF Spurious Emission


6.1 Test Result


Mode	Frequency (MHz)	Max Value (dBc)	Limit (dBc)	Verdict
BLE 1M	2402	-44.13	-20	Pass
BLE 1M	2440	-44.3	-20	Pass
BLE 1M	2480	-41.46	-20	Pass
BLE 2M	2402	-43.8	-20	Pass
BLE 2M	2440	-44.43	-20	Pass
BLE 2M	2480	-40.24	-20	Pass


6.2 Test Graphs

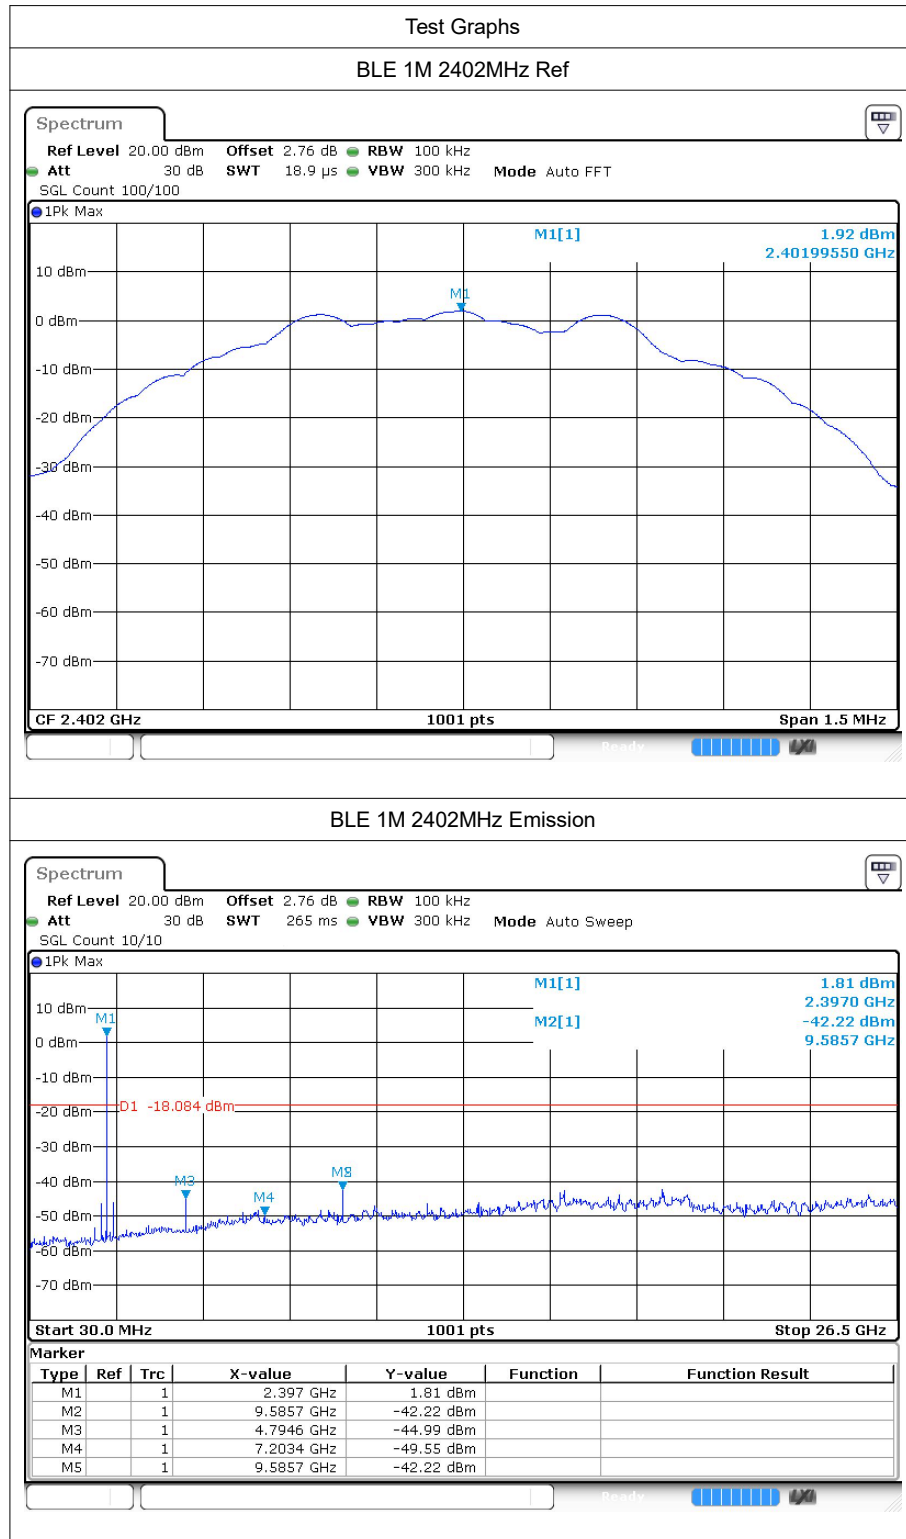


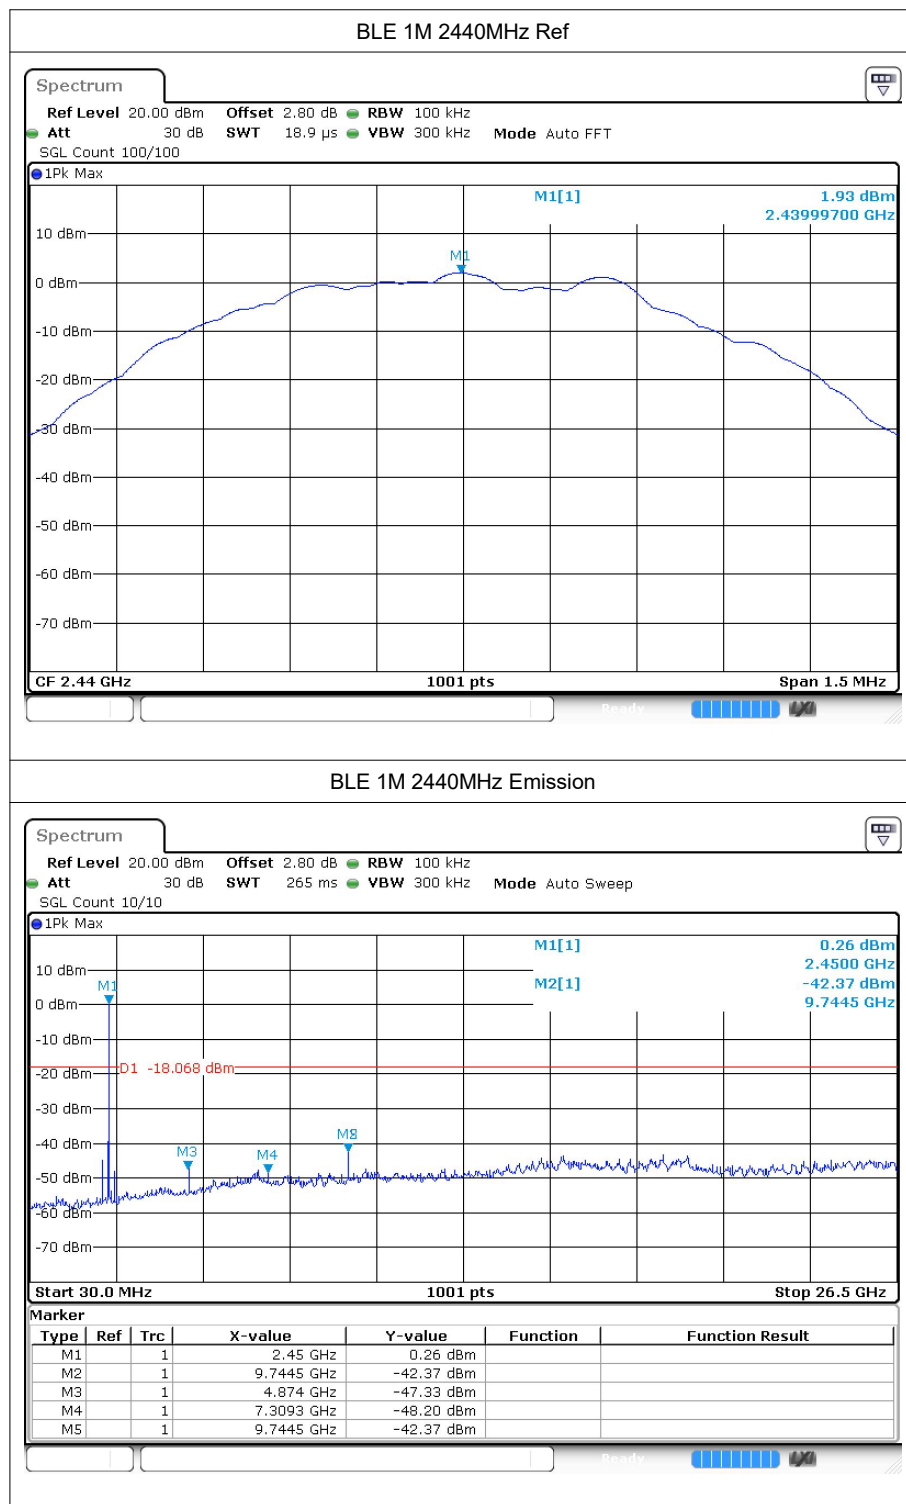

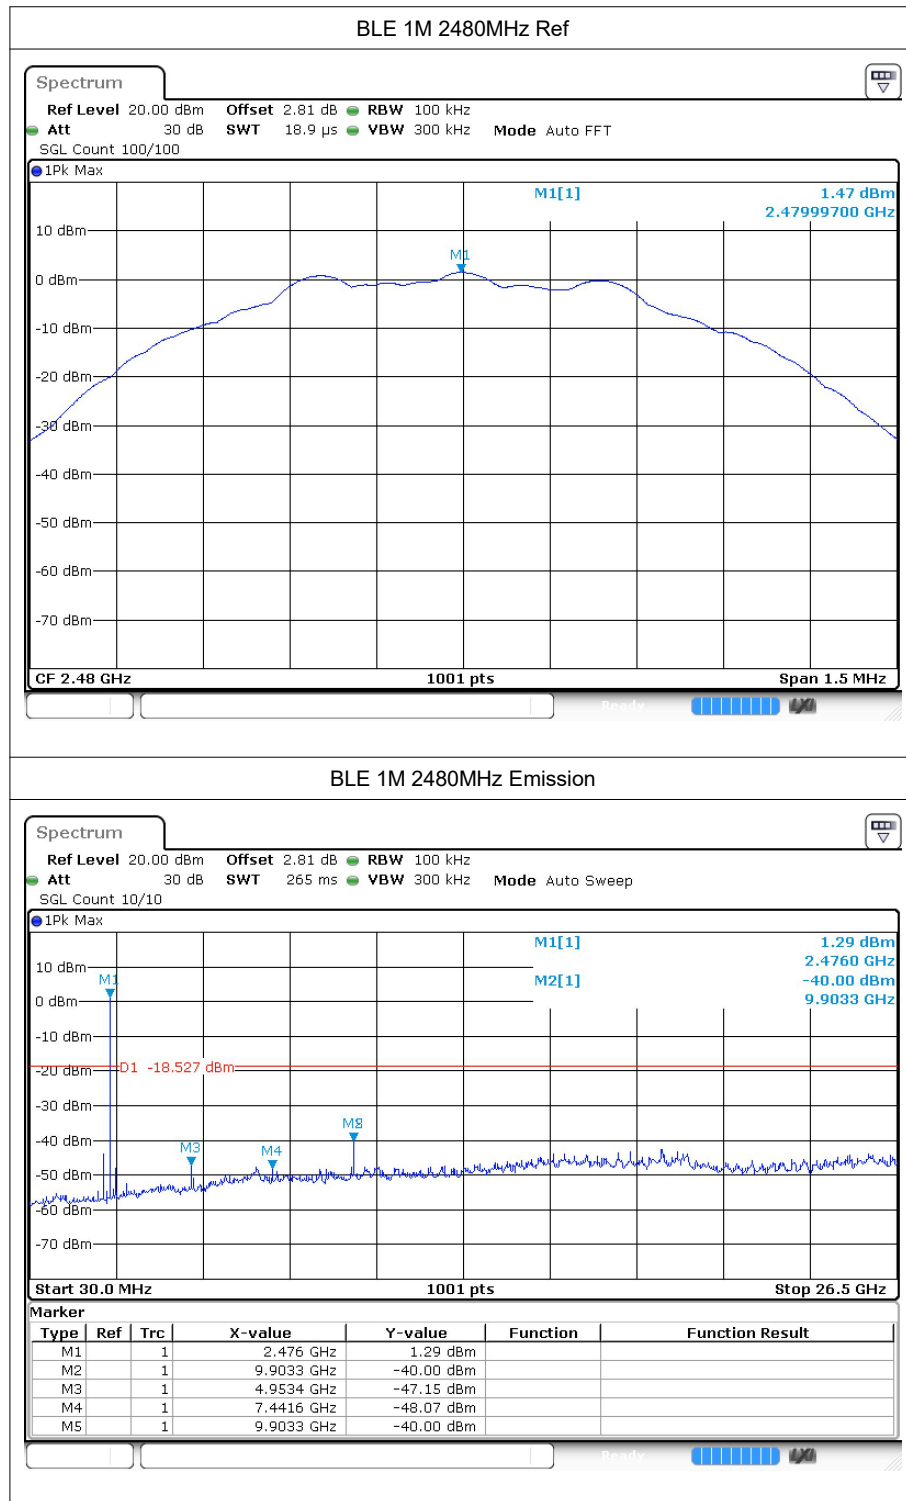

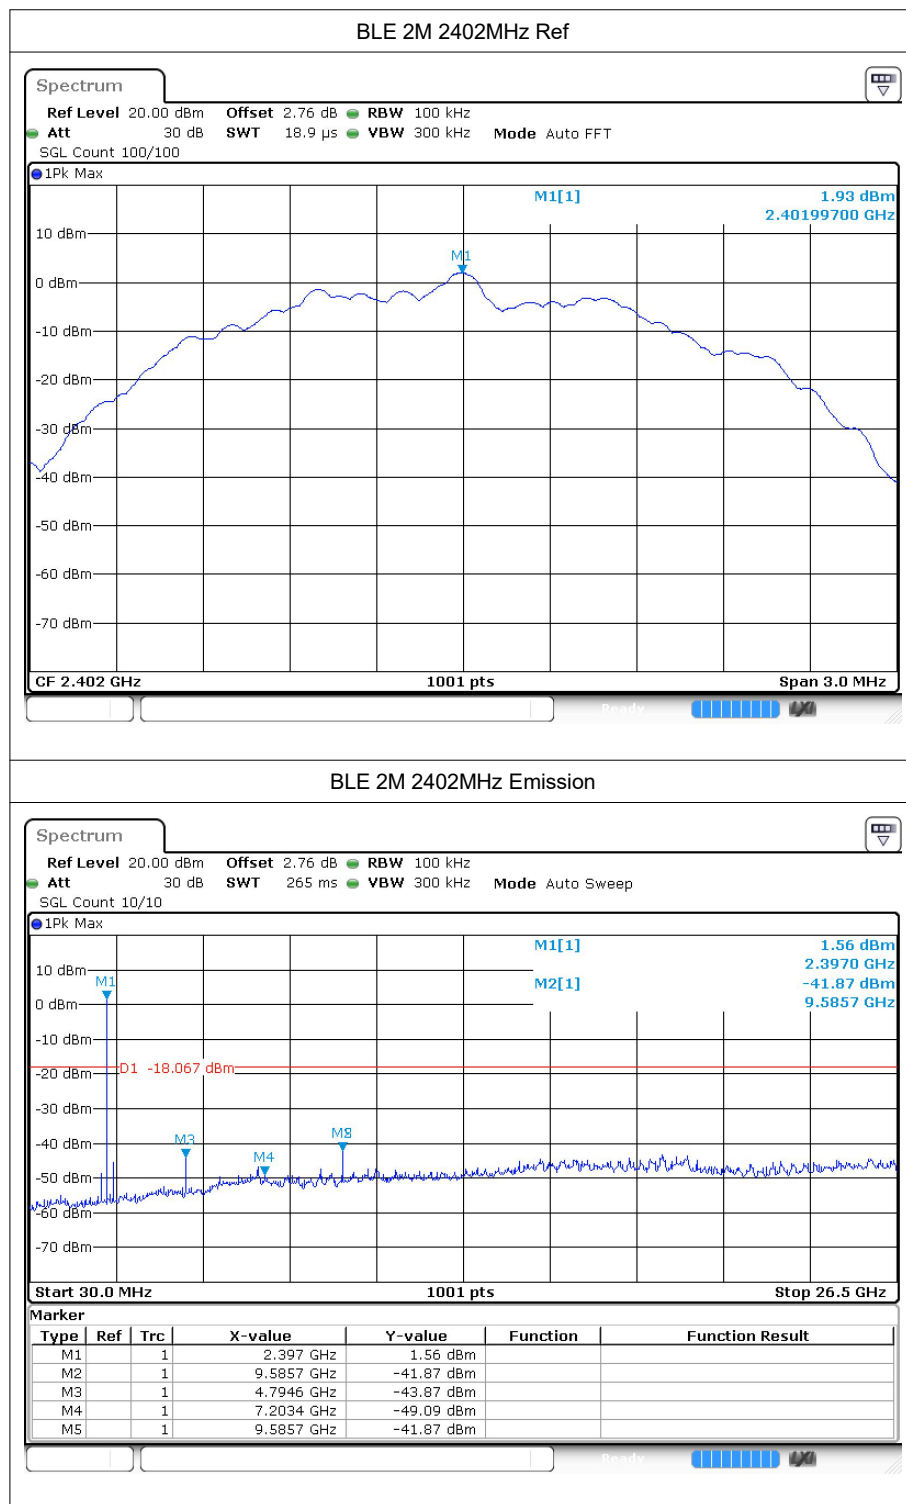

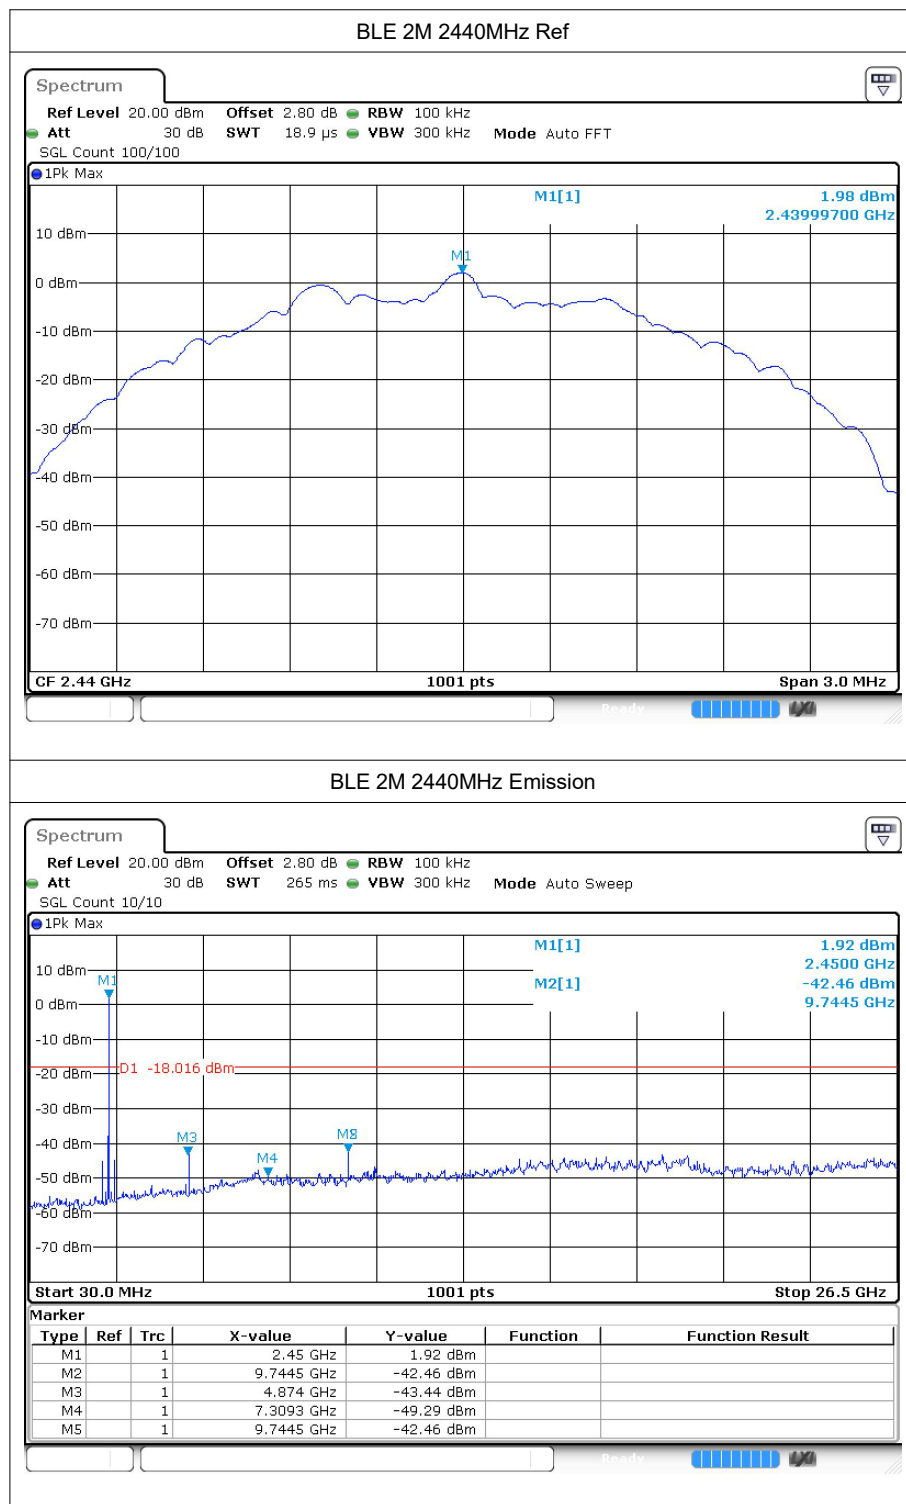

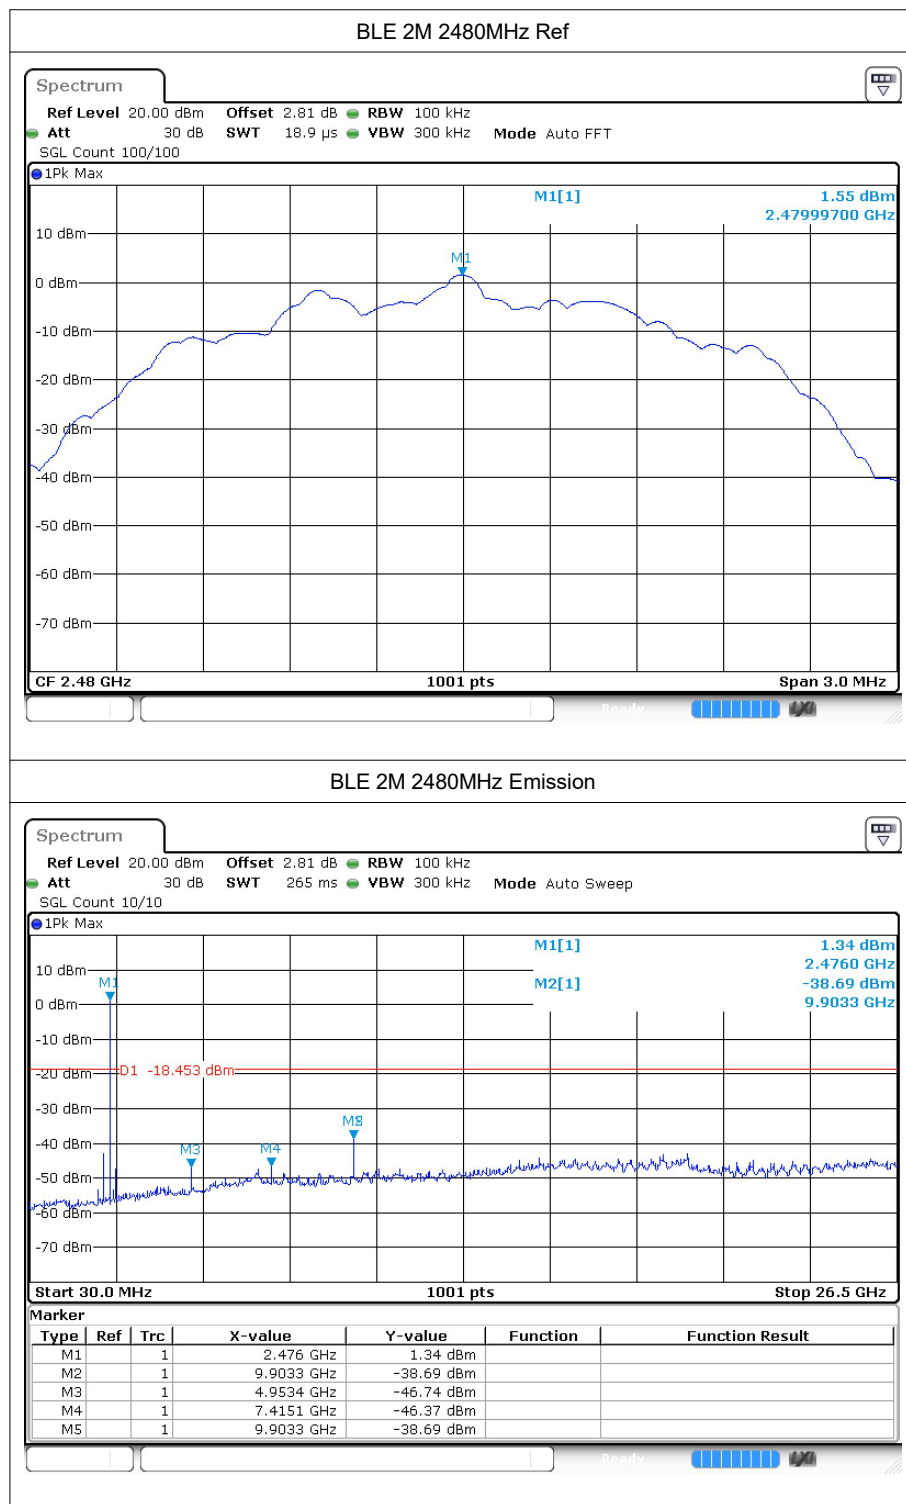



7 Restrict Band


7.1 Test Result


Mode	Frequency (MHz)	Spur Freq (MHz)	Power (dBm)	Gain (dBi)	E (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
BLE 1M	2402	2310	-45.65	2	51.61	Peak	74	Pass
BLE 1M	2402	2310	-57.01	2	40.25	Average	54	Pass
BLE 1M	2402	2343.6	-44.3	2	52.96	Peak	74	Pass
BLE 1M	2402	2338.512	-54.82	2	42.44	Average	54	Pass
BLE 1M	2402	2390	-49.28	2	47.98	Peak	74	Pass
BLE 1M	2402	2390	-56.25	2	41.01	Average	54	Pass
BLE 1M	2480	2483.5	-41.86	2	55.4	Peak	74	Pass
BLE 1M	2480	2483.5	-47.95	2	49.31	Average	54	Pass
BLE 1M	2480	2483.608	-41.83	2	55.43	Peak	74	Pass
BLE 1M	2480	2483.512	-47.95	2	49.31	Average	54	Pass
BLE 1M	2480	2500	-48.31	2	48.95	Peak	74	Pass
BLE 1M	2480	2500	-55.83	2	41.43	Average	54	Pass
BLE 2M	2402	2310	-47.59	2	49.67	Peak	74	Pass
BLE 2M	2402	2310	-56.3	2	40.96	Average	54	Pass
BLE 2M	2402	2338.128	-45.53	2	51.73	Peak	74	Pass
BLE 2M	2402	2338.896	-54.1	2	43.16	Average	54	Pass
BLE 2M	2402	2390	-49.1	2	48.16	Peak	74	Pass
BLE	2402	2390	-56.04	2	41.22	Average	54	Pass





2M								
BLE 2M	2480	2483.5	-41.73	2	55.53	Peak	74	Pass
BLE 2M	2480	2483.5	-45.59	2	51.67	Average	54	Pass
BLE 2M	2480	2484.328	-41.65	2	55.61	Peak	74	Pass
BLE 2M	2480	2483.512	-45.59	2	51.67	Average	54	Pass
BLE 2M	2480	2500	-46.82	2	50.44	Peak	74	Pass
BLE 2M	2480	2500	-56.19	2	41.07	Average	54	Pass

7.2 Test Graphs

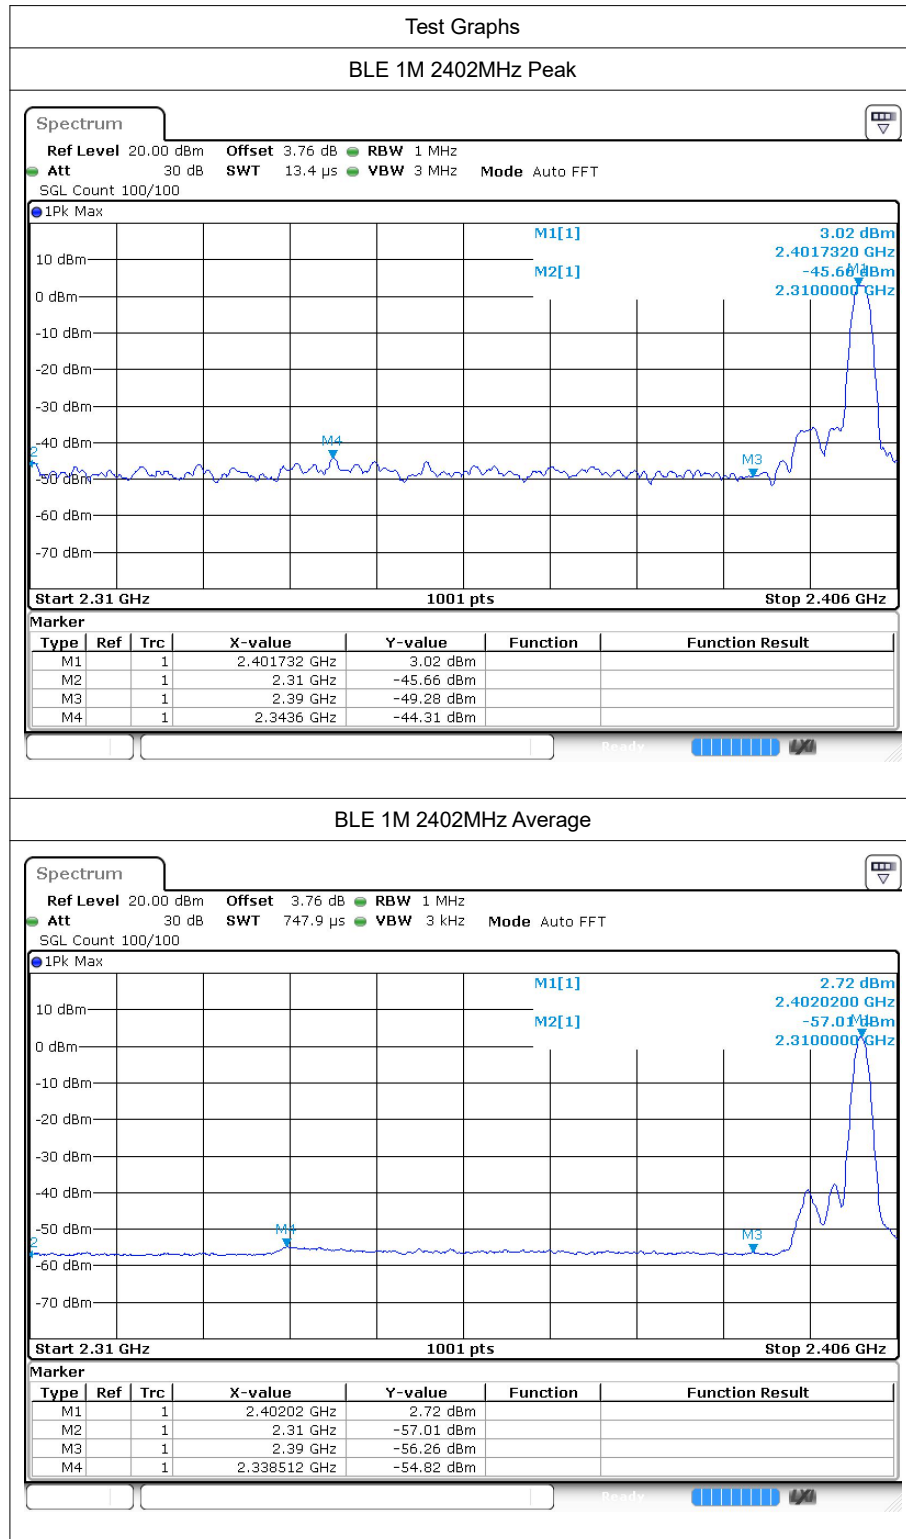

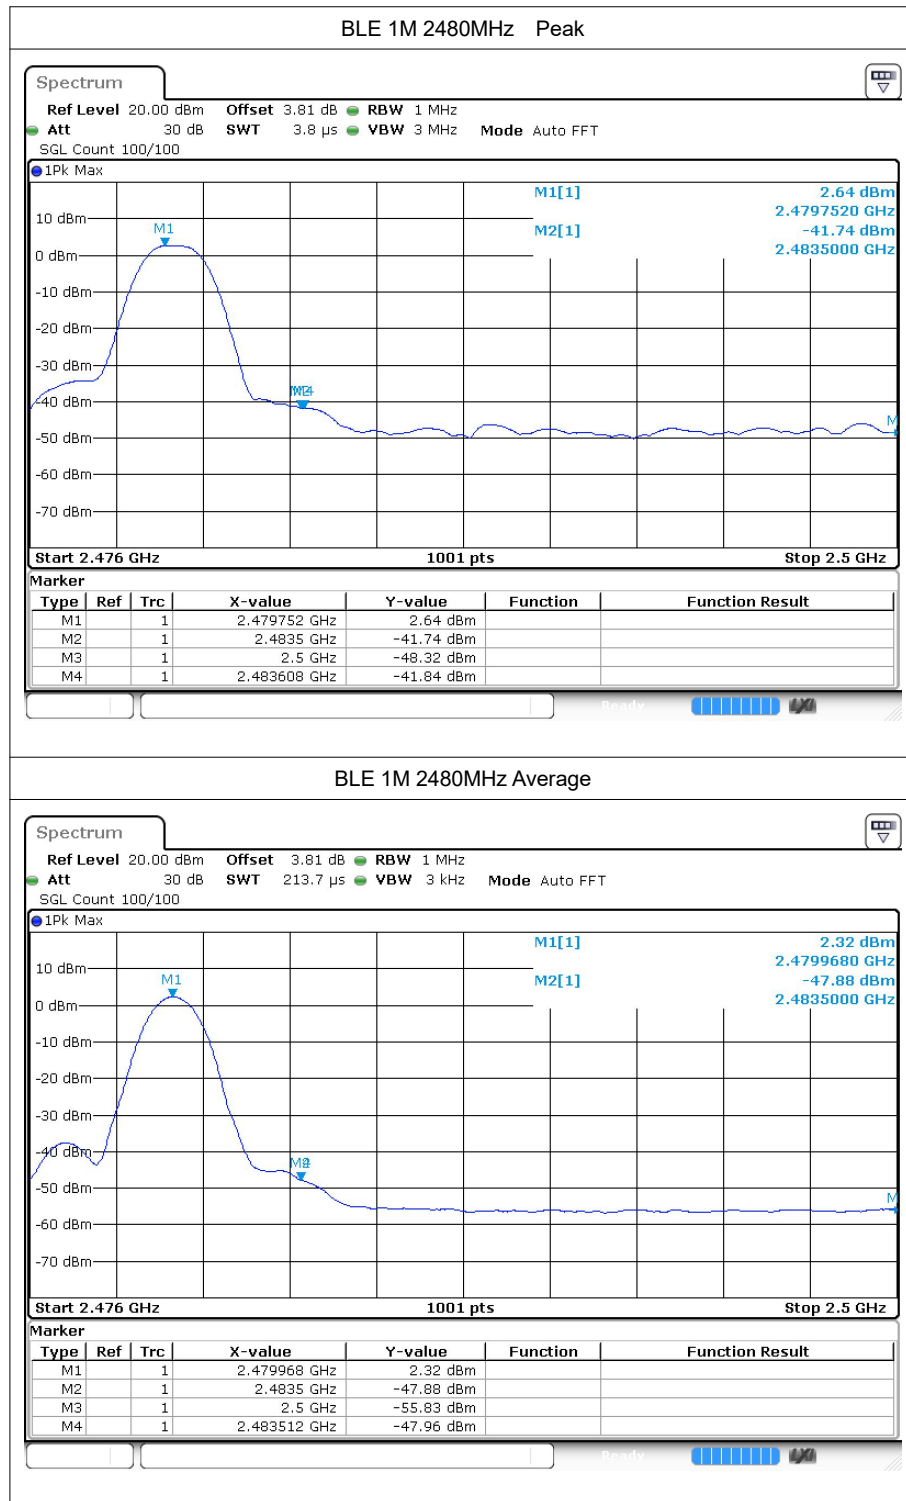

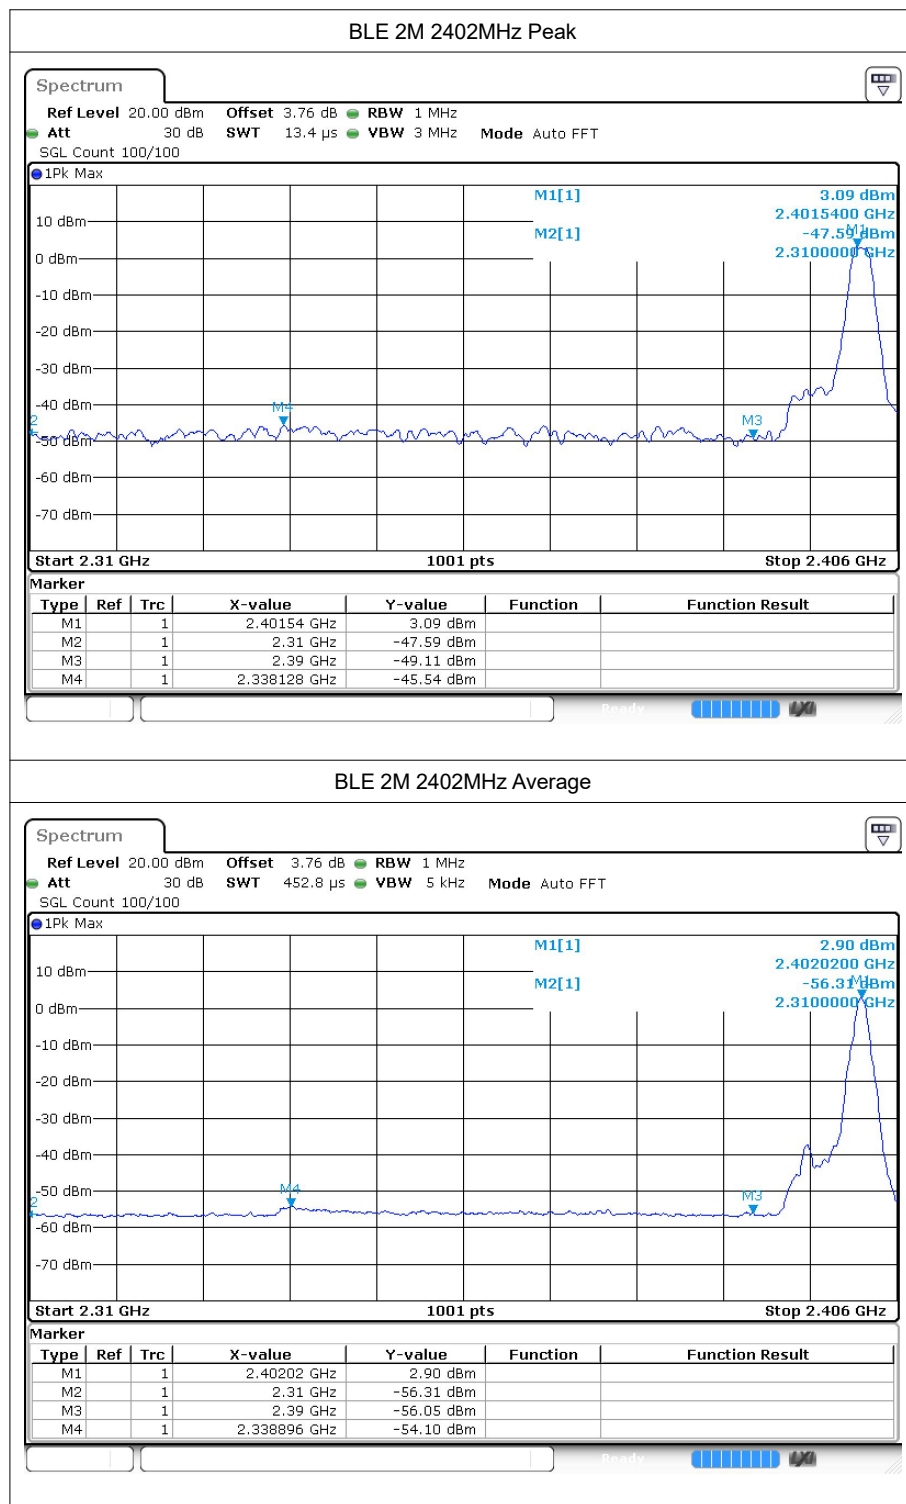

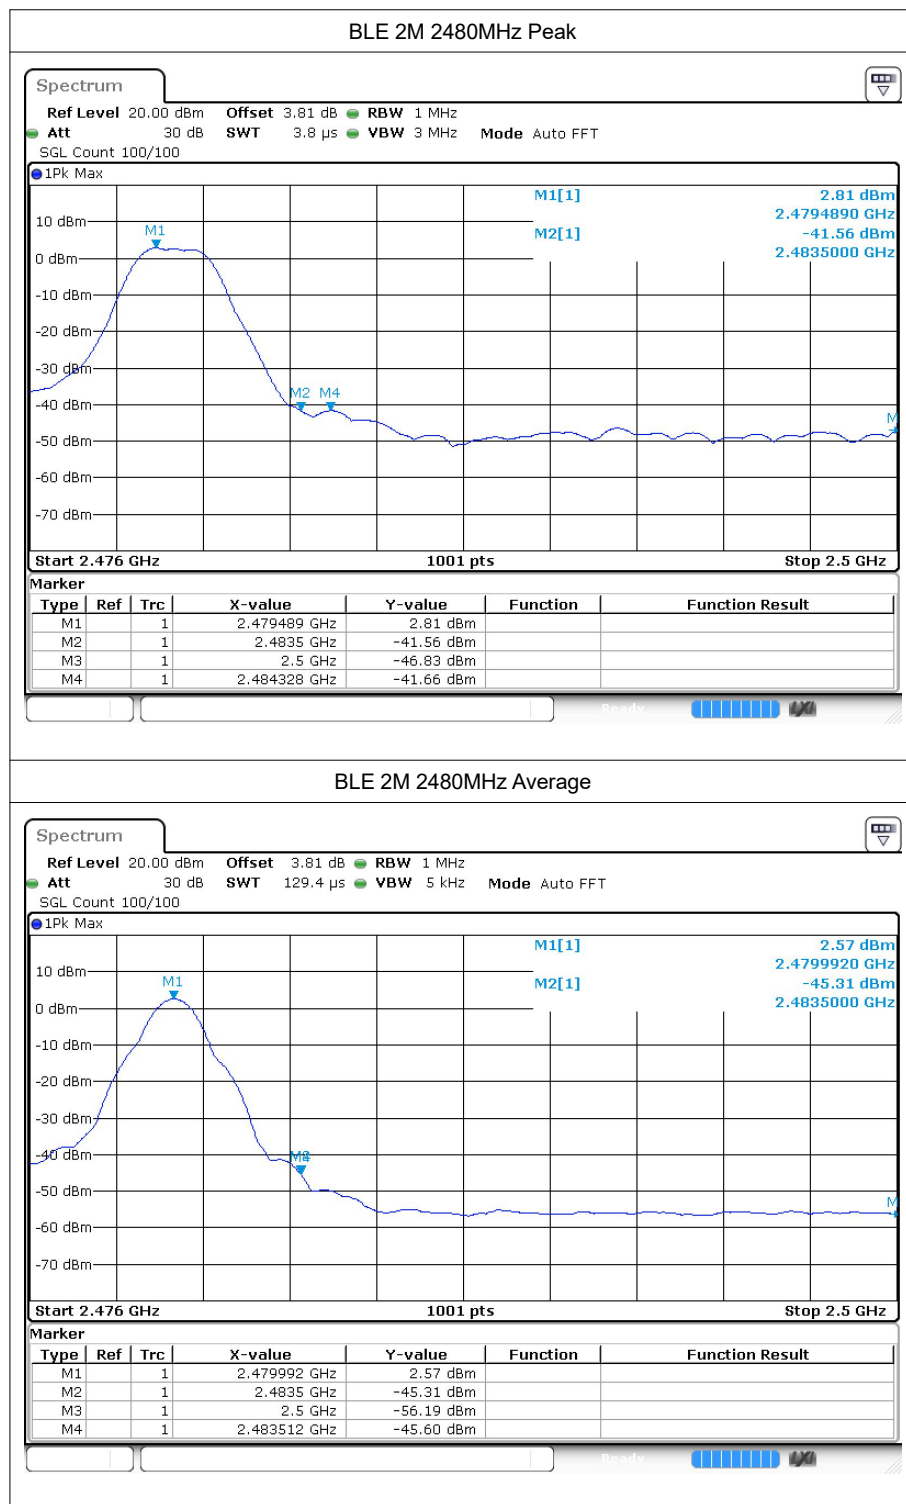

---The End---