
RF Exposure Evaluation

FCC ID: 2A9PP-X12

1 Measuring Standard

KDB 680106 D01 RF Exposure Wireless Charging Apps v03

2 Requirements

According to the item 5 of KDB 680106 D01v03:

Inductive wireless power transfer applications that meet all of the following requirements are excluded from submitting an RF exposure evaluation.

- (1) Power transfer frequency is less than 1MHz.
- (2) Output power from each primary coil is less than or equal to 15 watts.
- (3) The system may consist of more than one source primary coils, charging one or more clients. If more than one primary coil is present, the coil pairs may be powered on at the same time.
- (4) Client device is placed directly in contact with the transmitter.
- (5) Mobile exposure conditions only (portable exposure conditions are not covered by this exclusion).
- (6) The aggregate H-field strengths anywhere at or beyond 15 cm surrounding the device, and 20 cm away from the surface from all coils that by design can simultaneously transmit, and while those coils are simultaneously energized, are demonstrated to be less than 50% of the applicable MPE limit.

Limits


The criteria listed in the following table shall be used to evaluate the environment impact of human exposure to radio frequency (RF) radiation as specified in 1.1307(b)

Limits for Maximum Permissible Exposure (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposures				
0.3-3.0	614	1.63	*(100)	6
3.0-30	1842/f	4.89/f	*(900/f ²)	6
30-300	61.4	0.163	1.0	6
300-1500	/	/	f/300	6
1500-100,000	/	/	5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	f/1500	30
1500-100,000	/	/	1.0	30

F=frequency in MHz
*=Plane-wave equivalent power density
RF exposure compliance will need to be determined with respect to 1.1307(c) and (d) of the FCC rules. The emissions should be within the limits at 300kHz in Table 1 of 1.1310(use the 300kHz limits for 150kHz:614V/m,1.63A/m).

3 Test Setup

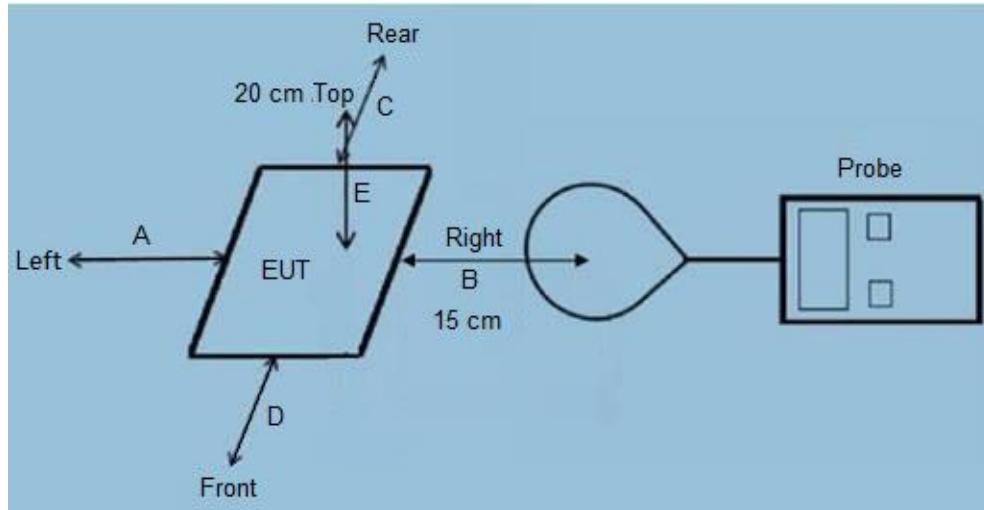

4 Test Procedure

- 1) The RF exposure test was performed in anechoic chamber.
- 2) The measurement probe was placed at test distance (15 cm from all sides and 20 cm from the top) which is between the edge of the charger and the geometric center of probe.
- 3) The highest emission level was recorded and compared with limit as soon as measurement of each points (A, B, C, D, E) were completed.
- 4) The EUT was measured according to the dictates of KDB 680106 D01v03.

Remark: The EUT's test position A, B, C, D and E is valid for the E and H field measurements.

5 Equipment Approval Considerations

The EUT does comply with KDB 680106 D01 as follow table.

Requirements of KDB 680106 D01	Yes / No	Description
Power transfer frequency is less than 1 MHz	Yes	The device operate in the frequency range 110KHz~205KHz
Output power from each primary coil is less than 15 watts	Yes	The maximum output power for each primary coil is 15W.
The system may consist of more than one source primary coils, charging one or more clients. If more than one primary coil is present, the coil pairs may be powered on at the same time.	Yes	The transfer system includes three primary coils.
Client device is placed directly in contact with the transmitter.	Yes	Client device is placed directly in contact with the transmitter.
Mobile exposure conditions only (portable exposure conditions are not covered by this exclusion).	Yes	Mobile exposure conditions only
The aggregate H-field strengths anywhere at or beyond 15 cm surrounding the device, and 20 cm away from the surface from all coils that by design can simultaneously transmit,	Yes	The EUT H-field strengths at 15 cm surrounding the device and 20 cm above the top surface from all simultaneous transmitting coils are demonstrated to be less than 50% of

and while those coils are simultaneously energized, are demonstrated to be less than 50% of the applicable MPE limit.		the MPE limit.
---	--	----------------

6 Description of the test mode

Equipment under test was operated during the measurement under the following conditions:

- Charging and communication mode

Test Modes:		
Mode 1	AC/DC Adapter (9V/2.0A) + EUT + Watch (Battery Status: <1%)	Pre-Tested
Mode 2	AC/DC Adapter (9V/2.0A) + EUT + Watch (Battery Status: <50%)	Pre-Tested
Mode 3	AC/DC Adapter (9V/2.0A) + EUT + Watch (Battery Status: 100%)	Pre-Tested
Mode 4	AC/DC Adapter (9V/2.0A) + EUT + AirPods (Battery Status: <1%)	Pre-Tested
Mode 5	AC/DC Adapter (9V/2.0A) + EUT + AirPods (Battery Status: <50%)	Pre-Tested
Mode 6	AC/DC Adapter (9V/2.0A) + EUT + AirPods (Battery Status: 100%)	Pre-Tested
Mode 7	AC/DC Adapter (9V/2.0A) + EUT + Mobile phone (Battery Status: <1%)	Pre-Tested
Mode 8	AC/DC Adapter (9V/2.0A) + EUT + Mobile phone (Battery Status: <50%)	Pre-Tested
Mode 9	AC/DC Adapter (9V/2.0A) + EUT + Mobile phone (Battery Status: 100%)	Pre-Tested
Mode10	AC/DC Adapter (9V/2.0A) + EUT + Watch+ AirPods (Battery Status: <1%)	Pre-Tested
Mode11	AC/DC Adapter (9V/2.0A) + EUT + Watch+ AirPods (Battery Status: <50%)	Pre-Tested
Mode12	AC/DC Adapter (9V/2.0A) + EUT + Watch+ AirPods (Battery Status: 100%)	Pre-Tested
Mode13	AC/DC Adapter (9V/2.0A) + EUT + Watch+ Mobile phone (Battery Status: <1%)	Pre-Tested
Mode14	AC/DC Adapter (9V/2.0A) + EUT + Watch+ Mobile phone (Battery Status: <50%)	Pre-Tested
Mode15	AC/DC Adapter (9V/2.0A) + EUT + Watch+ Mobile phone (Battery Status: 100%)	Pre-Tested
Mode16	AC/DC Adapter (9V/2.0A) + EUT + AirPods + Mobile phone (Battery Status: <1%)	Pre-Tested
Mode17	AC/DC Adapter (9V/2.0A) + EUT + AirPods + Mobile phone (Battery Status: <50%)	Pre-Tested
Mode18	AC/DC Adapter (9V/2.0A) + EUT + AirPods + Mobile phone (Battery Status: 100%)	Pre-Tested
Mode19	AC/DC Adapter (9V/2.0A) + EUT + AirPods +Watch+ Mobile phone (Battery Status: <1%)	Record
Mode20	AC/DC Adapter (9V/2.0A) + EUT + AirPods +Watch+ Mobile phone (Battery Status: <50%)	Record
Mode21	AC/DC Adapter (9V/2.0A) + EUT + AirPods +Watch+ Mobile phone (Battery Status: 100%)	Record
Note: All test modes were pre-tested, but we only recorded the worst case in this report.		

7 Description of Support Units

Follow auxiliary equipment(s) test with EUT that provided by the manufacturer or laboratory is listed as follow:

Description	Manufacturer	Model	Technical Parameters	Certificate	Provided by
Adapter	/	GS-551	Input: AC 100-240V 50/60Hz Output: DC 5V/ 3A, 9V/ 2A, 10V/ 2.25A	SDOC	Lab

8 Test Instruments list

Test Equipment	Manufacturer	Model No.	SN.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
Exposure Level Tester	Narda	ELT-400	N-0231	June 25 2023	June 24 2024
Magnetic field probe 100cm ²	Narda	ELT probe 100cm ²	M0675	June 25 2023	June 24 2024

9 Test Result

H-Field Strength at 15 cm from the edges surrounding the EUT and 15cm from the top surface of the EUT

Chargin g Battery Level	Unit	Frequency Range (MHz)	Measured E-Field Strength Values (A/m)					FCC H-Field Strength 50% Limits (A/m)	FCC H-Field Strength Limits (A/m)
			Test Position A	Test Position B	Test Position C	Test Position D	Test Position E		
1%	uT	0.112	0.445	0.449	0.455	0.451	0.448	--	--
1%	A/m	0.112	0.356	0.359	0.364	0.361	0.358	0.815	1.63
50%	uT	0.112	0.324	0.310	0.315	0.316	0.320	--	--
50%	A/m	0.112	0.259	0.248	0.252	0.253	0.256	0.815	1.63
99%	uT	0.112	0.195	0.185	0.190	0.170	0.184	--	--
99%	A/m	0.112	0.156	0.148	0.152	0.136	0.147	0.815	1.63

E-Field Strength at 15 cm from the edges surrounding the EUT and 15cm from the top surface of the EUT

Chargin g Battery Level	Unit	Frequency Range (MHz)	Measured E-Field Strength Values (V/m)					FCC E-Field Strength 50% Limits (V/m)	FCC E-Field Strength Limits (V/m)
			Test Position A	Test Position B	Test Position C	Test Position D	Test Position E		
1%	V/m	0.112	134.212	135.343	137.228	136.097	134.966	307.0	614.0
50%	V/m	0.112	97.643	93.496	95.004	95.381	96.512	307.0	614.0
99%	V/m	0.112	58.812	55.796	57.304	51.272	55.419	307.0	614.0

Note: V/m= A/m *377

H-Field Strength at 20cm from the top surface of the EUT

Charging Battery Level	Unit	Frequency Range (MHz)	Measured E-Field Strength	FCC H-Field Strength 50% Limits (A/m)	FCC H-Field Strength Limits (A/m)
			Values (A/m)		
		Test Position E			
1%	uT	0.112	0.401	--	--
1%	A/m	0.112	0.321	0.815	1.63
50%	uT	0.112	0.308	--	--
50%	A/m	0.112	0.246	0.815	1.63
99%	uT	0.112	0.173	--	--
99%	A/m	0.112	0.138	0.815	1.63

Note: A/m = uT/1.25

10 Conclusion

A minimum safety distance of 20 cm to the antenna is required when the device is charging a smart phone for mobile exposure. The detected emissions are below the limitations according FCC KDB 680106 and confirmed by the FCC according to KDB Inquire.

11 Test Set-up Photo



-----End-----