



Shenzhen CTA Testing Technology Co., Ltd.

Room 106, Building 1, Yibaolai Industrial Park, Qiaotou Community, Fuhai Street, Bao'an District, Shenzhen, China

TEST REPORT

FCC Rules and Regulations Part PART 15.249

Report Reference No.....: CTA22121200401

FCC ID.....: 2A9QF-KT612

Compiled by
(position+printed name+signature.. File administrators Zoey Cao

Supervised by
(position+printed name+signature.. Project Engineer Amy Wen

Approved by
(position+printed name+signature.. RF Manager Eric Wang

Date of issue..... Dec. 14, 2022

Zoey Cao
Amy Wen
Eric Wang
approved

Testing Laboratory Name Shenzhen CTA Testing Technology Co., Ltd.

Address..... Room 106, Building 1, Yibaolai Industrial Park, Qiaotou Community, Fuhai Street, Bao'an District, Shenzhen, China

Applicant's name Dongguan Langming Intelligent Technology Co., Ltd

Address Room 303, Building 4, Jewelry Industrial Park, Changping Town, Dongguan City, Guangdong Province, China

Standard **FCC Rules and Regulations Part PART 15.249**

Shenzhen CTA Testing Technology Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen CTA Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen CTA Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test item description Game controller

Trade Mark DOYO, NBCP

Manufacturer Dongguan Langming Intelligent Technology Co., Ltd

Model/Type reference..... KT612

Listed Models KT605, KT605W, KT606, KT606W, 613W, 608W, KT615, WII-033, KT507W, PC188, 711D, 820, 716W, 705W

Modulation GFSK

Frequency..... 2402-2475MHz

Ratings DC 3V From Battery

Result..... **PASS**

TEST REPORT

Equipment under Test : Game controller

Model /Type : KT612

Listed Models : KT605, KT605W, KT606, KT606W, 613W, 608W, KT615, WII-033, KT507W, PC188, 711D, 820, 716W, 705W

Applicant : **Dongguan Langming Intelligent Technology Co., Ltd**

Address : Room 303, Building 4, Jewelry Industrial Park, Changping Town, Dongguan City, Guangdong Province, China

Manufacturer : **Dongguan Langming Intelligent Technology Co., Ltd**

Address : Room 303, Building 4, Jewelry Industrial Park, Changping Town, Dongguan City, Guangdong Province, China

Test Result:	PASS
---------------------	-------------

The test report merely corresponds to the test sample.
It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Contents

1.	<u>..TEST STANDARDS.....</u>	4
2.	<u>..SUMMARY.....</u>	5
2.1.	General Remarks	5
2.2.	Product Description	5
2.3.	Equipment Under Test	5
2.4.	Short description of the Equipment under Test (EUT)	5
2.5.	EUT operation mode	6
2.6.	Block Diagram of Test Setup	7
2.7.	Modifications	7
3.	<u>..TEST ENVIRONMENT.....</u>	8
3.1.	Address of the test laboratory	8
3.2.	Test Facility	8
3.3.	Environmental conditions	8
3.4.	Summary of measurement results	9
3.5.	Statement of the measurement uncertainty	9
3.6.	Equipments Used during the Test	9
4.	<u>..TEST CONDITIONS AND RESULTS.....</u>	11
4.1.	AC Power Conducted Emission.....	11
4.2.	Radiated Emission and Band Edges.....	12
4.3.	20dB Bandwidth Measurement.....	18
4.4.	Antenna Requirement.....	20
5.	<u>..TEST SETUP PHOTOS OF THE EUT.....</u>	21
6.	<u>..TEST PHOTOS OF THE EUT.....</u>	22

1. TEST STANDARDS

The tests were performed according to following standards:

FCC Rules Part 15.249: Operation within the bands 902 - 928 MHz, 2400 - 2483.5 MHz, 5725 - 5875 MHz, and 24.0 - 24.25 GHz.

ANSI C63.10:2013 : American National Standard for Testing Unlicensed Wireless Devices

ANSI C63.4: 2014: –American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40GHz
Range of 9 kHz to 40GHz

2. SUMMARY

2.1. General Remarks

Date of receipt of test sample	:	Dec. 10, 2022
Testing commenced on	:	Dec. 10, 2022
Testing concluded on	:	Dec. 14, 2022

2.2. Product Description

Product Name:	Game controller
Trade Mark:	DOYO, NBCP
Model/Type reference:	KT612
Power Rating	DC 3V From Battery
Sample ID:	CTA221212004-1#(Engineer sample) CTA221212004-2#(Normal sample)
Operation frequency	2402-2475MHz
Modulation	GFSK
Antenna Type	PCB antenna
Antenna Gain	1.90 dBi(Max)

2.3. Equipment Under Test

Power supply system utilised

Power supply voltage	:	<input type="radio"/> 230V / 50 Hz	<input type="radio"/> 120V / 60Hz
		<input type="radio"/> 12 V DC	<input type="radio"/> 24 V DC
		<input checked="" type="radio"/> Other (specified in blank below)	

DC 3V From Battery

2.4. Short description of the Equipment under Test (EUT)

This is a Game controller

For more details, refer to the user's manual of the EUT.

2.5. EUT operation mode


The Applicant use Key to control the EUT for staying in continuous transmitting and receiving mode for testing .There is 74 channels provided to the EUT. Channel Low, Mid and High was selected to test.

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2402	27	2428	53	2454
2	2403	28	2429	54	2455
3	2404	29	2430	55	2456
4	2405	30	2431	56	2457
5	2406	31	2432	57	2458
6	2407	32	2433	58	2459
7	2408	33	2434	59	2460
8	2409	34	2435	60	2461
9	2410	35	2436	61	2462
10	2411	36	2437	62	2463
11	2412	37	2438	63	2464
12	2413	38	2439	64	2465
13	2414	39	2440	65	2466
14	2415	40	2441	66	2467
15	2416	41	2442	67	2468
16	2417	42	2443	68	2469
17	2418	43	2444	69	2470
18	2419	44	2445	70	2471
19	2420	45	2446	71	2472
20	2421	46	2447	72	2473
21	2422	47	2448	73	2474
22	2423	48	2449	74	2475
23	2424	49	2450		
24	2425	50	2451		
25	2426	51	2452		
26	2427	52	2453		

Test frequency:

Channel	Frequency (MHz)
Low	2402
Mid	2433
High	2475

2.6. Block Diagram of Test Setup



2.7. Modifications

No modifications were implemented to meet testing criteria.

3. TEST ENVIRONMENT

3.1. Address of the test laboratory

Shenzhen CTA Testing Technology Co., Ltd.

Room 106, Building 1, Yibaolai Industrial Park, Qiaotou Community, Fuhai Street, Bao'an District, Shenzhen, China

3.2. Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.: 517856 Designation Number: CN1318

Shenzhen CTA Testing Technology Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

Industry Canada Registration Number. Is: 27890 CAB identifier: CN0127

The Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing.

A2LA-Lab Cert. No.: 6534.01

Shenzhen CTA Testing Technology Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.

The 3m-Semi anechoic test site fulfils CISPR 16-1-4 according to ANSI C63.10 and CISPR 16-1-4:2010.

3.3. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Radiated Emission:

Temperature:	23 ° C
Humidity:	48 %
Atmospheric pressure:	950-1050mbar

AC Main Conducted testing:

Temperature:	24 ° C
Humidity:	45 %
Atmospheric pressure:	950-1050mbar

Conducted testing:

Temperature:	24 ° C
Humidity:	45 %
Atmospheric pressure:	950-1050mbar

3.4. Summary of measurement results

FCC PART 15.249		
FCC Part 15.249(a)	Field Strength of Fundamental	PASS
FCC Part 15.209	Spurious Emission	PASS
FCC Part 15.209	Band edge	PASS
FCC Part 15.215(c)	20dB bandwidth	PASS
FCC Part 15.207	Conducted Emission	N/A
FCC Part 15.203	Antenna Requirement	PASS

3.5. Statement of the measurement uncertainty

Measurement Uncertainty

Conducted Emission Expanded Uncertainty = 2.23dB, k=2

Radiated emission expanded uncertainty(9kHz-30MHz) = 3.08dB, k=2

Radiated emission expanded uncertainty(30MHz-1000MHz) = 4.42dB, k=2

Radiated emission expanded uncertainty(Above 1GHz) = 4.06dB, k=2

3.6. Equipments Used during the Test


Test Equipment	Manufacturer	Model No.	Equipment No.	Calibration Date	Calibration Due Date
LISN	R&S	ENV216	CTA-308	2022/08/03	2023/08/02
LISN	R&S	ENV216	CTA-314	2022/08/03	2023/08/02
EMI Test Receiver	R&S	ESPI	CTA-307	2022/08/03	2023/08/02
EMI Test Receiver	R&S	ESCI	CTA-306	2022/08/03	2023/08/02
Spectrum Analyzer	Agilent	N9020A	CTA-301	2022/08/03	2023/08/02
Spectrum Analyzer	R&S	FSP	CTA-337	2022/08/03	2023/08/02
Vector Signal generator	Agilent	N5182A	CTA-305	2022/08/03	2023/08/02
Analog Signal Generator	R&S	SML03	CTA-304	2022/08/03	2023/08/02
Universal Radio Communication	CMW500	R&S	CTA-302	2022/08/03	2023/08/02
Temperature and humidity meter	Chigo	ZG-7020	CTA-326	2022/08/03	2023/08/02
Ultra-Broadband Antenna	Schwarzbeck	VULB9163	CTA-310	2021/08/07	2024/08/06
Horn Antenna	Schwarzbeck	BBHA 9120D	CTA-309	2021/08/07	2024/08/06
Loop Antenna	Zhinan	ZN30900C	CTA-311	2021/08/07	2024/08/06
Horn Antenna	Beijing Hangwei Dayang	OBH100400	CTA-336	2021/08/07	2024/08/06
Amplifier	Schwarzbeck	BBV 9745	CTA-312	2022/08/03	2023/08/02

Amplifier	Taiwan chengyi	EMC051845B	CTA-313	2022/08/03	2023/08/02
Directional coupler	NARDA	4226-10	CTA-303	2022/08/03	2023/08/02
High-Pass Filter	XingBo	XBLBQ-GTA18	CTA-402	2022/08/03	2023/08/02
High-Pass Filter	XingBo	XBLBQ-GTA27	CTA-403	2022/08/03	2023/08/02
Automated filter bank	Tonscend	JS0806-F	CTA-404	2022/08/03	2023/08/02
Power Sensor	Agilent	U2021XA	CTA-405	2022/08/03	2023/08/02
Amplifier	Schwarzbeck	BBV9719	CTA-406	2022/08/03	2023/08/02

4. TEST CONDITIONS AND RESULTS

4.1. AC Power Conducted Emission

TEST CONFIGURATION

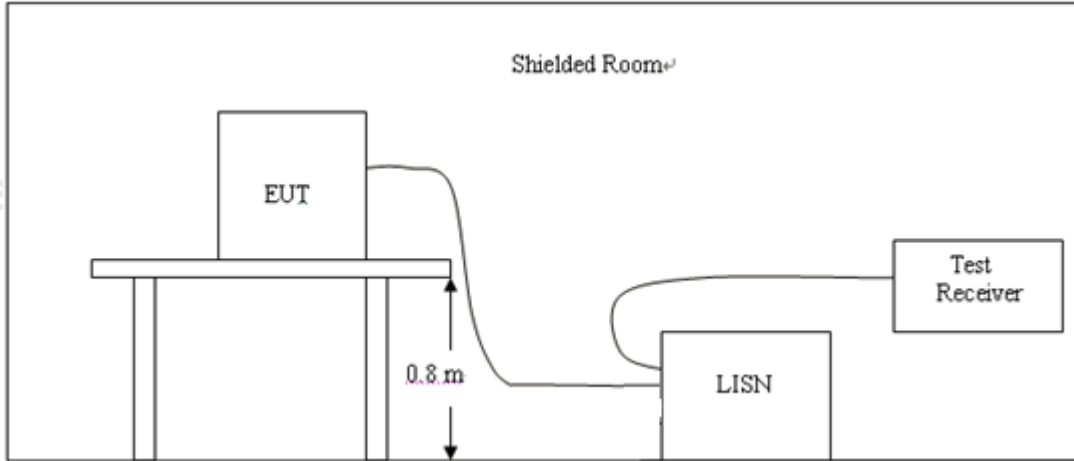

TEST PROCEDURE

- 1, The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10.
- 2, Support equipment, if needed, was placed as per ANSI C63.10.
- 3, All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4, If a EUT received DC power from the USB Port of Notebook PC, the PC's adapter received power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
- 5, All support equipments received AC power from a second LISN, if any.
- 6, The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7, Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.

AC Power Conducted Emission Limit

For intentional device, according to § 15.207(a) AC Power Conducted Emission Limits is as following :

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.


TEST RESULTS

The EUT is powered by the Battery, So this test item is not applicable for the EUT.


4.2. Radiated Emission and Band Edges

TEST CONFIGURATION


Frequency range 9 KHz – 30MHz

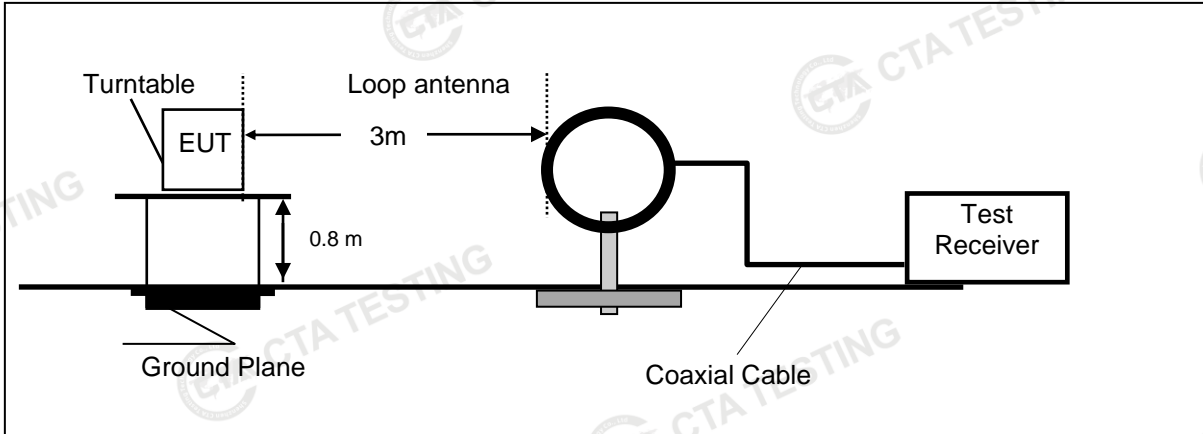

Frequency range 30MHz – 1000MHz

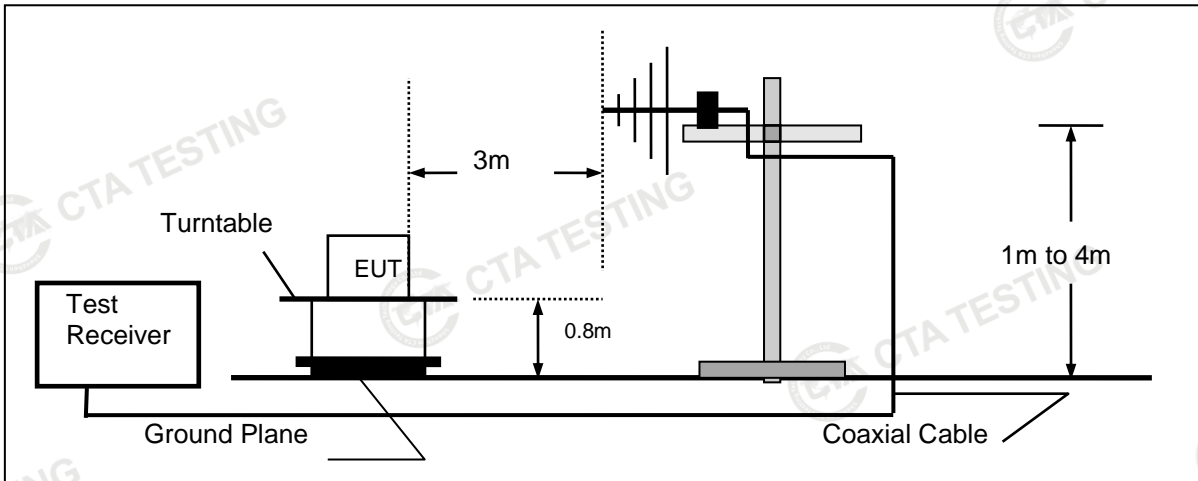

Frequency range above 1GHz-25GHz

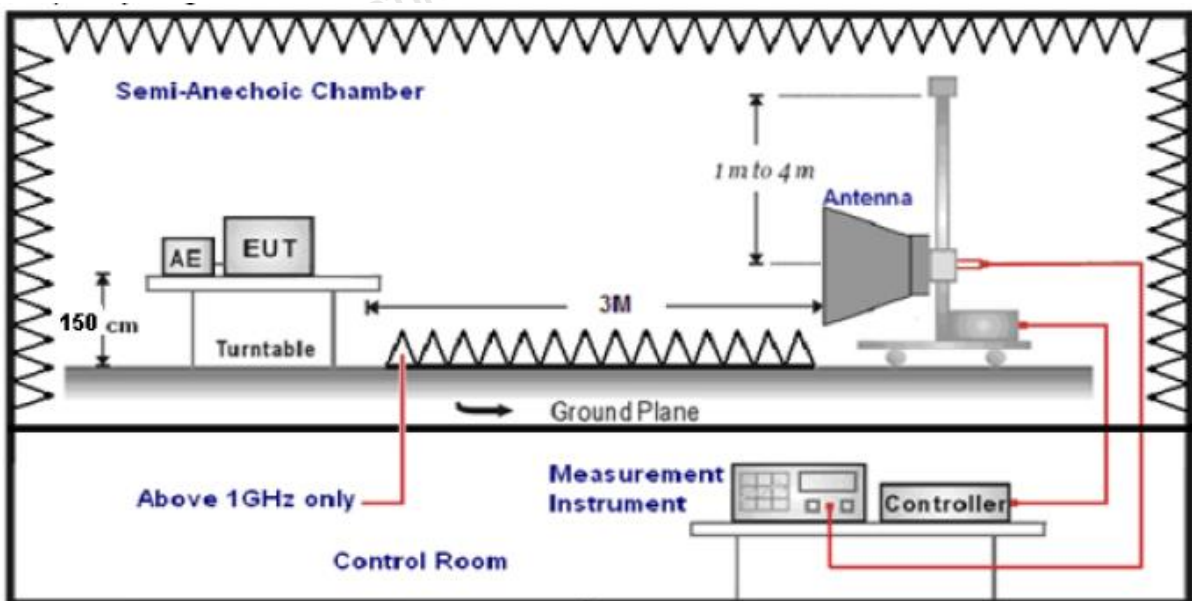

TEST PROCEDURE

1. The EUT was placed on a turn table which is 0.8m above ground plane when testing frequency range 9 KHz –25GHz.
2. Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0°C to 360°C to acquire the highest emissions from EUT.
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measurements have been completed.
5. The EUT minimum operation frequency was 26MHz and maximum operation frequency was 1910MHz.so radiated emission test frequency band from 9KHz to 25GHz.
6. The distance between test antenna and EUT as following table states:

Test Frequency range	Test Antenna Type	Test Distance
9KHz-30MHz	Active Loop Antenna	3
30MHz-1GHz	Ultra-Broadband Antenna	3
1GHz-18GHz	Double Ridged Horn Antenna	3
18GHz-25GHz	Horn Antenna	1

7. Setting test receiver/spectrum as following table states:

Test Frequency range	Test Receiver/Spectrum Setting	Detector
9KHz-150KHz	RBW=200Hz/VBW=3KHz, Sweep time=Auto	QP
150KHz-30MHz	RBW=9KHz/VBW=100KHz, Sweep time=Auto	QP
30MHz-1GHz	RBW=120KHz/VBW=1000KHz, Sweep time=Auto	QP
1GHz-40GHz	Peak Value: RBW=1MHz/VBW=3MHz, Sweep time=Auto Average Value: RBW=1MHz/VBW=10Hz, Sweep time=Auto	Peak

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

FS = RA + AF + CL - AG

Where FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
RA = Reading Amplitude	AG = Amplifier Gain
AF = Antenna Factor	

Transd=AF +CL-AG

RADIATION LIMIT

According 15.249, the field strength of emissions from intentional radiators operated within 2400MHz-2483.5 MHz shall not exceed 94dBµV/m (50mV/m):

FCC PART 15.249(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a)

Radiated emission limits


Frequency (MHz)	Distance (Meters)	Radiated (dBµV/m)	Radiated (µV/m)
0.009-0.49	3	20log(2400/F(KHz))+40log(300/3)	2400/F(KHz)
0.49-1.705	3	20log(24000/F(KHz))+ 40log(30/3)	24000/F(KHz)
1.705-30	3	20log(30)+ 40log(30/3)	30
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500

TEST RESULTS

Remark:


1. This test was performed with EUT in X, Y, Z position and the worse case was found when EUT in X position.
2. Both modes of GFSK were tested at Low, Middle, and High channel and recorded worst mode at GFSK
3. Radiated emission test from 9 KHz to 10th harmonic of fundamental was verified, and no emission found except system noise floor in 9 KHz to 30MHz and not recorded in this report.

For 30MHz-1GHz

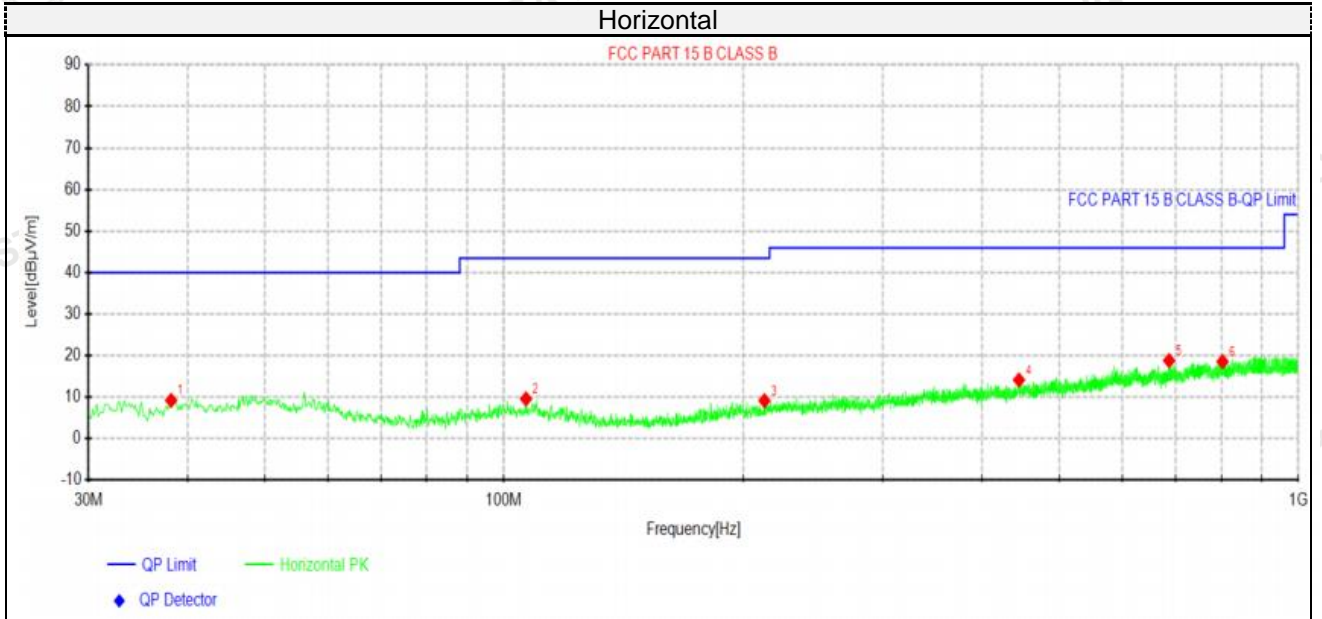

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	38.1238	26.66	9.25	-17.41	40.00	30.75	100	184	Horizontal
2	106.63	28.28	9.60	-18.68	43.50	33.90	100	357	Horizontal
3	212.845	28.18	9.16	-19.02	43.50	34.34	100	85	Horizontal
4	445.038	29.27	14.16	-15.11	46.00	31.84	100	167	Horizontal
5	687.538	30.56	18.82	-11.74	46.00	27.18	100	3	Horizontal
6	802.726	29.27	18.59	-10.68	46.00	27.41	100	51	Horizontal

- Note: 1). Level (dBµV/m) = Reading (dBµV) + Factor (dB/m)
 2). Factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB)
 3). Margin (dB) = Limit (dBµV/m) - Level (dBµV/m)

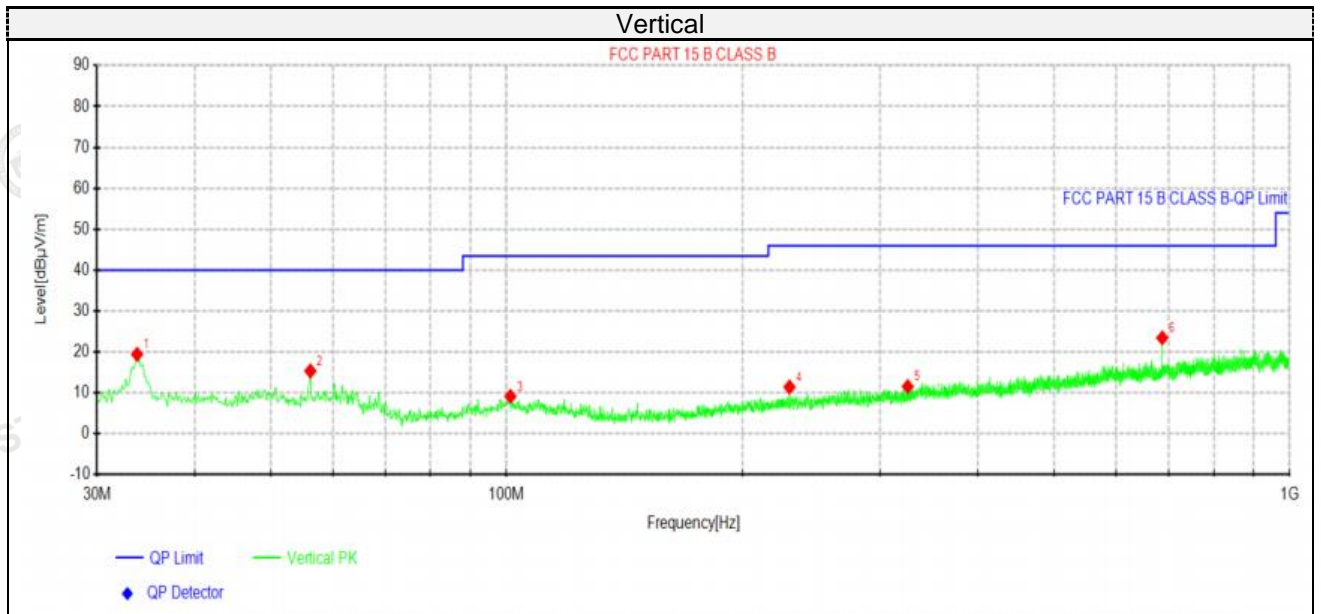

Suspected Data List

NO.	Freq. [MHz]	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	33.7588	37.52	19.45	-18.07	40.00	20.55	100	51	Vertical
2	56.19	32.76	15.37	-17.39	40.00	24.63	100	353	Vertical
3	101.173	27.59	9.17	-18.42	43.50	34.33	100	268	Vertical
4	229.82	29.93	11.45	-18.48	46.00	34.55	100	138	Vertical
5	325.365	28.30	11.57	-16.73	46.00	34.43	100	203	Vertical
6	687.538	35.21	23.47	-11.74	46.00	22.53	100	67	Vertical

Note:1).Level (dBµV/m)= Reading (dBµV)+ Factor (dB/m)

2). Factor(dB/m)=Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB)

3). Margin(dB) = Limit (dBµV/m) - Level (dBµV/m)

For 1GHz to 25GHz

GFSK (above 1GHz)

Frequency(MHz):			2402		Polarity:		HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2402.00	97.09	PK	114.00	16.91	108.36	27.48	3.43	42.18	-11.27
2402.00	79.54	AV	94.00	14.46	90.81	27.48	3.43	42.18	-11.27
4804.00	50.81	PK	74.00	23.19	55.08	32.34	5.12	41.73	-4.27
4804.00	44.71	AV	54.00	9.29	48.98	32.34	5.12	41.73	-4.27
7206.00	50.56	PK	74.00	23.44	51.08	36.61	6.49	43.62	-0.52
7206.00	38.01	AV	54.00	15.99	38.53	36.61	6.49	43.62	-0.52

Frequency(MHz):			2402		Polarity:		VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2402.00	94.56	PK	114.00	19.44	105.83	27.48	3.43	42.18	-11.27
2402.00	77.01	AV	94.00	16.99	88.28	27.48	3.43	42.18	-11.27
4804.00	48.28	PK	74.00	25.72	52.55	32.34	5.12	41.73	-4.27
4804.00	42.18	AV	54.00	11.82	46.45	32.34	5.12	41.73	-4.27
7206.00	48.03	PK	74.00	25.97	48.55	36.61	6.49	43.62	-0.52
7206.00	35.48	AV	54.00	18.52	36.00	36.61	6.49	43.62	-0.52

Frequency(MHz):			2433		Polarity:		HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2433.00	97.55	PK	114.00	16.45	108.79	27.58	3.49	42.31	-11.24
2433.00	82.00	AV	94.00	12.00	93.24	27.58	3.49	42.31	-11.24
4866.00	53.36	PK	74.00	20.64	57.51	32.49	5.18	41.82	-4.15
4866.00	47.26	AV	54.00	6.74	51.41	32.49	5.18	41.82	-4.15
7299.00	53.11	PK	74.00	20.89	53.51	36.71	6.56	43.67	-0.40
7299.00	40.56	AV	54.00	13.44	40.96	36.71	6.56	43.67	-0.40

Frequency(MHz):			2433		Polarity:		VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2433.00	95.33	PK	114.00	18.67	106.57	27.58	3.49	42.31	-11.24
2433.00	79.78	AV	94.00	14.22	91.02	27.58	3.49	42.31	-11.24
4866.00	51.14	PK	74.00	22.86	55.29	32.49	5.18	41.82	-4.15
4866.00	45.04	AV	54.00	8.96	49.19	32.49	5.18	41.82	-4.15
7299.00	50.89	PK	74.00	23.11	51.29	36.71	6.56	43.67	-0.40
7299.00	38.34	AV	54.00	15.66	38.74	36.71	6.56	43.67	-0.40

Frequency(MHz):			2475		Polarity:		HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2475.00	97.44	PK	114.00	16.56	107.56	27.68	4.48	42.28	-10.12
2475.00	83.01	AV	94.00	10.99	93.13	27.68	4.48	42.28	-10.12
4950.00	54.31	PK	74.00	19.69	57.40	32.72	5.67	41.48	-3.09
4950.00	48.21	AV	54.00	5.79	51.30	32.72	5.67	41.48	-3.09
7425.00	53.83	PK	74.00	20.17	53.40	37.02	7.26	43.85	0.43
7425.00	41.28	AV	54.00	12.72	40.85	37.02	7.26	43.85	0.43

Frequency(MHz):			2475		Polarity:		VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2475.00	94.84	PK	114.00	19.16	104.96	27.68	4.48	42.28	-10.12
2475.00	80.41	AV	94.00	13.59	90.53	27.68	4.48	42.28	-10.12
4950.00	51.71	PK	74.00	22.29	54.80	32.72	5.67	41.48	-3.09
4950.00	45.61	AV	54.00	8.39	48.70	32.72	5.67	41.48	-3.09
7425.00	51.23	PK	74.00	22.77	50.80	37.02	7.26	43.85	0.43
7425.00	38.68	AV	54.00	15.32	38.25	37.02	7.26	43.85	0.43

REMARKS:

1. Emission level (dBuV/m) =Raw Value (dBuV)+Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)- Pre-amplifier
3. Margin value = Limit value- Emission level.
4. -- Mean the PK detector measured value is below average limit.
5. The other emission levels were very low against the limit.

Results of Band Edges Test (Radiated)

Frequency(MHz):			2402		Polarity:		HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2390.00	60.33	PK	74	13.67	70.75	27.42	4.31	42.15	-10.42
2390.00	41.80	AV	54	12.20	52.22	27.42	4.31	42.15	-10.42
Frequency(MHz):			2402		Polarity:		VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2390.00	57.85	PK	74	16.15	68.27	27.42	4.31	42.15	-10.42
2390.00	39.32	AV	54	14.68	49.74	27.42	4.31	42.15	-10.42
Frequency(MHz):			2475		Polarity:		HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2483.50	60.35	PK	74	13.65	70.46	27.7	4.47	42.28	-10.11
2483.50	42.85	AV	54	11.15	52.96	27.7	4.47	42.28	-10.11
Frequency(MHz):			2475		Polarity:		VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2483.50	57.82	PK	74	16.18	67.93	27.7	4.47	42.28	-10.11
2483.50	40.32	AV	54	13.68	50.43	27.7	4.47	42.28	-10.11

Note:

- 1) Emission level (dBuV/m) = Meter Reading+ antenna Factor+ cable loss- preamp factor.
- 2) Margin value = Limits-Emission level.
- 3) -- Mean the PK detector measured value is below average limit.
- 4) The other emission levels were very low against the limit.
- 5) RBW1MHz VBW3MHz Peak detector is for PK value; RBW 1MHz VBW10Hz Peak detector is for AV value.

4.3. 20dB Bandwidth Measurement

TEST CONFIGURATION



TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 30KHz RBW and 300KHz VBW.

The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.

LIMIT

N/A

TEST RESULTS

Modulation	Channel	20dB bandwidth (MHz)	Result
GFSK	Low	1.379	PASS
	Mid	1.378	
	High	1.382	

GFSK



Low



Mid



High

4.4. Antenna Requirement

Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.


And according to FCC 47 CFR Section 15.247 (c), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

Antenna Information

The maximum gain of antenna was 1.90 dBi.

Remark: The antenna gain is provided by the customer, if the data provided by the customer is not accurate, Shenzhen CTA Testing Technology Co., Ltd. does not assume any responsibility.


5. Test Setup Photos of the EUT


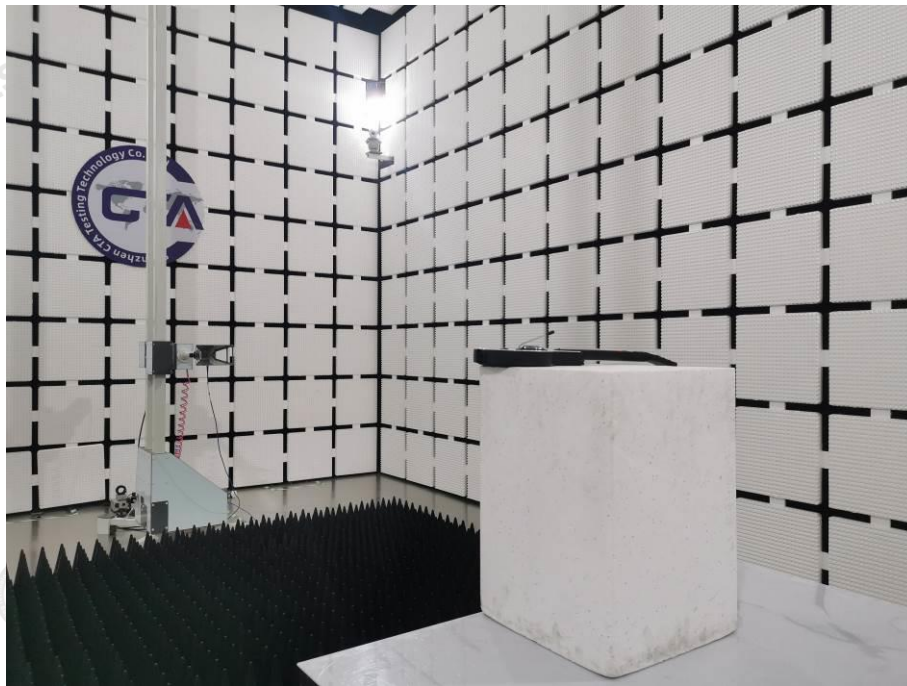





6. Test Photos of the EUT












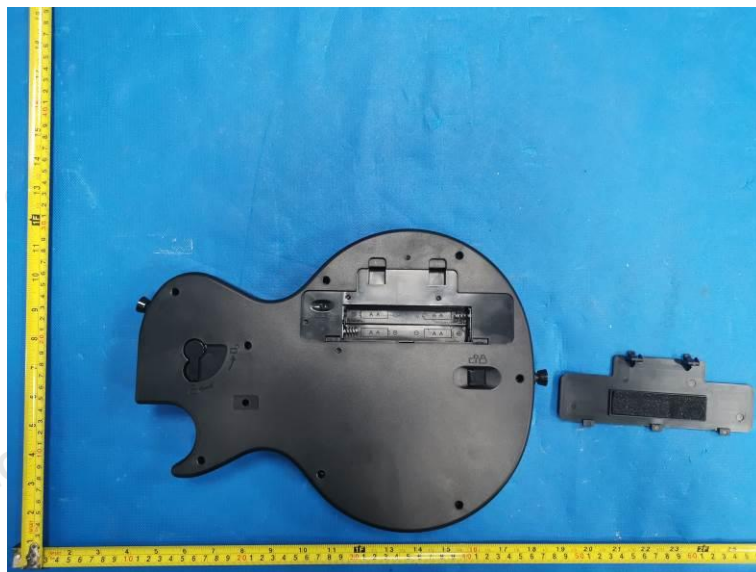


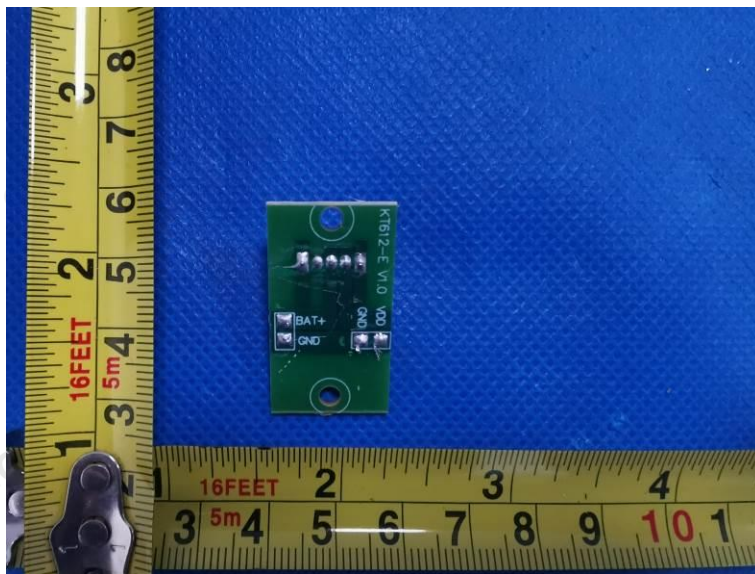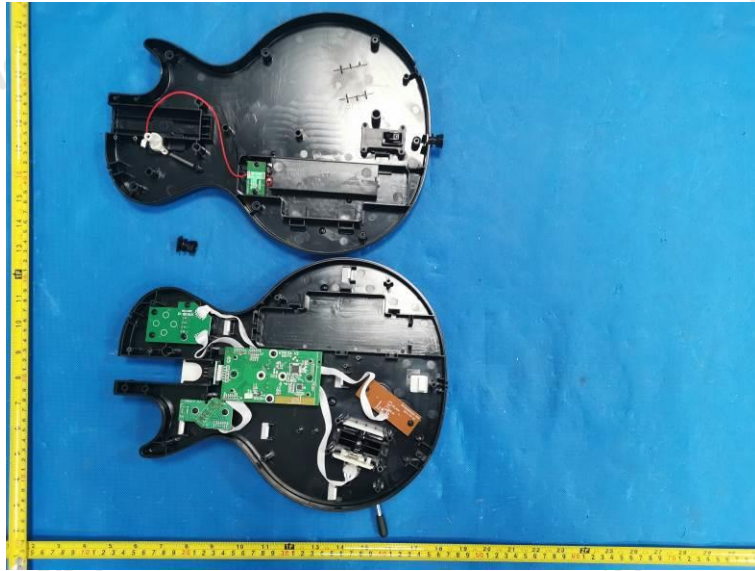


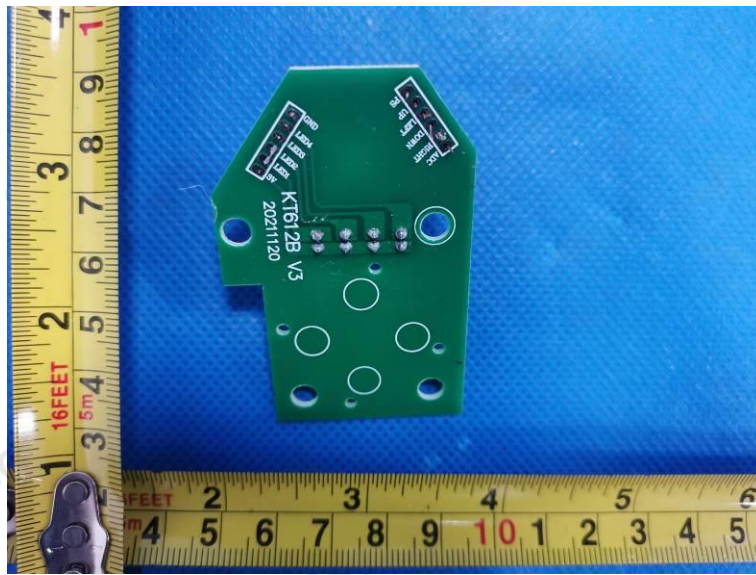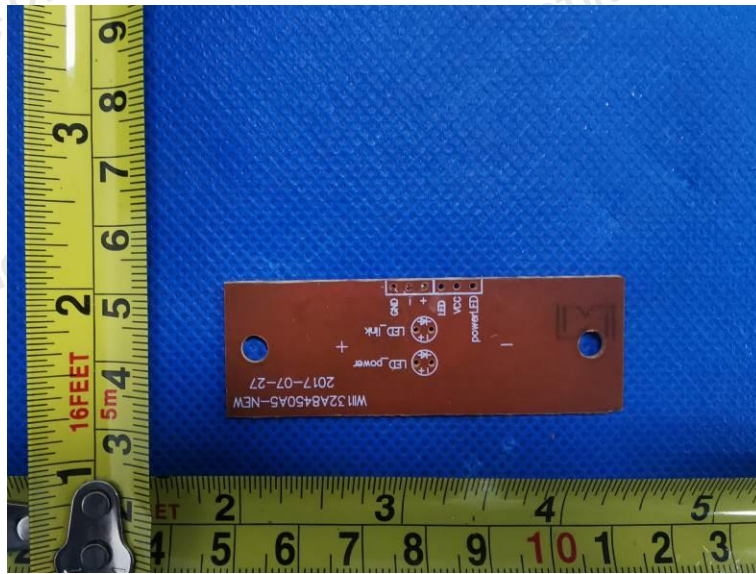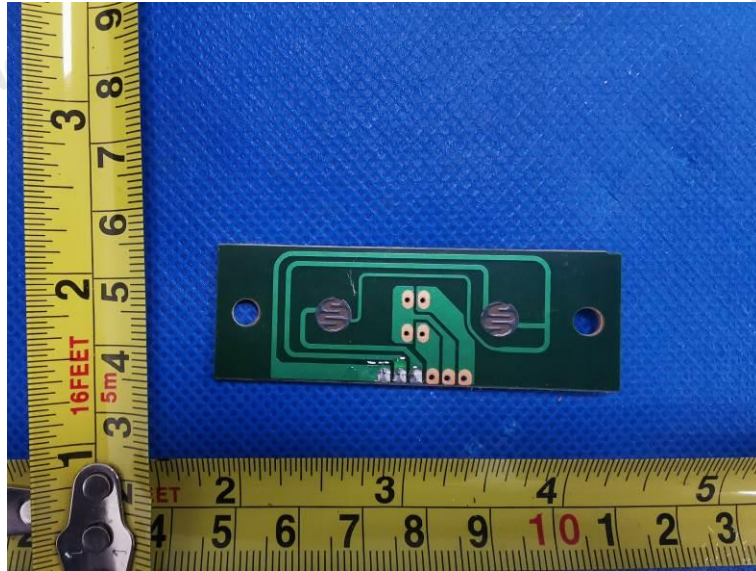

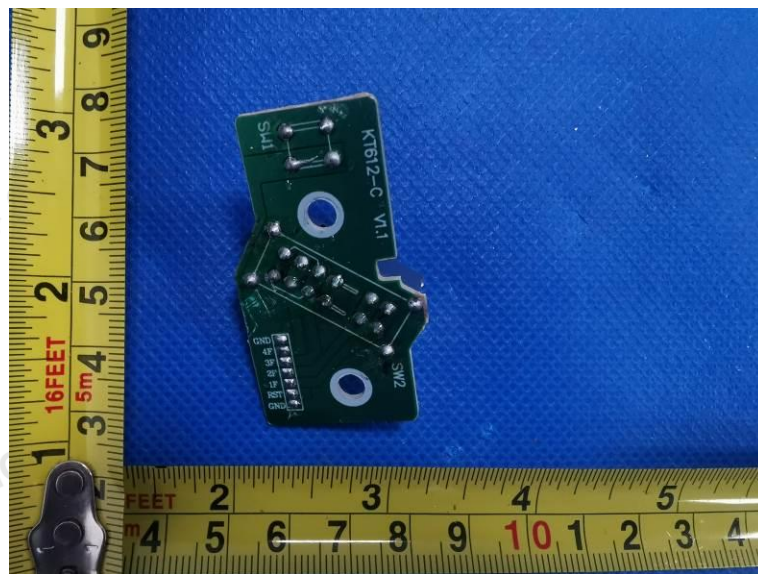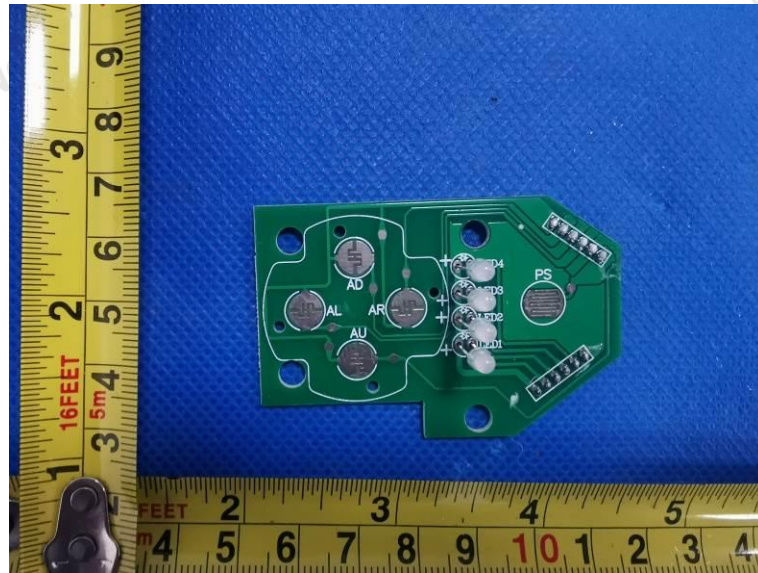

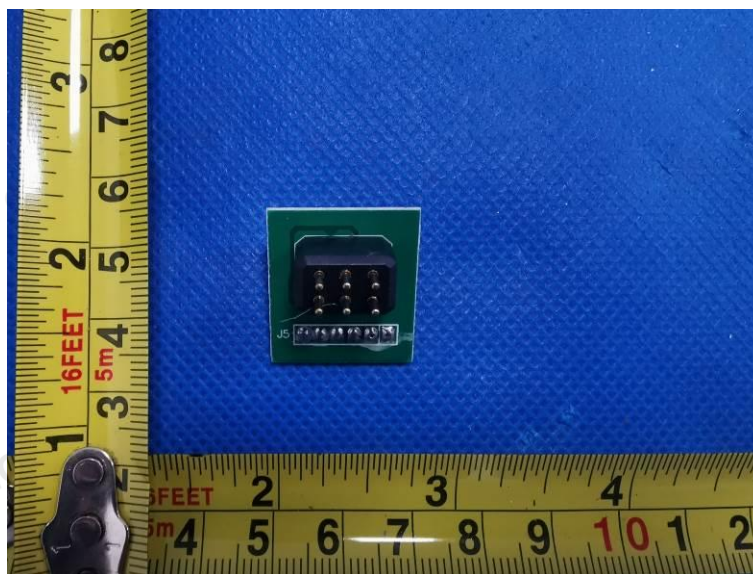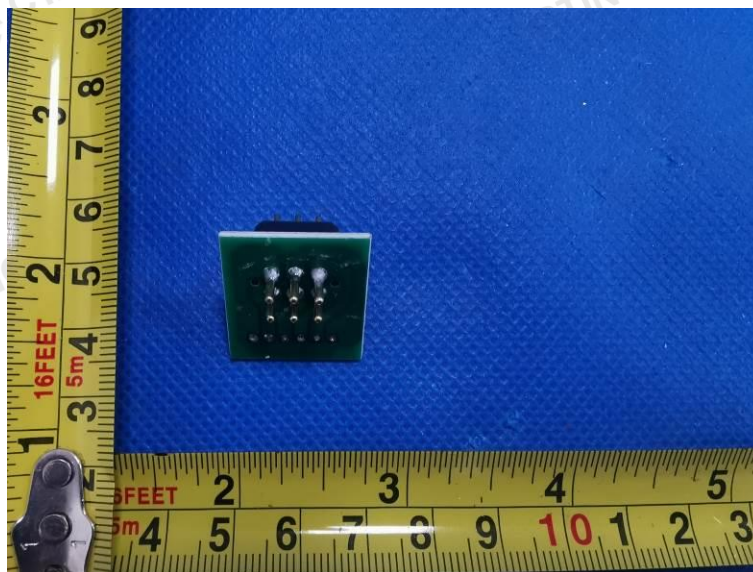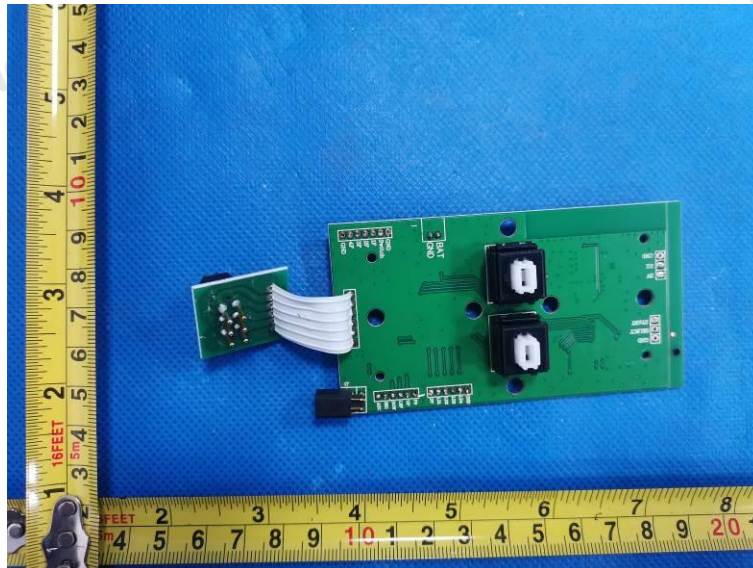

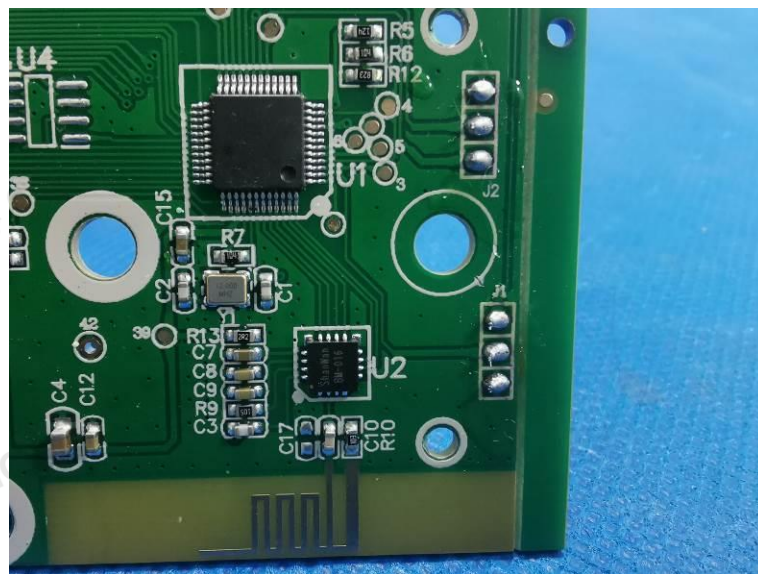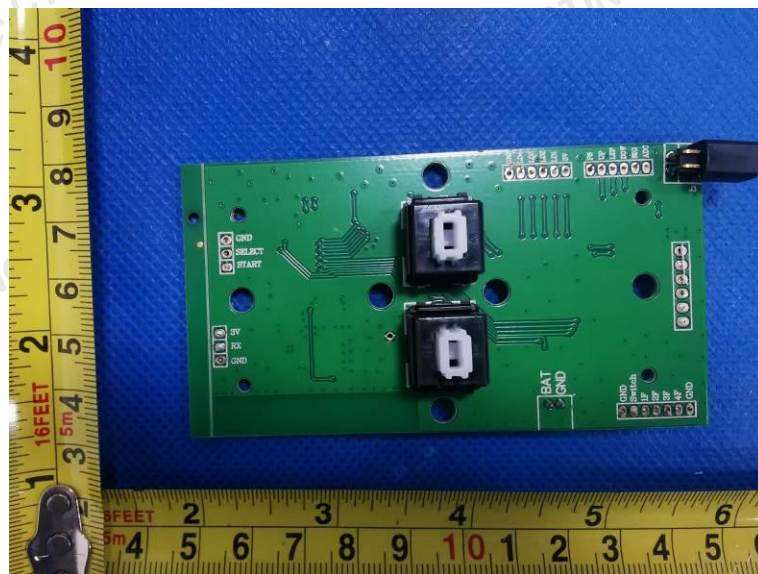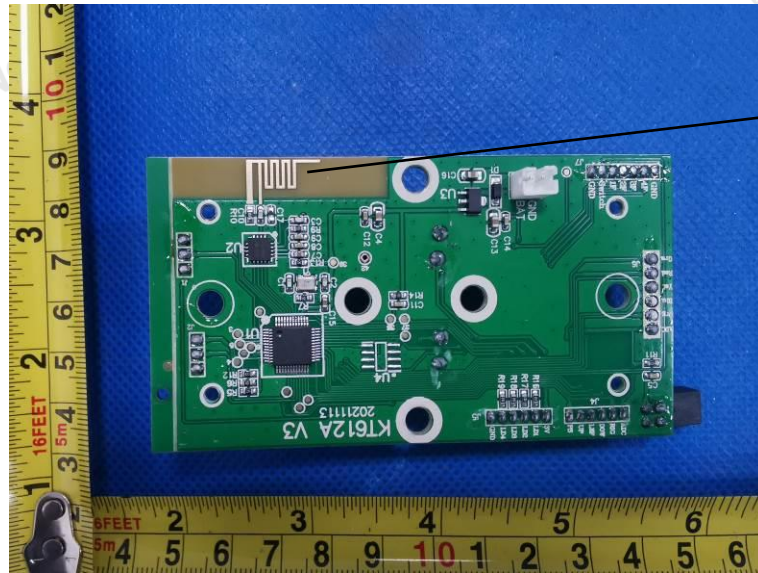

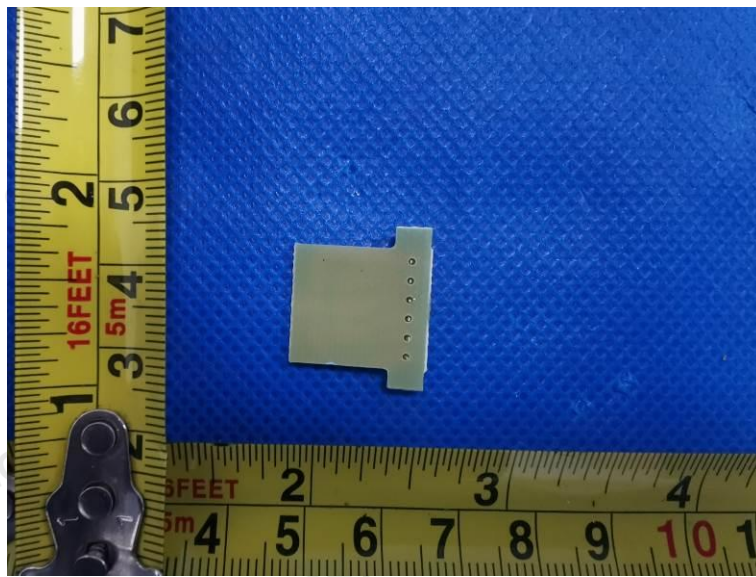



.....End of Report.....