



EMC TEST REPORT

Product Name: Smartphone

Model Name: A180

FCC ID: 2A9SN-A180

Issued For : INOI Limited

Office 302, Dominion Centre 43-59, Queens Road, East
Wanchai, Hong Kong, China

Issued By : Shenzhen LGT Test Service Co., Ltd.

Room 205, Building 13, Zone B, Chen Hsong Industrial Park,
No.177 Renmin West Road, Jinsha Community, Kengzi
Street, Pingshan New District, Shenzhen, China

Report Number: LGT23C066EM01

Sample Received Date: Mar. 24, 2023

Date of Test: Mar. 24, 2023 ~ Apr. 17, 2023

Date of Issue: Apr. 17, 2023

The test report is effective only with both signature and specialized stamp. This report shall not be reproduced except in full without the written approval of the Laboratory. The results in this report only apply to the tested sample.



TEST REPORT CERTIFICATION

Applicant INOI Limited
Address Office 302, Dominion Centre 43-59, Queens Road, East Wanchai,
Hong Kong, China
Manufacture INOI Limited
Address Office 302, Dominion Centre 43-59, Queens Road, East Wanchai,
Hong Kong, China
Product Name Smartphone
Trademark INOI
Model Name A180
Sample Status: Normal

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC 47 CFR Part 15 Subpart B ANSI C63.4-2014	PASS

Prepared by:

Terry Zhao

Terry Zhao
Engineer

Approved by:

Vita Li

Vita Li
Technical Director





Table of Contents

1. TEST SUMMARY	5
1.1 TEST LABORATORY	6
1.2 MEASUREMENT UNCERTAINTY	6
2. GENERAL INFORMATION	7
2.1 GENERAL DESCRIPTION OF THE EUT	7
2.2 DESCRIPTION OF THE TEST MODES	8
2.3 DESCRIPTION OF THE SUPPORT UNITS	8
2.5 MEASUREMENT INSTRUMENTS LIST	9
3. EMC EMISSION TEST	10
3.1 CONDUCTED EMISSION MEASUREMENT	10
3.2 RADIATED EMISSION MEASUREMENT	16
APPENDIX I - TEST SETUP	23



Revision History

Rev.	Issue Date	Revisions
00	Apr. 17, 2023	Initial Issue



1. TEST SUMMARY

EMC Emission				
Standard	Test Item	Limit	Judgement	Remark
FCC 47 CFR Part 15 Subpart B ANSI C63.4-2014	Conducted Emissions	Class B	PASS	
	Radiated Emissions Below 1GHz	Class B	PASS	
	Radiated Emissions Above 1GHz	Class B	PASS	Note 1 Note 2

Note:

- 1 "N/A" denotes test is not applicable in this Test Report
- 2 If the highest frequency of the internal sources of the EUT is less than 108 MHz, the measurement shall only be made up to 1 GHz. If the highest frequency of the internal sources of the EUT is between 108 MHz and 500 MHz, the measurement shall only be made up to 2 GHz. If the highest frequency of the internal sources of the EUT is between 500 MHz and 1 GHz, measurement shall only be made up to 5 GHz. If the highest frequency of the internal sources of the EUT is above 1 GHz, the measurement shall be made up to 5 times the highest frequency or 40 GHz, whichever is less.
- 3 There're have 128 +4GB and 258+8GB two kinds of memory configurations



1.1 TEST LABORATORY

Company Name:	Shenzhen LGT Test Service Co., Ltd.
Address:	Room 205, Building 13, Zone B, Chen Hsong Industrial Park, No.177 Renmin West Road, Jinsha Community, Kengzi Street, Pingshan New District, Shenzhen, China
Accreditation Certificate	A2LA Certificate No.: 6727.01
	FCC Registration No.: 746540
	CAB ID: CN0136

1.2 MEASUREMENT UNCERTAINTY

Test Item	Measurement Frequency Range MHz	Uncertainty dB
Conducted Emissions at AC mains power port	0.009 ~ 30	2.80
Radiated Emissions	0.009 ~ 30	2.16
Radiated Emissions	30 ~ 1000	4.40
Radiated Emissions	1000 ~ 18000	5.49

Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.



2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF THE EUT

Product Name	Smartphone
Trademark	INOI
Model Name	A180
Series Model	N/A
Model Difference	N/A
Adapter	Model: IN-C01/19 Input: 100-240V, 50/60Hz, 0.25A Output: 5V, 2A
Battery	Capacity: 5000mAh Rated Voltage: 3.85V
Test Voltage	AC 120V/60Hz Battery: 3.85V
Hardware Version	J535A_9230MB_MB_D4XEF_V1.3
Software Version	TP1A.220624.014 release-keys

Note: For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.



2.2 DESCRIPTION OF THE TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested based on the consideration of following EUT operation mode or test configuration mode which possibly have effect on EMI emission level. Each of these EUT operating mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Test Mode	Description
Mode 1	Charging +GSM link+BT+Wi-Fi+GPS +Camera recording
Mode 2	Charging +WCDMA link+BT+Wi-Fi+Galileo+Camera recording
Mode 3	Charging +LTE link+BT+Wi-Fi+GPS+ Camera recording
Mode 4	USB Data Transmission+GSM link+BT+Wi-Fi

Note: Only the data of worst-case mode 1 was recorded in this report.

2.3 DESCRIPTION OF THE SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Accessories Equipment

Description	Manufacturer	Model	S/N	Rating
Adapter	INOI	IN-C01/19	N/A	Input: 100-240V ~ 50/60Hz 0.25A Output: 5V, 2A
USB-A to USB-C Cable	N/A	N/A	N/A	1m, unshielded, without ferrite core

Auxiliary Equipment

Description	Manufacturer	Model	S/N	Rating
Laptop	HUAWEI	HKF-16	N/A	N/A

Note:

- (1) For detachable type I/O cable should be specified the length in cm in 『Length』 column.



2.5 MEASUREMENT INSTRUMENTS LIST

Conducted Emission					
Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Until
EMI Test Receiver	R&S	ESU8	100372	2023.04.10	2024.04.09
LISN	COM-POWER	LI-115	02032	2023.04.10	2024.04.09
LISN	SCHWARZBECK	NNLK 8121	00847	2022.08.19	2023.08.18
ISN	FCC	T4-02	91317	2022.06.08	2023.06.07
ISN	SCHWARZBECK	NTFM 8158	00303	2022.08.19	2023.08.18
Transient Limiter	CYBERTEK	EM5010A	E2250100049	2022.08.19	2023.08.18
Temperature & Humidity	KTJ	TA218B	N.A	2022.05.05	2023.05.04
Testing Software	EMC-I_V1.4.0.3_SKET				

Radiated Emission					
Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Until
EMI Test Receiver	R&S	ESU8	100372	2023.04.10	2024.04.09
Spectrum Analyzer	Keysight	N9020A	MY50530994	2022.12.09	2023.12.08
Spectrum Analyzer	Keysight	N9010B	MY60242508	2022.04.29	2023.04.28
Active loop Antenna	ETS	6502	00049544	2022.06.02	2024.06.01
Bilog Antenna	SCHAFFNER	CBL6112B	2705	2022.06.05	2024.06.04
Bilog Antenna	SCHWARZBECK	VULB 9168	01447	2022.12.12	2023.12.11
Horn Antenna	SCHWARZBECK	3115	10SL0060	2022.06.02	2024.06.01
Pre-amplifier (9kHz-1GHz)	EMtrace	RP01A	02017	2023.04.10	2024.04.09
Pre-amplifier (1-26.5G)	Agilent	8449B	3008A4722	2023.04.10	2024.04.09
Temperature & Humidity	KTJ	TA218B	N.A	2022.05.05	2023.05.04
Testing Software	EMC-I_V1.4.0.3_SKET				



3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 LIMITS

FREQUENCY (MHz)	Conducted Emission Limits (dBuV)			
	Class A		Class B	
	Quasi-peak	Average	Quasi-peak	Average
0.15 ~ 0.5	79.00	66.00	66 - 56 *	56 - 46 *
0.5 ~ 5	73.00	60.00	56.00	46.00
5 ~ 30	73.00	60.00	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.
- (3) The test result calculated as following:
 Measurement Value = Reading Level + Correct Factor
 Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor
 Margin Level = Measurement Value - Limit Value

The following table is the setting of the receiver


Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

3.1.2 TEST PROCEDURE

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item - EUT Test Photos.




3.1.3 TEST SETUP

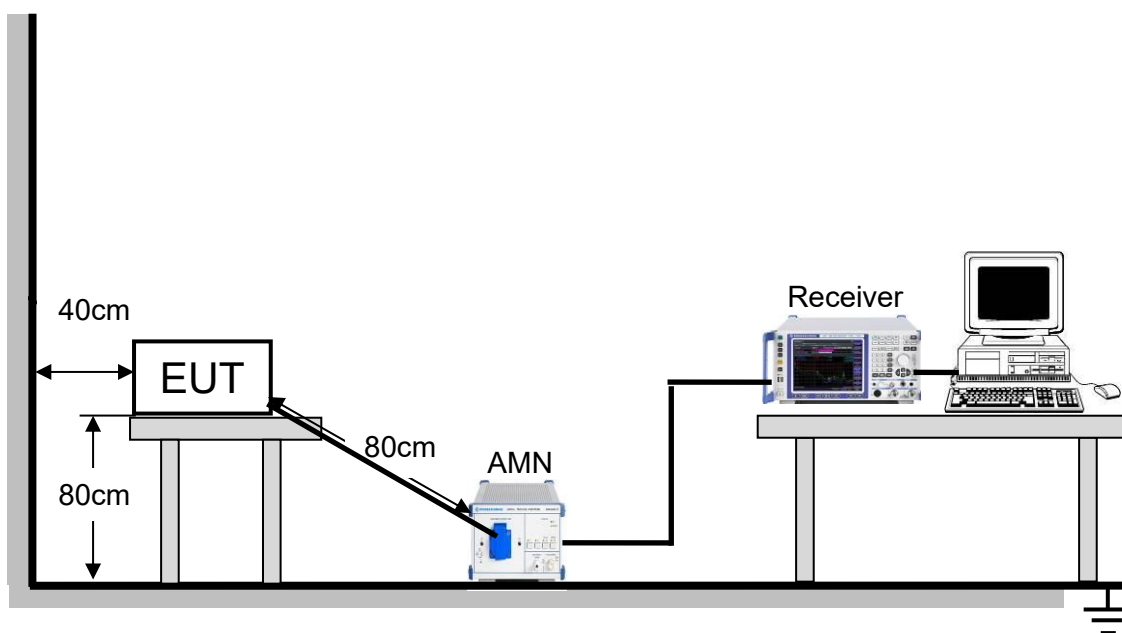



3.1.4 TEST RESULTS


Project: LGT23C066	Test Engineer: Dylan.shi
EUT: Smartphone	Temperature: 26.3°C
M/N: A180	Humidity: 60%RH
Test Voltage: AC 120V/60Hz	Test Data: 2023-04-12
Test Mode: Charging +GSM link+BT+Wi-Fi+GPS +Camera recording	
Note: 4G+128G	

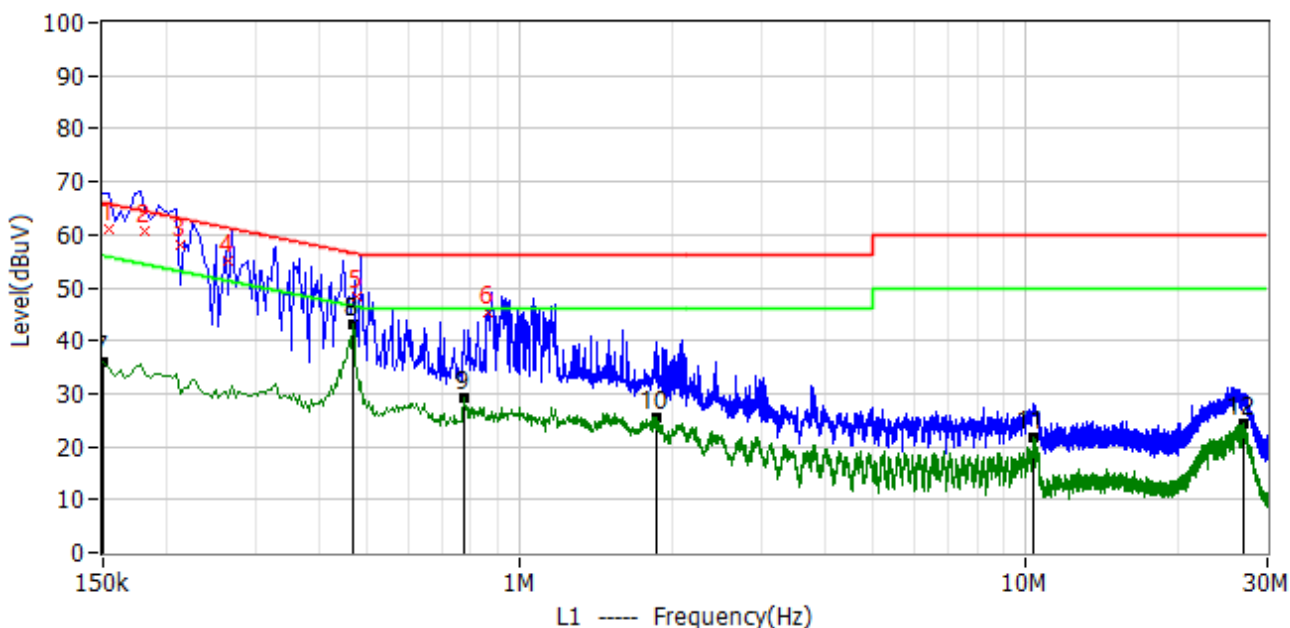

No.	Frequency	Reading dBuV	Factor dB	Level dBuV	Limit dBuV	Margin dB	Detector	Polar
1	154.000kHz	50.50	10.60	61.10	65.78	-4.68	QP	L1
2	182.000kHz	50.04	10.60	60.64	64.39	-3.75	QP	L1
3	214.000kHz	47.47	10.60	58.07	63.05	-4.98	QP	L1
4	266.000kHz	44.60	10.60	55.20	61.24	-6.04	QP	L1
5	478.000kHz	37.55	10.60	48.15	56.37	-8.23	QP	L1
6	866.000kHz	34.54	10.60	45.14	56.00	-10.86	QP	L1
7*	150.000kHz	25.23	10.56	35.79	56.00	-20.21	AV	L1
8*	466.000kHz	32.54	10.58	43.12	46.58	-3.46	AV	L1
9*	778.000kHz	18.80	10.58	29.38	46.00	-16.62	AV	L1
10*	1.866MHz	14.92	10.73	25.65	46.00	-20.35	AV	L1
11*	10.386MHz	11.00	10.86	21.86	50.00	-28.14	AV	L1
12*	26.850MHz	12.83	11.34	24.17	50.00	-25.83	AV	L1




Project: LGT23C066	Test Engineer: Dylan.shi
EUT: Smartphone	Temperature: 26.3°C
M/N: A180	Humidity: 60%RH
Test Voltage: AC 120V/60Hz	Test Data: 2023-04-12
Test Mode: Charging +GSM link+BT+Wi-Fi+GPS +Camera recording	
Note: 4G+128G	

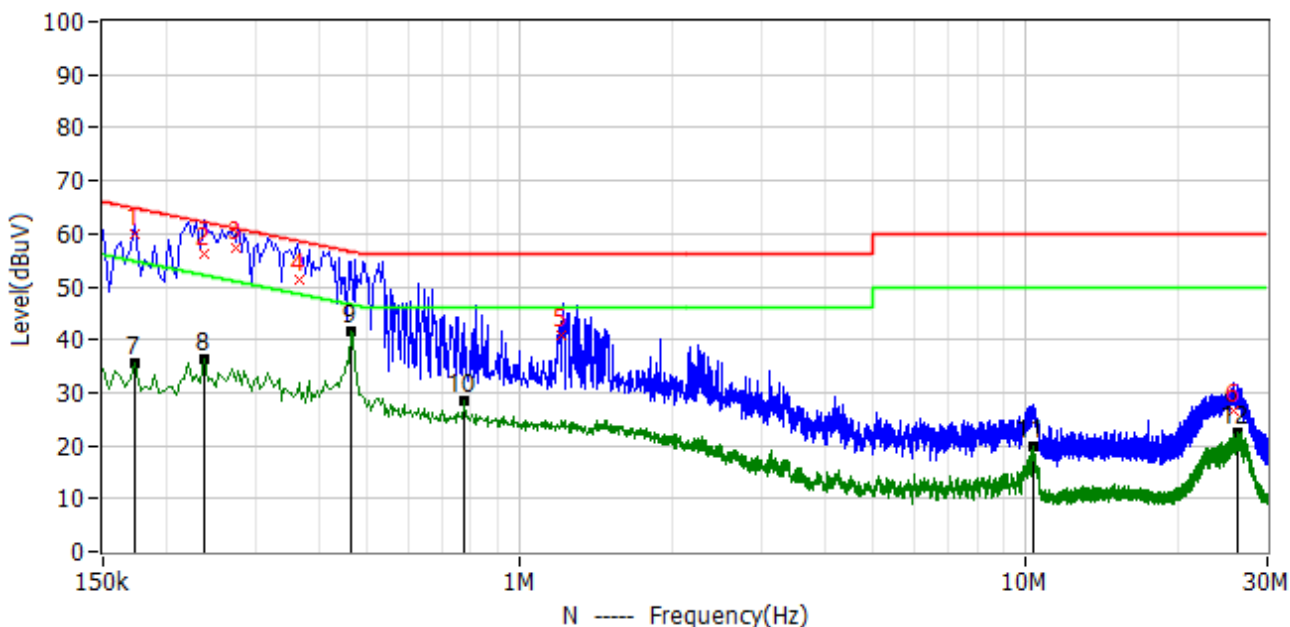

No.	Frequency	Reading dBuV	Factor dB	Level dBuV	Limit dBuV	Margin dB	Detector	Polar
1	174.000kHz	49.17	10.60	59.77	64.77	-5.00	QP	N
2	238.000kHz	45.74	10.60	56.34	62.17	-5.83	QP	N
3	274.000kHz	46.61	10.60	57.21	61.00	-3.79	QP	N
4	366.000kHz	40.57	10.60	51.17	58.59	-7.42	QP	N
5	1.202MHz	30.37	10.60	40.97	56.00	-15.03	QP	N
6	25.750MHz	15.15	11.40	26.55	60.00	-33.45	QP	N
7*	174.000kHz	25.00	10.58	35.58	54.77	-19.19	AV	N
8*	238.000kHz	25.78	10.60	36.38	52.17	-15.79	AV	N
9*	462.000kHz	31.16	10.58	41.74	46.66	-4.92	AV	N
10*	778.000kHz	17.93	10.58	28.51	46.00	-17.49	AV	N
11*	10.318MHz	8.94	10.88	19.82	50.00	-30.18	AV	N
12*	26.266MHz	11.10	11.46	22.56	50.00	-27.44	AV	N




Project: LGT23C066	Test Engineer: Dylan.shi
EUT: Smartphone	Temperature: 26.3°C
M/N: A180	Humidity: 60%RH
Test Voltage: AC 120V/60Hz	Test Data: 2023-04-12
Test Mode: Charging +GSM link+BT+Wi-Fi+GPS +Camera recording	
Note: 8G+256G	

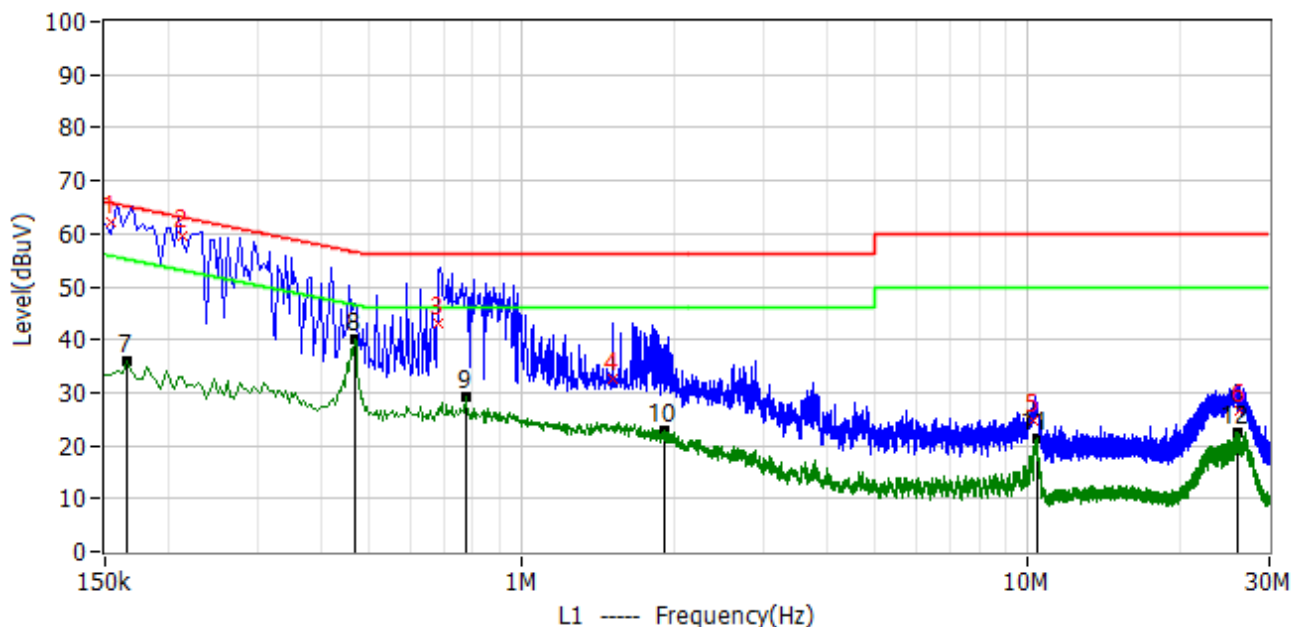

No.	Frequency	Reading dBuV	Factor dB	Level dBuV	Limit dBuV	Margin dB	Detector	Polar
1	154.000kHz	51.54	10.60	62.14	65.78	-3.64	QP	L1
2	214.000kHz	48.83	10.60	59.43	63.05	-3.62	QP	L1
3	686.000kHz	32.45	10.60	43.05	56.00	-12.95	QP	L1
4	1.514MHz	21.94	10.70	32.64	56.00	-23.36	QP	L1
5	10.278MHz	13.81	10.90	24.71	60.00	-35.29	QP	L1
6	26.138MHz	15.47	11.30	26.77	60.00	-33.23	QP	L1
7*	166.000kHz	25.49	10.57	36.06	55.16	-19.10	AV	L1
8*	466.000kHz	29.54	10.58	40.12	46.58	-6.46	AV	L1
9*	774.000kHz	18.53	10.58	29.11	46.00	-16.89	AV	L1
10*	1.906MHz	11.99	10.74	22.73	46.00	-23.27	AV	L1
11*	10.418MHz	10.31	10.86	21.17	50.00	-28.83	AV	L1
12*	25.942MHz	11.27	11.32	22.59	50.00	-27.41	AV	L1



Project: LGT23C066	Test Engineer: Dylan.shi
EUT: Smartphone	Temperature: 26.3°C
M/N: A180	Humidity: 60%RH
Test Voltage: AC 120V/60Hz	Test Data: 2023-04-12
Test Mode: Charging +GSM link+BT+Wi-Fi+GPS +Camera recording	
Note: 8G+256G	

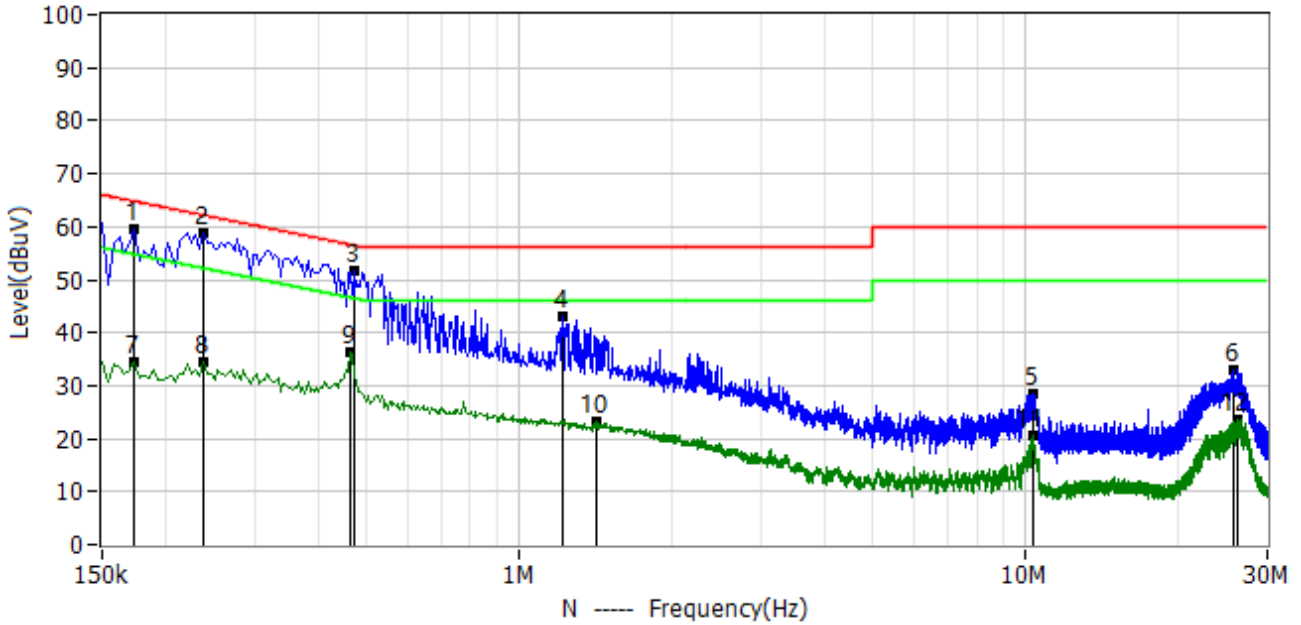

No.	Frequency	Reading dBuV	Factor dB	Level dBuV	Limit dBuV	Margin dB	Detector	Polar
1*	174.000kHz	48.85	10.58	59.43	64.77	-5.34	PK	N
2*	238.000kHz	48.31	10.60	58.91	62.17	-3.25	PK	N
3*	470.000kHz	41.10	10.58	51.68	56.51	-4.83	PK	N
4*	1.214MHz	32.27	10.62	42.89	56.00	-13.11	PK	N
5*	10.338MHz	17.54	10.88	28.42	60.00	-31.58	PK	N
6*	25.642MHz	21.63	11.44	33.07	60.00	-26.93	PK	N
7*	174.000kHz	24.05	10.58	34.63	54.77	-20.14	AV	N
8*	238.000kHz	23.77	10.60	34.37	52.17	-17.80	AV	N
9*	462.000kHz	25.60	10.58	36.18	46.66	-10.48	AV	N
10*	1.422MHz	12.60	10.66	23.26	46.00	-22.74	AV	N
11*	10.318MHz	9.79	10.88	20.67	50.00	-29.33	AV	N
12*	26.266MHz	12.31	11.46	23.77	50.00	-26.23	AV	N



3.2 RADIATED EMISSION MEASUREMENT

3.2.1 LIMITS

Below 1 GHz

Frequency (MHz)	Class A		Class B	
	Field strength (dBuV/m) (at 3m)		Field strength (dBuV/m) (at 3m)	
30 - 88	49.5		40	
88 - 216	53.9		43.5	
216 - 960	56.9		46	
Above 960	60		54	

Above 1 GHz

Frequency (MHz)	Class A		Class B	
	Field strength (dBuV/m) (at 3m)		Field strength (dBuV/m) (at 3m)	
	Peak	Average	Peak	Average
Above 1000	80	60	74	54

Frequency Range of Radiated Disturbance Measurement

Highest frequency generated or Upper frequency of measurement used in the device or on which the device operates or tunes (MHz)	Range (MHz)
Below 1.705	30
1.705 - 108	1000
108 - 500	2000
500 - 1000	5000
Above 1000	5th harmonic of the highest frequency or 40 GHz, whichever is lower

Note:

- (1) The limit for radiated test was performed according to FCC Part 15, Subpart B;
- (2) The tighter limit applies at the band edges;
- (3) The test result calculated as following:
 Measurement Value = Reading Level + Correct Factor,
 Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use),
 Margin Level = Measurement Value - Limit Value.


3.2.2 TEST PROCEDURE

- a. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. EUT as the center to the edge of the auxiliary device, the distance from the maximum edge to the center of the antenna is 3 meter.
- c. The height of antenna is varied from 1 meter to 4 meter above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meter and the rotatable table was turned from 0 degrees to 360 degree to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1GHz.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.




3.2.3 TEST SETUP

(A) Radiated Emission Test Set-Up Frequency Below 1 GHz

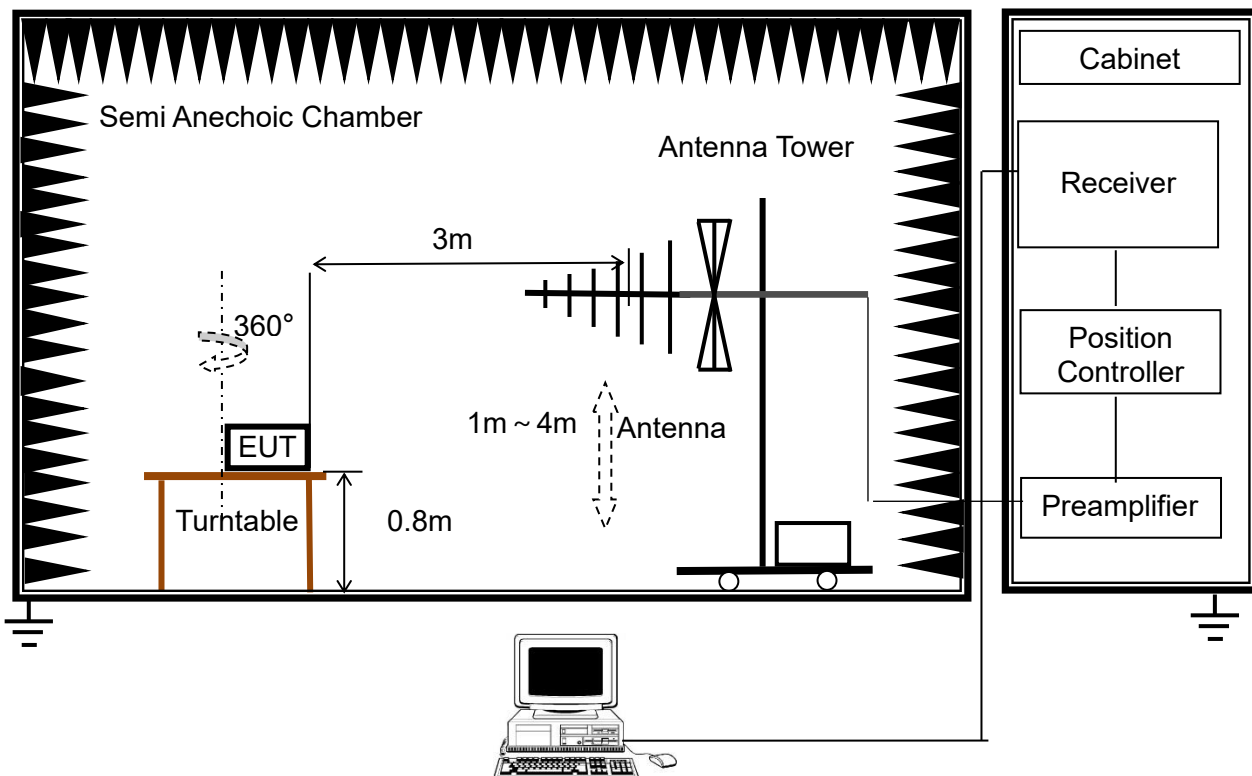


(B) Radiated Emission Test Set-Up Frequency Above 1GHz

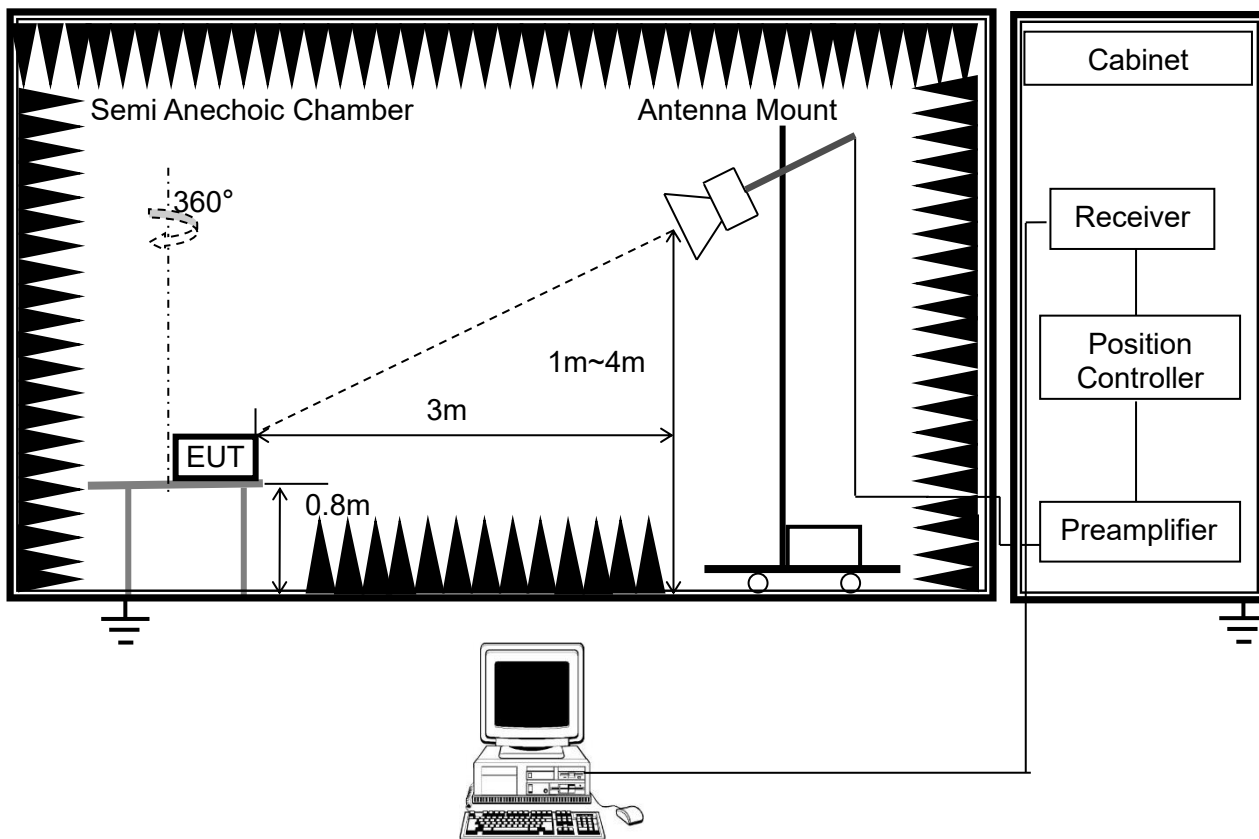




3.2.4 TEST RESULTS - BELOW 1GHZ

Project: LGT23C066	Test Engineer: Dylan.shi
EUT: Smartphone	Temperature: 23.4°C
M/N: A180	Humidity: 65%RH
Test Voltage: AC 120V/60Hz	Test Data: 2023-03-31
Test Mode: Charging +GSM link+BT+Wi-Fi+GPS +Camera recording	
Note: 4G+128G	

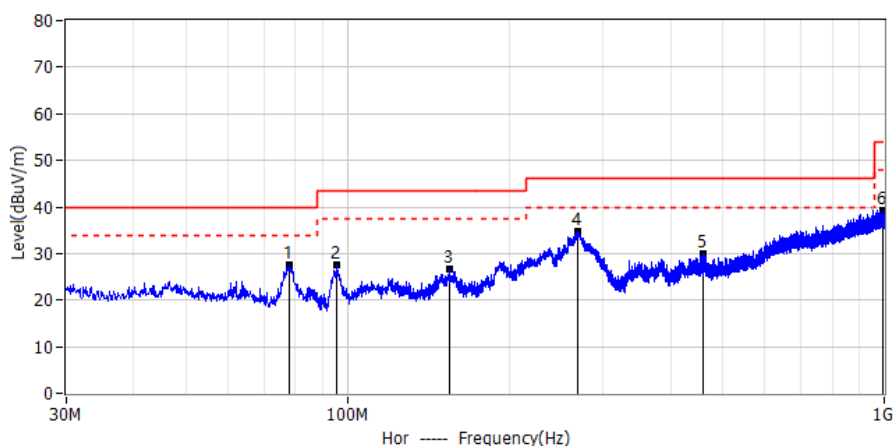


No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	78.015MHz	11.83	15.76	27.59	40.00	-12.41	QP	Hor
2*	95.596MHz	12.17	15.37	27.54	43.50	-15.96	QP	Hor
3*	154.645MHz	6.65	19.92	26.57	43.50	-16.93	QP	Hor
4*	268.984MHz	15.50	19.14	34.64	46.00	-11.36	QP	Hor
5*	459.346MHz	5.78	24.05	29.83	46.00	-16.17	QP	Hor
6*	993.938MHz	4.69	34.54	39.23	54.00	-14.77	QP	Hor

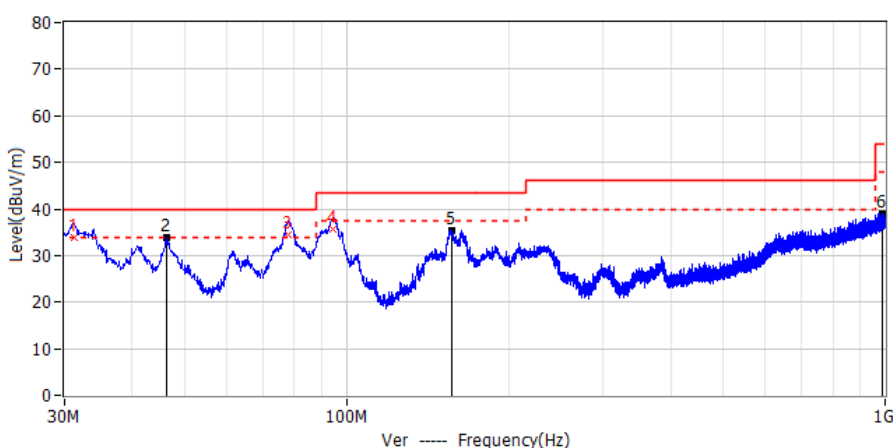


No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1	31.250MHz	15.70	18.30	34.00	40.00	-6.00	QP	Ver
2*	46.369MHz	14.61	19.26	33.87	40.00	-6.13	QP	Ver
3	77.795MHz	18.52	15.80	34.32	40.00	-5.68	QP	Ver
4	94.281MHz	20.42	15.30	35.72	43.50	-7.78	QP	Ver
5*	156.585MHz	15.56	19.89	35.45	43.50	-8.05	QP	Ver
6*	990.058MHz	4.46	34.53	38.99	54.00	-15.01	QP	Ver



Project: LGT23C066	Test Engineer: Dylan.shi
EUT: Smartphone	Temperature: 23.4°C
M/N: A180	Humidity: 65%RH
Test Voltage: AC 120V/60Hz	Test Data: 2023-03-31
Test Mode: Charging +GSM link+BT+Wi-Fi+GPS +Camera recording	
Note: 8G+256G	

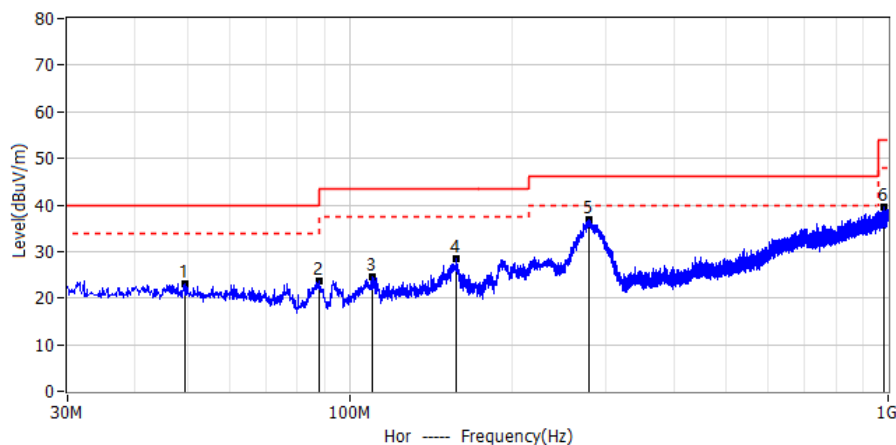


No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	49.643MHz	3.87	19.35	23.22	40.00	-16.78	QP	Hor
2*	87.715MHz	8.63	15.09	23.72	40.00	-16.28	QP	Hor
3*	110.025MHz	7.82	16.78	24.60	43.50	-18.90	QP	Hor
4*	157.919MHz	8.51	19.87	28.38	43.50	-15.12	QP	Hor
5*	279.048MHz	17.28	19.50	36.78	46.00	-9.22	QP	Hor
6*	982.055MHz	5.15	34.49	39.64	54.00	-14.36	QP	Hor

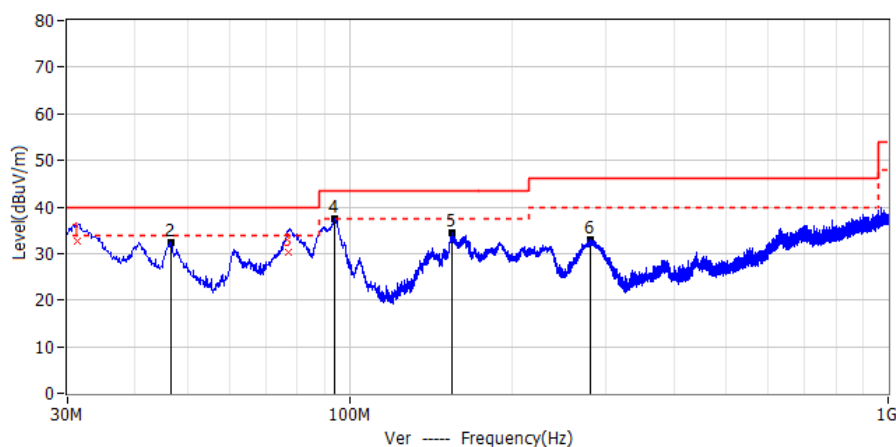


No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1	31.305MHz	14.39	18.30	32.69	40.00	-7.31	QP	Ver
2*	46.733MHz	13.07	19.27	32.34	40.00	-7.66	QP	Ver
3	77.250MHz	14.41	16.00	30.41	40.00	-9.59	QP	Ver
4*	94.141MHz	22.04	15.29	37.33	43.50	-6.17	QP	Ver
5*	155.251MHz	14.68	19.91	34.59	43.50	-8.91	QP	Ver
6*	279.654MHz	13.45	19.51	32.96	46.00	-13.04	QP	Ver



Project: LGT23C066	Test Engineer: Dylan.shi
EUT: Smartphone	Temperature: 23.4°C
M/N: A180	Humidity: 65%RH
Test Voltage: Battery	Test Data: 2023-03-31
Test Mode: USB Data Transmission+GSM link+BT+Wi-Fi	
Note: 4G+128G	

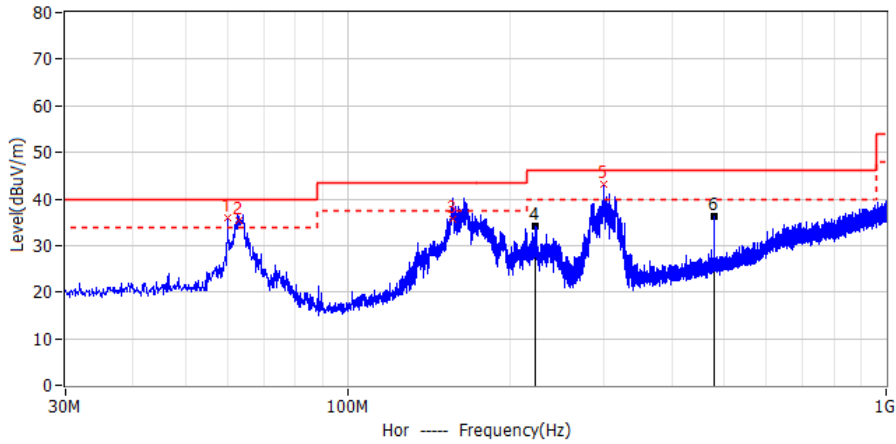


No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1	60.001MHz	17.40	18.60	36.00	40.00	-4.00	QP	Hor
2	62.803MHz	16.74	18.50	35.24	40.00	-4.76	QP	Hor
3	157.082MHz	15.87	19.90	35.77	43.50	-7.73	QP	Hor
4*	223.879MHz	17.26	16.85	34.11	46.00	-11.89	QP	Hor
5	300.002MHz	23.21	19.90	43.11	46.00	-2.89	QP	Hor
6*	479.959MHz	11.80	24.55	36.35	46.00	-9.65	QP	Hor

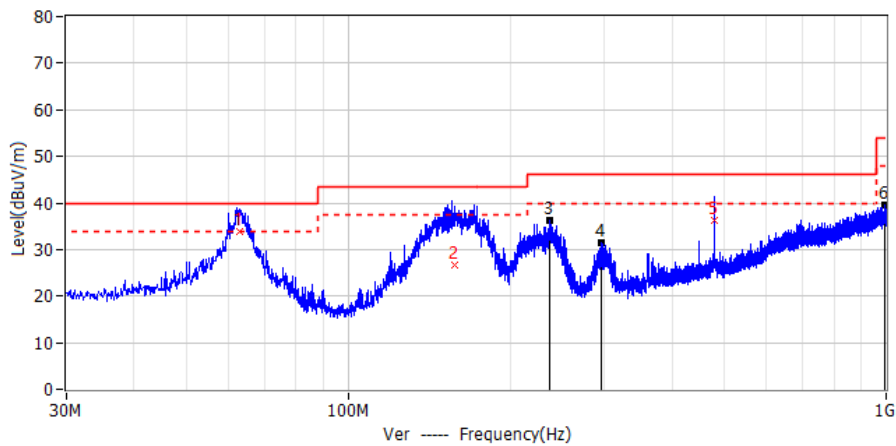


No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1	62.857MHz	15.31	18.50	33.81	40.00	-6.19	QP	Ver
2	157.452MHz	6.79	19.90	26.69	43.50	-16.81	QP	Ver
3*	236.489MHz	18.70	17.48	36.18	46.00	-9.82	QP	Ver
4*	296.265MHz	11.58	19.84	31.42	46.00	-14.58	QP	Ver
5	480.062MHz	11.73	24.60	36.33	46.00	-9.67	QP	Ver
6*	994.786MHz	5.09	34.55	39.64	54.00	-14.36	QP	Ver



Project: LGT23C066	Test Engineer: Dylan.shi
EUT: Smartphone	Temperature: 23.4°C
M/N: A180	Humidity: 65%RH
Test Voltage: Battery	Test Data: 2023-03-31
Test Mode: USB Data Transmission+GSM link+BT+Wi-Fi	
Note: 8G+256G	

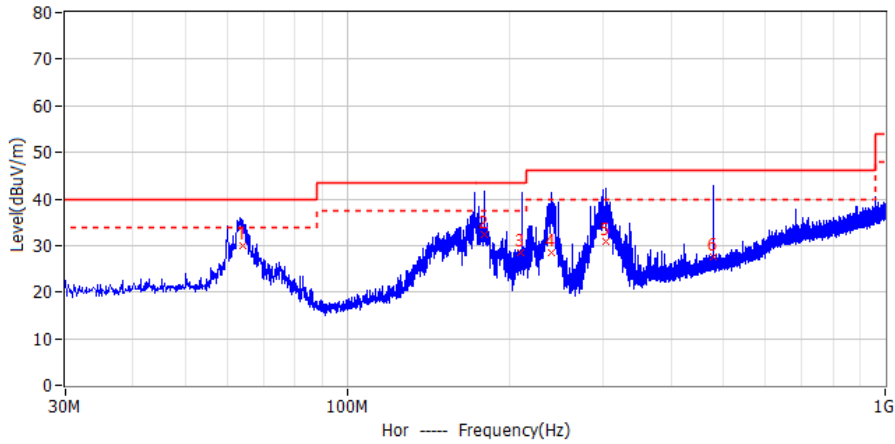


No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1	63.878MHz	11.55	18.40	29.95	40.00	-10.05	QP	Hor
2	179.943MHz	13.62	18.80	32.42	43.50	-11.08	QP	Hor
3	209.812MHz	11.55	17.00	28.55	43.50	-14.95	QP	Hor
4	240.023MHz	10.86	17.70	28.56	46.00	-17.44	QP	Hor
5	303.620MHz	10.88	20.00	30.88	46.00	-15.12	QP	Hor
6	479.937MHz	3.10	24.50	27.60	46.00	-18.40	QP	Hor

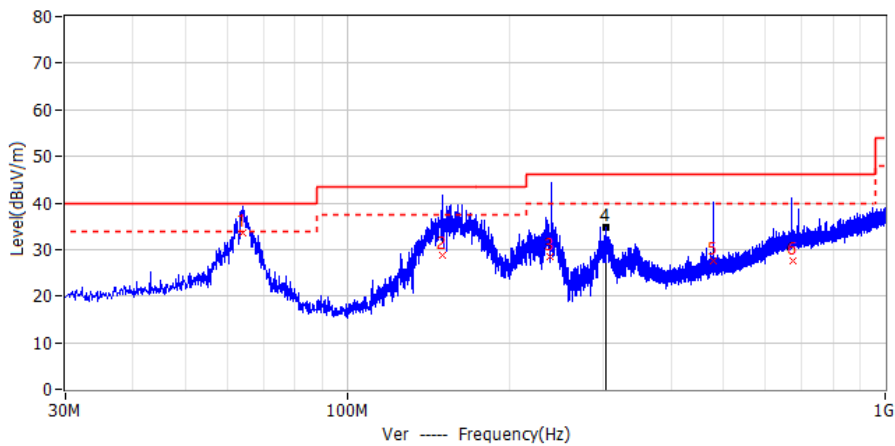


No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1	64.226MHz	15.25	18.40	33.65	40.00	-6.35	QP	Ver
2	150.894MHz	8.65	20.00	28.65	43.50	-14.85	QP	Ver
3	238.309MHz	10.75	17.60	28.35	46.00	-17.65	QP	Ver
4*	302.328MHz	14.76	19.99	34.75	46.00	-11.25	QP	Ver
5	479.781MHz	3.06	24.50	27.56	46.00	-18.44	QP	Ver
6	674.749MHz	-2.03	29.50	27.47	46.00	-18.53	QP	Ver



Project: LGT23C066	Test Engineer: Dylan.shi
EUT: Smartphone	Temperature: 25°C
M/N: A180	Humidity: 62%RH
Test Voltage: AC 120V/60Hz	Test Data: 2023-03-30
Test Mode: Charging +GSM link+BT+Wi-Fi+GPS +Camera recording	
Note:	

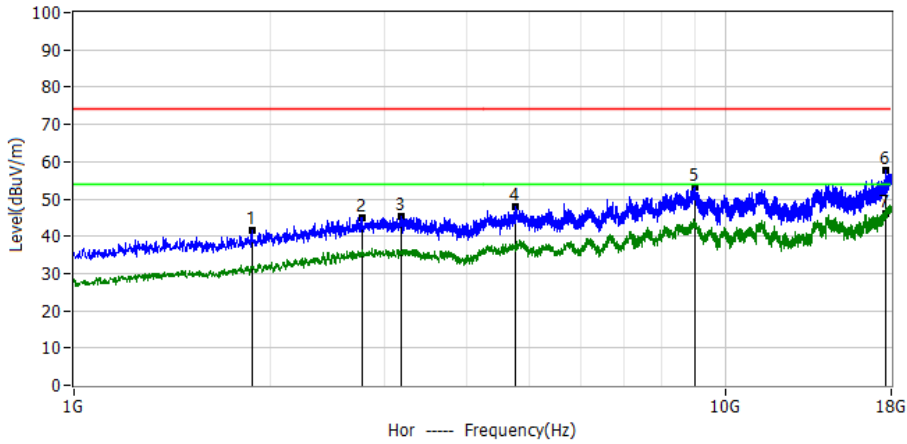

No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1.880GHz	58.94	-17.45	41.49	74.00	-32.51	PK	Hor
2*	2.768GHz	54.68	-9.57	45.11	74.00	-28.89	PK	Hor
3*	3.182GHz	53.58	-8.40	45.18	74.00	-28.82	PK	Hor
4*	4.753GHz	53.78	-5.95	47.83	74.00	-26.17	PK	Hor
5*	8.988GHz	54.35	-1.20	53.15	74.00	-20.85	PK	Hor
6*	17.658GHz	49.43	8.28	57.71	74.00	-16.29	PK	Hor
7*	17.658GHz	37.72	8.28	46.00	54.00	-8.00	AV	Hor

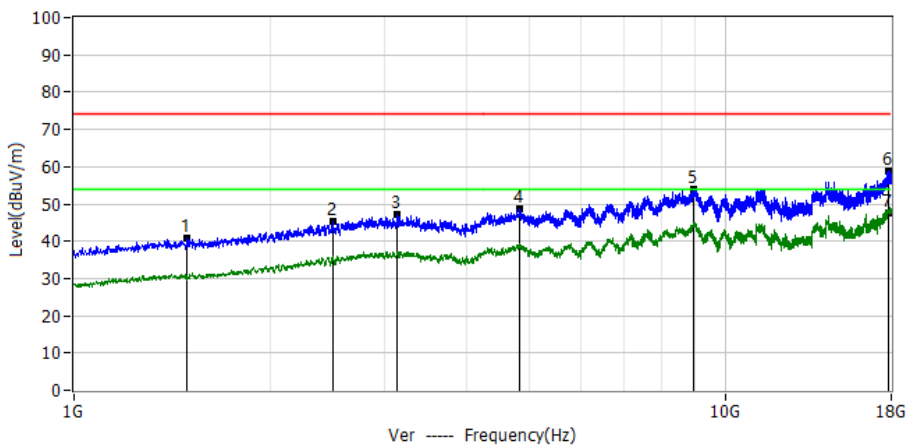


No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1.489GHz	61.82	-20.90	40.92	74.00	-33.08	PK	Ver
2*	2.496GHz	56.38	-11.03	45.35	74.00	-28.65	PK	Ver
3*	3.136GHz	55.63	-8.38	47.25	74.00	-26.75	PK	Ver
4*	4.838GHz	54.57	-6.02	48.55	74.00	-25.45	PK	Ver
5*	8.937GHz	55.31	-1.35	53.96	74.00	-20.04	PK	Ver
6*	17.805GHz	50.46	8.38	58.84	74.00	-15.16	PK	Ver
7*	17.805GHz	39.22	8.38	47.60	54.00	-6.40	AV	Ver

Note: The 18-40GHz emission of peak points that did not show above the forms are at least 20dB below the limit, the frequency emission is mainly from the environment noise.



APPENDIX I - TEST SETUP

Conducted Emission Test Setup Photo

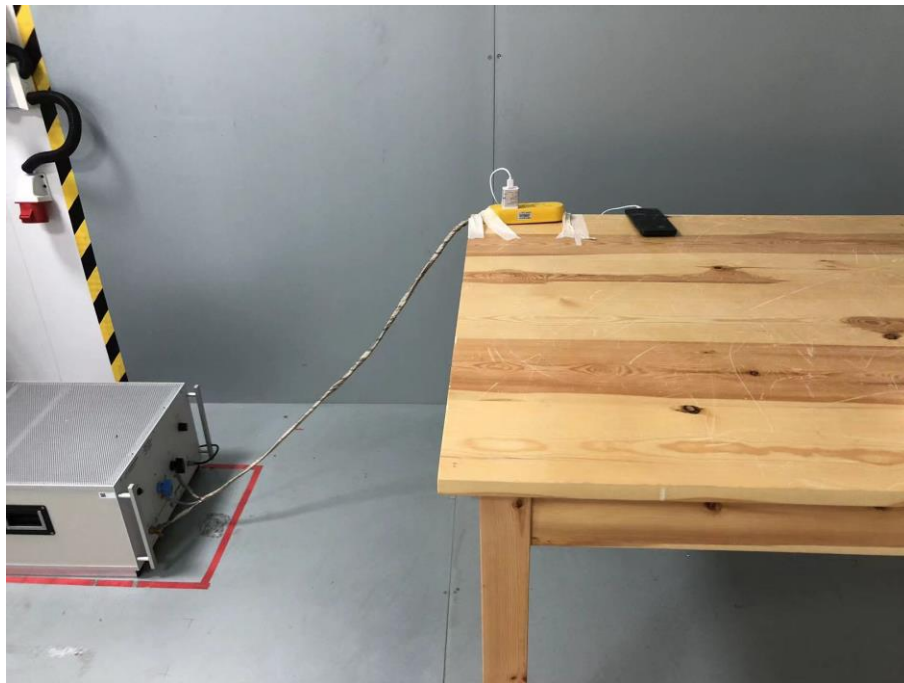


Radiated Emission Test Setup Photo - Below 1GHz





Radiated Emission Test Setup Photo - Above 1GHz

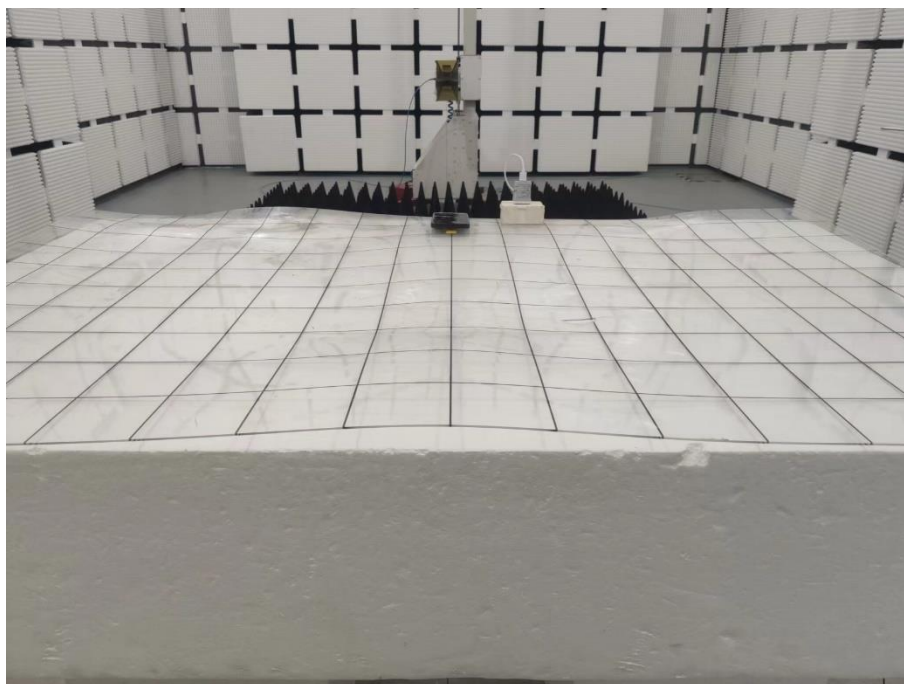

※※※※※ END OF THE REPORT ※※※※※