



Date: Mar. 29, 2024

Page 118 of 147

Test Laboratory: AGC Lab LTE Band 2 Mid-Body-Back (1 RB#0)

DUT: Smart phone; Type: A140

Communication System: LTE; Communication System Band: LTE Band 2; Duty Cycle:1:1; Conv.F=2.15; Frequency:1880MHz; Medium parameters used: f = 1900 MHz;  $\sigma = 1.38 \text{ mho/m}$ ;  $\epsilon = 40.32$ ;  $\rho = 1000 \text{ kg/m}^3$ ;

Phantom section: Flat Section

Ambient temperature (°C): 22.3, Liquid temperature (°C): 22.1

#### **SATIMO Configuration:**

Probe: SSE2; Calibrated: May 31, 2023; Serial No.: 2023-EPGO-414


Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: SAM twin phantom

• Measurement SW: OpenSAR V4\_02\_35

Configuration/ LTE Band 2 Mid-Body-Back/Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/ LTE Band 2 Mid-Body-Back/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5m;


Area Scan	surf_sam_plan.txt, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Body Back
Band	LTE Band 2
Channels	Middle
Signal	OFDM (Crest factor: 1.0)

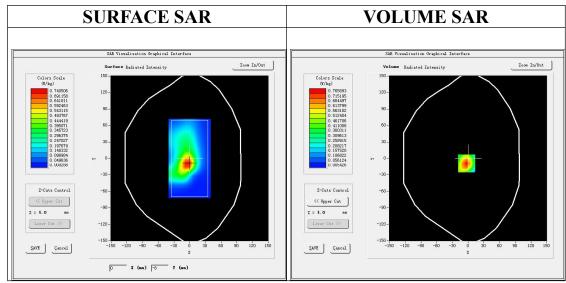


Maximum location: X=-3.00, Y=-9.00 SAR Peak: 1.23 W/kg


<b>SAR 10g (W/Kg)</b>	0.370391
SAR 1g (W/Kg)	0.721287

Z (mm) 0.00 4.00 7.00 14.00 17.00 24.00 27.00	Z (mm) 0.0	00 4.00	9.00	14.00	19.00	24.00	29.00
-----------------------------------------------	------------	---------	------	-------	-------	-------	-------





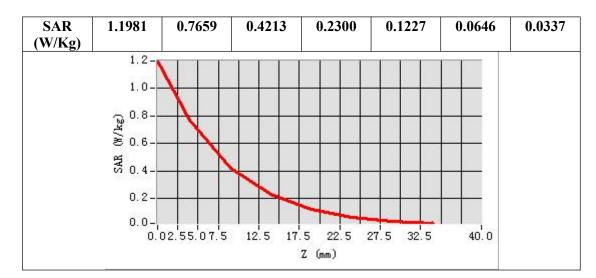

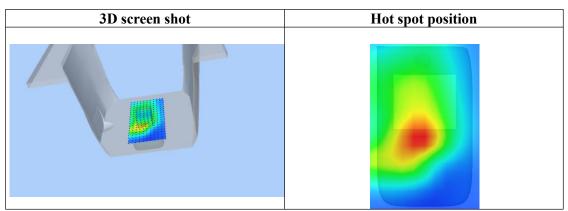



Page 120 of 147

Test Laboratory: AGC Lab Date: Mar. 28, 2024

LTE Band 4 Mid-Touch-Left (1 RB#0) DUT: Smart phone; Type: A140

Communication System: LTE; Communication System Band: LTE Band 4; Duty Cycle:1:1; Conv.F=2.17; Frequency:1732.5 MHz; Medium parameters used: f = 1750 MHz;  $\sigma = 1.39$  mho/m;  $\epsilon r = 40.39$ ;  $\rho = 1000$  kg/m³;

Phantom section: Left Section

Ambient temperature (°C): 21.5, Liquid temperature (°C): 21.1

#### **SATIMO Configuration:**

Probe: SSE2; Calibrated: May 31, 2023; Serial No.: 2023-EPGO-414


· Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: SAM twin phantom

• Measurement SW: OpenSAR V4 02 35

Configuration/ LTE Band 4 Mid- Touch-Left /Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/ LTE Band 4 Mid- Touch-Left /Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5mm;

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	LTE Band 4
Channels	Middle
Signal	OFDM (Crest factor: 1.0)

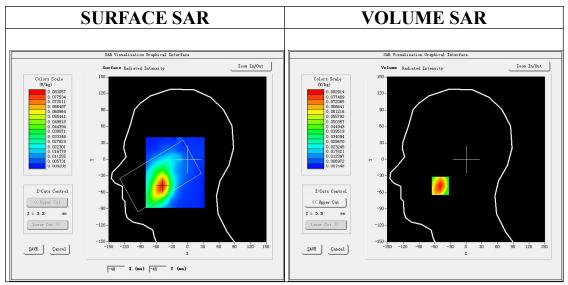

**Maximum location: X=-49.00, Y=-48.00** 


SAR Peak: 0.12 W/kg


SAR 10g (W/Kg)	0.046510
SAR 1g (W/Kg)	0.079066

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00





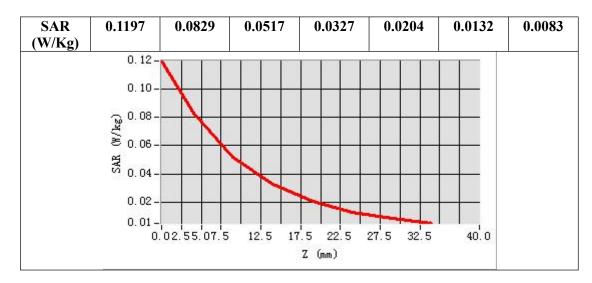

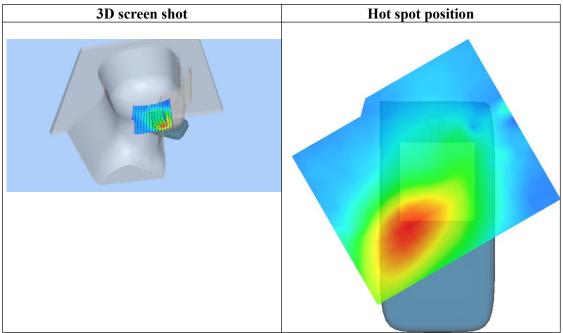



Date: Mar. 28, 2024

Page 122 of 147

Test Laboratory: AGC Lab LTE Band 4 Mid-Body-Back (1 RB#0)

DUT: Smart phone; Type: A140

Communication System: LTE; Communication System Band: LTE Band 4; Duty Cycle:1:1; Conv.F=2.17; Frequency:1732.5 MHz; Medium parameters used: f = 1750 MHz;  $\sigma = 1.39 \text{ mho/m}$ ;  $\epsilon = 40.39$ ;  $\rho = 1000 \text{ kg/m}^3$ ;

Phantom section: Flat Section

Ambient temperature (°C): 21.5, Liquid temperature (°C): 21.1

#### **SATIMO Configuration:**

Probe: SSE2; Calibrated: May 31, 2023; Serial No.: 2023-EPGO-414


Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: SAM twin phantom

• Measurement SW: OpenSAR V4 02 35

Configuration/ LTE Band 4 Mid-Body-Back/Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/ LTE Band 4 Mid-Body-Back/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5m;

Area Scan	surf_sam_plan.txt, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Body Back
Band	LTE Band 4
Channels	Middle
Signal	OFDM (Crest factor: 1.0)

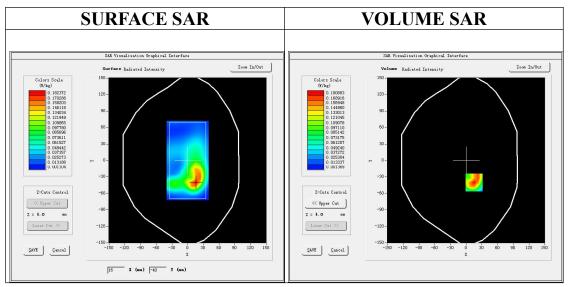


**Maximum location: X=15.00, Y=-40.00** 


SAR Peak: 0.32 W/kg


SAR 10g (W/Kg)	0.083375
SAR 1g (W/Kg)	0.173298

Z (mm) 0.00 4.00 7.00 14.00 17.00 24.00 27.00	Z (mm) 0.0	00 4.00	9.00	14.00	19.00	24.00	29.00
-----------------------------------------------	------------	---------	------	-------	-------	-------	-------





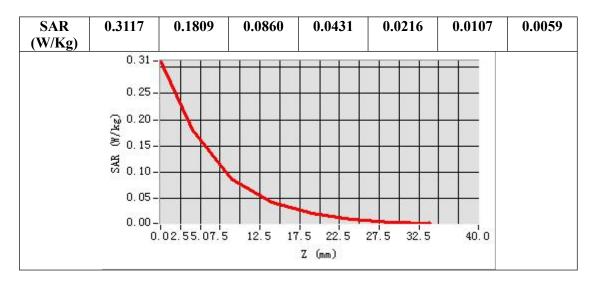

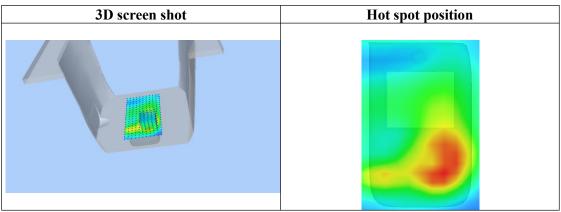



Page 124 of 147

Test Laboratory: AGC Lab Date: Mar. 30, 2024

LTE Band 5 Mid-Touch-Right (1 RB#0) DUT: Smart phone; Type: A140

Communication System: LTE; Communication System Band: LTE Band 5; Duty Cycle:1:1; Conv.F=2.02 Frequency: 836.5 MHz; Medium parameters used: f = 835 MHz;  $\sigma = 0.92$  mho/m;  $\epsilon = 41.63$ ;  $\rho = 1000$  kg/m³;

Phantom section: Right Section

Ambient temperature ( $^{\circ}$ ): 22.1, Liquid temperature ( $^{\circ}$ ): 21.8

## **SATIMO Configuration:**

Probe: SSE2; Calibrated: May 31, 2023; Serial No.: 2023-EPGO-414


· Sensor-Surface: 4mm (Mechanical Surface Detection)

Phantom: SAM twin phantom

Measurement SW: OpenSAR V4\_02\_35

Configuration/ LTE Band 5 Mid- Touch-Right /Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/ LTE Band 5 Mid- Touch-Right /Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5mm;


Area Scan	dx=8mm dy=8mm, h= 5.00 mm	
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm	
Phantom	Right head	
Device Position	Cheek	
Band	LTE Band 5	
Channels	Middle	
Signal	OFDM (Crest factor: 1.0)	

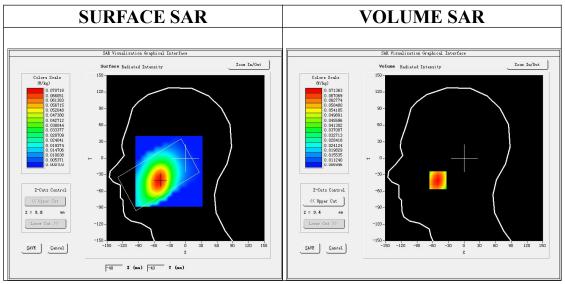


Maximum location: X=-50.00, Y=-40.00 SAR Peak: 0.09 W/kg


	. 8
SAR 10g (W/Kg)	0.050355
SAR 1g (W/Kg)	0.069133

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00





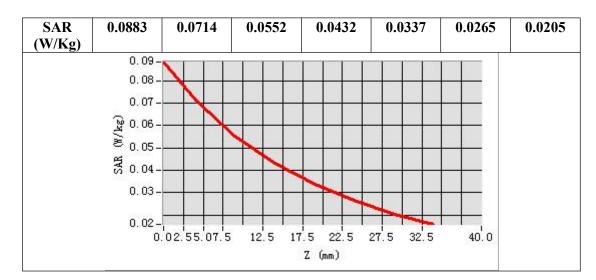

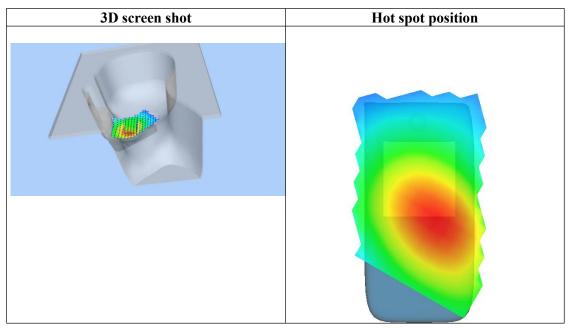



Date: Mar. 30, 2024

Page 126 of 147

Test Laboratory: AGC Lab LTE Band 5 Mid-Body-Back (1 RB#0)

DUT: Smart phone; Type: A140

Communication System: LTE; Communication System Band: LTE Band 5; Duty Cycle:1:1; Conv.F=2.02 Frequency:836.5 MHz; Medium parameters used: f = 835 MHz;  $\sigma = 0.92$ mho/m;  $\epsilon r = 41.63$ ;  $\rho = 1000$  kg/m³;

Phantom section: Flat Section

Ambient temperature (°C): 22.1, Liquid temperature (°C): 21.8

#### **SATIMO Configuration:**

Probe: SSE2; Calibrated: May 31, 2023; Serial No.: 2023-EPGO-414


Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: SAM twin phantom

• Measurement SW: OpenSAR V4\_02\_35

Configuration/ LTE Band 5 Mid-Body-Back/Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/ LTE Band 5 Mid-Body-Back/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5m;

Area Scan	surf_sam_plan.txt, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Body Back
Band	LTE Band 5
Channels	Middle
Signal	OFDM (Crest factor: 1.0)

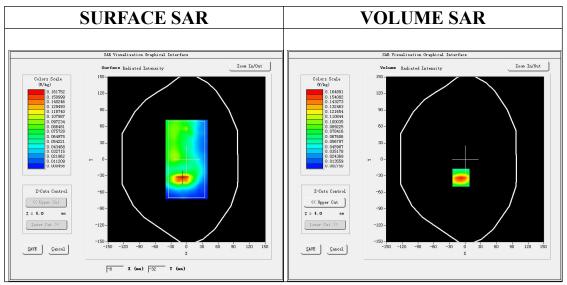


Maximum location: X=-8.00, Y=-33.00 SAR Peak: 0.26 W/kg


Silk i cak. 0.20 Wikg	
SAR 10g (W/Kg)	0.083071


SAR 1g (W/Kg)	0.156256

Z (mm) 0.00 4.00 9.00 14.00 19.00 24.00 29.00





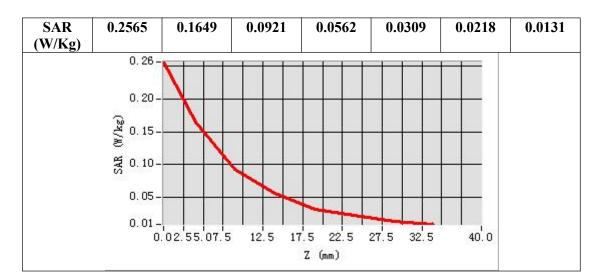

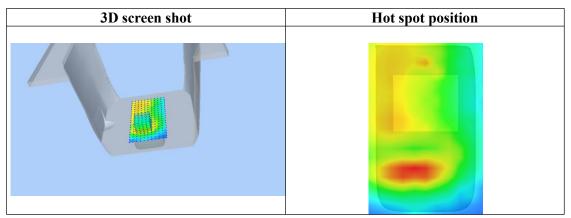



Page 128 of 147

Test Laboratory: AGC Lab Date: Apr. 02, 2024

LTE Band 7 Mid-Touch-Left (1RB#0) DUT: Smart phone; Type: A140

Communication System: LTE; Communication System Band: LTE Band 7; Duty Cycle:1:1; Conv.F=2.13 Frequency: 2535MHz; Medium parameters used: f = 2600 MHz;  $\sigma = 1.85 \text{ mho/m}$ ;  $\epsilon = 41.36$ ;  $\rho = 1000 \text{ kg/m}^3$ ;

Phantom section: Left Section

Ambient temperature (°C): 20.9, Liquid temperature (°C): 20.4

### **SATIMO Configuration:**

Probe: SSE2; Calibrated: May 31, 2023; Serial No.: 2023-EPGO-414


Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: SAM twin phantom

• Measurement SW: OpenSAR V4 02 35


Configuration/ LTE BAND 7 Mid-Touch-Left/Area Scan: Measurement grid: dx=8mm, y=8mm Configuration/ LTE BAND 7 Mid-Touch-Left/Zoom Scan: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	7x7x7,dx=5mm dy=5mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	LTE BAND 7
Channels	Middle
Signal	OFDM (Crest factor: 1.0)

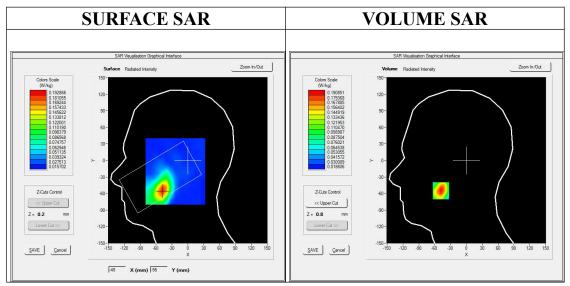



Maximum location: X=-48.00, Y=-55.00 SAR Peak: 0.32 W/kg

<b>SAR 10g (W/Kg)</b>	0.090733
SAR 1g (W/Kg)	0.174341





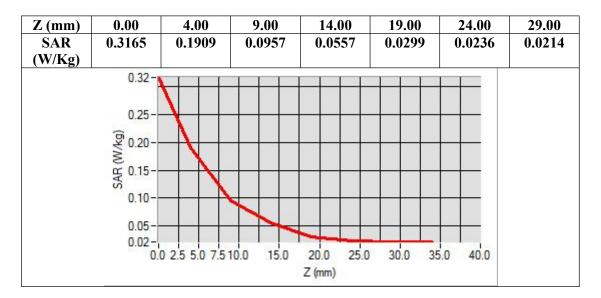

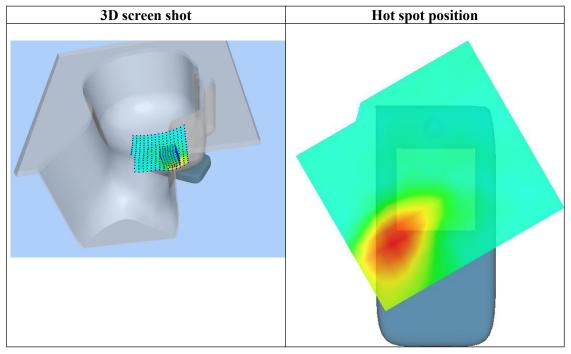



Page 130 of 147

Test Laboratory: AGC Lab Date: Apr. 02, 2024

LTE Band 7 Mid-Body-Back (1RB#0) DUT: Smart phone; Type: A140

Communication System: LTE; Communication System Band: LTE Band 7; Duty Cycle:1:1; Conv.F=2.13 Frequency: 2535MHz; Medium parameters used: f = 2600 MHz;  $\sigma = 1.85 \text{ mho/m}$ ;  $\epsilon = 41.36$ ;  $\rho = 1000 \text{ kg/m}^3$ ;

Phantom section: Flat Section

Ambient temperature (°C): 20.9, Liquid temperature (°C): 20.4

#### **SATIMO Configuration:**

Probe: SSE2; Calibrated: May 31, 2023; Serial No.: 2023-EPGO-414


• Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: SAM twin phantom

• Measurement SW: OpenSAR V4\_02\_35

Configuration/ LTE BAND 7 Mid-Body-Back /Area Scan: Measurement grid: dx=10mm, y=10mm Configuration/ LTE BAND 7 Mid-Body-Back /Zoom Scan: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Area Scan	surf_sam_plan.txt, h= 5.00 mm
ZoomScan	7x7x7,dx=5mm dy=5mm dz=5mm
Phantom	Validation plane
Device Position	Body Back
Band	LTE BAND 7
Channels	Middle
Signal	OFDM (Crest factor: 1.0)

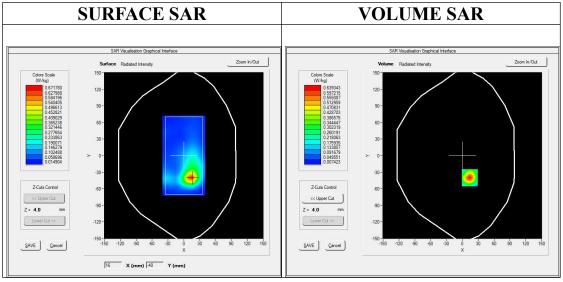

Maximum location: X=14.00, Y=-40.00 SAR Peak: 1.11 W/kg


SAR 10g (W/Kg)	0.256762
SAR 1g (W/Kg)	0.578603


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/





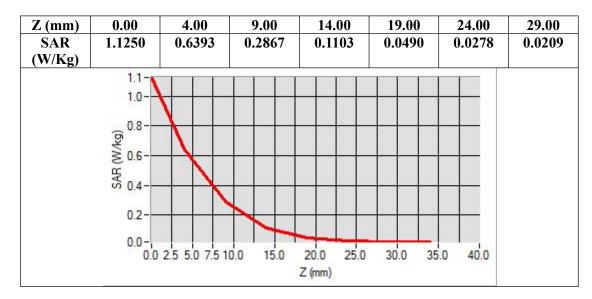

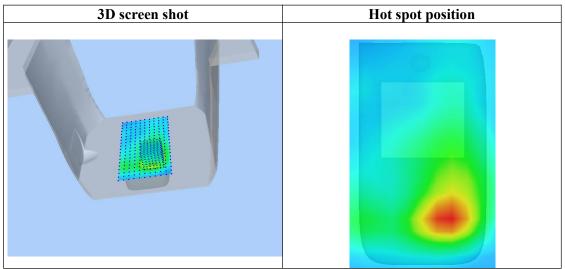



Page 132 of 147

Test Laboratory: AGC Lab Date: Apr. 02, 2024

LTE Band 41 Mid-Touch-Left (1RB#0) DUT: Smart phone; Type: A140

Communication System: LTE; Communication System Band: LTE Band 41; Duty Cycle:1:1.58; Conv.F=2.13 Frequency: 2593MHz; Medium parameters used: f = 2600 MHz;  $\sigma = 1.88 \text{ mho/m}$ ;  $\epsilon = 40.03$ ;  $\rho = 1000 \text{ kg/m}^3$ ;

Phantom section: Left Section

Ambient temperature (°C): 20.9, Liquid temperature (°C): 20.4

#### **SATIMO Configuration:**

Probe: SSE2; Calibrated: May 31, 2023; Serial No.: 2023-EPGO-414


• Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: SAM twin phantom

• Measurement SW: OpenSAR V4 02 35


Configuration/ LTE BAND 41 Mid-Touch-Left/Area Scan: Measurement grid: dx=8mm, y=8mm Configuration/ LTE BAND 41 Mid-Touch-Left/Zoom Scan: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	7x7x7,dx=5mm dy=5mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	LTE BAND 41
Channels	Middle
Signal	OFDM (Crest factor: 1.58)

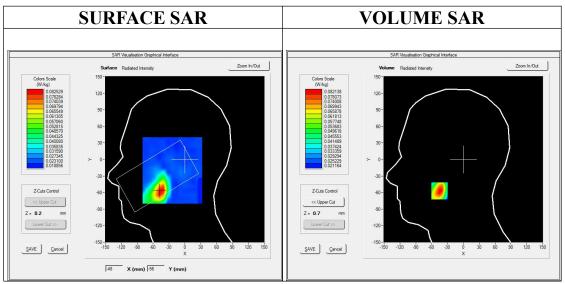



Maximum location: X=-45.00, Y=-57.00 SAR Peak: 0.14 W/kg

SAR 10g (W/Kg)	0.045472
SAR 1g (W/Kg)	0.077938





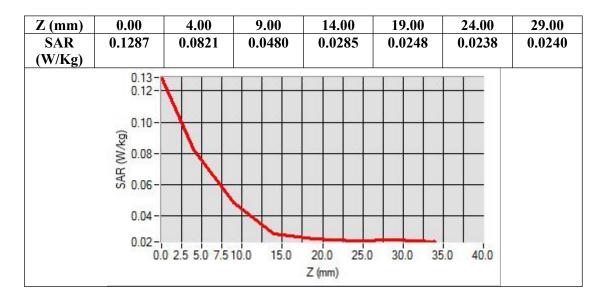

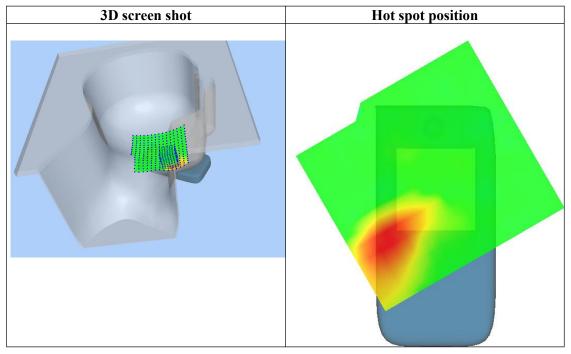



Page 134 of 147

Test Laboratory: AGC Lab Date: Apr. 02, 2024

LTE Band 41 Mid-Body-Back(1RB#0) DUT: Smart phone; Type: A140

Communication System: LTE; Communication System Band: LTE Band 41; Duty Cycle:1:1.58; Conv.F=2.13 Frequency: 2593MHz; Medium parameters used: f =2600 MHz;  $\sigma$ =1.88 mho/m;  $\epsilon$ r =40.03;  $\rho$ = 1000 kg/m³;

Phantom section: Flat Section

Ambient temperature ( $^{\circ}$ C): 20.9, Liquid temperature ( $^{\circ}$ C): 20.4

#### **SATIMO Configuration:**

Probe: SSE2; Calibrated: May 31, 2023; Serial No.: 2023-EPGO-414


• Sensor-Surface: 4mm (Mechanical Surface Detection)

• Phantom: SAM twin phantom

• Measurement SW: OpenSAR V4 02 35


Configuration/ LTE BAND 41 Mid-Body-Back /Area Scan: Measurement grid: dx=10mm, y=10mm Configuration/ LTE BAND 41 Mid-Body-Back /Zoom Scan: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Area Scan	surf_sam_plan.txt, h= 5.00 mm
ZoomScan	7x7x7,dx=5mm dy=5mm dz=5mm
Phantom	Validation plane
Device Position	Body Back
Band	LTE BAND 41
Channels	Middle
Signal	OFDM (Crest factor: 1.58)

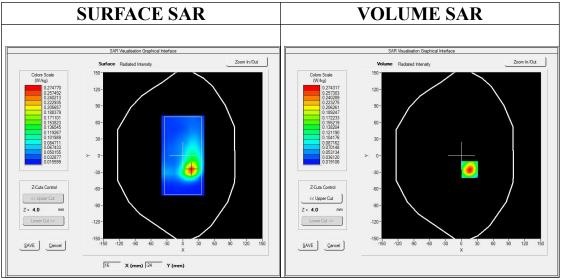



Maximum location: X=16.00, Y=-25.00 SAR Peak: 0.51 W/kg

SAR 10g (W/Kg)	0.117729
SAR 1g (W/Kg)	0.259565





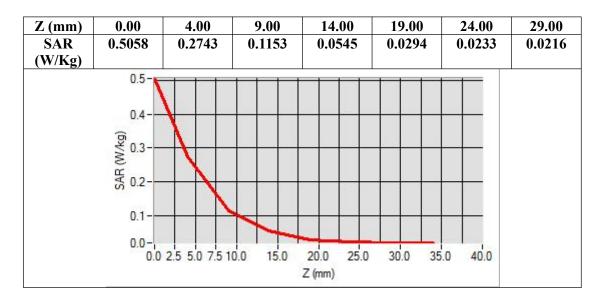

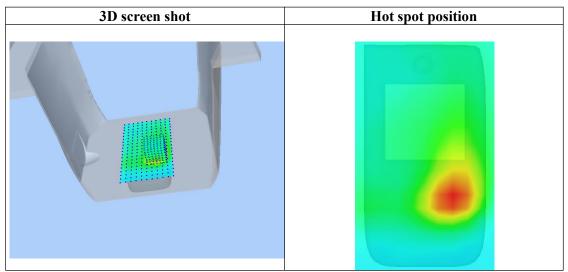



Page 136 of 147

### **WIFI MODE**

Test Laboratory: AGC Lab Date: Mar. 31, 2024

802.11b Mid-Touch-Right

DUT: Smart phone; Type: A140

Communication System: Wi-Fi; Communication System Band: 802.11b; Duty Cycle: 1:1; Conv.F=2.29; Frequency: 2437 MHz; Medium parameters used: f = 2450 MHz;  $\sigma = 1.78 \text{mho/m}$ ;  $\epsilon r = 40.27 \rho = 1000 \text{ kg/m}^3$ ;

Phantom section: Right Section

Ambient temperature ( $^{\circ}$ ):21.8, Liquid temperature ( $^{\circ}$ ): 21.7

### SATIMO Configuration:

Probe: SSE2; Calibrated: May 31, 2023; Serial No.: 2023-EPGO-414


• Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: SAM twin phantom

• Measurement SW: OpenSAR V4\_02\_35

Configuration/802.11b Mid- Touch-Right/Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/802.11b Mid- Touch-Right/Zoom Scan: Measurement grid: dx=5mm,dy=5mm, dz=5mm

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	7x7x7,dx=5mm dy=5mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	2450MHz
Channels	Middle
Signal	Crest factor: 1.0

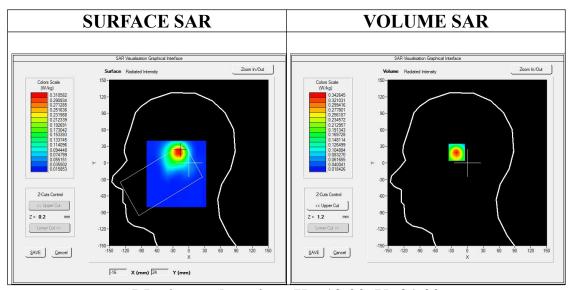


Maximum location: X=-19.00, Y=21.00 SAR Peak: 0.59 W/kg


SAR 10g (W/Kg)	0.149474
SAR 1g (W/Kg)	0.314336


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/





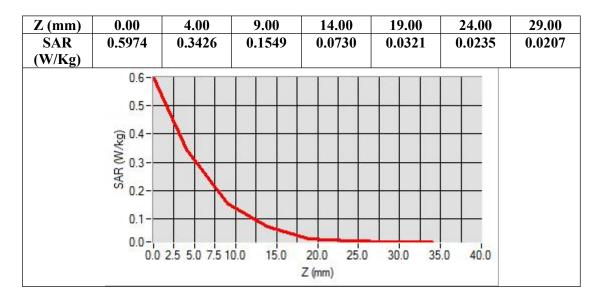

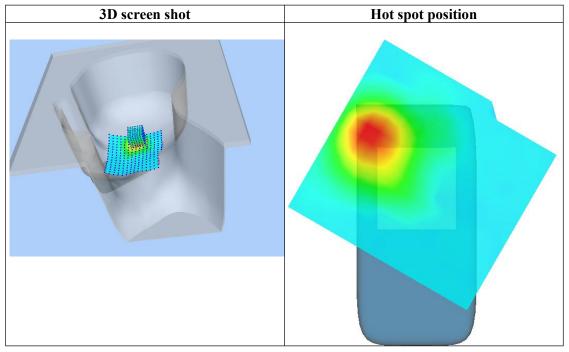



Page 138 of 147

Test Laboratory: AGC Lab Date: Mar. 31, 2024

802.11b Mid-Body-Worn- Edge 4(Left) DUT: Smart phone; Type: A140

Communication System: Wi-Fi; Communication System Band: 802.11b; Duty Cycle: 1:1; Conv.F=2.29; Frequency: 2437 MHz; Medium parameters used: f = 2450 MHz;  $\sigma = 1.78 \text{mho/m}$ ;  $\epsilon = 40.27$ ;  $\rho = 1000 \text{ kg/m}^3$ ;

Phantom section: Flat Section

Ambient temperature ( $^{\circ}$ ):21.8, Liquid temperature ( $^{\circ}$ ): 21.7

#### **SATIMO Configuration:**

Probe: SSE2; Calibrated: May 31, 2023; Serial No.: 2023-EPGO-414


• Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: SAM twin phantom

• Measurement SW: OpenSAR V4\_02\_35

Configuration/802.11b Mid- Body- Edge 4(Left)/Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/802.11b Mid- Body- Edge 4(Left)/Zoom Scan: Measurement grid: dx=5mm, dy=5mm, dz=5mm;


Area Scan	surf_sam_plan.txt, h= 5.00 mm				
ZoomScan	7x7x7,dx=5mm dy=5mm dz=5mm				
Phantom	Validation plane				
Device Position	Edge 4(Left)				
Band	2450MHz				
Channels	Middle				
Signal	Crest factor: 1.0				

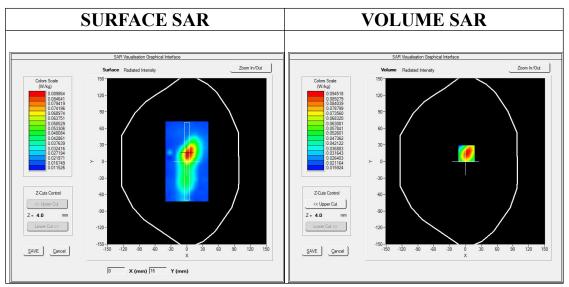


Maximum location: X=2.00, Y=14.00 SAR Peak: 0.17 W/kg


SAR 10g (W/Kg)	0.047496		
SAR 1g (W/Kg)	0.091043		

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
--------	------	------	------	-------	-------	-------	-------





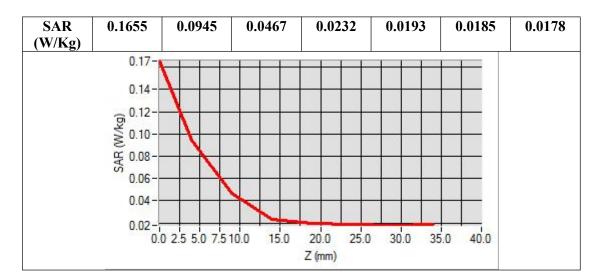

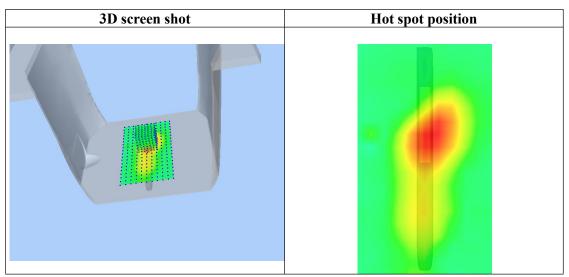







## APPENDIX C. TEST SETUP PHOTOGRAPHS

LEFT-CHEEK TOUCH



LEFT-TILT 150

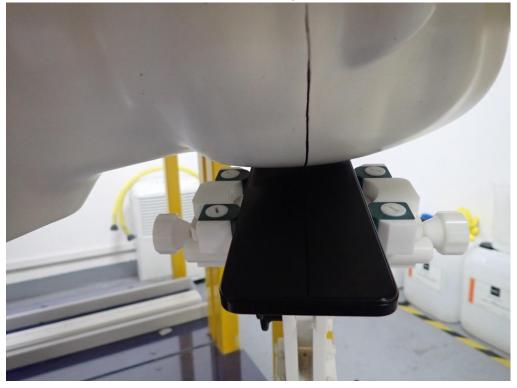








RIGHT- CHEEK TOUCH






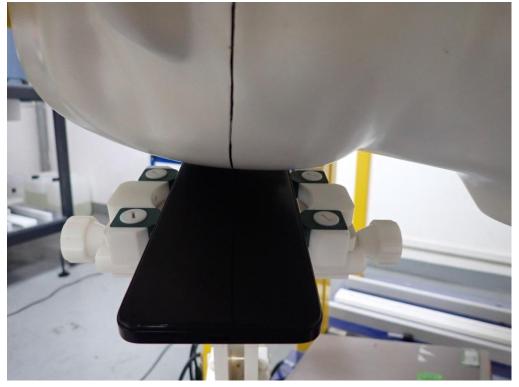


















Edge 1(Top) 10mm-Hotspot Mode












Edge 3(Bottom) 10mm-Hotspot Mode





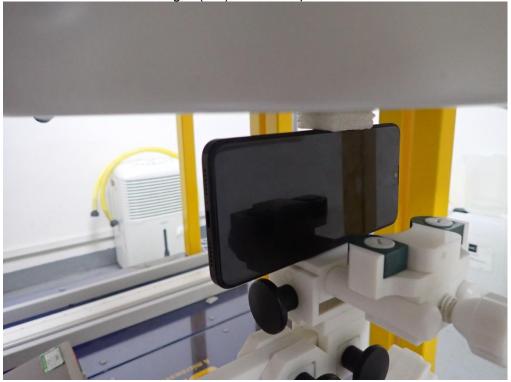








## DEPTH OF THE LIQUID IN THE PHANTOM—ZOOM IN

Note: The position used in the measurement were according to IEEE 1528-2013

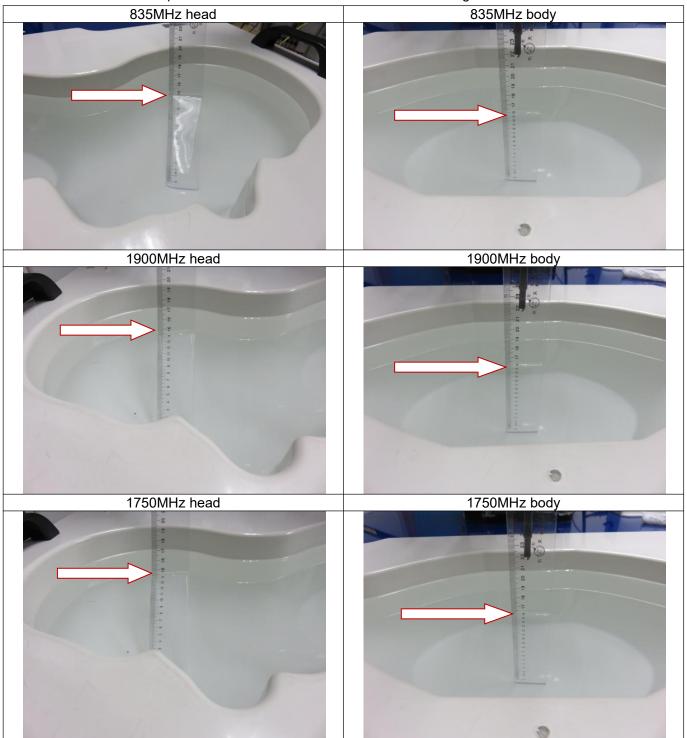





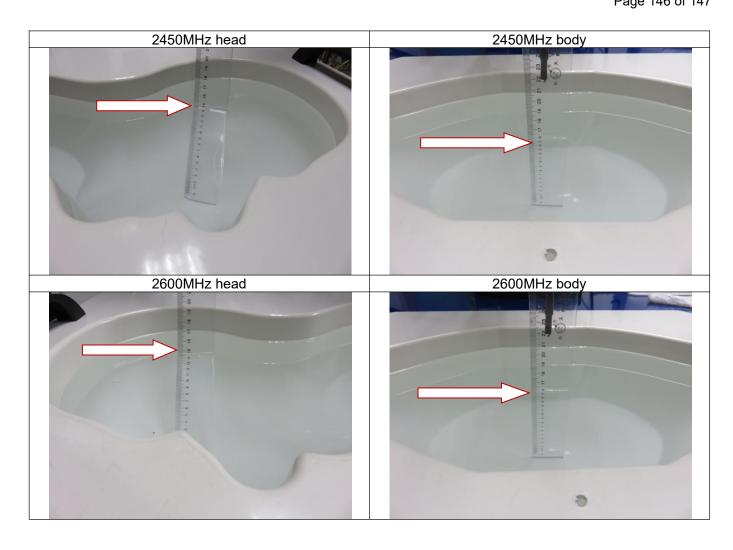



Page 147 of 147

## APPENDIX D. CALIBRATION DATA

Refer to Attached files.

----END OF REPORT----



# Conditions of Issuance of Test Reports

- 1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").
- 2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.
- 3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.
- 4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.
- 5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.
- 6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.
- 7.Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.
- 8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.
- 9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.