

TEST REPORT

Product Name : Rechargeable Water Flosser

Model Number : W011, WF300

FCC ID : 2A9VL-W011

Prepared for : Xiamen JIEBOYA Technology Co., Ltd.
Address : NO 9 Fengshanbei 5 Road, Haicang District, Xiamen
City, Fujian, China

Prepared by : EMTEK (SHENZHEN) CO., LTD.
Address : Building 69, Majialong Industry Zone, Nanshan District,
Shenzhen, Guangdong, China

Tel: (0755) 26954280
Fax: (0755) 26954282

Report Number : ENS2212260043W00201R
Date(s) of Tests : December 26, 2022 to December 29, 2022
Date of issue : December 30, 2022

TABLE OF CONTENT

Test Report Description	Page
1. SUMMARY OF TEST RESULTS	5
2. GENERAL INFORMATION	6
2.1. Description of Device (EUT)	6
2.2. Independent Operation Modes	6
2.3. Test Manner	6
2.4. Description of Test Facility	7
2.5. Test Software	7
2.6. Description of Support Device	7
2.7. Measurement Uncertainty	7
3. MEASURING DEVICE AND TEST EQUIPMENT	8
3.1. For Conducted Emission Measurement	8
3.2. For Radiated Emission Measurement	8
4. POWER LINE CONDUCTED EMISSION MEASUREMENT	9
4.1. Block Diagram of Test Setup	9
4.2. Limits	9
4.3. Test Procedure	9
4.4. Measuring Results	10
5. RADIATED EMISSION MEASUREMENT(UP TO 1GHz)	13
5.1. Block Diagram of Test Setup	13
5.2. Radiated Limit	13
5.3. Test Procedure	13
5.4. Measuring Results	14
6. RADIATED EMISSION MEASUREMENT (ABOVE 1GHz)	17
6.1. Block Diagram of Test Setup	17
6.2. Radiated Limit	17
6.3. Test Procedure	17
6.4. Measuring Results	18
7. PHOTOGRAPHS	21
7.1. Photos of Conducted Emission Measurement	21
7.2. Photos of Radiation Emission Measurement	22
APPENDIX A: Label Requirements (1 Page)	
APPENDIX B: Warning Statement (1 Page)	
APPENDIX C: Photos of EUT	

TEST REPORT DESCRIPTION

Applicant : Xiamen JIEBOYA Technology Co., Ltd.
Manufacturer : Xiamen JIEBOYA Technology Co., Ltd.
Trade Mark : N/A
EUT : Rechargeable Water Flosser
Model No. : W011, WF300
Power Supply : DC 5V from USB port
DC 3.7V from internal battery

Measurement Procedure Used:

FCC CFR Title 47, Part 15, Subpart B
ANSI C63.4-2014

The device described above is tested by EMTEK (SHENZHEN) CO., LTD. to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and EMTEK (SHENZHEN) CO., LTD. is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the FCC requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of EMTEK (SHENZHEN) CO., LTD.

Date of Test : December 26, 2022 to December 29, 2022

Prepared by : 
Una Yu /Editor

Reviewer : 
Jessie Hu/Supervisor

Approved & Authorized Signer : 
Lisa Wang/Manager

Modified Information

Version	Report No.	Revision Data	Summary
Ver.1.0	ENS2212260043W00201R	/	Original Version



1. SUMMARY OF TEST RESULTS

EMISSION		
Description of Test Item	Standard & Limits	Results
Conducted Emission at Mains Terminals	FCC CFR Title 47, Part 15, Subpart B, Class B ANSI C63.4-2014	Pass
Radiated Emission	FCC CFR Title 47, Part 15, Subpart B, Class B ANSI C63.4-2014	Pass
Note: N/A is an abbreviation for Not Applicable.		



2. GENERAL INFORMATION

2.1. Description of Device (EUT)

EUT : Rechargeable Water Flosser

Model Number : W011, WF300

Sample number : 1#

highest frequency : 16MHz

Applicant : Xiamen JIEBOYA Technology Co., Ltd.

Address : NO 9 Fengshanbei 5 Road,Haicang District,Xiamen City,Fujian,China

Manufacturer : Xiamen JIEBOYA Technology Co., Ltd.

Address : NO 9 Fengshanbei 5 Road,Haicang District,Xiamen City,Fujian,China

Date of Received : December 26, 2022

Date of Test : December 26, 2022 to December 29, 2022

2.2. Independent Operation Modes

- A. On
1. Charging mode
 2. Normal mode
 3. Soft mode
 4. Pluse mode

2.3. Test Manner

Test Items	Test Voltage	Operation Modes	Worst case
Conducted Emission	AC 120/60Hz	Mode A	Mode A.1
Radiated emissions(Up to 1 GHz)	AC 120/60Hz	Mode A	Mode A.1
Radiated emissions(Above 1GHz)	AC 120/60Hz	Mode A	Mode A.4

2.4. Description of Test Facility

Site Description

EMC Lab.

: **Accredited by CNAS**

The Certificate Registration Number is L2291.

The Laboratory has been assessed and proved to be in compliance with CNAS-CL01 (identical to ISO/IEC 17025:2017)

Accredited by FCC

Designation Number: CN1204

Test Firm Registration Number: 882943

Accredited by A2LA

The Certificate Number is 4321.01.

Accredited by Industry Canada

The Conformity Assessment Body Identifier is CN0008

Name of Firm : EMTEK (SHENZHEN) CO., LTD.

Site Location : Building 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, China

2.5. Test Software

Item

Software

Conducted Emission

: EMTEK(Ver.CON-03A1)-Shenzhen

Radiated Emission : EMTEK(Ver.RA-03A1)-Shenzhen

2.6. Description of Support Device

/ : /

2.7. Measurement Uncertainty

Test Item

Uncertainty

Conducted Emission Uncertainty : 3.16dB(9k~150kHz Conduction 2#)
2.90dB(150k-30MHz Conduction 2#)

Radiated Emission Uncertainty (3m 3# Chamber) : 4.40dB (30M~1GHz Polarize: H)
5.04dB (30M~1GHz Polarize: V)
4.94dB (1~6GHz)

Uncertainty for test site temperature and humidity : 0.6℃
4%

3. MEASURING DEVICE AND TEST EQUIPMENT

3.1. For Conducted Emission Measurement


Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
EMI Test Receiver	Rohde & Schwarz	ESCI	101045	May 14, 2022	1 Year
PULSE LIMITER	Rohde & Schwarz	ESH3-Z2	100107	May 14, 2022	1 Year
AMN	Rohde & Schwarz	ESH3-Z5	100191	May 15, 2022	1 Year

3.2. For Radiated Emission Measurement

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
EMI Test Receiver	Rohde & Schwarz	ESU 26	100154	May 14, 2022	1 Year
Pre-Amplifie	Lunar EM	LNA10M1G-40	J1011130912001	May 14, 2022	1 Year
Bilog Antenna	Schwarzbeck	VULB9163	659	August 22, 2021	2 Year
Horn antenna	Schwarzbeck	BBHA9120D	9120D-1177	June 12, 2021	2 Year
Pre-Amplifie	SKET	LNPA_0118G-45	SK2019051801	May 14, 2022	1 Year

4. POWER LINE CONDUCTED EMISSION MEASUREMENT

4.1. Block Diagram of Test Setup

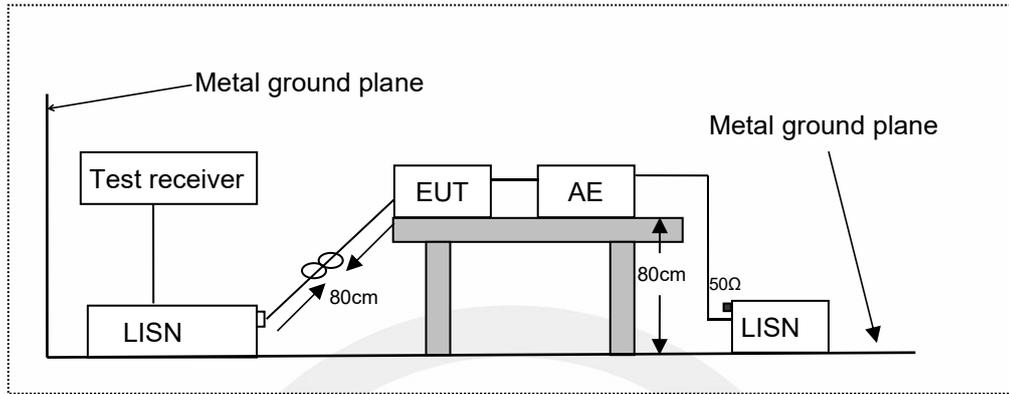

LISN: Line Impedance Stabilization Network
 AE: Associated equipment
 EUT: Equipment under test

4.2. Limits

FCC Part 15, Subpart B, Class B

Frequency (MHz)	Limit (dB μ V)	
	Quasi-peak Level	Average Level
0.15 ~ 0.50	66.0 ~ 56.0 *	56.0 ~ 46.0 *
0.50 ~ 5.00	56.0	46.0
5.00 ~ 30.00	60.0	50.0

NOTE1-The lower limit shall apply at the transition frequencies.
 NOTE2-The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.50MHz.

4.3. Test Procedure

The EUT was placed on a table 0.8 m height from the metal ground plane and 0.4 m from the conducting wall of the shielding room and it was kept at least 0.8 m from any other grounded conducting surface.

All units of equipment forming the system under test (includes the EUT as well as connected peripherals and associated equipment or devices) shall be arranged such that a nominal 0.1 m separation is achieved between the neighboring units.

Connect EUT to the power mains through a artificial mains network (AMN). Where the mains cable supplied by the manufacturer is longer than 1 m, the excess should be folded at the centre into a bundle no longer than 0.4 m, so that its length is shortened to 1 m.

All the support units are connecting to the other LISN.

The LISN provides 50 ohm coupling impedance for the measuring instrument.

Both sides of AC line were checked for maximum conducted interference.

The frequency range from 150 kHz to 30 MHz was sweep.

Set the test-receiver system to quasi peak detect function and average detect function, and to measure the conducted emissions values.

Test results were obtained from the following equation:


Emission Level (dB μ V) = LISN Factor (dB) + Cable Loss (dB) + Reading (dB μ V)


Margin (dB) = Emission Level (dB μ V) - Limit (dB μ V)

4.4. Measuring Results

Pass.

All the modes were tested and the data of the worst modes are attached the following pages.

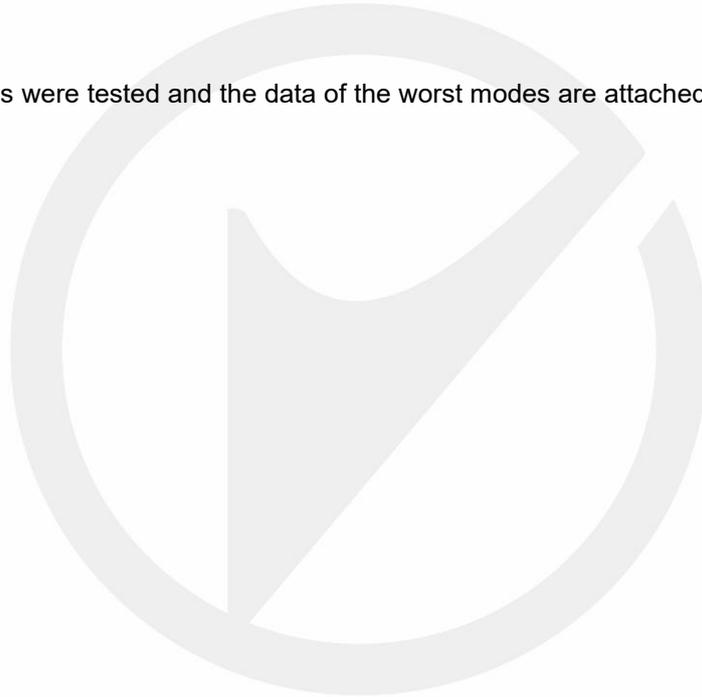

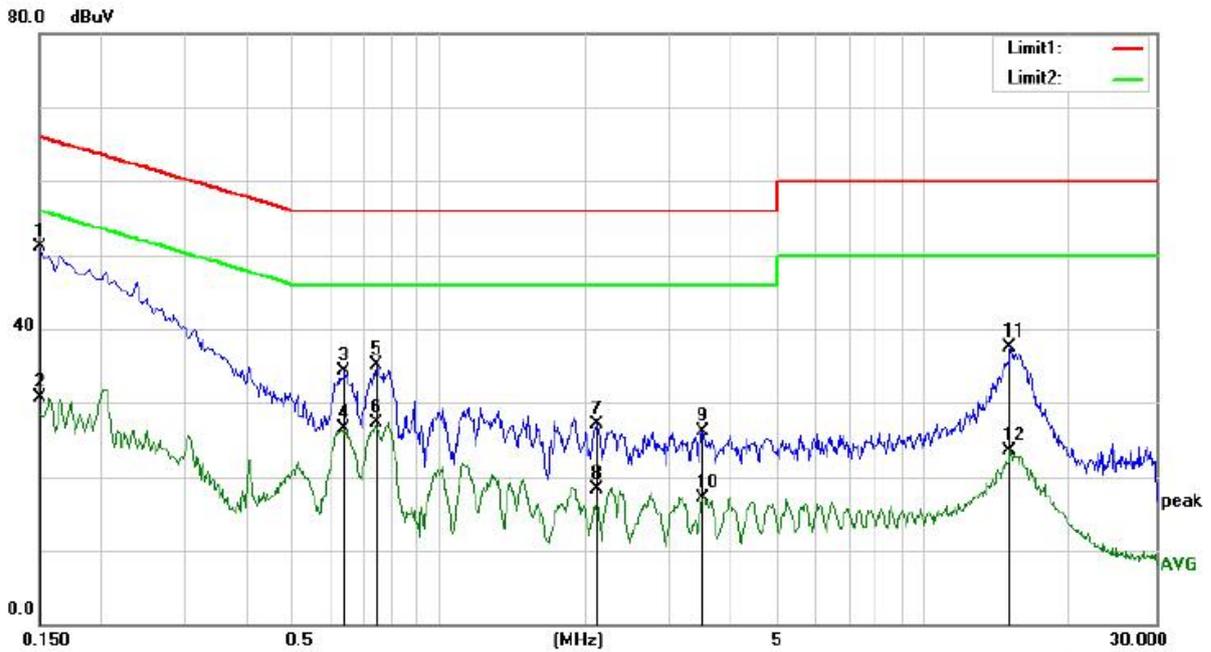

Site Conduction #2

Phase: **N**

Temperature: 25.1

Limit: (CE)FCC PART 15 class B_QP


Power: AC 120V/60Hz DC 3.7V

Humidity: 45 %

Mode: Charging MODE

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	*	0.1500	40.92	10.15	51.07	66.00	-14.93	QP	
2		0.1500	20.56	10.15	30.71	56.00	-25.29	AVG	
3		0.6380	24.07	10.17	34.24	56.00	-21.76	QP	
4		0.6380	16.33	10.17	26.50	46.00	-19.50	AVG	
5		0.7460	24.91	10.19	35.10	56.00	-20.90	QP	
6		0.7460	17.16	10.19	27.35	46.00	-18.65	AVG	
7		2.1140	16.99	10.19	27.18	56.00	-28.82	QP	
8		2.1140	8.21	10.19	18.40	46.00	-27.60	AVG	
9		3.4940	15.92	10.22	26.14	56.00	-29.86	QP	
10		3.4940	6.91	10.22	17.13	46.00	-28.87	AVG	
11		15.0500	27.04	10.46	37.50	60.00	-22.50	QP	
12		15.0500	12.98	10.46	23.44	50.00	-26.56	AVG	

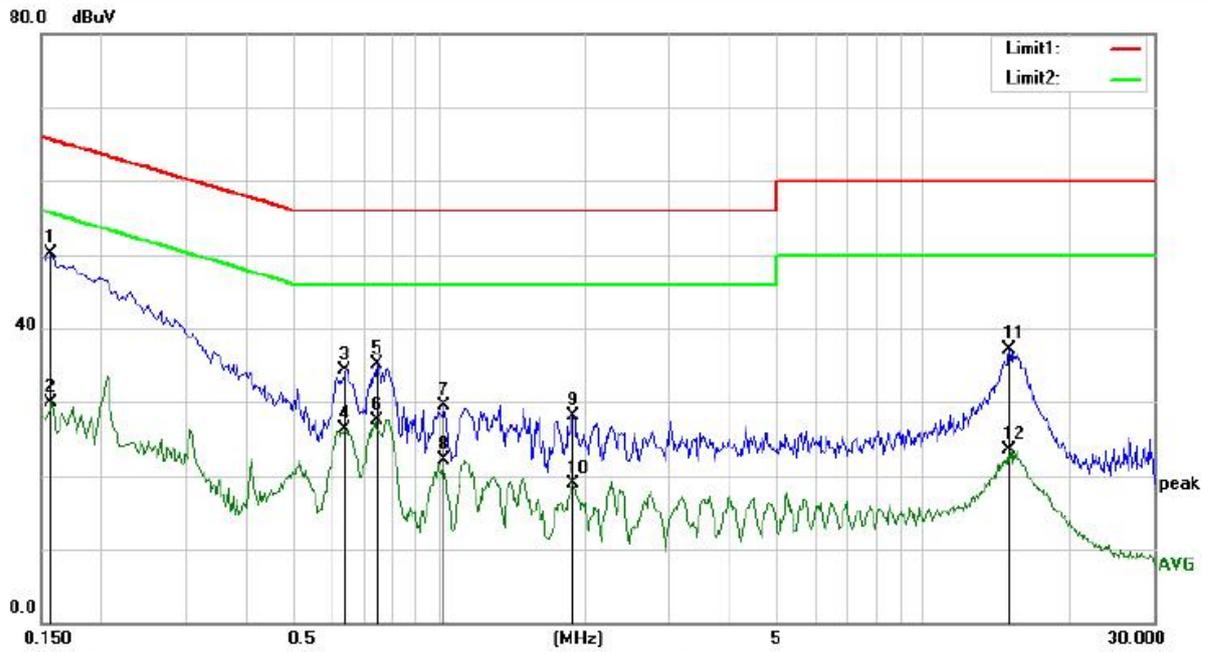

Site Conduction #2

Phase: **L1**

Temperature: 25.1

Limit: (CE)FCC PART 15 class B_QP

Power: AC 120V/60Hz DC 3.7V

Humidity: 45 %


Mode: Charging MODE

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	*	0.1580	40.03	10.15	50.18	65.57	-15.39	QP	
2		0.1580	19.70	10.15	29.85	55.57	-25.72	AVG	
3		0.6380	24.23	10.17	34.40	56.00	-21.60	QP	
4		0.6380	16.15	10.17	26.32	46.00	-19.68	AVG	
5		0.7460	25.01	10.19	35.20	56.00	-20.80	QP	
6		0.7460	17.40	10.19	27.59	46.00	-18.41	AVG	
7		1.0260	19.29	10.18	29.47	56.00	-26.53	QP	
8		1.0260	11.85	10.18	22.03	46.00	-23.97	AVG	
9		1.8900	17.89	10.18	28.07	56.00	-27.93	QP	
10		1.8900	8.64	10.18	18.82	46.00	-27.18	AVG	
11		15.0940	26.55	10.46	37.01	60.00	-22.99	QP	
12		15.0940	13.02	10.46	23.48	50.00	-26.52	AVG	

5. RADIATED EMISSION MEASUREMENT(UP TO 1GHz)

5.1. Block Diagram of Test Setup

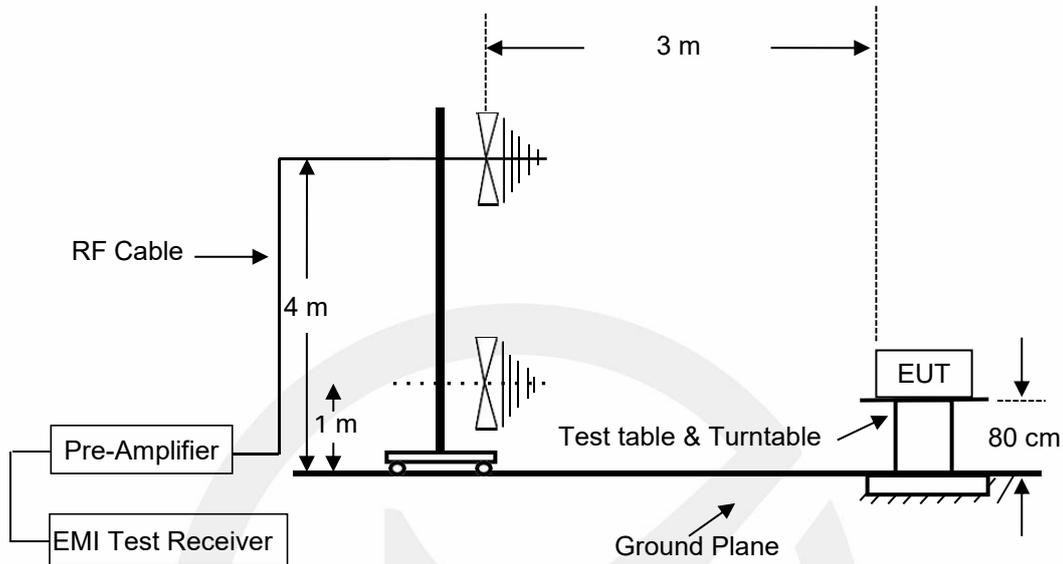

5.2. Radiated Limit

FCC Part 15, Subpart B, Class B

Frequency MHz	Distance Meters	Field Strengths Limit	
		$\mu\text{V}/\text{m}$	$\text{dB}(\mu\text{V})/\text{m}$
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0

5.3. Test Procedure

The EUT was placed on a non-conductive table whose total height equaled 80cm. All units of equipment forming the system under test (includes the EUT as well as connected peripherals and associated equipment or devices) shall be arranged such that a nominal 0.1 m separation is achieved between the neighboring units.

The EUT was set 3 meters (or 10 meters) away from the receiving antenna that was mounted on a non-conductive mast. The antenna can move up and down between 1 to 4 meters to find out the maximum emission level.

The turntable can rotate 360 degree to determine the position of the maximum emission level.

The initial testing identified the frequency that has the highest disturbance relative to the limit while operating the EUT in typical modes of operation and cable positions in a test setup representative of typical system configuration.

The identification of the frequency of highest emission with respect to the limit was found by investigating emissions at a number of significant frequencies. The probable frequency of maximum emission had been found and that the associated cable and EUT configuration and mode of operation had been identified.

The bandwidth of the Receiver is set at 120 kHz.

Test results were obtained from the following equation:


Emission level (dB μ V/m) = Antenna Factor - Amp Factor + Cable Loss + Reading

Margin (dB) = Emission Level (dB μ V/m) - Limit (dB μ V/m)

5.4. Measuring Results

PASS.

All the modes were tested and the data of the worst modes are attached the following pages.

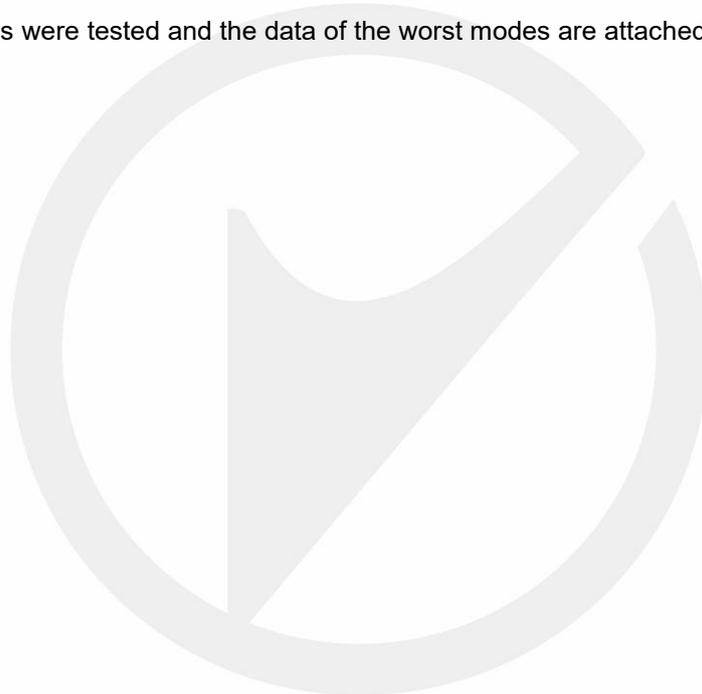



Site: 3m Chamber #1

Polarization: **Vertical**

Temperature: 26 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 60 %

Mode: Charging mode

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		40.1347	37.67	-8.43	29.24	40.00	-10.76	QP		
2		74.1351	43.05	-9.77	33.28	40.00	-6.72	QP		
3		80.9275	43.74	-10.80	32.94	40.00	-7.06	QP		
4		108.2667	45.86	-10.46	35.40	43.50	-8.10	QP		
5	*	114.5146	47.20	-10.19	37.01	43.50	-6.49	QP		
6		851.0353	29.77	8.38	38.15	46.00	-7.85	QP		




Site: 3m Chamber #1 Polarization: **Horizontal** Temperature: 26 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 60 %
 Mode: Charging mode
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		115.3205	44.11	-10.16	33.95	43.50	-9.55	QP		
2		179.3863	39.00	-10.46	28.54	43.50	-14.96	QP		
3		213.7634	41.39	-9.62	31.77	43.50	-11.73	QP		
4		315.4808	37.05	-6.08	30.97	46.00	-15.03	QP		
5		370.7023	35.80	-3.72	32.08	46.00	-13.92	QP		
6	*	857.0247	29.86	7.92	37.78	46.00	-8.22	QP		

6. RADIATED EMISSION MEASUREMENT (ABOVE 1GHz)

6.1. Block Diagram of Test Setup

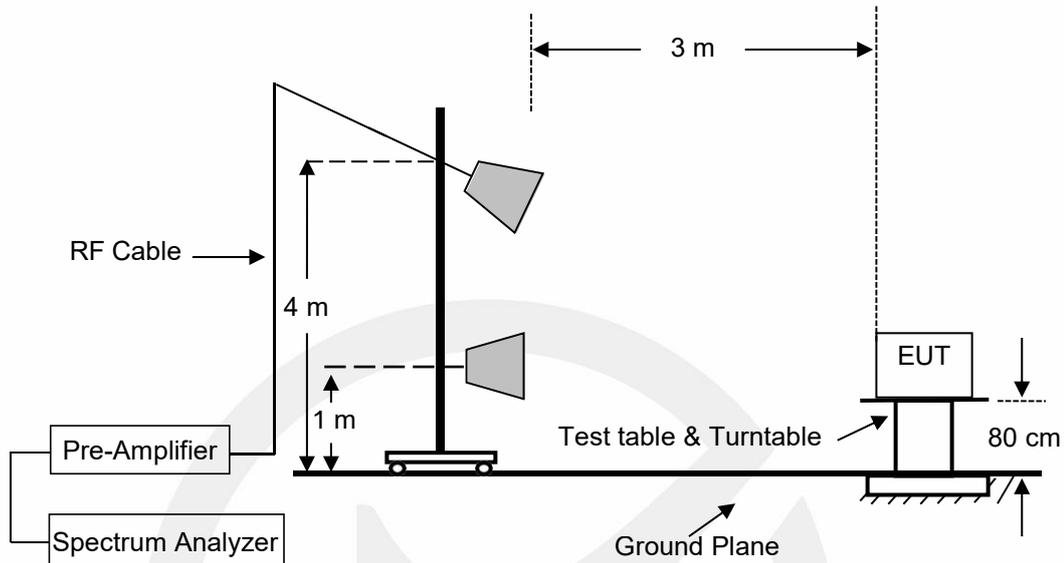

6.2. Radiated Limit

FCC Part 15, Subpart B, Class B

Frequency range GHz	Average limit dB(μ V/m)	Peak limit dB(μ V/m)
Above 1000	54	74

Note: The highest internal source of an EUT is defined as the highest frequency generated or used in the device or on which the EUT operates or tunes. If the highest frequency of the internal sources of the EUT is less than 1.705 MHz, the measurement shall only be made up to 30 MHz. If the highest frequency of the internal sources of the EUT is between 1.705 MHz and 108 MHz, the measurement shall only be made up to 1 GHz. If the highest frequency of the internal sources of the EUT is between 108 MHz and 500 MHz the measurement shall only be made up to 2 GHz. If the highest frequency of the internal sources of the EUT is between 500 MHz and 1 GHz, the measurement shall only be made up to 5 GHz. If the highest frequency of the internal sources of the EUT is above 1 GHz, the measurement shall be made up to 5 times the highest frequency or 40 GHz, whichever is less.

6.3. Test Procedure

The EUT was placed on a non-conductive table whose total height equaled 80cm. All units of equipment forming the system under test (includes the EUT as well as connected peripherals and associated equipment or devices) shall be arranged such that a nominal 0.1 m separation is achieved between the neighboring units. Where the mains cable supplied by the manufacturer is longer than 1 m, the excess should be folded at the centre into a bundle no longer than 0.4 m, so that its length is shortened to 1 m.

The EUT was set 3 meters away from the receiving antenna that was mounted on a non-conductive mast. The antenna can move up and down between 1 to 4 meters to find out the maximum emission

level.

The turntable can rotate 360 degree to determine the position of the maximum emission level.

The initial testing identified the frequency that has the highest disturbance relative to the limit while operating the EUT in typical modes of operation and cable positions in a test setup representative of typical system configuration.

The identification of the frequency of highest emission with respect to the limit was found by investigating emissions at a number of significant frequencies. The probable frequency of maximum emission had been found and that the associated cable and EUT configuration and mode of operation had been identified.

The frequency range above 1GHz the measuring instrument use RBW=1 MHz and VBW=3 MHz with peak detector for peak values, and use RBW=1 MHz and VBW=10 Hz with peak detector for Average Values.

Test results were obtained from the following equation:


Emission level (dB μ V/m) = Antenna Factor - Amp Factor +Cable Loss + Reading

Margin (dB) = Emission Level (dB μ V/m) - Limit (dB μ V/m)

6.4. Measuring Results


PASS.

All the modes were tested and the data of the worst modes are attached the following pages.

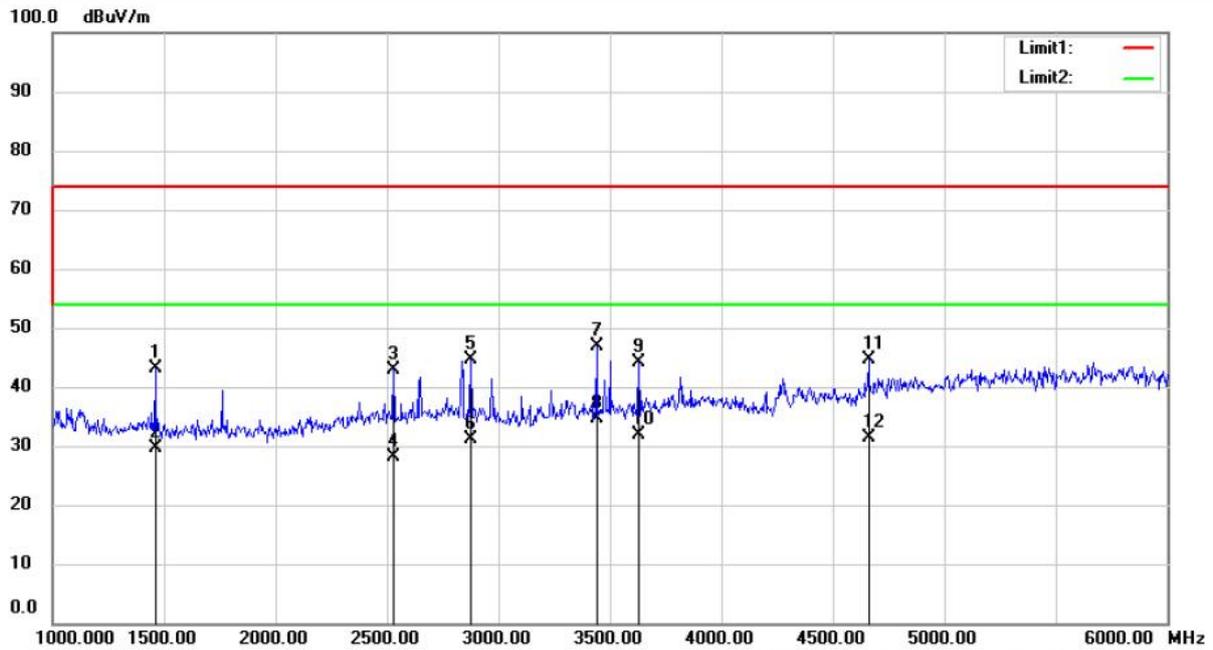

Site: 3m Chamber #1 Polarization: **Horizontal** Temperature: 26 C
 Limit: (RE)FCC PART 15 CLASS B Power: DC 3.7V Humidity: 60 %
 Mode: Pluse mode
 Note:

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree	Comment
1	1460.000	60.75	-17.65	43.10	74.00	-30.90	peak			
2	1460.000	47.25	-17.65	29.60	54.00	-24.40	AVG			
3	2530.000	58.30	-15.45	42.85	74.00	-31.15	peak			
4	2530.000	43.55	-15.45	28.10	54.00	-25.90	AVG			
5	2875.000	59.20	-14.51	44.69	74.00	-29.31	peak			
6	2875.000	45.71	-14.51	31.20	54.00	-22.80	AVG			
7	3440.000	60.64	-13.82	46.82	74.00	-27.18	peak			
8 *	3440.000	48.42	-13.82	34.60	54.00	-19.40	AVG			
9	3630.000	57.05	-13.04	44.01	74.00	-29.99	peak			
10	3630.000	44.84	-13.04	31.80	54.00	-22.20	AVG			
11	4660.000	53.74	-9.18	44.56	74.00	-29.44	peak			
12	4660.000	40.68	-9.18	31.50	54.00	-22.50	AVG			

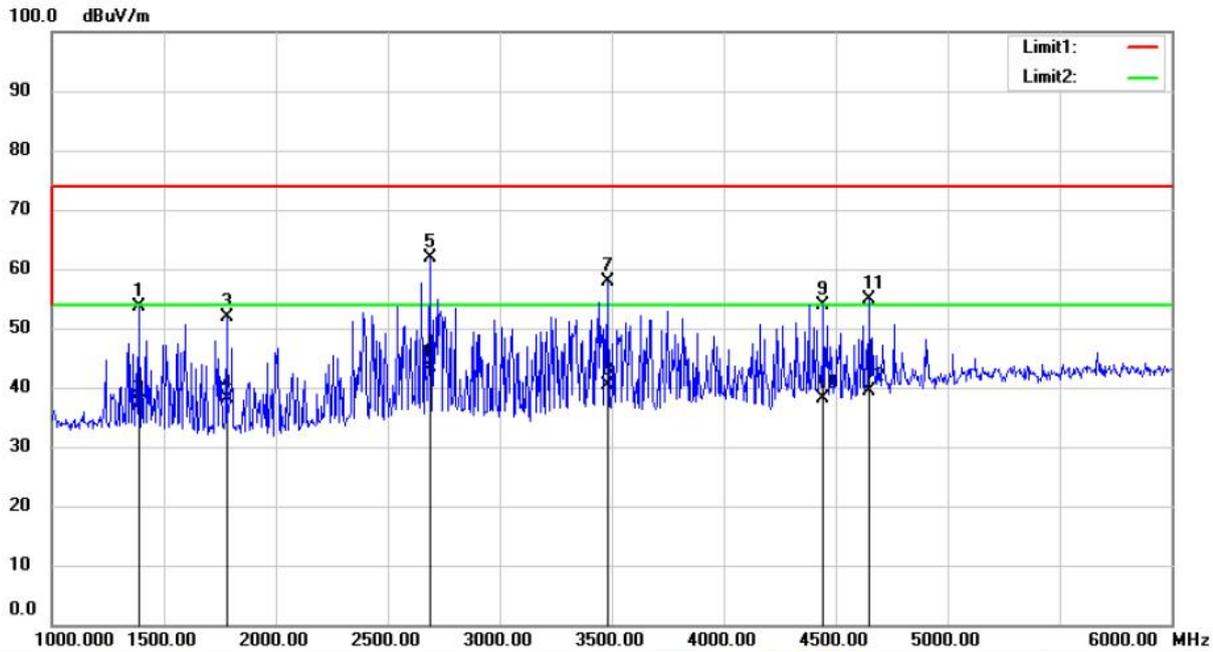


Site 3m Chamber #1 Polarization: **Vertical** Temperature: 26 C
 Limit: (RE)FCC PART 15 CLASS B Power: DC 3.7V Humidity: 60 %
 Mode:Pluse mode
 Note:



No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		1390.000	70.93	-17.34	53.59	74.00	-20.41			peak
2		1390.000	54.74	-17.34	37.40	54.00	-16.60			AVG
3		1780.000	69.97	-18.19	51.78	74.00	-22.22			peak
4		1780.000	56.29	-18.19	38.10	54.00	-15.90			AVG
5		2690.000	76.93	-15.01	61.92	74.00	-12.08			peak
6	*	2690.000	58.51	-15.01	43.50	54.00	-10.50			AVG
7		3480.000	71.76	-13.78	57.98	74.00	-16.02			peak
8		3480.000	54.28	-13.78	40.50	54.00	-13.50			AVG
9		4445.000	63.70	-9.87	53.83	74.00	-20.17			peak
10		4445.000	47.97	-9.87	38.10	54.00	-15.90			AVG
11		4650.000	64.09	-9.21	54.88	74.00	-19.12			peak
12		4650.000	48.61	-9.21	39.40	54.00	-14.60			AVG

7. PHOTOGRAPHS

7.1.Photos of Conducted Emission Measurement

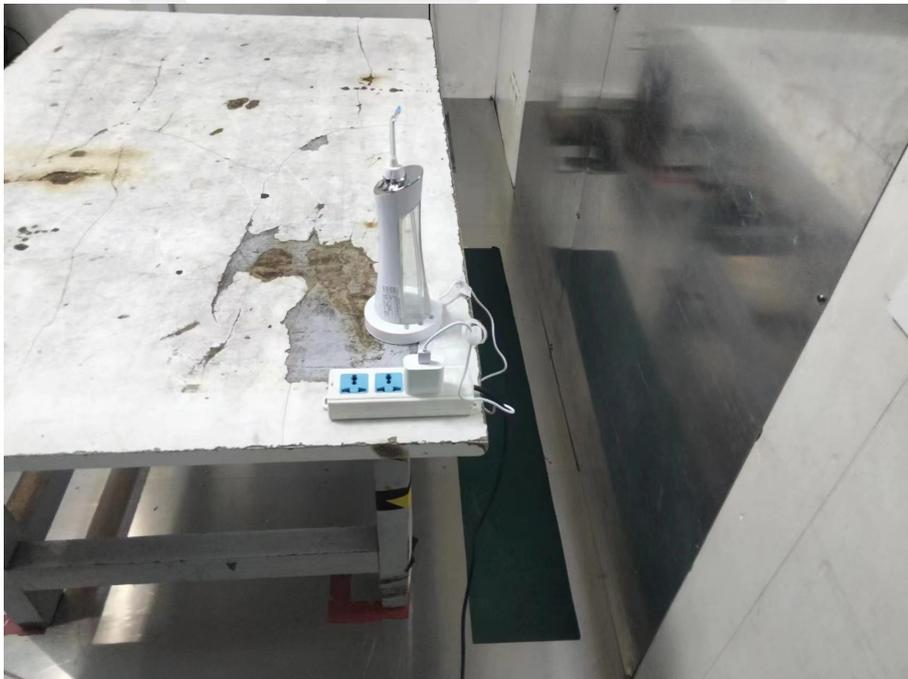

7.2. Photos of Radiation Emission Measurement

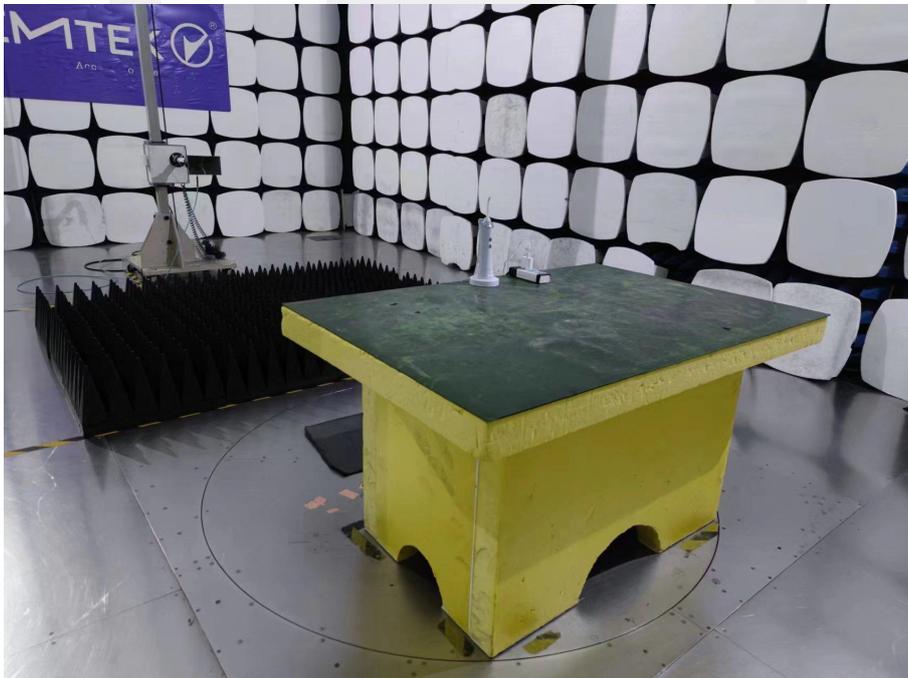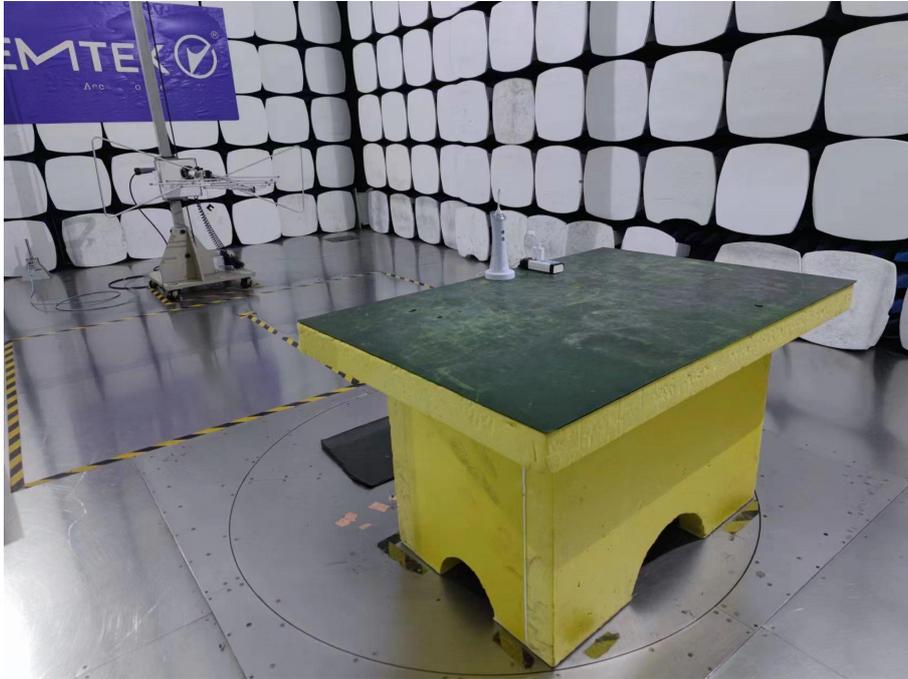

APPENDIX A: Label Requirements

(1) Receivers associated with the operation of a licensed radio service, e.g., FM broadcast under part 73 of this chapter, land mobile operation under part 90 of this chapter, etc., shall bear the following statement in a conspicuous location on the device:

This device complies with part 15 of the FCC Rules. Operation is subject to the condition that this device does not cause harmful interference.

(2) A stand-alone cable input selector switch, shall bear the following statement in a conspicuous location on the device:

This device complies with part 15 of the FCC Rules for use with cable television service.

(3) All other devices shall bear the following statement in a conspicuous location on the device:

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.



APPENDIX B: Warning Statement

(a) For a Class A digital device or peripheral, the instructions furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual:

NOTE: This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

(b) For a Class B digital device or peripheral, the instructions furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual:


NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:


- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.



Warning: Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.


APPENDIX C: Photos of EUT





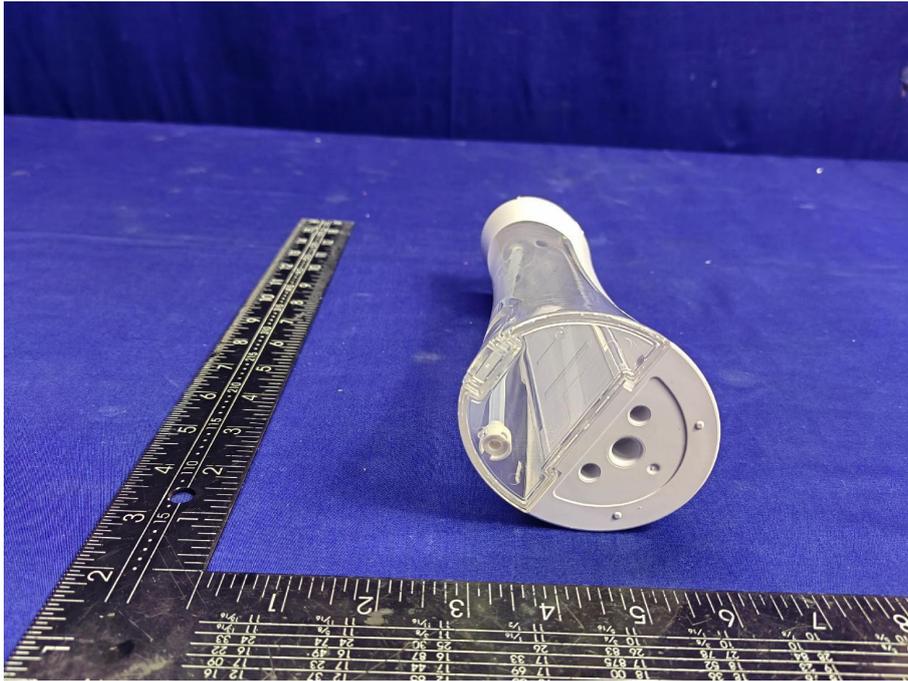

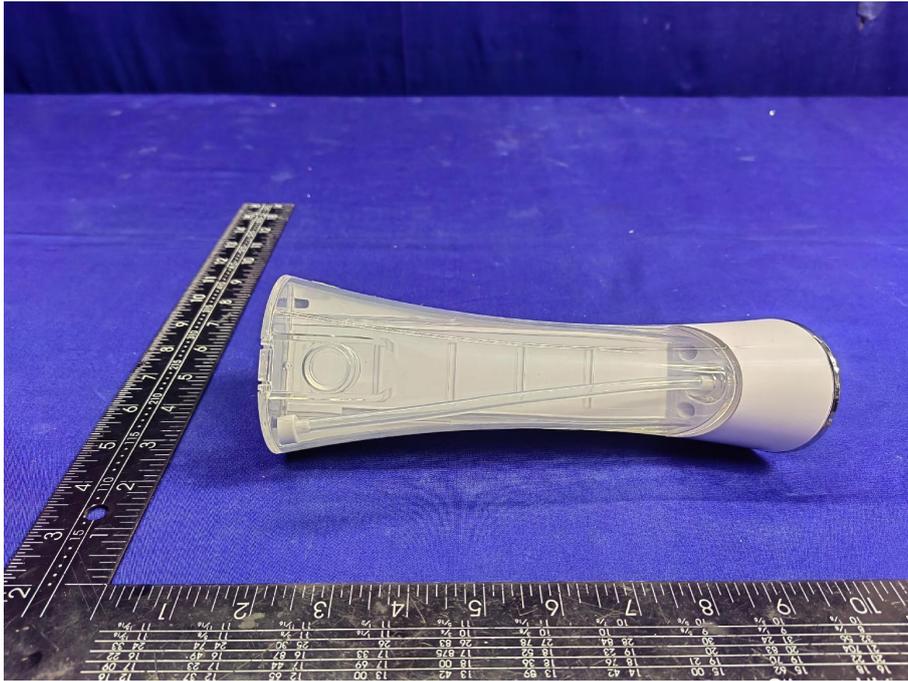

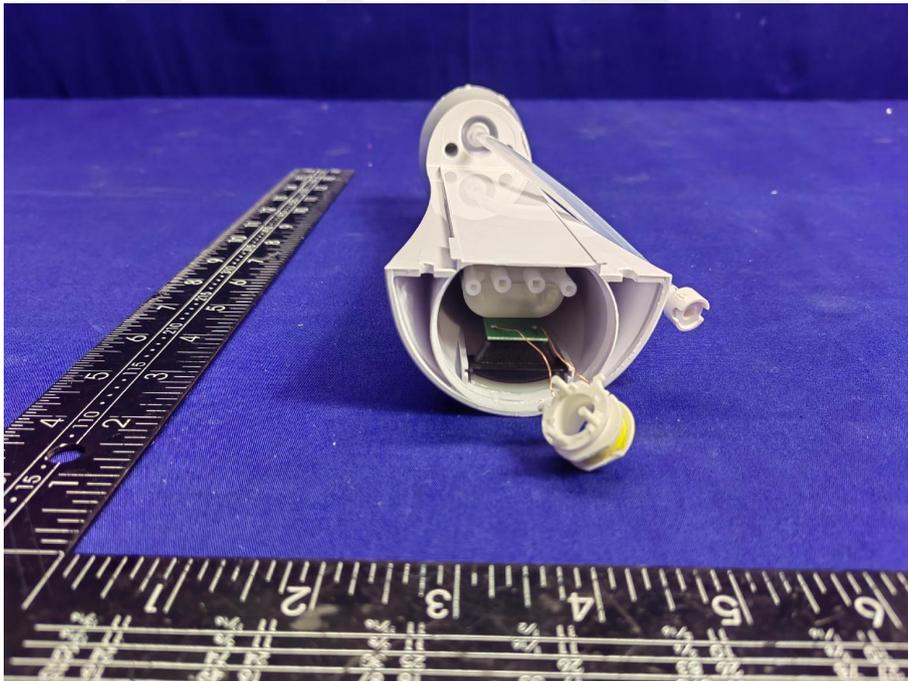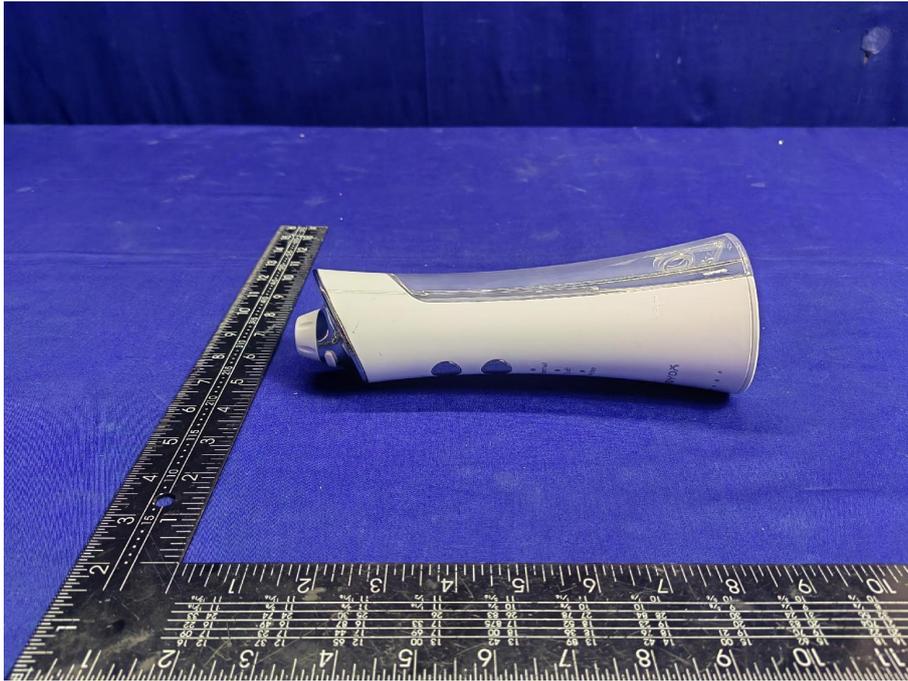

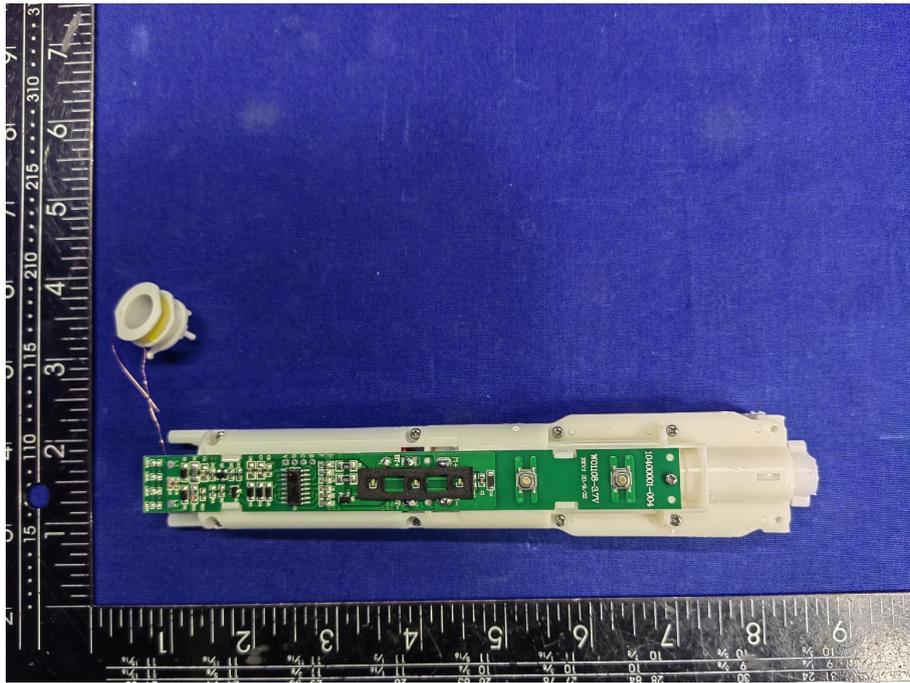

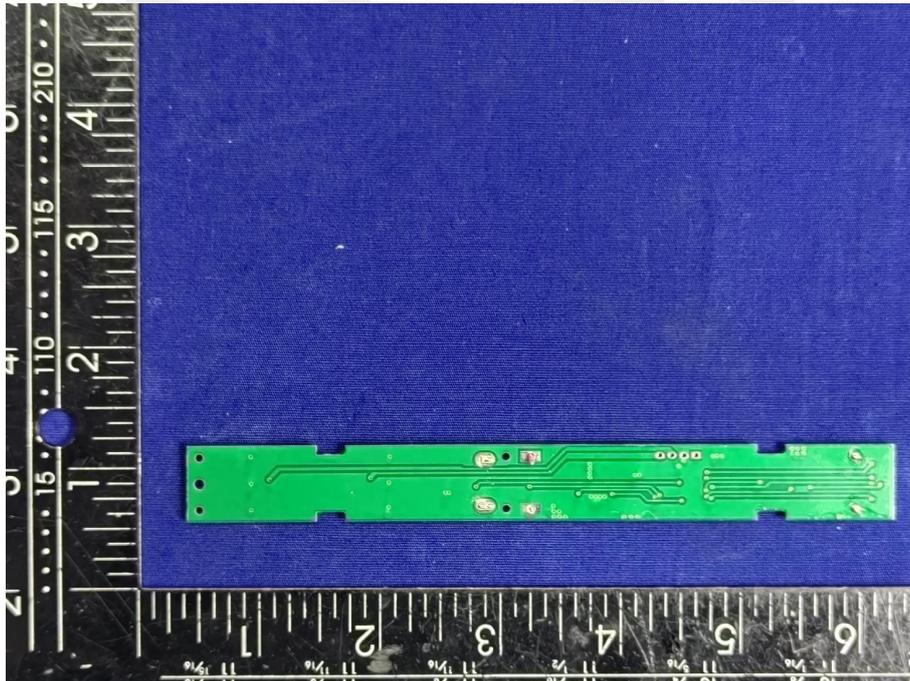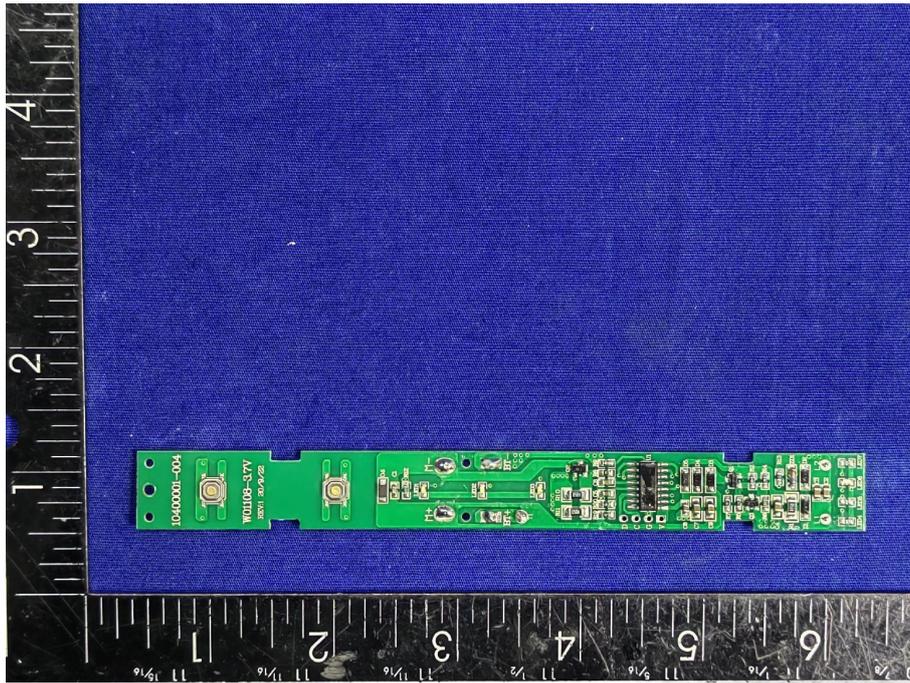

*** End of Report ***

Statement

1. This report will be void without authorized signature or special seal for testing report.
2. This report shall not be copied partly without authorization.
3. The test results or observations are applicable only to tested sample. Client shall be responsible for representativeness of the sample and authenticity of the material.
4. The observations or tests with special mark fall outside the scope of accreditation, and are only used for purpose of commission, research, training, internal quality control etc.
5. The test results or observations are provided in accordance with measured value, without taking risks caused by uncertainty into account. Without explicit stipulation in special agreements, standards or regulations, EMTEK shall not assume any responsibility.
6. Objections shall be raised within 20 days from the date receiving the report.