

一、 Winding Procese:

NO	winding	Wire gauge	number of turns	Winding direction	Note
1	N1	2UEW-B-0.08*24*2P	10TS	CCW	
2					

二. FEATURES:

1. Test conditions) : 25°C,65%RH@100KHz/1V

1.1 (Inductance)

1.11 L0A=3.8uH±20%

1.12 L0A=6.5uH±10%


1.2 Q value=50MIN

1.3 DCR: 60mΩ MAX

1.4 Operating Temperature: -25°C~85°C


2. Test instrument: L:1068+1310;**DCR**:502BC;**SIZE**:Callipers

三. CIRCUIT DIAGRAM



单位: MM

四. OUTSIDE DIAGRA

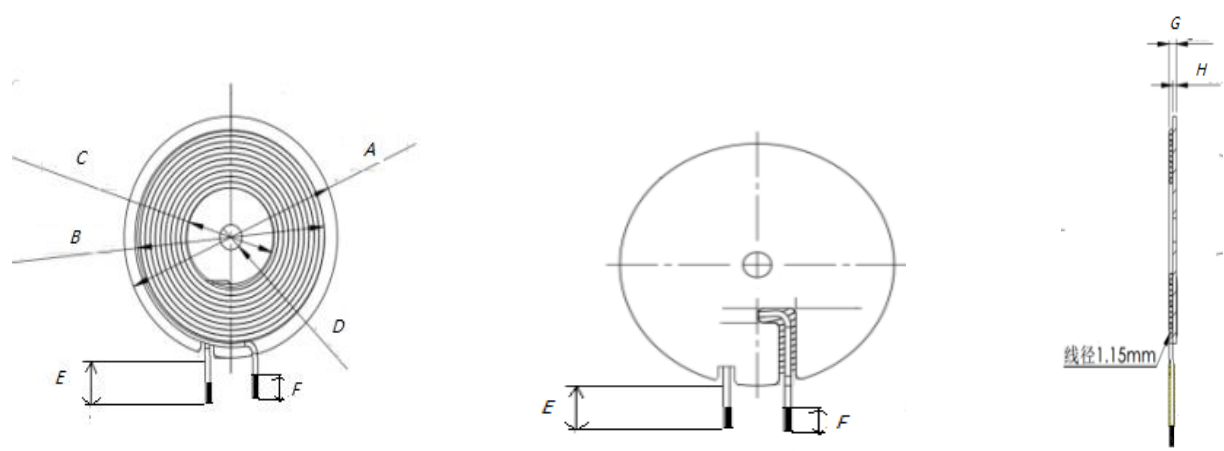

standard	A	B	C	D	E	F	G
STD	41.5±0.5	38.5±0.5	20.5±0.5	5.3±0.5	80±2	3±1	1.5±0.5

unit: MM