

# FCC Test Report

**Applicant** : **Easymeeting as**

---

**Address** : **Sykehusvegen 20-23 9019 Tromso, Norway**

---

**Product Name** : **Nattugla**

---

**Report Date** : **Jul. 30, 2024**

---

**Shenzhen Anbotek Compliance Laboratory Limited**



# Contents

1. General Information .....	6
1.1. Client Information .....	6
1.2. Description of Device (EUT) .....	6
1.3. Auxiliary Equipment Used During Test .....	8
1.4. Description of Test Modes .....	8
1.5. Description Of Test Setup .....	10
1.6. Test Equipment List .....	11
1.7. Measurement Uncertainty .....	12
1.8. Description of Test Facility .....	12
1.9. Disclaimer .....	13
2. Summary of Test Results .....	14
3. Conducted Emission Test .....	15
3.1. Test Standard and Limit .....	15
3.2. Test Setup .....	15
3.3. Test Procedure .....	15
3.4. Test Data .....	15
4. Radiation Spurious Emission and Restricted Band Test .....	18
4.1. Test Standard and Limit .....	18
4.2. Test Setup .....	19
4.3. Test Procedure .....	20
4.4. Test Data .....	21
5. Maximum Conducted Output Power Test .....	33
5.1. Test Standard and Limit .....	33
5.2. Test Setup .....	33
5.3. Test Procedure .....	33
5.4. Test Data .....	34
6. 26dB Bandwidth & 99% Occupied Bandwidth Test .....	35
6.1. Test Standard .....	35
6.2. Test Setup .....	35
6.3. Test Procedure .....	35
6.4. Test Data .....	35
7. Minimum 6dB Bandwidth Test .....	36
7.1. Test Standard .....	36
7.2. Test Setup .....	36
7.3. Test Procedure .....	36
7.4. Test Data .....	36
8. Maximum Power Spectral Density Test .....	37
8.1. Test Standard and Limit .....	37
8.2. Test Setup .....	37



8.3. Test Procedure.....	37
8.4. Test Data.....	38
9. Conducted Band Edge Test.....	39
9.1. Test Standard and Limit.....	39
9.2. Test Setup.....	39
9.3. Test Procedure.....	39
9.4. Test Data.....	39
10. Frequency Stability.....	40
10.1. Test Standard and Limit.....	40
10.2. Test Setup.....	40
10.3. Test Procedure.....	40
10.4. Test Data.....	40
11. Antenna Requirement.....	58
11.1. Test Standard and Requirement.....	58
11.2. Antenna Connected Construction.....	58
APPENDIX I -- TEST SETUP PHOTOGRAPH.....	59
APPENDIX II -- EXTERNAL PHOTOGRAPH.....	59
APPENDIX III -- INTERNAL PHOTOGRAPH.....	59



# TEST REPORT

Applicant : Easymeeting as  
Manufacturer : Easymeeting as  
Product Name : Nattugla  
Model No. : NUA-3, NUA-1  
Trade Mark : N/A  
Rating(s) : Input: 50V== 0.6A

**Test Standard(s) : 47 CFR Part 15E**

**Test Method(s) : ANSI C63.10: 2020**

**KDB 789033 D02 General UNII Test Procedures New Rules v02r01**

The device described above is tested by Shenzhen Anbotek Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen Anbotek Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the 47 CFR Part 15E requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen Anbotek Compliance Laboratory Limited.

Date of Receipt

Mar. 25, 2024

Date of Test

Mar. 25, 2024 to Jul. 11, 2024

Prepared By

*Tu Tu Hong*

(TuTu Hong)

Approved & Authorized Signer

*Edward Pan*

(Edward Pan)



## Revision History

Report Version	Description	Issued Date
R00	Original Issue.	Jul. 30, 2024



## 1. General Information

### 1.1. Client Information

Applicant	:	Easymeeting as
Address	:	Sykehusvegen 20-23 9019 Tromso, Norway
Manufacturer	:	Easymeeting as
Address	:	Sykehusvegen 20-23 9019 Tromso, Norway
Factory	:	Easymeeting as
Address	:	Sykehusvegen 20-23 9019 Tromso, Norway

### 1.2. Description of Device (EUT)

Product Name	:	Nattugla
Test Model No.	:	NUA-3, NUA-1 (Note: All samples are the same except the model number, so we prepare "NUA-3" for test only.)
Trade Mark	:	N/A
Test Power Supply	:	AC 120V, 60Hz
Test Sample No.	:	1-2-1(Normal Sample), 1-2-2(Engineering Sample)
Adapter	:	N/A

#### RF Specification

Operation Mode	:	<input checked="" type="checkbox"/> a <input checked="" type="checkbox"/> n(HT20) <input checked="" type="checkbox"/> n(HT40) <input checked="" type="checkbox"/> ac(VHT20) <input checked="" type="checkbox"/> ac(VHT40) <input checked="" type="checkbox"/> ac(VHT80) <input type="checkbox"/> ac(VHT160) <input type="checkbox"/> ax(HEW20) <input type="checkbox"/> ax(HEW40) <input type="checkbox"/> ax(HEW80) <input type="checkbox"/> ax(HEW160)
Device Type	:	<input type="checkbox"/> Outdoor AP <input type="checkbox"/> Indoor AP <input type="checkbox"/> Point-to-point AP <input checked="" type="checkbox"/> Client
TPC Function	:	<input type="checkbox"/> With TPC <input checked="" type="checkbox"/> Without TPC
DFS Type	:	<input checked="" type="checkbox"/> Slave without radar detection <input type="checkbox"/> Slave with radar detection <input type="checkbox"/> Master
Operation Frequency	:	<input checked="" type="checkbox"/> Wi-Fi 5.2G: 5150~5250MHz <input checked="" type="checkbox"/> Wi-Fi 5.3G: 5250~5350MHz <input checked="" type="checkbox"/> Wi-Fi 5.6G: 5470~5725MHz <input checked="" type="checkbox"/> Wi-Fi 5.8G: 5725~5850MHz
Number of Channel	:	Wi-Fi 5.2G: <input checked="" type="checkbox"/> 4 Channels for 20MHz bandwidth (5180-5240MHz) <input checked="" type="checkbox"/> 2 Channels for 40MHz bandwidth (5190-5230MHz) <input checked="" type="checkbox"/> 1 Channels for 80MHz bandwidth (5210MHz)



	<p>Wi-Fi 5.3G:</p> <ul style="list-style-type: none"> <li><input checked="" type="checkbox"/> 4 Channels for 20MHz bandwidth (5260-5320MHz)</li> <li><input checked="" type="checkbox"/> 2 Channels for 40MHz bandwidth (5270-5310MHz)</li> <li><input checked="" type="checkbox"/> 1 Channels for 80MHz bandwidth (5290MHz)</li> </ul> <p>Wi-Fi 5.6G:</p> <ul style="list-style-type: none"> <li><input checked="" type="checkbox"/> 11 Channels for 20MHz bandwidth (5500-5700MHz)</li> <li><input checked="" type="checkbox"/> 5 Channels for 40MHz bandwidth (5510-5670MHz)</li> <li><input checked="" type="checkbox"/> 2 Channels for 80MHz bandwidth (5530~5610MHz)</li> </ul> <p>Wi-Fi 5.8G:</p> <ul style="list-style-type: none"> <li><input checked="" type="checkbox"/> 5 Channels for 20MHz bandwidth (5745MHz ~ 5825MHz)</li> <li><input checked="" type="checkbox"/> 2 Channels for 40MHz bandwidth (5755MHz ~ 5795MHz)</li> <li><input checked="" type="checkbox"/> 1 Channels for 80MHz bandwidth (5775MHz)</li> </ul>
Modulation Type	<ul style="list-style-type: none"> <li><input checked="" type="checkbox"/> 802.11a: OFDM (64QAM, 16QAM, QPSK, BPSK)</li> <li><input checked="" type="checkbox"/> 802.11n: OFDM (BPSK, QPSK, 16QAM, 64QAM)</li> <li><input checked="" type="checkbox"/> 802.11ac: OFDM (BPSK, QPSK, 16QAM, 64QAM, 256QAM)</li> <li><input type="checkbox"/> 802.11ax: OFDMA(BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM)</li> </ul>
Antenna Type	FPC antenna
Antenna Gain(Peak)	<p>Wi-Fi 5.2G: 5.61dBi</p> <p>Wi-Fi 5.3G: 4.85dBi</p> <p>Wi-Fi 5.6G: 4.96dBi</p> <p>Wi-Fi 5.8G: 5.03dBi</p>
<p><b>Remark:</b> 1) All of the RF specification are provided by customer. 2) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.</p>	



### 1.3. Auxiliary Equipment Used During Test

Description	Rating(s)
ROG Rapture Quad-band Gaming Router	Manufacturer: ASUSTeK Computer Inc Model: GT-AXE16000 (FCC ID: MSQ-RTAX5D00 IC: 3568A-RTAX5D00) SN: RAIG5D2020695NL
POE Power Supply /PoE	Model: RP030W01-5000600YG Input: 100-240V~50/60Hz 0.8A Max Output: 50.0V= 0.6A 30.0W

### 1.4. Description of Test Modes

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Frequency Band	Mode	Test channel	Frequency (MHz)
5.2GHz	OFDM 802.11a/n(HT20) /ac(HT20)	CH 36	5180MHz
		CH 40	5200MHz
		CH 48	5240MHz
	OFDM 802.11n(HT40)/ac(HT40)	CH 38	5190MHz
		CH 46	5230MHz
		CH 42	5210MHz
5.3GHz	OFDM 802.11a/n(HT20) /ac(HT20)	CH 52	5260MHz
		CH 60	5300MHz
		CH 64	5320MHz
	OFDM 802.11n(HT40)/ac(HT40)	CH 54	5270MHz
		CH 62	5310MHz
		CH 58	5290MHz
5.6GHz	OFDM 802.11a/n(HT20) /ac(HT20)	CH 100	5500MHz
		CH 116	5580MHz
		CH 140	5700MHz
	OFDM 802.11n(HT40)/ac(HT40)	CH 102	5510MHz
		CH 110	5550MHz
		CH 134	5670MHz
5.8GHz	OFDM 802.11ac(HT80)	CH 106	5530MHz
	OFDM	CH 149	5745MHz







	802.11a/n(HT20) /ac(HT20)	CH 157	5785MHz
		CH 165	5825MHz
	OFDM 802.11n(HT40)/ac(HT40)	CH 151	5755MHz
		CH 159	5795MHz
	OFDM 802.11ac(HT80)	CH 155	5775MHz

**Note:**

1. The measurements are performed at the highest, middle, lowest available channels.
2. The EUT has been tested as an independent unit. And Continual Transmitting in maximum power.
3. For the relevant Conducted Measurement, the temporary antenna connector is used during the measurement. Antenna Connector Impedance: 50Ω, Cable Loss: 1.0 dB
4. The EUT was programmed to be in continuously transmitting mode.



## 1.5. Description Of Test Setup

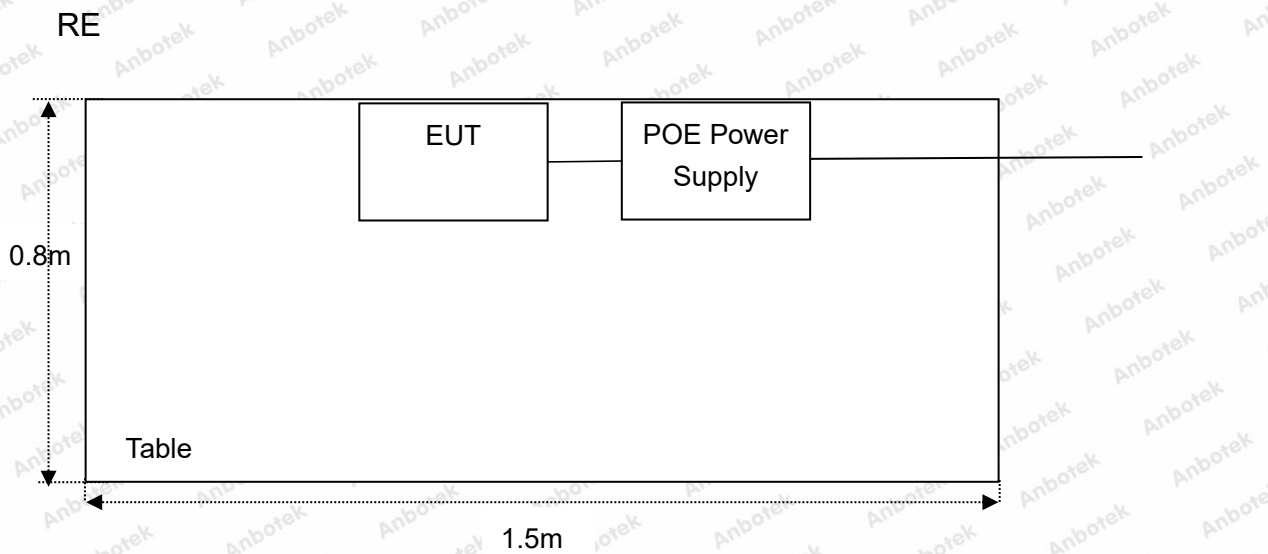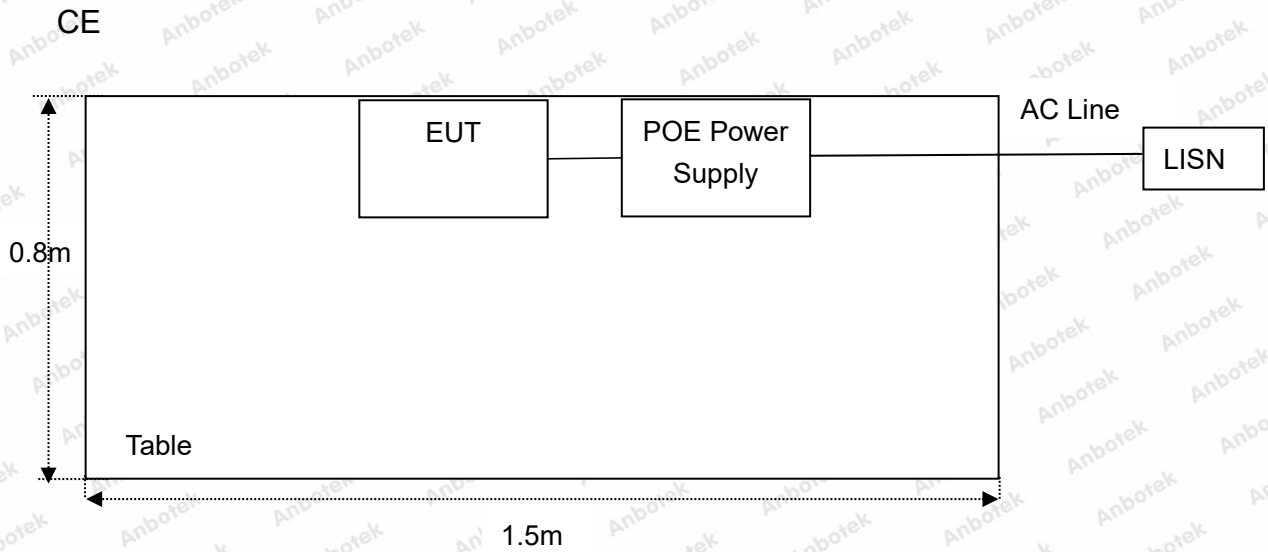

## 1.6. Test Equipment List

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	L.I.S.N. Artificial Mains Network	Rohde & Schwarz	ENV216	100055	Jan. 18, 2024	1 Year
2.	Three Phase V-type Artificial Power Network	CYBERTEK	EM5040DT	E215040DT001	Jan. 18, 2024	1 Year
3.	EMI Test Receiver	Rohde & Schwarz	ESCI	100627	Oct. 12, 2023	1 Year
4.	EMI Test Receiver	Rohde & Schwarz	ESR26	101481	Jan. 23, 2024	1 Year
5.	MXA Spectrum Analysis	Agilent	N9020A	MY51170037	Oct. 12, 2023	1 Year
6.	EMI Preamplifier	SKET Electronic	LNPA-0118G -45	SKET-PA-002	Jan. 17, 2024	1 Year
7.	Double Ridged Horn Antenna	SCHWARZBECK	BBHA 9120D	02555	Oct. 16, 2022	3 Year
8.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	345	Oct. 23, 2022	3 Year
9.	Loop Antenna	Schwarzbeck	FMZB1519B	00053	Oct. 12, 2023	1 Year
10.	Horn Antenna	A-INFO	LB-180400- KF	J211060628	Oct. 12, 2023	1 Year
11.	Pre-amplifier	SONOMA	310N	186860	Jan. 17, 2024	1 Year
12.	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A
13.	MXA Spectrum Analysis	KEYSIGHT	N9020A	MY53280032	Oct. 12, 2023	1 Year
14.	MXG RF Vector Signal Generator	Agilent	N5182A	MY48180656	Oct. 12, 2023	1 Year
15.	Signal Generator	Agilent	E4421B	MY41000743	Oct. 12, 2023	1 Year
16.	DC Power Supply	IVYTECH	IV3605	1804D360510	Oct. 20, 2023	1 Year
17.	Constant Temperature Humidity Chamber	ZHONGJIAN	ZJ-KHWS80 B	N/A	Oct. 16, 2023	1 Year
18.	Spectrum Analyzer	Rohde & Schwarz	FSV40-N	102150	May. 06, 2024	1 Year
19.	Wideband Radio Communication Tester	Rohde & Schwarz	CMW500	104209	Oct. 12, 2023	1 Year



### 1.7. Measurement Uncertainty

Parameter	Uncertainty
Conducted emissions (AMN 150kHz~30MHz)	3.8dB
Occupied Bandwidth	925Hz
Conducted Output Power	0.76dB
Conducted Spurious Emission	1.24dB
Radiated spurious emissions (Below 30MHz)	3.53dB
Radiated spurious emissions (30MHz~1GHz)	Horizontal: 3.92dB; Vertical: 4.52dB
Radiated spurious emissions (above 1GHz)	1G-6GHz: 4.78dB; 6G-18GHz: 4.88dB 18G-40GHz: 5.68dB
The measurement uncertainty and decision risk evaluated according to AB/WI-RF-F-032. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	

### 1.8. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

#### FCC-Registration No.: 434132

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No. 434132.

#### ISED-Registration No.: 8058A

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (ISED) Innovation, Science and Economic Development Canada. The acceptance letter from the ISED is maintained in our files. Registration 8058A.

#### Test Location

Shenzhen Anbotek Compliance Laboratory Limited.

1/F, Building D, Sogood Science and Technology Park, Sanwei community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.



### 1.9. Disclaimer

1. The test report is invalid if not marked with the signatures of the persons responsible for preparing and approving the test report.
2. The test report is invalid if there is any evidence and/or falsification.
3. The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein.
4. This document may not be altered or revised in any way unless done so by Anbotek and all revisions are duly noted in the revisions section.
5. Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.
6. The authenticity of the information provided by the customer is the responsibility of the customer and the laboratory is not responsible for its authenticity.

The laboratory is only responsible for the data released by the laboratory, except for the part provided by the applicant.



## 2. Summary of Test Results

Standard	Test Type	Result
15.207 & 15.407(b)	Conducted Emission	PASS
15.205 & 15.209 & 15.407(b)	Radiated Spurious Emission and Restricted Band	PASS
15.407(b)	Conducted Band Edge	PASS
15.407(a) & 2.1049	26dB Bandwidth & 99% Occupied Bandwidth	PASS
15.407(e)	Minimum 6dB Bandwidth (5.725-5.85GHz Band)	PASS
15.407(a)	Maximum Conducted Output Power	PASS
15.407(a)	Maximum Power Spectral Density	PASS
15.407(g)	Frequency Stability	PASS
15.407(h)	Dynamic Frequency Selection (DFS)	PASS (Please Refer to DFS Report)
15.203	Antenna Requirement	PASS
<b>Remark:</b> "N/A" is an abbreviation for Not Applicable.		




## 3. Conducted Emission Test

### 3.1. Test Standard and Limit

Test Standard	FCC Part15 Section 15.207 & 15.407(b)		
	Frequency	Maximum RF Line Voltage (dBuV)	
		Quasi-peak Level	Average Level
Test Limit	150kHz~500kHz	66 ~ 56 *	56 ~ 46 *
	500kHz~5MHz	56	46
	5MHz~30MHz	60	50

**Remark:** (1) \*Decreasing linearly with logarithm of the frequency.  
 (2) The lower limit shall apply at the transition frequency.

### 3.2. Test Setup

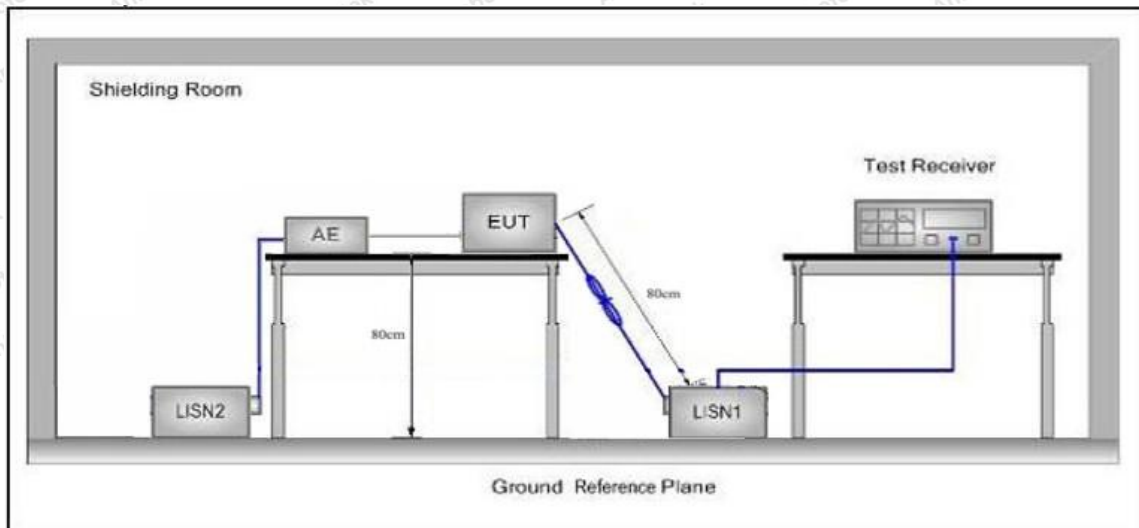

### 3.3. Test Procedure

The EUT system is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC ANSI C63.10: 2020 on Conducted Emission Measurement.

The bandwidth of test receiver (ESCI) set at 9kHz.

The frequency range from 150kHz to 30MHz is checked.

### 3.4. Test Data


During the test, pre-scan all modes, and found the 802.11ac(VHT80) 5610MHz which is the worst case, only the worst case is recorded in the report.

AC conducted emission pre-test at both at AC 120V/60Hz and AC 240V/60Hz modes, recorded worst case AC 120V/60Hz.



### Conducted Emission Test Data

Test Site: 1# Shielded Room  
 Operating Condition: 802.11ac(VHT80) 5610MHz  
 Test Specification: AC 120V, 60Hz  
 Comment: Live Line  
 Temp.(°C)/Hum.(%RH): 22.1°C/52%RH

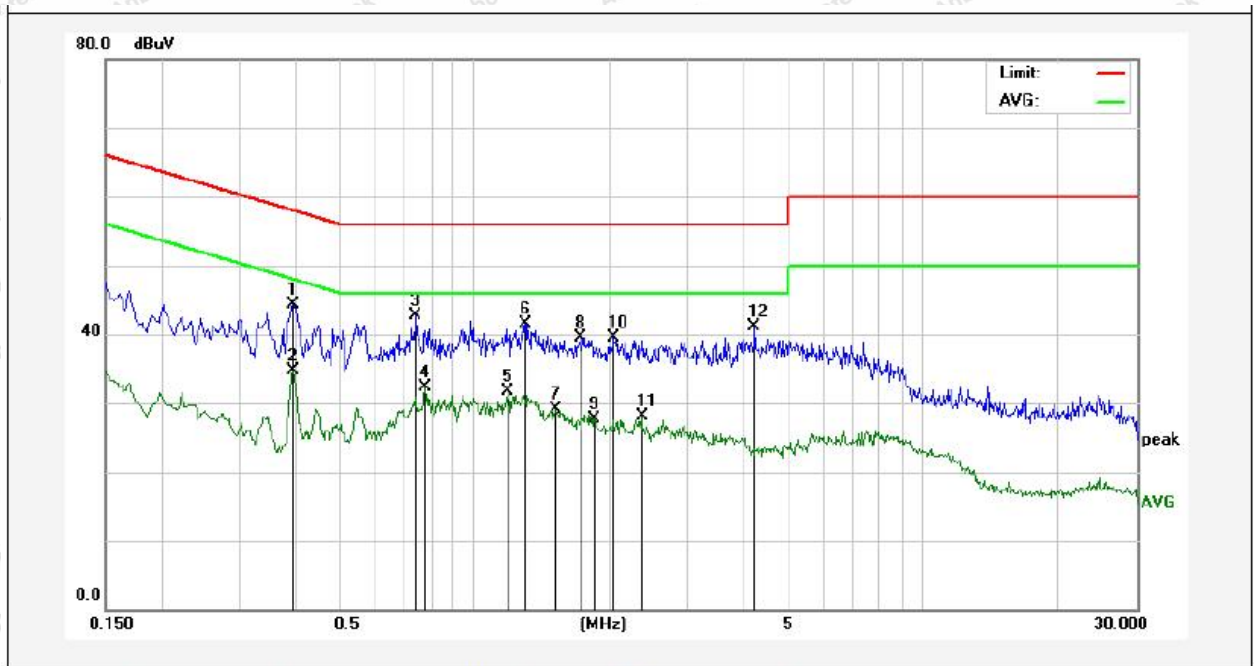


No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.3940	26.49	17.81	44.30	57.98	-13.68	QP	
2	0.3940	16.83	17.81	34.64	47.98	-13.34	AVG	
3	0.7419	24.82	17.87	42.69	56.00	-13.31	QP	
4	0.7780	14.48	17.87	32.35	46.00	-13.65	AVG	
5	1.1859	13.81	17.85	31.66	46.00	-14.34	AVG	
6	1.3020	23.72	17.86	41.58	56.00	-14.42	QP	
7	1.5180	11.32	17.85	29.17	46.00	-16.83	AVG	
8	1.7179	21.64	17.85	39.49	56.00	-16.51	QP	
9	1.8540	9.95	17.85	27.80	46.00	-18.20	AVG	
10	2.0459	21.56	17.85	39.41	56.00	-16.59	QP	
11	2.3620	10.19	17.85	28.04	46.00	-17.96	AVG	
12	4.2179	23.29	17.85	41.14	56.00	-14.86	QP	





### Conducted Emission Test Data

Test Site: 1# Shielded Room  
 Operating Condition: 802.11ac(VHT80) 5610MHz  
 Test Specification: AC 120V, 60Hz  
 Comment: Neutral Line  
 Temp.(°C)/Hum.(%RH): 22.1°C/52%RH

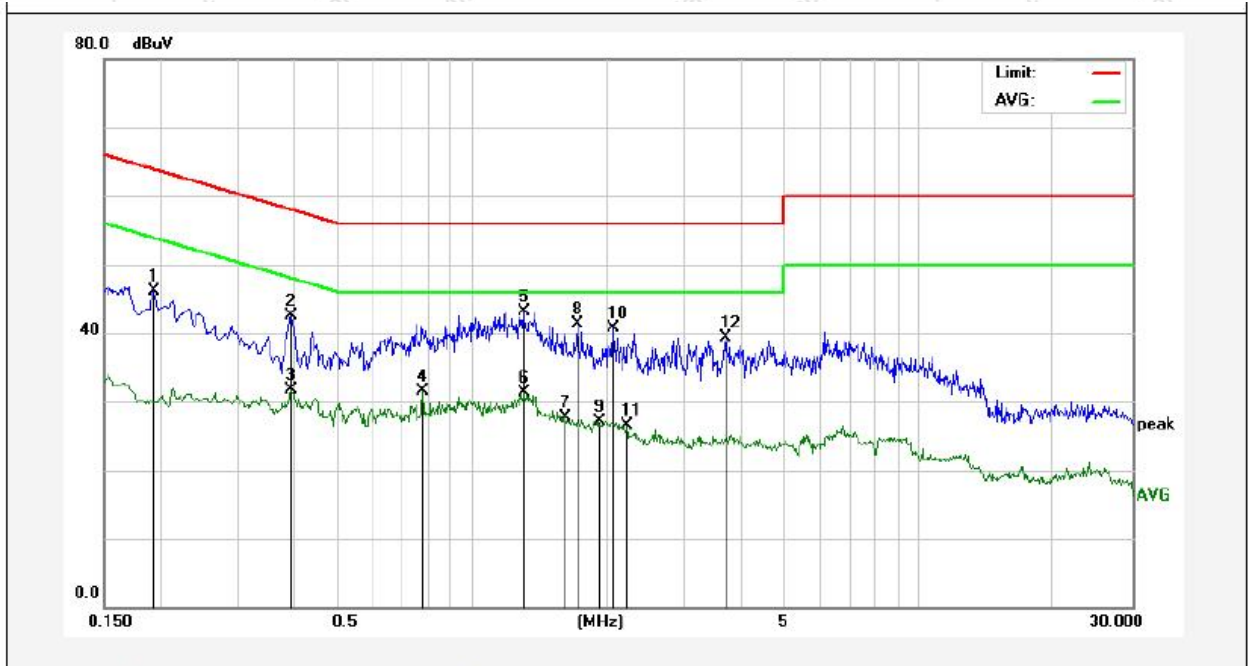

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.1945	28.36	17.82	46.18	63.84	-17.66	QP	
2	0.3940	24.72	17.81	42.53	57.98	-15.45	QP	
3	0.3940	13.80	17.81	31.61	47.98	-16.37	AVG	
4	0.7780	13.58	17.87	31.45	46.00	-14.55	AVG	
5	1.3060	25.32	17.86	43.18	56.00	-12.82	QP	
6	1.3099	13.37	17.86	31.23	46.00	-14.77	AVG	
7	1.6220	9.93	17.85	27.78	46.00	-18.22	AVG	
8	1.7219	23.38	17.85	41.23	56.00	-14.77	QP	
9	1.9259	9.24	17.85	27.09	46.00	-18.91	AVG	
10	2.0739	22.90	17.85	40.75	56.00	-15.25	QP	
11	2.2259	8.70	17.85	26.55	46.00	-19.45	AVG	
12	3.7019	21.50	17.86	39.36	56.00	-16.64	QP	



## 4. Radiation Spurious Emission and Restricted Band Test

### 4.1. Test Standard and Limit

Radiated Spurious Emission					
Test Standard	FCC Part15 C Section 15.205 & 15.209 & 15.407(b)				
Test Limit	Frequency (MHz)	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz~0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz~88MHz	100	40.0	Quasi-peak	3
	88MHz~216MHz	150	43.5	Quasi-peak	3
	216MHz~960MHz	200	46.0	Quasi-peak	3
	960MHz~1000MHz	500	54.0	Quasi-peak	3
	Above 1000MHz	500	54.0	Average	3
		-	68.2	Peak	3
Band Edge					
Test Standard	15.407(b)				
Test Limit	Operating Band	Frequency	EIRP Limit		Remark
	5150-5250MHz	Out of operation band	-27dBm/MHz(68.2dBuV/m)@3m		Peak
	5250-5350MHz	Out of operation band	-27dBm/MHz(68.2dBuV/m)@3m		Peak
	5470-5725MHz	Out of operation band	-27dBm/MHz(68.2dBuV/m)@3m		Peak
	5725-5850 MHz	Below 5.65GHz	-27dBm/MHz(68.2dBuV/m)@3m		Peak
		5.65GHz-5.7GHz	-27*dBm/MHz to 10dBm/MHz (68.2* dBuV/m to 105.6dBuV/m)		Peak
		5.7GHz-5.72GHz	10*dBm/MHz to 15.6dBm/MHz (105.6*dBuV/m to 110.8dBuV/m)		Peak
		5.72GHz-5.725GHz	15.6*dBm/MHz to 27dBm/MHz (110.8dBuV/m to* 122.2dBuV/m)		Peak
		5.85GHz-5.855GHz	27dBm/MHz to 15.6*dBm/MHz (122.2dBuV/m to110.8* dBuV/m)		Peak



	5.855GHz-5.875GHz	15.6dBm/MHz to 10*dBm/MHz (110.8dBuV/m to 105.6* dBuV/m)	Peak
	5.875GHz-5.925GHz	10dBm/MHz to -27*dBm/MHz (105.6dBuV/m to 68.2* dBuV/m)	Peak
	Above 5.925GHz	-27 dBm/MHz(68.2dBuV/m)@3m	Peak

**Remark:**

(1)The lower limit shall apply at the transition frequency.

(2) 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

(3)Above 1GHz limit: $E[dBuV/m] = EIRP[dBm] + 95.2 = 68.2 dBuV/m$ , for  $EIRP[dBm] = -27dBm$ .

## 4.2. Test Setup

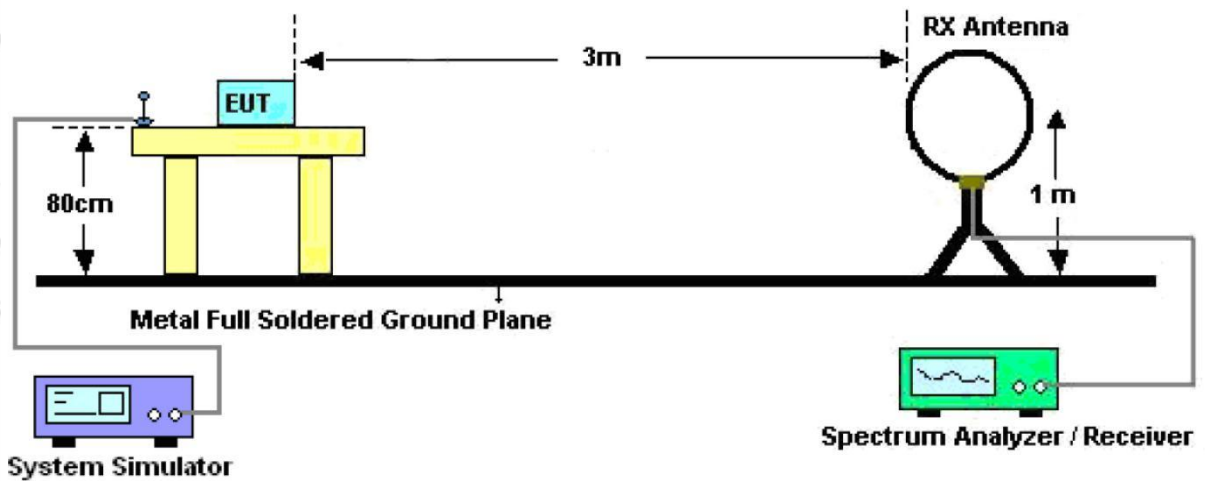


Figure 1. Below 30MHz



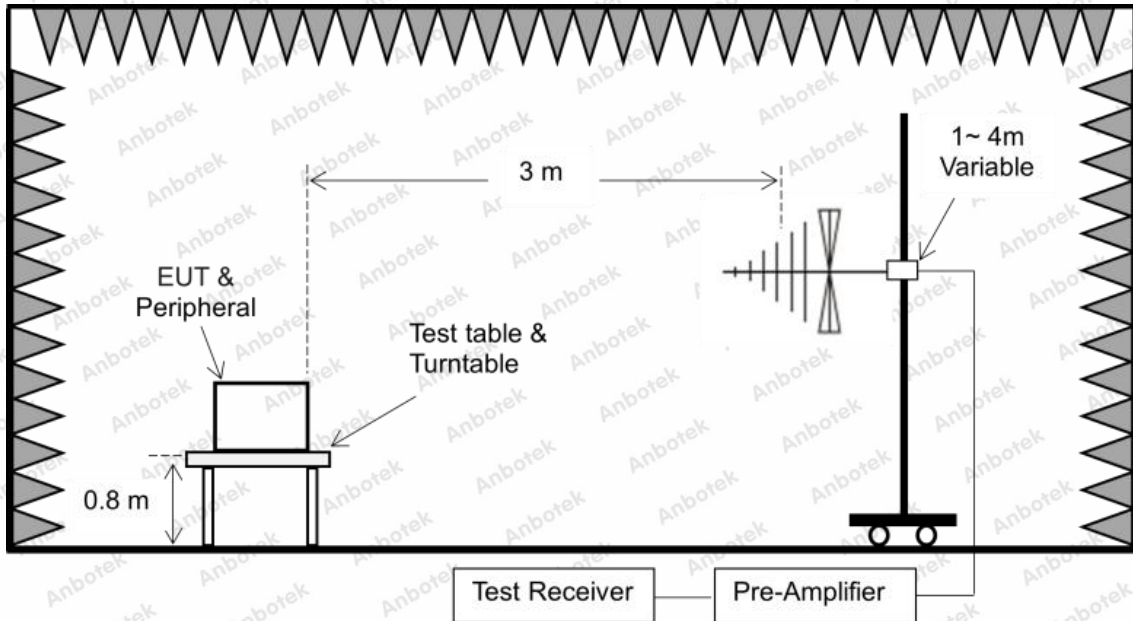


Figure 2. 30MHz to 1GHz

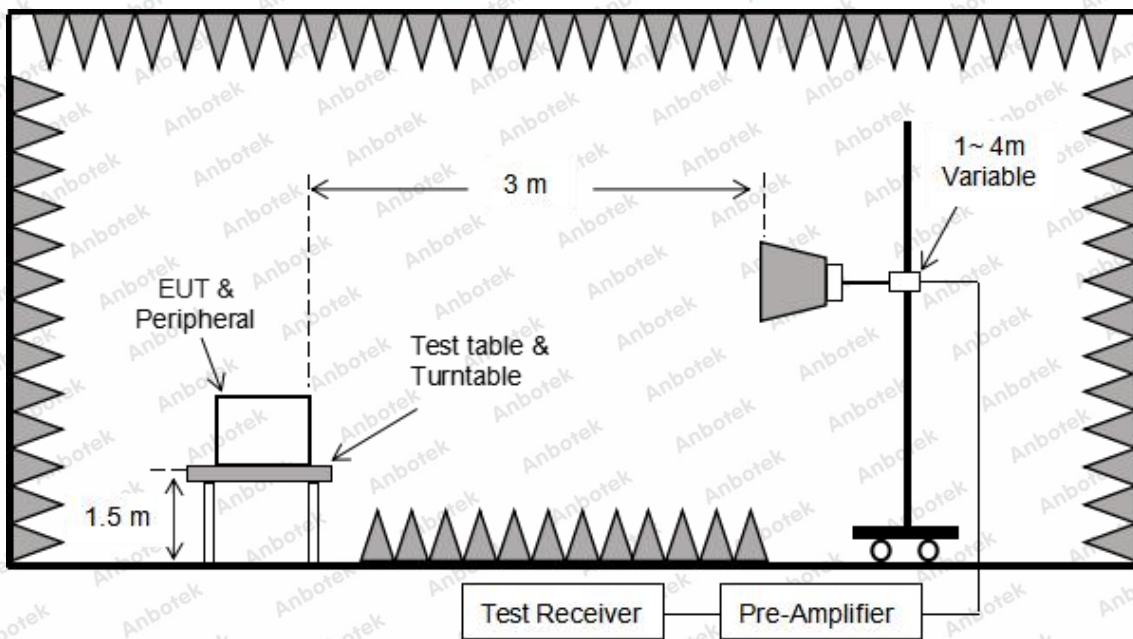


Figure 3. Above 1 GHz

### 4.3. Test Procedure

For below 1GHz: The EUT is placed on a turntable, which is 0.8m above the ground plane.

For above 1GHz: The EUT is placed on a turntable, which is 1.5m above the ground plane.

The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level. Rotated the EUT through three orthogonal axes to determine the maximum emissions, both horizontal and vertical polarization of the antenna are set on test. The EUT is tested in 9\*6\*6 Chamber. The device is evaluated in xyz orientation.



For the radiated emission test above 1GHz:

Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.

For 9kHz to 150kHz, Set the spectrum analyzer as:

RBW = 200Hz, VBW =1kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 150kHz to 30MHz, Set the spectrum analyzer as:

RBW = 9KHz, VBW =30kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 30MHz to 1000MHz, Set the spectrum analyzer as:

RBW = 100kHz, VBW =300kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For above 1GHz, Set the spectrum analyzer as:

RBW =1MHz, VBW =1MHz, Detector= Peak, Trace mode= Max hold, Sweep- auto couple.

RBW =1MHz, VBW =10Hz, Detector= Average, Trace mode= Max hold, Sweep- auto couple.

#### 4.4. Test Data

Pass

During the test, Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the X-axis is the worst case.


The test results of 9kHz-30MHz was attenuated more than 20dB below the permissible limits, so the results don't record in the report.

During the test, pre-scan all the modes, and found the 802.11ac(VHT80) 5610MHz which is the worst case, only the worst case is recorded in the report.



### Test Results (30~1000MHz)

Test Mode: 802.11ac(VHT80) 5610MHz  
 Power Source: AC 120V, 60Hz  
 Polarization: Vertical  
 Temp.(°C)/Hum.(%RH): 24.8°C/41%RH

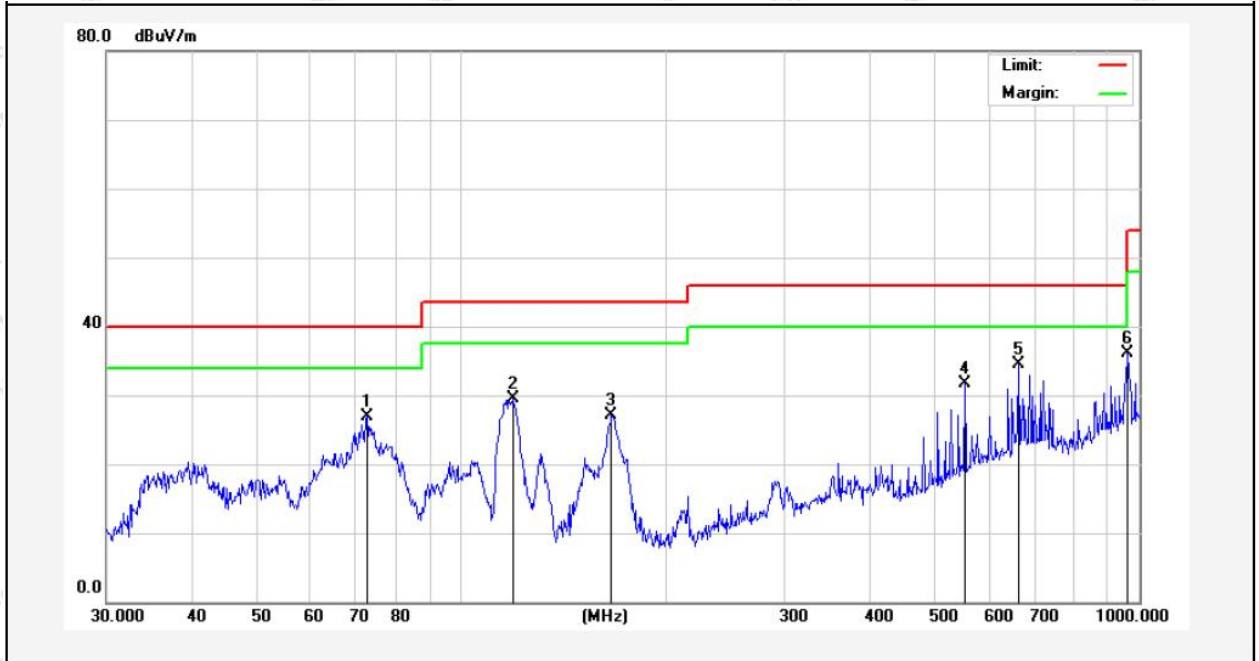


No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector			
1	72.8465	46.92	-19.92	27.00	40.00	-13.00	QP			
2	119.4360	49.25	-19.83	29.42	43.50	-14.08	QP			
3	166.6513	48.42	-21.30	27.12	43.50	-16.38	QP			
4	552.8832	43.30	-11.69	31.61	46.00	-14.39	QP			
5	663.4728	44.91	-10.46	34.45	46.00	-11.55	QP			
6	962.1622	41.47	-5.44	36.03	54.00	-17.97	QP			



### Test Results (30~1000MHz)

Test Mode: 802.11ac(VHT80) 5610MHz  
 Power Source: AC 120V, 60Hz  
 Polarization: Horizontal  
 Temp.(°C)/Hum.(%RH): 24.8°C/41%RH

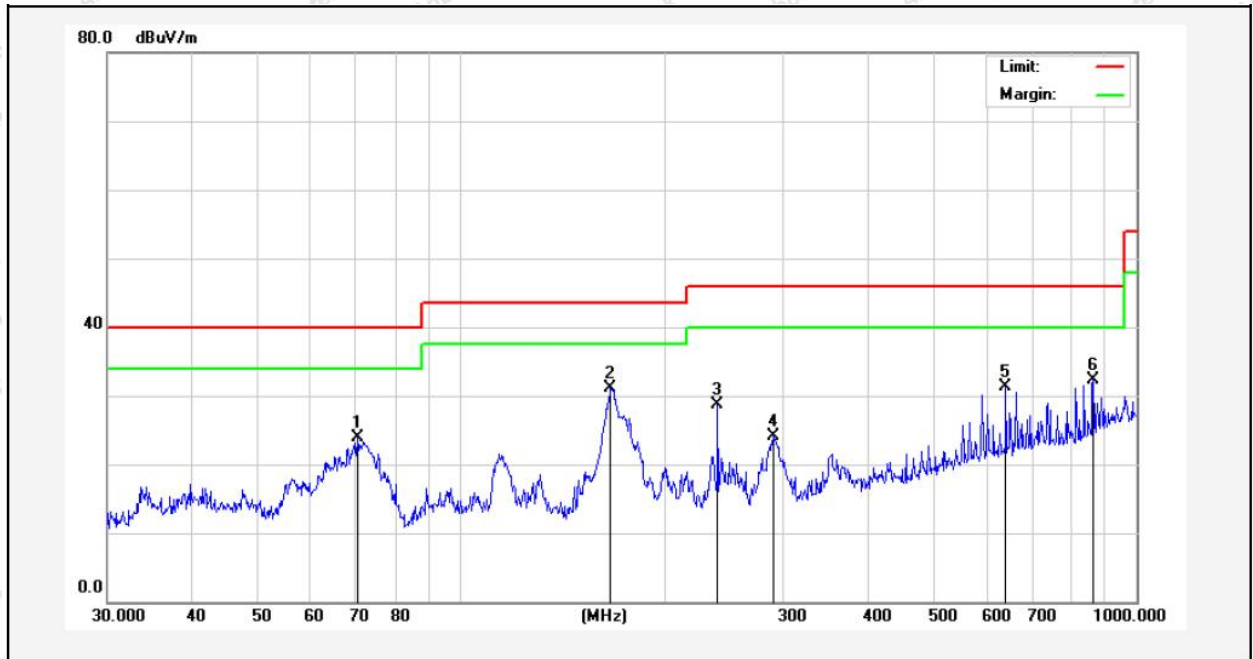

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector
1	70.3365	46.15	-22.24	23.91	40.00	-16.09	QP
2	166.6514	54.86	-23.74	31.12	43.50	-12.38	QP
3	239.9874	50.46	-21.66	28.80	46.00	-17.20	QP
4	290.0172	42.15	-18.02	24.13	46.00	-21.87	QP
5	640.6110	42.00	-10.64	31.36	46.00	-14.64	QP
6	863.0562	39.42	-7.16	32.26	46.00	-13.74	QP



**Test Results (Above 1000MHz)**

Band: 5150-5250 MHz / BW: 80							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
10420.00	29.89	23.81	53.70	68.20	-14.50	V	Peak
15630.00	30.50	29.36	59.86	68.20	-8.34	V	Peak
10420.00	30.72	23.81	54.53	68.20	-13.67	H	Peak
15630.00	31.97	29.36	61.33	68.20	-6.87	H	Peak
10420.00	20.37	23.81	44.18	54.00	-9.82	V	AVG
15630.00	21.24	29.36	50.60	54.00	-3.40	V	AVG
10420.00	20.51	23.81	44.32	54.00	-9.68	H	AVG
15630.00	21.46	29.36	50.82	54.00	-3.18	H	AVG

Remark:

1. Result = Reading + Factor
2. Only the worst case (802.11ax(HEW80)) is recorded in the report.

Band: 5250-5350 MHz / BW: 80							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
10580.00	27.49	23.86	51.35	68.20	-16.85	V	Peak
15870.00	27.87	31.16	59.03	68.20	-9.17	V	Peak
10580.00	27.68	23.86	51.54	68.20	-16.66	H	Peak
15870.00	27.95	31.16	59.11	68.20	-9.09	H	Peak
10580.00	17.64	23.86	41.50	54.00	-12.50	V	AVG
15870.00	18.46	31.16	49.62	54.00	-4.38	V	AVG
10580.00	18.04	23.86	41.90	54.00	-12.10	H	AVG
15870.00	18.37	31.16	49.53	54.00	-4.47	H	AVG

Remark:

1. Result = Reading + Factor
2. Only the worst case (802.11ax(HEW80)) is recorded in the report.





Band: 5470-5725 MHz / BW: 80 / CH: L							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
11060.000	25.94	24.06	50.00	68.20	-18.20	V	Peak
16590.000	26.76	32.78	59.54	68.20	-8.66	V	Peak
11060.000	26.73	24.06	50.79	68.20	-17.41	H	Peak
16590.000	26.79	32.78	59.57	68.20	-8.63	H	Peak
11060.000	16.20	24.06	40.26	54.00	-13.74	V	AVG
16590.000	17.49	32.78	50.27	54.00	-3.73	V	AVG
11060.000	16.58	24.06	40.64	54.00	-13.36	H	AVG
16590.000	17.26	32.78	50.04	54.00	-3.96	H	AVG
Band: 5470-5725 MHz / BW: 80 / CH: H							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
11060.000	25.97	24.06	50.03	68.20	-18.17	V	Peak
16590.000	26.80	32.78	59.58	68.20	-8.62	V	Peak
11060.000	26.78	24.06	50.84	68.20	-17.36	H	Peak
16590.000	26.84	32.78	59.62	68.20	-8.58	H	Peak
11060.000	16.24	24.06	40.30	54.00	-13.70	V	AVG
16590.000	17.53	32.78	50.31	54.00	-3.69	V	AVG
11060.000	16.61	24.06	40.67	54.00	-13.33	H	AVG
16590.000	17.29	32.78	50.07	54.00	-3.93	H	AVG

Remark:

1. Result = Reading + Factor
2. Only the worst case (802.11ax(HEW80) ) is recorded in the report.



Band: 5725-5850 MHz / BW: 40 / CH: L							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
11510.000	28.53	23.36	51.89	68.20	-16.31	V	Peak
17265.000	29.03	32.02	61.05	68.20	-7.15	V	Peak
11510.000	29.30	23.36	52.66	68.20	-15.54	H	Peak
17265.000	29.31	32.02	61.33	68.20	-6.87	H	Peak
11510.000	18.22	23.36	41.58	54.00	-12.42	V	AVG
17265.000	18.58	32.02	50.60	54.00	-3.40	V	AVG
11510.000	18.52	23.36	41.88	54.00	-12.12	H	AVG
17265.000	18.97	32.02	50.99	54.00	-3.01	H	AVG
Band: 5725-5850 MHz / BW: 40 / CH: H							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
11590.00	27.81	23.43	51.24	68.20	-16.96	V	Peak
17385.00	29.00	32.23	61.23	68.20	-6.97	V	Peak
11590.00	28.41	23.43	51.84	68.20	-16.36	H	Peak
17385.00	28.61	32.23	60.84	68.20	-7.36	H	Peak
11590.00	17.41	23.43	40.84	54.00	-13.16	V	AVG
17385.00	17.61	32.23	49.84	54.00	-4.16	V	AVG
11590.00	18.43	23.43	41.86	54.00	-12.14	H	AVG
17385.00	18.56	32.23	50.79	54.00	-3.21	H	AVG

Remark:

1. Result = Reading + Factor
2. Only the worst case (802.11ax(HEW40)) is recorded in the report.



**Radiated Band Edge: 5.2G&5.3G**

Test Mode: IEEE 802.11a							
Test channel: Lowest							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
5150.00	37.25	15.99	53.24	68.20	-14.96	H	Peak
5150.00	39.37	15.99	55.36	68.20	-12.84	V	Peak
5150.00	27.11	15.99	43.10	54.00	-10.90	H	AVG
5150.00	29.24	15.99	45.23	54.00	-8.77	V	AVG
Test channel: Highest							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
5350.00	37.62	16.43	54.05	68.20	-14.15	H	Peak
5350.00	40.74	16.43	57.17	68.20	-11.03	V	Peak
5350.00	29.05	16.43	45.48	54.00	-8.52	H	AVG
5350.00	29.84	16.43	46.27	54.00	-7.73	V	AVG

Remark: 1. Result =Reading + Factor

Test Mode: IEEE 802.11n(HT20)							
Test channel: Lowest							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
5150.00	36.10	15.99	52.09	68.20	-16.11	H	Peak
5150.00	37.57	15.99	53.56	68.20	-14.65	V	Peak
5150.00	26.82	15.99	42.81	54.00	-11.19	H	AVG
5150.00	27.78	15.99	43.77	54.00	-10.23	V	AVG
Test channel: Highest							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
5350.00	37.97	16.43	54.40	68.20	-13.80	H	Peak
5350.00	38.96	16.43	55.39	68.20	-12.81	V	Peak
5350.00	28.03	16.43	44.46	54.00	-9.55	H	AVG
5350.00	29.55	16.43	45.98	54.00	-8.02	V	AVG

Remark: 1. Result =Reading + Factor



Test Mode: IEEE 802.11n(HT40)							
Test channel: Lowest							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
5150.00	36.77	15.99	52.76	68.20	-15.44	H	Peak
5150.00	38.59	15.99	54.58	68.20	-13.62	V	Peak
5150.00	27.36	15.99	43.35	54.00	-10.65	H	AVG
5150.00	28.87	15.99	44.86	54.00	-9.14	V	AVG
Test channel: Highest							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
5350.00	38.27	16.43	54.70	68.20	-13.50	H	Peak
5350.00	37.07	16.43	53.50	68.20	-14.70	V	Peak
5350.00	28.61	16.43	45.04	54.00	-8.96	H	AVG
5350.00	29.86	16.43	46.29	54.00	-7.71	V	AVG

Remark: 1. Result =Reading + Factor

Test Mode: IEEE 802.11ac(HT20)							
Test channel: Lowest							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
5150.00	37.25	15.99	53.24	68.20	-14.96	H	Peak
5150.00	39.05	15.99	55.04	68.20	-13.16	V	Peak
5150.00	26.73	15.99	42.72	54.00	-11.28	H	AVG
5150.00	29.02	15.99	45.01	54.00	-8.99	V	AVG
Test channel: Highest							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
5350.00	38.05	16.43	54.48	68.20	-13.72	H	Peak
5350.00	38.27	16.43	54.70	68.20	-13.50	V	Peak
5350.00	28.01	16.43	44.44	54.00	-9.56	H	AVG
5350.00	28.67	16.43	45.10	54.00	-8.90	V	AVG

Remark: 1. Result =Reading + Factor



Test Mode: IEEE 802.11ac(HT40)							
Test channel: Lowest							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
5150.00	36.18	15.99	52.17	68.20	-16.03	H	Peak
5150.00	36.52	15.99	52.51	68.20	-15.69	V	Peak
5150.00	26.48	15.99	42.47	54.00	-11.53	H	AVG
5150.00	27.10	15.99	43.09	54.00	-10.91	V	AVG
Test channel: Highest							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
5350.00	38.28	16.43	54.71	68.20	-13.50	H	Peak
5350.00	37.35	16.43	53.78	68.20	-14.42	V	Peak
5350.00	27.66	16.43	44.09	54.00	-9.91	H	AVG
5350.00	27.86	16.43	44.29	54.00	-9.71	V	AVG

Remark: 1. Result =Reading + Factor

Test Mode: IEEE 802.11ac(HT80)							
Test channel: Lowest							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
5150.00	36.19	15.99	52.18	68.20	-16.02	H	Peak
5150.00	36.79	15.99	52.78	68.20	-15.42	V	Peak
5150.00	26.96	15.99	42.95	54.00	-11.05	H	AVG
5150.00	27.10	15.99	43.09	54.00	-10.91	V	AVG
Test channel: Highest							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
5350.00	38.65	16.43	55.08	68.20	-13.12	H	Peak
5350.00	37.73	16.43	54.16	68.20	-14.04	V	Peak
5350.00	29.22	16.43	45.65	54.00	-8.35	H	AVG
5350.00	28.37	16.43	44.80	54.00	-9.20	V	AVG

Remark: 1. Result =Reading + Factor



**Radiated Band Edge: 5.6G&5.8G**

Test Mode: IEEE 802.11a							
Test channel: Lowest							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
5460.00	38.24	16.37	54.61	68.20	-13.59	H	Peak
5460.00	39.64	16.37	56.01	68.20	-12.19	V	Peak
5470.00	39.17	16.70	55.87	68.20	-12.33	H	Peak
5470.00	39.93	16.70	56.63	68.20	-11.57	V	Peak
5460.00	28.81	16.37	45.18	54.00	-8.82	H	AVG
5460.00	28.69	16.37	45.06	54.00	-8.94	V	AVG
5470.00	29.08	16.70	45.78	54.00	-8.22	H	AVG
5470.00	30.20	16.70	46.90	54.00	-7.10	V	AVG
Test channel: Highest							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
5850.00	39.19	17.21	56.40	68.20	-11.80	H	Peak
5850.00	39.57	17.21	56.78	68.20	-11.42	V	Peak
5850.00	29.17	17.21	46.38	54.00	-7.62	H	AVG
5850.00	29.17	17.21	46.38	54.00	-7.62	V	AVG

Remark: Result =Reading + Factor

Test Mode: IEEE 802.11n(HT20)							
Test channel: Lowest							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
5460.00	38.22	16.37	54.59	68.20	-13.61	H	Peak
5460.00	38.81	16.37	55.18	68.20	-13.02	V	Peak
5470.00	38.33	16.70	55.03	68.20	-13.17	H	Peak
5470.00	38.76	16.70	55.46	68.20	-12.74	V	Peak
5460.00	27.19	16.37	43.56	54.00	-10.44	H	AVG
5460.00	27.64	16.37	44.01	54.00	-9.99	V	AVG
5470.00	27.63	16.70	44.33	54.00	-9.67	H	AVG
5470.00	28.18	16.70	44.88	54.00	-9.12	V	AVG
Test channel: Highest							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
5850.00	37.43	17.21	54.64	68.20	-13.56	H	Peak
5850.00	38.03	17.21	55.24	68.20	-12.96	V	Peak
5850.00	27.72	17.21	44.93	54.00	-9.07	H	AVG
5850.00	28.53	17.21	45.74	54.00	-8.26	V	AVG

Remark: 1. Result =Reading + Factor



Test Mode: IEEE 802.11n(HT40)							
Test channel: Lowest							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
5460.00	37.80	16.37	54.17	68.20	-14.03	H	Peak
5460.00	38.69	16.37	55.06	68.20	-13.14	V	Peak
5470.00	38.63	16.70	55.33	68.20	-12.87	H	Peak
5470.00	39.30	16.70	56.00	68.20	-12.20	V	Peak
5460.00	26.90	16.37	43.27	54.00	-10.73	H	AVG
5460.00	28.75	16.37	45.12	54.00	-8.88	V	AVG
5470.00	27.10	16.70	43.80	54.00	-10.20	H	AVG
5470.00	28.43	16.70	45.13	54.00	-8.87	V	AVG
Test channel: Highest							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
5850.00	38.16	17.21	55.37	68.20	-12.83	H	Peak
5850.00	38.52	17.21	55.73	68.20	-12.47	V	Peak
5850.00	28.33	17.21	45.54	54.00	-8.46	H	AVG
5850.00	29.41	17.21	46.62	54.00	-7.38	V	AVG

Remark: 1. Result =Reading + Factor

Test Mode: IEEE 802.11ac(HT20)							
Test channel: Lowest							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
5460.00	37.43	16.37	53.80	68.20	-14.40	H	Peak
5460.00	37.55	16.37	53.92	68.20	-14.28	V	Peak
5470.00	38.01	16.70	54.71	68.20	-13.49	H	Peak
5470.00	38.35	16.70	55.05	68.20	-13.15	V	Peak
5460.00	28.05	16.37	44.42	54.00	-9.58	H	AVG
5460.00	28.71	16.37	45.08	54.00	-8.92	V	AVG
5470.00	28.33	16.70	45.03	54.00	-8.97	H	AVG
5470.00	29.17	16.70	45.87	54.00	-8.13	V	AVG
Test channel: Highest							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
5850.00	38.17	17.21	55.38	68.20	-12.82	H	Peak
5850.00	39.04	17.21	56.25	68.20	-11.95	V	Peak
5850.00	28.03	17.21	45.24	54.00	-8.76	H	AVG
5850.00	29.13	17.21	46.34	54.00	-7.66	V	AVG

Remark: 1. Result =Reading + Factor



Test Mode: IEEE 802.11ac(HT40)							
Test channel: Lowest							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
5460.00	36.37	16.37	52.74	68.20	-15.46	H	Peak
5460.00	37.87	16.37	54.24	68.20	-13.96	V	Peak
5470.00	36.80	16.70	53.50	68.20	-14.70	H	Peak
5470.00	38.21	16.70	54.91	68.20	-13.29	V	Peak
5460.00	27.36	16.37	43.73	54.00	-10.27	H	AVG
5460.00	27.48	16.37	43.85	54.00	-10.15	V	AVG
5470.00	27.61	16.70	44.31	54.00	-9.69	H	AVG
5470.00	28.29	16.70	44.99	54.00	-9.01	V	AVG
Test channel: Highest							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
5850.00	37.71	17.21	54.92	68.20	-13.28	H	Peak
5850.00	38.57	17.21	55.78	68.20	-12.42	V	Peak
5850.00	27.72	17.21	44.93	54.00	-9.07	H	AVG
5850.00	27.36	17.21	44.57	54.00	-9.43	V	AVG

Remark: 1. Result =Reading + Factor

Test Mode: IEEE 802.11ac(HT80)							
Test channel: Lowest							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
5460.00	35.64	16.37	52.01	68.20	-16.19	H	Peak
5460.00	37.19	16.37	53.56	68.20	-14.64	V	Peak
5470.00	36.00	16.70	52.70	68.20	-15.50	H	Peak
5470.00	38.14	16.70	54.84	68.20	-13.36	V	Peak
5460.00	25.93	16.37	42.30	54.00	-11.70	H	AVG
5460.00	27.02	16.37	43.39	54.00	-10.61	V	AVG
5470.00	26.68	16.70	43.38	54.00	-10.62	H	AVG
5470.00	27.23	16.70	43.93	54.00	-10.07	V	AVG
Test channel: Highest							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
5850.00	37.71	17.21	54.92	68.20	-13.28	H	Peak
5850.00	37.99	17.21	55.20	68.20	-13.00	V	Peak
5850.00	28.13	17.21	45.34	54.00	-8.66	H	AVG
5850.00	28.36	17.21	45.57	54.00	-8.43	V	AVG

Remark: 1. Result =Reading + Factor






## 5. Maximum Conducted Output Power Test

### 5.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.407(a)	
Test Limit	5.15 - 5.25GHz	1) Outdoor AP The maximum conducted output power (Pout) shall not exceed the lesser of 1W (30dBm). if $GT_x > 6dBi$ , then $P_{out} = 30 - (GT_x - 6)$ . e.i.r.p. at any elevation angle above 30 degrees $\leq 125mW$ (21dBm)
		2) Indoor AP The maximum conducted output power (Pout) shall not exceed the lesser of 1W (30dBm). if $GT_x > 6dBi$ , then $P_{out} = 30 - (GT_x - 6)$ .
		3) Point-to-point AP The maximum conducted output power (Pout) shall not exceed the lesser of 1W (30dBm). if $GT_x > 23dBi$ , then $P_{out} = 30 - (GT_x - 23)$ .
		4) Client devices The maximum conducted output power (Pout) shall not exceed the lesser of 250W (23.98dBm). if $GT_x > 6dBi$ , then $P_{out} = 24 - (GT_x - 6)$ .
		5.25 - 5.35GHz
5.47- 5.725GHz	The maximum conducted output power (Pout) shall not exceed the lesser of 250mW (23.98dBm) or $11dBm + 10 \log B$ , where B is the 26dB emission bandwidth in MHz. if $GT_x > 6dBi$ , then $P_{out} = 24 - (GT_x - 6)$ .	
5.725 - 5.85GHz	1) Point-to-multipoint systems (P2M) The maximum conducted output power (Pout) shall not exceed the lesser of 1W (30dBm). if $GT_x > 6dBi$ , then $P_{out} = 30 - (GT_x - 6)$ .	
	2) Point-to-point systems (P2P) The maximum conducted output power (Pout) shall not exceed the lesser of 1W (30dBm).	

### 5.2. Test Setup

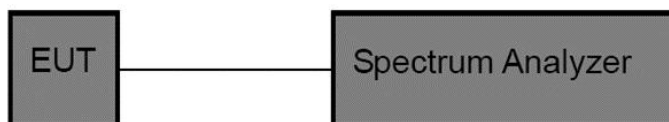

### 5.3. Test Procedure

1. Measure the duty cycle D of the transmitter output signal.
2. Set span to encompass the entire 99% OBW of the signal.



3. Set RBW = 1 MHz.
4. Set VBW  $\geq [3 \times \text{RBW}]$ .
5. Number of points in sweep  $\geq [2 \times \text{span} / \text{RBW}]$ .
6. Sweep time = auto.
7. Detector = RMS
8. Trace average at least 100 traces in power averaging (rms) mode; however, the number of traces to be averaged shall be increased above 100 as needed such that the average accurately represents the true average over the ON and OFF periods of the transmitter.
9. Compute power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function with band limits set equal to the OBW band edges. If the instrument does not have a band power function, then sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.
10. Add  $[10 \log (1 / D)]$ , where D is the duty cycle, to the measured power to compute the average power during the actual transmission times.

Note: The cable loss and attenuator loss were offset into measure device as amplitude offset.

#### 5.4. Test Data

Pass

Please refer to Appendix C of the Appendix Test Data

#### Additional test for duty cycle.

Please refer to Appendix B of the Appendix Test Data.




## 6. 26dB Bandwidth & 99% Occupied Bandwidth Test

### 6.1. Test Standard

Test Standard	FCC Part15 C Section 15.407(a) & 2.1049
Test Limit	N/A

### 6.2. Test Setup

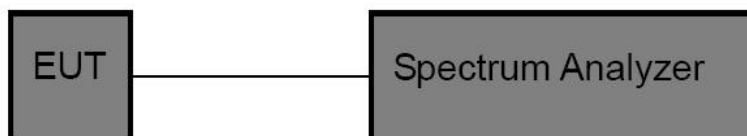

### 6.3. Test Procedure

1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as:
  - 26 dB & 99% bandwidth**
  - RBW = approximately 1% of the emission bandwidth;
  - Set the VBW > RBW;
  - Detector= Peak
  - Trace mode= Max hold.
  - Sweep- auto couple.
4. Measure the maximum width of the emission that is 26dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer.
5. Repeat until all the rest channels are investigated.

### 6.4. Test Data

Pass

Please refer to Appendix A1&A2 of the Appendix Test Data.




## 7. Minimum 6dB Bandwidth Test

### 7.1. Test Standard

Test Standard	FCC Part15 C Section 15.407(e)
Test Limit	$\geq 500$ kHz

### 7.2. Test Setup

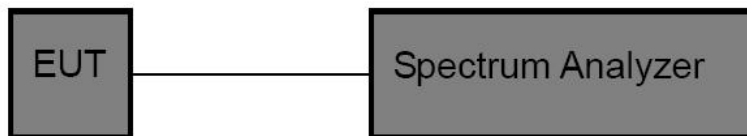

### 7.3. Test Procedure

1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

4. Set the spectrum analyzer as:

#### 6 dB bandwidth

RBW = approximately 1% of the emission bandwidth;  
 Set the VBW > RBW;  
 Detector= Peak  
 Trace mode= Max hold.  
 Sweep- auto couple.

4. Measure the maximum width of the emission that is 6dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer.
5. Repeat until all the rest channels are investigated.

### 7.4. Test Data

Pass

Please refer to Appendix A3 of the Appendix Test Data( FCC-RLAN-5.8G)




## 8. Maximum Power Spectral Density Test

### 8.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.407(a)	
Test Limit	5.15 - 5.25GHz	1) Outdoor AP The peak power spectral density (PSD) shall not exceed the lesser of 17dBm/MHz. if $GT_x > 6\text{dBi}$ , then $PSD = 17 - (GT_x - 6)$ . 2) Indoor AP The peak power spectral density (PSD) shall not exceed the lesser of 17dBm/MHz. if $GT_x > 6\text{dBi}$ , then $PSD = 17 - (GT_x - 6)$ . 3) Point-to-point AP The peak power spectral density (PSD) shall not exceed the lesser of 17dBm/MHz. if $GT_x > 23\text{dBi}$ , then $PSD = 17 - (GT_x - 23)$ . 4) Client devices The peak power spectral density (PSD) shall not exceed the lesser of 11dBm/MHz. if $GT_x > 6\text{dBi}$ , then $PSD = 11 - (GT_x - 6)$ .
	5.25 - 5.35GHz	The peak power spectral density (PSD) shall not exceed the lesser of 11dBm/MHz. if $GT_x > 6\text{dBi}$ , then $PSD = 11 - (GT_x - 6)$ .
	5.47- 5.725GHz	The peak power spectral density (PSD) shall not exceed the lesser of 11dBm/MHz. if $GT_x > 6\text{dBi}$ , then $PSD = 11 - (GT_x - 6)$ .
	5.725 - 5.85GHz	1) Point-to-multipoint systems (P2M) The peak power spectral density (PSD) shall not exceed the lesser of 30dBm/500kHz. if $GT_x > 6\text{dBi}$ , then $PSD = 30 - (GT_x - 6)$ . 2) Point-to-point systems (P2P) The peak power spectral density (PSD) shall not exceed the lesser of 30dBm/500kHz.

### 8.2. Test Setup

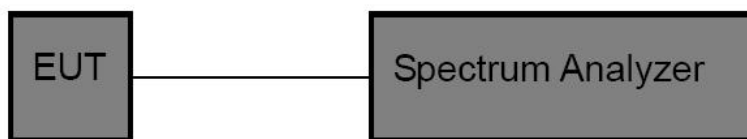

### 8.3. Test Procedure

For devices operating in the bands 5.15-5.25 GHz, 5.25-5.35 GHz, and 5.47-5.725 GHz, the above procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference bandwidth specified in § 15.407(a)(5). For devices operating in the band 5.725-5.85 GHz, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1 MHz, or 500 kHz, “provided that the measured power is integrated over the full reference bandwidth” to show the total power over the specified measurement bandwidth (i.e., 1 MHz, or 500 kHz).

1. The EUT is directly connected to the spectrum analyzer;
2. Set RBW =1MHz;



3. Set VBW  $\geq$  3 RBW=3MHz;
3. Set the span to encompass the entire emissions bandwidth (EBW) of the signal;
5. Detector=RMS;
6. Sweep time= auto couple;
7. Trace mode=max. hold;

#### 8.4. Test Data

Pass

Please refer to Appendix D of the Appendix Test Data.




## 9. Conducted Band Edge Test

### 9.1. Test Standard and Limit

Test Standard	15.407(b)			
Test Limit	Operating Band	Frequency	EIRP Limit	Remark
	5150-5250MHz	Out of operation band	-27dBm/MHz	Peak
	5250-5350MHz	Out of operation band	-27dBm/MHz	Peak
	5470-5725MHz	Out of operation band	-27dBm/MHz	Peak
	5725-5850 MHz	Below 5.65GHz	-27dBm/MHz	Peak
		5.65GHz-5.7GHz	-27dBm/MHz to 10dBm/MHz	Peak
		5.7GHz-5.72GHz	10dBm/MHz to 15.6dBm/MHz	Peak
		5.72GHz-5.725GHz	15.6dBm/MHz to 27dBm/MHz	Peak
		5.85GHz-5.855GHz	27dBm/MHz to 15.6dBm/MHz	Peak
		5.855GHz-5.875GHz	15.6dBm/MHz to 10dBm/MHz	Peak
		5.875GHz-5.925GHz	10dBm/MHz to -27dBm/MHz	Peak
Above 5.925GHz		-27dBm/MHz	Peak	

### 9.2. Test Setup

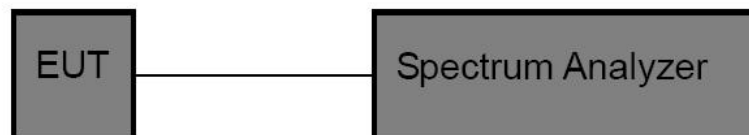

### 9.3. Test Procedure

Using the following spectrum analyzer setting:

1. Set the RBW = 1MHz.
2. Set the VBW = 3MHz.
3. Sweep time = auto couple.
4. Detector function = peak.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.

### 9.4. Test Data

Pass

Please refer to Appendix E of the Appendix Test Data.




## 10. Frequency Stability

### 10.1. Test Standard and Limit

Test Standard	FCC Part15 Section 15.407(g)
Test Limit	The frequency tolerance shall be maintained within the band of operation frequency over a temperature variation of 0 degrees to 35 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C.

### 10.2. Test Setup

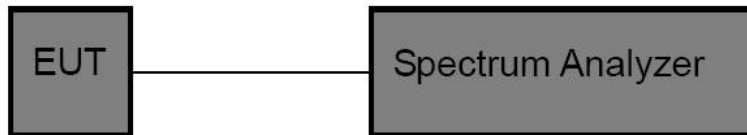

### 10.3. Test Procedure

The EUT was placed inside the environmental test chamber and powered by nominal AC/DC voltage. b. Turn the EUT on and couple its output to a spectrum analyzer. c. Turn the EUT off and set the chamber to the highest temperature specified. d. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize. e. Repeat step 2 and 3 with the temperature chamber set to the lowest temperature. f. The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.

### 10.4. Test Data

Pass

Please to see the following pages.





Test Mode: 5.2G								
Mode	TX Type	Frequency (MHz)	Temperature (°C)	Voltage (VDC)	Measured Frequency (MHz)	Limit	Verdict	
802.11a	SISO	5180	20	102.00	5180.11	5172 to 5188	Pass	
				120.00	5180.09	5172 to 5188	Pass	
				138.00	5180.05	5172 to 5188	Pass	
			-30	120.00	5180.09	5172 to 5188	Pass	
				-20	120.00	5180.01	5150 to 5250	Pass
					120.00	5180.07	5150 to 5250	Pass
			0	120.00	5180.00	5150 to 5250	Pass	
				10	120.00	5180.02	5150 to 5250	Pass
			30	120.00	5180.04	5150 to 5250	Pass	
			40	120.00	5180.04	5150 to 5250	Pass	
		50	120.00	5180.06	5172 to 5188	Pass		
		5200	20	102.00	5200.13	5192 to 5208	Pass	
				120.00	5200.05	5192 to 5208	Pass	
				138.00	5200.06	5192 to 5208	Pass	
			-30	120.00	5200.09	5192 to 5208	Pass	
				-20	120.00	5200.01	5150 to 5250	Pass
					120.00	5200.07	5150 to 5250	Pass
			0	120.00	5200.12	5150 to 5250	Pass	
				10	120.00	5200.11	5150 to 5250	Pass
			30	120.00	5200.01	5150 to 5250	Pass	
			40	120.00	5200.13	5150 to 5250	Pass	
		50	120.00	5200.08	5192 to 5208	Pass		
		5240	20	102.00	5240.10	5232 to 5248	Pass	
				120.00	5240.06	5232 to 5248	Pass	
				138.00	5240.04	5232 to 5248	Pass	
			-30	120.00	5240.05	5232 to 5248	Pass	
				-20	120.00	5240.08	5150 to 5250	Pass
					120.00	5240.01	5150 to 5250	Pass
			0	120.00	5240.12	5150 to 5250	Pass	
				10	120.00	5240.08	5150 to 5250	Pass
30	120.00		5240.06	5150 to 5250	Pass			
40	120.00		5240.06	5150 to 5250	Pass			
50	120.00	5240.06	5232 to 5248	Pass				
802.11n (HT20)	SISO	5180	20	102.00	5180.03	5172 to 5188	Pass	
				120.00	5180.12	5172 to 5188	Pass	
				138.00	5180.04	5172 to 5188	Pass	
			-30	120.00	5180.10	5172 to 5188	Pass	



			-20	120.00	5180.05	5150 to 5250	Pass	
			-10	120.00	5180.03	5150 to 5250	Pass	
			0	120.00	5180.06	5150 to 5250	Pass	
			10	120.00	5180.13	5150 to 5250	Pass	
			30	120.00	5180.05	5150 to 5250	Pass	
			40	120.00	5180.09	5150 to 5250	Pass	
			50	120.00	5180.05	5172 to 5188	Pass	
		5200	20	102.00	5200.01	5192 to 5208	Pass	
				120.00	5200.00	5192 to 5208	Pass	
				138.00	5200.01	5192 to 5208	Pass	
			-30	120.00	5200.03	5192 to 5208	Pass	
			-20	120.00	5200.13	5150 to 5250	Pass	
			-10	120.00	5200.03	5150 to 5250	Pass	
			0	120.00	5200.01	5150 to 5250	Pass	
			10	120.00	5200.02	5150 to 5250	Pass	
			30	120.00	5200.00	5150 to 5250	Pass	
			40	120.00	5200.12	5150 to 5250	Pass	
			50	120.00	5200.12	5192 to 5208	Pass	
			5240	20	102.00	5240.11	5232 to 5248	Pass
					120.00	5240.08	5232 to 5248	Pass
		138.00			5240.05	5232 to 5248	Pass	
		-30		120.00	5240.03	5232 to 5248	Pass	
		-20		120.00	5240.09	5150 to 5250	Pass	
		-10		120.00	5240.09	5150 to 5250	Pass	
		0		120.00	5240.06	5150 to 5250	Pass	
		10		120.00	5240.08	5150 to 5250	Pass	
		30		120.00	5240.04	5150 to 5250	Pass	
40	120.00	5240.10		5150 to 5250	Pass			
50	120.00	5240.04	5232 to 5248	Pass				
802.11n (HT40)	SISO	5190	20	102.00	5190.00	5174 to 5206	Pass	
				120.00	5190.07	5174 to 5206	Pass	
				138.00	5190.07	5174 to 5206	Pass	
			-30	120.00	5190.10	5174 to 5206	Pass	
			-20	120.00	5190.11	5150 to 5250	Pass	
			-10	120.00	5190.10	5150 to 5250	Pass	
			0	120.00	5190.00	5150 to 5250	Pass	
			10	120.00	5190.05	5150 to 5250	Pass	
			30	120.00	5190.12	5150 to 5250	Pass	
			40	120.00	5190.07	5150 to 5250	Pass	
50	120.00	5190.08	5174 to 5206	Pass				



		5230	20	102.00	5230.11	5214 to 5246	Pass
				120.00	5230.02	5214 to 5246	Pass
				138.00	5230.13	5214 to 5246	Pass
			-30	120.00	5230.02	5214 to 5246	Pass
				120.00	5230.09	5150 to 5250	Pass
			-10	120.00	5230.12	5150 to 5250	Pass
				120.00	5230.00	5150 to 5250	Pass
			10	120.00	5230.13	5150 to 5250	Pass
			30	120.00	5230.07	5150 to 5250	Pass
			40	120.00	5230.03	5150 to 5250	Pass
50	120.00	5230.07	5214 to 5246	Pass			
802.11ac (VHT20)	SISO	5180	20	102.00	5180.06	5172 to 5188	Pass
				120.00	5180.06	5172 to 5188	Pass
				138.00	5180.02	5172 to 5188	Pass
			-30	120.00	5180.01	5172 to 5188	Pass
				120.00	5180.08	5150 to 5250	Pass
			-10	120.00	5180.05	5150 to 5250	Pass
				120.00	5180.04	5150 to 5250	Pass
			10	120.00	5180.05	5150 to 5250	Pass
			30	120.00	5180.05	5150 to 5250	Pass
			40	120.00	5180.02	5150 to 5250	Pass
		50	120.00	5180.01	5172 to 5188	Pass	
		5200	20	102.00	5200.11	5192 to 5208	Pass
				120.00	5200.04	5192 to 5208	Pass
				138.00	5200.12	5192 to 5208	Pass
			-30	120.00	5200.04	5192 to 5208	Pass
				120.00	5200.12	5150 to 5250	Pass
			-10	120.00	5200.12	5150 to 5250	Pass
				120.00	5200.11	5150 to 5250	Pass
			10	120.00	5200.11	5150 to 5250	Pass
			30	120.00	5200.09	5150 to 5250	Pass
40	120.00		5200.08	5150 to 5250	Pass		
50	120.00	5200.03	5192 to 5208	Pass			
5240	20	102.00	5240.13	5232 to 5248	Pass		
		120.00	5240.10	5232 to 5248	Pass		
		138.00	5240.05	5232 to 5248	Pass		
	-30	120.00	5240.06	5232 to 5248	Pass		
		120.00	5240.09	5150 to 5250	Pass		
	-10	120.00	5240.01	5150 to 5250	Pass		
0	120.00	5240.02	5150 to 5250	Pass			



			10	120.00	5240.01	5150 to 5250	Pass
			30	120.00	5240.02	5150 to 5250	Pass
			40	120.00	5240.07	5150 to 5250	Pass
			50	120.00	5240.03	5232 to 5248	Pass
802.11ac (VHT40)	SISO	5190	20	102.00	5190.05	5174 to 5206	Pass
				120.00	5190.01	5174 to 5206	Pass
				138.00	5190.01	5174 to 5206	Pass
			-30	120.00	5190.04	5174 to 5206	Pass
			-20	120.00	5190.11	5150 to 5250	Pass
			-10	120.00	5190.11	5150 to 5250	Pass
			0	120.00	5190.01	5150 to 5250	Pass
			10	120.00	5190.04	5150 to 5250	Pass
			30	120.00	5190.08	5150 to 5250	Pass
			40	120.00	5190.07	5150 to 5250	Pass
	50	120.00	5190.12	5174 to 5206	Pass		
	5230	20	102.00	5230.01	5214 to 5246	Pass	
			120.00	5230.02	5214 to 5246	Pass	
			138.00	5230.11	5214 to 5246	Pass	
		-30	120.00	5230.07	5214 to 5246	Pass	
		-20	120.00	5230.13	5150 to 5250	Pass	
		-10	120.00	5230.12	5150 to 5250	Pass	
		0	120.00	5230.08	5150 to 5250	Pass	
		10	120.00	5230.09	5150 to 5250	Pass	
		30	120.00	5230.11	5150 to 5250	Pass	
40		120.00	5230.03	5150 to 5250	Pass		
50	120.00	5230.01	5214 to 5246	Pass			
802.11ac (VHT80)	SISO	5210	20	102.00	5210.12	5178 to 5242	Pass
				120.00	5210.09	5178 to 5242	Pass
				138.00	5210.13	5178 to 5242	Pass
			-30	120.00	5210.04	5178 to 5242	Pass
			-20	120.00	5210.12	5150 to 5250	Pass
			-10	120.00	5210.00	5150 to 5250	Pass
			0	120.00	5210.12	5150 to 5250	Pass
			10	120.00	5210.04	5150 to 5250	Pass
			30	120.00	5210.04	5150 to 5250	Pass
			40	120.00	5210.12	5150 to 5250	Pass
50	120.00	5210.02	5178 to 5242	Pass			



Test Mode: 5.3G										
Mode	TX Type	Frequency (MHz)	Temperature (°C)	Voltage (VDC)	Measured Frequency (MHz)	Limit	Verdict			
802.11a	SISO	5180	20	102.00	5260.10	5252 to 5268	Pass			
				120.00	5260.03	5252 to 5268	Pass			
				138.00	5260.07	5252 to 5268	Pass			
			5200	-30	102.00	5260.04	5252 to 5268	Pass		
					-20	120.00	5260.01	5250 to 5350	Pass	
					-10	120.00	5260.12	5250 to 5350	Pass	
				5240	0	120.00	5260.05	5250 to 5350	Pass	
						10	120.00	5260.03	5250 to 5350	Pass
						30	120.00	5260.01	5250 to 5350	Pass
		5200			40	120.00	5260.02	5250 to 5350	Pass	
						50	120.00	5260.10	5252 to 5268	Pass
						20	102.00	5300.03	5292 to 5308	Pass
			120.00		5300.08		5292 to 5308	Pass		
			138.00		5300.09		5292 to 5308	Pass		
			5240		-30	102.00	5300.07	5292 to 5308	Pass	
				-20		120.00	5300.07	5250 to 5350	Pass	
				-10		120.00	5300.03	5250 to 5350	Pass	
				5240	0	120.00	5300.10	5250 to 5350	Pass	
		10				120.00	5300.06	5250 to 5350	Pass	
		30				120.00	5300.12	5250 to 5350	Pass	
		5240			40	120.00	5300.01	5250 to 5350	Pass	
						50	120.00	5300.04	5292 to 5308	Pass
						20	102.00	5320.06	5312 to 5328	Pass
			120.00		5320.04		5312 to 5328	Pass		
			138.00		5320.09		5312 to 5328	Pass		
			5240		-30	102.00	5320.01	5312 to 5328	Pass	
				-20		120.00	5320.04	5250 to 5350	Pass	
-10	120.00			5320.11		5250 to 5350	Pass			
5240	0			120.00	5320.03	5250 to 5350	Pass			
		10		120.00	5320.12	5250 to 5350	Pass			
		30		120.00	5320.12	5250 to 5350	Pass			
	5240	40		120.00	5320.11	5250 to 5350	Pass			
				50	120.00	5320.00	5312 to 5328	Pass		
				20	102.00	5260.09	5252 to 5268	Pass		
		120.00	5260.12		5252 to 5268	Pass				
		138.00	5260.11		5252 to 5268	Pass				
		802.11n (HT20)	SISO	5180	-30	102.00	5260.08	5252 to 5268	Pass	



			-20	120.00	5260.06	5250 to 5350	Pass		
			-10	120.00	5260.08	5250 to 5350	Pass		
			0	120.00	5260.07	5250 to 5350	Pass		
			10	120.00	5260.05	5250 to 5350	Pass		
			30	120.00	5260.08	5250 to 5350	Pass		
			40	120.00	5260.08	5250 to 5350	Pass		
			50	120.00	5260.01	5252 to 5268	Pass		
		5200	20	102.00	5300.01	5292 to 5308	Pass		
				120.00	5300.04	5292 to 5308	Pass		
				138.00	5300.12	5292 to 5308	Pass		
			-30	102.00	5300.01	5292 to 5308	Pass		
			-20	120.00	5300.09	5250 to 5350	Pass		
			-10	120.00	5300.04	5250 to 5350	Pass		
			0	120.00	5300.03	5250 to 5350	Pass		
			10	120.00	5300.03	5250 to 5350	Pass		
			30	120.00	5300.07	5250 to 5350	Pass		
			40	120.00	5300.03	5250 to 5350	Pass		
			50	120.00	5300.09	5292 to 5308	Pass		
			5240	20	102.00	5320.08	5312 to 5328	Pass	
					120.00	5320.03	5312 to 5328	Pass	
		138.00			5320.08	5312 to 5328	Pass		
		-30		102.00	5320.10	5312 to 5328	Pass		
		-20		120.00	5320.11	5250 to 5350	Pass		
		-10		120.00	5320.08	5250 to 5350	Pass		
		0		120.00	5320.09	5250 to 5350	Pass		
		10		120.00	5320.09	5250 to 5350	Pass		
		30		120.00	5320.05	5250 to 5350	Pass		
		40		120.00	5320.04	5250 to 5350	Pass		
		50	120.00	5320.03	5312 to 5328	Pass			
		802.11n (HT40)	SISO	5190	102.00	5270.06	5254 to 5286	Pass	
					20	120.00	5270.12	5254 to 5286	Pass
						138.00	5270.06	5254 to 5286	Pass
						-30	102.00	5270.11	5254 to 5286
					-20	120.00	5270.13	5250 to 5350	Pass
					-10	120.00	5270.02	5250 to 5350	Pass
					0	120.00	5270.06	5250 to 5350	Pass
10	120.00				5270.03	5250 to 5350	Pass		
30	120.00				5270.03	5250 to 5350	Pass		
40	120.00				5270.01	5250 to 5350	Pass		
50	120.00				5270.06	5254 to 5286	Pass		



		5230	20	102.00	5310.11	5294 to 5326	Pass
				120.00	5310.05	5294 to 5326	Pass
				138.00	5310.09	5294 to 5326	Pass
			-30	102.00	5310.09	5294 to 5326	Pass
				120.00	5310.00	5250 to 5350	Pass
			-10	120.00	5310.01	5250 to 5350	Pass
				0	120.00	5310.10	5250 to 5350
			10	120.00	5310.09	5250 to 5350	Pass
				30	120.00	5310.00	5250 to 5350
			40	120.00	5310.02	5250 to 5350	Pass
50	120.00	5310.12		5294 to 5326	Pass		
802.11ac (VHT20)	SISO	5180	20	102.00	5260.12	5252 to 5268	Pass
				120.00	5260.08	5252 to 5268	Pass
				138.00	5260.10	5252 to 5268	Pass
			-30	102.00	5260.07	5252 to 5268	Pass
				120.00	5260.07	5250 to 5350	Pass
			-10	120.00	5260.01	5250 to 5350	Pass
				0	120.00	5260.06	5250 to 5350
			10	120.00	5260.10	5250 to 5350	Pass
				30	120.00	5260.12	5250 to 5350
			40	120.00	5260.11	5250 to 5350	Pass
				50	120.00	5260.11	5252 to 5268
			5200	20	102.00	5300.01	5292 to 5308
		120.00			5300.03	5292 to 5308	Pass
		138.00			5300.11	5292 to 5308	Pass
		-30		102.00	5300.05	5292 to 5308	Pass
				120.00	5300.11	5250 to 5350	Pass
		-10		120.00	5300.08	5250 to 5350	Pass
				0	120.00	5300.09	5250 to 5350
		10		120.00	5300.03	5250 to 5350	Pass
				30	120.00	5300.09	5250 to 5350
		40		120.00	5300.12	5250 to 5350	Pass
				50	120.00	5300.10	5292 to 5308
		5240		20	102.00	5320.10	5312 to 5328
			120.00		5320.08	5312 to 5328	Pass
138.00	5320.06		5312 to 5328		Pass		
-30	102.00		5320.12	5312 to 5328	Pass		
	120.00		5320.11	5250 to 5350	Pass		
-10	120.00		5320.01	5250 to 5350	Pass		
	0		120.00	5320.00	5250 to 5350	Pass	



			10	120.00	5320.05	5250 to 5350	Pass
			30	120.00	5320.10	5250 to 5350	Pass
			40	120.00	5320.00	5250 to 5350	Pass
			50	120.00	5320.06	5312 to 5328	Pass
802.11ac (VHT40)	SISO	5190	20	102.00	5270.08	5254 to 5286	Pass
				120.00	5270.05	5254 to 5286	Pass
				138.00	5270.02	5254 to 5286	Pass
			-30	102.00	5270.12	5254 to 5286	Pass
			-20	120.00	5270.10	5250 to 5350	Pass
			-10	120.00	5270.03	5250 to 5350	Pass
			0	120.00	5270.03	5250 to 5350	Pass
			10	120.00	5270.10	5250 to 5350	Pass
			30	120.00	5270.04	5250 to 5350	Pass
			40	120.00	5270.02	5250 to 5350	Pass
	50	120.00	5270.10	5254 to 5286	Pass		
	5230	20	102.00	5310.13	5294 to 5326	Pass	
			120.00	5310.06	5294 to 5326	Pass	
			138.00	5310.08	5294 to 5326	Pass	
		-30	102.00	5310.05	5294 to 5326	Pass	
		-20	120.00	5310.04	5250 to 5350	Pass	
		-10	120.00	5310.06	5250 to 5350	Pass	
		0	120.00	5310.10	5250 to 5350	Pass	
		10	120.00	5310.01	5250 to 5350	Pass	
		30	120.00	5310.08	5250 to 5350	Pass	
40		120.00	5310.00	5250 to 5350	Pass		
50	120.00	5310.06	5294 to 5326	Pass			
802.11ac (VHT80)	SISO	5210	20	102.00	5290.07	5258 to 5322	Pass
				120.00	5290.07	5258 to 5322	Pass
				138.00	5290.07	5258 to 5322	Pass
			-30	102.00	5290.08	5258 to 5322	Pass
			-20	120.00	5290.13	5250 to 5350	Pass
			-10	120.00	5290.02	5250 to 5350	Pass
			0	120.00	5290.10	5250 to 5350	Pass
			10	120.00	5290.06	5250 to 5350	Pass
			30	120.00	5290.12	5250 to 5350	Pass
			40	120.00	5290.06	5250 to 5350	Pass
50	120.00	5290.12	5258 to 5322	Pass			





Test Mode: 5.6G									
Mode	TX Type	Frequency (MHz)	Temperature (°C)	Voltage (VDC)	Measured Frequency (MHz)	Limit	Verdict		
802.11a	SISO	5500	20	102.00	5500.03	5492 to 5508	Pass		
				120.00	5500.07	5492 to 5508	Pass		
				138.00	5500.04	5492 to 5508	Pass		
			-30	102.00	5500.10	5492 to 5508	Pass		
				-20	120.00	5500.12	5470 to 5725	Pass	
					-10	120.00	5500.08	5470 to 5725	Pass
			5580	20	102.00	5580.04	5572 to 5588	Pass	
					120.00	5580.08	5572 to 5588	Pass	
					138.00	5580.06	5572 to 5588	Pass	
				-30	102.00	5580.07	5572 to 5588	Pass	
		-20			120.00	5580.02	5470 to 5725	Pass	
					-10	120.00	5580.08	5470 to 5725	Pass
		0		120.00	5580.09	5470 to 5725	Pass		
				10	120.00	5580.01	5470 to 5725	Pass	
				30	120.00	5580.01	5470 to 5725	Pass	
				40	120.00	5580.05	5470 to 5725	Pass	
		50	120.00	5580.11	5572 to 5588	Pass			
		5700	20	102.00	5700.05	5692 to 5708	Pass		
				120.00	5700.10	5692 to 5708	Pass		
				138.00	5700.08	5692 to 5708	Pass		
			-30	102.00	5700.12	5692 to 5708	Pass		
				-20	120.00	5700.06	5470 to 5725	Pass	
					-10	120.00	5700.11	5470 to 5725	Pass
			0	120.00	5700.01	5470 to 5725	Pass		
				10	120.00	5700.11	5470 to 5725	Pass	
				30	120.00	5700.11	5470 to 5725	Pass	
				40	120.00	5700.10	5470 to 5725	Pass	
		50	120.00	5700.02	5692 to 5708	Pass			
		802.11n (HT20)	SISO	5500	20	102.00	5500.12	5492 to 5508	Pass
						120.00	5500.06	5492 to 5508	Pass
138.00	5500.05					5492 to 5508	Pass		



			-30	102.00	5500.07	5492 to 5508	Pass
			-20	120.00	5500.11	5470 to 5725	Pass
			-10	120.00	5500.03	5470 to 5725	Pass
			0	120.00	5500.11	5470 to 5725	Pass
			10	120.00	5500.04	5470 to 5725	Pass
			30	120.00	5500.04	5470 to 5725	Pass
			40	120.00	5500.12	5470 to 5725	Pass
			50	120.00	5500.09	5492 to 5508	Pass
			5580	20	102.00	5580.06	5572 to 5588
		120.00			5580.08	5572 to 5588	Pass
		138.00			5580.11	5572 to 5588	Pass
		-30		102.00	5580.11	5572 to 5588	Pass
		-20		120.00	5580.13	5470 to 5725	Pass
		-10		120.00	5580.07	5470 to 5725	Pass
		0		120.00	5580.10	5470 to 5725	Pass
		10		120.00	5580.10	5470 to 5725	Pass
		30		120.00	5580.12	5470 to 5725	Pass
		5700	20	102.00	5700.12	5692 to 5708	Pass
				120.00	5700.01	5692 to 5708	Pass
				138.00	5700.08	5692 to 5708	Pass
			-30	102.00	5700.02	5692 to 5708	Pass
-20	120.00		5700.02	5470 to 5725	Pass		
-10	120.00		5700.05	5470 to 5725	Pass		
0	120.00		5700.08	5470 to 5725	Pass		
10	120.00		5700.06	5470 to 5725	Pass		
30	120.00		5700.13	5470 to 5725	Pass		
802.11n (HT40)	SISO	5510	20	102.00	5510.10	5494 to 5526	Pass
				120.00	5510.11	5494 to 5526	Pass
				138.00	5510.05	5494 to 5526	Pass
			-30	102.00	5510.02	5494 to 5526	Pass
			-20	120.00	5510.11	5470 to 5725	Pass
			-10	120.00	5510.09	5470 to 5725	Pass
			0	120.00	5510.07	5470 to 5725	Pass
			10	120.00	5510.12	5470 to 5725	Pass
			30	120.00	5510.03	5470 to 5725	Pass



802.11ac (VHT20)	SISO	5550	40	120.00	5510.12	5470 to 5725	Pass	
			50	120.00	5510.11	5494 to 5526	Pass	
			20	102.00	5550.00	5534 to 5566	Pass	
				120.00	5550.04	5534 to 5566	Pass	
				138.00	5550.10	5534 to 5566	Pass	
			-30	102.00	5550.08	5534 to 5566	Pass	
			-20	120.00	5550.12	5470 to 5725	Pass	
			-10	120.00	5550.06	5470 to 5725	Pass	
			0	120.00	5550.03	5470 to 5725	Pass	
			10	120.00	5550.05	5470 to 5725	Pass	
			30	120.00	5550.01	5470 to 5725	Pass	
			40	120.00	5550.12	5470 to 5725	Pass	
			50	120.00	5550.09	5534 to 5566	Pass	
			5670	20	102.00	5670.06	5654 to 5686	Pass
		120.00			5670.11	5654 to 5686	Pass	
		138.00			5670.05	5654 to 5686	Pass	
		-30		102.00	5670.02	5654 to 5686	Pass	
		-20		120.00	5670.06	5470 to 5725	Pass	
		-10		120.00	5670.07	5470 to 5725	Pass	
		0		120.00	5670.10	5470 to 5725	Pass	
		10		120.00	5670.10	5470 to 5725	Pass	
		30		120.00	5670.05	5470 to 5725	Pass	
		40		120.00	5670.10	5470 to 5725	Pass	
		50		120.00	5670.02	5654 to 5686	Pass	
		5500		20	102.00	5500.07	5492 to 5508	Pass
					120.00	5500.09	5492 to 5508	Pass
					138.00	5500.11	5492 to 5508	Pass
			-30	102.00	5500.05	5492 to 5508	Pass	
-20	120.00		5500.07	5470 to 5725	Pass			
-10	120.00		5500.11	5470 to 5725	Pass			
0	120.00		5500.07	5470 to 5725	Pass			
10	120.00		5500.02	5470 to 5725	Pass			
30	120.00		5500.06	5470 to 5725	Pass			
40	120.00		5500.07	5470 to 5725	Pass			
50	120.00		5500.11	5492 to 5508	Pass			
5580	20		102.00	5580.01	5572 to 5588	Pass		
			120.00	5580.00	5572 to 5588	Pass		
			138.00	5580.02	5572 to 5588	Pass		
	-30	102.00	5580.07	5572 to 5588	Pass			



802.11ac (VHT40)	SISO	5700	-20	120.00	5580.02	5470 to 5725	Pass		
			-10	120.00	5580.08	5470 to 5725	Pass		
			0	120.00	5580.06	5470 to 5725	Pass		
			10	120.00	5580.03	5470 to 5725	Pass		
			30	120.00	5580.12	5470 to 5725	Pass		
			40	120.00	5580.12	5470 to 5725	Pass		
			50	120.00	5580.01	5572 to 5588	Pass		
	SISO	5510	20	102.00	5700.13	5692 to 5708	Pass		
				120.00	5700.00	5692 to 5708	Pass		
				138.00	5700.02	5692 to 5708	Pass		
			-30	102.00	5700.10	5692 to 5708	Pass		
			-20	120.00	5700.01	5470 to 5725	Pass		
			-10	120.00	5700.12	5470 to 5725	Pass		
			0	120.00	5700.02	5470 to 5725	Pass		
			10	120.00	5700.06	5470 to 5725	Pass		
			30	120.00	5700.00	5470 to 5725	Pass		
			40	120.00	5700.12	5470 to 5725	Pass		
			50	120.00	5700.03	5692 to 5708	Pass		
			SISO	5550	20	102.00	5510.01	5494 to 5526	Pass
						120.00	5510.07	5494 to 5526	Pass
						138.00	5510.01	5494 to 5526	Pass
-30	102.00	5510.08			5494 to 5526	Pass			
-20	120.00	5510.09			5470 to 5725	Pass			
-10	120.00	5510.11			5470 to 5725	Pass			
0	120.00	5510.04			5470 to 5725	Pass			
10	120.00	5510.00			5470 to 5725	Pass			
30	120.00	5510.04			5470 to 5725	Pass			
40	120.00	5510.02			5470 to 5725	Pass			
50	120.00	5510.03			5494 to 5526	Pass			
SISO	5550	20			102.00	5550.03	5534 to 5566	Pass	
					120.00	5550.12	5534 to 5566	Pass	
					138.00	5550.05	5534 to 5566	Pass	
		-30	102.00	5550.06	5534 to 5566	Pass			
		-20	120.00	5550.02	5470 to 5725	Pass			
		-10	120.00	5550.09	5470 to 5725	Pass			
		0	120.00	5550.12	5470 to 5725	Pass			
		10	120.00	5550.13	5470 to 5725	Pass			
30	120.00	5550.03	5470 to 5725	Pass					
40	120.00	5550.05	5470 to 5725	Pass					



		5670	50	120.00	5550.09	5534 to 5566	Pass	
			20	102.00	5670.10	5654 to 5686	Pass	
				120.00	5670.00	5654 to 5686	Pass	
					138.00	5670.01	5654 to 5686	Pass
			-30	102.00	5670.09	5654 to 5686	Pass	
			-20	120.00	5670.03	5470 to 5725	Pass	
			-10	120.00	5670.10	5470 to 5725	Pass	
			0	120.00	5670.12	5470 to 5725	Pass	
			10	120.00	5670.02	5470 to 5725	Pass	
			30	120.00	5670.10	5470 to 5725	Pass	
			40	120.00	5670.10	5470 to 5725	Pass	
			50	120.00	5670.04	5654 to 5686	Pass	
802.11ac (VHT80)	SISO	5530		102.00	5530.11	5498 to 5562	Pass	
			20	120.00	5530.09	5498 to 5562	Pass	
				138.00	5530.04	5498 to 5562	Pass	
			-30	102.00	5530.08	5498 to 5562	Pass	
			-20	120.00	5530.11	5470 to 5725	Pass	
			-10	120.00	5530.08	5470 to 5725	Pass	
			0	120.00	5530.09	5470 to 5725	Pass	
			10	120.00	5530.01	5470 to 5725	Pass	
			30	120.00	5530.02	5470 to 5725	Pass	
			40	120.00	5530.08	5470 to 5725	Pass	
			50	120.00	5530.09	5498 to 5562	Pass	



Test Mode: 5.8G								
Mode	TX Type	Frequency (MHz)	Temperature (°C)	Voltage (VDC)	Measured Frequency (MHz)	Limit	Verdict	
802.11a	SISO	5745	20	102.00	5745.07	5737 to 5753	Pass	
				120.00	5745.11	5737 to 5753	Pass	
				138.00	5745.11	5737 to 5753	Pass	
			-30	102.00	5745.08	5737 to 5753	Pass	
				-20	120.00	5745.09	5725 to 5850	Pass
				-10	120.00	5745.06	5725 to 5850	Pass
			0	120.00	5745.07	5725 to 5850	Pass	
				10	120.00	5745.12	5725 to 5850	Pass
				30	120.00	5745.00	5725 to 5850	Pass
		40	120.00	5745.04	5725 to 5850	Pass		
			50	120.00	5745.03	5737 to 5753	Pass	
			20	102.00	5785.12	5777 to 5793	Pass	
		120.00		5785.11	5777 to 5793	Pass		
		138.00		5785.11	5777 to 5793	Pass		
		-30	102.00	5785.06	5777 to 5793	Pass		
			-20	120.00	5785.06	5725 to 5850	Pass	
			-10	120.00	5785.02	5725 to 5850	Pass	
		0	120.00	5785.02	5725 to 5850	Pass		
			10	120.00	5785.05	5725 to 5850	Pass	
			30	120.00	5785.02	5725 to 5850	Pass	
		40	120.00	5785.03	5725 to 5850	Pass		
			50	120.00	5785.09	5777 to 5793	Pass	
			20	102.00	5825.07	5817 to 5833	Pass	
		120.00		5825.03	5817 to 5833	Pass		
		138.00		5825.11	5817 to 5833	Pass		
		-30	102.00	5825.07	5817 to 5833	Pass		
			-20	120.00	5825.11	5725 to 5850	Pass	
-10	120.00		5825.11	5725 to 5850	Pass			
0	120.00	5825.07	5725 to 5850	Pass				
	10	120.00	5825.02	5725 to 5850	Pass			
	30	120.00	5825.03	5725 to 5850	Pass			
40	120.00	5825.09	5725 to 5850	Pass				
	50	120.00	5825.08	5817 to 5833	Pass			
	20	102.00	5745.01	5737 to 5753	Pass			
120.00		5745.10	5737 to 5753	Pass				
138.00		5745.08	5737 to 5753	Pass				
802.11n (HT20)	SISO	5745	-30	102.00	5745.02	5737 to 5753	Pass	



			-20	120.00	5745.00	5725 to 5850	Pass	
			-10	120.00	5745.10	5725 to 5850	Pass	
			0	120.00	5745.01	5725 to 5850	Pass	
			10	120.00	5745.03	5725 to 5850	Pass	
			30	120.00	5745.12	5725 to 5850	Pass	
			40	120.00	5745.10	5725 to 5850	Pass	
			50	120.00	5745.08	5737 to 5753	Pass	
		5785	20	102.00	5785.02	5777 to 5793	Pass	
				120.00	5785.07	5777 to 5793	Pass	
				138.00	5785.06	5777 to 5793	Pass	
			-30	102.00	5785.05	5777 to 5793	Pass	
			-20	120.00	5785.00	5725 to 5850	Pass	
			-10	120.00	5785.07	5725 to 5850	Pass	
			0	120.00	5785.02	5725 to 5850	Pass	
			10	120.00	5785.07	5725 to 5850	Pass	
			30	120.00	5785.02	5725 to 5850	Pass	
			40	120.00	5785.05	5725 to 5850	Pass	
			50	120.00	5785.04	5777 to 5793	Pass	
			5825	20	102.00	5825.06	5817 to 5833	Pass
					120.00	5825.12	5817 to 5833	Pass
					138.00	5825.10	5817 to 5833	Pass
-30	102.00	5825.08		5817 to 5833	Pass			
-20	120.00	5825.06		5725 to 5850	Pass			
-10	120.00	5825.03		5725 to 5850	Pass			
0	120.00	5825.03		5725 to 5850	Pass			
10	120.00	5825.05		5725 to 5850	Pass			
30	120.00	5825.12		5725 to 5850	Pass			
40	120.00	5825.06		5725 to 5850	Pass			
50	120.00	5825.02	5817 to 5833	Pass				
802.11n (HT40)	SISO	5755	20	102.00	5755.01	5739 to 5771	Pass	
				120.00	5755.07	5739 to 5771	Pass	
				138.00	5755.08	5739 to 5771	Pass	
			-30	102.00	5755.07	5739 to 5771	Pass	
			-20	120.00	5755.03	5725 to 5850	Pass	
			-10	120.00	5755.12	5725 to 5850	Pass	
			0	120.00	5755.08	5725 to 5850	Pass	
			10	120.00	5755.05	5725 to 5850	Pass	
			30	120.00	5755.08	5725 to 5850	Pass	
			40	120.00	5755.05	5725 to 5850	Pass	
50	120.00	5755.12	5739 to 5771	Pass				



5795	SISO	20	102.00	5795.12	5779 to 5811	Pass
			120.00	5795.07	5779 to 5811	Pass
			138.00	5795.03	5779 to 5811	Pass
		-30	102.00	5795.09	5779 to 5811	Pass
		-10	120.00	5795.10	5725 to 5850	Pass
		10	120.00	5795.04	5725 to 5850	Pass
		40	120.00	5795.08	5725 to 5850	Pass
50	120.00					
		5745	SISO	20	102.00	5745.12
120.00	5745.06				5737 to 5753	Pass
138.00	5745.10				5737 to 5753	Pass
-30	102.00			5745.13	5737 to 5753	Pass
-10	120.00			5745.03	5725 to 5850	Pass
10	120.00			5745.10	5725 to 5850	Pass
40	120.00			5745.10	5725 to 5850	Pass
		50	120.00			
5785	SISO			20	102.00	5785.08
		120.00	5785.11		5777 to 5793	Pass
		138.00	5785.02		5777 to 5793	Pass
		-30	102.00	5785.11	5777 to 5793	Pass
		-10	120.00	5785.07	5725 to 5850	Pass
		10	120.00	5785.01	5725 to 5850	Pass
		40	120.00	5785.01	5725 to 5850	Pass
50	120.00					
		5825	SISO	20	102.00	5825.01
120.00	5825.06				5817 to 5833	Pass
138.00	5825.01				5817 to 5833	Pass
-30	102.00			5825.04	5817 to 5833	Pass
-10	120.00			5825.05	5725 to 5850	Pass
		0	120.00			





			10	120.00	5825.08	5725 to 5850	Pass
			30	120.00	5825.03	5725 to 5850	Pass
			40	120.00	5825.08	5725 to 5850	Pass
			50	120.00	5825.03	5817 to 5833	Pass
802.11ac (VHT40)	SISO	5755	20	102.00	5755.04	5739 to 5771	Pass
				120.00	5755.03	5739 to 5771	Pass
				138.00	5755.11	5739 to 5771	Pass
			-30	102.00	5755.07	5739 to 5771	Pass
			-20	120.00	5755.04	5725 to 5850	Pass
			-10	120.00	5755.09	5725 to 5850	Pass
			0	120.00	5755.02	5725 to 5850	Pass
			10	120.00	5755.11	5725 to 5850	Pass
			30	120.00	5755.09	5725 to 5850	Pass
			40	120.00	5755.09	5725 to 5850	Pass
		50	120.00	5755.07	5739 to 5771	Pass	
		5795	20	102.00	5795.12	5779 to 5811	Pass
				120.00	5795.09	5779 to 5811	Pass
				138.00	5795.12	5779 to 5811	Pass
			-30	102.00	5795.04	5779 to 5811	Pass
			-20	120.00	5795.07	5725 to 5850	Pass
			-10	120.00	5795.09	5725 to 5850	Pass
			0	120.00	5795.10	5725 to 5850	Pass
			10	120.00	5795.00	5725 to 5850	Pass
			30	120.00	5795.12	5725 to 5850	Pass
40	120.00		5795.07	5725 to 5850	Pass		
50	120.00	5795.04	5779 to 5811	Pass			
802.11ac (VHT80)	SISO	5775	20	102.00	5775.13	5743 to 5807	Pass
				120.00	5775.05	5743 to 5807	Pass
				138.00	5775.12	5743 to 5807	Pass
			-30	102.00	5775.01	5743 to 5807	Pass
			-20	120.00	5775.02	5725 to 5850	Pass
			-10	120.00	5775.03	5725 to 5850	Pass
			0	120.00	5775.10	5725 to 5850	Pass
			10	120.00	5775.01	5725 to 5850	Pass
			30	120.00	5775.11	5725 to 5850	Pass
			40	120.00	5775.09	5725 to 5850	Pass
50	120.00	5775.03	5743 to 5807	Pass			



## 11. Antenna Requirement

### 11.1. Test Standard and Requirement

Test Standard	FCC Part15 Section 15.203 /15.407
Requirement	<p>1) 15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p> <p>2) 15.407 requirement: if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.</p>

### 11.2. Antenna Connected Construction

The antenna is a FPC antenna which permanently attached, and the best case gain of the 5.61dBi. It complies with the standard requirement.



## **APPENDIX I -- TEST SETUP PHOTOGRAPH**

Please refer to separated files Appendix I -- Test Setup Photograph\_RF

## **APPENDIX II -- EXTERNAL PHOTOGRAPH**

Please refer to separated files Appendix II -- External Photograph

## **APPENDIX III -- INTERNAL PHOTOGRAPH**

Please refer to separated files Appendix III -- Internal Photograph

----- End of Report -----

