

FCC - TEST REPORT

Report Number : **68.930.16.020.01** Date of Issue: August 10, 2016

Model : **BS616**

Product Type : Smart body scale(HiMirror)

Applicant : Cal-Comp Electronics & Communications Company Limited

Address : 3th FL., No. 99, Sec. 5, Nanjing E. Rd. Taipei, Taiwan 105

Production Facility : Zhongshan Lifesense Electronics Co.,Ltd

Address : No.23 Jin' an Road, Minzhong, 528441 Zhongshan,
Guangdong, China 528437

Test Result : **Positive** **Negative**

Total pages including
Appendices : 29

TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch is a subcontractor to TÜV SÜD Product Service GmbH according to the principles outlined in ISO 17025.

TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch reports apply only to the specific samples tested under stated test conditions. Construction of the actual test samples has been documented. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. The manufacturer/importer is responsible to the Competent Authorities in Europe for any modifications made to the production units which result in non-compliance to the relevant regulations. TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch shall have no liability for any deductions, inferences or generalizations drawn by the client or others from TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch issued reports.

This report is the confidential property of the client. As a mutual protection to our clients, the public and ourselves, extracts from the test report shall not be reproduced except in full without our written approval



1 Table of Contents

- 1 Table of Contents 2
- 2 Details about the Test Laboratory 3
- 3 Description of the Equipment Under Test 4
- 4 Summary of Test Standards 5
- 5 Summary of Test Results 6
- 6 General Remarks 7
- 7 Test Setups 8
- 8 Systems test configuration 9
- 9 Technical Requirement 10
 - 9.1 Conducted Emission 10
 - 9.2 Conducted peak output power 13
 - 9.3 Power spectral density 15
 - 9.4 6 dB Bandwidth and 99% Occupied Bandwidth 17
 - 9.5 Spurious RF conducted emissions 19
 - 9.6 Band edge testing 23
 - 9.7 Spurious radiated emissions for transmitter 25
- 10 Test Equipment List 28
- 11 System Measurement Uncertainty 29

2 Details about the Test Laboratory

Details about the Test Laboratory

Test Site 1

Company name: TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch
Building 12&13, Zhiheng Wisdomland Business Park,
Nantou Checkpoint Road 2, Nanshan District,
Shenzhen City, 518052,
P. R. China

IC Registration No.: 10320A -1

FCC Registration No.: 502708

Telephone: 86 755 8828 6998
Fax: 86 755 8828 5299

3 Description of the Equipment Under Test

Product:	Smart body scale(HiMirror)
Model no.:	BS616
FCC ID:	2AA2U-BS616
Options and accessories:	Nil
Rating:	3.7VDC,3000mAh (Supplied by internal lithium battery) or a separate approved AC/DC adaptor) AC/DC adaptor (M/N: EM1005AHUS-050) with following ratings: Input: 100-240VAC, 50-60Hz, 0.6-0.3A; Output: 5.0VDC, 1.2A
RF Transmission Frequency:	2402MHz-2480MHz
No. of Operated Channel:	40
Modulation:	GFSK
Antenna Type:	Integrated antenna
Antenna Gain:	0dBi
Description of the EUT:	The Equipment Under Test (EUT) is Smart body scale(HiMirror) operated at 2.4GHz

4 Summary of Test Standards

Test Standards	
FCC Part 15 Subpart C 10-1-2015 Edition	PART 15 - RADIO FREQUENCY DEVICES Subpart C - Intentional Radiators

All the test methods were according to FCC KDB 558074 DTS Meas Guidance and ANSI C63.10-2013.

5 Summary of Test Results

Technical Requirements			
FCC Part 15 Subpart C			
Test Condition		Pages	Test Result
§15.207	Conducted emission AC power port	10	Pass
§15.247(b)(1)	Conducted peak output power	13	Pass
§15.247(e)	Power spectral density*	15	Pass
§15.247(a)(2)	6dB bandwidth	17	Pass
§15.247(a)(1)	20dB bandwidth and 99% Occupied Bandwidth	--	N/A
§15.247(a)(1)	Carrier frequency separation	--	N/A
§15.247(a)(1)(iii)	Number of hopping frequencies	--	N/A
§15.247(a)(1)(iii)	Dwell Time	--	N/A
§15.247(d)	Spurious RF conducted emissions	19	Pass
§15.247(d)	Band edge	23	Pass
§15.247(d) & §15.209 &	Spurious radiated emissions for transmitter and receiver	25	Pass
§15.203	Antenna requirement	See note 1	Pass

Note 1: N/A=Not Applicable.

Note 2: The EUT uses an integrated antenna, which gain is 0dBi. In accordance to §15.203, it is considered sufficiently to comply with the provisions of this section.

6 General Remarks

Remarks

This submittal(s) (test report) is intended for FCC ID: 2AA2U-BS616 complies with Section 15.205, 15.209, 15.247 of the FCC Part 15, Subpart C.

This report is for the BT 4.0 part.

SUMMARY:

All tests according to the regulations cited on page 5 were

■ - Performed

□ - **Not** Performed

The Equipment Under Test

■ - **Fulfills** the general approval requirements.

□ - **Does not** fulfill the general approval requirements.

Sample Received Date: July 25, 2016

Testing Start Date: July 25, 2016

Testing End Date: July 27, 2016

- TÜV SÜD CERTIFICATION AND TESTING (CHINA) CO., LTD. SHENZHEN BRANCH -

Reviewed by:



Phoebe Hu
EMC Project Manager



Prepared by:




Aaron Lai
EMC Project Engineer


7 Test Setups

7.1 Radiated test setups


Below 1GHz

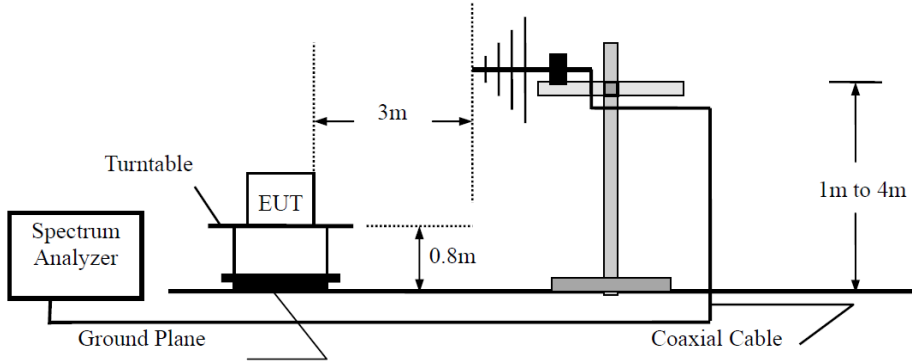


Above 1GHz

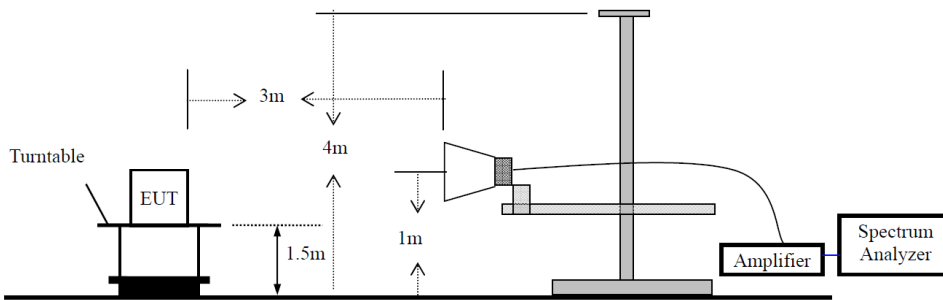

7.2 Conducted RF test setups



7.3 AC Power Line Conducted Emission test setups

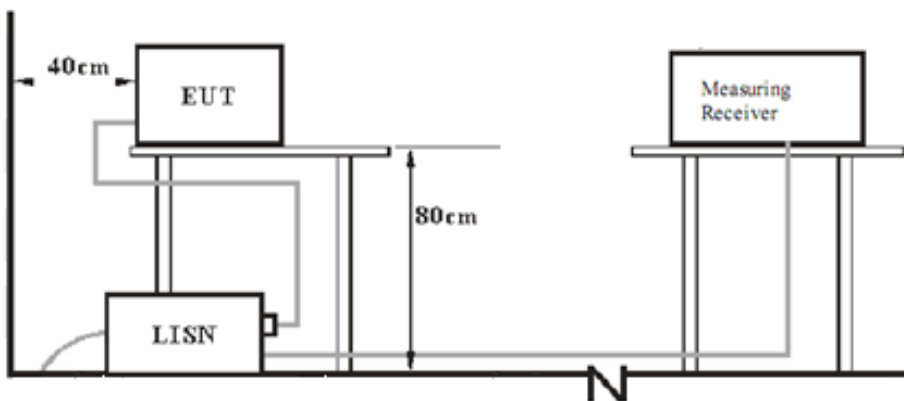

8 Systems test configuration

Auxiliary Equipment Used during Test:

DESCRIPTION	MANUFACTURER	MODEL NO.(SHIELD)	S/N(LENGTH)
PC	Lenovo	X220	---

Test software: NFgo_Studio, which used to control the EUT in, continues transmitting mode

9 Technical Requirement

9.1 Conducted Emission

Test Method


1. The EUT was placed on a table, which is 0.8m above ground plane
2. The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.).
3. Maximum procedure was performed to ensure EUT compliance
4. A EMI test receiver is used to test the emissions from both sides of AC line

Limit

Frequency MHz	QP Limit dB μ V	AV Limit dB μ V
0.150-0.500	66-56*	56-46*
0.500-5	56	46
5-30	60	50

Conducted Emission


EUT: Smart body scale(HiMirror)
 M/N: BS616
 Operating Condition: TX + Charging
 Test Specification: Power Line, L
 Comment: AC120V/60Hz

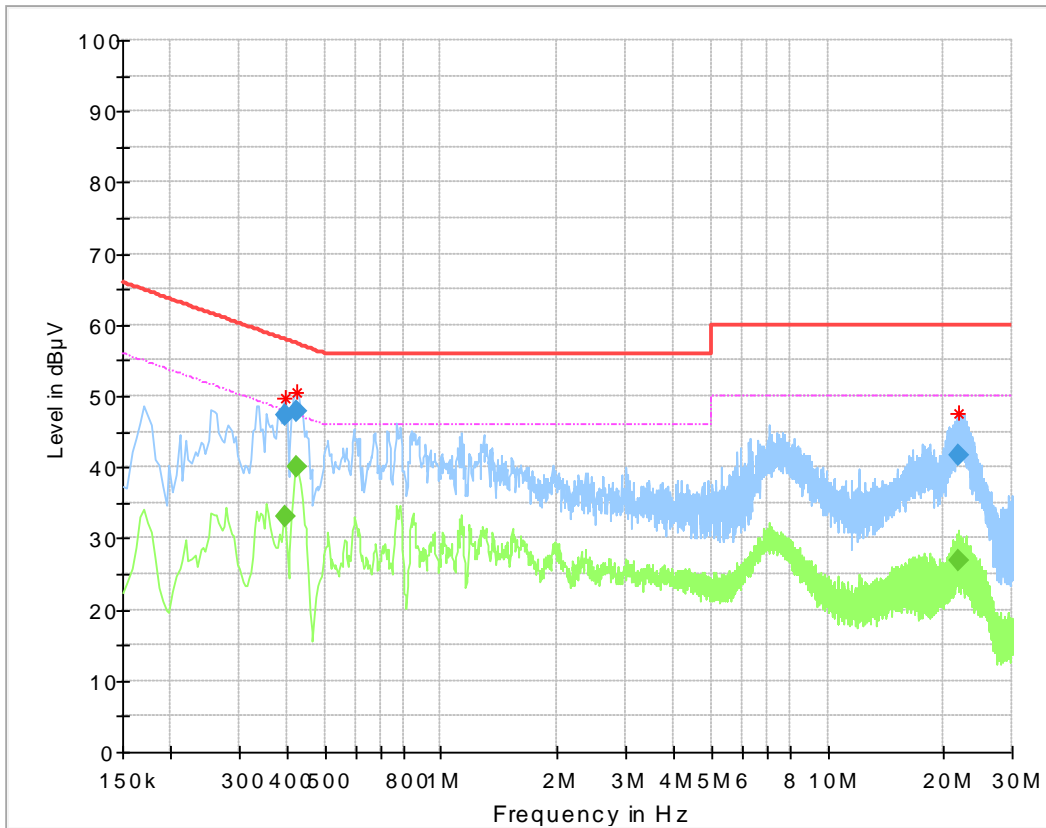

Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Line
0.393500	---	33.11	47.99	14.88	L1
0.393500	47.24	---	57.99	10.75	L1
0.421500	---	40.08	47.42	7.34	L1
0.421500	47.92	---	57.42	9.50	L1
21.753500	---	26.91	50.00	23.09	L1
21.753500	41.64	---	60.00	18.36	L1

Conducted Emission

EUT: Smart body scale(HiMirror)
 M/N: BS616
 Operating Condition: TX + Charging
 Test Specification: Power Line, N
 Comment: AC120V/60Hz

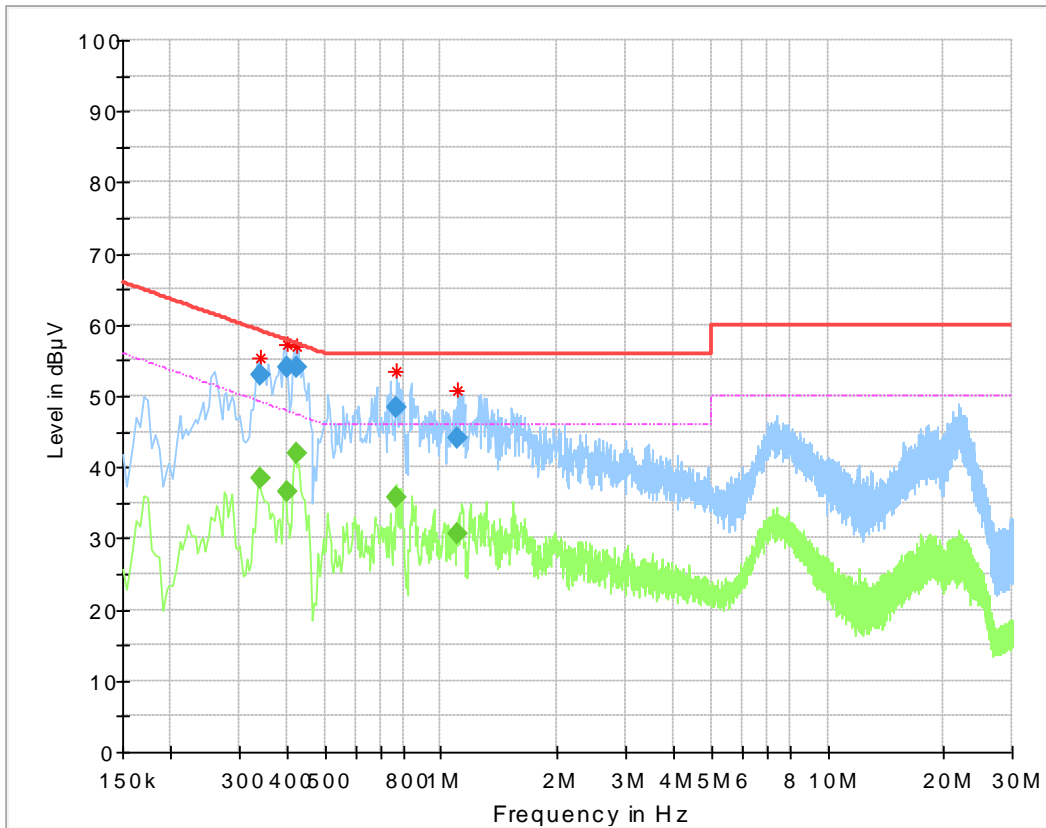

Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Line
0.341500	---	38.45	49.17	10.72	N
0.341500	53.04	---	59.17	6.13	N
0.398500	---	36.50	47.88	11.38	N
0.398500	54.04	---	57.88	3.84	N
0.421500	---	42.06	47.42	5.36	N
0.421500	54.10	---	57.42	3.32	N
0.765500	---	35.63	46.00	10.37	N
0.765500	48.49	---	56.00	7.51	N
1.101500	---	30.62	46.00	15.38	N
1.101500	44.19	---	56.00	11.81	N

9.2 Conducted peak output power

Test Method

1. Use the following spectrum analyzer settings:
Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel
RBW > the 20 dB bandwidth of the emission being measured, VBW ≥ RBW,
Sweep = auto, Detector function = peak, Trace = max hold
2. Add a correction factor to the display.
3. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power


Limits

Frequency Range MHz	Limit W	Limit dBm
2400-2483.5	≤1	≤30


Conducted peak output power

BT 4.0 Bluetooth Mode GFSK modulation Test Result


Frequency MHz	Conducted Peak Output Power dBm	Result
Low channel 2402MHz	-7.27	Pass
Middle channel 2440MHz	-6.45	Pass
High channel 2480MHz	-6.57	Pass

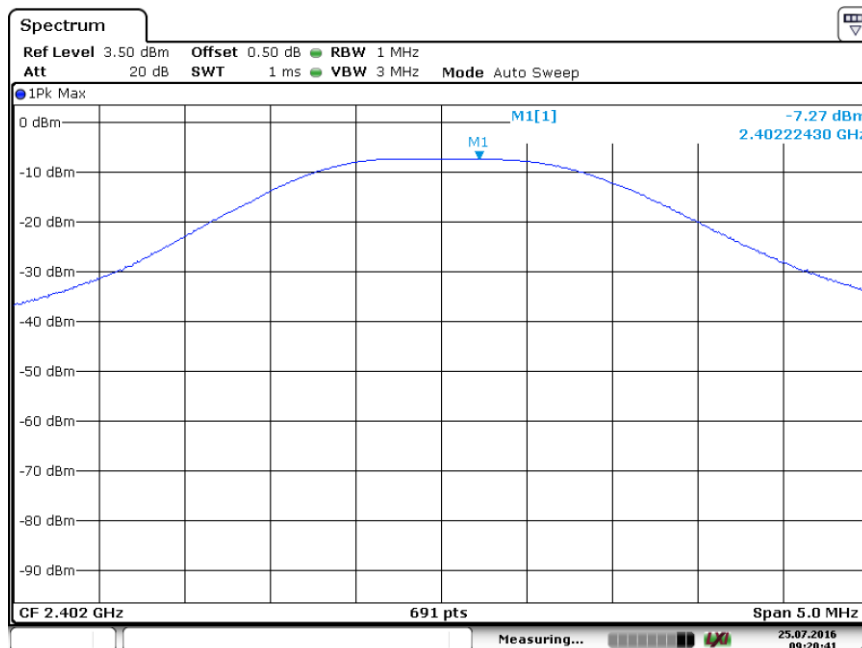

Low channel 2402MHz

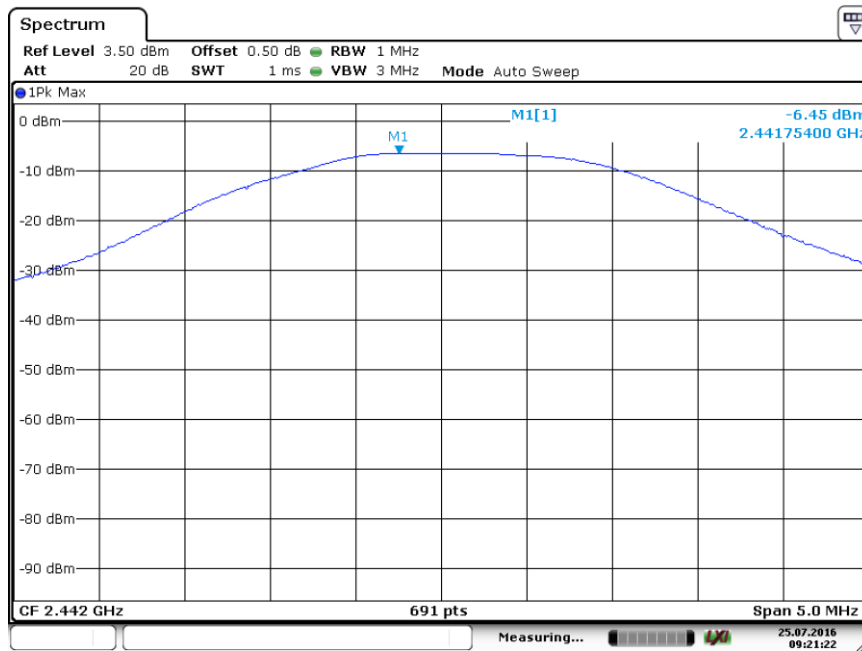

Middle channel 2440MHz

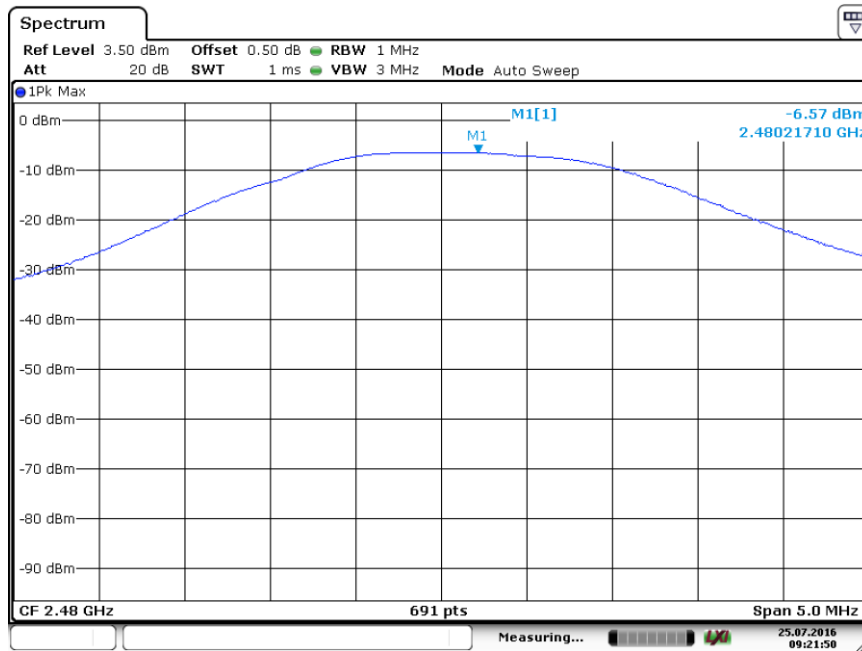

High channel 2480MHz

9.3 Power spectral density

Test Method

This procedure shall be used if maximum peak conducted output power was used to demonstrate compliance:

1. Set analyzer center frequency to DTS channel center frequency.
RBW=3kHz,VBW≥3RBW,Span=1.5 times DTS bandwidth, Detector=Peak, Sweep=auto, Trace= max hold
2. Allow trace to fully stabilize, use the peak marker function to determine the maximum amplitude level within the RBW.
3. Repeat above procedures until other frequencies measured were completed


Limit



Limit [dBm]

≤8

BT 4.0 Bluetooth Mode GFSK modulation Test Result

Frequency MHz	Power spectral density	Limit dBm	Result
2402	-19.91	8	Pass
2440	-19.40	8	Pass
2480	-20.14	8	Pass

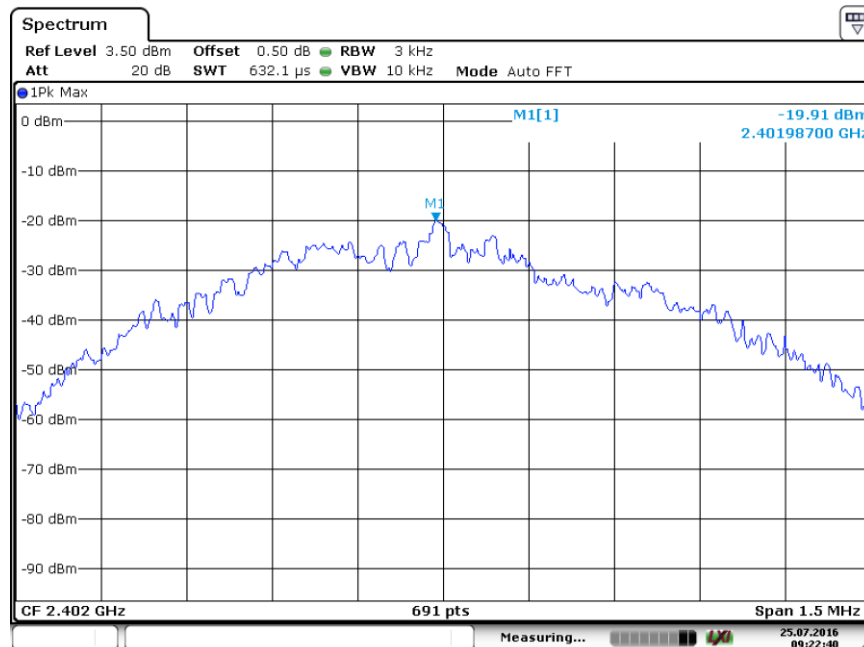

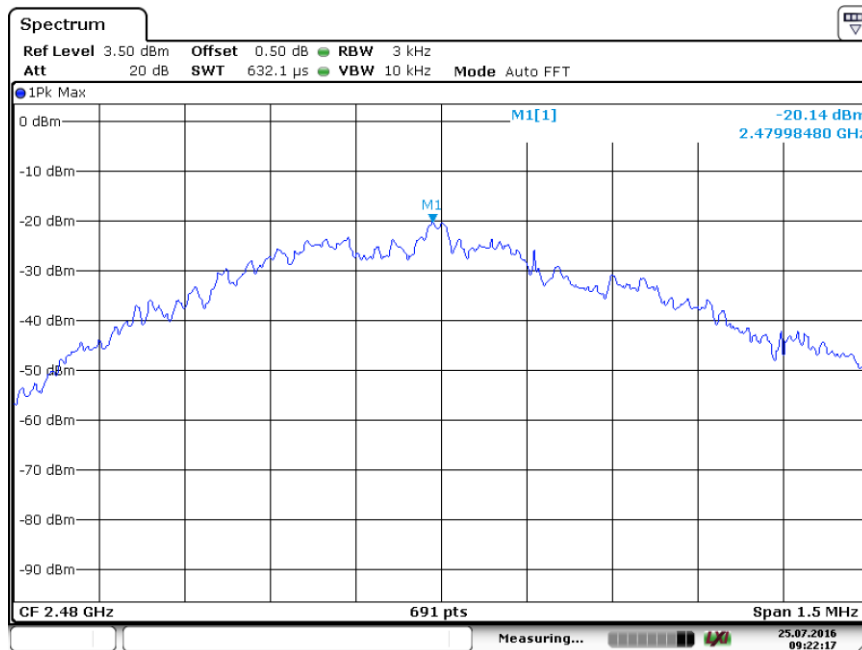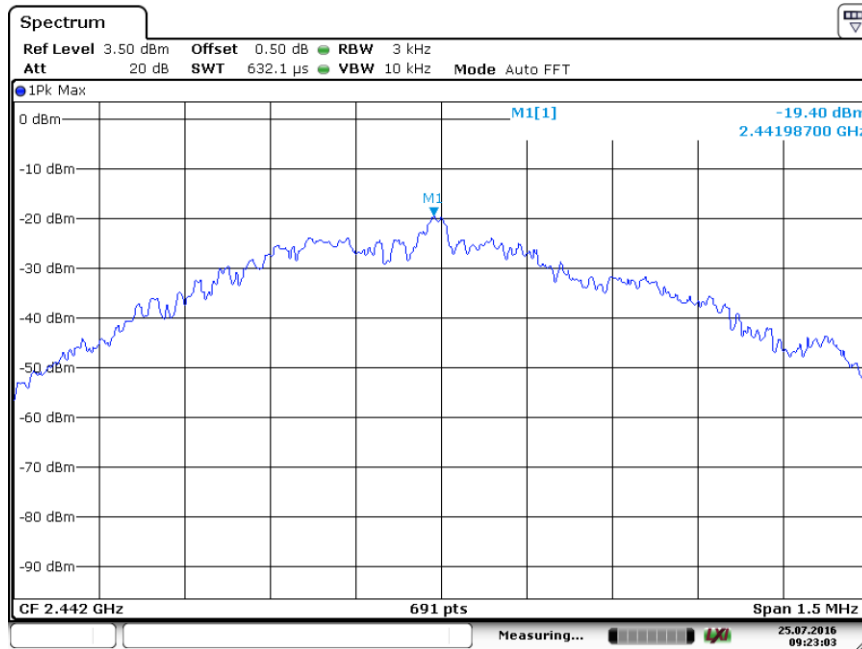

9.4 6 dB Bandwidth and 99% Occupied Bandwidth

Test Method

1. Use the following spectrum analyzer settings:
RBW=100K, VBW≥3RBW, Sweep = auto, Detector function = peak, Trace = max hold
2. Use the automatic bandwidth measurement capability of an instrument, may be employed using the X dB bandwidth mode with X set to 6 dB, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be ≥ 6 dB.
3. Allow the trace to stabilize, record the X dB Bandwidth value.


Limit

Limit [kHz]

≥500


BT 4.0 Bluetooth Mode GFSK modulation Test Result

Frequency MHz	6 dB Bandwidth kHz	99%Bandwidth kHz	Limit kHz	Result
2402	629.50	1180.89	500	Pass
2440	633.90	1532.56	500	Pass
2480	633.90	1532.56	500	Pass

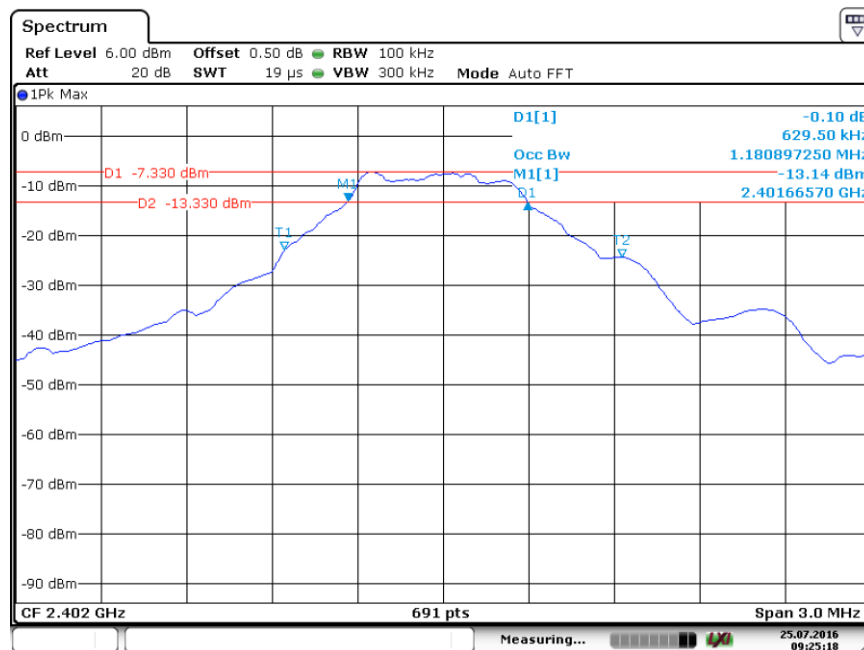


Low channel 2402MHz

6 dB Bandwidth

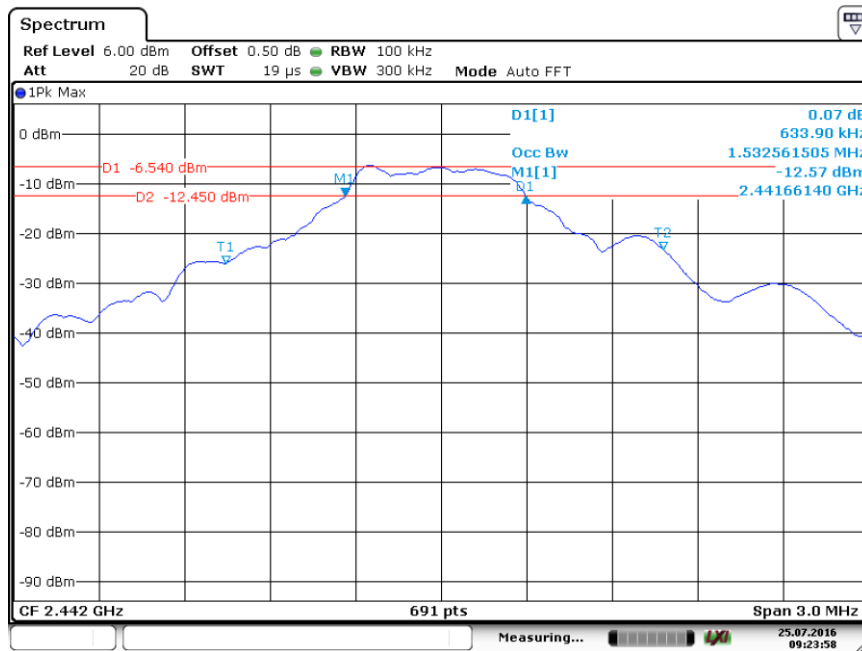

Middle channel 2440MHz

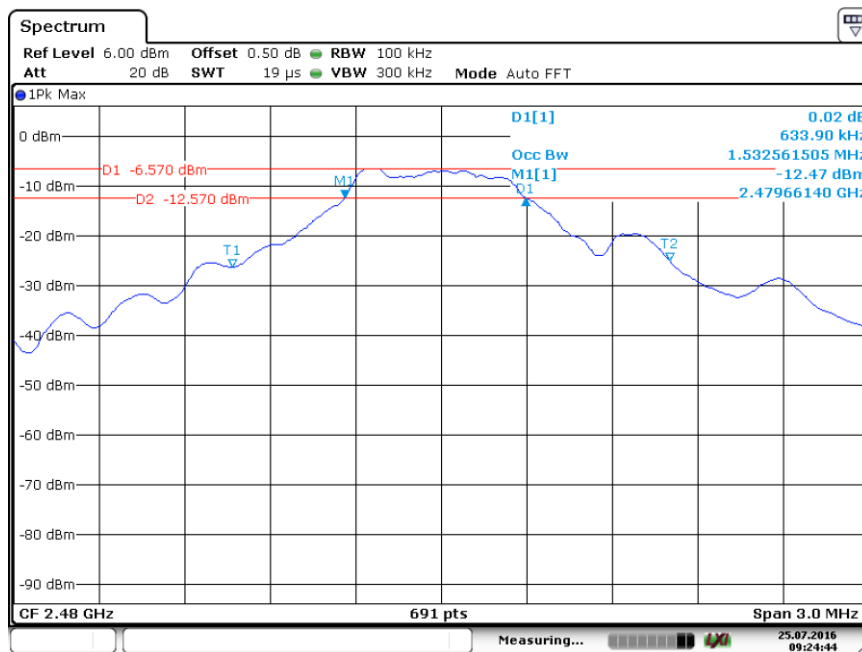

High channel 2480MHz

9.5 Spurious RF conducted emissions

Test Method


1. Use the following spectrum analyzer settings:
Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.
RBW = 100 kHz, VBW \geq RBW, Sweep = auto, Detector function = peak, Trace = max hold
2. Allow the trace to stabilize. Set the marker on the peak of any spurious emission recorded.
3. The level displayed must comply with the limit specified in this Section. Submit these plots.
4. Repeat above procedures until all frequencies measured were complete.

Limit


Frequency Range MHz	Limit (dBc)
30-25000	-20

Spurious RF conducted emissions

BT4.0 GFSK Modulation:
2402MHz

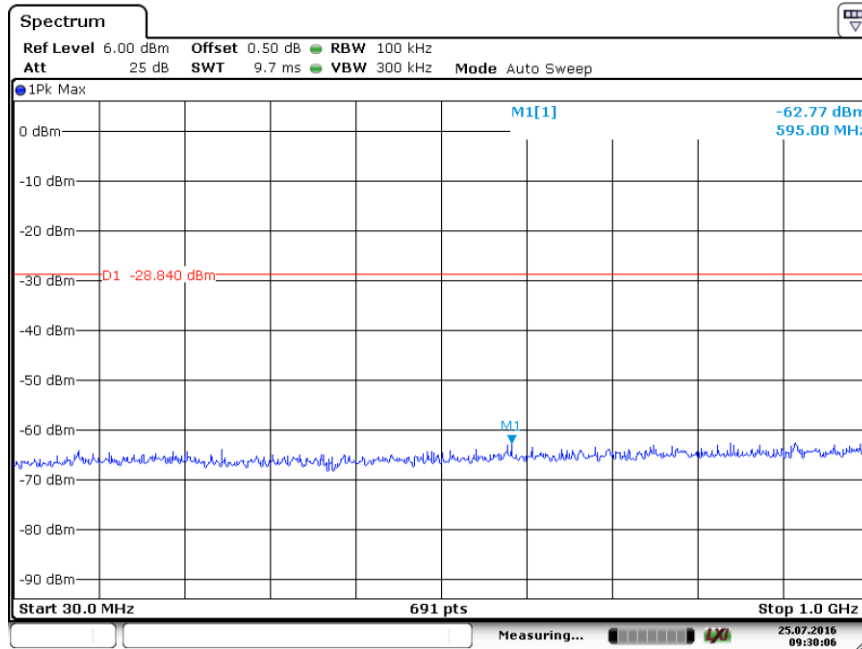


30MHz – 1GHz

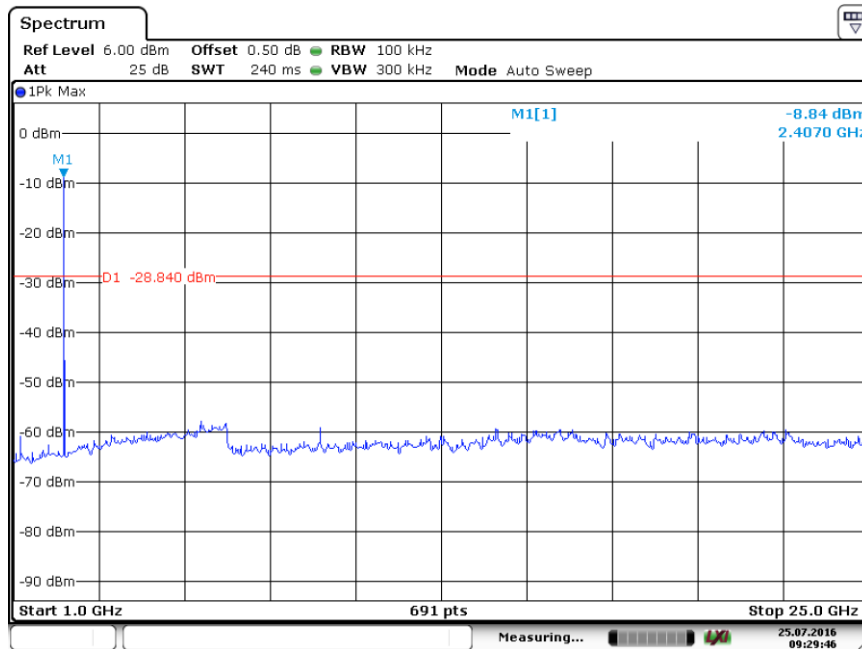


1GHz – 25GHz

2440MHz

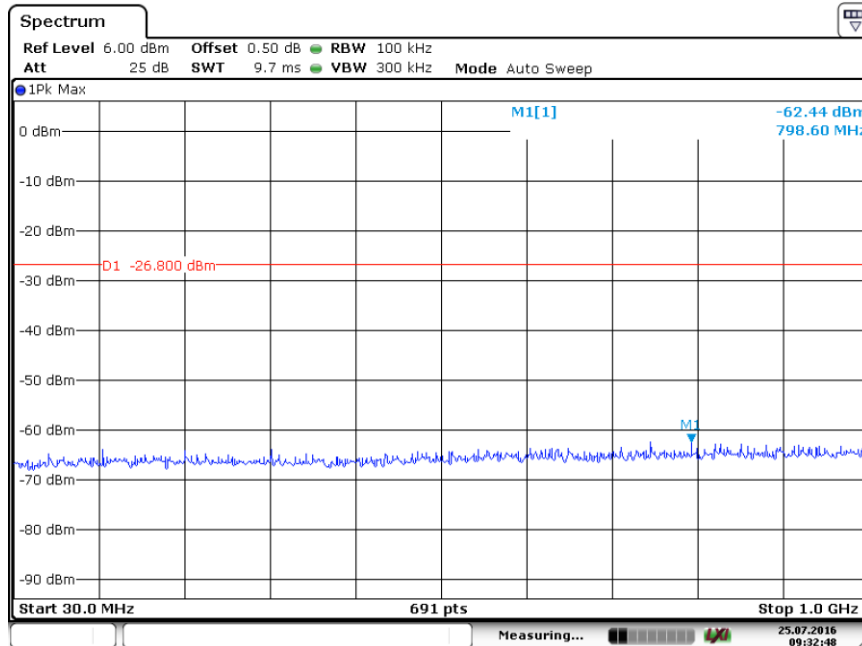


30MHz – 1GHz

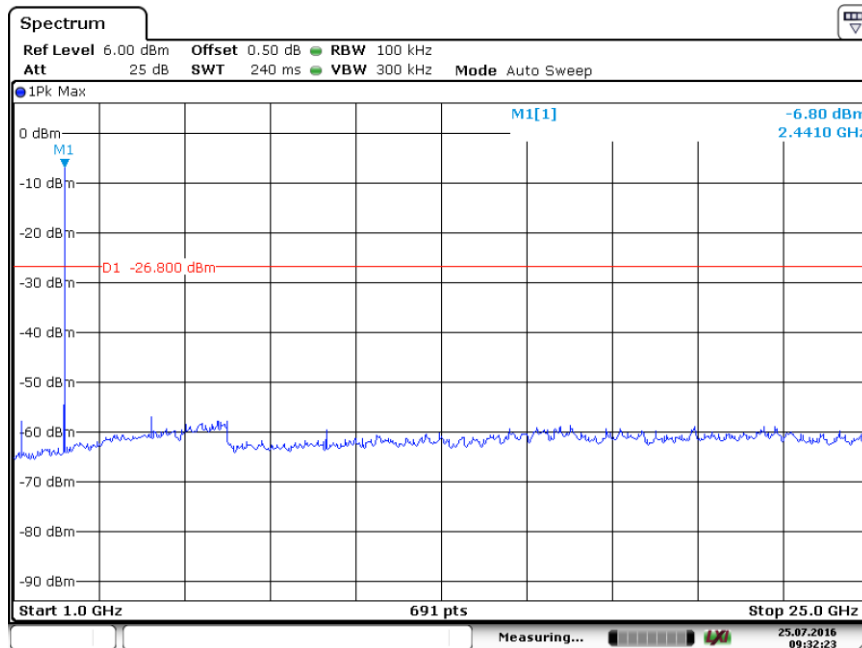


1GHz – 25GHz

2480MHz

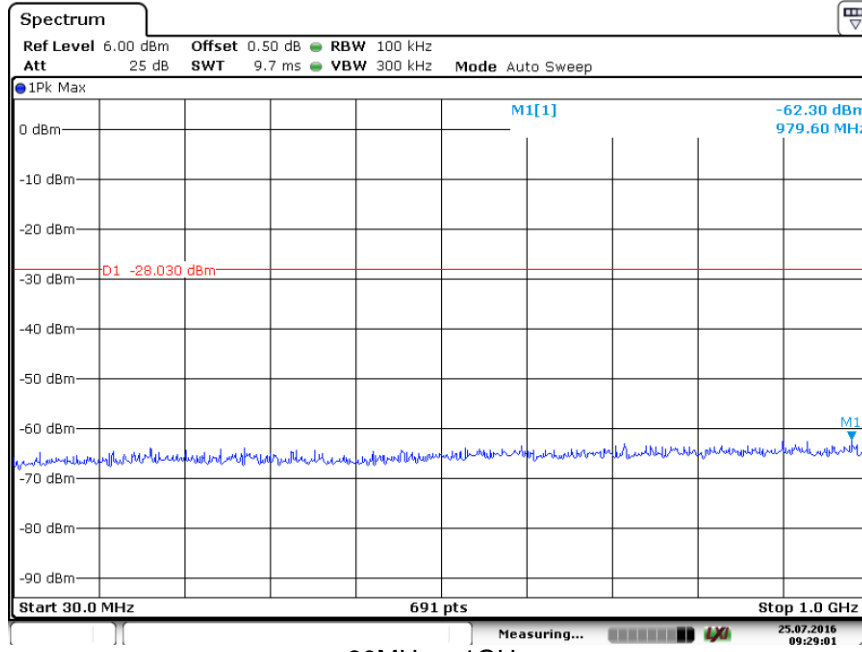

30MHz – 1GHz

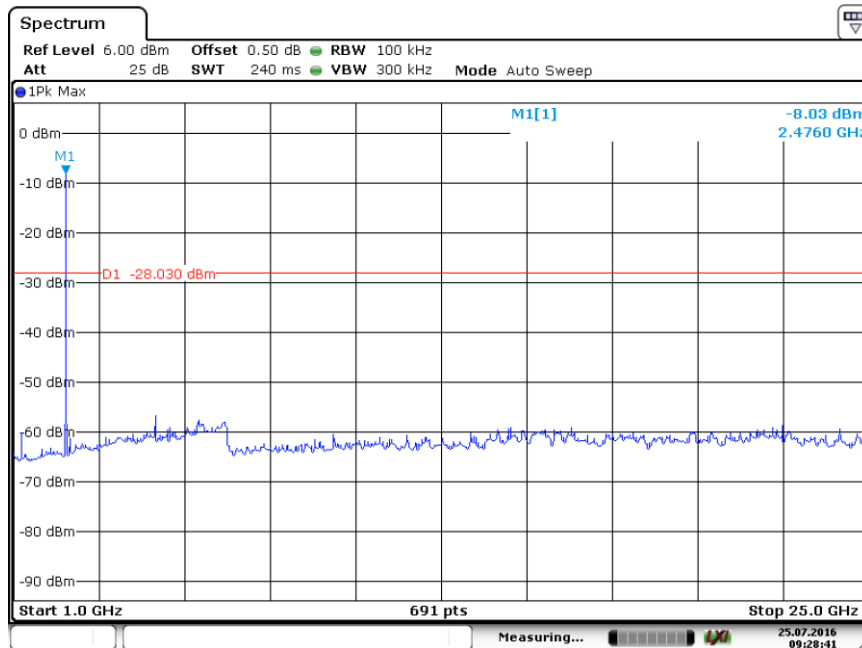

1GHz – 25GHz

9.6 Band edge testing

Test Method



- 1 Use the following spectrum analyzer settings:
Span = wide enough to capture the peak level of the in-band emission and all spurious
RBW = 100 kHz, VBW \geq RBW, Sweep = auto, Detector function = peak, Trace = max hold
- 2 Allow the trace to stabilize, use the peak and delta measurement to record the result.
- 3 The level displayed must comply with the limit specified in this Section. .
- 4 Repeat the test at the hopping off and hopping on mode, submit all the plots.

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits.

Band edge testing

BT4.0 GFSK Modulation Test Result

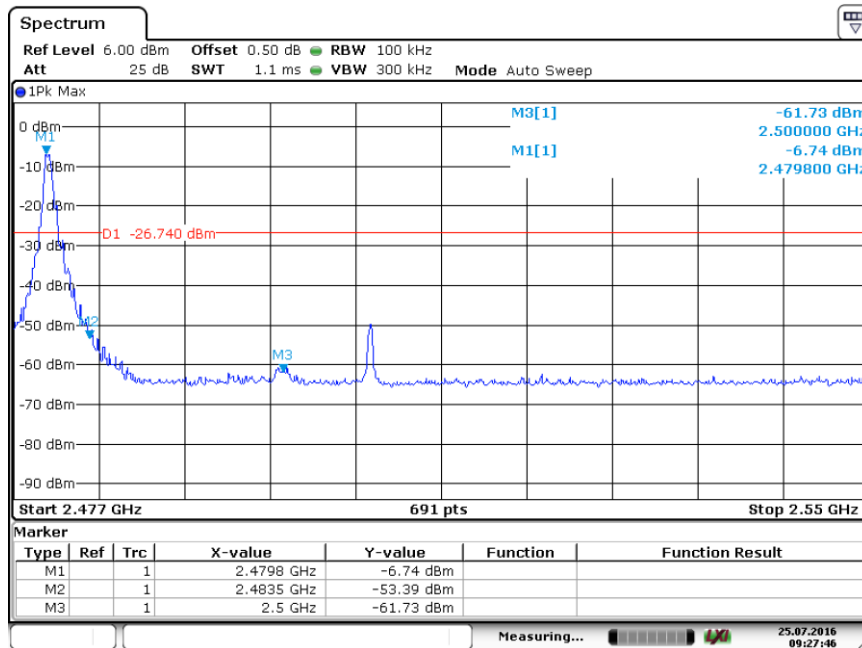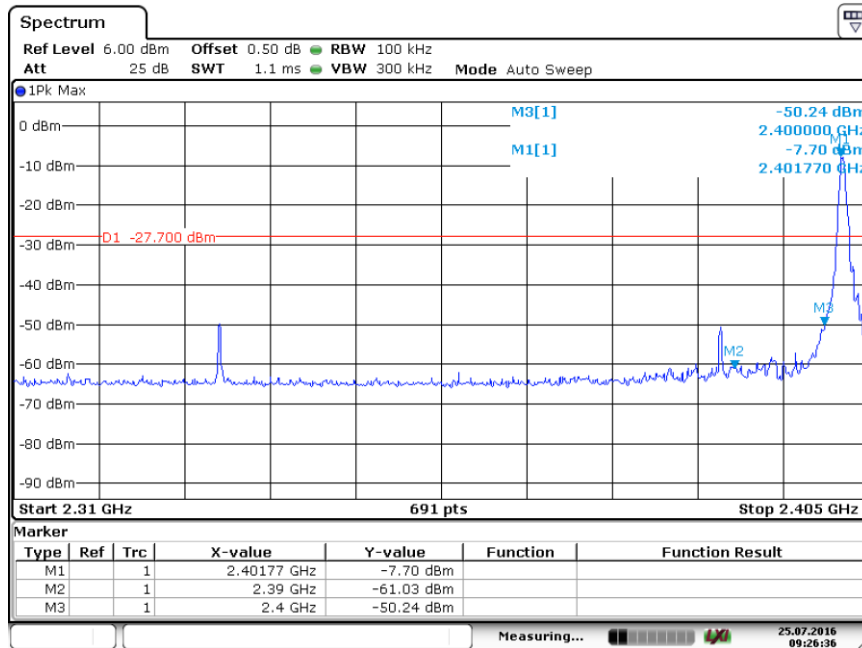

9.7 Spurious radiated emissions for transmitter

Test Method

- 1: The EUT was placed on a turn table which is 1.5m above ground plane for above 1GHz and 0.8m above ground for below 1GHz at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- 2: The EUT was set 3 meters away from the interference – receiving antenna, which was mounted on the top of a variable – height antenna tower.
- 3: The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- 4: For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- 5: Use the following spectrum analyzer settings According to C63.10:

For Above 1GHz

Span = wide enough to capture the peak level of the in-band emission and all spurious
RBW = 1MHz, VBW \geq RBW for peak measurement and VBW = 10Hz for average measurement, Sweep = auto, Detector function = peak, Trace = max hold.

For Below 1GHz

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious
RBW = 100 KHz, VBW \geq RBW for peak measurement, Sweep = auto, Detector function = peak, Trace = max hold.

Note:

- 1: The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 KHz for Quasi-peak detection (QP) at frequency below 1GHz.
- 2: The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 3MHz for peak detection (PK) at frequency above 1GHz.
- 3: The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 3MHz for RMS Average ((duty cycle < 98%) for Average detection (AV) at frequency above 1GHz, then the measurement results was added to a correction factor ($20\log(1/\text{duty cycle})$).
- 4: The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz (duty cycle > 98%) for Average detection (AV) at frequency above 1GHz.

Limit

The radio emission outside the operating frequency band shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power. Radiated emissions which fall in the restricted bands, as defined in section 15.205, must comply with the radiated emission limits specified in section 15.209.

Frequency MHz	Field Strength uV/m	Field Strength dBµV/m	Detector
30-88	100	40	QP
88-216	150	43.5	QP
216-960	200	46	QP
960-1000	500	54	QP
Above 1000	500	54	AV
Above 1000	5000	74	PK

Spurious radiated emissions for transmitter

According to C63.10, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement, so AV emission value did not show in below table if the peak value complies with average limit.

Transmitting spurious emission test result as below:

BT4.0 GFSK Modulation 2402MHz Test Result

Frequency band	Frequency	Emission Level	Polarization	Limit	Detector	Margin	Result
	MHz	dBuV/m		dBuV/m		dBuV/m	
30-1000MHz	43.25	22.35	H	40.0	QP	17.65	Pass
	863.52	28.90	V	46.0	QP	17.10	Pass
1000-25000MHz	9807.50	42.33	H	74	PK	31.67	Pass
	8442.50 ^{“**”}	39.95	V	74	PK	34.05	Pass

BT4.0 GFSK Modulation 2440MHz Test Result

Frequency band	Frequency	Emission Level	Polarization	Limit	Detector	Margin	Result
	MHz	dBuV/m		dBuV/m		dBuV/m	
30-1000MHz	--	--	H	43.5	QP	--	Pass
	--	--	H	46	QP	--	Pass
1000-25000MHz	7483.00 ^{“**”}	39.07	H	74	PK	34.93	Pass
	7477.00 ^{“**”}	39.18	V	74	PK	34.82	Pass

BT4.0 GFSK Modulation 2480MHz Test Result

Frequency band	Frequency	Emission Level	Polarization	Limit	Detector	Margin	Result
	MHz	dBuV/m		dBuV/m		dBuV/m	
30-1000MHz	--	--	H	43.5	QP	--	Pass
	--	--	H	46	QP	--	Pass
1000-25000MHz	7532.00 ^{“**”}	39.93	H	74	PK	34.07	Pass
	8730.50	40.86	H	74	PK	33.14	Pass

Remark:

- (1) Data of measurement within this frequency range shown "--" in the table above means the reading of emissions are attenuated more than 20db below the permissible limits or the field strength is too small to be measured.
- (2) "**" means the emission(s) appear within the restrict bands shall follow the requirement of section 15.205.

10 Test Equipment List

List of Test Instruments

	DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.	CAL. DUE DATE
C	Signal Generator	Rohde & Schwarz	SMB100A	108272	2017-7-15
	Signal Analyzer	Rohde & Schwarz	FSV40	101030	2017-7-15
	Vector Signal Generator	Rohde & Schwarz	SMU 200A	105324	2017-7-15
	RF Switch Module	Rohde & Schwarz	OSP120/OS P-B157	101226/10085 1	2017-7-15
RE	EMI Test Receiver	Rohde & Schwarz	ESR 26	101269	2017-7-15
	Trilog Super Broadband Test Antenna	Schwarzbeck	VULB 9163	707	2017-8-13
	Horn Antenna	Rohde & Schwarz	HF907	102294	2017-7-24
	Pre-amplifier	Rohde & Schwarz	SCU 18	102230	2017-7-15
	3m Semi-anechoic chamber	TDK	9X6X6	----	2019-5-29

C - Conducted RF tests

- Conducted peak output power
- 6dB bandwidth
- Power spectral density*
- Spurious RF conducted emissions
- Band edge

11 System Measurement Uncertainty

For a 95% confidence level, the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 were:

System Measurement Uncertainty	
Test Items	Extended Uncertainty
Uncertainty for Radiated Emission in 3m chamber 30MHz-1000MHz	Horizontal: 4.83dB; Vertical: 4.91dB;
Uncertainty for Radiated Emission in 3m chamber 1000MHz-18000MHz	Horizontal: 4.89dB; Vertical: 4.88dB;
Uncertainty for Conducted Emission 150KHz-30MHz	U=3.5dB(k=2)