

TEST REPORT

Reference No..... : WTD20X07050639W-2
FCC ID : 2AA3H-S6064
Applicant : Shenzhen 3Nod Digital Technology Co., Ltd.
Address : WORKSHOP 15,ZHONGFU ROAD,TANGXIAYONG
COMMUNITY,SONGGANG NEIGHBOURHOOD,BAOAN
DISTRICT,SHENZHEN CITY Guangdong 518105
Product Name : onn 5.1.2 Atmos Soundbar, Onn 5.1.2 Atmos Soundbar
Test Model. : 100002634
Standards : FCC Part 15C
Date of Receipt sample : Jul.30, 2020
Date of Test..... : Jul.30, 2020 to Aug.17, 2020
Date of Issue : Aug.17, 2020
Test Result..... : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

Prepared By:

Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road,
Block 70 Bao'an District, Shenzhen, Guangdong, China

Tel.: +86-755-33663308


Fax.: +86-755-33663309

Tested by:

Reviewed By:

Approved & Authorized By:


Mike Shi / Project Engineer

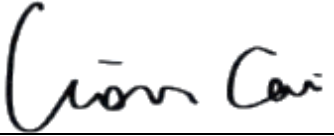
Lion Cai / RF Manager


Silin Chen / Manager

TABLE OF CONTENTS

1. GENERAL INFORMATION	4
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	4
1.2 TEST STANDARDS.....	5
1.3 TEST METHODOLOGY.....	5
1.4 TEST FACILITY.....	5
1.5 EUT SETUP AND TEST MODE.....	6
1.6 MEASUREMENT UNCERTAINTY.....	7
1.7 TEST EQUIPMENT LIST AND DETAILS.....	8
2. SUMMARY OF TEST RESULTS	10
3. RF EXPOSURE	11
3.1 STANDARD APPLICABLE.....	11
3.2 TEST RESULT.....	11
4. ANTENNA REQUIREMENT	12
4.1 STANDARD APPLICABLE.....	12
4.2 EVALUATION INFORMATION.....	12
5. FIELD STRENGTH OF SPURIOUS EMISSIONS	13
5.1 STANDARD APPLICABLE.....	13
5.2 TEST PROCEDURE.....	13
5.3 CORRECTED AMPLITUDE & MARGIN CALCULATION.....	15
5.4 SUMMARY OF TEST RESULTS/PLOTS.....	15
6. CONDUCTED EMISSIONS	22
6.1 TEST PROCEDURE.....	22
6.2 BASIC TEST SETUP BLOCK DIAGRAM.....	22
6.3 TEST RECEIVER SETUP.....	22
6.4 SUMMARY OF TEST RESULTS/PLOTS.....	22

Report version

Version No.	Date of issue	Description
Rev.00	Aug.17, 2020	Original
/	/	/

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Applicant: Shenzhen 3Nod Digital Technology Co., Ltd.
 Address of applicant: WORKSHOP 15,ZHONGFU ROAD,TANGXIAYONG
 COMMUNITY,SONGGANG NEIGHBOURHOOD,BAOAN
 DISTRICT,SHENZHEN CITY Guangdong 518105

Manufacturer: Shenzhen 3Nod Digital Technology Co., Ltd.
 Address of manufacturer: WORKSHOP 15,ZHONGFU ROAD,TANGXIAYONG
 COMMUNITY,SONGGANG NEIGHBOURHOOD,BAOAN
 DISTRICT,SHENZHEN CITY Guangdong 518105

General Description of EUT	
Product Name:	onn 5.1.2 Atmos Soundbar, Onn 5.1.2 Atmos Soundbar
Trade Name:	/
Model No.:	100002634
Adding Model(s):	/
Rated Voltage:	AC120V/60Hz
Power Adapter Model:	/
<i>Note: The test data is gathered from a production sample provided by the manufacturer.</i>	

Technical Characteristics of EUT	
Support Standards:	802.11b, 802.11g, 802.11n
Frequency Range:	2412-2462MHz for 802.11b/g/n(HT20) 2422-2452MHz for 802.11n(HT40)
RF Output Power:	20.7dBm (Conducted)
Type of Modulation:	DBPSK,BPSK,DQPSK,QPSK,16QAM,64QAM
Data Rate:	1-11Mbps, 6-54Mbps, up to 300Mbps
Quantity of Channels:	11 for 802.11b/g/n(HT20); 7 for 802.11n(HT40)
Channel Separation:	5MHz
Type of Antenna:	Integral Antenna
Antenna Gain:	3.4dBi

1.2 Test Standards

The tests were performed according to following standards:

FCC Rules Part 15.247: Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz.

558074 D01 15.247 Meas Guidance v05r02: Guidance for Compliance Measurements on Digital Transmission System, Frequency Hopping Spread Spectrum System, and Hybrid System Devices Operating under section 15.247 of the Fcc rules.

662911 D01 Multiple Transmitter Output v02r01: Emissions Testing of Transmitters with Multiple Outputs in the Same Band.

ANSI C63.10-2013: American National Standard for Testing Unlicensed Wireless Devices.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, KDB 558074 D01 15.247 Meas Guidance v05r02, KDB 662911 D01 Multiple Transmitter Output v02r01

The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted accordingly in reference to the Operating Instructions.

1.4 Test Facility

Address of the test laboratory

Laboratory: Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road, Block 70 Bao'an District, Shenzhen, Guangdong, China

FCC – Registration No.: 125990

Waltek Testing Group (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. The Designation Number is CN5010, and Test Firm Registration Number is 125990.

Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Waltek Testing Group (Shenzhen) Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

1.5 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, with a duty cycle equal to 100%, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	802.11b	Low:2412MHz, Middle:2437MHz,High:2462MHz
TM2	802.11g	Low:2412MHz, Middle:2437MHz,High:2462MHz
TM3	802.11n-HT20	Low:2412MHz, Middle:2437MHz,High:2462MHz
TM4	802.11n-HT40	Low:2422MHz, Middle:2437MHz,High:2452MHz

Test Conditions	
Temperature:	22~25 °C
Relative Humidity:	50~55 %.
ATM Pressure:	1019 mbar

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/		

Special Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
/	/	/	/

1.6 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
RF Output Power	Conducted	$\pm 0.42\text{dB}$
Occupied Bandwidth	Conducted	$\pm 1.5\%$
Power Spectral Density	Conducted	$\pm 1.8\text{dB}$
Conducted Spurious Emission	Conducted	$\pm 2.17\text{dB}$
Conducted Emissions	Conducted	9-150kHz $\pm 3.74\text{dB}$
		0.15-30MHz $\pm 3.34\text{dB}$
Transmitter Spurious Emissions	Radiated	30-200MHz $\pm 4.52\text{dB}$
		0.2-1GHz $\pm 5.56\text{dB}$
		1-6GHz $\pm 3.84\text{dB}$
		6-18GHz $\pm 3.92\text{dB}$

1.7 Test Equipment List and Details

No.	Description	Manufacturer	Model	Serial No.	Cal Date	Due Date
SEMT-1072	Spectrum Analyzer	Agilent	E4407B	MY41440400	2020-04-28	2021-04-27
SEMT-1031	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2020-04-28	2021-04-27
SEMT-1007	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2020-04-28	2021-04-27
SEMT-1008	Amplifier	Agilent	8447F	3113A06717	2020-04-28	2021-04-27
SEMT-1043	Amplifier	C&D	PAP-1G18	2002	2020-04-28	2021-04-27
SEMT-1011	Broadband Antenna	Schwarz beck	VULB9163	9163-333	2019-05-05	2021-05-04
SEMT-1042	Horn Antenna	ETS	3117	00086197	2019-05-05	2021-05-04
SEMT-1121	Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170582	2019-05-05	2021-05-04
SEMT-1069	Loop Antenna	Schwarz beck	FMZB 1516	9773	2019-05-05	2021-05-04
SEMT-1001	EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2020-04-28	2021-04-27
SEMT-1003	L.I.S.N	Schwarz beck	NSLK8126	8126-224	2020-04-28	2021-04-27
SEMT-1002	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2020-04-28	2021-04-27
SEMT-1168	Pre-amplifier	Direction Systems Inc.	PAP-0126	14141-12838	2020-04-28	2021-04-27
SEMT-1169	Pre-amplifier	Direction Systems Inc.	PAP-2640	14145-14153	2020-04-28	2021-04-27
SEMT-1163	Spectrum Analyzer	Rohde & Schwarz	FSP40	100612	2020-04-28	2021-04-27
SEMT-1170	DRG Horn Antenna	A.H. SYSTEMS	SAS-574	571	2019-05-05	2021-05-04
SEMT-1166	Power Limiter	Agilent	N9356B	MY45450376	2020-04-28	2021-04-27
SEMT-1048	RF Limiter	ATTEN	AT-BSF-2400~2500	/	2020-04-28	2021-04-27
SEMT-1076	RF Switcher	Top Precision	RCS03-A2	/	2020-04-28	2021-04-27
SEMT-C001	Cable	Zheng DI	LL142-07-07-10M(A)	/	2020-03-17	2021-03-16
SEMT-C002	Cable	Zheng DI	ZT40-2.92J-2.92J-6M	/	2020-03-17	2021-03-16
SEMT-C003	Cable	Zheng DI	ZT40-2.92J-2.92J-2.5M	/	2020-03-17	2021-03-16
SEMT-C004	Cable	Zheng DI	2M0RFC	/	2020-03-17	2021-03-16
SEMT-C005	Cable	Zheng DI	1M0RFC	/	2020-03-17	2021-03-16
SEMT-C006	Cable	Zheng DI	1M0RFC	/	2020-03-17	2021-03-16

Software List			
Description	Manufacturer	Model	Version
EMI Test Software (Radiated Emission)*	Farad	EZ-EMC	RA-03A1
EMI Test Software (Conducted Emission)*	Farad	EZ-EMC	RA-03A1

*Remark: indicates software version used in the compliance certification testing

2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test Item	Result
§2.1091	RF Exposure	Compliant
§15.203; §15.247(b)(4)(i)	Antenna Requirement	Compliant
§15.205	Restricted Band of Operation	N/A
§15.207(a)	Conducted Emission	Compliant
§15.247(e)	Power Spectral Density	N/A
§15.247(a)(2)	DTS Bandwidth	N/A
§15.247(b)(3)	RF Output Power	N/A
§15.209(a)	Radiated Emission	Compliant
§15.247(d)	Band Edge (Out of Band Emissions)	N/A

Note: 1. N/A: Not applicable

2. This report is apply C2PC, Only do partial test(RF Exposure, Antenna Requirement, Conducted Emission and Radiated Spurious Emissions below 1GHz)

3. RF Exposure

3.1 Standard Applicable

According to §1.1307 and §2.1091, the fixed transmitter must comply the RF exposure requirements.

3.2 Test Result

This product complied with the requirement of the RF exposure, please see the RF Exposure Report.

4. Antenna Requirement

4.1 Standard Applicable

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

4.2 Evaluation Information

This product has two integral antennas, fulfill the requirement of this section.

5. Field Strength of Spurious Emissions

5.1 Standard Applicable

According to §15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply. Spurious Radiated Emissions measurements starting below or at the lowest crystal frequency.


5.2 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.205 15.247(a) and FCC Part 15.209 Limit.


The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.


The test setup for emission measurement below 30MHz..

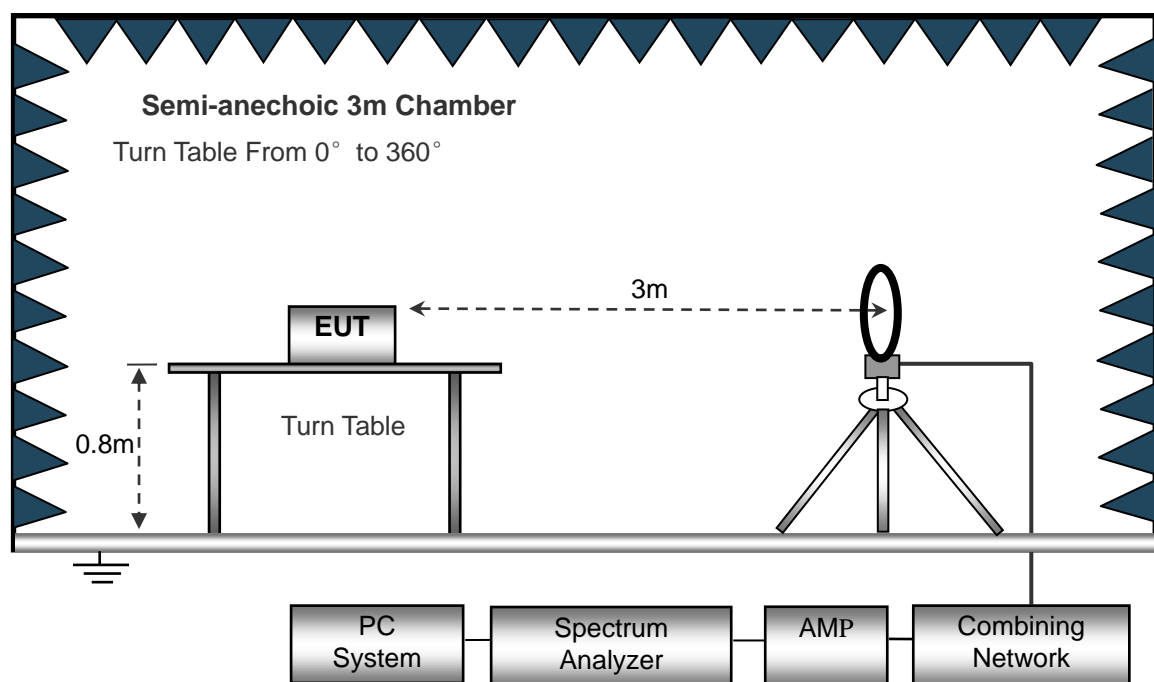

The test setup for emission measurement from 30 MHz to 1 GHz..

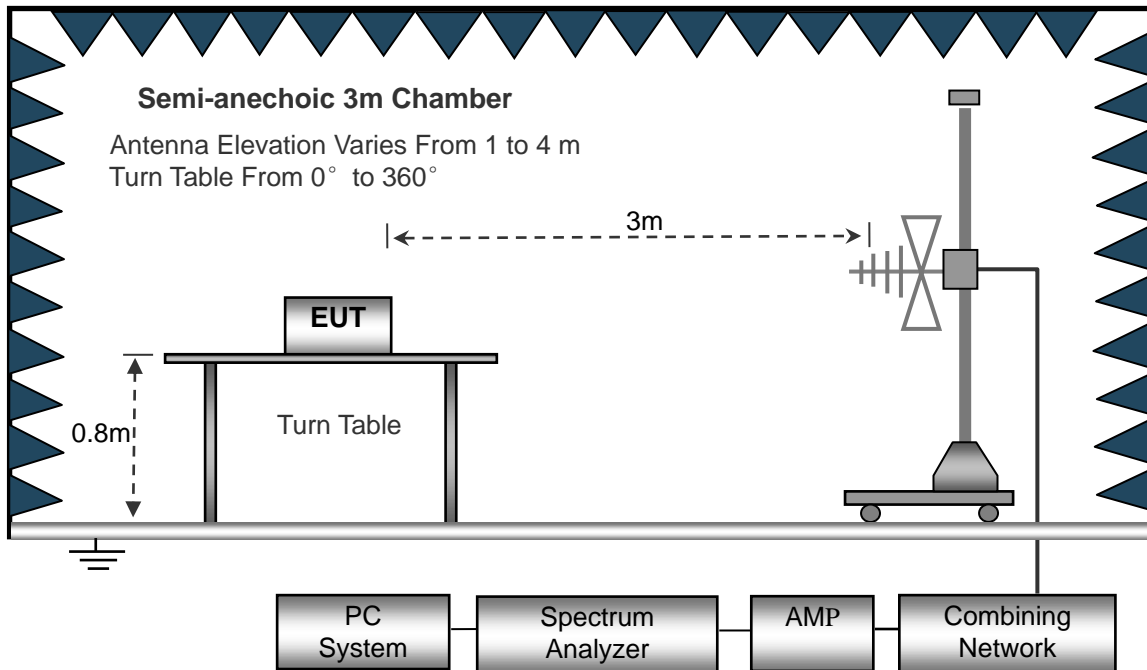

The test setup for emission measurement above 1 GHz..

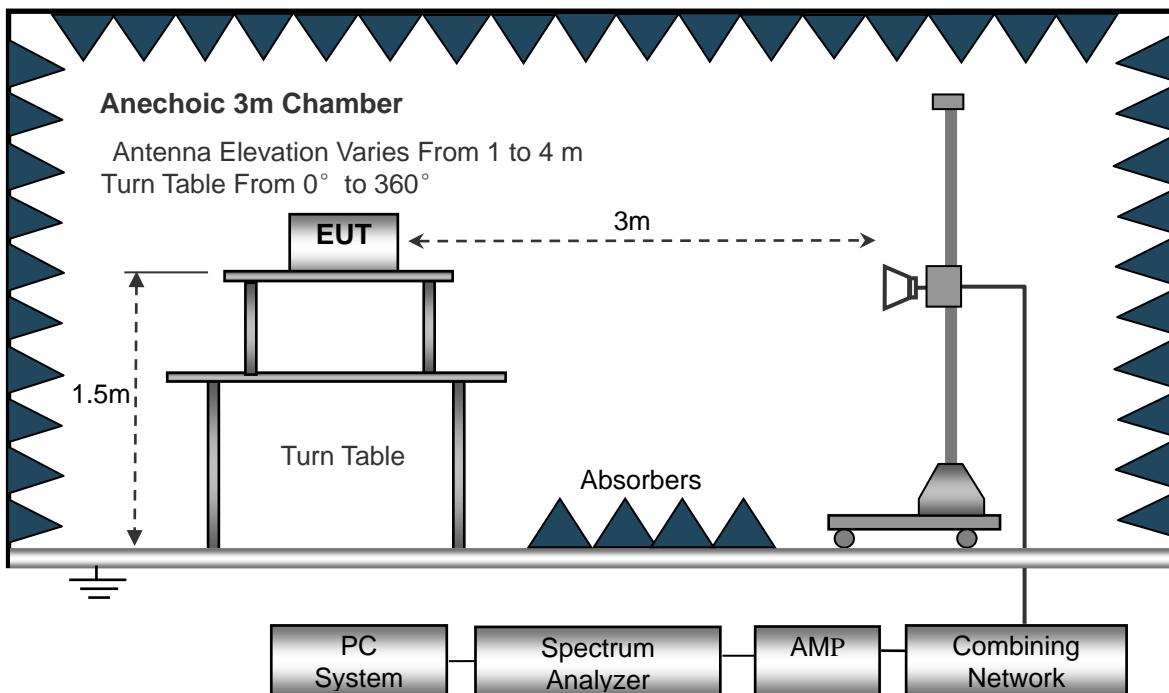

Frequency :9kHz-30MHz	Frequency :30MHz-1GHz	Frequency :Above 1GHz
RBW=10KHz,	RBW=120KHz,	RBW=1MHz,
VBW =30KHz	VBW=300KHz	VBW=3MHz(Peak), 10Hz(AV)
Sweep time= Auto	Sweep time= Auto	Sweep time= Auto
Trace = max hold	Trace = max hold	Trace = max hold
Detector function = peak	Detector function = peak, QP	Detector function = peak, AV

5.3 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Ant. Factor} + \text{Cable Loss} - \text{Ampl. Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB μ V means the emission is 6dB μ V below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15 Limit}$$


5.4 Summary of Test Results/Plots

Note: 1.This EUT was tested in 3 orthogonal positions and the worst case position data was reported.

All test modes (different data rate and different modulation) are performed, but only the worst case(802.11b_11Mbps) is recorded in this report.


- Spurious Emissions Below 1GHz
- Antenna 2(Worst case)

802.11b_11Mbps(Worst case)			
Test Channel	Low	Polarity:	Horizontal

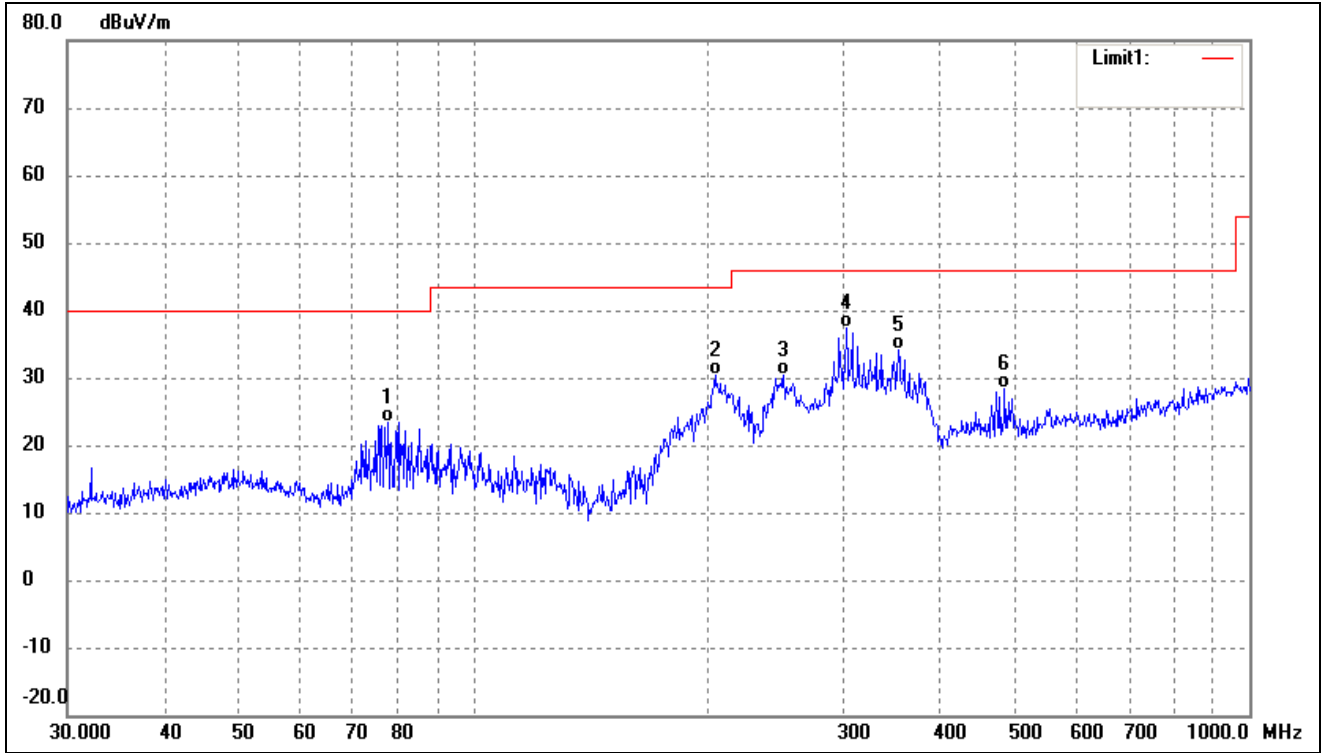


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	77.5928	37.42	-14.06	23.36	40.00	-16.64	-	-	QP
2	204.9551	41.66	-11.20	30.46	43.50	-13.04	-	-	QP
3	251.1804	39.53	-9.27	30.26	46.00	-15.74	-	-	QP
4	302.4812	44.57	-7.25	37.32	46.00	-8.68	-	-	QP
5	352.9434	40.22	-6.08	34.14	46.00	-11.86	-	-	QP
6	483.9094	33.01	-4.68	28.33	46.00	-17.67	-	-	QP

802.11b_11Mbps(Worst case)			
Test Channel	Low	Polarity:	Vertical

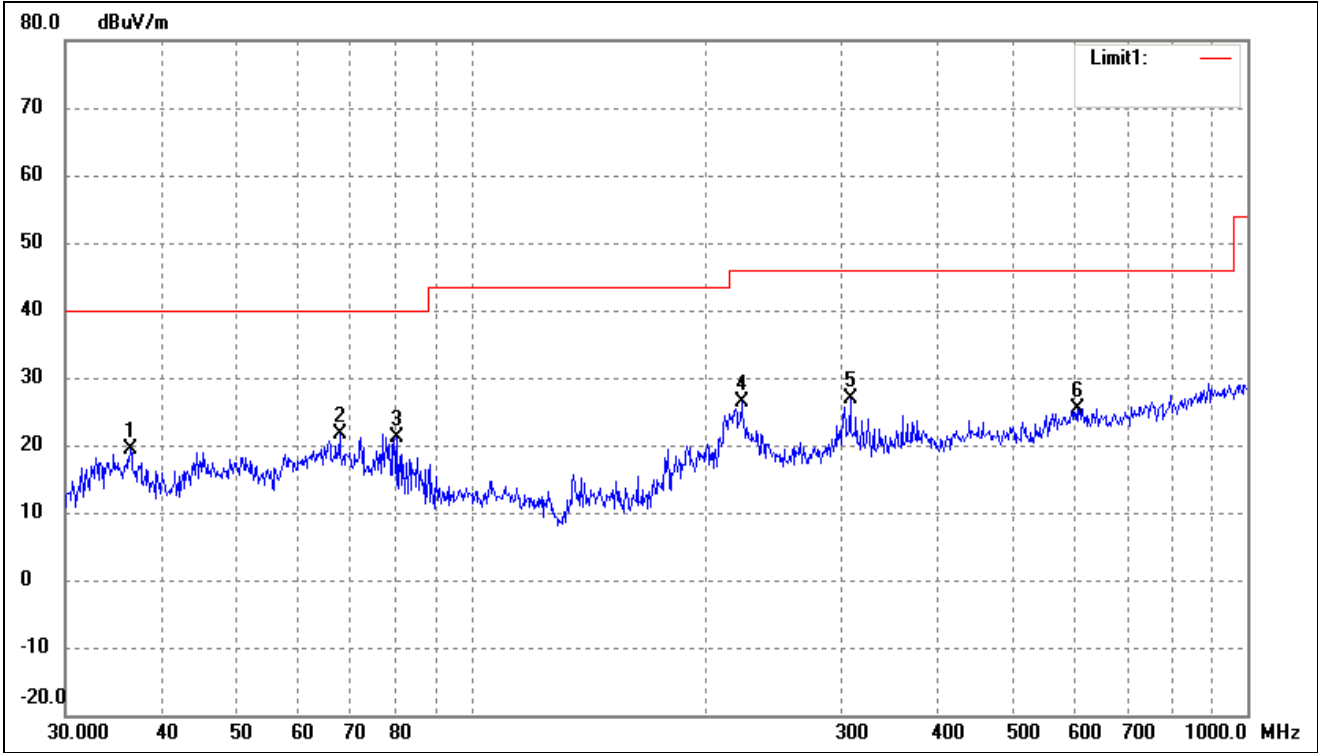


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	36.3814	31.86	-12.38	19.48	40.00	-20.52	-	-	peak
2	67.6751	35.24	-13.58	21.66	40.00	-18.34	-	-	peak
3	80.3619	35.22	-14.19	21.03	40.00	-18.97	-	-	peak
4	222.9502	37.26	-10.81	26.45	46.00	-19.55	-	-	peak
5	307.8313	34.23	-7.28	26.95	46.00	-19.05	-	-	peak
6	603.5392	27.72	-2.30	25.42	46.00	-20.58	-	-	peak

802.11b_11Mbps(Worst case)			
Test Channel	Middle	Polarity:	Horizontal

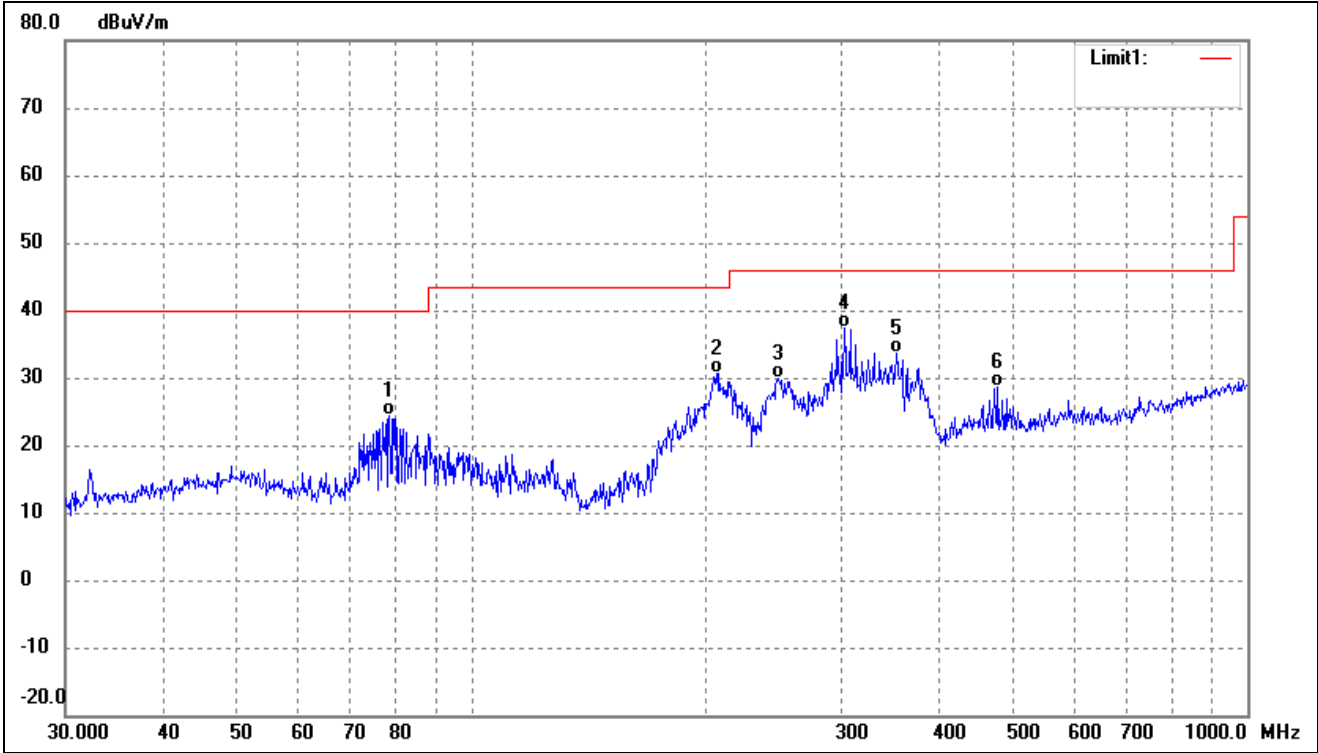


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	78.4134	38.44	-14.09	24.35	40.00	-15.65	-	-	QP
2	207.1226	41.81	-11.15	30.66	43.50	-12.84	-	-	QP
3	248.5519	39.15	-9.37	29.78	46.00	-16.22	-	-	QP
4	302.4812	44.52	-7.25	37.27	46.00	-8.73	-	-	QP
5	352.9434	39.77	-6.08	33.69	46.00	-12.31	-	-	QP
6	477.1694	33.40	-4.81	28.59	46.00	-17.41	-	-	QP

802.11b_11Mbps(Worst case)			
Test Channel	Middle	Polarity:	Vertical

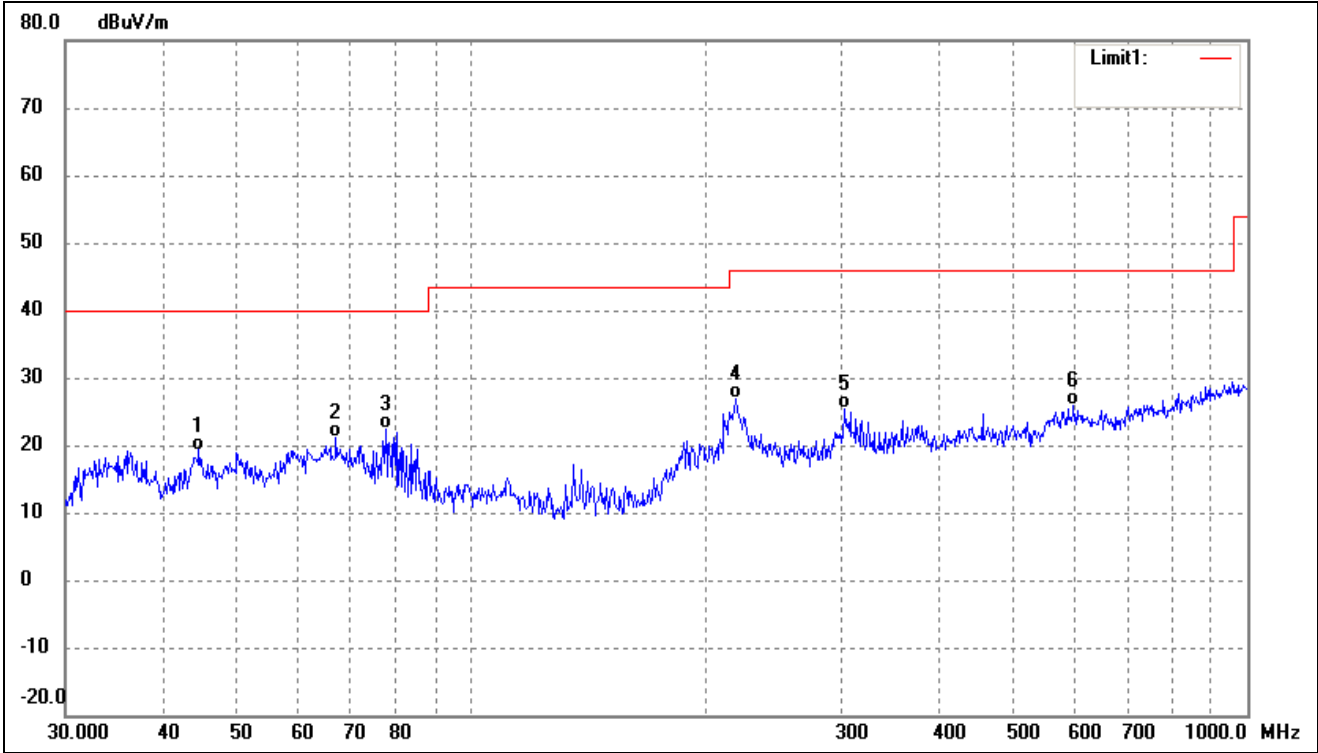


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	44.5868	29.91	-10.66	19.25	40.00	-20.75	-	-	QP
2	66.9669	34.45	-13.43	21.02	40.00	-18.98	-	-	QP
3	77.5928	36.55	-14.06	22.49	40.00	-17.51	-	-	QP
4	219.0753	37.65	-10.89	26.76	46.00	-19.24	-	-	QP
5	302.4812	32.54	-7.25	25.29	46.00	-20.71	-	-	QP
6	597.2234	28.21	-2.31	25.90	46.00	-20.10	-	-	QP

802.11b_11Mbps(Worst case)			
Test Channel	High	Polarity:	Horizontal

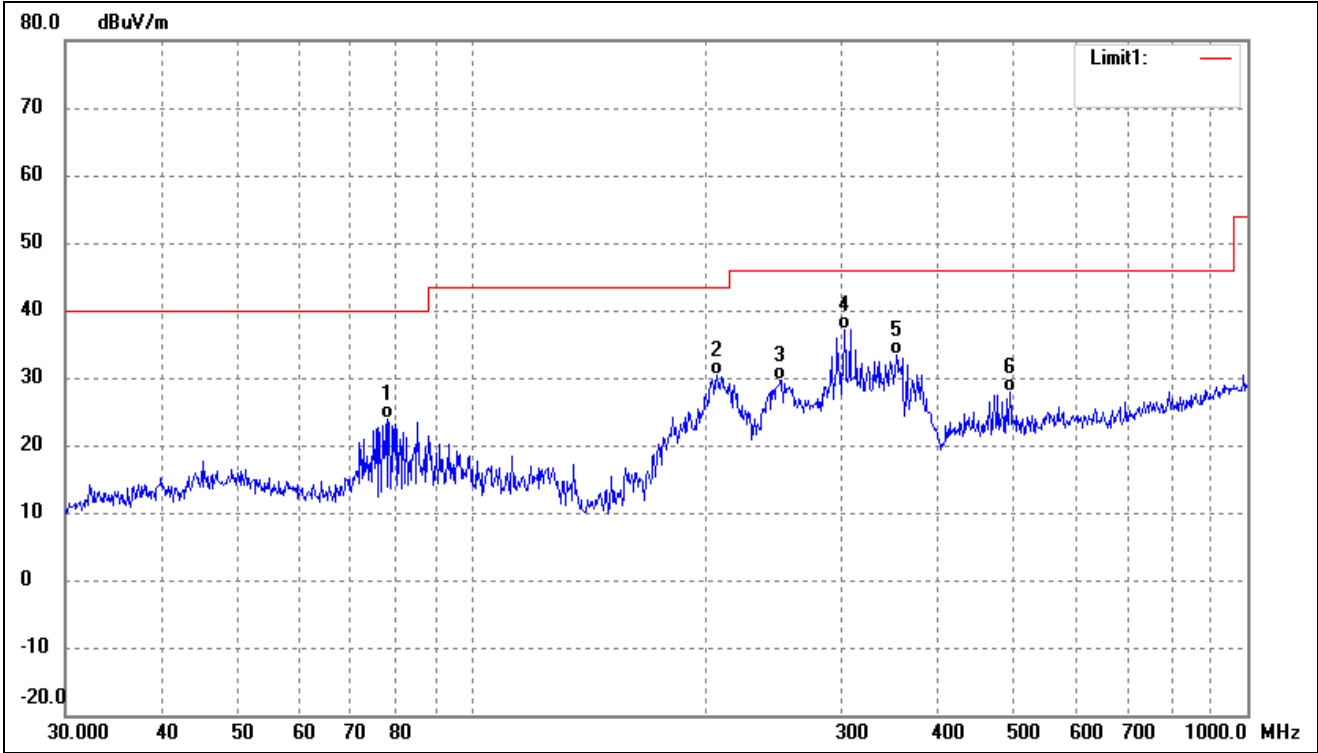

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	78.1389	37.92	-14.07	23.85	40.00	-16.15	-	-	QP
2	207.1226	41.53	-11.15	30.38	43.50	-13.12	-	-	QP
3	250.3012	38.90	-9.29	29.61	46.00	-16.39	-	-	QP
4	302.4812	44.48	-7.25	37.23	46.00	-8.77	-	-	QP
5	352.9434	39.43	-6.08	33.35	46.00	-12.65	-	-	QP
6	494.1984	32.37	-4.55	27.82	46.00	-18.18	-	-	QP

802.11b_11Mbps(Worst case)			
Test Channel	High	Polarity:	Vertical

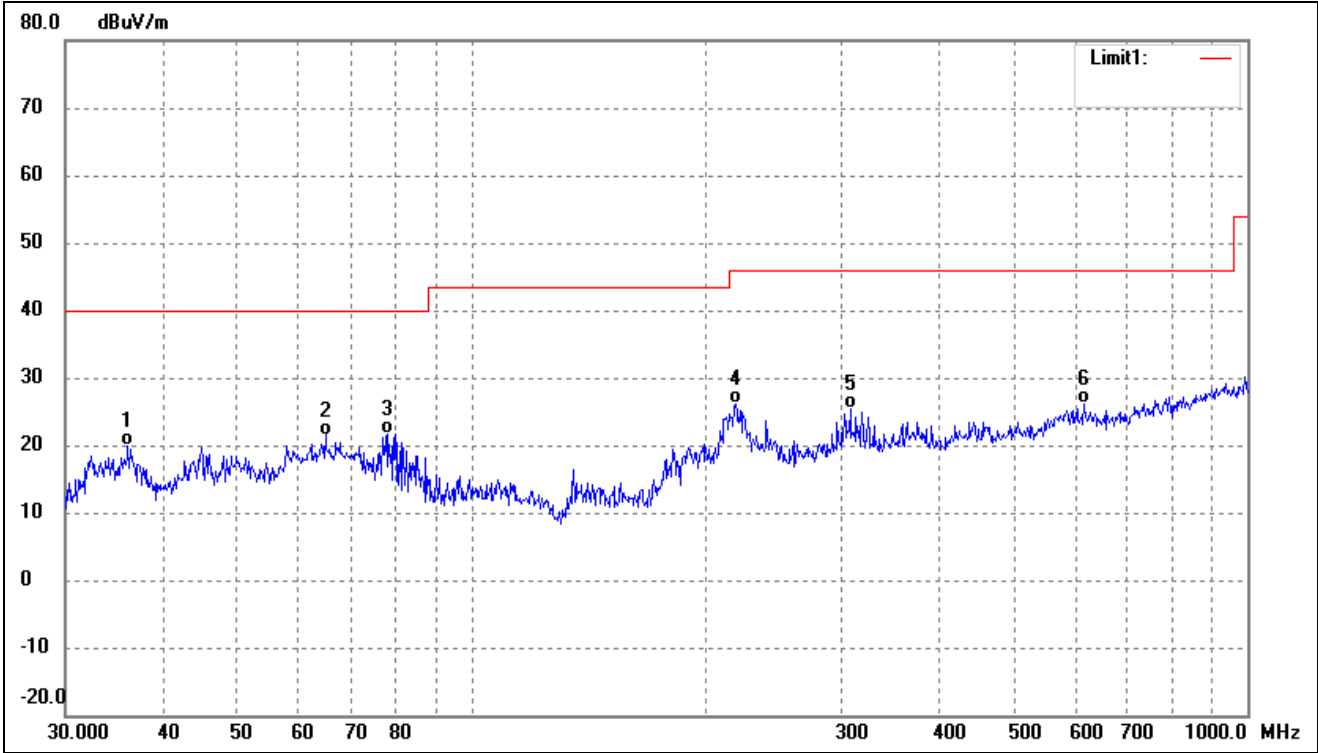

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	36.1272	32.28	-12.42	19.86	40.00	-20.14	-	-	QP
2	64.8865	34.50	-13.00	21.50	40.00	-18.50	-	-	QP
3	78.1389	35.59	-14.07	21.52	40.00	-18.48	-	-	QP
4	219.0753	36.97	-10.89	26.08	46.00	-19.92	-	-	QP
5	307.8313	32.71	-7.28	25.43	46.00	-20.57	-	-	QP
6	616.3718	28.55	-2.35	26.20	46.00	-19.80	-	-	QP

Remark: '-' Means' the test Degree and Height are not recorded by the test software and only show the worst case in the test report.


6. Conducted Emissions

6.1 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle. The spacing between the peripherals was 10 cm.

6.2 Basic Test Setup Block Diagram

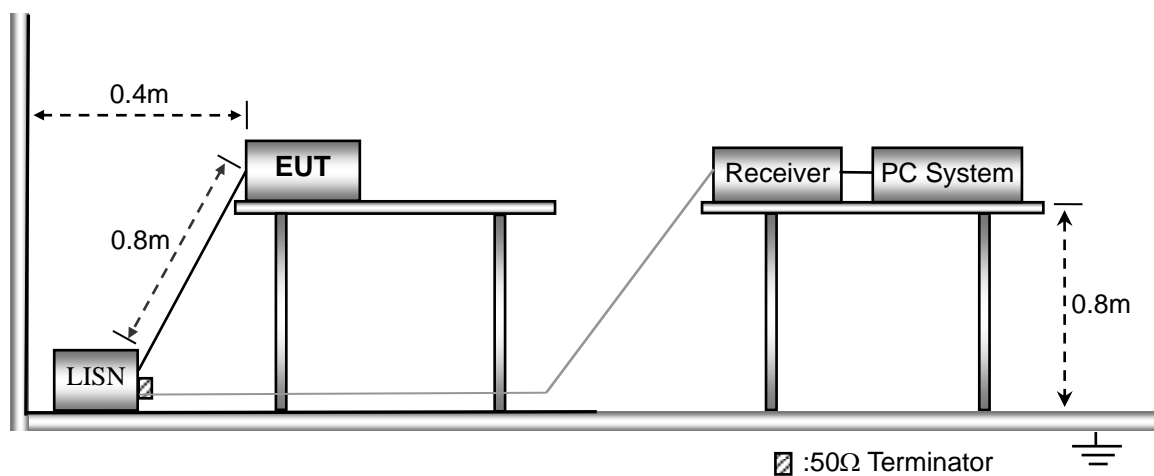


6.3 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:

Start Frequency	150 kHz
Stop Frequency	30 MHz
Sweep Speed	Auto
IF Bandwidth.....	10 kHz
Quasi-Peak Adapter Bandwidth	9 kHz
Quasi-Peak Adapter Mode	Normal


6.4 Summary of Test Results/Plots

Test Mode	Communication	AC120V 60Hz	Polarity:	Neutral
-----------	---------------	-------------	-----------	---------

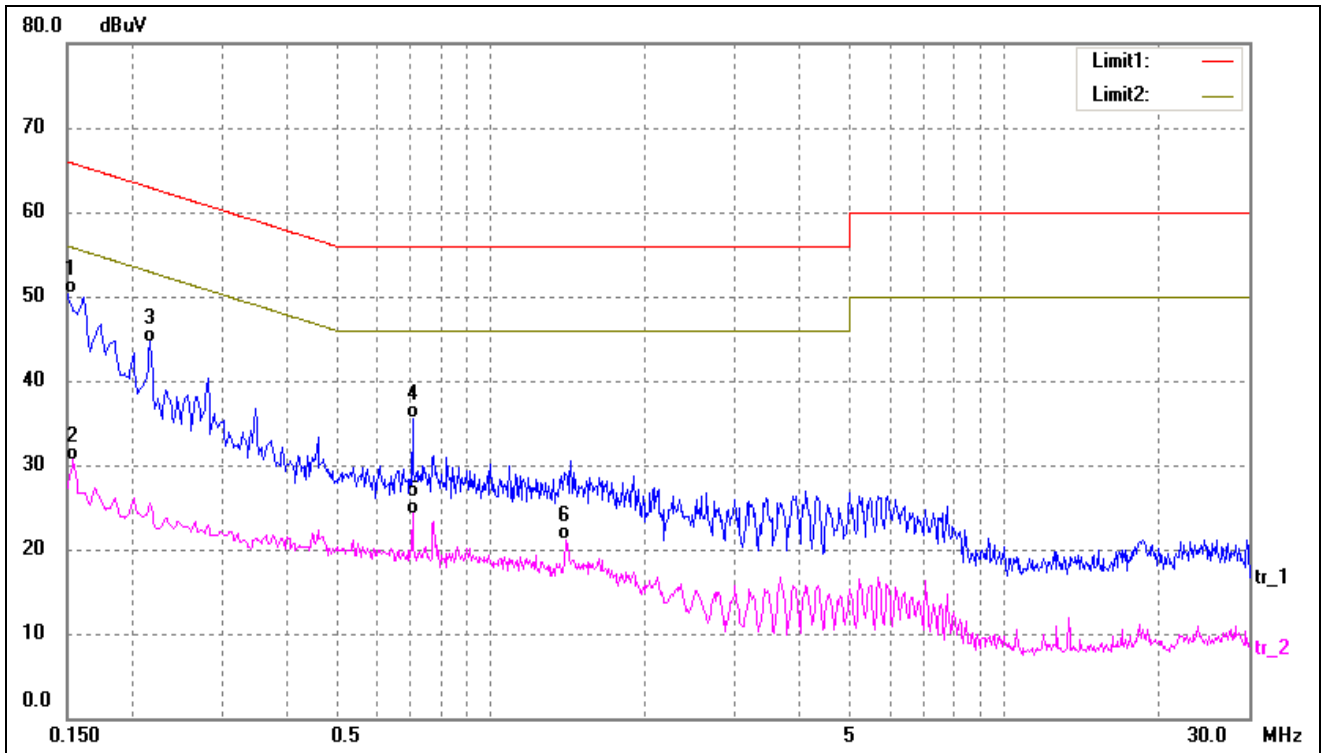

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1*	0.1500	40.00	10.25	50.25	66.00	-15.75	QP
2	0.1540	20.35	10.25	30.60	55.78	-25.18	AVG
3	0.2180	34.34	10.26	44.60	62.89	-18.29	QP
4	0.7060	25.40	10.17	35.57	56.00	-20.43	QP
5	0.7060	14.03	10.17	24.20	46.00	-21.80	AVG
6	1.4100	10.91	10.22	21.13	46.00	-24.87	AVG

Test Mode	Communication	AC120V 60Hz	Polarity:	Line
-----------	---------------	-------------	-----------	------

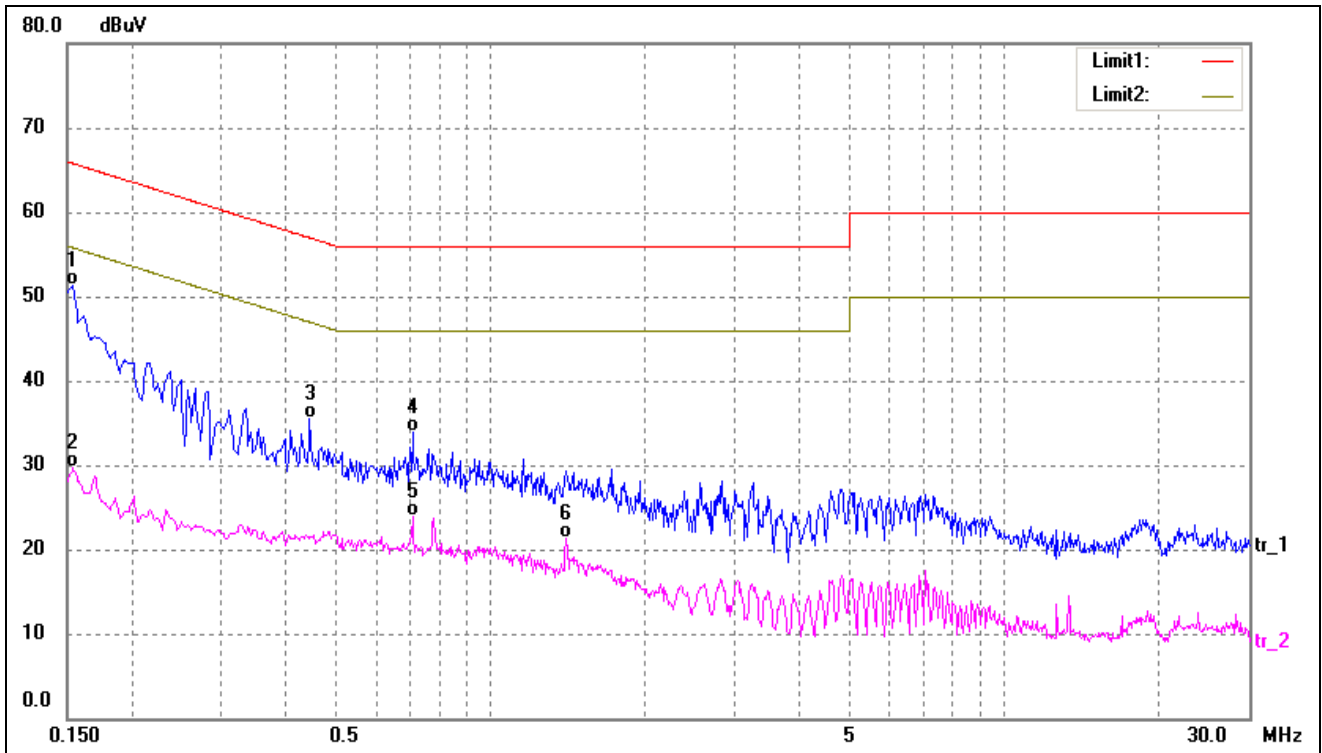

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1*	0.1540	41.07	10.25	51.32	65.78	-14.46	QP
2	0.1540	19.43	10.25	29.68	55.78	-26.10	AVG
3	0.4460	25.21	10.22	35.43	56.95	-21.52	QP
4	0.7060	23.74	10.17	33.91	56.00	-22.09	QP
5	0.7060	13.72	10.17	23.89	46.00	-22.11	AVG
6	1.4100	11.10	10.22	21.32	46.00	-24.68	AVG

***** END OF REPORT *****