

# TEST REPORT

**Reference No.** ..... : WTD15S1035375E  
**FCC ID**..... : 2AA3HHX-W09901  
**Applicant**..... : SHENZHEN 3NOD DIGITAL TECHNOLOGY CO.,LTD.  
**Address**..... : Building D Park 8# Langhui Road Tangxiayong Village Industrial Zone  
Songgang Town Baoan district Shenzhen City China.  
**Manufacturer** ..... : The same as above  
**Address**..... : The same as above  
**Product Name** ..... : Jam Rhythm Home Audio  
**Model No.** ..... : HX-W09901  
**Standards**..... : FCC CFR47 Part 15 C Section 15.247:2014  
**Date of Receipt sample**..... : Oct. 16, 2015  
**Date of Test**..... : Oct. 17, 2015 ~ Oct. 28, 2015  
**Date of Issue**..... : Dec. 03, 2015  
**Test Result**..... : **Pass**

**Remarks:**

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company.  
The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

**Prepared By:**

**Waltek Services (Shenzhen) Co., Ltd.**

Address: 1/F., Fukangtai Building, West Baima Road, Songgang Street, Baoan District, Shenzhen, Guangdong, China  
Tel :+86-755-83551033  
Fax:+86-755-83552400

Compiled by:

Approved by:

*Lake Xie*



Lake Xie / Test Engineer

Philo Zhong / Manager

## 2 Test Summary

Test Items	Test Requirement	Result
Radiated Emissions	15.247 15.205(a) 15.209(a)	PASS
Conducted Emissions	15.207(a)	PASS
6dB Bandwidth	15.247(a)(2)	PASS
Maximum Peak Output Power	15.247(b)(3),(4)	PASS
Power Spectral Density	15.247(e)	PASS
Band Edge	15.247(d)	PASS
Antenna Requirement	15.203	PASS
Maximum Permissible Exposure (Exposure of Humans to RF Fields)	1.1307(b)(1)	PASS

### 3 Contents

	<b>Page</b>
<b>1 COVER PAGE.....</b>	<b>1</b>
<b>2 TEST SUMMARY .....</b>	<b>2</b>
<b>3 CONTENTS .....</b>	<b>3</b>
<b>4 GENERAL INFORMATION.....</b>	<b>5</b>
4.1 GENERAL DESCRIPTION OF E.U.T. ....	5
4.2 DETAILS OF E.U.T. ....	5
4.3 CHANNEL LIST .....	5
4.4 TEST MODE .....	6
4.5 TEST FACILITY .....	7
<b>5 EQUIPMENT USED DURING TEST .....</b>	<b>8</b>
5.1 EQUIPMENTS LIST .....	8
5.2 DESCRIPTION OF SUPPORT UNITS .....	9
5.3 MEASUREMENT UNCERTAINTY .....	9
5.4 TEST EQUIPMENT CALIBRATION .....	9
<b>6 CONDUCTED EMISSION .....</b>	<b>10</b>
6.1 E.U.T. OPERATION .....	10
6.2 EUT SETUP .....	10
6.3 MEASUREMENT DESCRIPTION .....	10
6.4 CONDUCTED EMISSION TEST RESULT .....	11
<b>7 RADIATED EMISSIONS.....</b>	<b>13</b>
7.1 EUT OPERATION.....	13
7.2 TEST SETUP .....	14
7.3 SPECTRUM ANALYZER SETUP .....	15
7.4 TEST PROCEDURE .....	16
7.5 CORRECTED AMPLITUDE & MARGIN CALCULATION .....	16
7.6 SUMMARY OF TEST RESULTS .....	17
<b>8 BAND EDGE MEASUREMENT .....</b>	<b>29</b>
8.1 TEST PROCEDURE.....	29
8.2 TEST RESULT .....	30
<b>9 6 DB BANDWIDTH MEASUREMENT .....</b>	<b>34</b>
9.1 TEST PROCEDURE: .....	34
9.2 TEST RESULT: .....	34
<b>10 MAXIMUM PEAK OUTPUT POWER .....</b>	<b>41</b>
10.1 TEST PROCEDURE:.....	41
10.2 TEST RESULT: .....	41
<b>11 POWER SPECTRAL DENSITY .....</b>	<b>48</b>
11.1 TEST PROCEDURE:.....	48
11.2 TEST RESULT: .....	48
<b>12 ANTENNA REQUIREMENT .....</b>	<b>55</b>
<b>13 RF EXPOSURE.....</b>	<b>56</b>
13.1 REQUIREMENTS.....	56
13.2 THE PROCEDURES / LIMIT .....	56
13.3 MPE CALCULATION METHOD .....	57
<b>14 PHOTOGRAPHS – MODEL HX-W09901 TEST SETUP .....</b>	<b>58</b>
14.1 CONDUCTED EMISSION AT TEST SITE 1#.....	58
14.2 RADIATED EMISSION .....	58

<b>15</b>	<b>PHOTOGRAPHS - CONSTRUCTIONAL DETAILS .....</b>	<b>60</b>
15.1	MODEL HX-W09901 –EXTERNAL VIEW.....	60
15.2	MODEL HX-W09901 – INTERNAL VIEW .....	64

## 4 General Information

### 4.1 General Description of E.U.T.

Product Name:	Jam Rhythm Home Audio
Model No.:	HX-W09901
Model Difference:	N/A
Operation Frequency:	2412MHz ~ 2462MHz, 2422MHz~2452MHz
The Lowest Oscillator:	32.768 kHz
Antenna Gain:	2dBi
Type of modulation:	IEEE 802.11b (CCK/QPSK/BPSK,11Mbps max.) IEEE 802.11g (BPSK/QPSK/16QAM/64QAM,54Mbps max.) IEEE 802.11n (BPSK/QPSK/16QAM/64QAM,HT20:72Mbps max., HT40:150Mbps max.)

### 4.2 Details of E.U.T.

Technical Data:	DC 12V, 1.2A by adapter Input:100-240V~50/60Hz 0.45A
-----------------	---

### 4.3 Channel List

Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
1	2412	2	2417	3	2422	4	2427
5	2432	6	2437	7	2442	8	2447
9	2452	10	2457	11	2462	12	-

#### 4.4 Test Mode

Table 1 Tests Carried Out Under FCC part 15.247

Test Items	Mode	Data Rate	Channel	TX/RX
Maximum Peak Output Power	802.11b	11 Mbps	1/6/11	TX
	802.11g	54 Mbps	1/6/11	TX
	802.11n HT20	108 Mbps	1/6/11	TX
	802.11n HT40	150 Mbps	3/6/9	TX
Power Spectral Density	802.11b	11 Mbps	1/6/11	TX
	802.11g	54 Mbps	1/6/11	TX
	802.11n HT20	108 Mbps	1/6/11	TX
	802.11n HT40	150 Mbps	3/6/9	TX
Frequency Range	802.11b	11 Mbps	1/11	TX
	802.11g	54 Mbps	1/11	TX
	802.11n HT20	108 Mbps	1/11	TX
	802.11n HT40	150 Mbps	3/9	TX
Transmitter Spurious Emissions	802.11b	11 Mbps	1/6/11	TX
	802.11g	54 Mbps	1/6/11	TX
	802.11n HT20	108 Mbps	1/6/11	TX
	802.11n HT40	150 Mbps	3/6/9	TX

**Note** :Parameters set by test software during channel & power tests, the software provided by the customer was used to set the operating channels as well as the output power level. The RF output power set is the power expected by the manufacturer and is going to be fixed on the firmware of the final product .

Table 2 Tests Carried Out Under FCC part 15.207 &amp; FCC part 15.209

Test Item	Test Mode
Conduction Emission, 0.15MHz to 30MHz	Communication

#### 4.5 Test Facility

The test facility has a test site registered with the following organizations:

- **IC – Registration No.: 7760A-1**

Waltek Services(Shenzhen) Co., Ltd. Has been registered and fully described in a report filed with the Industry Canada. The acceptance letter from the Industry Canada is maintained in our files.

Registration number 7760A-1, October 15, 2015.

- **FCC Test Site 1#– Registration No.: 880581**

Waltek Services(Shenzhen) Co., Ltd. EMC Laboratory `has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 880581, April 29, 2014.

- **FCC Test Site 2#– Registration No.: 328995**

Waltek Services(Shenzhen) Co., Ltd. EMC Laboratory `has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 328995, December 3, 2014.

## 5 Equipment Used during Test

### 5.1 Equipments List

<b>Conducted Emissions Test Site 1#</b>						
<b>Item</b>	<b>Equipment</b>	<b>Manufacturer</b>	<b>Model No.</b>	<b>Serial No.</b>	<b>Last Calibration Date</b>	<b>Calibration Due Date</b>
1.	EMI Test Receiver	R&S	ESCI	100947	Sep.14,2015	Sep.13,2016
2.	LISN	R&S	ENV216	101215	Sep.14,2015	Sep.13,2016
3.	Cable	Top	TYPE16(3.5M)	-	Sep.14,2015	Sep.13,2016
<b>Conducted Emissions Test Site 2#</b>						
<b>Item</b>	<b>Equipment</b>	<b>Manufacturer</b>	<b>Model No.</b>	<b>Serial No.</b>	<b>Last Calibration Date</b>	<b>Calibration Due Date</b>
1.	EMI Test Receiver	R&S	ESCI	101155	Sep.14,2015	Sep.13,2016
2.	LISN	SCHWARZBECK	NSLK 8128	8128-289	Sep.14,2015	Sep.13,2016
3.	Limitter	York	MTS-IMP-136	261115-001-0024	Sep.14,2015	Sep.13,2016
4.	Cable	LARGE	RF300	-	Sep.14,2015	Sep.13,2016
<b>3m Semi-anechoic Chamber for Radiation Emissions Test site 1#</b>						
<b>Item</b>	<b>Equipment</b>	<b>Manufacturer</b>	<b>Model No.</b>	<b>Serial No.</b>	<b>Last Calibration Date</b>	<b>Calibration Due Date</b>
1	EMC Analyzer	Agilent	E7405A	MY45114943	Sep.14,2015	Sep.13,2016
2	Active Loop Antenna	Beijing Dazhi	ZN30900A	-	Sep.14,2015	Sep.13,2016
3	Trilog Broadband Antenna	SCHWARZBECK	VULB9163	336	Apr.18,2015	Apr.17,2016
4	Coaxial Cable (below 1GHz)	Top	TYPE16(13M)	-	Sep.14,2015	Sep.13,2016
5	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9120 D	667	Apr.18,2015	Apr.17,2016
6	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9170	335	Apr.18,2015	Apr.17,2016
7	Broadband Preamplifier	COMPLIANCE DIRECTION	PAP-1G18	2004	Mar.16,2015	Mar.15,2016
8	Coaxial Cable (above 1GHz)	Top	1GHz-25GHz	EW02014-7	Apr.09,2015	Apr.08,2016
<b>3m Semi-anechoic Chamber for Radiation Emissions Test site 2#</b>						
<b>Item</b>	<b>Equipment</b>	<b>Manufacturer</b>	<b>Model No.</b>	<b>Serial No</b>	<b>Last Calibration Date</b>	<b>Calibration Due Date</b>
1	Test Receiver	R&S	ESCI	101296	Sep.14,2015	Sep.13,2016
2	Trilog Broadband Antenna	SCHWARZBECK	VULB9160	9160-3325	Sep.14,2015	Sep.13,2016
3	Amplifier	Compliance pirection systems inc	PAP-0203	22024	Sep.14,2015	Sep.13,2016
4	Cable	HUBER+SUHNER	CBL2	525178	Sep.14,2015	Sep.13,2016



RF Conducted Testing						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMC Analyzer (9k~26.5GHz)	Agilent	E7405A	MY45114943	Sep.14,2015	Sep.13,2016
2.	Spectrum Analyzer (9k-6GHz)	R&S	FSL6	100959	Sep.14,2015	Sep.13,2016
3.	Signal Analyzer (9k~26.5GHz)	Agilent	N9010A	MY50520207	Sep.14,2015	Sep.13,2016

### 5.2 Description of Support Units

Equipment	Manufacturer	Model No.	Series No.
/	/	/	/

### 5.3 Measurement Uncertainty

Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-6}$
RF Power	$\pm 1.0$ dB
RF Power Density	$\pm 2.2$ dB
Radiated Spurious Emissions test	$\pm 5.03$ dB (30M~1000MHz)
	$\pm 5.47$ dB (1000M~25000MHz)
Conducted Spurious Emissions test	$\pm 3.64$ dB (AC mains 150KHz~30MHz)

### 5.4 Test Equipment Calibration

All the test equipments used are valid and calibrated by CEPREI Certification Body that address is No.110 Dongguan Zhuang RD. Guangzhou, P.R.China.

## 6 Conducted Emission

Test Requirement:	FCC CFR 47 Part 15 Section 15.207
Test Method:	ANSI C63.4:2003
Test Result:	PASS
Frequency Range:	150kHz to 30MHz
Class/Severity:	Class B
Limit:	66-56 dB $\mu$ V between 0.15MHz & 0.5MHz 56 dB $\mu$ V between 0.5MHz & 5MHz 60 dB $\mu$ V between 5MHz & 30MHz
Detector:	Peak for pre-scan (9kHz Resolution Bandwidth)

### 6.1 E.U.T. Operation

Operating Environment :


Temperature:	21.5 °C
Humidity:	51.9 % RH
Atmospheric Pressure:	101.2kPa

EUT Operation :

The test was performed in communication mode, the test data were shown in the report.

### 6.2 EUT Setup

The conducted emission tests were performed using the setup accordance with the ANSI C63.4:2003.

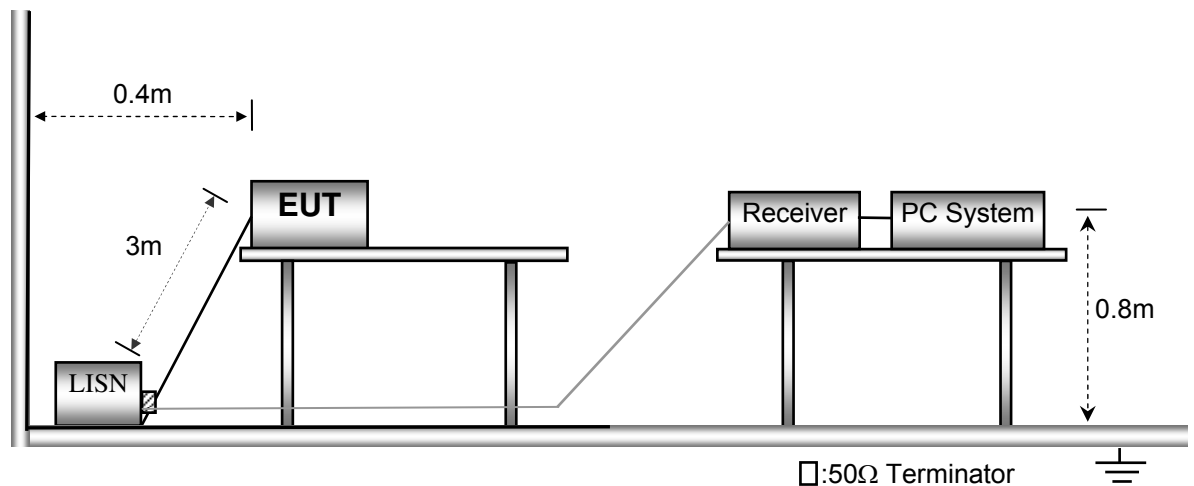


### 6.3 Measurement Description

The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.

### 6.4 Conducted Emission Test Result


An initial pre-scan was performed on the live and neutral lines.

Live line:

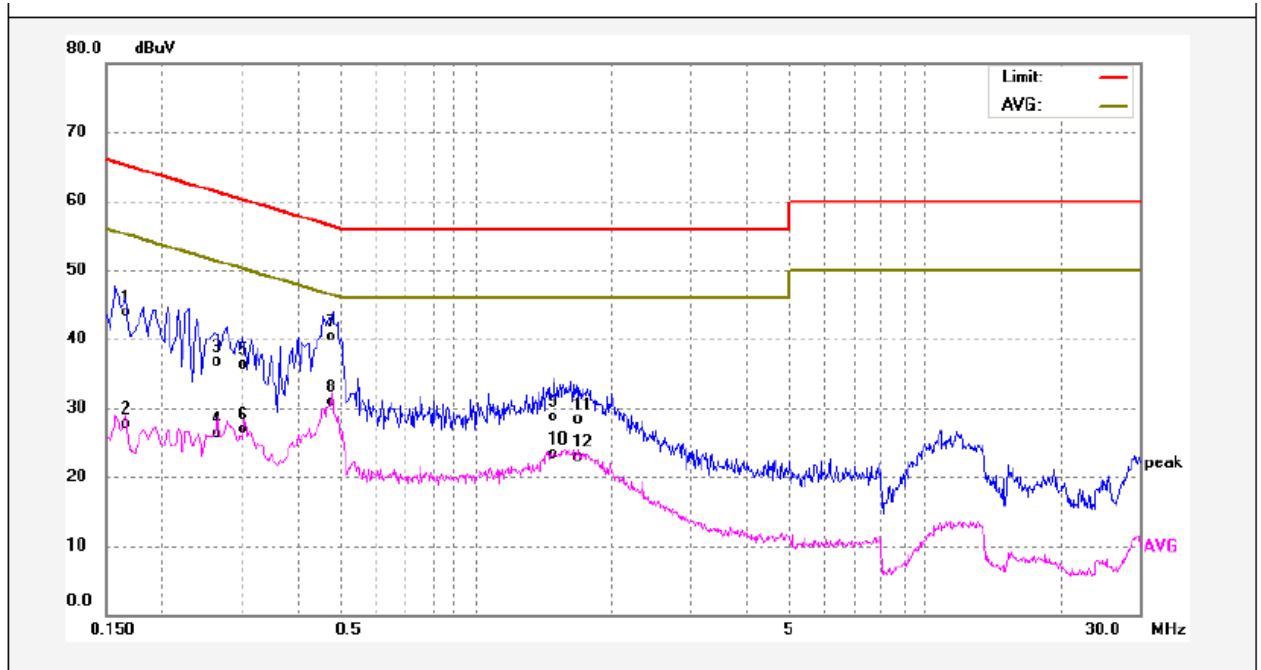

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1660	33.77	10.10	43.87	65.15	-21.28	QP	
2	0.1660	17.51	10.10	27.61	55.15	-27.54	AVG	
3	0.2660	26.69	10.10	36.79	61.24	-24.45	QP	
4	0.2660	16.17	10.10	26.27	51.24	-24.97	AVG	
5	0.3060	26.23	10.11	36.34	60.08	-23.74	QP	
6	0.3060	16.70	10.11	26.81	50.08	-23.27	AVG	
7	0.4780	30.26	10.12	40.38	56.37	-15.99	QP	
8	0.4780	20.70	10.12	30.82	46.37	-15.55	AVG	
9	1.5020	18.44	10.20	28.64	56.00	-27.36	QP	
10	1.5020	13.01	10.20	23.21	46.00	-22.79	AVG	
11	1.6980	18.16	10.20	28.36	56.00	-27.64	QP	
12	1.6980	12.78	10.20	22.98	46.00	-23.02	AVG	

Neutral line:

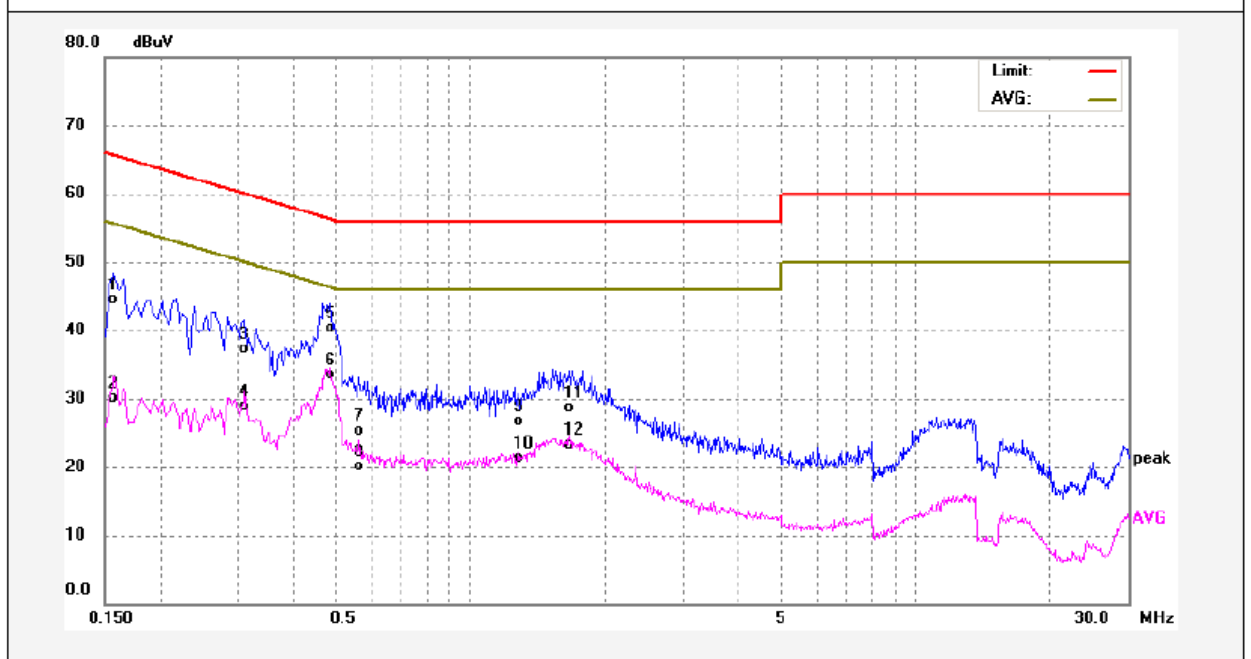

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Remark
1	0.1580	34.33	10.10	44.43	65.56	-21.13	QP	
2	0.1580	19.98	10.10	30.08	55.56	-25.48	AVG	
3	0.3100	27.20	10.11	37.31	59.97	-22.66	QP	
4	0.3100	18.84	10.11	28.95	49.97	-21.02	AVG	
5	0.4820	30.19	10.12	40.31	56.30	-15.99	QP	
6	0.4820	23.44	10.12	33.56	46.30	-12.74	AVG	
7	0.5620	15.18	10.14	25.32	56.00	-30.68	QP	
8	0.5620	9.91	10.14	20.05	46.00	-25.95	AVG	
9	1.2860	16.57	10.20	26.77	56.00	-29.23	QP	
10	1.2860	11.20	10.20	21.40	46.00	-24.60	AVG	
11	1.6660	18.42	10.20	28.62	56.00	-27.38	QP	
12	1.6660	13.10	10.20	23.30	46.00	-22.70	AVG	

## 7 Radiated Emissions

Test Requirement: FCC CFR47 Part 15 Section 15.209 & 15.247

Test Method: ANSI C63.4:2003

Test Result: PASS

Measurement Distance: 3m

Limit:

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	2400/F(kHz)	300	10000 * 2400/F(kHz)	$20\log^{(2400/F(kHz))} + 80$
0.490 ~ 1.705	24000/F(kHz)	30	100 * 24000/F(kHz)	$20\log^{(24000/F(kHz))} + 40$
1.705 ~ 30	30	30	100 * 30	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

### 7.1 EUT Operation

Operating Environment :

Temperature: 23.5 °C

Humidity: 52.1 % RH

Atmospheric Pressure: 101.2kPa


EUT Operation :

The test was performed in transmitting mode, the test data were shown in the report.


### 7.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.4: 2003.


The test setup for emission measurement below 30MHz.

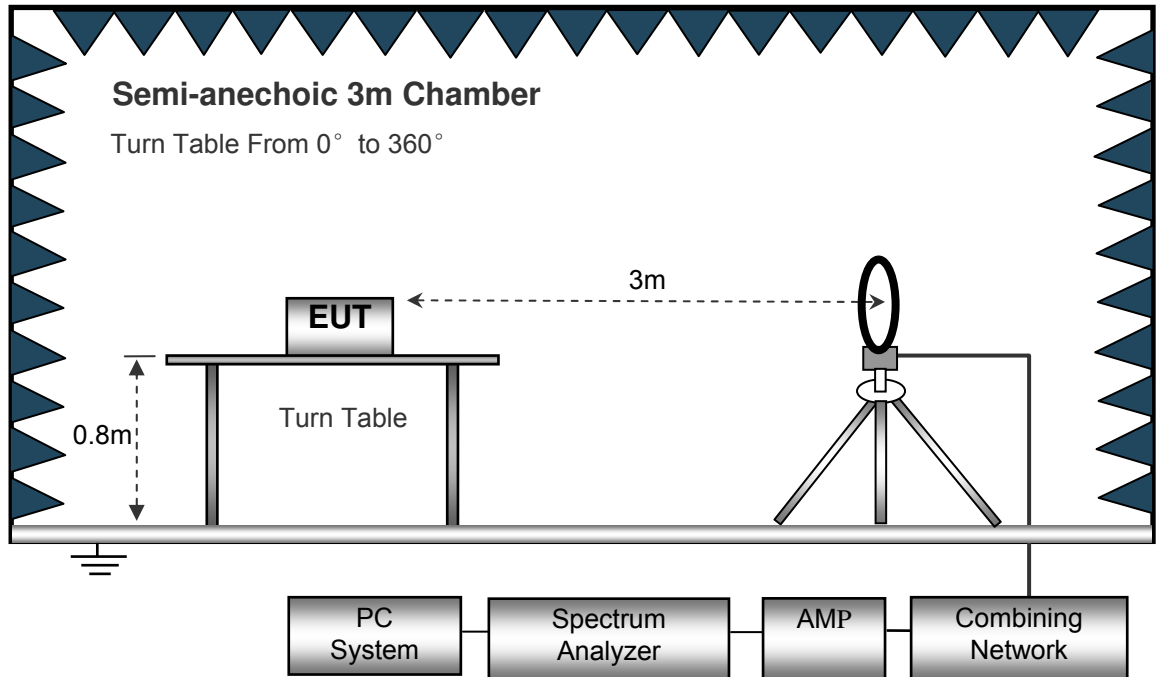

The test setup for emission measurement from 30 MHz to 1 GHz.

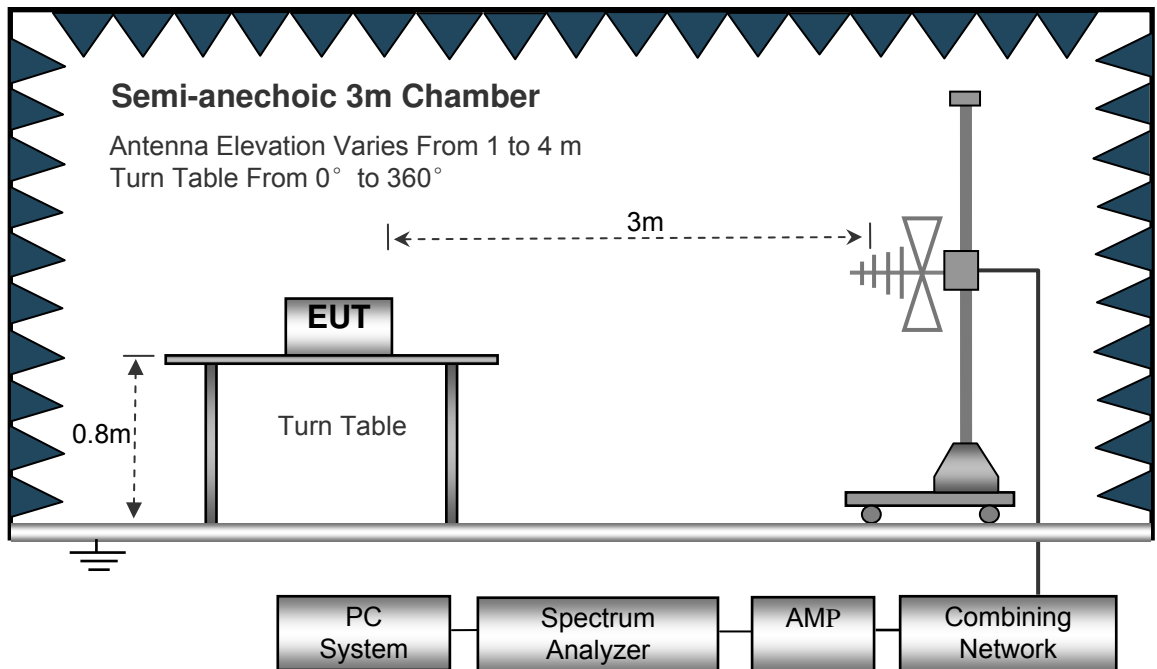

The test setup for emission measurement above 1 GHz.

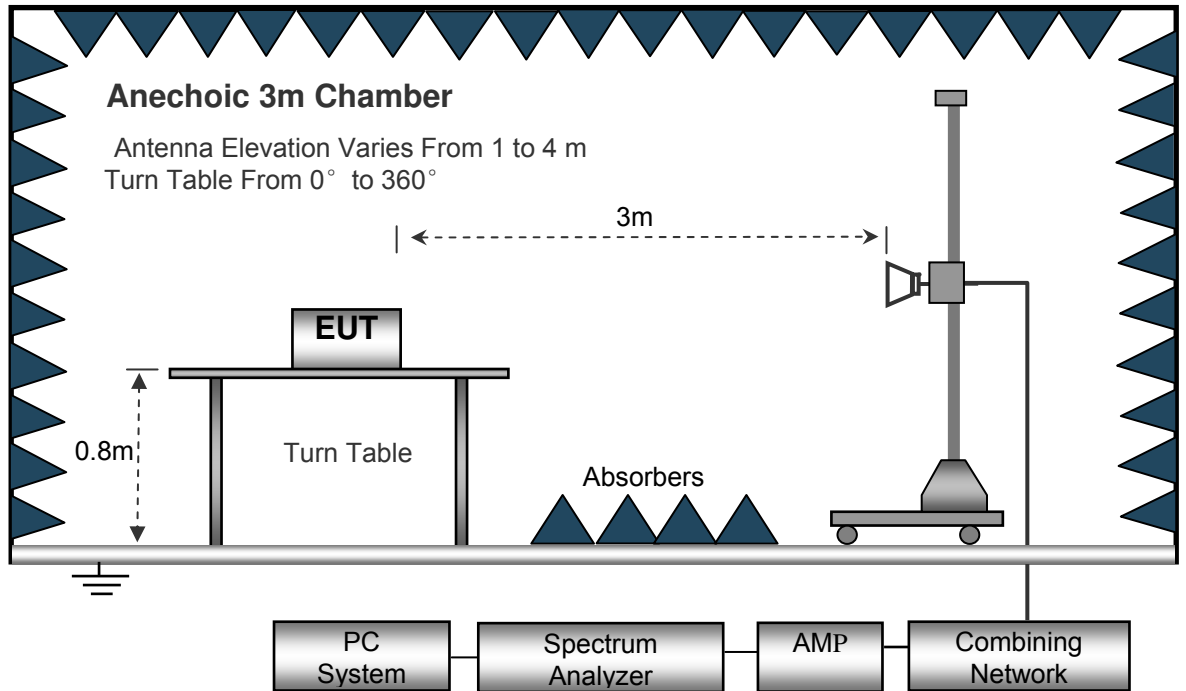

### 7.3 Spectrum Analyzer Setup

Below 30MHz

Sweep Speed ..... Auto  
 IF Bandwidth..... 10kHz  
 Video Bandwidth..... 10kHz  
 Resolution Bandwidth..... 10kHz

30MHz ~ 1GHz

Sweep Speed ..... Auto  
 Detector ..... PK  
 Resolution Bandwidth..... 100kHz  
 Video Bandwidth..... 300kHz

Above 1GHz

Sweep Speed ..... Auto  
 Detector ..... PK  
 Resolution Bandwidth..... 1MHz  
 Video Bandwidth..... 3MHz  
 Detector ..... Ave.  
 Resolution Bandwidth..... 1MHz  
 Video Bandwidth..... 10Hz

## 7.4 Test Procedure

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are performed in X,Y and Z axis positioning(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand),the worst condition was tested putting the eut in X axis,so the worst data were shown as follow.
8. A 2.4GHz high –pass filter is used druing radiated emissions above 1GHz measurement.

## 7.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Limit}$$



## 7.6 Summary of Test Results

### Test Frequency : 32.768kHz ~ 30MHz

The measurements were more than 20 dB below the limit and not reported.

### Test Frequency : 30MHz ~ 18GHz

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
11b: Low Channel 2412MHz									
223.49	41.06	QP	123	1.7	H	-11.62	29.44	46.00	-16.56
223.49	36.25	QP	286	1.5	V	-11.62	24.63	46.00	-21.37
4824.00	50.47	PK	242	1.2	V	-1.06	49.41	74.00	-24.59
4824.00	46.33	Ave	242	1.2	V	-1.06	45.27	54.00	-8.73
7236.00	41.08	PK	41	1.7	H	1.33	42.41	74.00	-31.59
7236.00	41.95	Ave	41	1.7	H	1.33	43.28	54.00	-10.72
2322.56	45.59	PK	302	1.4	V	-13.19	32.40	74.00	-41.60
2322.56	39.57	Ave	302	1.4	V	-13.19	26.38	54.00	-27.62
2388.89	44.56	PK	271	1.6	H	-13.14	31.42	74.00	-42.58
2388.89	38.15	Ave	271	1.6	H	-13.14	25.01	54.00	-28.99
2484.28	44.93	PK	158	1.4	V	-13.08	31.85	74.00	-42.15
2484.28	39.00	Ave	158	1.4	V	-13.08	25.92	54.00	-28.08

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
11b: Middle Channel 2437MHz									
223.49	40.48	QP	45	1.1	H	-11.62	28.86	46.00	-17.14
223.49	37.38	QP	71	2.0	V	-11.62	25.76	46.00	-20.24
4874.00	50.87	PK	139	1.9	V	-0.62	50.25	74.00	-23.75
4874.00	46.77	Ave	139	1.9	V	-0.62	46.15	54.00	-7.85
7311.00	42.48	PK	247	1.9	H	2.21	44.69	74.00	-29.31
7311.00	41.01	Ave	247	1.9	H	2.21	43.22	54.00	-10.78
2338.87	45.01	PK	299	1.7	V	-13.19	31.82	74.00	-42.18
2338.87	37.79	Ave	299	1.7	V	-13.19	24.60	54.00	-29.40
2368.36	44.17	PK	217	1.9	H	-13.14	31.03	74.00	-42.97
2368.36	37.88	Ave	217	1.9	H	-13.14	24.74	54.00	-29.26
2493.79	43.47	PK	18	1.3	V	-13.08	30.39	74.00	-43.61
2493.79	36.41	Ave	18	1.3	V	-13.08	23.33	54.00	-30.67

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
11b: High Channel 2462MHz									
223.49	40.70	QP	254	2.0	H	-11.62	29.08	46.00	-16.92
223.49	36.00	QP	275	1.6	V	-11.62	24.38	46.00	-21.62
4924.00	50.91	PK	155	1.9	V	-0.24	50.67	74.00	-23.33
4924.00	47.49	Ave	155	1.9	V	-0.24	47.25	54.00	-6.75
7386.00	42.55	PK	22	1.5	H	2.84	45.39	74.00	-28.61
7386.00	41.71	Ave	22	1.5	H	2.84	44.55	54.00	-9.45
2345.69	46.15	PK	120	1.6	V	-13.19	32.96	74.00	-41.04
2345.69	38.75	Ave	120	1.6	V	-13.19	25.56	54.00	-28.44
2364.40	44.69	PK	204	1.8	H	-13.14	31.55	74.00	-42.45
2364.40	37.67	Ave	204	1.8	H	-13.14	24.53	54.00	-29.47
2499.61	42.98	PK	175	1.6	V	-13.08	29.90	74.00	-44.10
2499.61	37.62	Ave	175	1.6	V	-13.08	24.54	54.00	-29.46

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
11g: Low Channel 2412MHz									
223.49	41.26	QP	204	1.7	H	-11.62	29.64	46.00	-16.36
223.49	35.78	QP	325	1.2	V	-11.62	24.16	46.00	-21.84
4824.00	52.21	PK	210	1.3	V	-1.06	51.15	74.00	-22.85
4824.00	46.33	Ave	210	1.3	V	-1.06	45.27	54.00	-8.73
7236.00	42.19	PK	31	1.2	H	1.33	43.52	74.00	-30.48
7236.00	41.14	Ave	31	1.2	H	1.33	42.47	54.00	-11.53
2331.17	46.66	PK	164	2.0	V	-13.19	33.47	74.00	-40.53
2331.17	39.58	Ave	164	2.0	V	-13.19	26.39	54.00	-27.61
2386.18	43.16	PK	332	1.4	H	-13.14	30.02	74.00	-43.98
2386.18	36.03	Ave	332	1.4	H	-13.14	22.89	54.00	-31.11
2484.98	42.37	PK	157	1.5	V	-13.08	29.29	74.00	-44.71
2484.98	36.14	Ave	157	1.5	V	-13.08	23.06	54.00	-30.94

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
11g: Middle Channel 2437MHz									
223.49	42.08	QP	223	1.2	H	-11.62	30.46	46.00	-15.54
223.49	35.99	QP	103	1.6	V	-11.62	24.37	46.00	-21.63
4874.00	53.52	PK	19	1.2	V	-0.62	52.90	74.00	-21.10
4874.00	46.49	Ave	19	1.2	V	-0.62	45.87	54.00	-8.13
7311.00	43.56	PK	189	1.9	H	2.21	45.77	74.00	-28.23
7311.00	40.30	Ave	189	1.9	H	2.21	42.51	54.00	-11.49
2347.54	47.00	PK	118	1.2	V	-13.19	33.81	74.00	-40.19
2347.54	38.02	Ave	118	1.2	V	-13.19	24.83	54.00	-29.17
2361.39	44.04	PK	336	1.6	H	-13.14	30.90	74.00	-43.10
2361.39	38.24	Ave	336	1.6	H	-13.14	25.10	54.00	-28.90
2494.73	44.27	PK	249	1.4	V	-13.08	31.19	74.00	-42.81
2494.73	37.69	Ave	249	1.4	V	-13.08	24.61	54.00	-29.39

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
11g: High Channel 2462MHz									
223.49	42.51	QP	296	1.5	H	-11.62	30.89	46.00	-15.11
223.49	36.26	QP	48	1.5	V	-11.62	24.64	46.00	-21.36
4924.00	54.52	PK	360	1.4	V	-0.24	54.28	74.00	-19.72
4924.00	46.13	Ave	360	1.4	V	-0.24	45.89	54.00	-8.11
7386.00	44.81	PK	313	1.9	H	2.84	47.65	74.00	-26.35
7386.00	40.30	Ave	313	1.9	H	2.84	43.14	54.00	-10.86
2327.06	46.40	PK	4	1.4	V	-13.19	33.21	74.00	-40.79
2327.06	38.52	Ave	4	1.4	V	-13.19	25.33	54.00	-28.67
2371.89	42.91	PK	68	1.7	H	-13.14	29.77	74.00	-44.23
2371.89	36.27	Ave	68	1.7	H	-13.14	23.13	54.00	-30.87
2496.66	44.78	PK	121	1.5	V	-13.08	31.70	74.00	-42.30
2496.66	36.65	Ave	121	1.5	V	-13.08	23.57	54.00	-30.43

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
n20: Low Channel 2412MHz									
223.49	42.77	QP	164	1.3	H	-11.62	31.15	46.00	-14.85
223.49	35.81	QP	80	1.4	V	-11.62	24.19	46.00	-21.81
4824.00	55.18	PK	340	1.9	V	-1.06	54.12	74.00	-19.88
4824.00	45.57	Ave	340	1.9	V	-1.06	44.51	54.00	-9.49
7236.00	43.46	PK	216	1.7	H	1.33	44.79	74.00	-29.21
7236.00	41.42	Ave	216	1.7	H	1.33	42.75	54.00	-11.25
2319.01	45.86	PK	303	1.4	V	-13.19	32.67	74.00	-41.33
2319.01	39.82	Ave	303	1.4	V	-13.19	26.63	54.00	-27.37
2352.13	43.20	PK	233	1.5	H	-13.14	30.06	74.00	-43.94
2352.13	37.38	Ave	233	1.5	H	-13.14	24.24	54.00	-29.76
2484.14	42.84	PK	243	1.9	V	-13.08	29.76	74.00	-44.24
2484.14	36.26	Ave	243	1.9	V	-13.08	23.18	54.00	-30.82

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
n20: Middle Channel 2437MHz									
223.49	41.96	QP	183	1.6	H	-11.62	30.34	46.00	-15.66
223.49	36.33	QP	40	1.8	V	-11.62	24.71	46.00	-21.29
4874.00	54.83	PK	148	1.5	V	-0.62	54.21	74.00	-19.79
4874.00	45.29	Ave	148	1.5	V	-0.62	44.67	54.00	-9.33
7311.00	43.30	PK	41	1.2	H	2.21	45.51	74.00	-28.49
7311.00	42.22	Ave	41	1.2	H	2.21	44.43	54.00	-9.57
2322.59	46.21	PK	118	1.7	V	-13.19	33.02	74.00	-40.98
2322.59	38.44	Ave	118	1.7	V	-13.19	25.25	54.00	-28.75
2374.05	44.83	PK	7	1.2	H	-13.14	31.69	74.00	-42.31
2374.05	37.37	Ave	7	1.2	H	-13.14	24.23	54.00	-29.77
2490.62	44.05	PK	248	1.8	V	-13.08	30.97	74.00	-43.03
2490.62	37.60	Ave	248	1.8	V	-13.08	24.52	54.00	-29.48



Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
n20: High Channel 2462MHz									
223.49	40.79	QP	146	1.4	H	-11.62	29.17	46.00	-16.83
223.49	35.91	QP	165	2.0	V	-11.62	24.29	46.00	-21.71
4924.00	56.20	PK	115	1.1	V	-0.24	55.96	74.00	-18.04
4924.00	46.21	Ave	115	1.1	V	-0.24	45.97	54.00	-8.03
7386.00	44.21	PK	221	1.0	H	2.84	47.05	74.00	-26.95
7386.00	42.69	Ave	221	1.0	H	2.84	45.53	54.00	-8.47
2340.16	46.12	PK	313	1.6	V	-13.19	32.93	74.00	-41.07
2340.16	37.96	Ave	313	1.6	V	-13.19	24.77	54.00	-29.23
2370.98	42.77	PK	354	1.1	H	-13.14	29.63	74.00	-44.37
2370.98	36.20	Ave	354	1.1	H	-13.14	23.06	54.00	-30.94
2497.73	43.67	PK	156	1.0	V	-13.08	30.59	74.00	-43.41
2497.73	38.69	Ave	156	1.0	V	-13.08	25.61	54.00	-28.39

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
n40: Low Channel 2422MHz									
223.49	40.65	QP	66	1.5	H	-11.62	29.03	46.00	-16.97
223.49	37.19	QP	193	1.4	V	-11.62	25.57	46.00	-20.43
4844.00	54.38	PK	255	2.0	V	-1.06	53.32	74.00	-20.68
4844.00	43.71	Ave	255	2.0	V	-1.06	42.65	54.00	-11.35
7266.00	42.84	PK	126	1.1	H	1.33	44.17	74.00	-29.83
7266.00	40.89	Ave	126	1.1	H	1.33	42.22	54.00	-11.78
2318.42	45.05	PK	122	1.5	V	-13.19	31.86	74.00	-42.14
2318.42	38.02	Ave	122	1.5	V	-13.19	24.83	54.00	-29.17
2372.41	43.93	PK	9	1.9	H	-13.14	30.79	74.00	-43.21
2372.41	36.68	Ave	9	1.9	H	-13.14	23.54	54.00	-30.46
2496.81	44.75	PK	191	1.0	V	-13.08	31.67	74.00	-42.33
2496.81	36.22	Ave	191	1.0	V	-13.08	23.14	54.00	-30.86

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
n40: Middle Channel 2437MHz									
223.49	40.38	QP	147	1.3	H	-11.62	28.76	46.00	-17.24
223.49	37.89	QP	260	1.3	V	-11.62	26.27	46.00	-19.73
4874.00	54.98	PK	221	2.0	V	-0.62	54.36	74.00	-19.64
4874.00	43.20	Ave	221	2.0	V	-0.62	42.58	54.00	-11.42
7311.00	42.71	PK	255	1.3	H	2.21	44.92	74.00	-29.08
7311.00	41.80	Ave	255	1.3	H	2.21	44.01	54.00	-9.99
2335.96	45.64	PK	146	1.3	V	-13.19	32.45	74.00	-41.55
2335.96	39.20	Ave	146	1.3	V	-13.19	26.01	54.00	-27.99
2380.53	42.49	PK	175	2.0	H	-13.14	29.35	74.00	-44.65
2380.53	36.33	Ave	175	2.0	H	-13.14	23.19	54.00	-30.81
2494.81	44.03	PK	326	1.3	V	-13.08	30.95	74.00	-43.05
2494.81	37.85	Ave	326	1.3	V	-13.08	24.77	54.00	-29.23

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
n40: High Channel 2452MHz									
223.49	40.95	QP	273	1.9	H	-11.62	29.33	46.00	-16.67
223.49	38.25	QP	100	1.1	V	-11.62	26.63	46.00	-19.37
4904.00	54.19	PK	11	1.6	V	-0.24	53.95	74.00	-20.05
4904.00	42.24	Ave	11	1.6	V	-0.24	42.00	54.00	-12.00
7356.00	43.56	PK	197	2.0	H	2.84	46.40	74.00	-27.60
7356.00	41.32	Ave	197	2.0	H	2.84	44.16	54.00	-9.84
2327.08	46.31	PK	211	1.3	V	-13.19	33.12	74.00	-40.88
2327.08	38.06	Ave	211	1.3	V	-13.19	24.87	54.00	-29.13
2364.42	44.31	PK	30	1.1	H	-13.14	31.17	74.00	-42.83
2364.42	38.69	Ave	30	1.1	H	-13.14	25.55	54.00	-28.45
2484.52	42.90	PK	45	1.4	V	-13.08	29.82	74.00	-44.18
2484.52	37.68	Ave	45	1.4	V	-13.08	24.60	54.00	-29.40

**Test Frequency: 18GHz~25GHz**

The measurements were more than 20 dB below the limit and not reported.

## 8 Band Edge Measurement



Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	558074 D01 DTS Meas Guidance v03r03
Test Limit:	Regulation 15.247 (d), In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
Test Mode:	Transmitting

### 8.1 Test Procedure


1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

## 8.2 Test Result


Test result plots shown as follows:

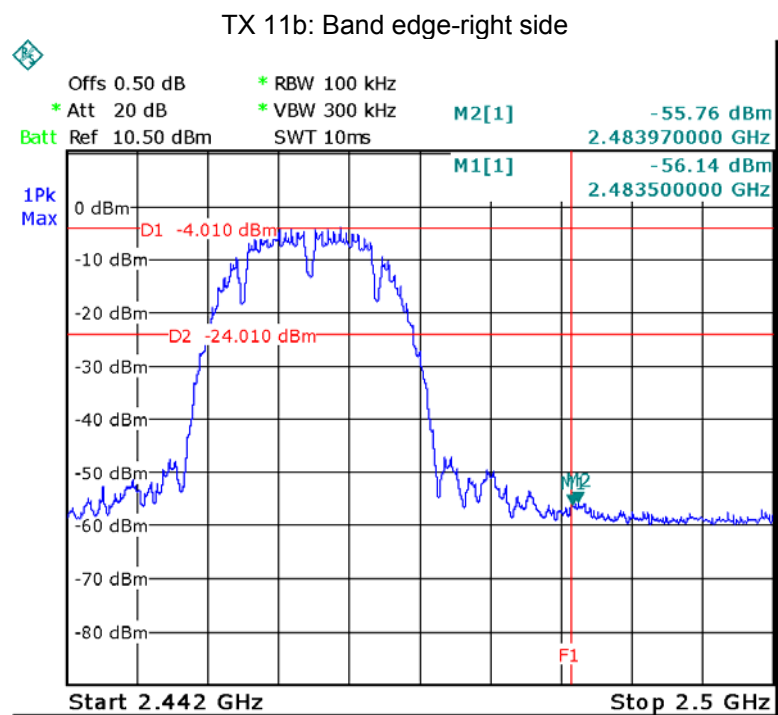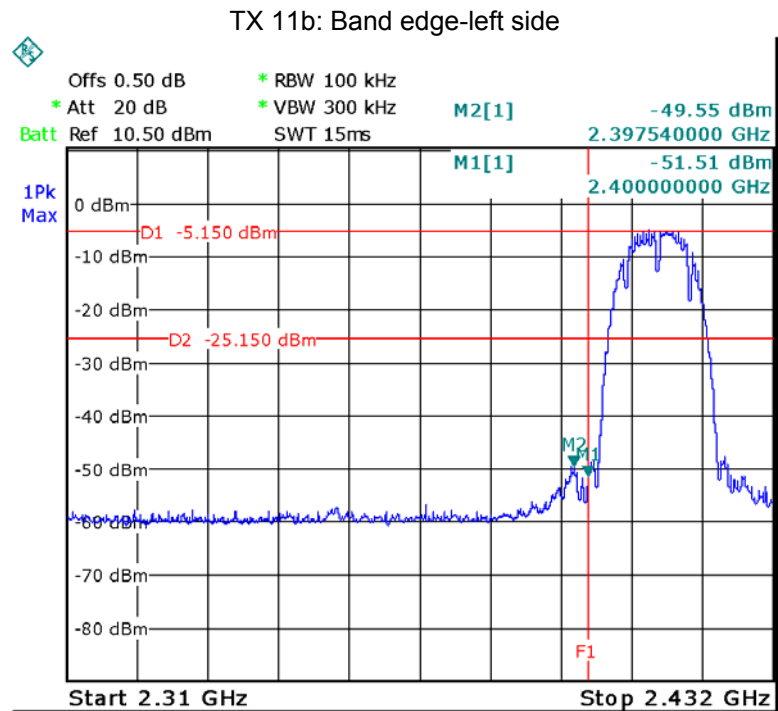


TX 11g: Band edge-left side

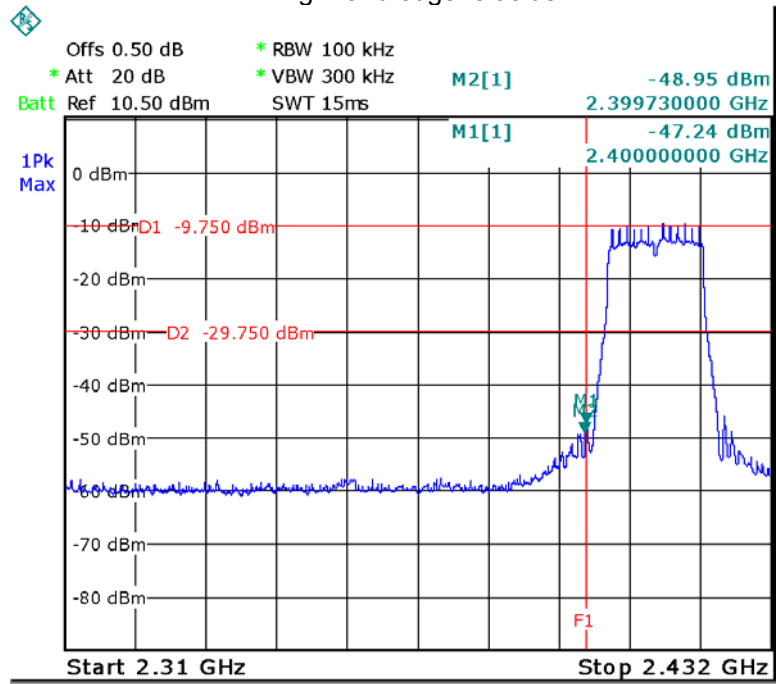


TX 11g: Band edge-right side

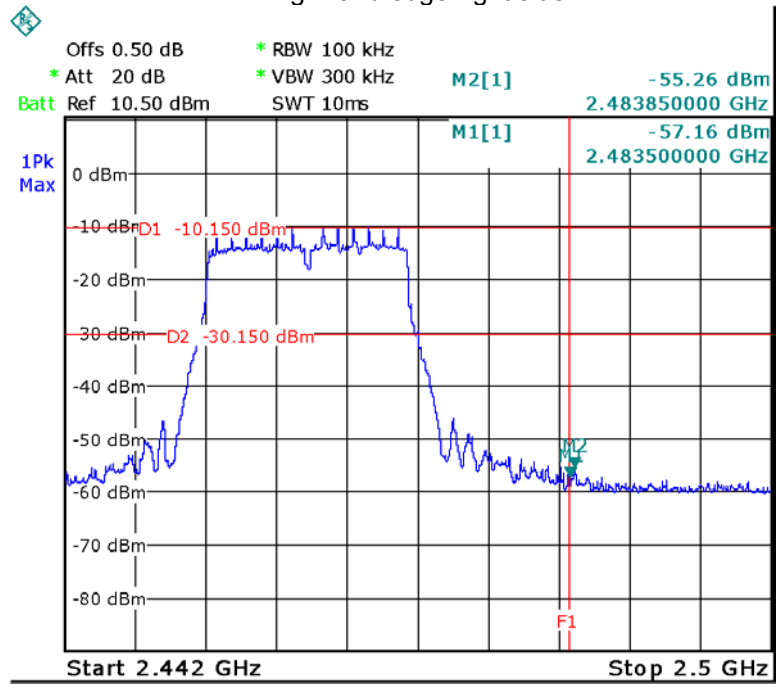

TX 11n HT20: Band edge-left side

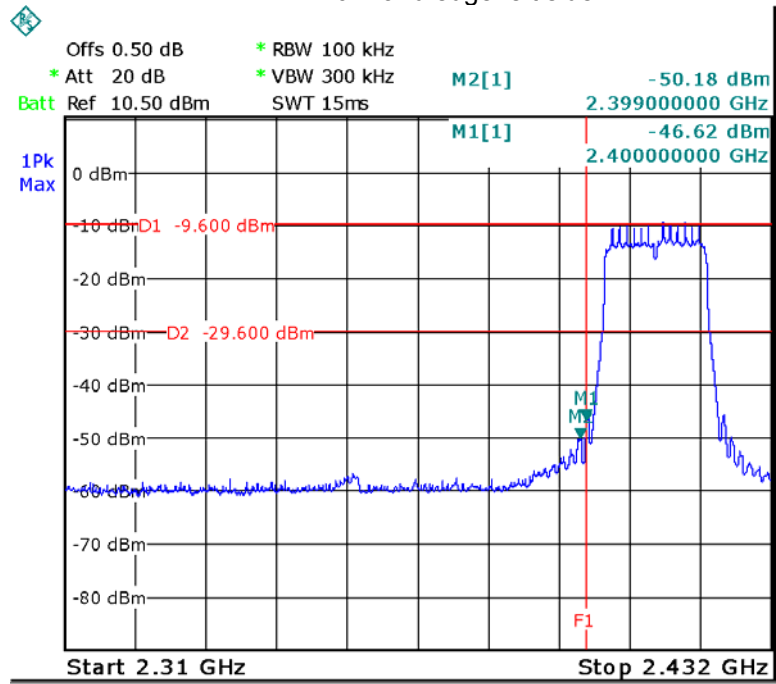


TX 11n HT20: Band edge-right side

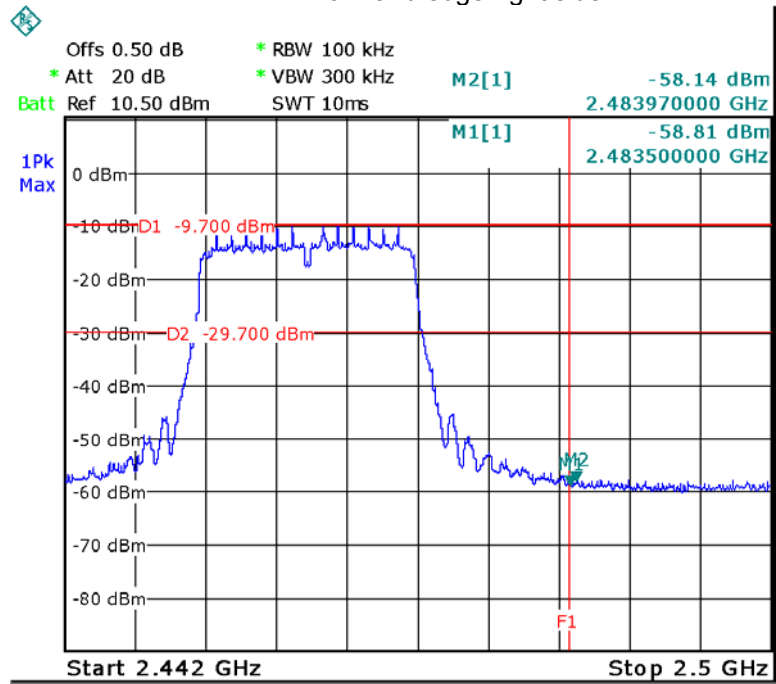




TX 11n HT40: Band edge-left side

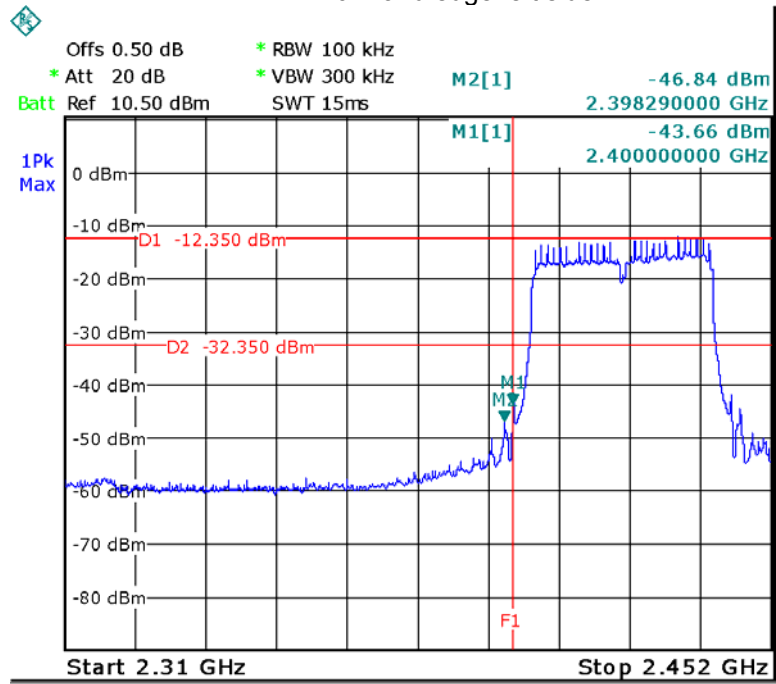

TX 11n HT40: Band edge-right side

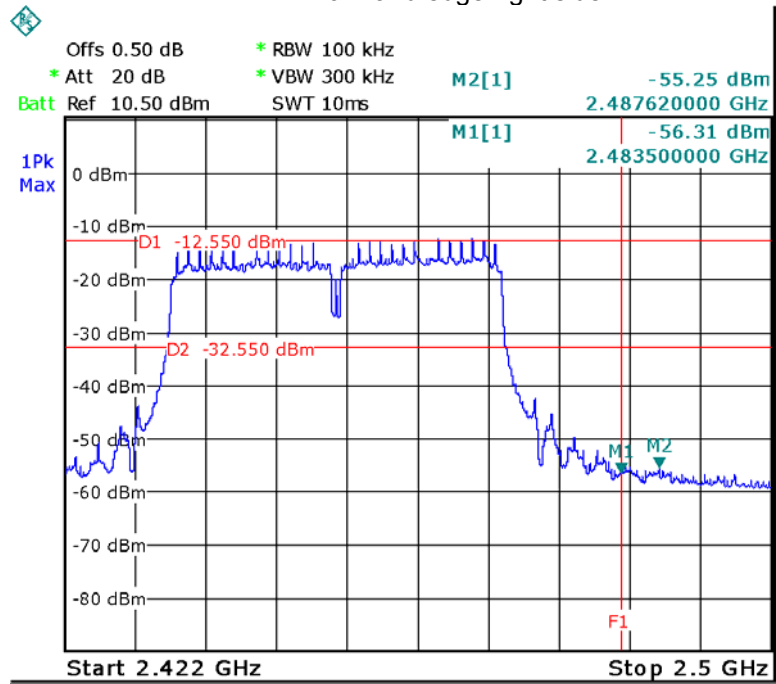

## 9 6 dB Bandwidth Measurement

Test Requirement:

FCC CFR47 Part 15 Section 15.247

Test Method:

558074 D01 DTS Meas Guidance v03r03


### 9.1 Test Procedure:



1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz



### 9.2 Test Result:



Operation mode	Bandwidth (MHz)		
	Channel 1	Channel 6	Channel 11
TX 11b	Channel 1	Channel 6	Channel 11
	12.108	12.108	12.108
TX 11g	Channel 1	Channel 6	Channel 11
	16.417	16.417	16.417
TX 11n HT20	Channel 1	Channel 6	Channel 11
	17.541	17.541	17.541
TX 11n HT40	Channel 3	Channel 6	Channel 9
	35.890	35.890	35.890



Test result plot as follows:


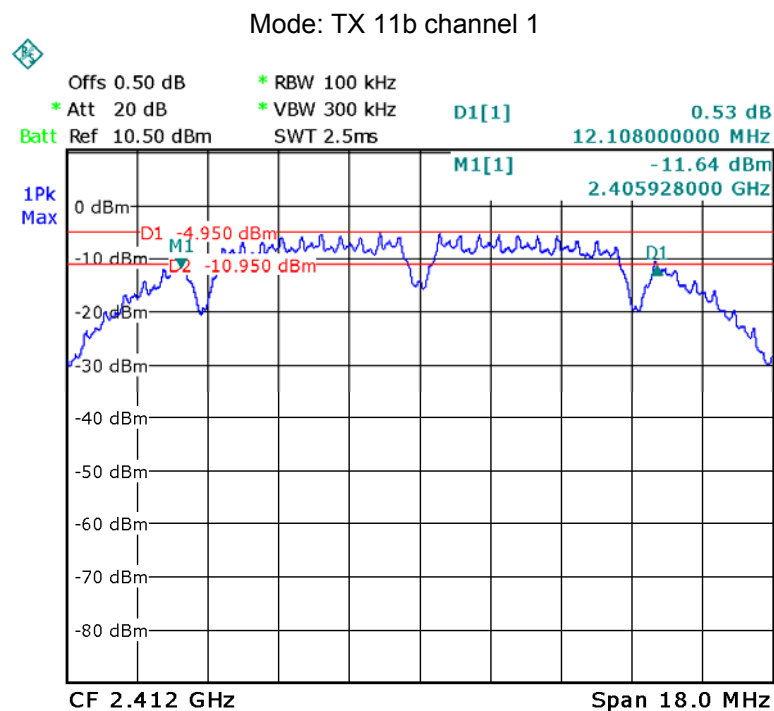


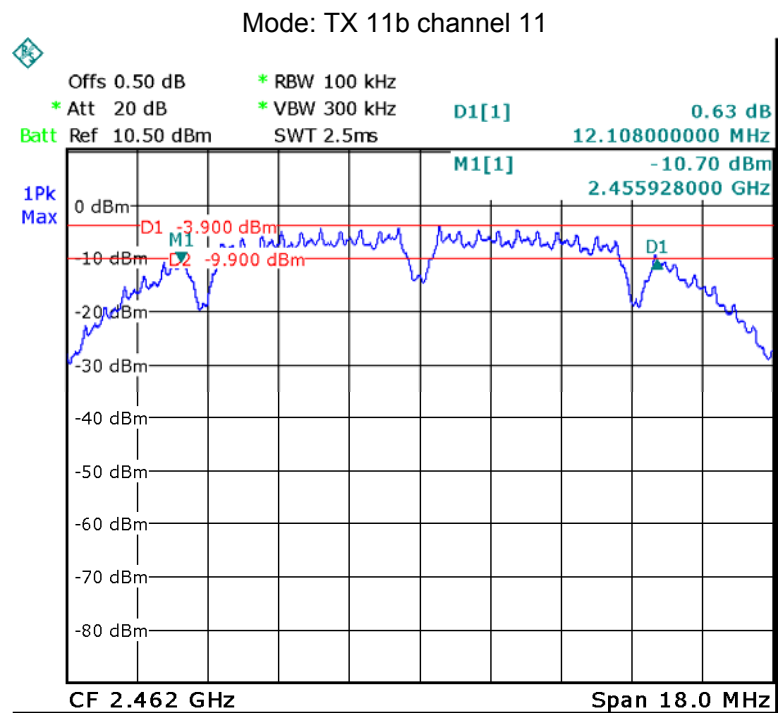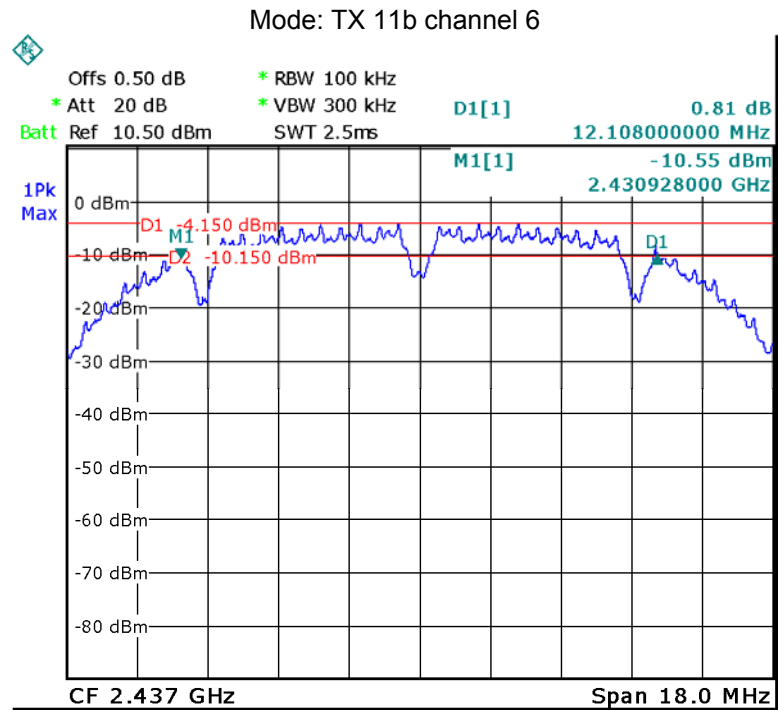


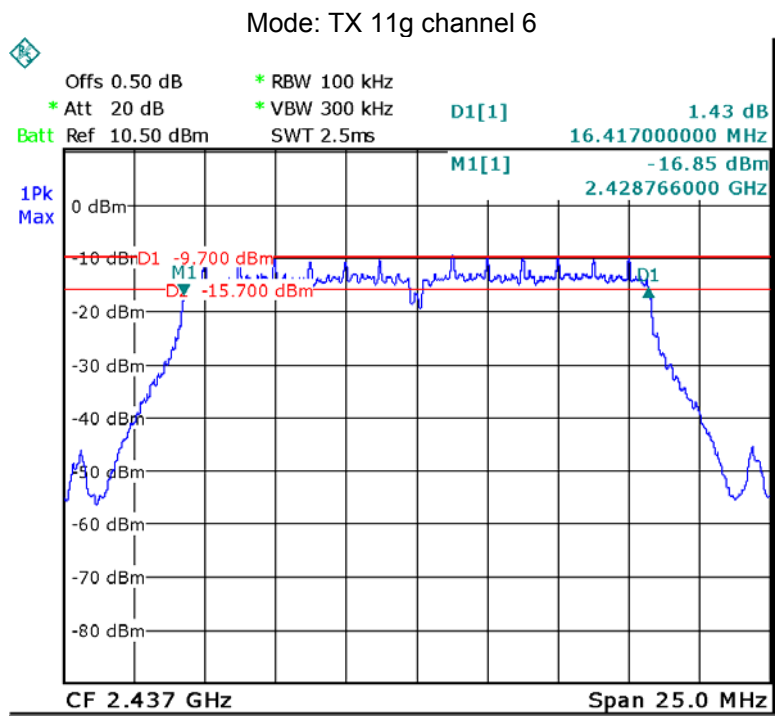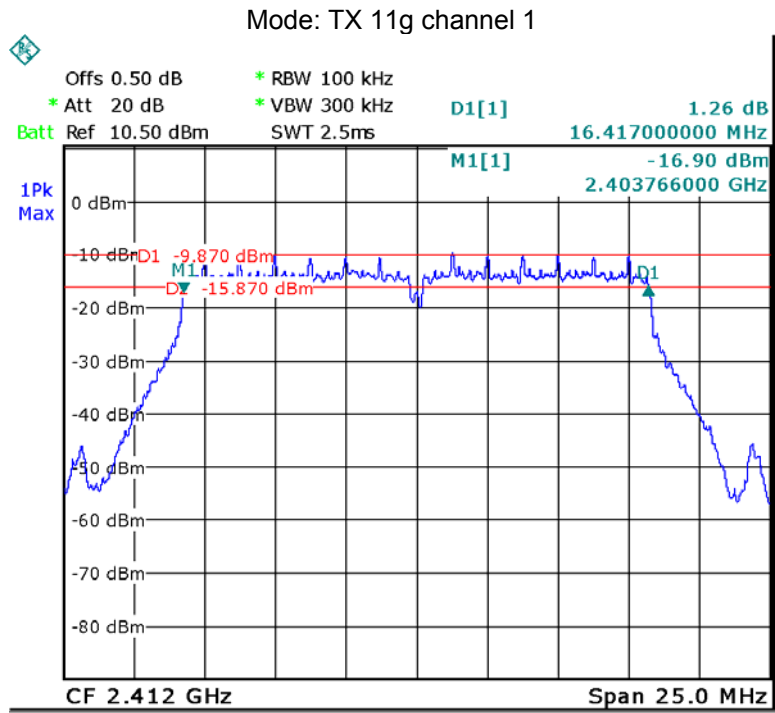

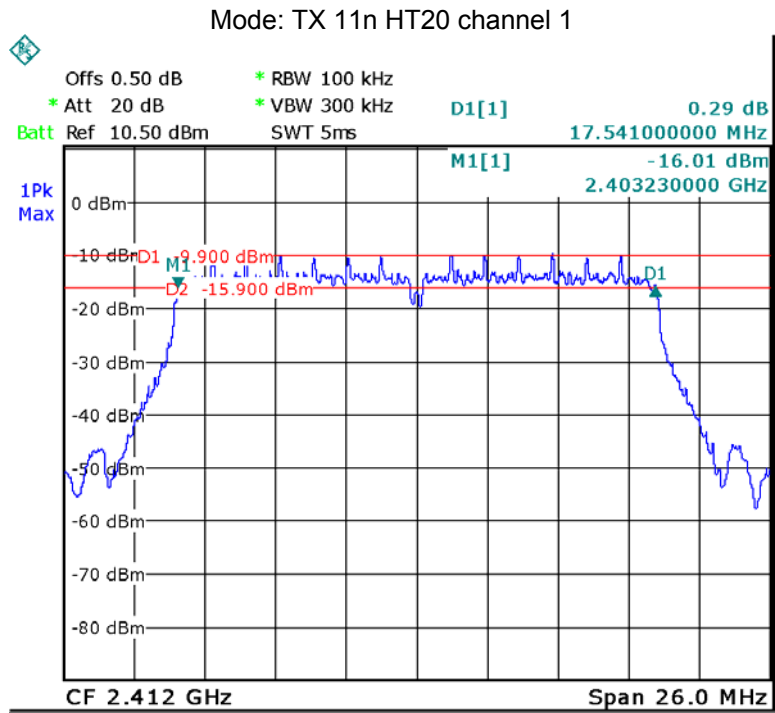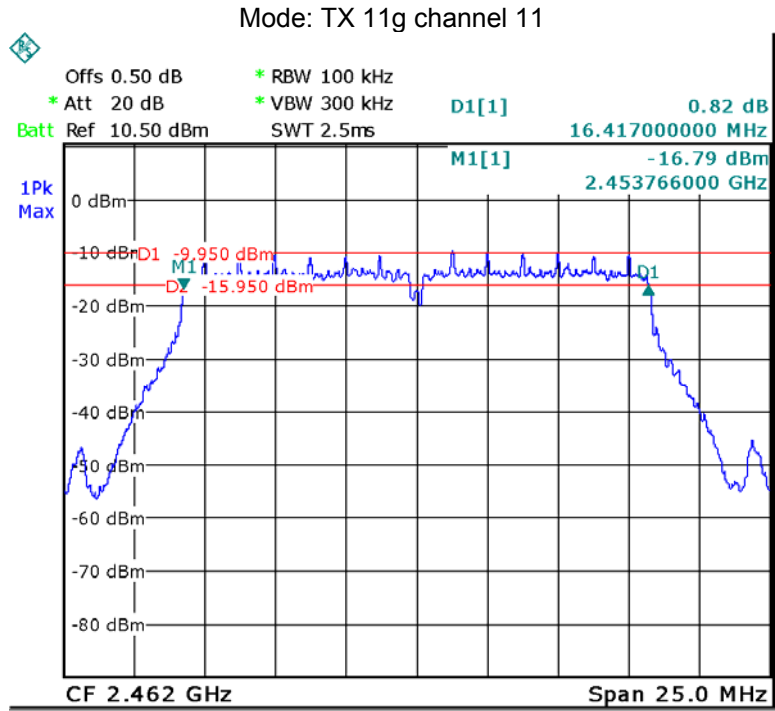

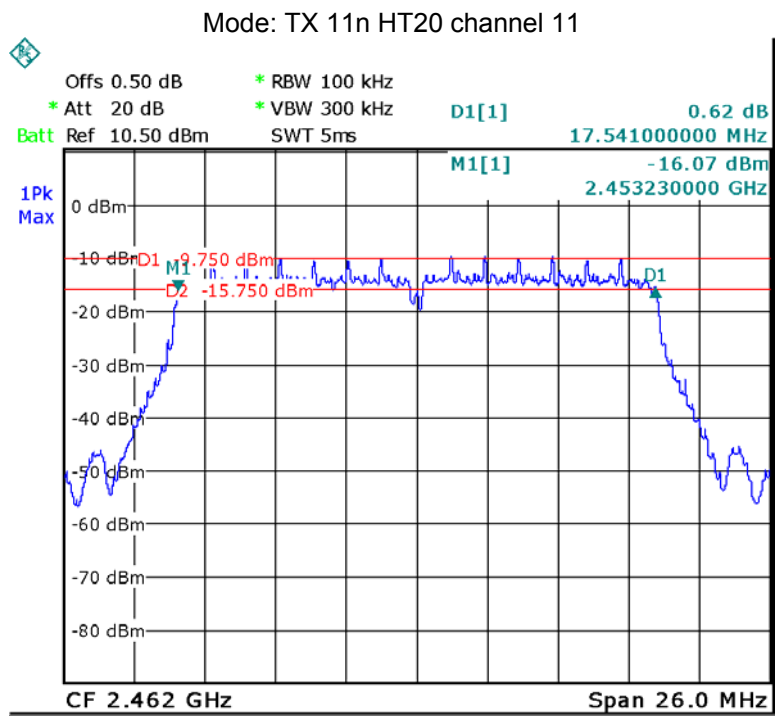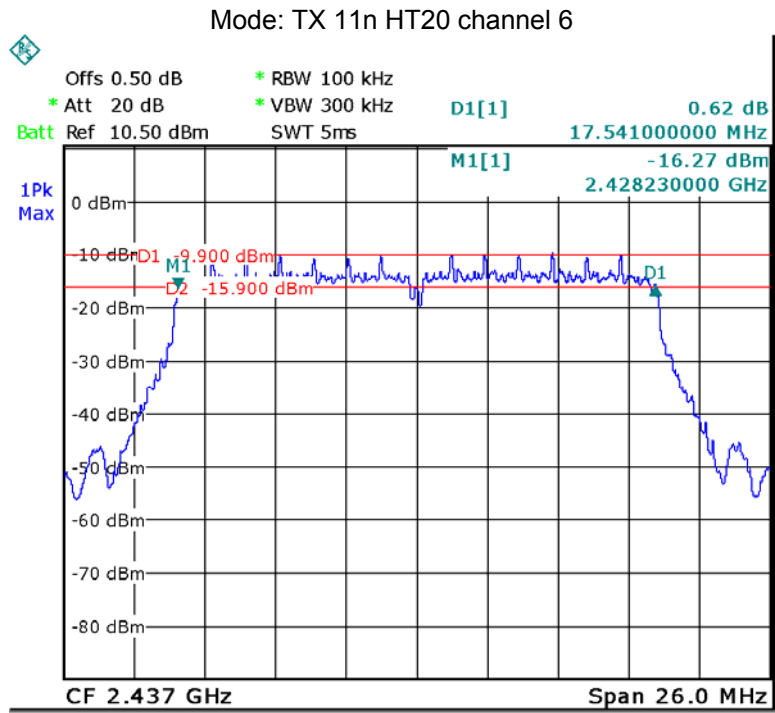

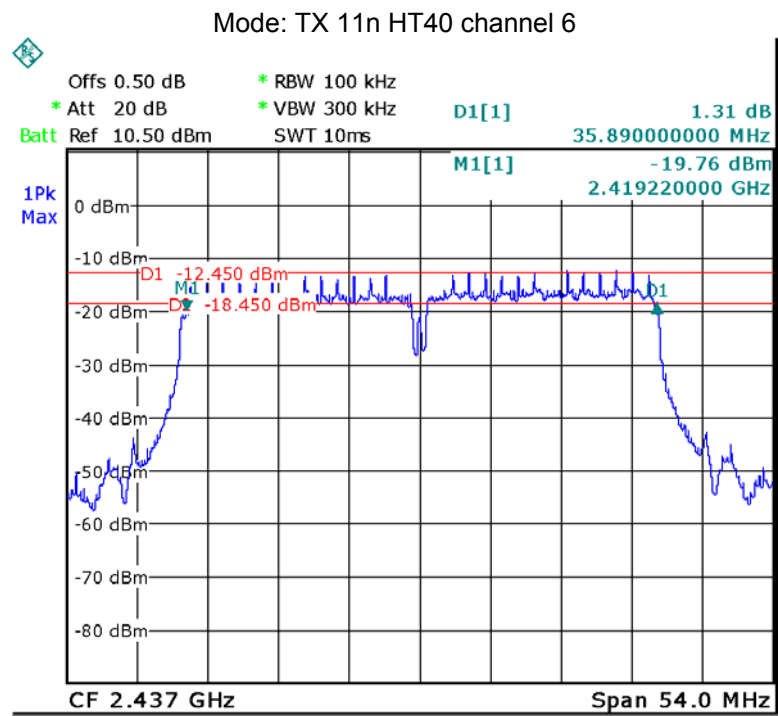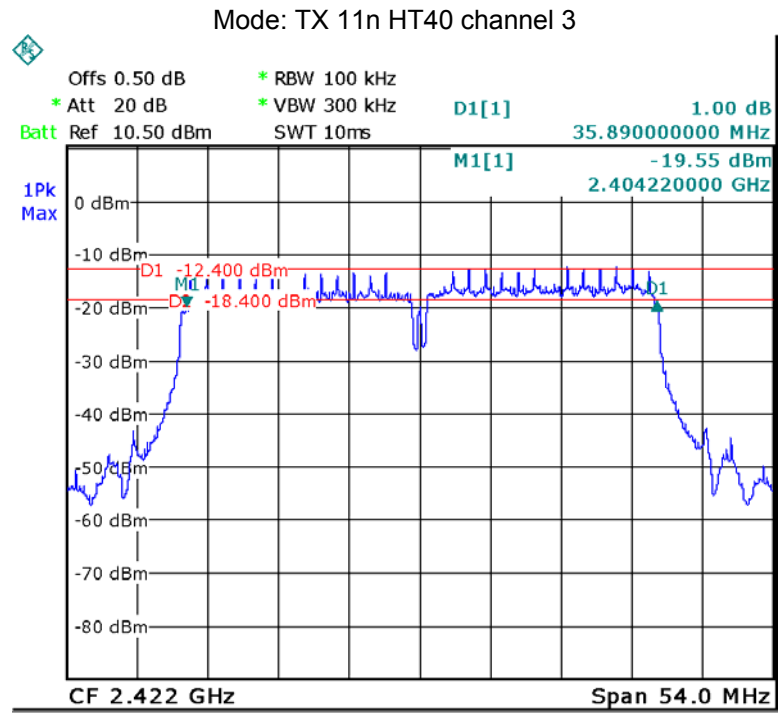

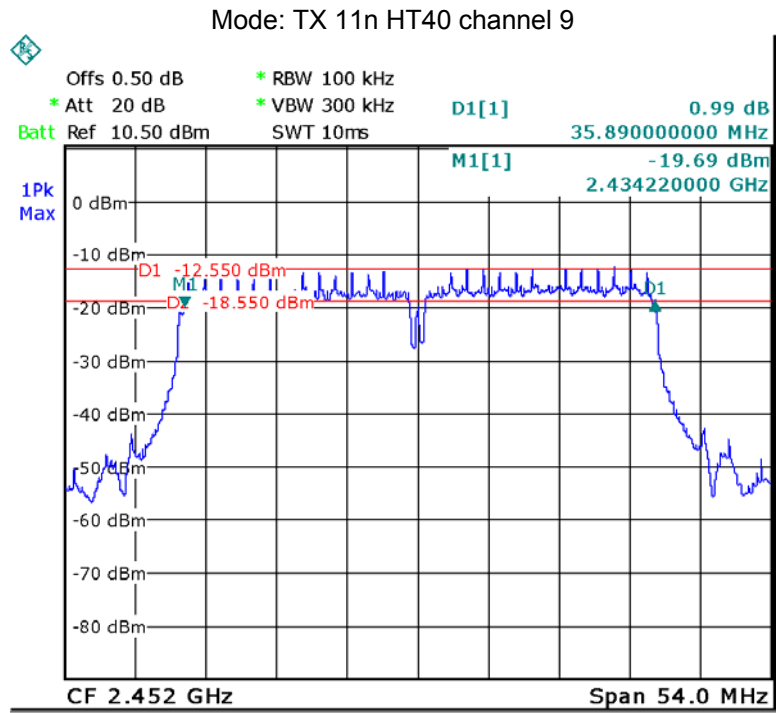



## 10 Maximum Peak Output Power

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: 558074 D01 DTS Meas Guidance v03r03

### 10.1 Test Procedure:

KDB558074 D01 v03r03 section 9.1.2

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 1 MHz. VBW = 3 MHz. Sweep = auto; Detector Function = Peak, Set the span to fully encompass the DTS bandwidth.
3. Keep the EUT in transmitting at lowest, medium and highest channel individually. Record the max value.

### 10.2 Test Result:


Test mode :TX 11b		
10 Maximum Peak Output Power (dBm)		
2412MHz	2437MHz	2462MHz
9.40	9.29	9.21
Limit:		
1W/30dBm		

Test mode :TX 11g		
10 Maximum Peak Output Power (dBm)		
2412MHz	2437MHz	2462MHz
9.43	9.55	9.33
Limit		
1W/30dBm		


Test mode :TX 11n HT20		
10 Maximum Peak Output Power (dBm)		
2412MHz	2437MHz	2462MHz
9.46	9.38	9.59
Limit		
1W/30dBm		



Test mode : TX 11n HT40		
10 Maximum Peak Output Power (dBm)		
2422MHz	2437MHz	2452MHz
9.49	9.50	9.39
Limit		
1W/30dBm		

Mode: TX 11b channel 1

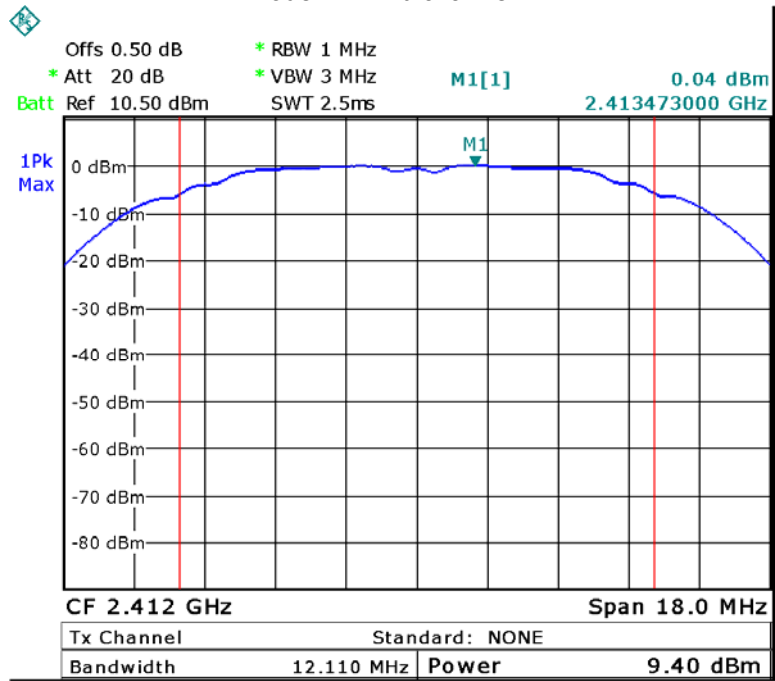


Mode: TX 11b channel 6

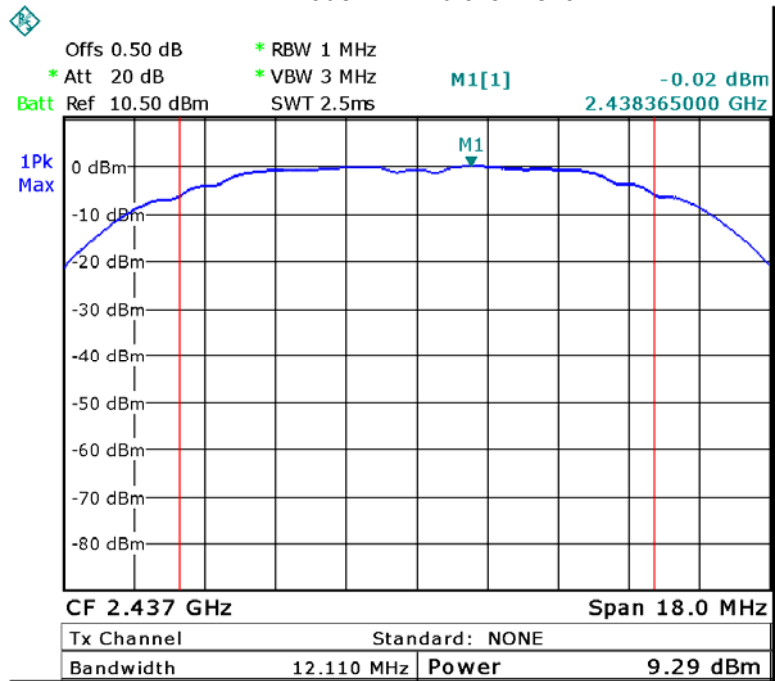


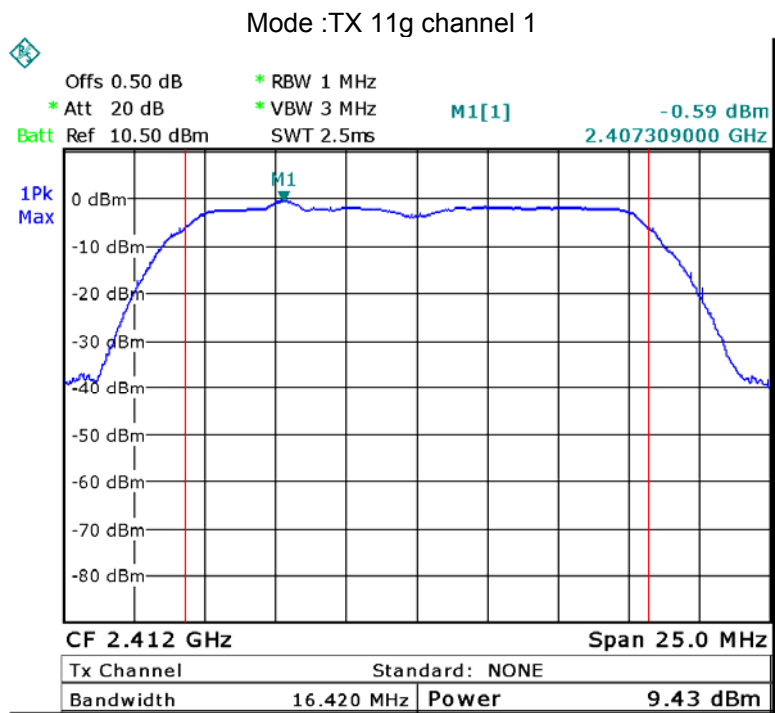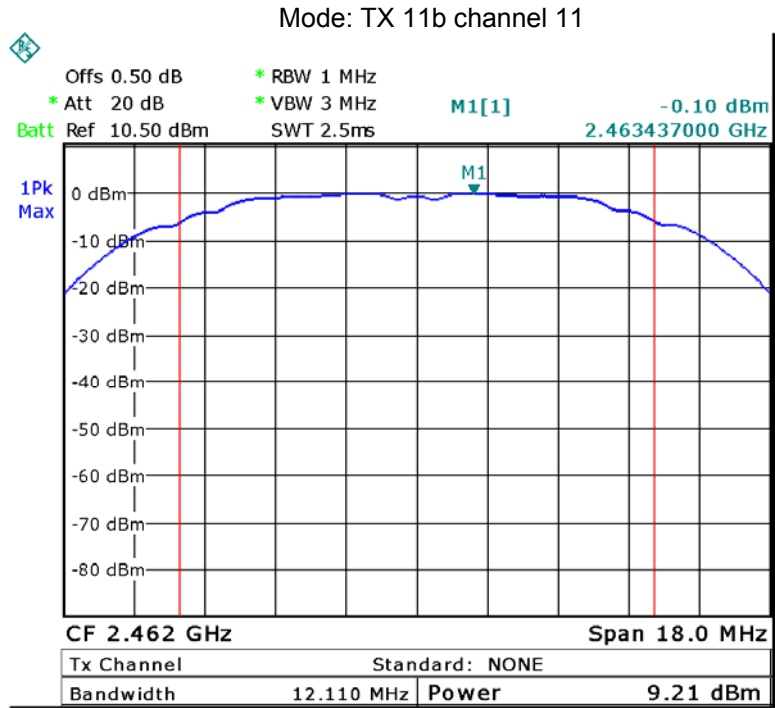


Mode :TX 11g channel 6

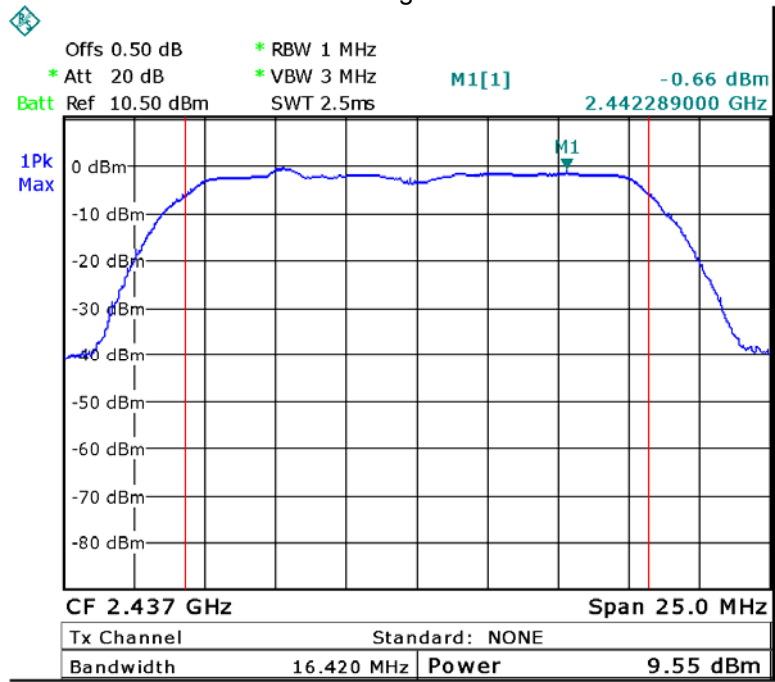


Mode :TX 11g channel 11

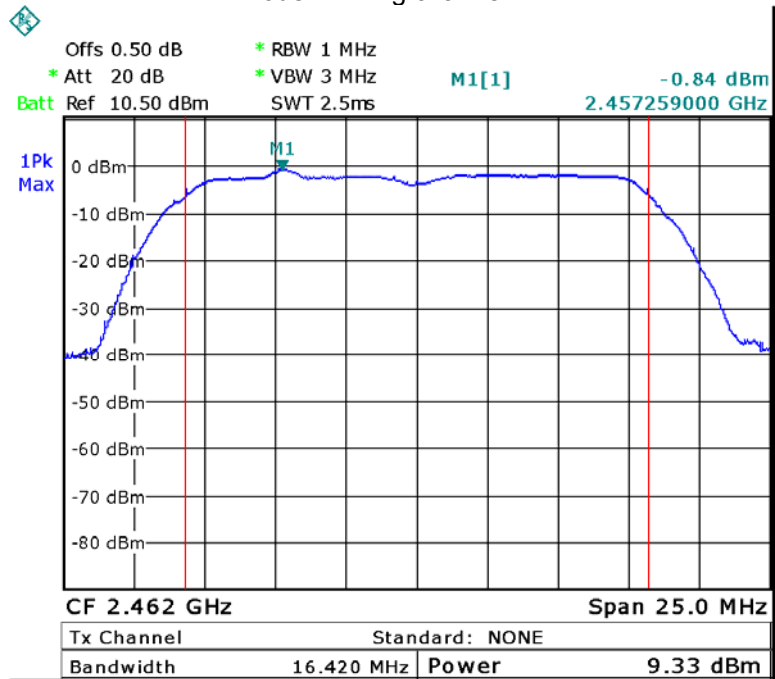


Mode: TX 11n HT20 channel 1

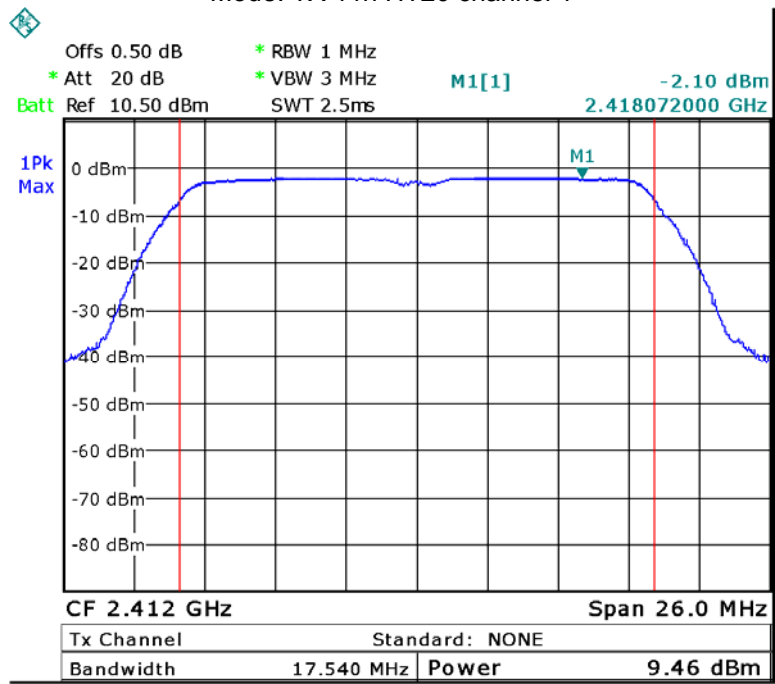


Mode: TX 11n HT20 channel 6


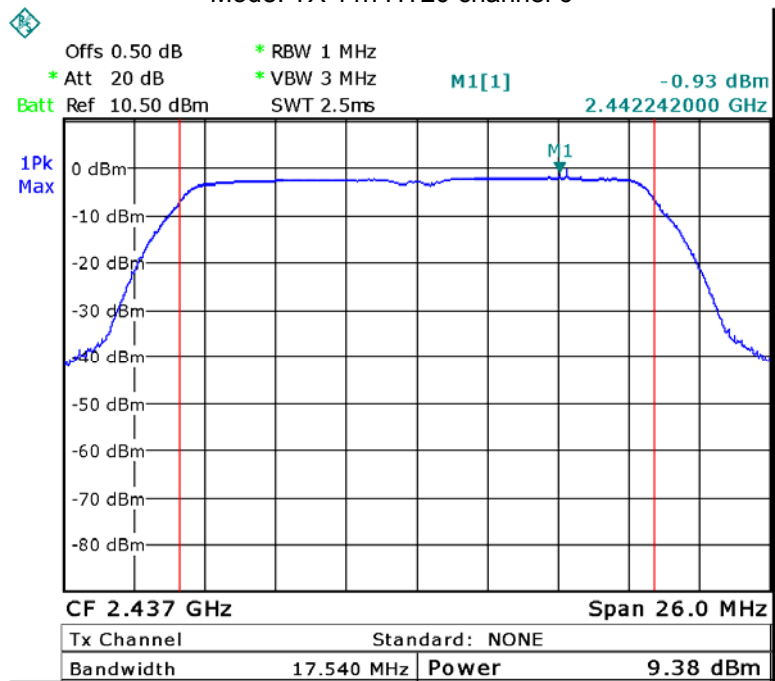


Mode: TX 11n HT20 channel 11

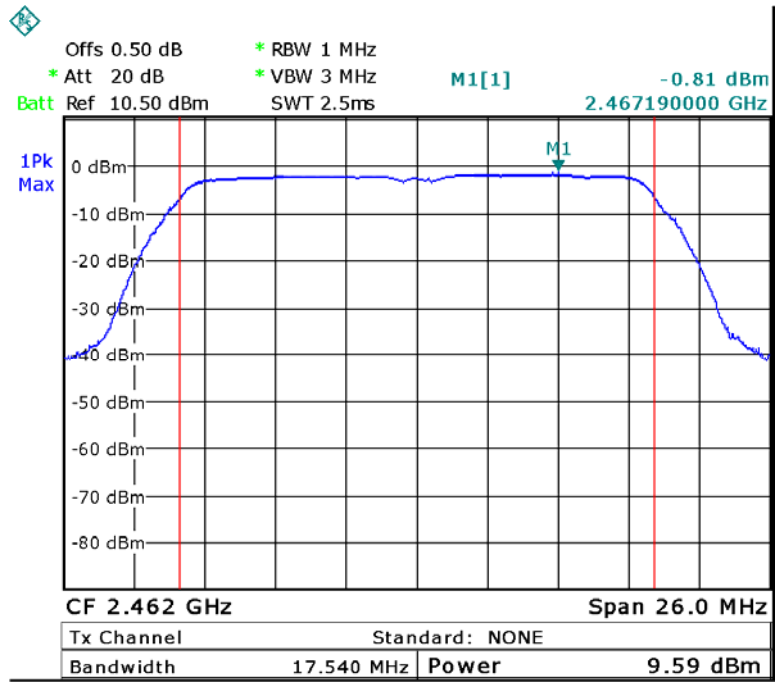

Mode: TX 11n HT40 channel 3

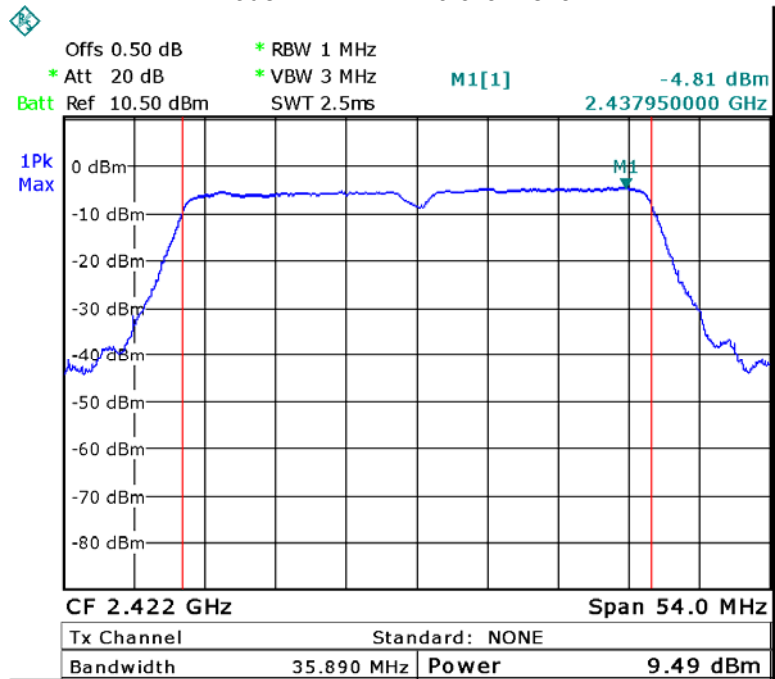

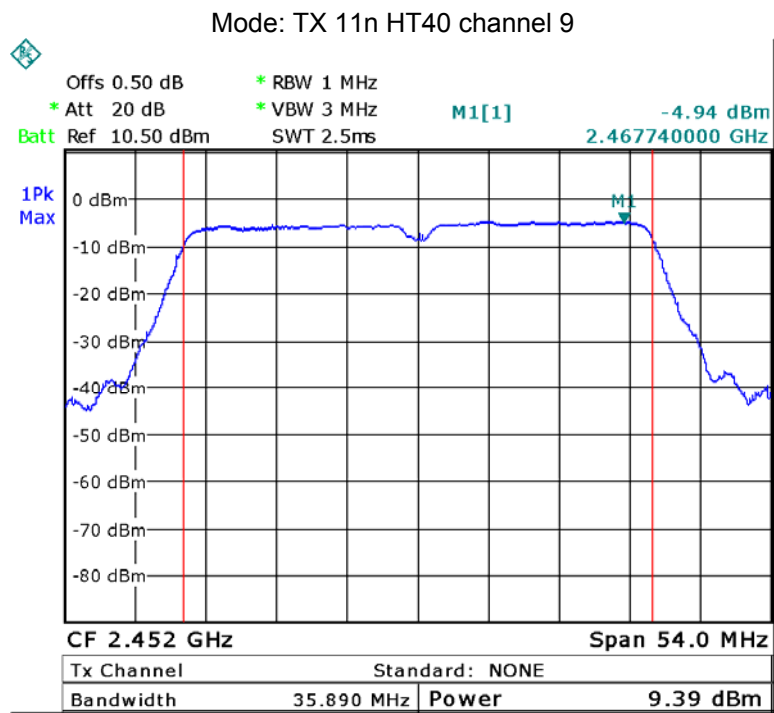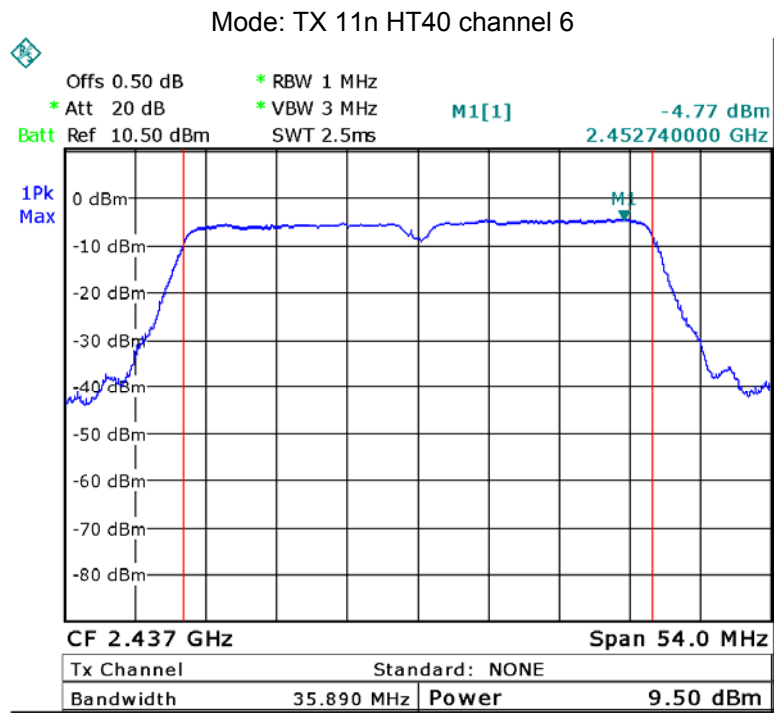

## 11 Power Spectral density

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: 558074 D01 DTS Meas Guidance v03r03

### 11.1 Test Procedure:

KDB558074 D01 v03r03 section 10.2

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 3kHz. VBW = 10kHz , Span = 1.5 times the DTS channel bandwidth(6 dB bandwidth). Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section  
Submit this plot.

### 11.2 Test Result:



Test mode :TX 11b		
Power Spectral (dBm per 3kHz)		
2412MHz	2437MHz	2462MHz
-20.07	-20.28	-19.20
Limit:		
8dBm per 3kHz		



Test mode :TX 11g		
Power Spectral (dBm per 3kHz)		
2412MHz	2437MHz	2462MHz
-22.62	-22.01	-22.91
Limit		
8dBm per 3kHz		



Test mode :TX 11n HT20		
Power Spectral (dBm per 3kHz)		
2412MHz	2437MHz	2462MHz
-22.24	-21.55	-22.33
Limit		
8dBm per 3kHz		



Test mode : TX 11n HT40		
Power Spectral (dBm per 3kHz)		
2422MHz	2437MHz	2452MHz
-21.91	-23.37	-23.00
Limit		
8dBm per 3kHz		



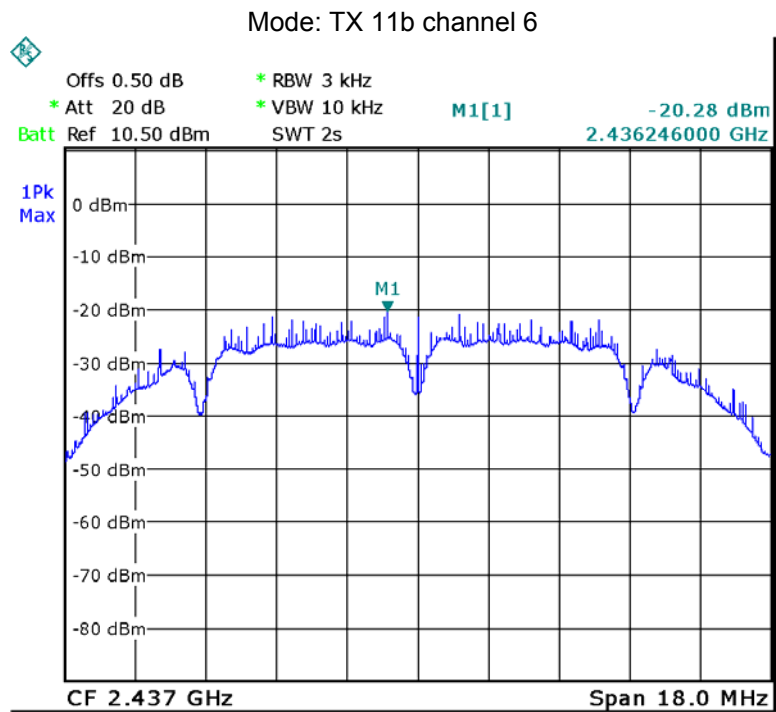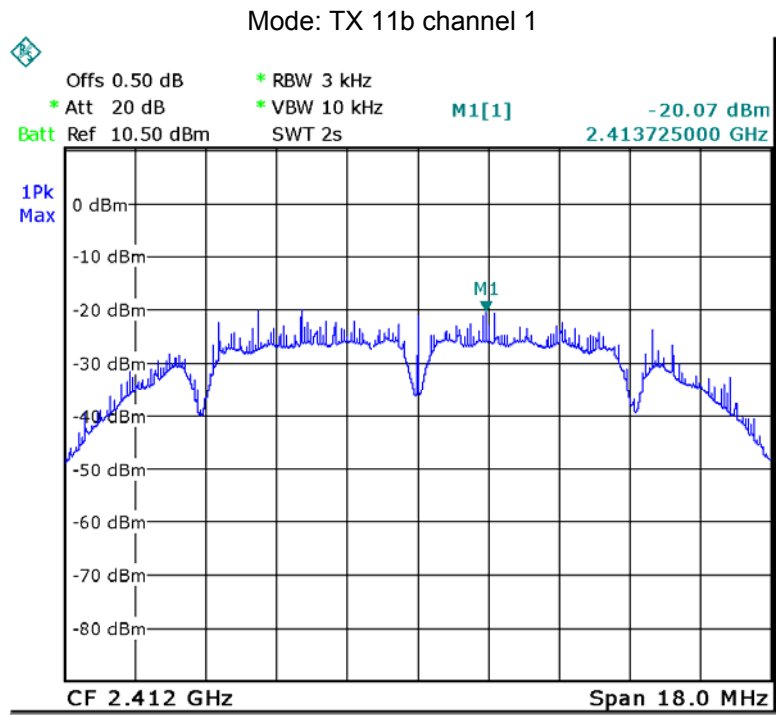


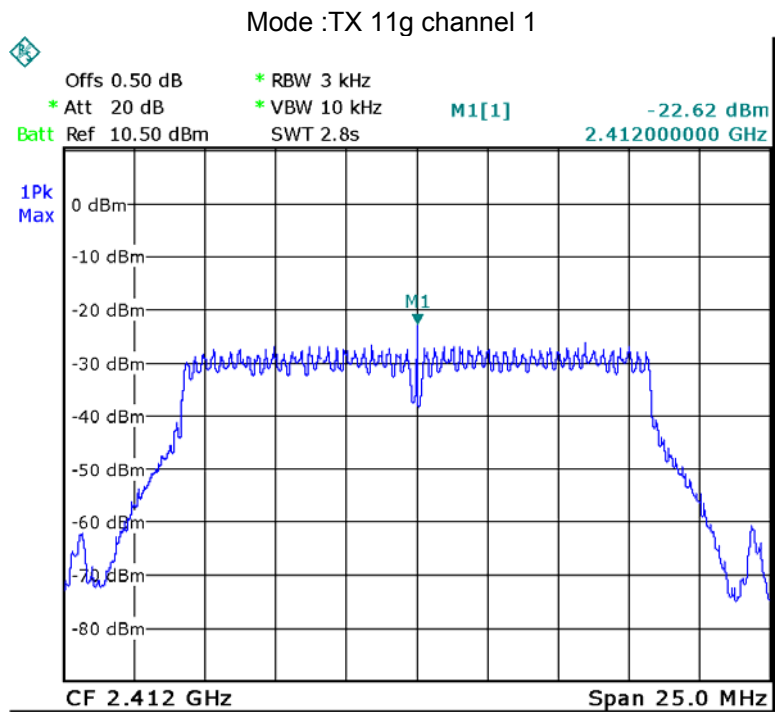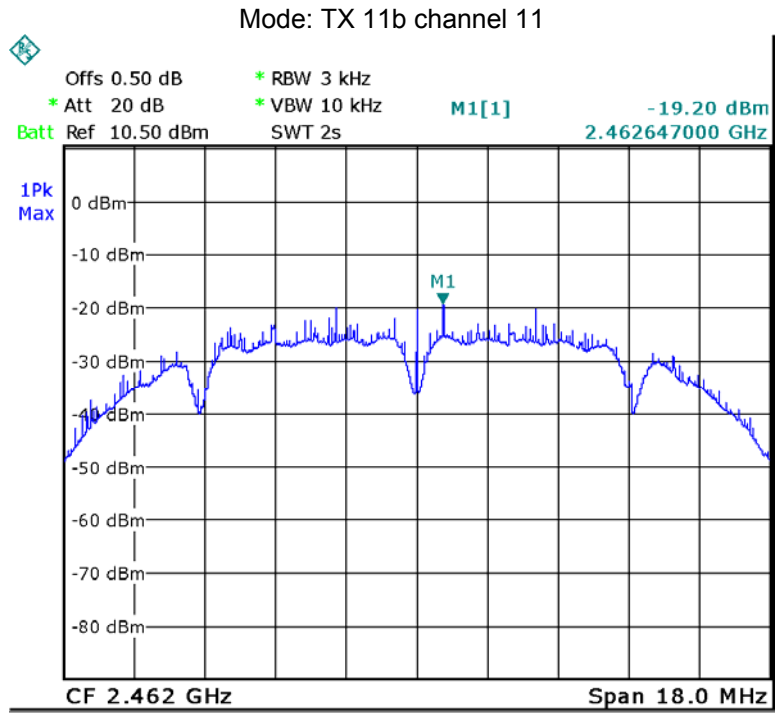

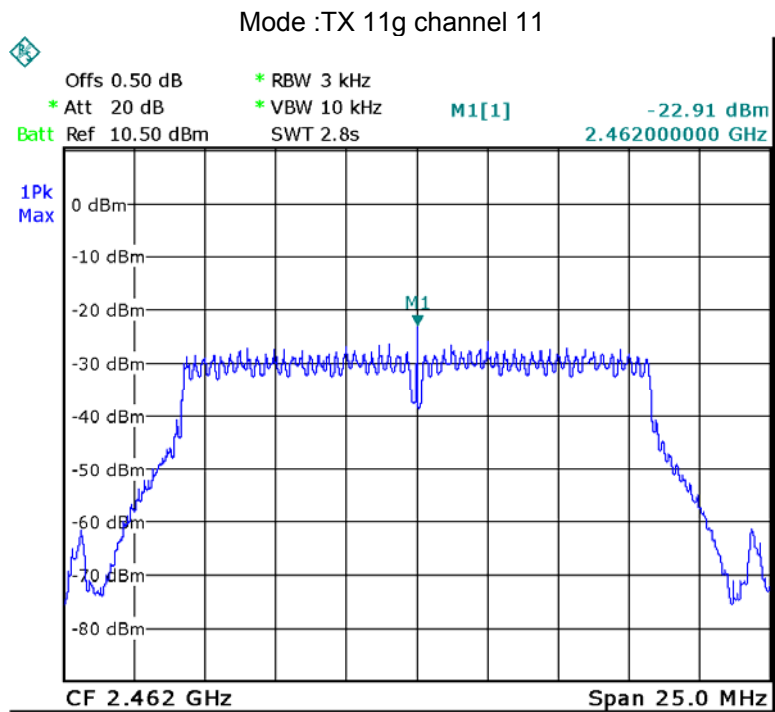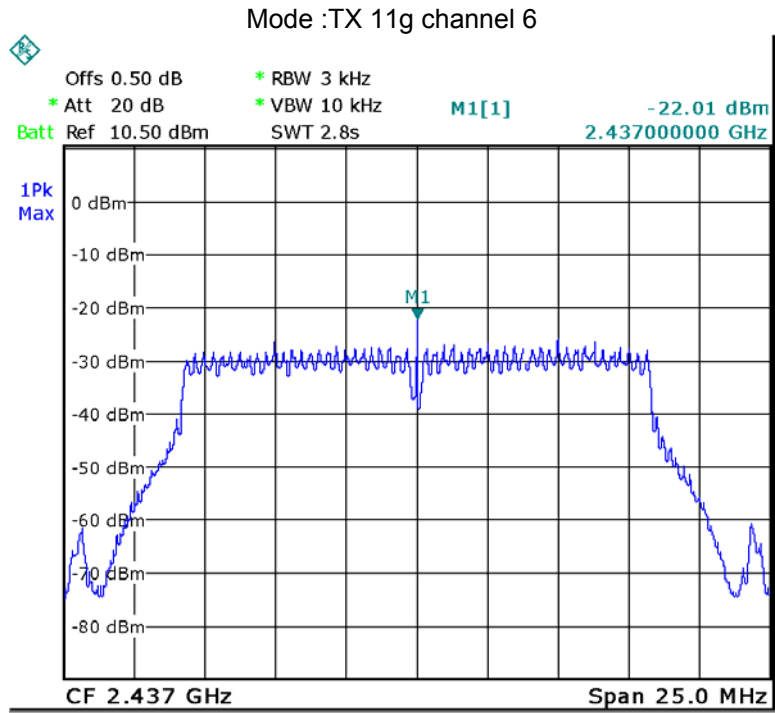


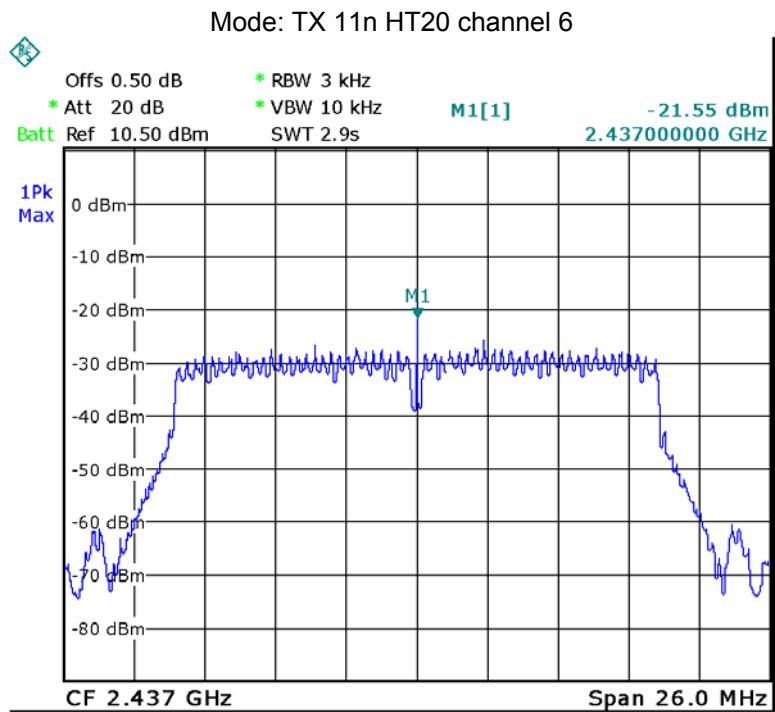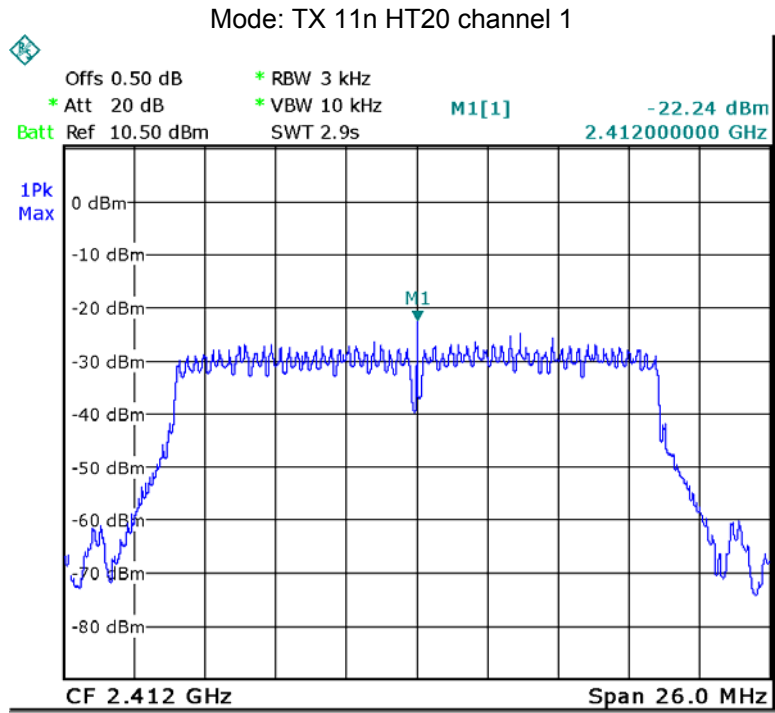


Mode: TX 11n HT20 channel 11

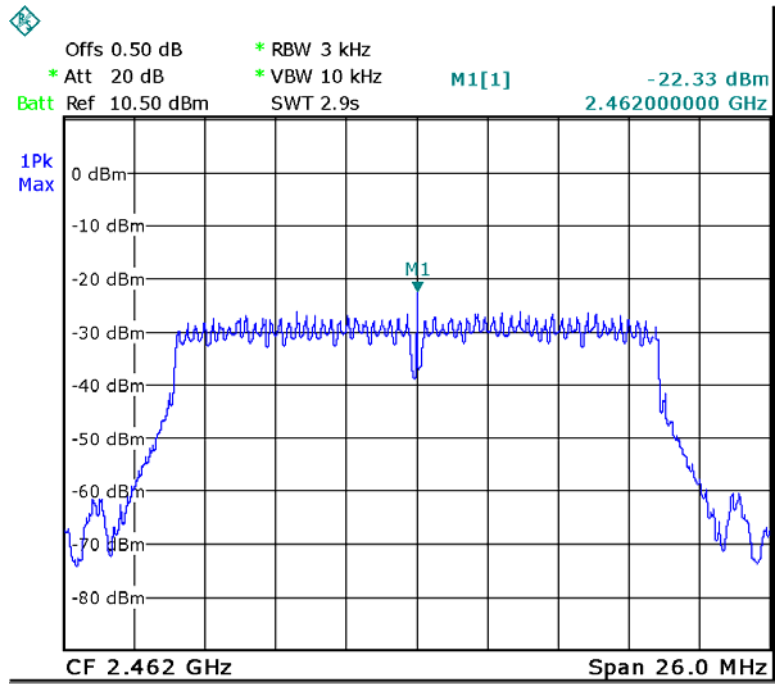


Mode: TX 11n HT40 channel 3

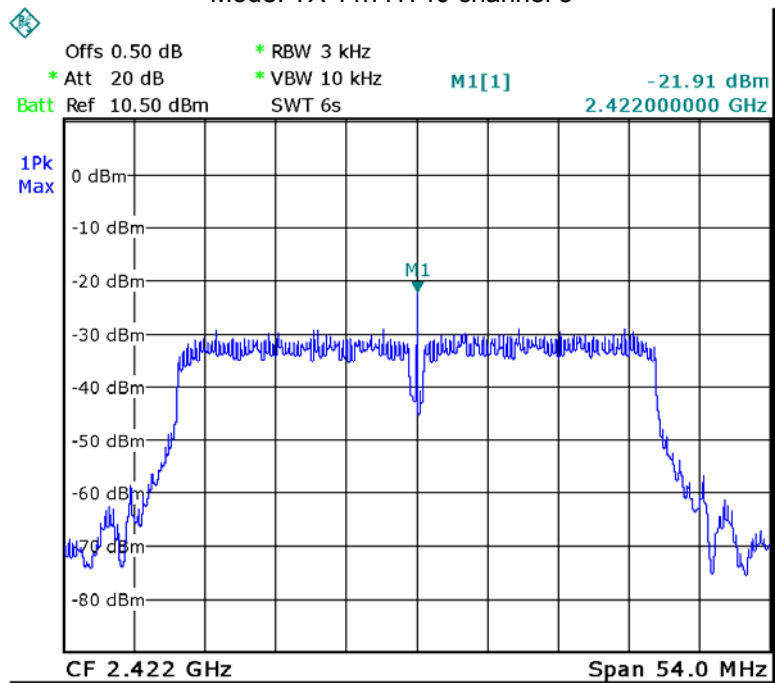

Mode: TX 11n HT40 channel 6

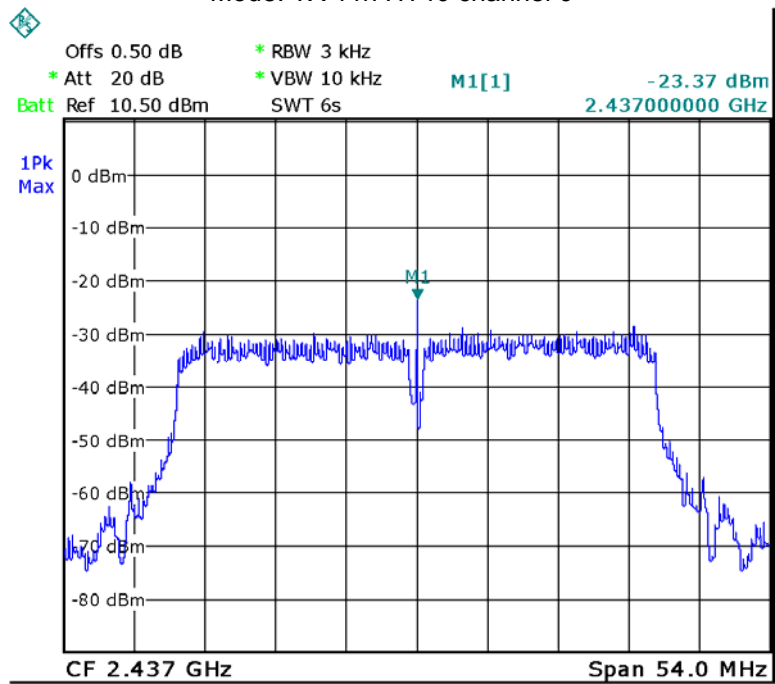

Mode: TX 11n HT40 channel 9

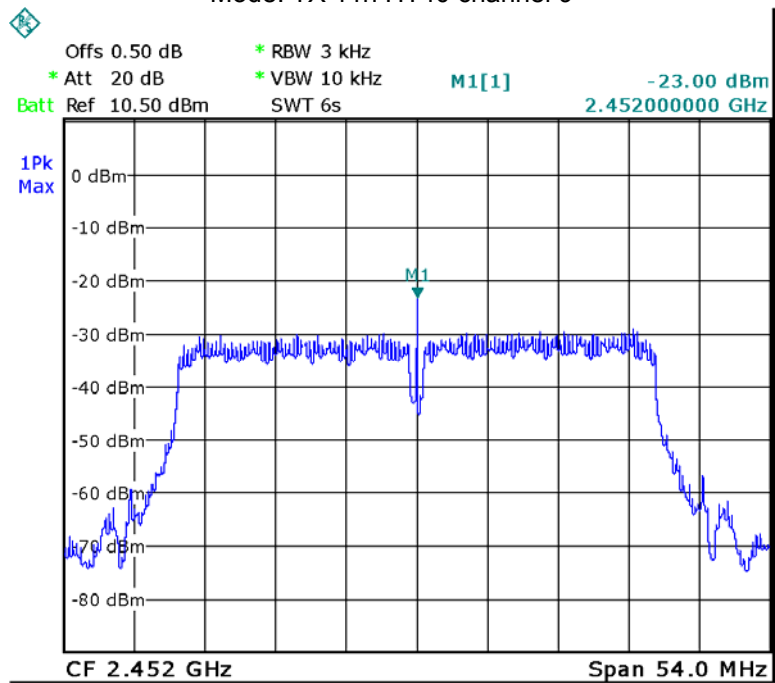

## 12 Antenna Requirement

According to the FCC Part 15 Paragraph 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. This product has a internal integrated antenna fulfill the requirement of this section.

## 13 RF Exposure

Test Requirement:	FCC Part 1.1307
Evaluation Method:	FCC Part 2.1091

### 13.1 Requirements

Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess limit for maximum permissible exposure. In accordance with 47 CFR FCC Part 2 Subpart J, section 2.1091 this device has been defined as a mobile device whereby a distance of 0.2 m normally can be maintained between the user and the device.

### 13.2 The procedures / limit

#### (A) Limits for Occupational / Controlled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm <sup>2</sup> )	Averaging Time  E  <sup>2</sup> ,  H  <sup>2</sup> or S (minutes)
0.3-3.0	614	1.63	(100)*	6
3.0-30	1842 / f	4.89 / f	(900 / f)*	6
30-300	61.4	0.163	1.0	6
300-1500			F/300	6
1500-100,000			5	6

#### (B) Limits for General Population / Uncontrolled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm <sup>2</sup> )	Averaging Time  E  <sup>2</sup> ,  H  <sup>2</sup> or S (minutes)
0.3-1.34	614	1.63	(100)*	30
1.34-30	824/f	2.19/f	(180/f)*	30
30-300	27.5	0.073	0.2	30
300-1500			F/1500	30
1500-100,000			1.0	30

Note: f = frequency in MHz ; \*Plane-wave equivalent power density



### 13.3 MPE Calculation Method

$$E \text{ (V/m)} = \frac{\sqrt{30 \times P \times G}}{d} \quad \text{Power Density: } Pd \text{ (W/m}^2\text{)} = \frac{E^2}{377}$$

**E** = Electric field (V/m)

**P** = Peak RF output power (W)

**G** = EUT Antenna numeric gain (numeric)

**d** = Separation distance between radiator and human body (m)

The formula can be changed to

$$Pd = \frac{30 \times P \times G}{377 \times d^2}$$

From the peak EUT RF output power, the minimum mobile separation distance,  $d=0.2\text{m}$ , as well as the gain of the used antenna, the RF power density can be obtained

Antenna Gain (dBi)	Antenna Gain (numeric)	Max. Peak Output Power (dBm)	Peak Output Power (mW)	Power Density (mW/cm <sup>2</sup> )	Limit of Power Density (mW/cm <sup>2</sup> )
2.00	1.585	9.59	9.10	0.002869	1


## 14 Photographs – Model HX-W09901 Test Setup

### 14.1 Conducted Emission at Test Site 1#




### 14.2 Radiated Emission


Test frequency below 30MHz at Test Site 2#

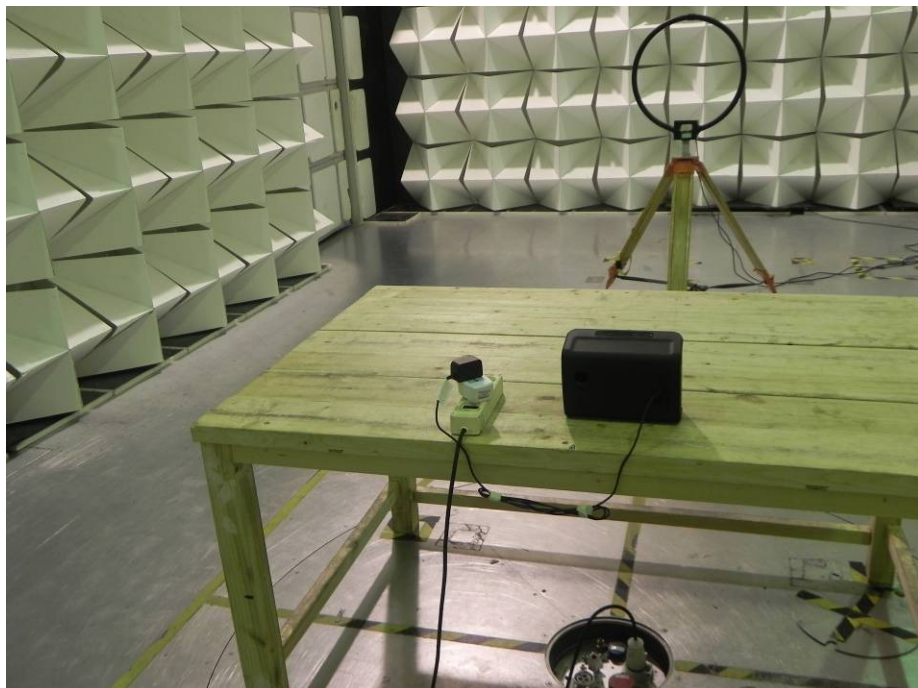

Test frequency from 30MHz to 1GHz at Test Site 2#

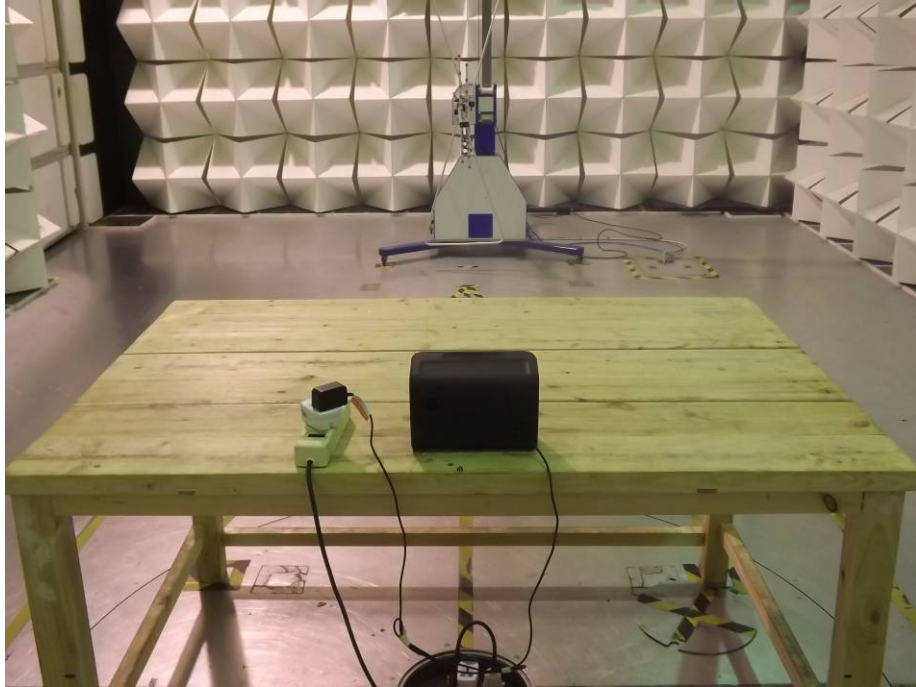


Test frequency above 1GHz at Test Site 1#

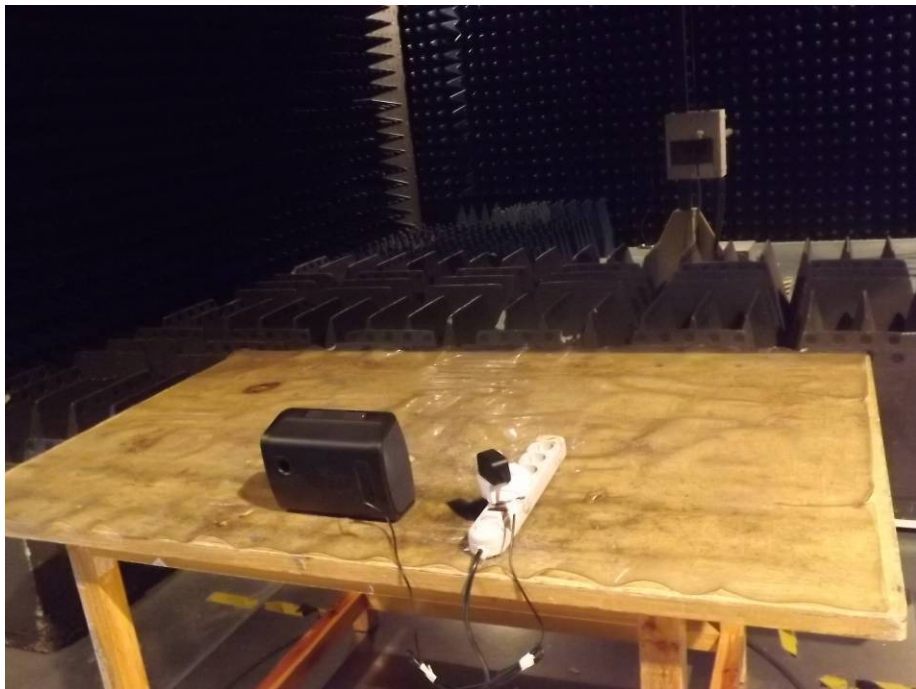



## 15 Photographs - Constructional Details

### 15.1 Model HX-W09901 –External View





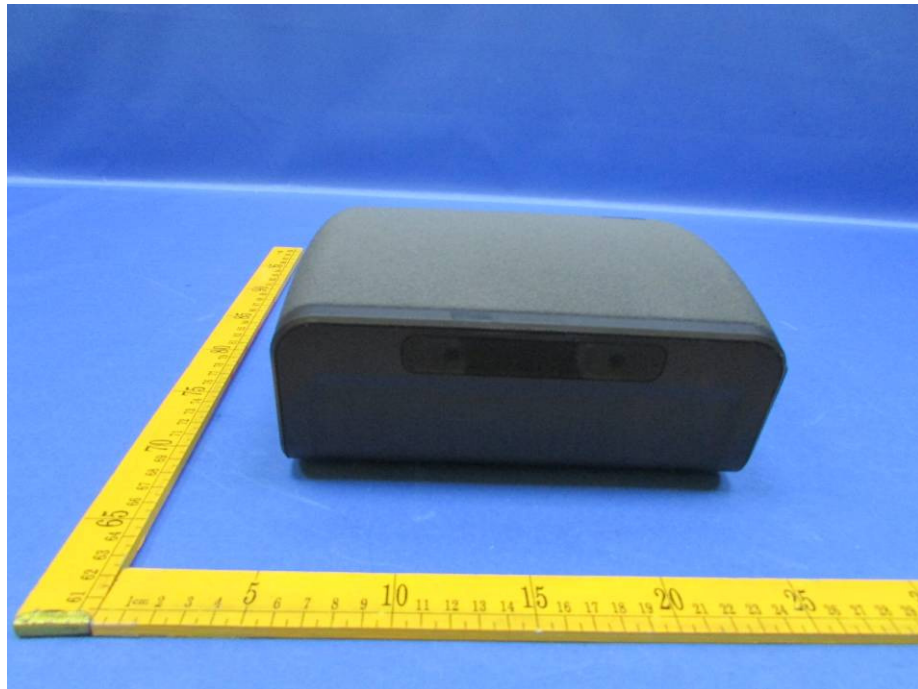


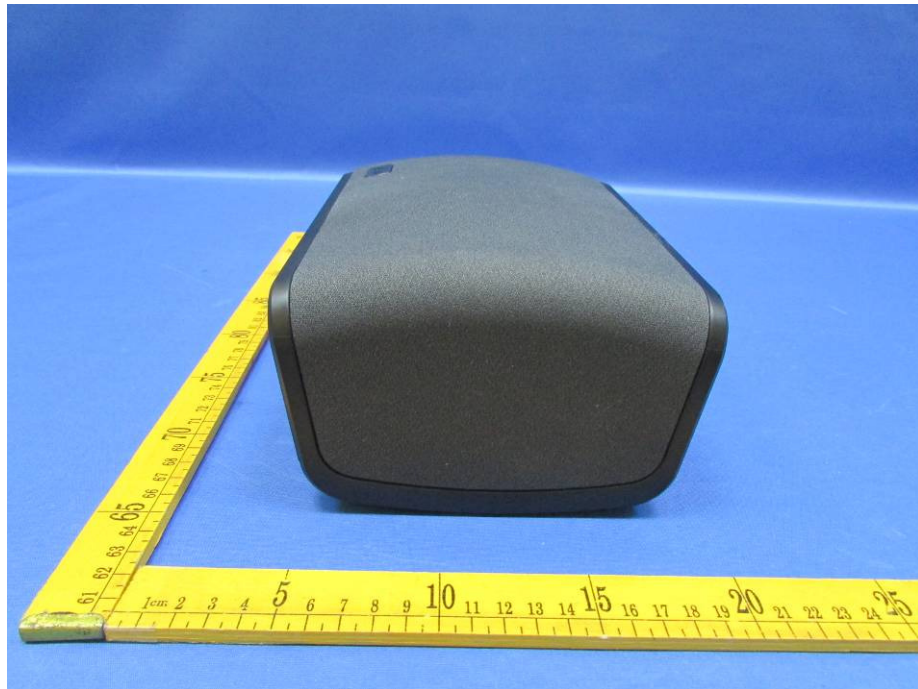



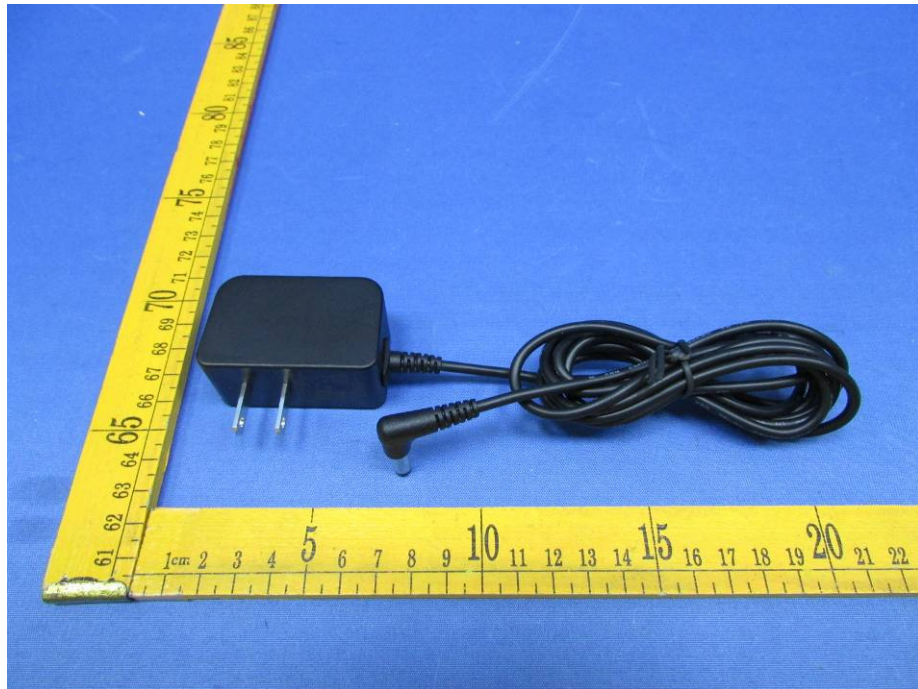




### 15.2 Model HX-W09901 – Internal View

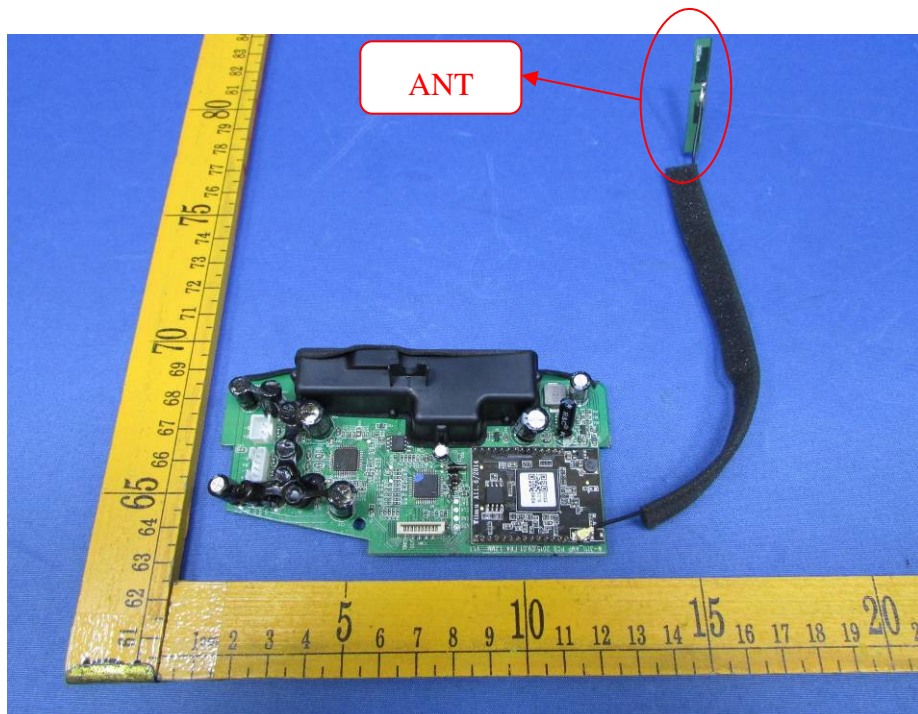
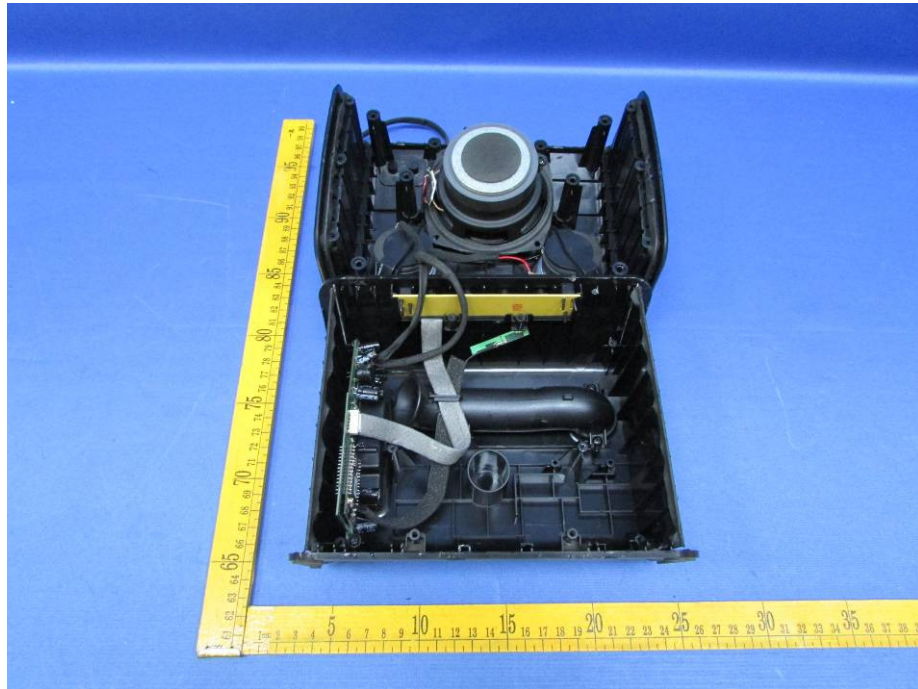




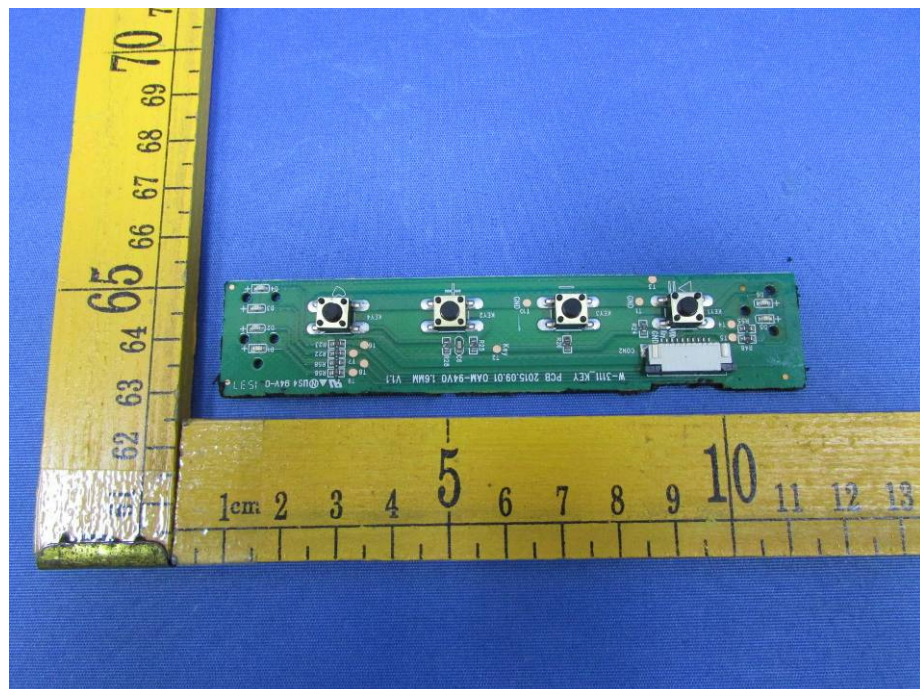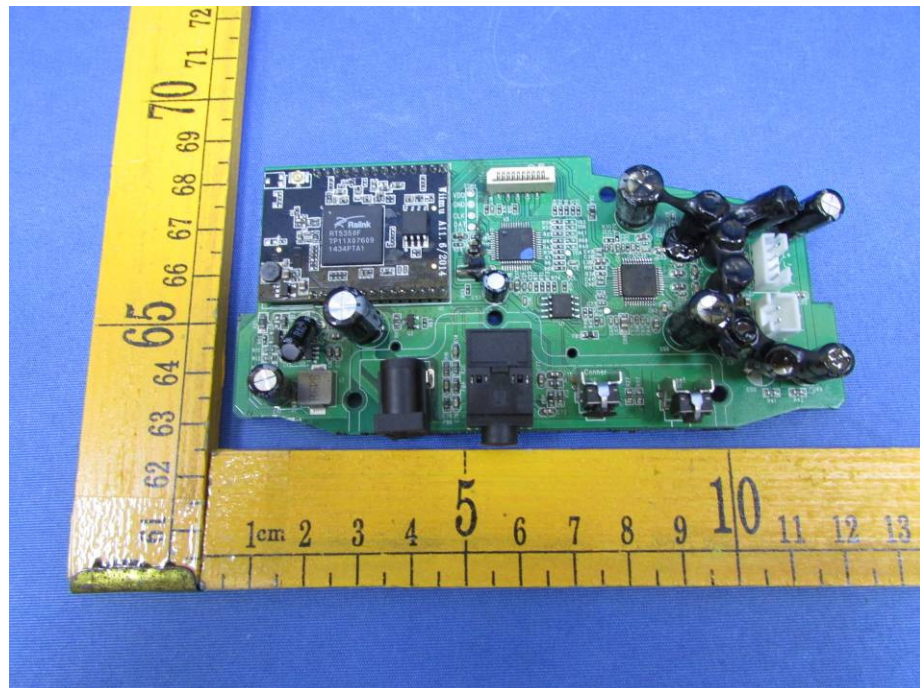

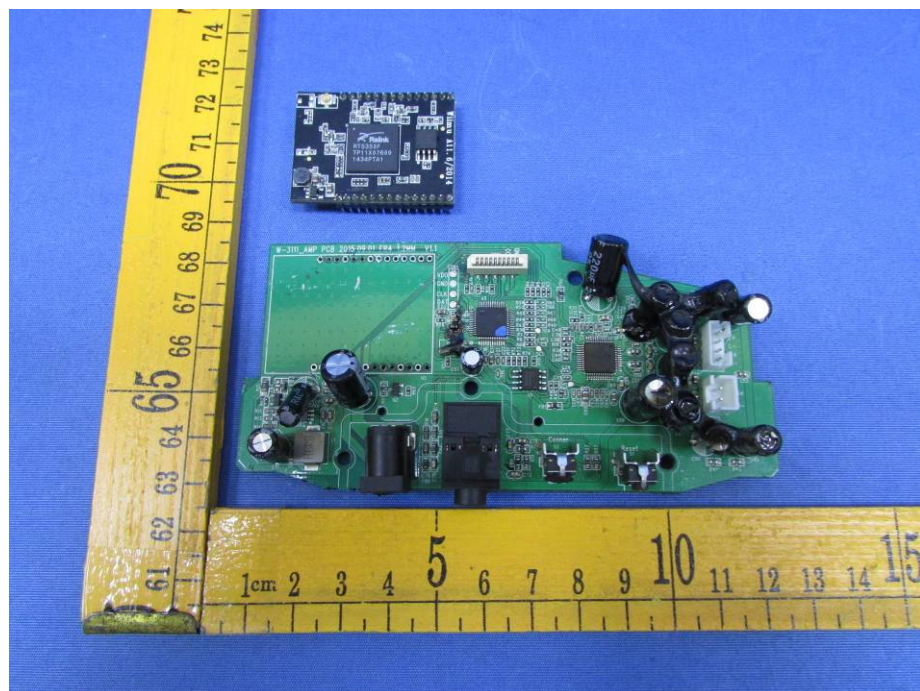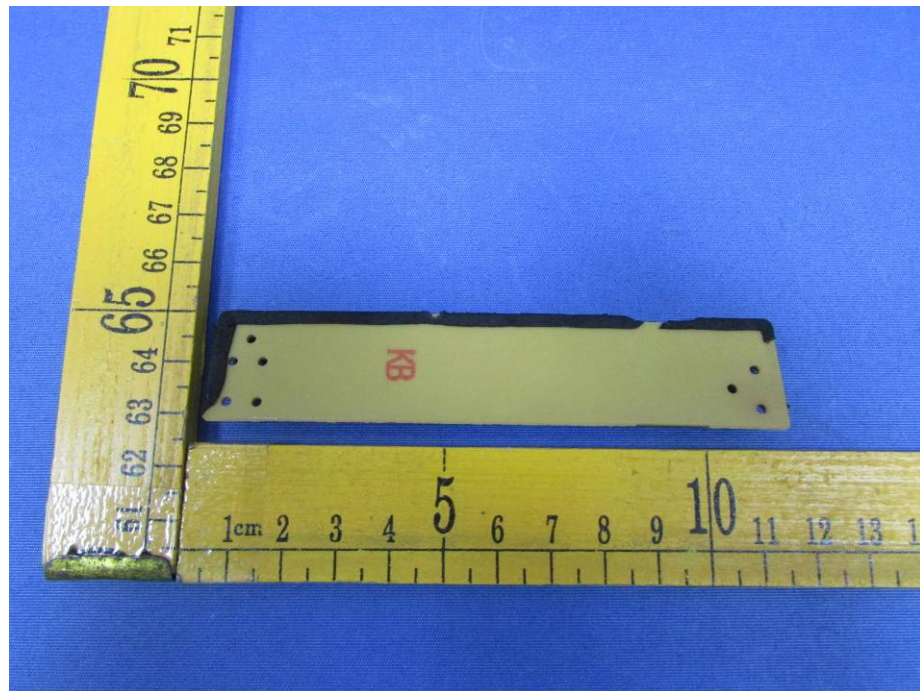

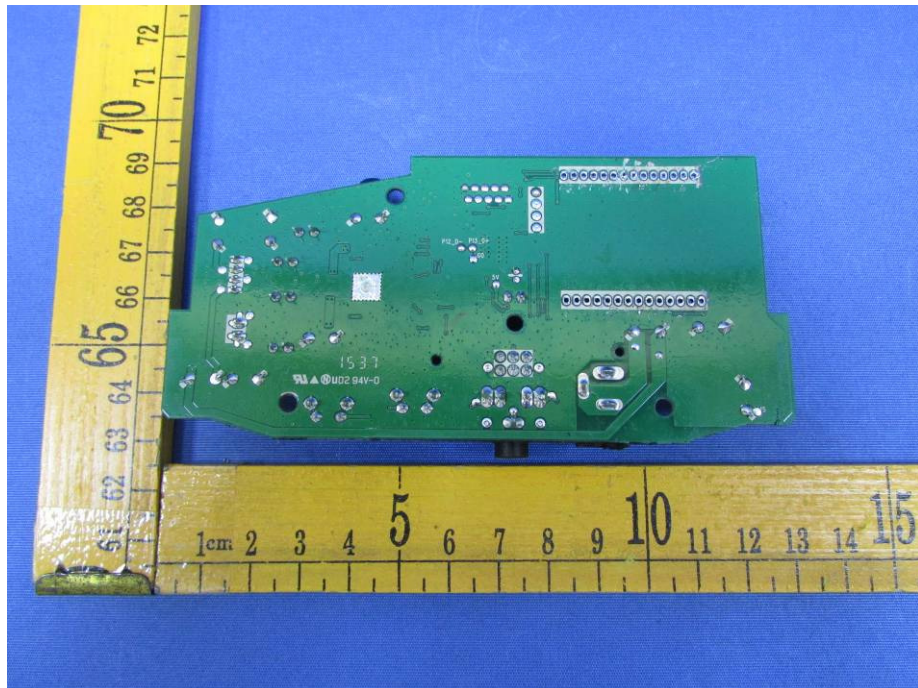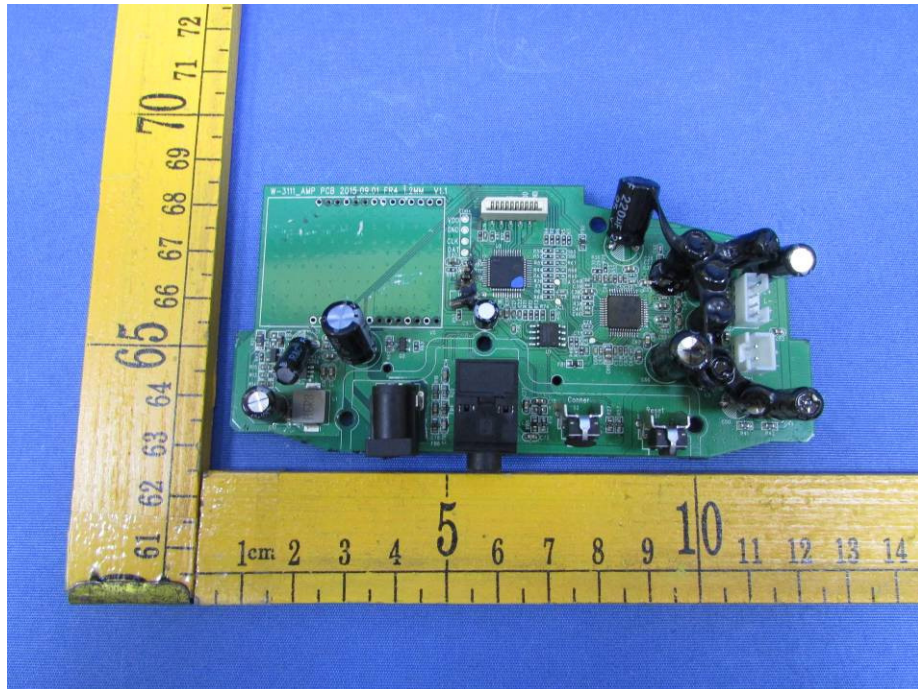

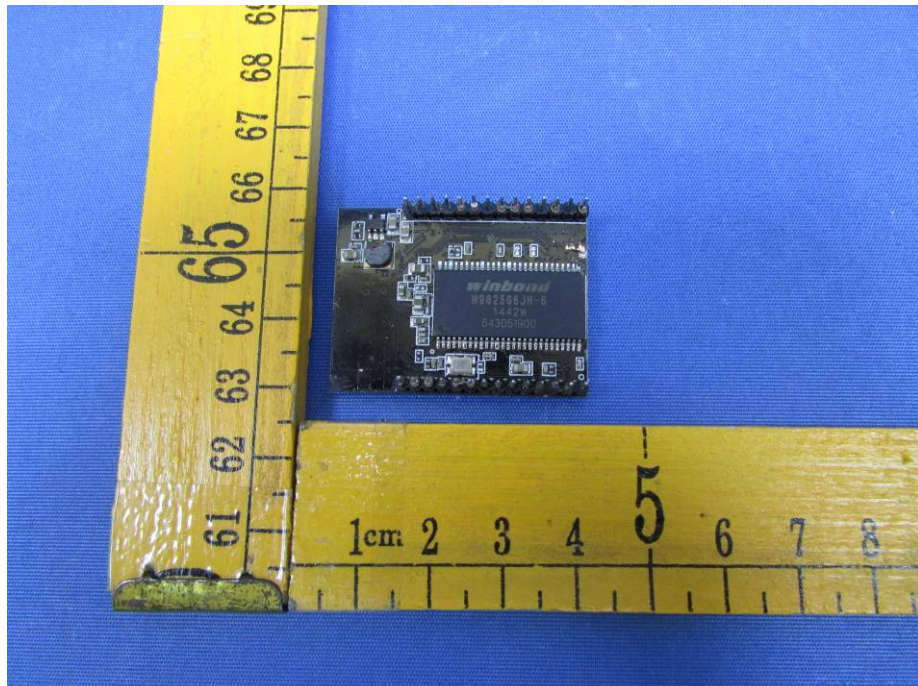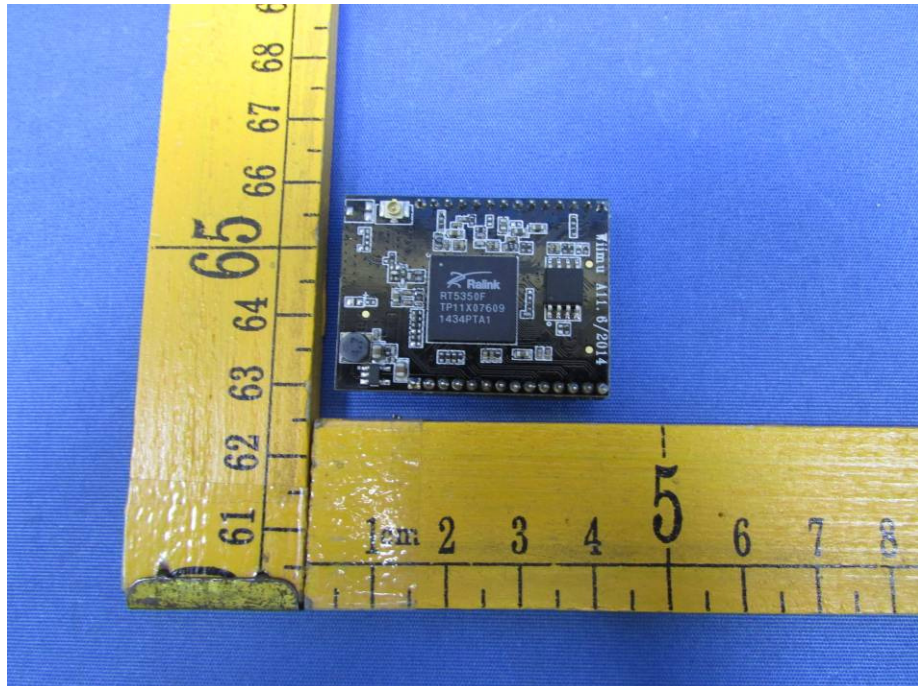

=====**End of Report**=====