

FCC Test Report

Report No.: RFBCIB-WTW-P21060785

FCC ID: 2AA3N-PT012

Test Model: PT01

Received Date: Jun. 22, 2021

Test Date: Jul. 29 to Aug. 17, 2021

Issued Date: Oct. 12, 2021

Applicant: Peloton Interactive Inc.

Address: 125 W 25th Street, 11th Floor, New York, NY, 10001, USA

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Lin Kou Laboratories

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

**FCC Registration /
Designation Number:** 198487 / TW2021



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.

Table of Contents

Release Control Record	4
1 Certificate of Conformity	5
2 Summary of Test Results	6
2.1 Measurement Uncertainty	6
2.2 Modification Record	6
3 General Information	7
3.1 General Description of EUT	7
3.2 Description of Test Modes	9
3.2.1 Test Mode Applicability and Tested Channel Detail	10
3.3 Duty Cycle of Test Signal	12
3.4 Description of Support Units	13
3.4.1 Configuration of System under Test	13
3.5 General Description of Applied Standards and references	14
4 Test Types and Results	15
4.1 Radiated Emission and Bandedge Measurement	15
4.1.1 Limits of Radiated Emission and Bandedge Measurement	15
4.1.2 Test Instruments	16
4.1.3 Test Procedures	17
4.1.4 Deviation from Test Standard	17
4.1.5 Test Setup	18
4.1.6 EUT Operating Conditions	19
4.1.7 Test Results	20
4.2 Conducted Emission Measurement	36
4.2.1 Limits of Conducted Emission Measurement	36
4.2.2 Test Instruments	36
4.2.3 Test Procedures	37
4.2.4 Deviation from Test Standard	37
4.2.5 Test Setup	37
4.2.6 EUT Operating Conditions	37
4.2.7 Test Results	38
4.3 6dB Bandwidth Measurement	42
4.3.1 Limits of 6dB Bandwidth Measurement	42
4.3.2 Test Setup	42
4.3.3 Test Instruments	42
4.3.4 Test Procedure	42
4.3.5 Deviation from Test Standard	42
4.3.6 EUT Operating Conditions	42
4.3.7 Test Result	43
4.4 Conducted Output Power Measurement	45
4.4.1 Limits of Conducted Output Power Measurement	45
4.4.2 Test Setup	45
4.4.3 Test Instruments	45
4.4.4 Test Procedures	45
4.4.5 Deviation from Test Standard	45
4.4.6 EUT Operating Conditions	45
4.4.7 Test Results	46
4.5 Power Spectral Density Measurement	48
4.5.1 Limits of Power Spectral Density Measurement	48
4.5.2 Test Setup	48
4.5.3 Test Instruments	48
4.5.4 Test Procedure	48
4.5.5 Deviation from Test Standard	48

4.5.6 EUT Operating Condition	48
4.5.7 Test Results	49
4.6 Conducted Out of Band Emission Measurement	51
4.6.1 Limits of Conducted Out of Band Emission Measurement.....	51
4.6.2 Test Setup.....	51
4.6.3 Test Instruments	51
4.6.4 Test Procedure	51
4.6.5 Deviation from Test Standard	51
4.6.6 EUT Operating Condition	51
4.6.7 Test Results	51
Annex A- Band Edge Measurement	60
5 Pictures of Test Arrangements.....	65
Appendix – Information of the Testing Laboratories	66

Release Control Record

Issue No.	Description	Date Issued
RFBCIB-WTW-P21060785	Original release.	Oct. 12, 2021

1 Certificate of Conformity

Product: Peloton Guide (Set Top Box)

Brand: Peloton

Test Model: PT01

Sample Status: Engineering sample

Applicant: Peloton Interactive Inc.

Test Date: Jul. 29 to Aug. 17, 2021

Standards: 47 CFR FCC Part 15, Subpart C (Section 15.247)
ANSI C63.10: 2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

Prepared by :



Date: Oct. 12, 2021

Jessica Cheng / Senior Specialist

Approved by :



Date: Oct. 12, 2021

Rex Lai / Associate Technical Manager

2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (Section 15.247)			
FCC Clause	Test Item	Result	Remarks
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -14.34dB at 0.44688MHz.
15.205 / 15.209 / 15.247(d)	Radiated Emissions and Band Edge Measurement	PASS	Meet the requirement of limit. Minimum passing margin is -3.06dB at 2390.00MHz.
15.247(d)	Antenna Port Emission	PASS	Meet the requirement of limit.
15.247(a)(2)	6dB bandwidth	PASS	Meet the requirement of limit.
15.247(b)	Conducted power	PASS	Meet the requirement of limit.
15.247(e)	Power Spectral Density	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	Antenna connector is IPEX MHF1 not a standard connector.

Note:

- For 2.4GHz band compliance with rule 15.247(d) of the band-edge items, the test plots were recorded in Annex A. Test Procedures refer to report 4.1.3.
- Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (\pm)
Conducted Emissions at mains ports	150kHz ~ 30MHz	3.00 dB
Conducted Emissions	9kHz ~ 40GHz	2.63 dB
Radiated Emissions up to 1 GHz	9kHz ~ 30MHz	2.61 dB
	30MHz ~ 1GHz	5.43 dB
Radiated Emissions above 1 GHz	Above 1GHz	5.42 dB

2.2 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 General Description of EUT

Product	Peloton Guide (Set Top Box)
Brand	Peloton
Test Model	PT01
Status of EUT	Engineering sample
Power Supply Rating	5Vdc from adapter
Modulation Type	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
Modulation Technology	DSSS, OFDM
Transfer Rate	802.11b: up to 11Mbps 802.11g: up to 54Mbps 802.11n: up to 300Mbps
Operating Frequency	2412MHz ~ 2462MHz
Number of Channel	802.11b/ 802.11g/802.11n (HT20): 11 802.11n (HT40): 7
Output Power	234.734mW
Antenna Type	Ant 0: PIFA antenna with 1.3dBi gain Ant 1: PIFA antenna with 1.85dBi gain
Antenna Connector	IPEX MHF1
Accessory Device	Adapter
Data Cable Supplied	Shielded HDMI cable (1.5m)

Note:

1. The EUT provides 2 completed transmitters and 2 receivers.

Modulation Mode	TX Function	RX Function
802.11b	2TX	2RX
802.11g	2TX	2RX
802.11n (HT20)	2TX	2RX
802.11n (HT40)	2TX	2RX

2. WLAN & Bluetooth technologies cannot transmit at same time.

3. The above Antenna information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications, the laboratory shall not be held responsible.

4. The EUT uses following adapter.

Adapter 1	
Brand	TenPao
Model	S015BGU0500300
Input Power	100-240Vac, 0.5A, 50-60Hz
Output Power	5Vdc, 3A
Power Line	AC 2 Pin, Shielded USB Type C cable (1.8m)
Adapter 2	
Brand	Chicony
Model	W20-015N1A
Input Power	100-240Vac, 0.5A, 50-60Hz
Output Power	5Vdc, 3A
Power Line	AC 2 Pin, Shielded USB Type C cable (1.8m)

The above two adapters were pre-test and **Adapter 1** was the worst case for final test.

5. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

3.2 Description of Test Modes

11 channels are provided for 802.11b, 802.11g and 802.11n (HT20):

Channel	Frequency	Channel	Frequency
1	2412MHz	7	2442MHz
2	2417MHz	8	2447MHz
3	2422MHz	9	2452MHz
4	2427MHz	10	2457MHz
5	2432MHz	11	2462MHz
6	2437MHz		

7 channels are provided for 802.11n (HT40):

Channel	Frequency	Channel	Frequency
3	2422MHz	7	2442MHz
4	2427MHz	8	2447MHz
5	2432MHz	9	2452MHz
6	2437MHz		

3.2.1 Test Mode Applicability and Tested Channel Detail

EUT Configure Mode	Applicable To				Description
	RE \geq 1G	RE<1G	PLC	APCM	
A	√	√	√	√	Operating Mode (EUT + Notebook)
B	-	√	√	-	Operating Mode (EUT + Adapter)

Where **RE \geq 1G**: Radiated Emission above 1GHz & Bandedge Measurement
RE<1G: Radiated Emission below 1GHz
PLC: Power Line Conducted Emission
APCM: Antenna Port Conducted Measurement

Radiated Emission Test (Above 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
A	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1.0
	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0
	802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	6.5
	802.11n (HT40)	3 to 9	3, 6, 9	OFDM	BPSK	13.5

Radiated Emission Test (Below 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
A & B	802.11g	1 to 11	6	OFDM	BPSK	6.0

Power Line Conducted Emission Test:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
A & B	802.11g	1 to 11	6	OFDM	BPSK	6.0

Antenna Port Conducted Measurement:

- ☒ This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
A	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1.0
	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0
	802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	6.5
	802.11n (HT40)	3 to 9	3, 6, 9	OFDM	BPSK	13.5

Test Condition:

Applicable To	EUT Configure Mode	Environmental Conditions	Input Power	Tested By
RE \geq 1G	A	21deg. C, 68%RH	120Vac, 60Hz (System)	Jed Wu
RE<1G	A	21deg. C, 68 %RH	120Vac, 60Hz (System)	Jed Wu
	B	24deg. C, 62%RH	120Vac, 60Hz (Adapter)	Jed Wu
PLC	A	25deg. C, 75%RH	120Vac, 60Hz (System)	Ian Chang
	B	25deg. C, 75%RH	120Vac, 60Hz (Adapter)	Ian Chang
APCM	A	25deg. C, 76%RH	120Vac, 60Hz (System)	Pirar Hsieh

3.3 Duty Cycle of Test Signal

If duty cycle of test signal is $\geq 98\%$, duty factor is not required.


If duty cycle of test signal is $< 98\%$, duty factor shall be considered.

802.11b: Duty cycle = $12.27/12.3 = 0.998$

802.11g: Duty cycle = $2.04/2.065 = 0.988$

802.11n (HT20): Duty cycle = $1.91/1.93 = 0.99$

802.11n (HT40): Duty cycle = $0.936/0.981 = 0.954$, Duty factor = $10 * \log(1/0.954) = 0.20$

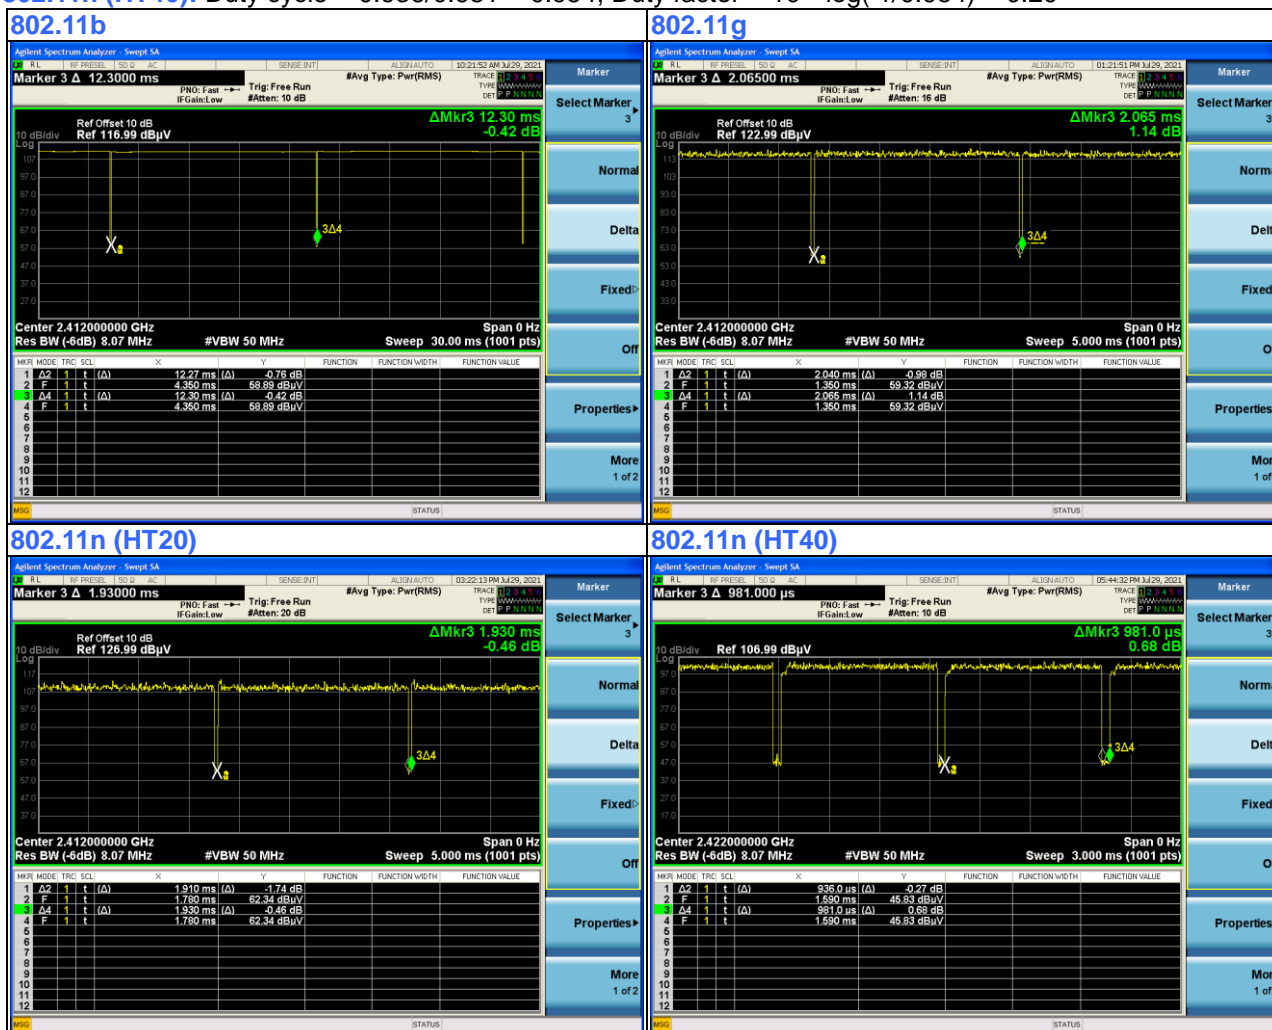

3.4 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	LCD MONITOR	DELL	SE2417HG	NA	NA	Provided by Lab
B.	Notebook PC	Lenovo	81LG	PF1NF9V2	NA	Provided by Lab


Note: All power cords of the above support units are non-shielded (1.8m).

ID	Cable Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	USB Type C cable	1	1.8	Y	0	Supplied by client
2.	HDMI cable	1	1.5	Y	0	Supplied by client


Note: The core(s) is(are) originally attached to the cable(s).

3.4.1 Configuration of System under Test

Mode A:

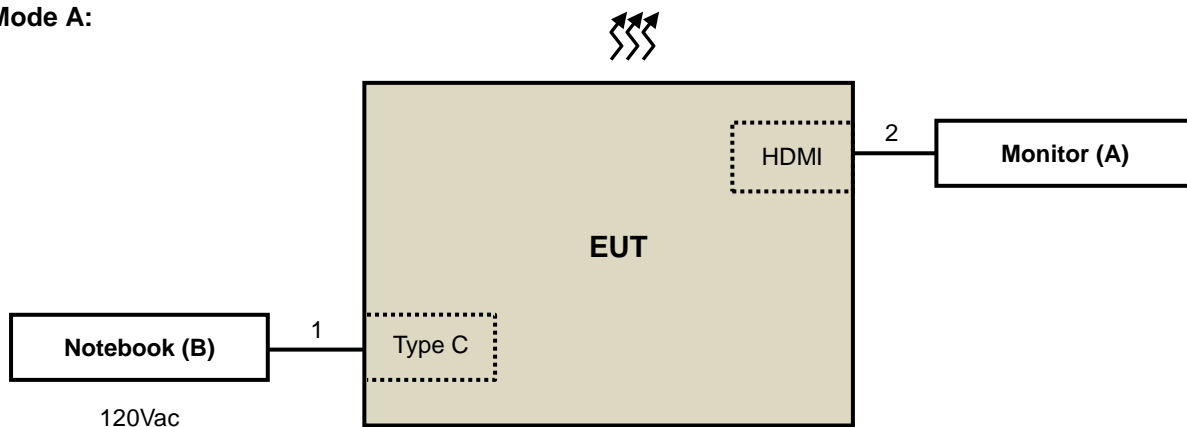

Mode B:

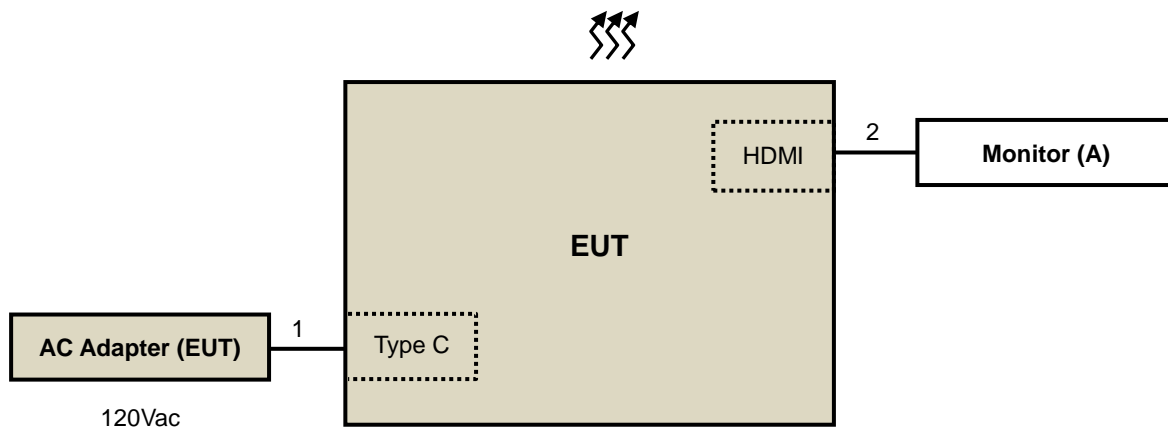

3.5 General Description of Applied Standards and references

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards and references:

Test standard:

FCC Part 15, Subpart C (15.247)

ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

References Test Guidance:

KDB 558074 D01 15.247 Meas Guidance v05r02

KDB 662911 D01 Multiple Transmitter Output v02r01

All test items have been performed as a reference to the above KDB test guidance.

4 Test Types and Results

4.1 Radiated Emission and Bandedge Measurement

4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.1.2 Test Instruments

Description & Manufacturer	Model no.	Serial No.	Calibrated Date	Calibrated Until
HP Preamplifier	8447D	2432A03504	Feb. 18, 2021	Feb. 17, 2022
HP Preamplifier	8449B	3008A01201	Feb. 19, 2021	Feb. 18, 2022
MITEQ Preamplifier	AMF-6F-260400-33-8P	892164	Feb. 18, 2021	Feb. 17, 2022
Agilent TEST RECEIVER	N9038A	MY51210129	Mar. 12, 2021	Mar. 11, 2022
Schwarzbeck Antenna	VULB 9168	139	Nov. 6, 2020	Nov. 5, 2021
Schwarzbeck Horn Antenna	BBHA-9170	212	Nov. 22, 2020	Nov. 21, 2021
EMCO Horn Antenna	3115	00027024	Nov. 22, 2020	Nov. 21, 2021
ADT. Turn Table	TT100	0306	NA	NA
ADT. Tower	AT100	0306	NA	NA
Software	Radiated_V7.6.15.9.5	NA	NA	NA
SUHNER RF cable With 4dB PAD	SF102	Cable-CH6-01	Jul. 8, 2021	Jul. 7, 2022
EMEC RF cable With 3/4dB PAD	EM102-KMKM	01	Aug. 21, 2020	Aug. 20, 2021
KEYSIGHT MIMO Powermeasurement Test set	U2021XA	U2021XA-001	Jun. 16, 2021	Jun. 15, 2022
Loop Antenna EMCI	LPA600	270	Aug. 23, 2019	Aug. 22, 2021
EMCO Horn Antenna	3115	00028257	Nov. 22, 2020	Nov. 21, 2021
Highpass filter Wainwright Instruments	WHK 3.1/18G-10SS	SN 8	NA	NA
ROHDE & SCHWARZ Spectrum Analyzer	FSV40	101042	Sep. 8, 2020	Sep. 7, 2021
Anritsu Power Sensor	MA2411B	0738404	Apr. 15, 2021	Apr. 14, 2022
Anritsu Power Meter	ML2495A	0842014	Apr. 14, 2021	Apr. 13, 2022

- NOTE:** 1. The calibration interval of the above test instruments is 12/24 months. And the calibrations are traceable to NML/ROC and NIST/USA.
2. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
3. The test was performed in Chamber No. 6.
4. Tested Date: Jul. 29 to Aug. 16, 2021

4.1.3 Test Procedures

For Radiated emission below 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

For Radiated emission above 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detects function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98%) or 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.
(802.11b: RBW = 1MHz, VBW = 10Hz; 802.11g: RBW = 1MHz, VBW = 10Hz;
802.11n (HT20): RBW = 1MHz, VBW = 10Hz; 802.11n (HT40): RBW = 1MHz, VBW = 1.1kHz)
4. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 Deviation from Test Standard


No deviation.

4.1.5 Test Setup


For Radiated emission below 30MHz

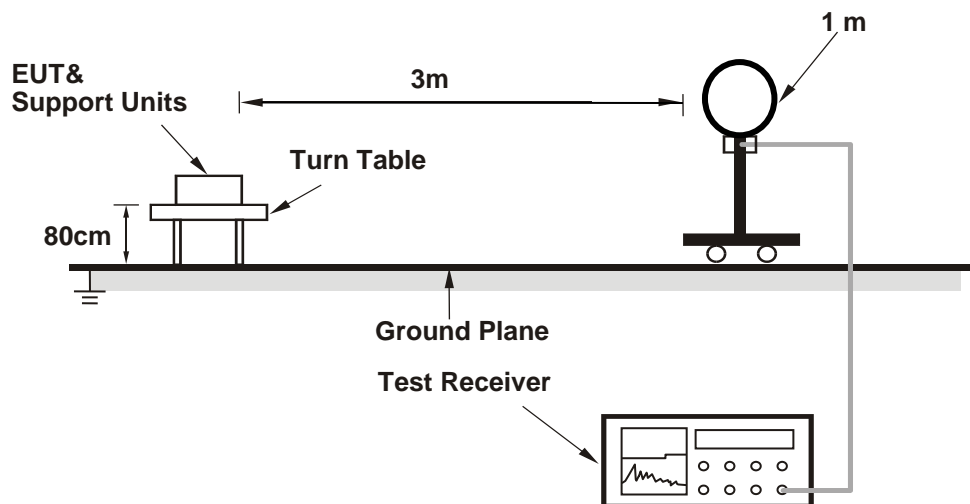

For Radiated emission 30MHz to 1GHz

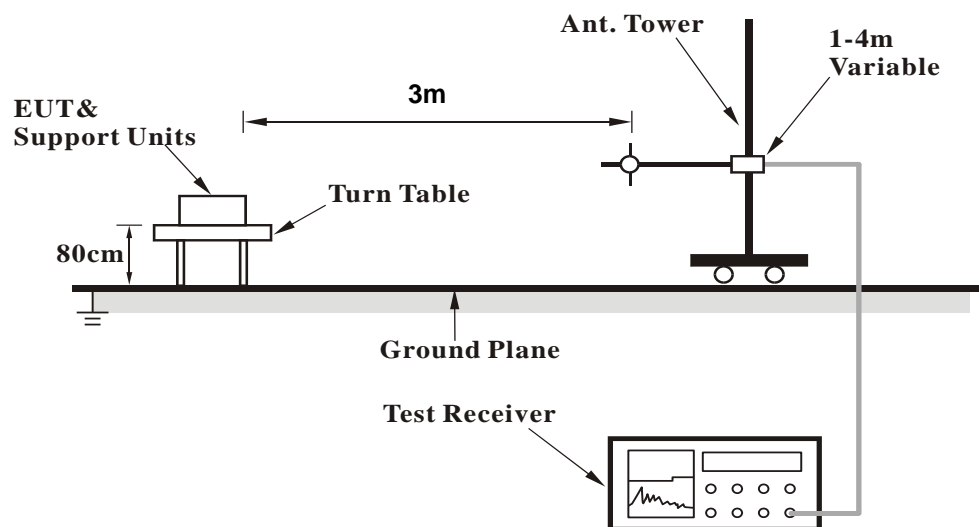

For Radiated emission above 1GHz

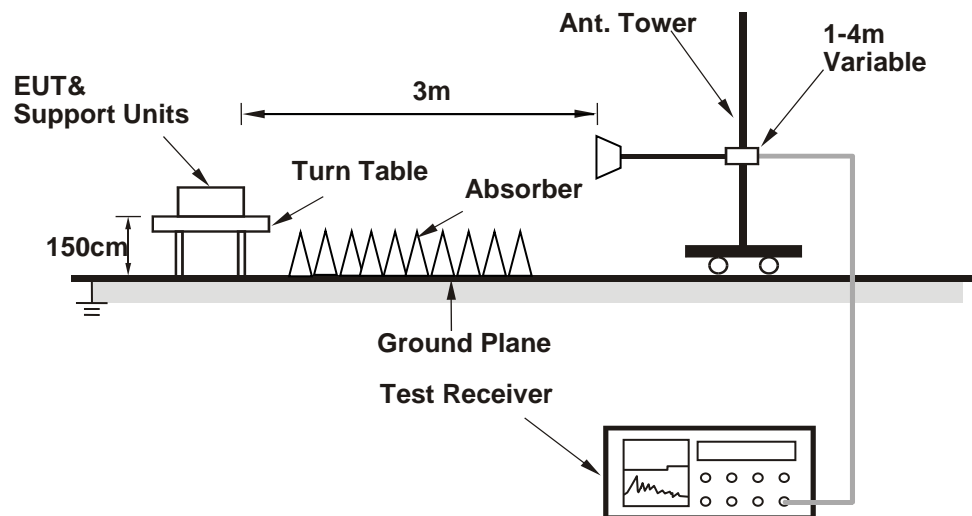

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT Operating Conditions

- Connected the EUT to Adapter or Notebook.
- Set the EUT under transmission condition continuously at specific channel frequency continuously.

4.1.7 Test Results

ABOVE 1GHz DATA

Mode A

RF Mode	TX 802.11b	Channel	CH 1 : 2412 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	55.24 PK	74.00	-18.76	1.51 H	117	57.52	-2.28
2	2390.00	47.52 AV	54.00	-6.48	1.51 H	117	49.80	-2.28
3	*2412.00	111.17 PK			1.51 H	117	113.36	-2.19
4	*2412.00	109.13 AV			1.51 H	117	111.32	-2.19
5	4824.00	52.28 PK	74.00	-21.72	1.00 H	155	46.62	5.66
6	4824.00	46.06 AV	54.00	-7.94	1.00 H	155	40.40	5.66
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	52.80 PK	74.00	-21.20	2.11 V	316	55.08	-2.28
2	2390.00	42.24 AV	54.00	-11.76	2.11 V	316	44.52	-2.28
3	*2412.00	110.93 PK			2.11 V	316	113.12	-2.19
4	*2412.00	108.93 AV			2.11 V	316	111.12	-2.19
5	4824.00	51.83 PK	74.00	-22.17	2.28 V	148	46.17	5.66
6	4824.00	44.14 AV	54.00	-9.86	2.28 V	148	38.48	5.66

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11b	Channel	CH 6 : 2437 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	110.28 PK			1.49 H	114	112.43	-2.15
2	*2437.00	108.18 AV			1.49 H	114	110.33	-2.15
3	4874.00	53.76 PK	74.00	-20.24	1.06 H	18	48.07	5.69
4	4874.00	48.69 AV	54.00	-5.31	1.06 H	18	43.00	5.69
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	109.96 PK			2.13 V	152	112.11	-2.15
2	*2437.00	107.87 AV			2.13 V	152	110.02	-2.15
3	4874.00	53.57 PK	74.00	-20.43	3.19 V	328	47.88	5.69
4	4874.00	48.51 AV	54.00	-5.49	3.19 V	328	42.82	5.69

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11b	Channel	CH 11 : 2462 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	110.05 PK			1.48 H	105	112.11	-2.06
2	*2462.00	108.11 AV			1.48 H	105	110.17	-2.06
3	2483.50	56.08 PK	74.00	-17.92	1.48 H	105	58.02	-1.94
4	2483.50	48.47 AV	54.00	-5.53	1.48 H	105	50.41	-1.94
5	4924.00	52.96 PK	74.00	-21.04	1.27 H	360	47.19	5.77
6	4924.00	47.61 AV	54.00	-6.39	1.27 H	360	41.84	5.77
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	108.75 PK			1.55 V	360	110.81	-2.06
2	*2462.00	107.06 AV			1.55 V	360	109.12	-2.06
3	2483.50	54.87 PK	74.00	-19.13	1.55 V	165	56.81	-1.94
4	2483.50	44.15 AV	54.00	-9.85	1.55 V	165	46.09	-1.94
5	4924.00	52.63 PK	74.00	-21.37	1.86 V	47	46.86	5.77
6	4924.00	46.41 AV	54.00	-7.59	1.86 V	47	40.64	5.77

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11g	Channel	CH 1 : 2412 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	64.34 PK	74.00	-9.66	1.52 H	118	66.62	-2.28
2	2390.00	50.44 AV	54.00	-3.56	1.52 H	118	52.72	-2.28
3	*2412.00	111.18 PK			1.52 H	118	113.37	-2.19
4	*2412.00	102.48 AV			1.52 H	118	104.67	-2.19
5	4824.00	47.84 PK	74.00	-26.16	2.06 H	144	42.18	5.66
6	4824.00	36.68 AV	54.00	-17.32	2.06 H	144	31.02	5.66
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	58.59 PK	74.00	-15.41	1.50 V	150	60.87	-2.28
2	2390.00	46.68 AV	54.00	-7.32	1.50 V	150	48.96	-2.28
3	*2412.00	107.01 PK			1.50 V	150	109.20	-2.19
4	*2412.00	98.97 AV			1.50 V	150	101.16	-2.19
5	4824.00	47.20 PK	74.00	-26.80	1.53 V	187	41.54	5.66
6	4824.00	36.28 AV	54.00	-17.72	1.53 V	187	30.62	5.66

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11g	Channel	CH 6 : 2437 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	112.31 PK			1.66 H	107	114.46	-2.15
2	*2437.00	103.65 AV			1.66 H	107	105.80	-2.15
3	4874.00	48.90 PK	74.00	-25.10	1.66 H	67	43.21	5.69
4	4874.00	38.43 AV	54.00	-15.57	1.66 H	67	32.74	5.69
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	110.88 PK			2.12 V	151	113.03	-2.15
2	*2437.00	102.54 AV			2.12 V	151	104.69	-2.15
3	4874.00	47.18 PK	74.00	-26.82	1.17 V	273	41.49	5.69
4	4874.00	36.77 AV	54.00	-17.23	1.17 V	273	31.08	5.69

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11g	Channel	CH 11 : 2462 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	111.66 PK			1.32 H	110	113.72	-2.06
2	*2462.00	103.15 AV			1.32 H	110	105.21	-2.06
3	2483.50	62.39 PK	74.00	-11.61	1.32 H	110	64.33	-1.94
4	2483.50	49.46 AV	54.00	-4.54	1.32 H	110	51.40	-1.94
5	4924.00	48.33 PK	74.00	-25.67	2.10 H	162	42.56	5.77
6	4924.00	37.11 AV	54.00	-16.89	2.10 H	162	31.34	5.77
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	108.02 PK			2.11 V	12	110.08	-2.06
2	*2462.00	100.41 AV			2.11 V	12	102.47	-2.06
3	2483.50	60.36 PK	74.00	-13.64	2.11 V	12	62.30	-1.94
4	2483.50	47.11 AV	54.00	-6.89	2.11 V	12	49.05	-1.94
5	4924.00	47.81 PK	74.00	-26.19	1.72 V	90	42.04	5.77
6	4924.00	36.43 AV	54.00	-17.57	1.72 V	90	30.66	5.77

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11n (HT20)	Channel	CH 1 : 2412 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	62.98 PK	74.00	-11.02	1.50 H	116	65.26	-2.28
2	2390.00	50.23 AV	54.00	-3.77	1.50 H	116	52.51	-2.28
3	*2412.00	110.14 PK			1.50 H	116	112.33	-2.19
4	*2412.00	101.52 AV			1.50 H	116	103.71	-2.19
5	4824.00	48.23 PK	74.00	-25.77	1.40 H	298	42.57	5.66
6	4824.00	37.30 AV	54.00	-16.70	1.40 H	298	31.64	5.66
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	62.68 PK	74.00	-11.32	3.80 V	358	64.96	-2.28
2	2390.00	49.39 AV	54.00	-4.61	3.80 V	358	51.67	-2.28
3	*2412.00	109.08 PK			3.80 V	358	111.27	-2.19
4	*2412.00	100.47 AV			3.80 V	358	102.66	-2.19
5	4824.00	47.04 PK	74.00	-26.96	1.62 V	181	41.38	5.66
6	4824.00	36.11 AV	54.00	-17.89	1.62 V	181	30.45	5.66

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11n (HT20)	Channel	CH 6 : 2437 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	110.75 PK			1.18 H	116	112.90	-2.15
2	*2437.00	102.48 AV			1.18 H	116	104.63	-2.15
3	4824.00	47.64 PK	74.00	-26.36	2.13 H	299	41.98	5.66
4	4824.00	36.70 AV	54.00	-17.30	2.13 H	299	31.04	5.66
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	108.05 PK			1.23 V	23	110.20	-2.15
2	*2437.00	99.82 AV			1.23 V	23	101.97	-2.15
3	4874.00	46.33 PK	74.00	-27.67	1.59 V	63	40.64	5.69
4	4874.00	35.91 AV	54.00	-18.09	1.59 V	63	30.22	5.69

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11n (HT20)	Channel	CH 11 : 2462 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	109.58 PK			1.31 H	114	111.64	-2.06
2	*2462.00	101.05 AV			1.31 H	114	103.11	-2.06
3	2483.50	66.54 PK	74.00	-7.46	1.31 H	114	68.48	-1.94
4	2483.50	50.32 AV	54.00	-3.68	1.31 H	114	52.26	-1.94
5	4924.00	49.25 PK	74.00	-24.75	1.46 H	318	43.48	5.77
6	4924.00	38.12 AV	54.00	-15.88	1.46 H	318	32.35	5.77
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	108.66 PK			1.58 V	1	110.72	-2.06
2	*2462.00	100.22 AV			1.58 V	1	102.28	-2.06
3	2483.50	59.82 PK	74.00	-14.18	1.58 V	1	61.76	-1.94
4	2483.50	46.06 AV	54.00	-7.94	1.58 V	1	48.00	-1.94
5	4924.00	48.63 PK	74.00	-25.37	1.38 V	182	42.86	5.77
6	4924.00	37.49 AV	54.00	-16.51	1.38 V	182	31.72	5.77

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11n (HT40)	Channel	CH 3 : 2422 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	59.62 PK	74.00	-14.38	1.01 H	111	61.90	-2.28
2	2390.00	50.70 AV	54.00	-3.30	1.01 H	111	52.98	-2.28
3	*2422.00	103.33 PK			1.01 H	111	105.50	-2.17
4	*2422.00	95.01 AV			1.01 H	111	97.18	-2.17
5	4844.00	44.93 PK	74.00	-29.07	1.64 H	236	39.24	5.69
6	4844.00	34.45 AV	54.00	-19.55	1.64 H	236	28.76	5.69
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	61.44 PK	74.00	-12.56	1.42 V	187	63.72	-2.28
2	2390.00	50.84 AV	54.00	-3.16	1.42 V	187	53.12	-2.28
3	*2422.00	105.23 PK			1.42 V	187	107.40	-2.17
4	*2422.00	97.35 AV			1.42 V	187	99.52	-2.17
5	4844.00	46.32 PK	74.00	-27.68	1.87 V	154	40.63	5.69
6	4844.00	35.02 AV	54.00	-18.98	1.87 V	154	29.33	5.69

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11n (HT40)	Channel	CH 6 : 2437 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	60.97 PK	74.00	-13.03	1.03 H	115	63.25	-2.28
2	2390.00	49.90 AV	54.00	-4.10	1.03 H	115	52.18	-2.28
3	*2437.00	102.74 PK			1.03 H	115	104.89	-2.15
4	*2437.00	94.98 AV			1.03 H	115	97.13	-2.15
5	4874.00	44.92 PK	74.00	-29.08	1.85 H	241	39.23	5.69
6	4874.00	34.36 AV	54.00	-19.64	1.85 H	241	28.67	5.69
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	62.20 PK	74.00	-11.80	1.41 V	187	64.48	-2.28
2	2390.00	50.94 AV	54.00	-3.06	1.41 V	187	53.22	-2.28
3	*2437.00	104.47 PK			1.41 V	187	106.62	-2.15
4	*2437.00	97.00 AV			1.41 V	187	99.15	-2.15
5	4874.00	45.95 PK	74.00	-28.05	1.69 V	236	40.26	5.69
6	4874.00	35.05 AV	54.00	-18.95	1.69 V	236	29.36	5.69

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11n (HT40)	Channel	CH 9 : 2452 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2452.00	105.77 PK			1.02 H	116	107.88	-2.11
2	*2452.00	97.58 AV			1.02 H	116	99.69	-2.11
3	2483.50	61.12 PK	74.00	-12.88	1.02 H	116	63.06	-1.94
4	2483.50	49.23 AV	54.00	-4.77	1.02 H	116	51.17	-1.94
5	4904.00	44.97 PK	74.00	-29.03	1.87 H	144	39.26	5.71
6	4904.00	34.33 AV	54.00	-19.67	1.87 H	144	28.62	5.71
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2452.00	106.99 PK			1.38 V	169	109.10	-2.11
2	*2452.00	99.75 AV			1.38 V	169	101.86	-2.11
3	2483.50	63.05 PK	74.00	-10.95	1.38 V	169	64.99	-1.94
4	2483.50	50.82 AV	54.00	-3.18	1.38 V	169	52.76	-1.94
5	4904.00	45.96 PK	74.00	-28.04	1.97 V	169	40.25	5.71
6	4904.00	34.95 AV	54.00	-19.05	1.97 V	169	29.24	5.71

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

BELOW 1GHz WORST-CASE DATA


Mode A

RF Mode	TX 802.11g	Channel	CH 6 : 2437 MHz
Frequency Range	9kHz ~ 1GHz	Detector Function	Quasi-Peak (QP)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	35.63	31.27 QP	40.00	-8.73	1.55 H	225	39.56	-8.29
2	156.73	30.43 QP	43.50	-13.07	2.05 H	123	36.61	-6.18
3	233.99	29.70 QP	46.00	-16.30	1.23 H	171	37.28	-7.58
4	311.30	31.32 QP	46.00	-14.68	2.42 H	38	35.07	-3.75
5	445.50	37.68 QP	46.00	-8.32	2.87 H	186	38.59	-0.91
6	638.34	31.70 QP	46.00	-14.30	1.58 H	79	28.46	3.24

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

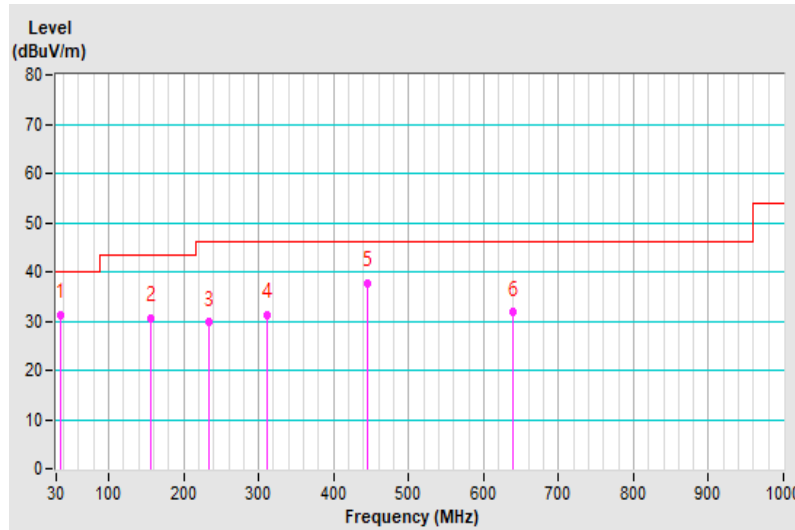


RF Mode	TX 802.11g	Channel	CH 6 : 2437 MHz
Frequency Range	9kHz ~ 1GHz	Detector Function	Quasi-Peak (QP)

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	39.17	32.46 QP	40.00	-7.54	1.68 V	131	40.21	-7.75
2	104.74	30.38 QP	43.50	-13.12	1.42 V	278	40.69	-10.31
3	156.83	29.53 QP	43.50	-13.97	1.37 V	327	35.70	-6.17
4	307.90	29.90 QP	46.00	-16.10	2.21 V	195	33.76	-3.86
5	445.50	35.57 QP	46.00	-10.43	2.36 V	197	36.48	-0.91
6	646.39	31.90 QP	46.00	-14.10	1.18 V	200	28.66	3.24

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

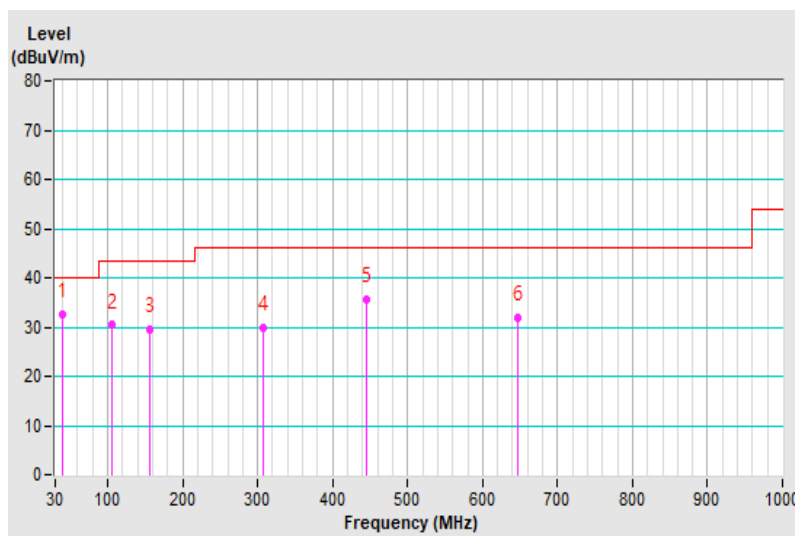


Mode B

RF Mode	TX 802.11g	Channel	CH 6 : 2437 MHz
Frequency Range	9kHz ~ 1GHz	Detector Function	Quasi-Peak (QP)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	33.88	26.53 QP	40.00	-13.47	1.35 H	66	40.20	-13.67
2	66.86	27.54 QP	40.00	-12.46	1.61 H	92	40.91	-13.37
3	98.87	19.58 QP	43.50	-23.92	1.83 H	113	35.93	-16.35
4	154.16	18.73 QP	43.50	-24.77	2.01 H	131	30.06	-11.33
5	216.24	22.78 QP	46.00	-23.22	2.79 H	208	36.28	-13.50
6	359.80	25.52 QP	46.00	-20.48	2.40 H	169	33.66	-8.14
7	643.04	26.05 QP	46.00	-19.95	3.15 H	244	27.98	-1.93

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

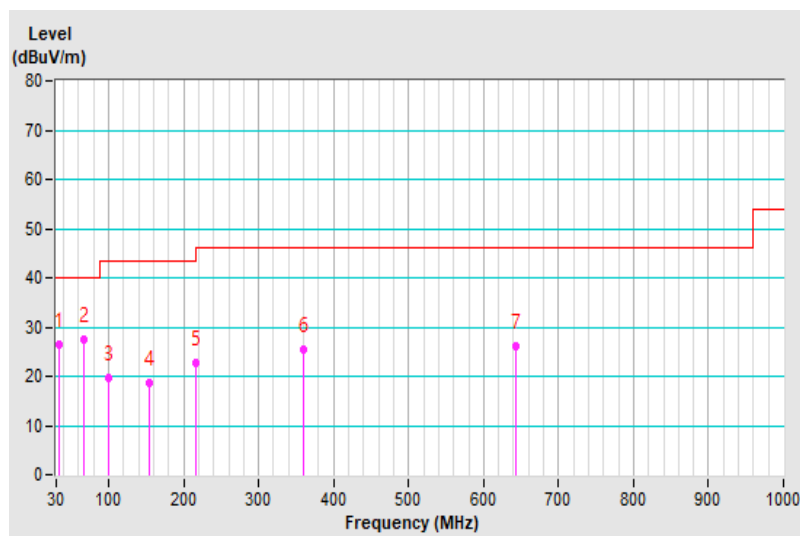


RF Mode	TX 802.11g	Channel	CH 6 : 2437 MHz
Frequency Range	9kHz ~ 1GHz	Detector Function	Quasi-Peak (QP)

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	36.79	31.84 QP	40.00	-8.16	1.25 V	170	45.13	-13.29
2	98.87	25.89 QP	43.50	-17.61	1.44 V	189	42.24	-16.35
3	263.77	22.20 QP	46.00	-23.80	1.00 V	123	33.05	-10.85
4	359.80	28.26 QP	46.00	-17.74	1.77 V	222	36.40	-8.14
5	455.83	25.28 QP	46.00	-20.72	2.20 V	264	31.13	-5.85
6	631.40	25.86 QP	46.00	-20.14	2.68 V	311	27.89	-2.03

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

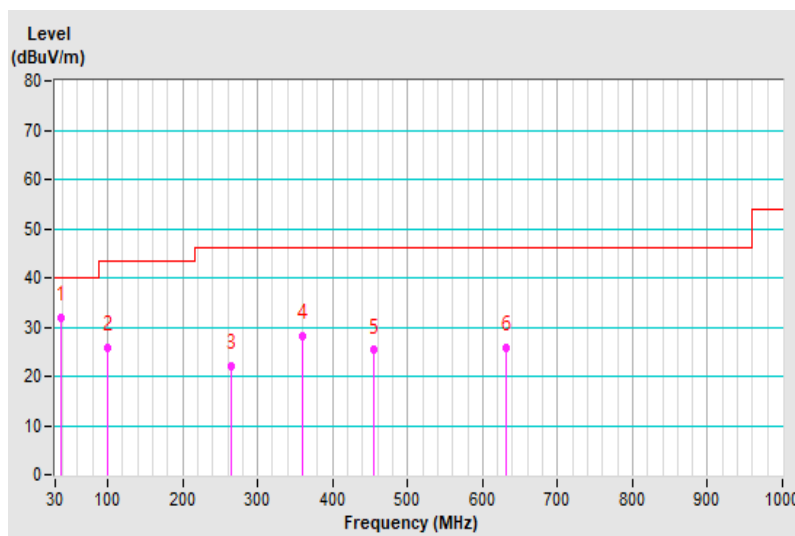

4.2 Conducted Emission Measurement

4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

4.2.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
ROHDE & SCHWARZ TEST RECEIVER	ESCS 30	838251/021	Nov. 3, 2020	Nov. 2, 2021
ROHDE & SCHWARZ Artificial Mains Network (For EUT)	ENV216	101195	May 25, 2021	May 24, 2022
LISN With Adapter(for EUT)	101195	N/A	May 25, 2021	May 24, 2022
EMCO L.I.S.N. (For peripherals)	3825/2	9504-2359	Jul. 27, 2021	Jul. 26, 2022
SCHWARZBECK Artificial Mains Network (For EUT)	NNLK8129	8129229	May 20, 2021	May 19, 2022
SCHWARZBECK Artificial Mains Network (for EUT)	NNLK 8121	8121-808	Apr. 18, 2021	Apr. 17, 2022
Software	Cond_V7.3.7.4	NA	NA	NA
RF cable (JYEBAO) With10dB PAD	5D-FB	Cable-C03-01	Sep. 16, 2020	Sep. 15, 2021
LYNICS Terminator (For EMCO LISN)	0900510	E1-01-300	Jan. 27, 2021	Jan. 26, 2022
LYNICS Terminator (For EMCO LISN)	0900510	E1-01-301	Jan. 27, 2021	Jan. 26, 2022

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. The test was performed in Shielded Room No. 3. (Conduction 3)

3. The VCCI Site Registration No. C-10274.

4. Tested Date: Aug. 17, 2021

4.2.3 Test Procedures


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

NOTE: The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

4.2.4 Deviation from Test Standard

No deviation.

4.2.5 Test Setup

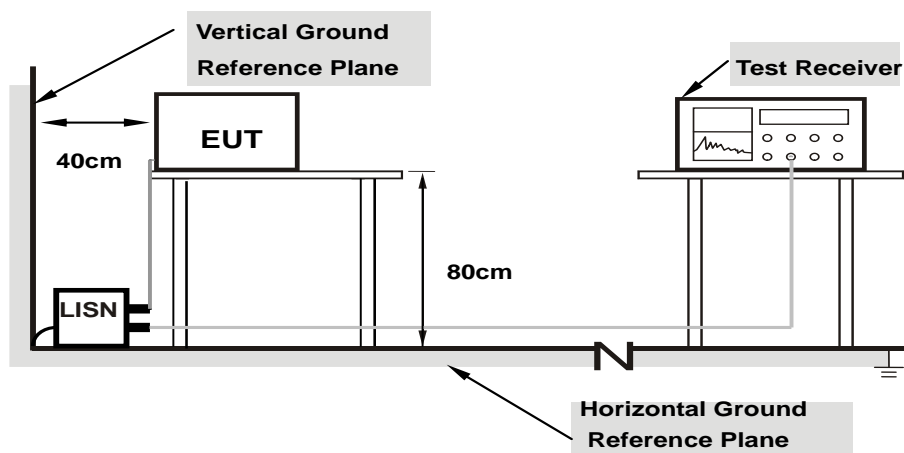

Note: 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT Operating Conditions

- Connected the EUT to Adapter or Notebook.
- Set the EUT under transmission condition continuously at specific channel frequency continuously.

4.2.7 Test Results


Mode A

RF Mode	TX 802.11g	Channel	CH 6 : 2437 MHz
Frequency Range	150kHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9kHz

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15781	9.80	34.43	19.26	44.23	29.06	65.58	55.58	-21.35	-26.52
2	0.31797	9.82	17.38	8.34	27.20	18.16	59.76	49.76	-32.56	-31.60
3	0.44688	9.85	24.88	22.74	34.73	32.59	56.93	46.93	-22.20	-14.34
4	0.91953	9.90	11.51	4.95	21.41	14.85	56.00	46.00	-34.59	-31.15
5	3.78516	10.09	23.78	15.82	33.87	25.91	56.00	46.00	-22.13	-20.09
6	8.09766	10.18	26.88	22.39	37.06	32.57	60.00	50.00	-22.94	-17.43

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

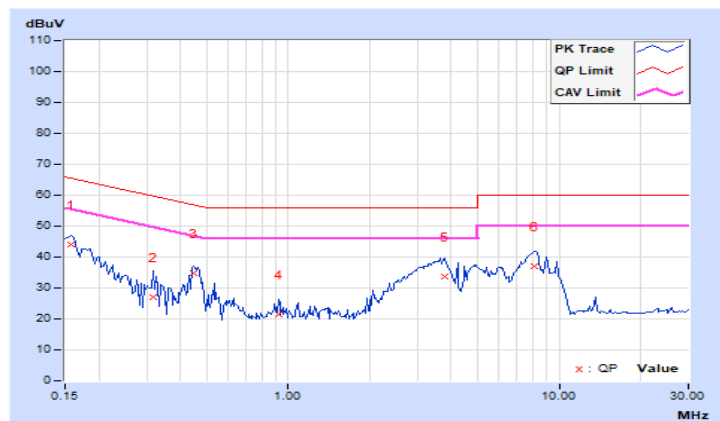


RF Mode	TX 802.11g	Channel	CH 6 : 2437 MHz
Frequency Range	150kHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9kHz

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	9.77	37.36	22.27	47.13	32.04	66.00	56.00	-18.87	-23.96
2	0.28281	9.80	18.93	5.19	28.73	14.99	60.73	50.73	-32.00	-35.74
3	0.45469	9.83	22.91	10.77	32.74	20.60	56.79	46.79	-24.05	-26.19
4	0.98594	9.90	8.61	1.19	18.51	11.09	56.00	46.00	-37.49	-34.91
5	3.53125	10.04	23.97	17.08	34.01	27.12	56.00	46.00	-21.99	-18.88
6	8.05859	10.15	27.77	22.94	37.92	33.09	60.00	50.00	-22.08	-16.91

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

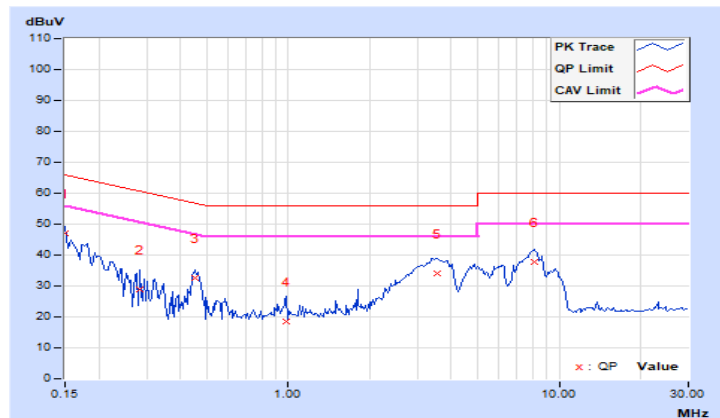


Mode B

RF Mode	TX 802.11g	Channel	CH 6 : 2437 MHz
Frequency Range	150kHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9kHz

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	9.81	30.80	22.97	40.61	32.78	66.00	56.00	-25.39	-23.22
2	0.42734	9.84	23.27	16.22	33.11	26.06	57.30	47.30	-24.19	-21.24
3	0.74766	9.88	27.34	21.37	37.22	31.25	56.00	46.00	-18.78	-14.75
4	1.14063	9.92	16.80	9.24	26.72	19.16	56.00	46.00	-29.28	-26.84
5	2.00391	10.00	14.00	4.10	24.00	14.10	56.00	46.00	-32.00	-31.90
6	13.05469	10.24	22.77	19.97	33.01	30.21	60.00	50.00	-26.99	-19.79

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

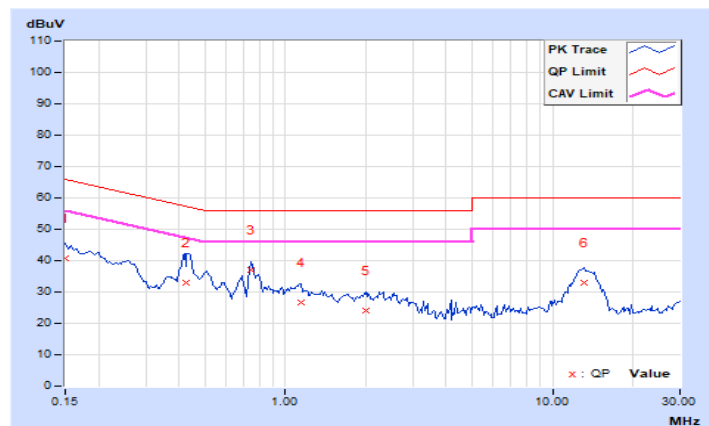


RF Mode	TX 802.11g	Channel	CH 6 : 2437 MHz
Frequency Range	150kHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9kHz

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	9.77	30.62	16.76	40.39	26.53	66.00	56.00	-25.61	-29.47
2	0.41563	9.82	23.74	14.56	33.56	24.38	57.54	47.54	-23.98	-23.16
3	0.75156	9.87	24.69	16.48	34.56	26.35	56.00	46.00	-21.44	-19.65
4	2.64453	10.01	12.47	0.79	22.48	10.80	56.00	46.00	-33.52	-35.20
5	4.93750	10.08	9.57	0.74	19.65	10.82	56.00	46.00	-36.35	-35.18
6	12.38281	10.22	15.42	9.27	25.64	19.49	60.00	50.00	-34.36	-30.51

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

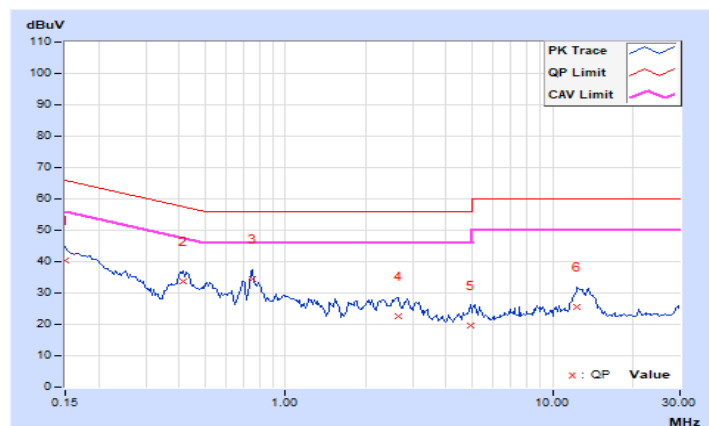


4.3 6dB Bandwidth Measurement

4.3.1 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 Test Setup



4.3.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.3.4 Test Procedure

- Set resolution bandwidth (RBW) = 100kHz
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

4.3.5 Deviation from Test Standard

No deviation.

4.3.6 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.3.7 Test Result

Mode A

802.11b

Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
1	2412	8.56	8.57	0.5	Pass
6	2437	10.04	8.58	0.5	Pass
11	2462	9.05	8.58	0.5	Pass

802.11g

Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
1	2412	15.15	15.14	0.5	Pass
6	2437	15.96	16.3	0.5	Pass
11	2462	15.73	15.74	0.5	Pass

802.11n (HT20)


Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
1	2412	15.16	15.15	0.5	Pass
6	2437	17.21	16.57	0.5	Pass
11	2462	16.37	16.02	0.5	Pass

802.11n (HT40)


Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
3	2422	28.86	35.21	0.5	Pass
6	2437	36.48	36.46	0.5	Pass
9	2452	28.84	35.21	0.5	Pass

Spectrum Plot of Worst Value


802.11b

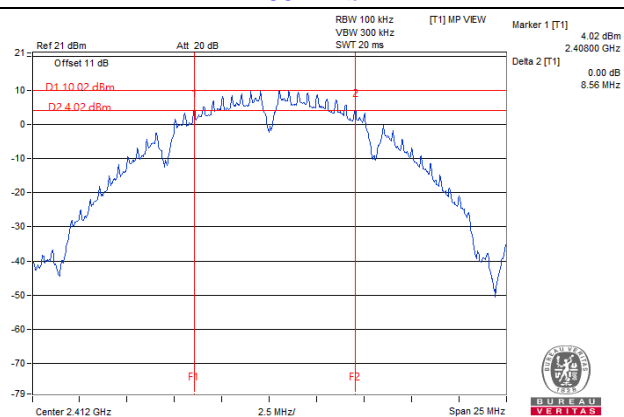


802.11g

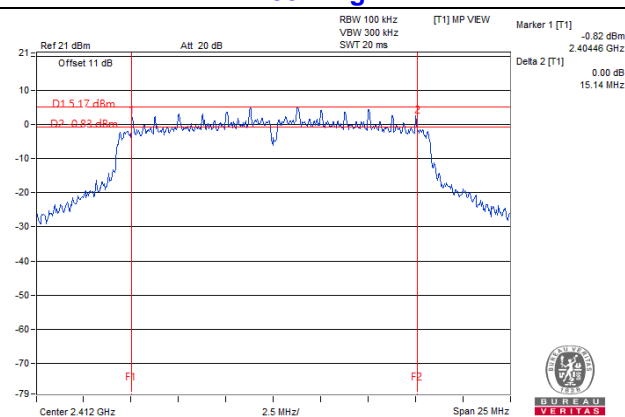

802.11n (HT20)

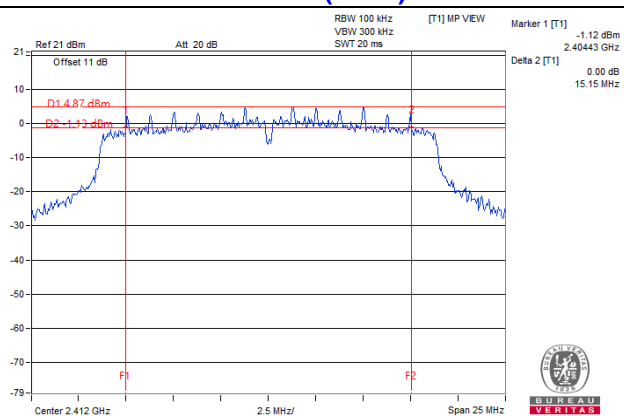

802.11n (HT40)

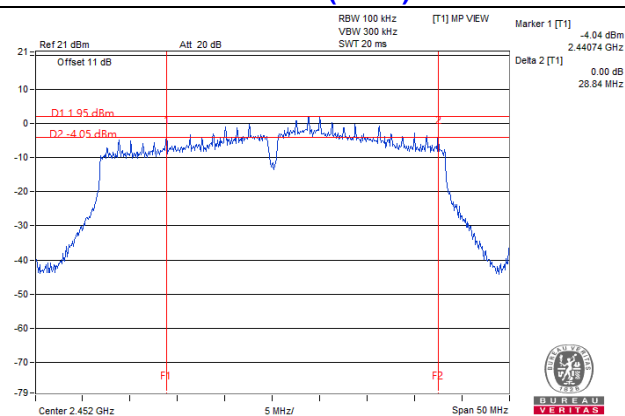

4.4 Conducted Output Power Measurement

4.4.1 Limits of Conducted Output Power Measurement

For systems using digital modulation in the 2400–2483.5 MHz bands: 1 Watt (30dBm)

Per KDB 662911 D01 Multiple Transmitter Output Method of conducted output power measurement on IEEE 802.11 devices,


Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$;

Array Gain = 0 dB (i.e., no array gain) for channel widths ≥ 40 MHz for any N_{ANT} ;

Array Gain = $5 \log(N_{ANT}/N_{SS})$ dB or 3 dB, whichever is less for 20-MHz channel widths with $N_{ANT} \geq 5$.

For power measurements on all other devices: Array Gain = $10 \log(N_{ANT}/N_{SS})$ dB.

4.4.2 Test Setup



4.4.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.4.4 Test Procedures

A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor. Record the power level.

Average power sensor was used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

4.4.5 Deviation from Test Standard

No deviation.

4.4.6 EUT Operating Conditions

Same as Item 4.3.6.

4.4.7 Test Results

Mode A

FOR PEAK POWER

802.11b

Channel	Frequency (MHz)	Peak Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
1	2412	20.15	21.18	234.734	23.71	30	Pass
6	2437	20.16	20.21	208.707	23.20	30	Pass
11	2462	20.19	20.25	210.397	23.23	30	Pass

802.11g

Channel	Frequency (MHz)	Peak Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
1	2412	19.11	19.77	176.312	22.46	30	Pass
6	2437	20.43	20.58	224.696	23.52	30	Pass
11	2462	19.63	20.10	194.163	22.88	30	Pass

802.11n (HT20)

Channel	Frequency (MHz)	Peak Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
1	2412	19.16	19.52	171.95	22.35	30	Pass
6	2437	19.82	19.96	195.023	22.90	30	Pass
11	2462	18.75	19.49	163.91	22.15	30	Pass

802.11n (HT40)

Channel	Frequency (MHz)	Peak Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
3	2422	16.20	17.05	92.386	19.66	30	Pass
6	2437	17.45	18.07	119.711	20.78	30	Pass
9	2452	18.51	18.56	142.737	21.55	30	Pass

FOR AVERAGE POWER

802.11b

Chan.	Frequency (MHz)	Avg. Power (dBm)		Total Avg.Power (mW)	Total Avg.Power (dBm)
		Chain 0	Chain 1		
1	2412	17.71	17.88	120.396	20.81
6	2437	17.85	17.99	123.904	20.93
11	2462	17.90	18.02	125.046	20.97

802.11g

Chan.	Frequency (MHz)	Avg. Power (dBm)		Total Avg.Power (mW)	Total Avg.Power (dBm)
		Chain 0	Chain 1		
1	2412	14.42	14.84	58.148	17.65
6	2437	15.97	16.05	79.808	19.02
11	2462	15.11	15.55	68.326	18.35

802.11n (HT20)

Chan.	Frequency (MHz)	Avg. Power (dBm)		Total Avg.Power (mW)	Total Avg.Power (dBm)
		Chain 0	Chain 1		
1	2412	14.31	14.65	56.152	17.49
6	2437	14.78	14.91	61.035	17.86
11	2462	13.92	14.45	52.522	17.20

802.11n (HT40)


Chan.	Frequency (MHz)	Avg. Power (dBm)		Total Avg.Power (mW)	Total Avg.Power (dBm)
		Chain 0	Chain 1		
3	2422	10.26	10.54	21.941	13.41
6	2437	11.03	11.49	26.769	14.28
9	2452	12.44	12.84	36.77	15.65

4.5 Power Spectral Density Measurement

4.5.1 Limits of Power Spectral Density Measurement

The Maximum of Power Spectral Density Measurement is 8dBm in any 3 kHz.

4.5.2 Test Setup



4.5.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.5.4 Test Procedure

- Set analyzer center frequency to DTS channel center frequency.
- Set the span to 1.5 times the DTS bandwidth.
- Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- Set the VBW $\geq 3 \times \text{RBW}$.
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level within the RBW.

4.5.5 Deviation from Test Standard

No deviation.

4.5.6 EUT Operating Condition

Same as Item 4.3.6

4.5.7 Test Results

Mode A

802.11b

TX chain	Channel	Freq. (MHz)	PSD (dBm)	10 log (N=2) dB	Total PSD (dBm)	Limit (dBm)	Pass /Fail
0	1	2412	-4.08	3.01	-1.07	8	Pass
	6	2437	-3.91	3.01	-0.9	8	Pass
	11	2462	-3.34	3.01	-0.33	8	Pass
1	1	2412	-4.08	3.01	-1.07	8	Pass
	6	2437	-4.81	3.01	-1.8	8	Pass
	11	2462	-3.52	3.01	-0.51	8	Pass

Note:

1. Method E) 2) c) of power density measurement of KDB 662911 is using for calculating total power density.
2. Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20})^2/2] = 4.59\text{dBi} < 6\text{dBi}$, so the power density limit is not reduced.

802.11g

TX chain	Channel	Freq. (MHz)	PSD (dBm)	10 log (N=2) dB	Total PSD (dBm)	Limit (dBm)	Pass /Fail
0	1	2412	-9.08	3.01	-6.07	8	Pass
	6	2437	-9.55	3.01	-6.54	8	Pass
	11	2462	-9.7	3.01	-6.69	8	Pass
1	1	2412	-10.25	3.01	-7.24	8	Pass
	6	2437	-9.88	3.01	-6.87	8	Pass
	11	2462	-9.83	3.01	-6.82	8	Pass

Note:

1. Method E) 2) c) of power density measurement of KDB 662911 is using for calculating total power density.
2. Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20})^2/2] = 4.59\text{dBi} < 6\text{dBi}$, so the power density limit is not reduced.

802.11n (HT20)

TX chain	Channel	Freq. (MHz)	PSD (dBm)	10 log (N=2) dB	Total PSD (dBm)	Limit (dBm)	Pass /Fail
0	1	2412	-10.73	3.01	-7.72	8	Pass
	6	2437	-11.15	3.01	-8.14	8	Pass
	11	2462	-11.27	3.01	-8.26	8	Pass
1	1	2412	-9.1	3.01	-6.09	8	Pass
	6	2437	-11.35	3.01	-8.34	8	Pass
	11	2462	-11.72	3.01	-8.71	8	Pass

Note:


1. Method E) 2) c) of power density measurement of KDB 662911 is using for calculating total power density.
2. Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20})^2/2] = 4.59\text{dBi} < 6\text{dBi}$, so the power density limit is not reduced.

802.11n (HT40)

TX chain	Channel	Freq. (MHz)	PSD (dBm)	10 log (N=2) dB	Total PSD (dBm)	Limit (dBm)	Pass /Fail
0	3	2422	-16.61	3.01	-13.6	8	Pass
	6	2437	-16.97	3.01	-13.96	8	Pass
	9	2452	-13.7	3.01	-10.69	8	Pass
1	3	2422	-18.16	3.01	-15.15	8	Pass
	6	2437	-19.21	3.01	-16.2	8	Pass
	9	2452	-16.93	3.01	-13.92	8	Pass

Note:

- Method E) 2) c) of power density measurement of KDB 662911 is using for calculating total power density.
- Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20})^2/2] = 4.59\text{dBi} < 6\text{dBi}$, so the power density limit is not reduced.

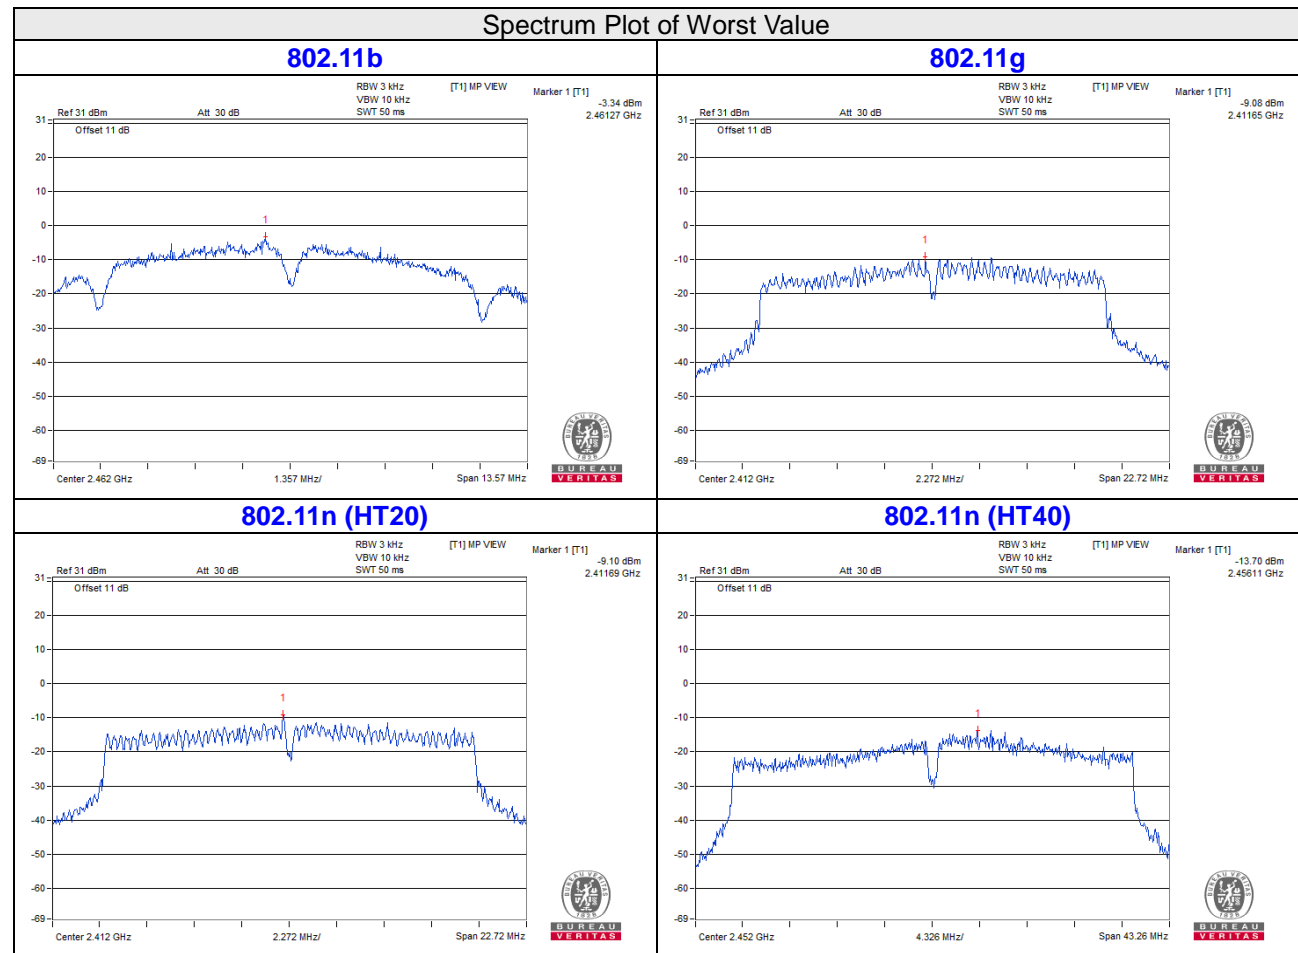


4.6 Conducted Out of Band Emission Measurement

4.6.1 Limits of Conducted Out of Band Emission Measurement

Below -20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.6.2 Test Setup



4.6.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.6.4 Test Procedure

MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW \geq 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

MEASUREMENT PROCEDURE OOB

1. Set RBW = 100 kHz.
2. Set VBW \geq 300 kHz.
3. Detector = peak.
4. Sweep = auto couple.
5. Trace Mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum amplitude level.

4.6.5 Deviation from Test Standard

No deviation.

4.6.6 EUT Operating Condition

Same as Item 4.3.6



4.6.7 Test Results

The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement.



Mode A

802.11b: Chain 0



CH 1

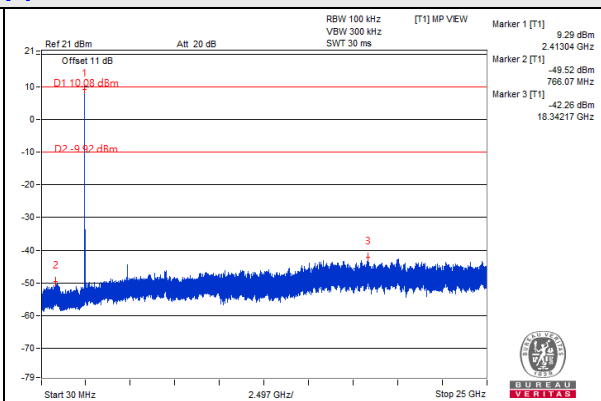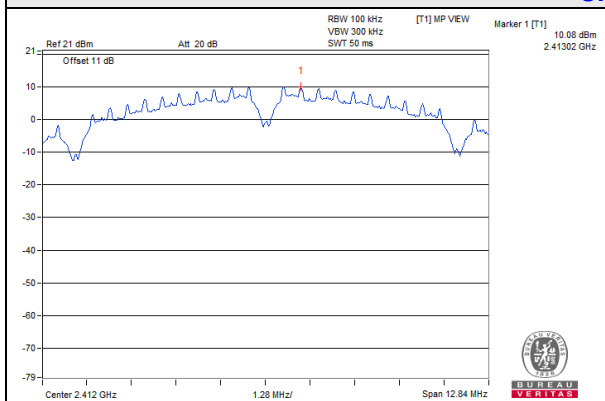


CH 6

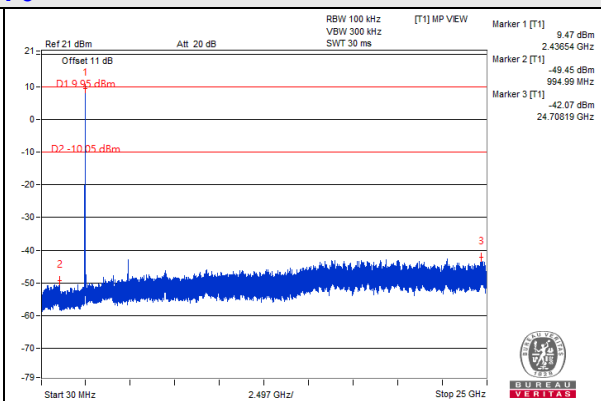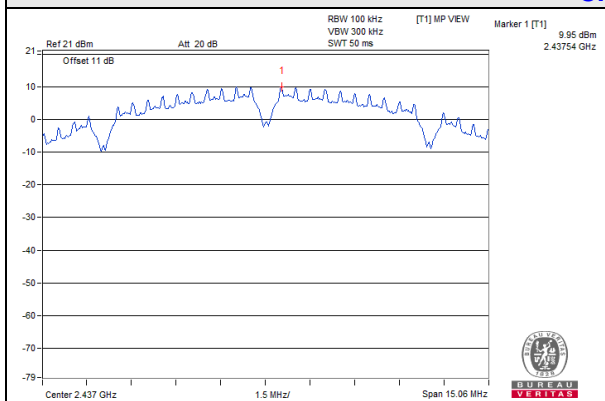


CH 11

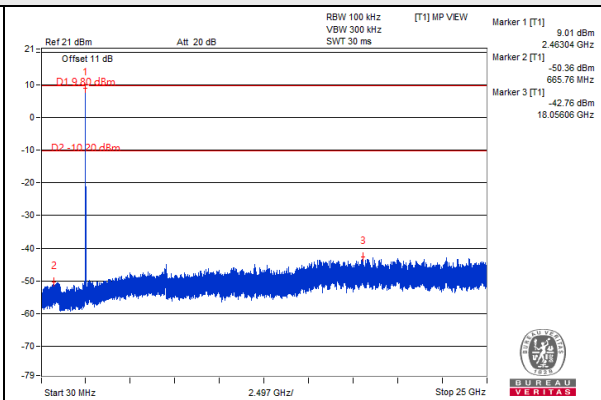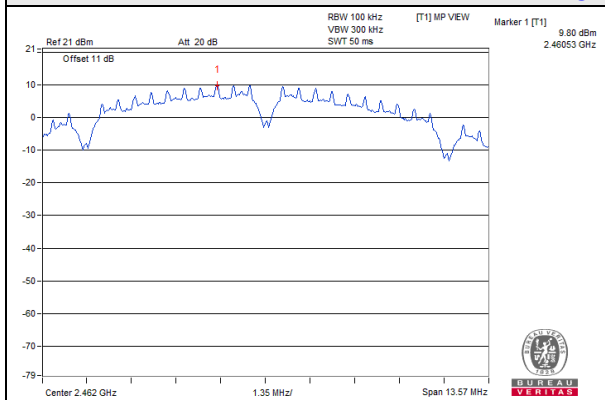

CH 1 Band edge

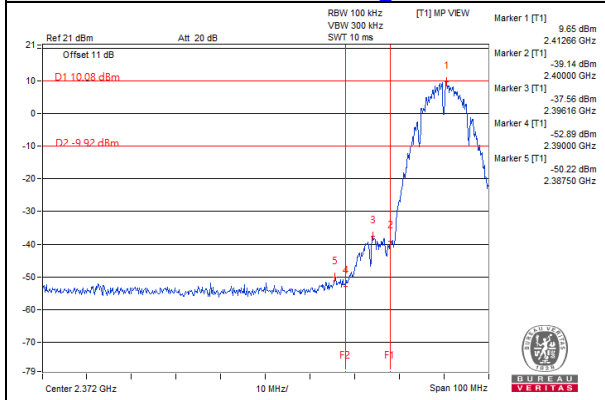


CH 11 Band edge

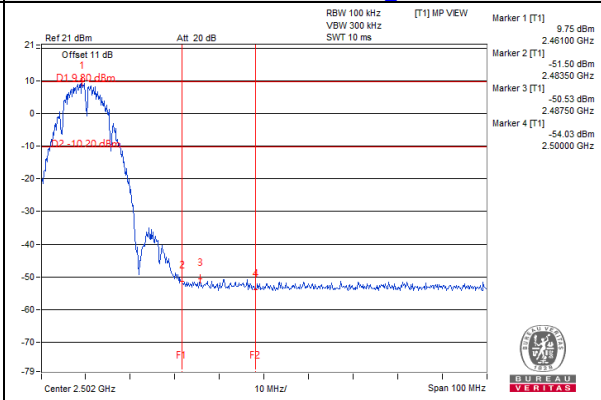


802.11b: Chain 1


CH 1

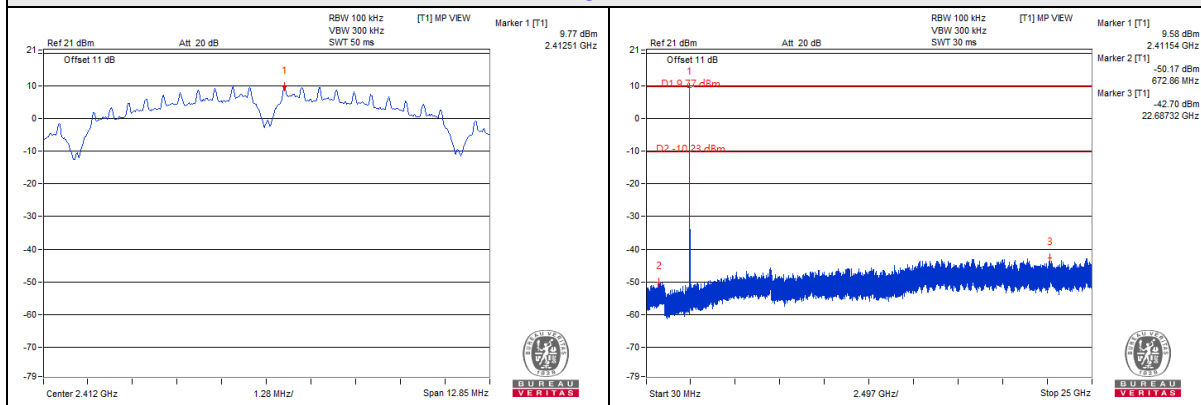


CH 6

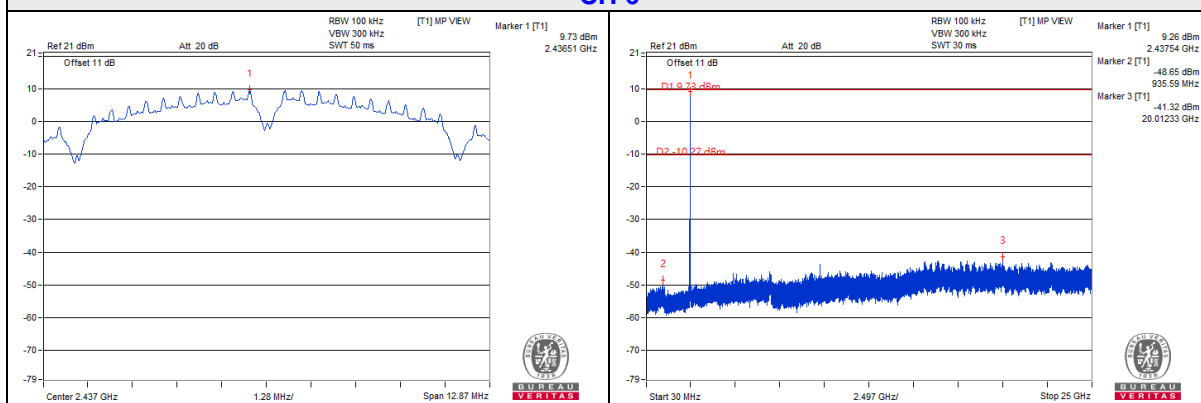


CH 11

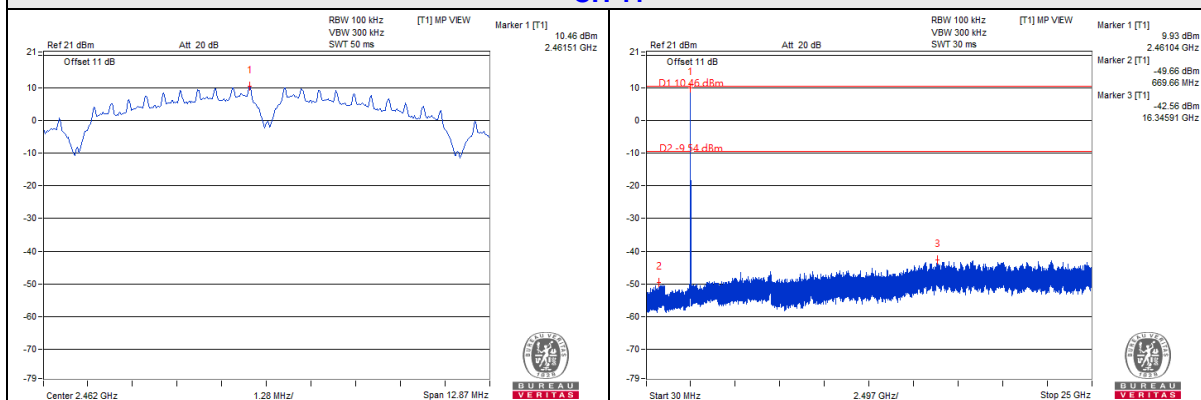

CH 1 Band edge


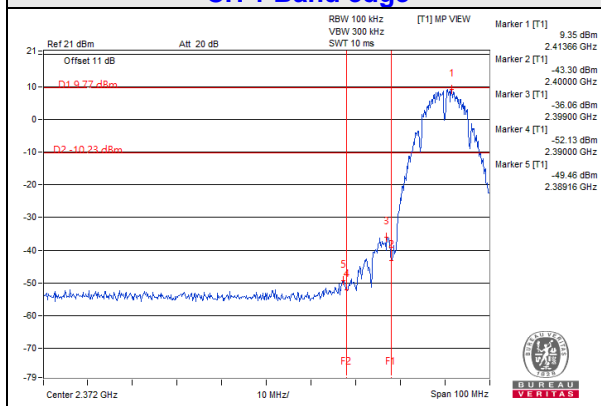


CH 11 Band edge


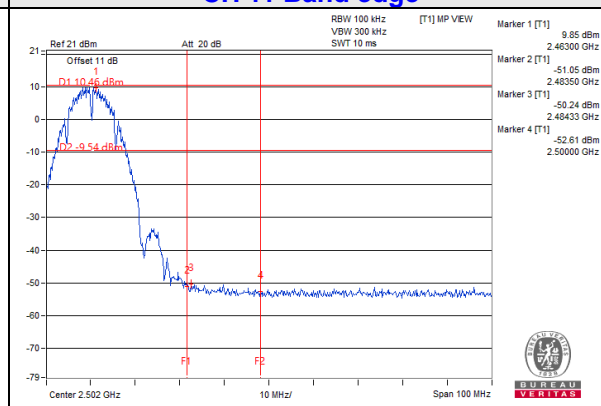


802.11g: Chain 0



CH 1

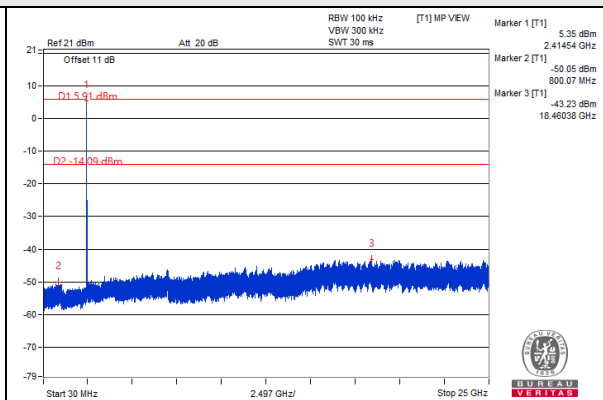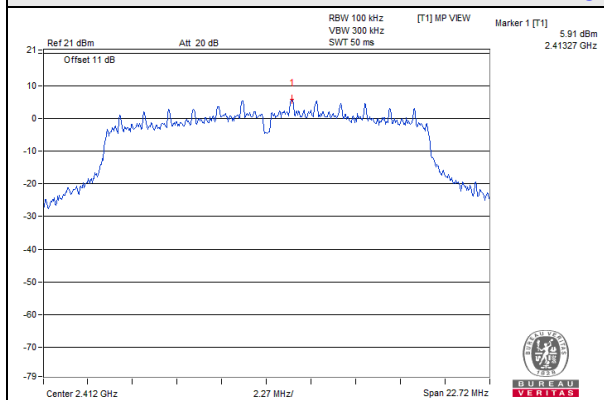


CH 6

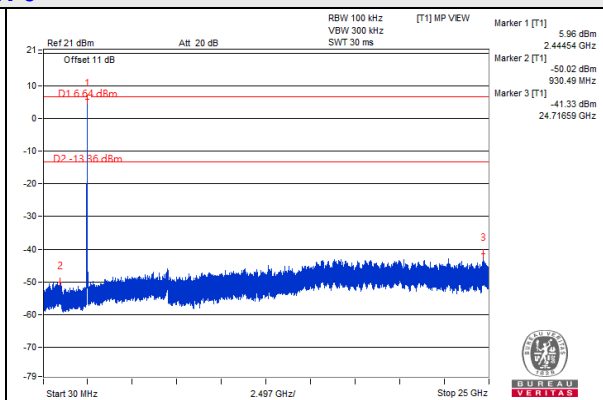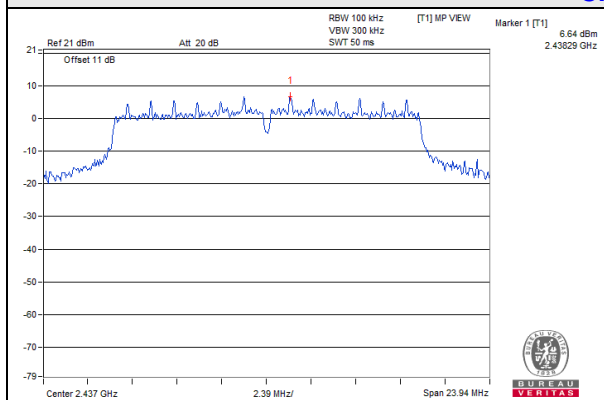


CH 11

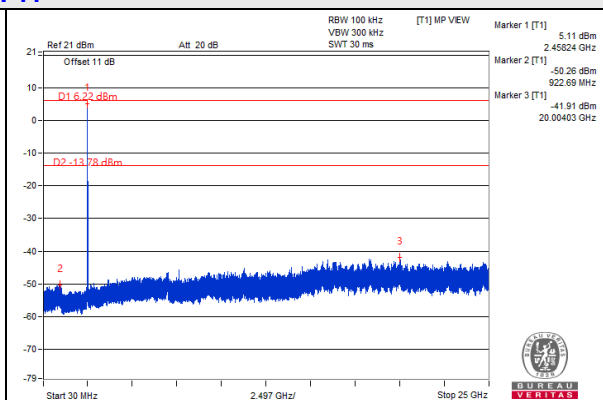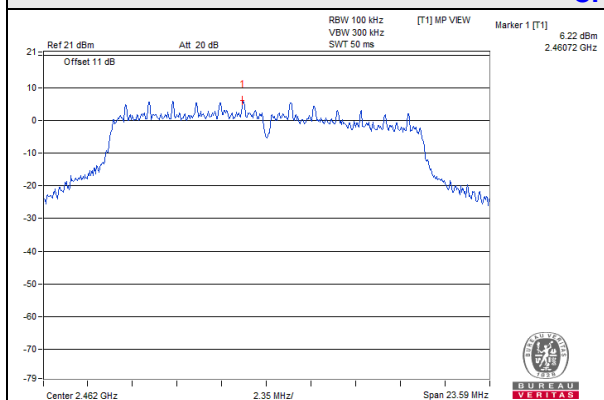

CH 1 Band edge


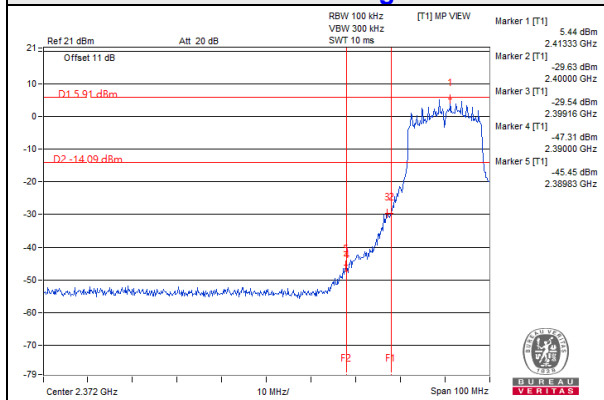


CH 11 Band edge


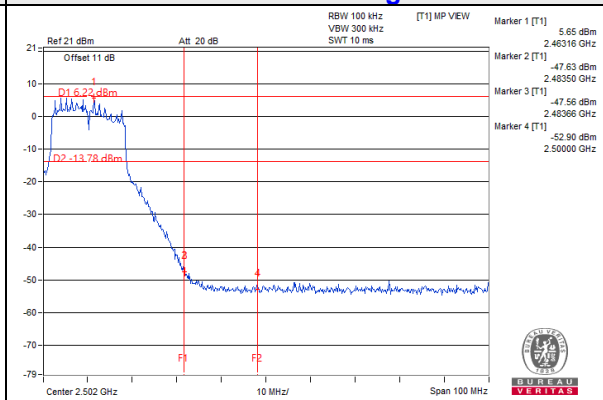


802.11g: Chain 1



CH 1

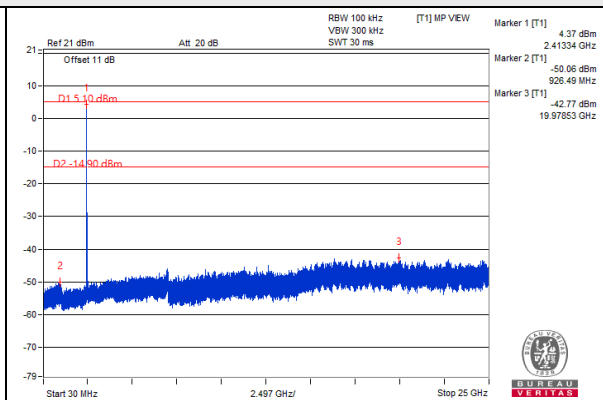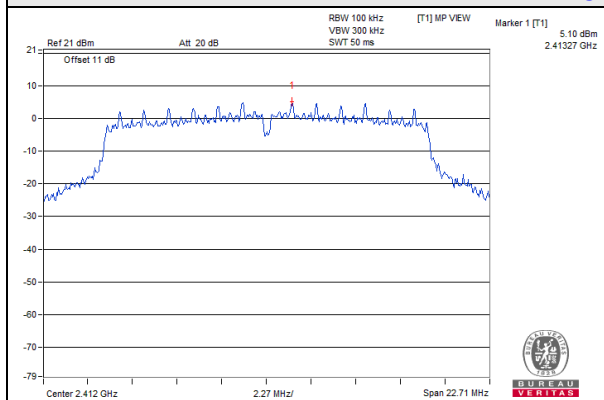


CH 6

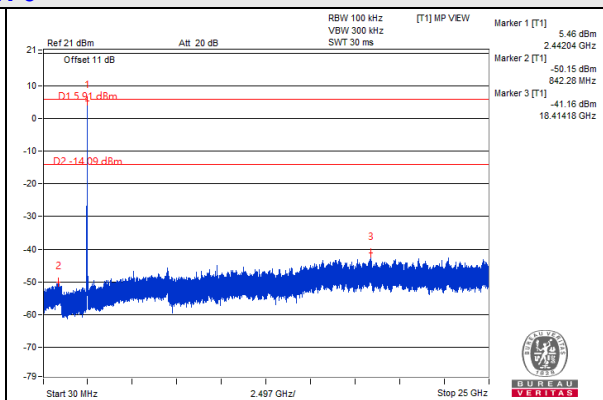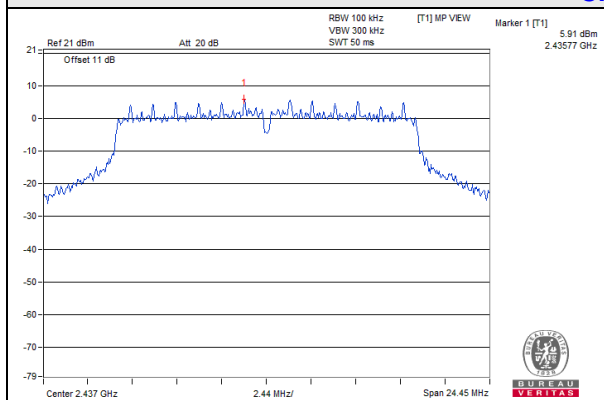


CH 11

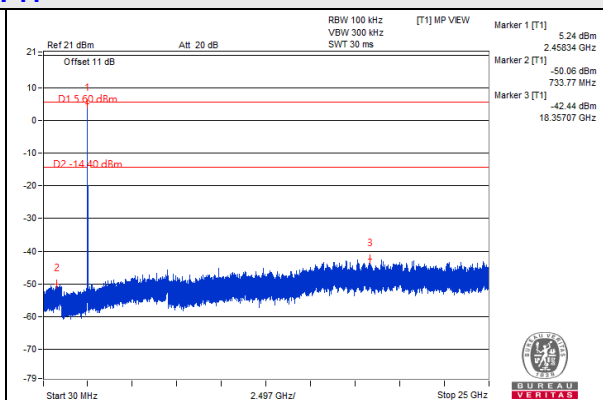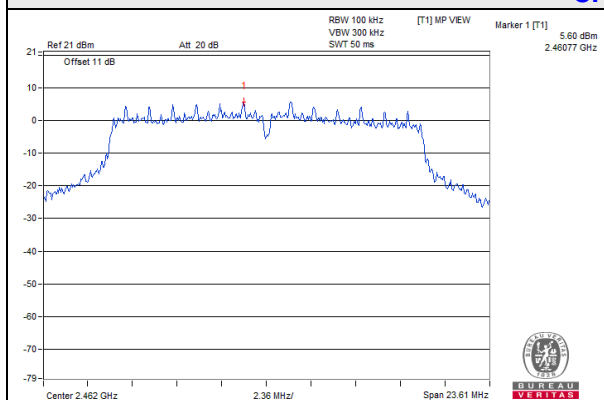

CH 1 Band edge


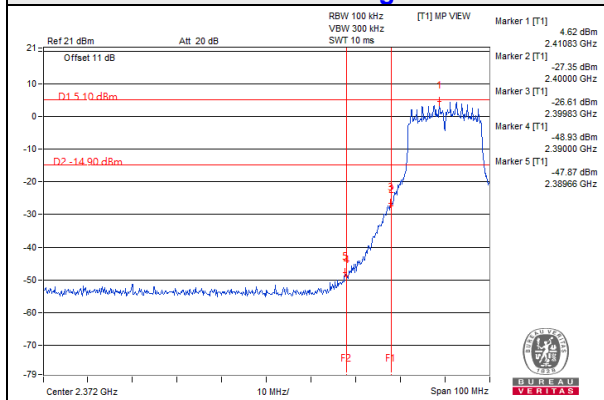


CH 11 Band edge


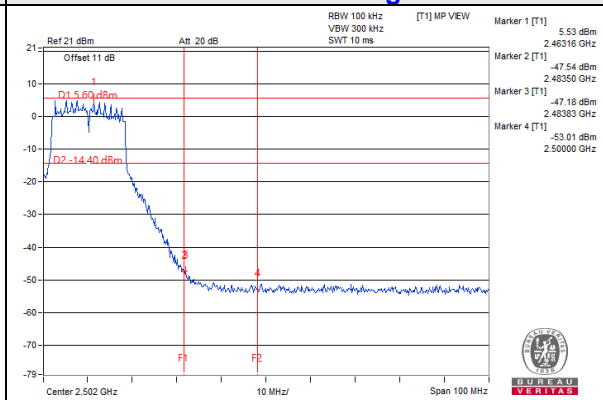


802.11n (HT20): Chain 0



CH 1

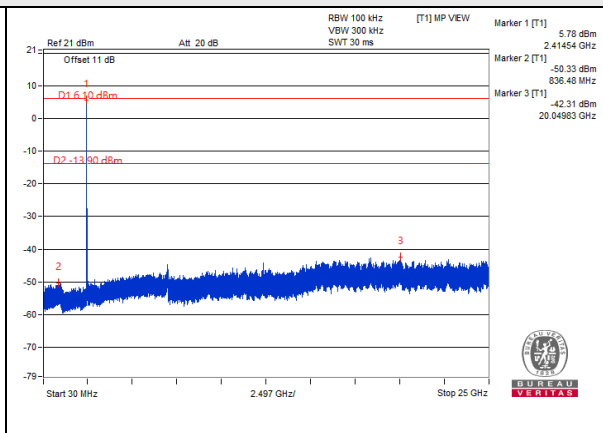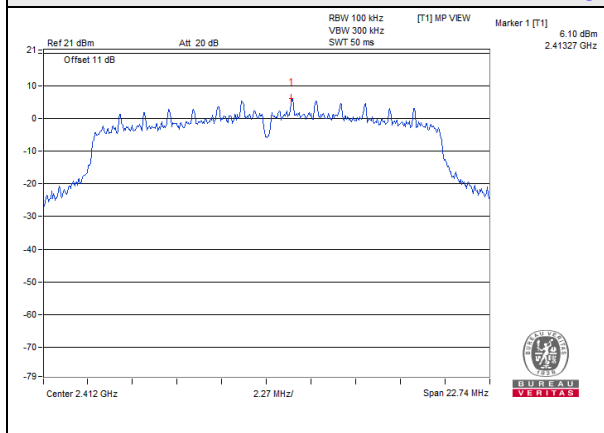


CH 6

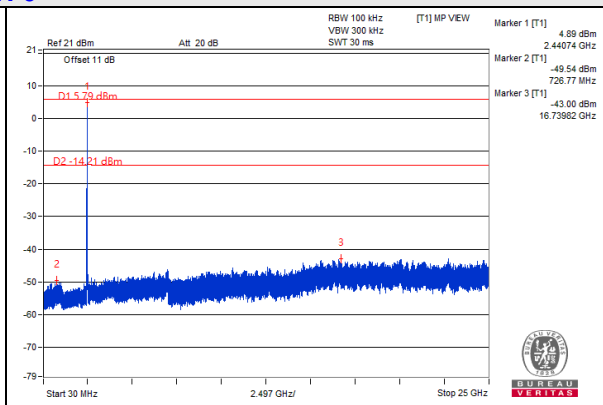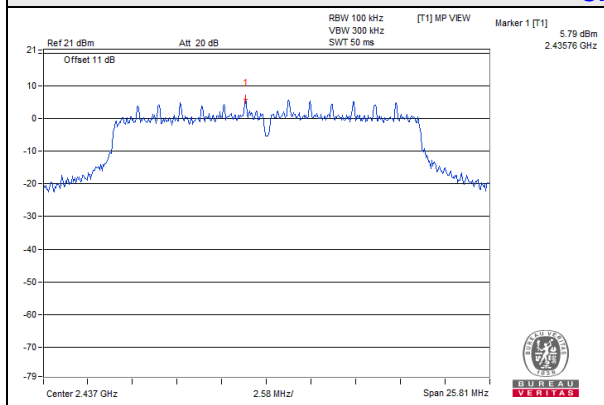


CH 11

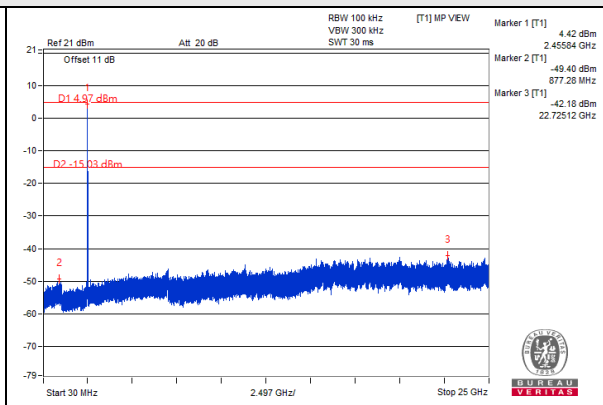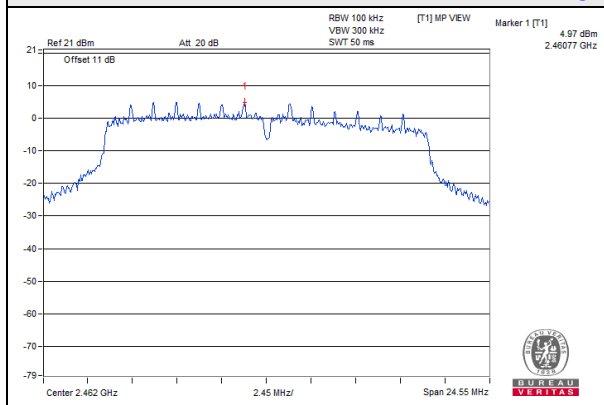

CH 1 Band edge


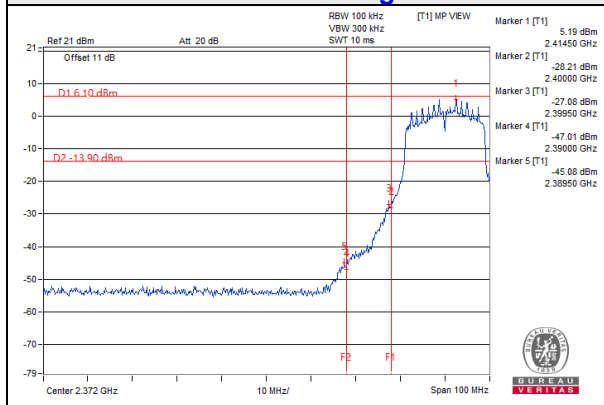


CH 11 Band edge


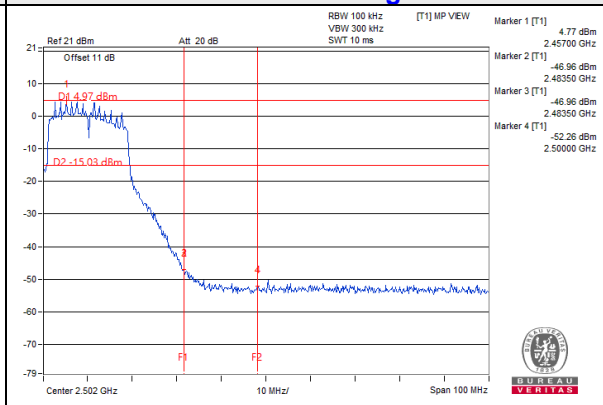


802.11n (HT20): Chain 1



CH 1

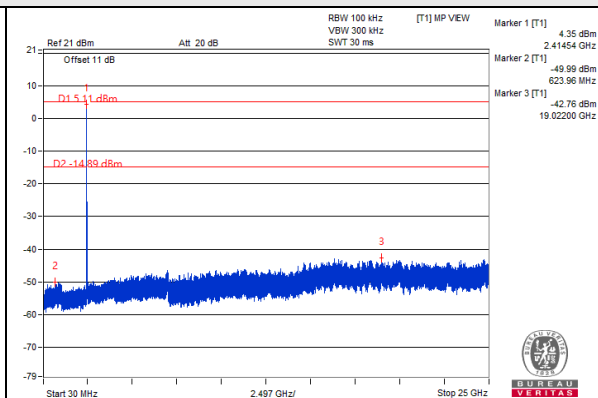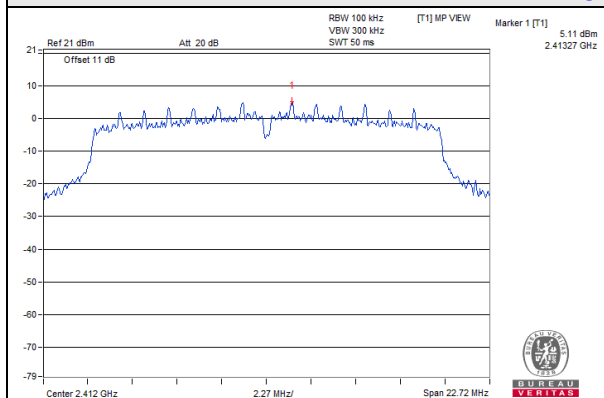


CH 6

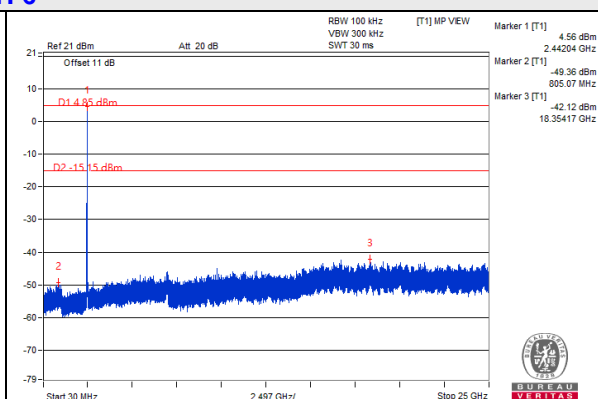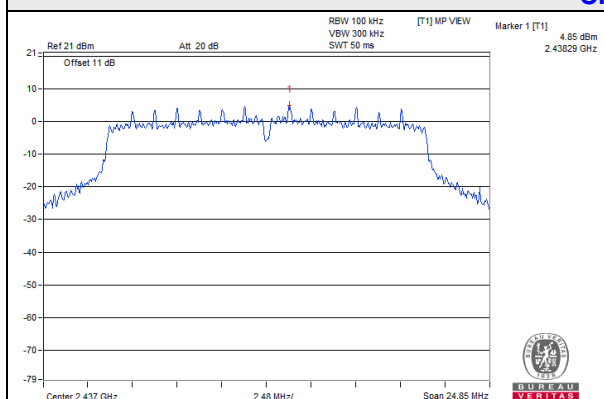


CH 11

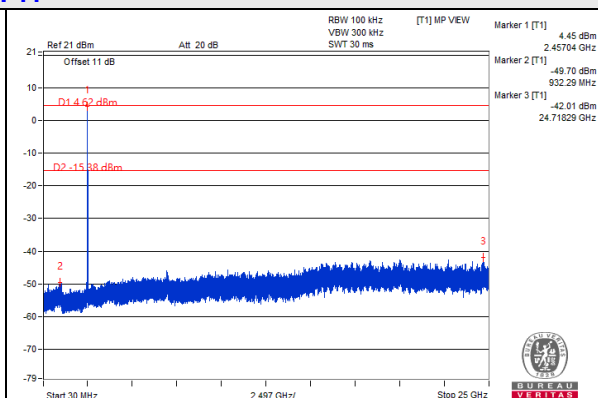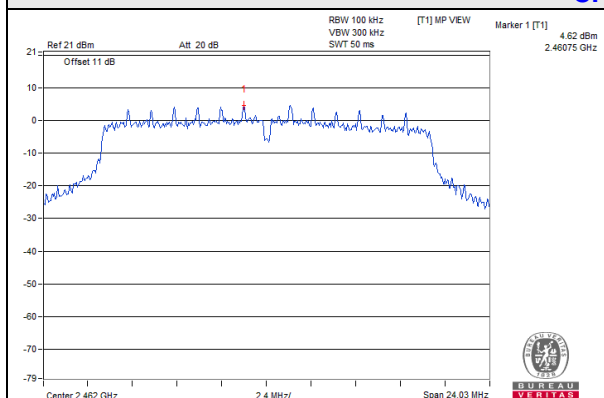

CH 1 Band edge


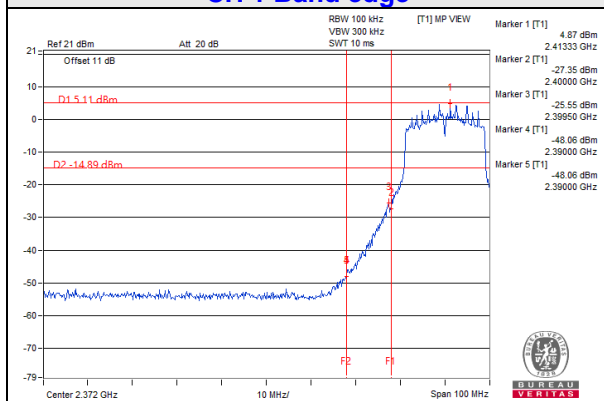


CH 11 Band edge


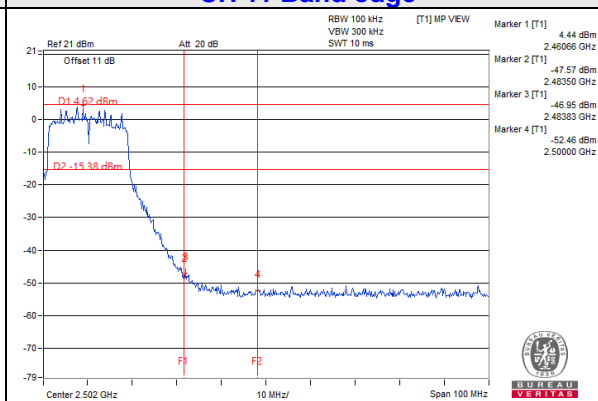


802.11n (HT40): Chain 0



CH 3

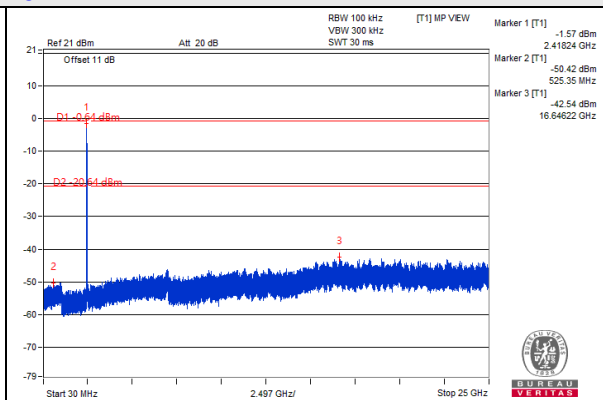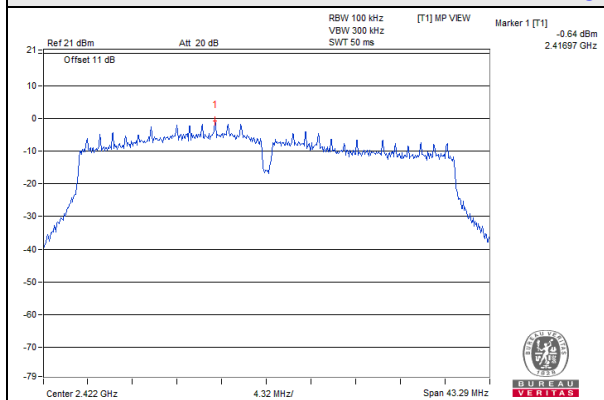


CH 6

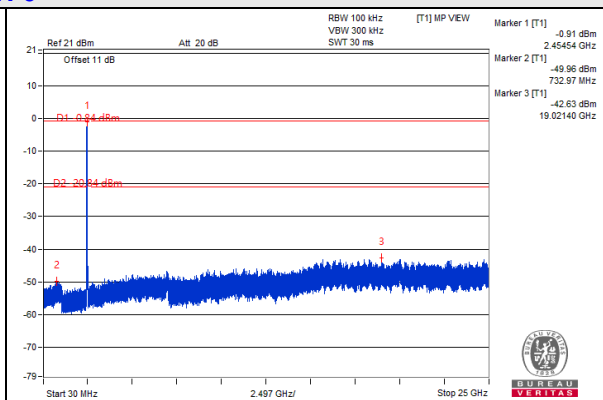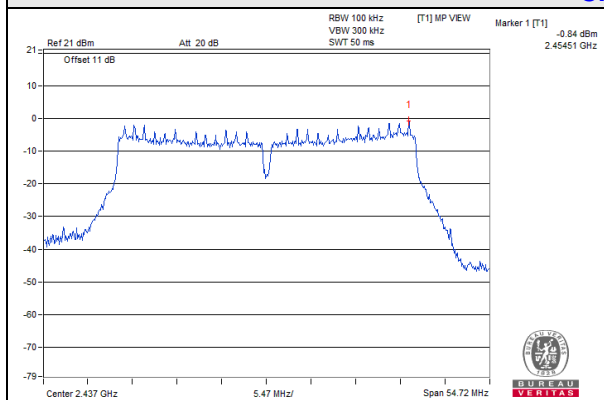


CH 9

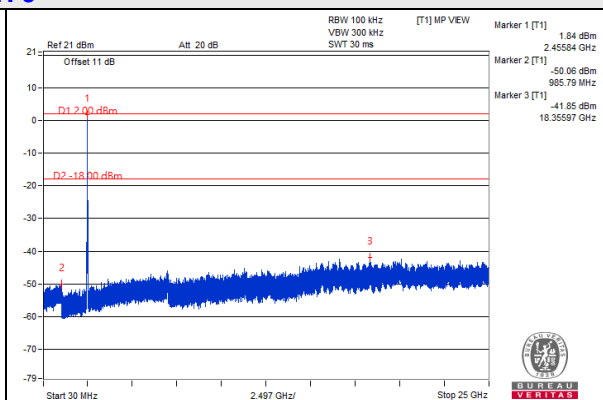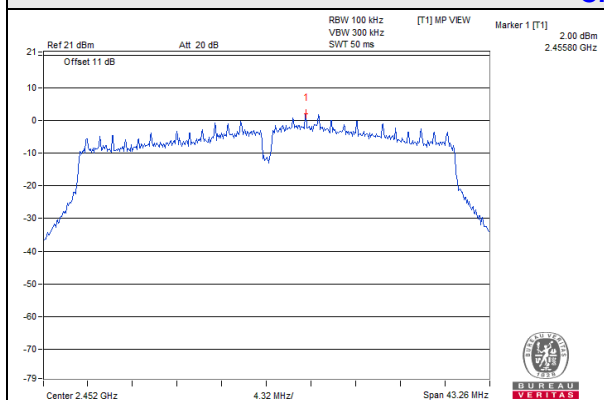

CH 3 Band edge


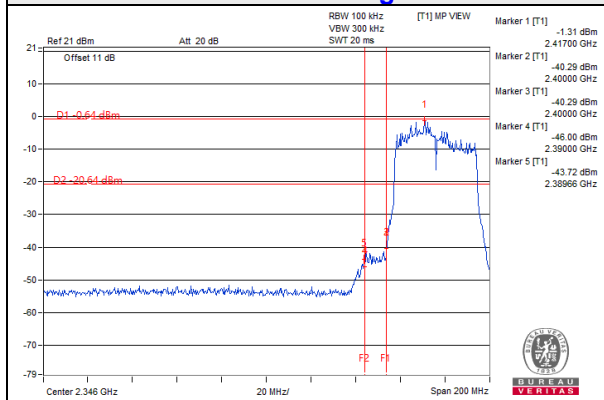


CH 9 Band edge


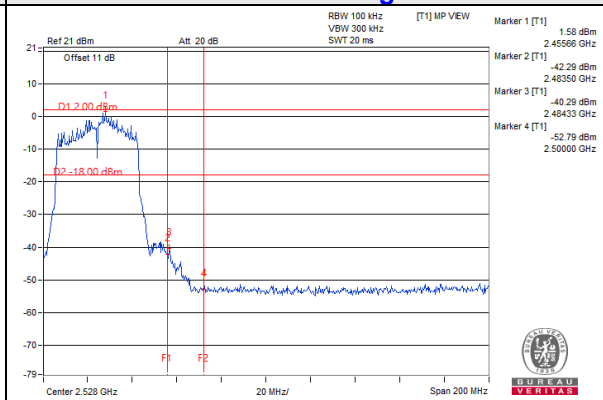


802.11n (HT40): Chain 1



CH 3

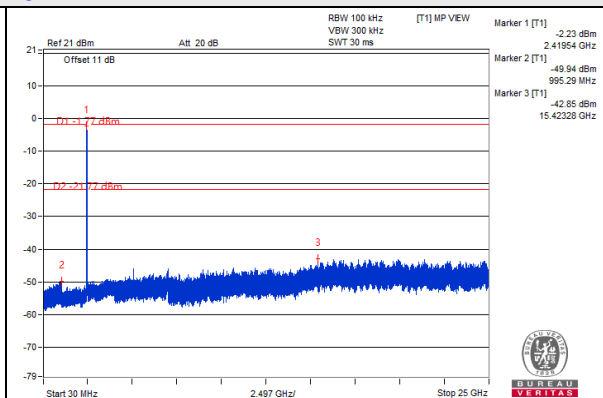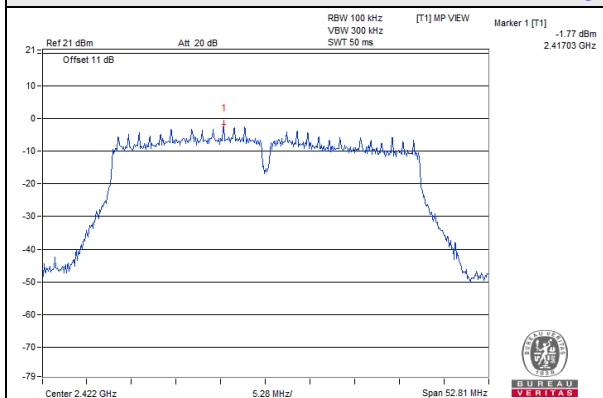



CH 6

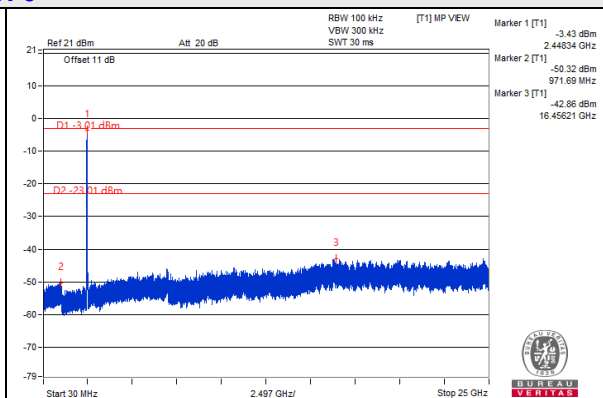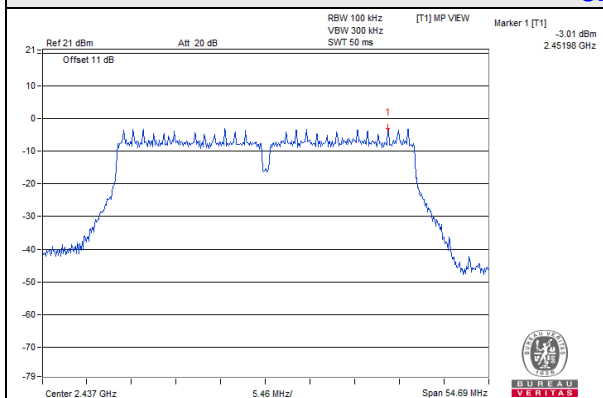



CH 9

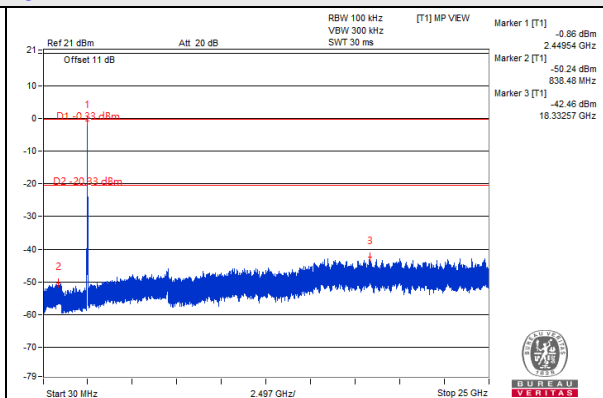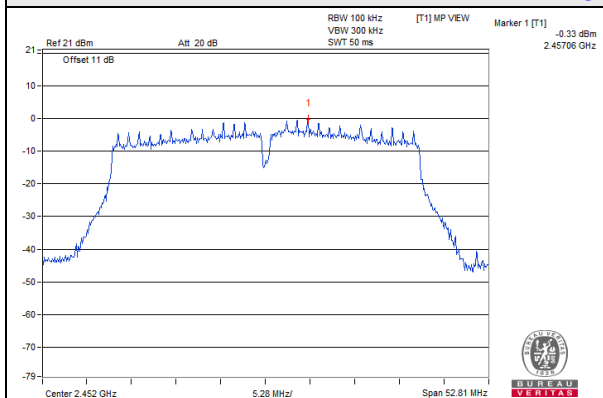

CH 3 Band edge

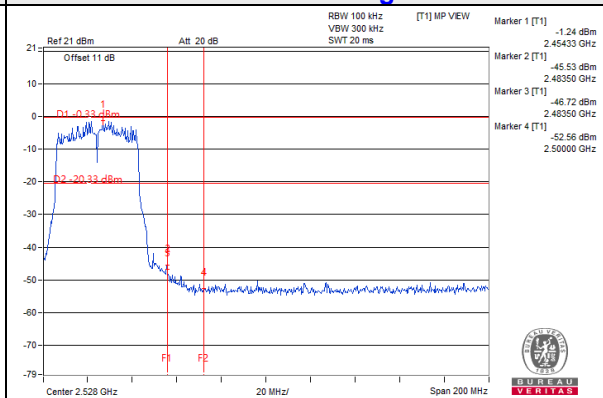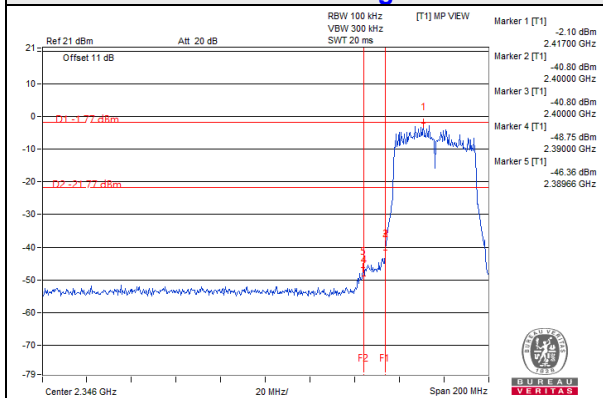



CH 9 Band edge

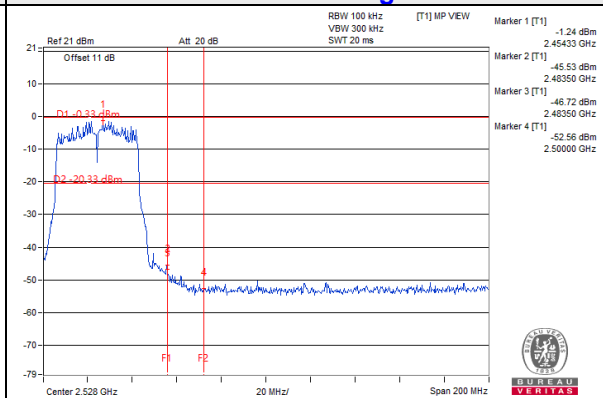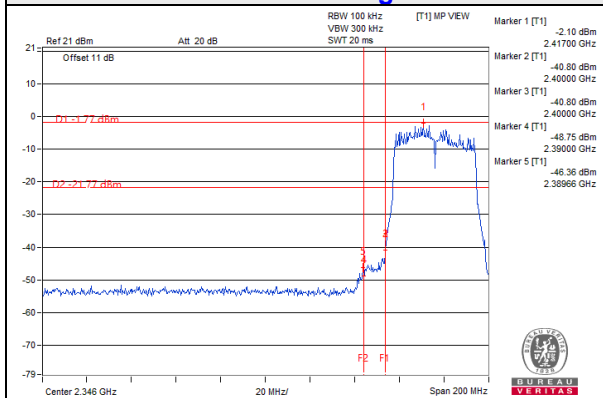



Annex A- Band Edge Measurement


Mode A

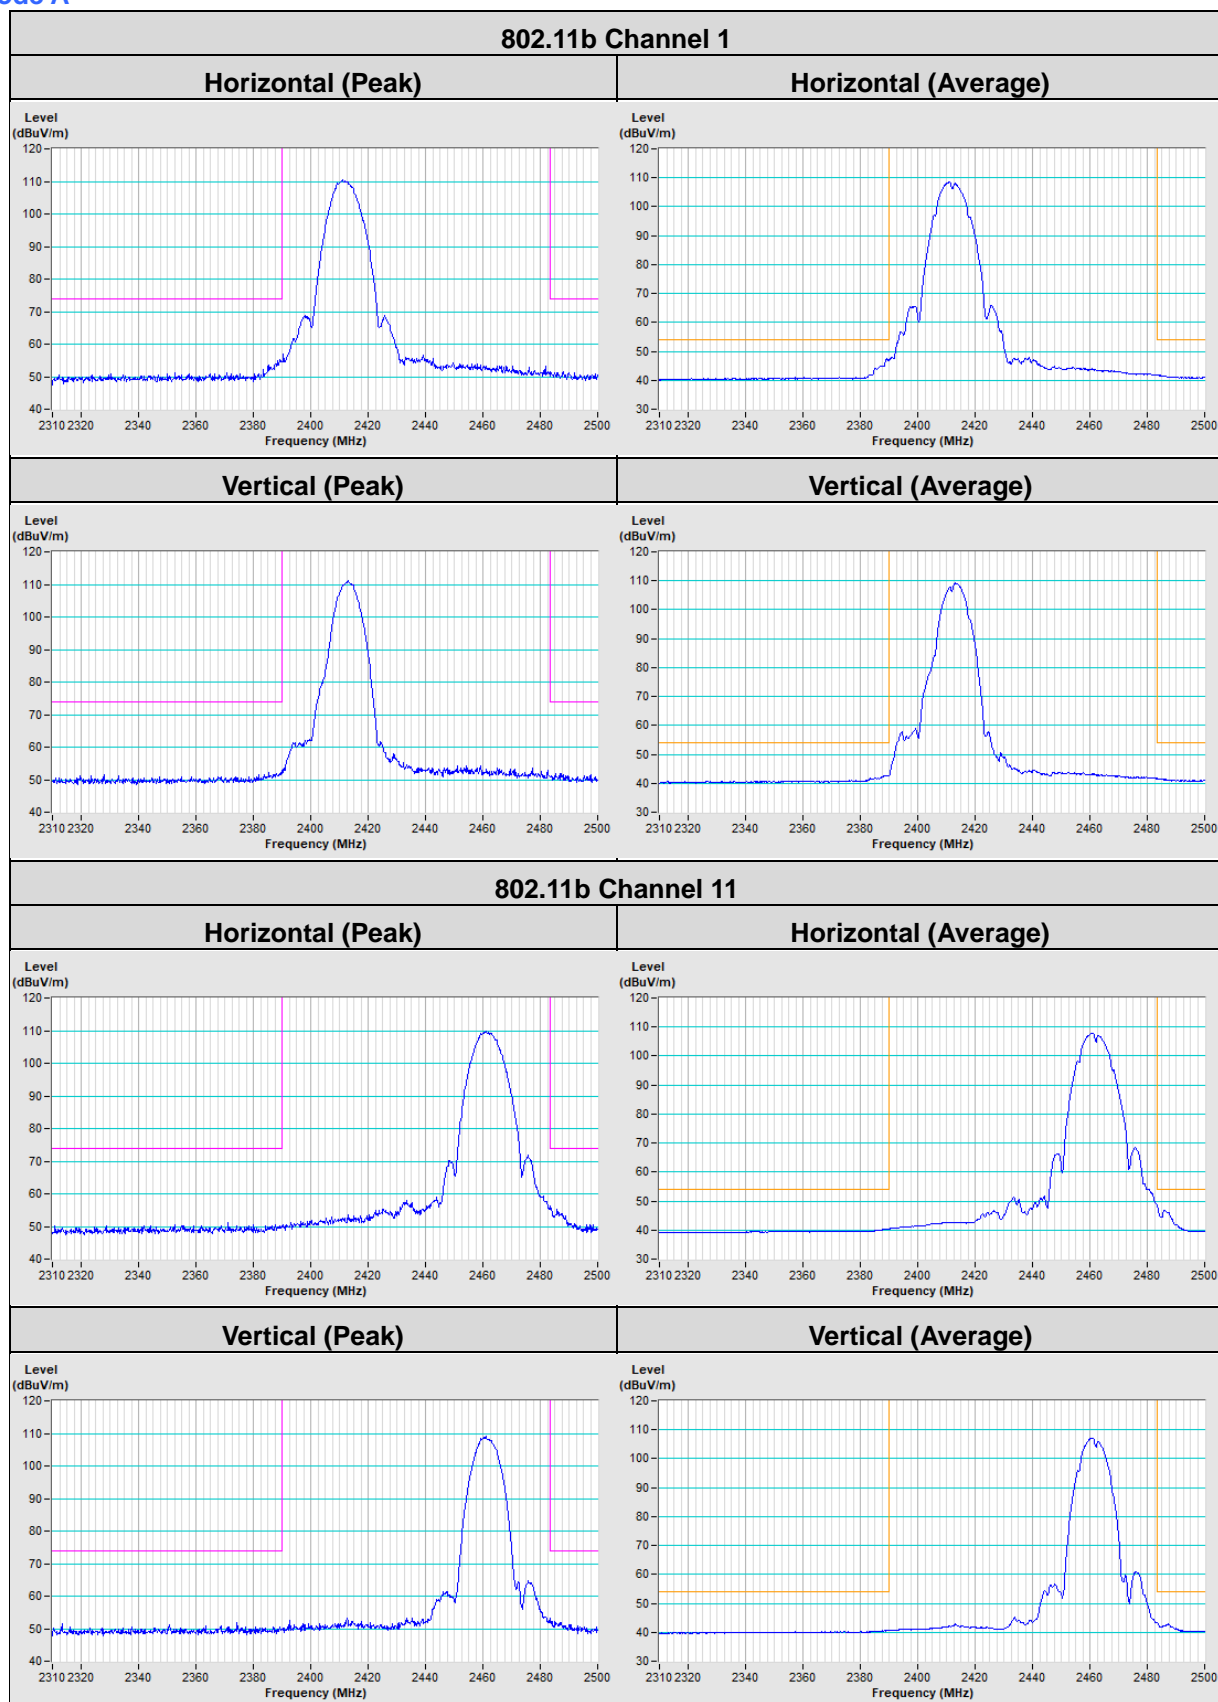

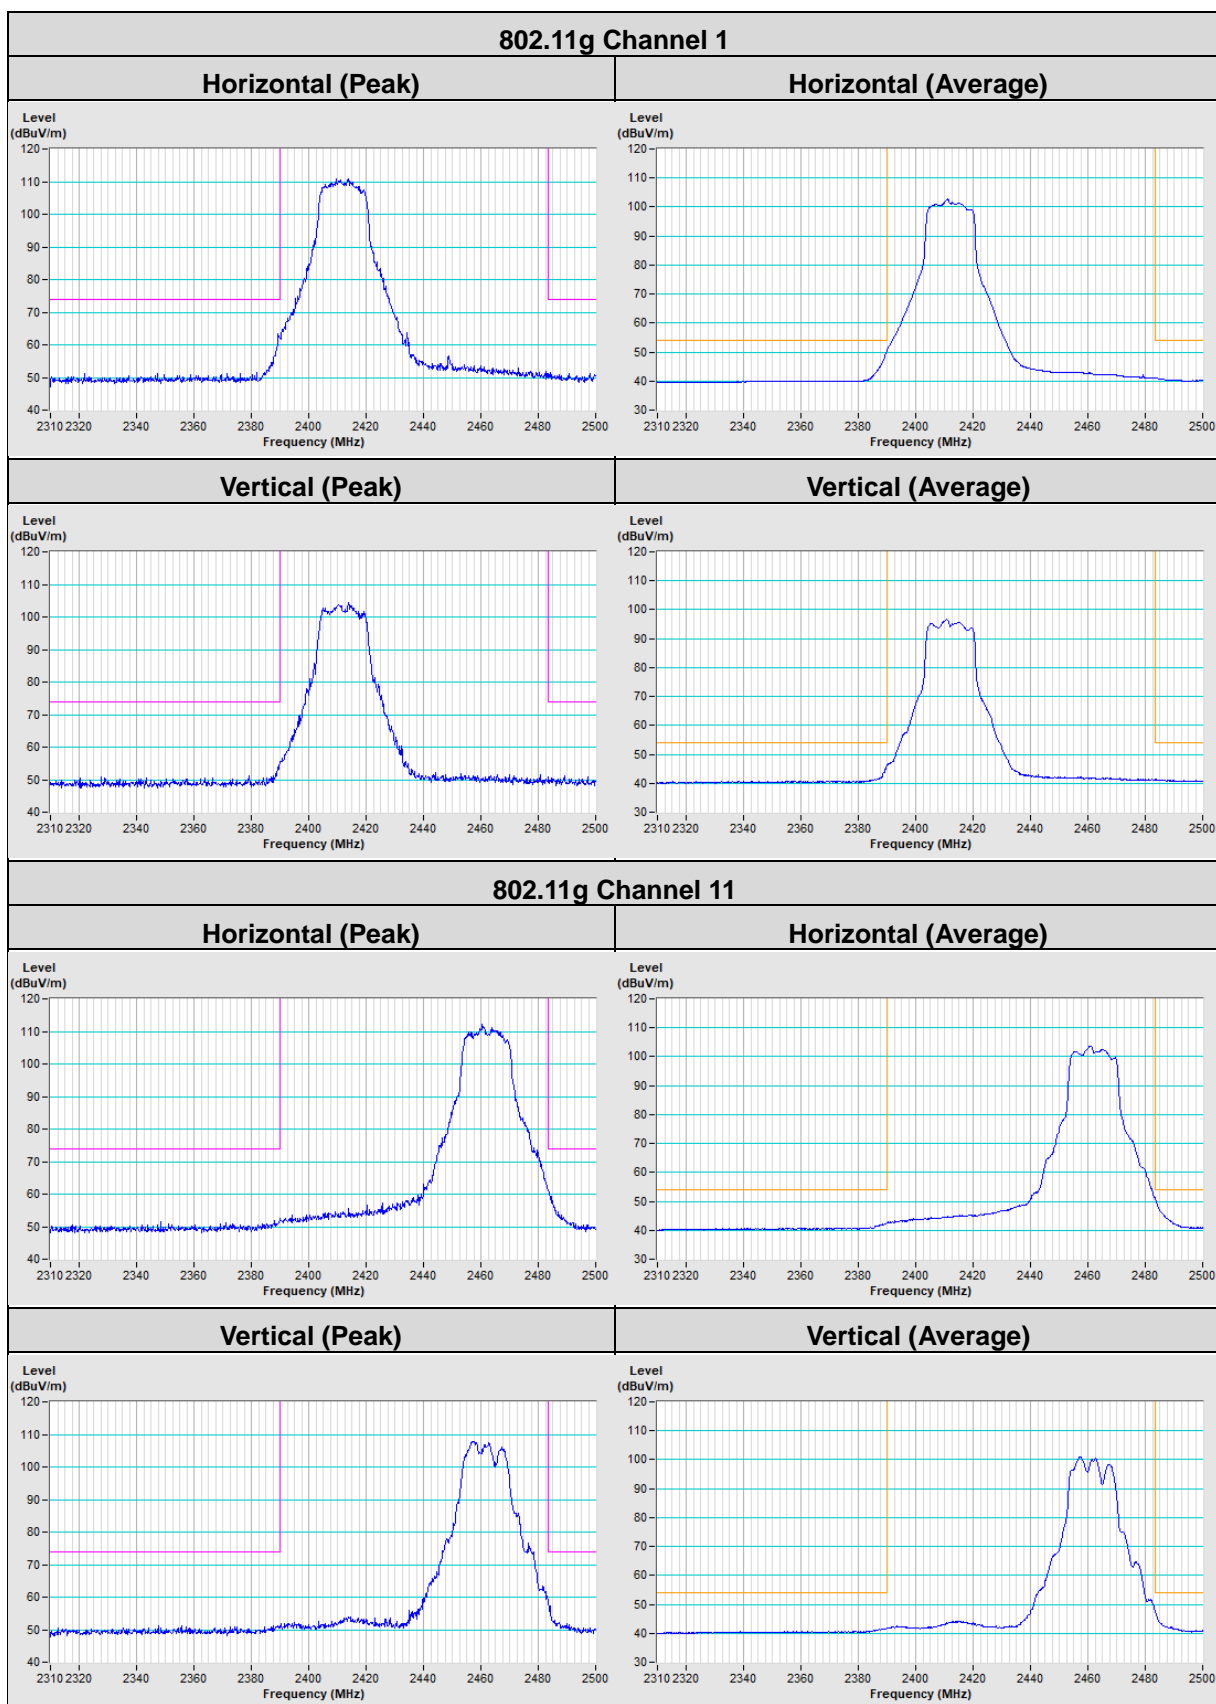

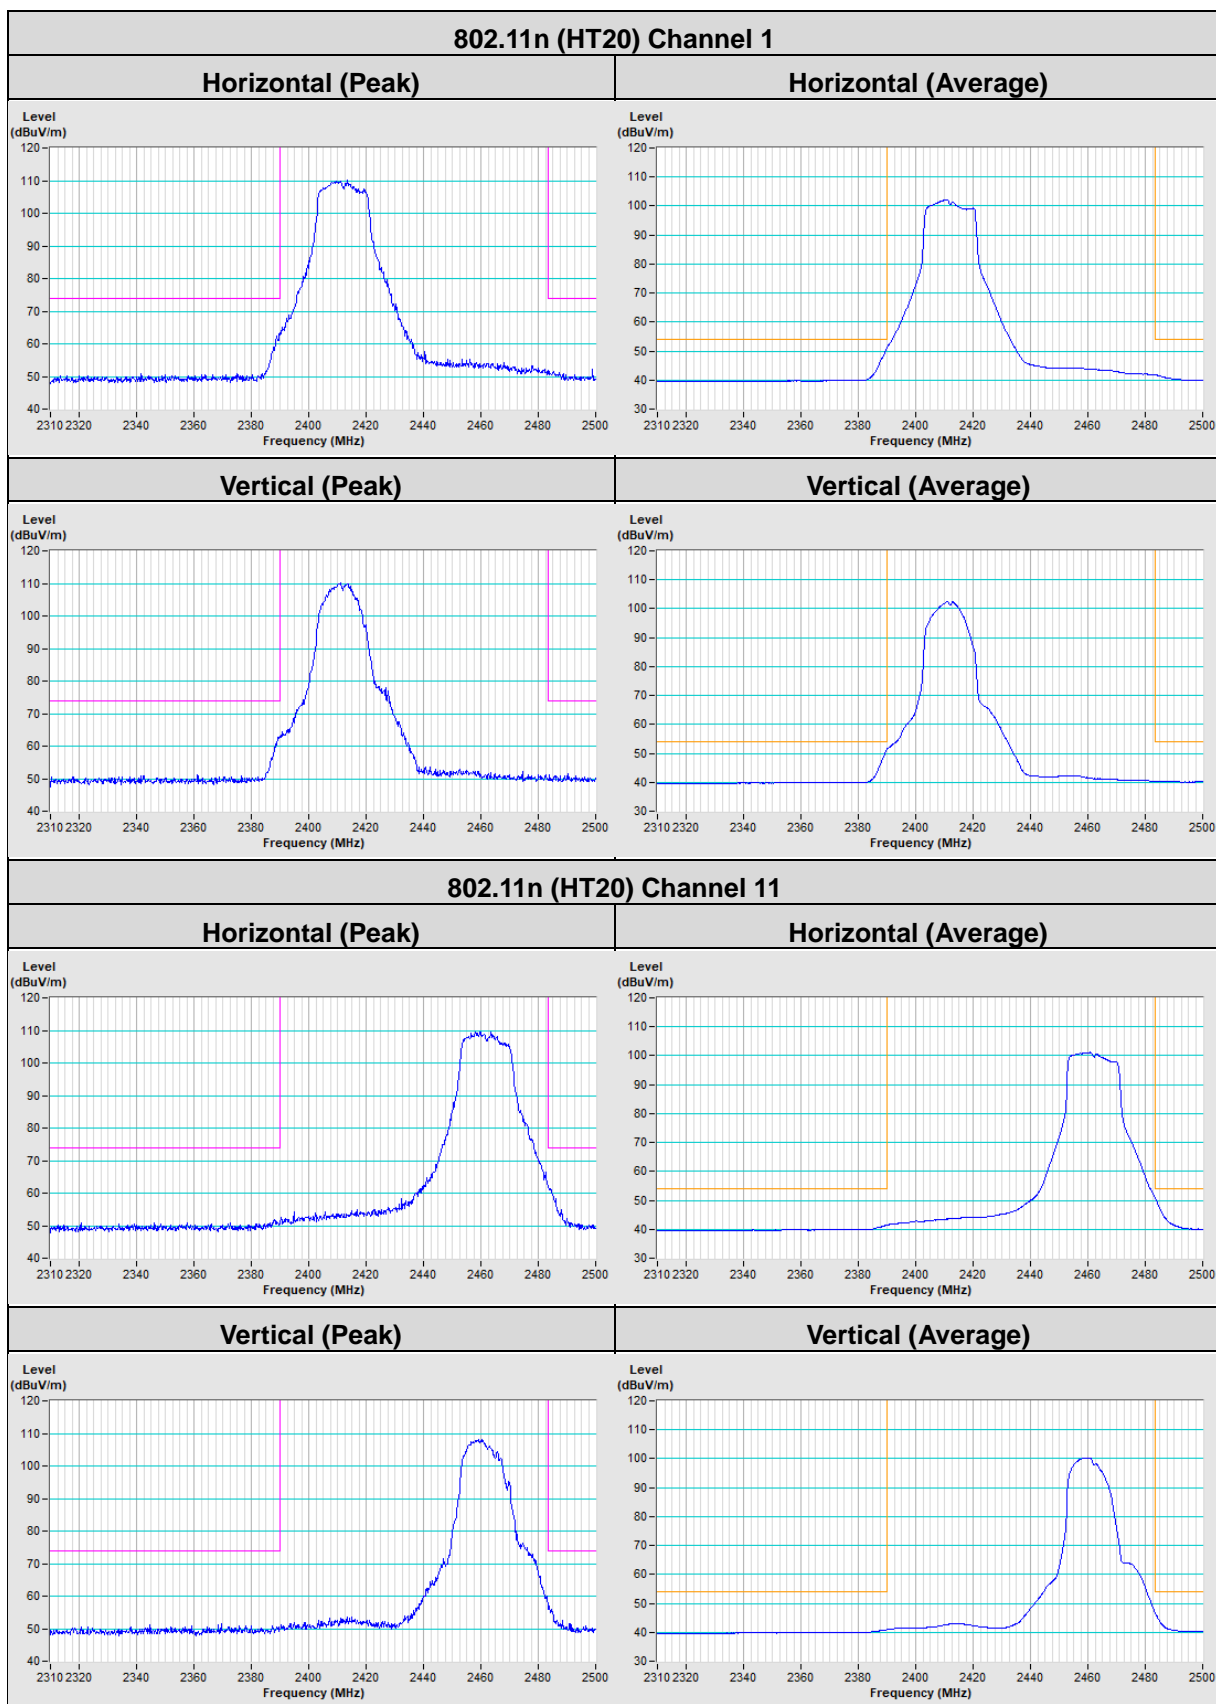

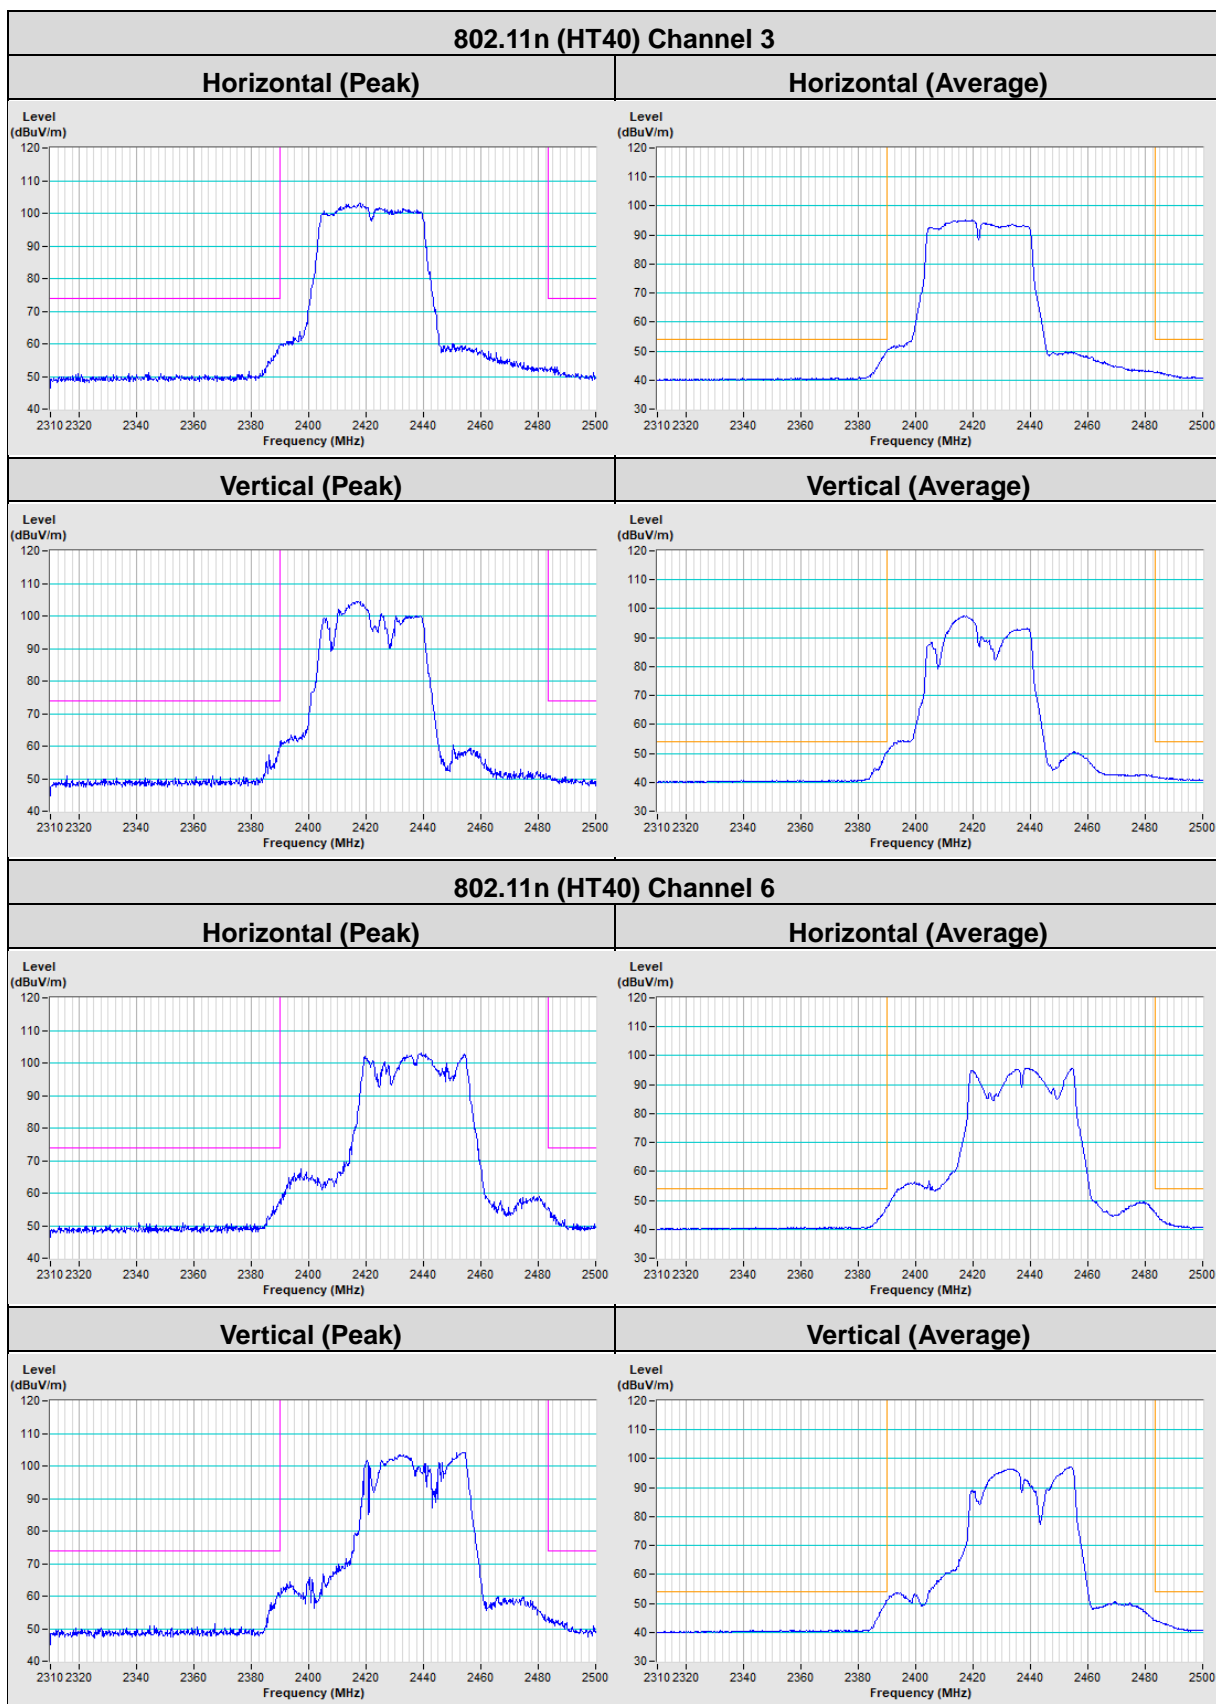

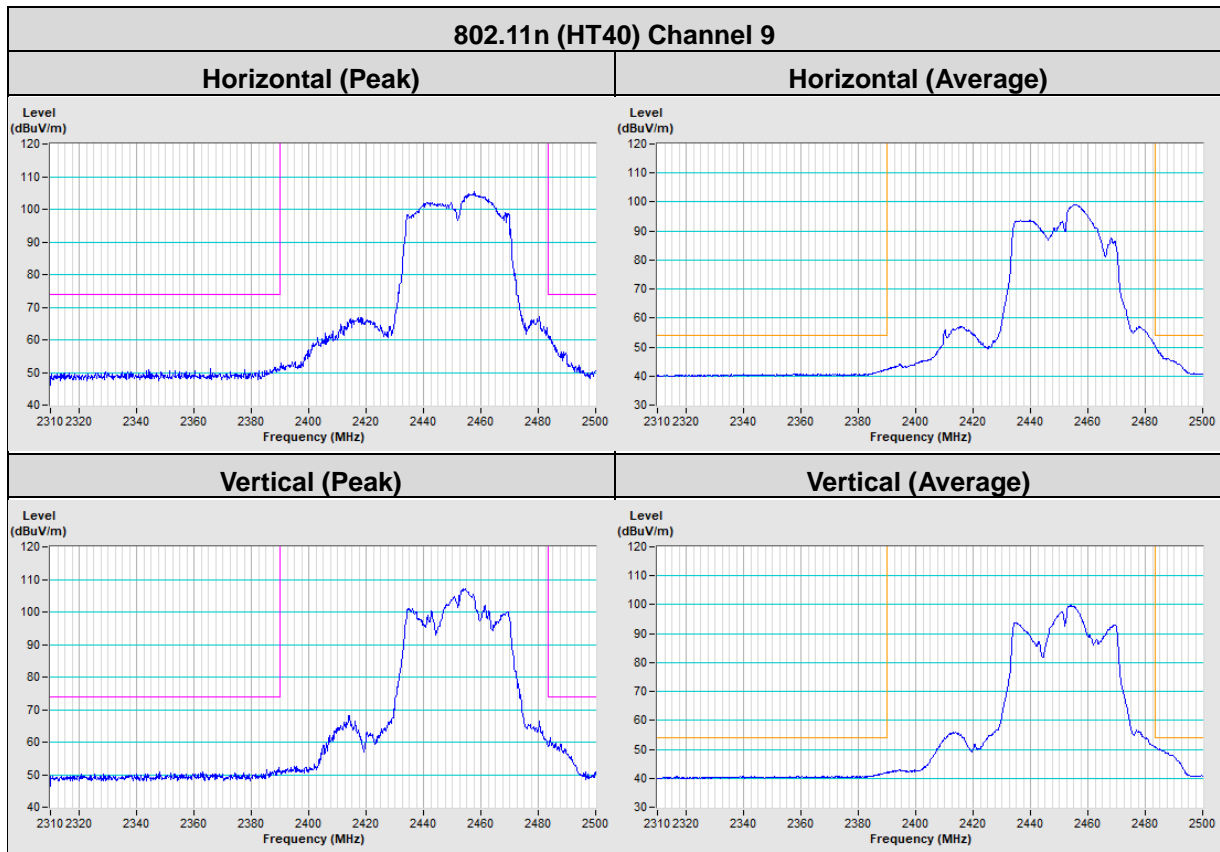

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---