

FCC ID TEST REPORT

for

MK5

Model: 501

FCC ID: 2AA52MK5

Prepared for : Lab42 LLC
340 S LEMON AVE #3231
WALNUT, CA 91789
UNITED STATES

Prepared by: Shenzhen TCT Testing Technology Co.,Ltd
1F, Building 1, Yibaolai Industrial Park, Qiaotou Village, Fuyong Town,
Baoan District, Shenzhen, Guangdong, China

TEL: +86-0755-27673339
FAX: +86-0755-27673332

Report Number: TCT130821017F2-1
Date of Test: Aug.22~ Aug.30, 2013
Date of Issue: Aug.30, 2013

The results detailed in this test report relate only to the specific sample(s) tested. It is the Application's responsibility to ensure that all production units are manufactured with equivalent EMC characteristics. This report is not to be reproduced except in full, without written approval from TCT Testing Technology

Table of Contents

1.0	General Details	4
1.1	Test Lab Details.....	4
1.2	Applicant Details.....	4
1.3	Description of EUT	4
1.4	Submitted Sample.....	4
1.5	Test Engineer.....	4
2.0	Test equipments and Associated Equipment used during the test	5
3.0	Technical Details	6
3.1	Summary of Test Results.....	6
3.2	Test Standards.....	6
4.0	EUT Modification	6
5.0	Measurement Uncertainty	6
6.0	Power Line Conducted Emission Test	7
7.0	Maximum Peak Output Power	11
8.0	6 dB Bandwidth Measurement	18
9.0	Power Spectral Density	25
10.0	Band age Measurement	33
11.0	Spurious Emission Test	42
12.0	Antenna Requirement	73
13.0	FCC ID Label	74

1.0 General Details

1.1 Test Lab Details

Name :	Shenzhen Tongce Testing Lab
Address:	1F, Leinuo Watch Building, Fuyong Town, Baoan Dist, Shenzhen, China
Telephone:	13410377511
Fax:	--

The test facility is recognized, certified, or accredited by the following organizations:

FCC Registration Number: 572331

Shenzhen TCT Testing Technology Co., Ltd., Shenzhen EMC Laboratory: Shenzhen Tongce Testing Lab
 The 3m Semi-anechoic chamber has been registered and fully described in a report with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files.
 Registration Number: 572331

Industry Canada (IC)

The 3m Semi-anechoic chamber of Shenzhen TCT Testing Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing
 Registration Number IC: 10668A-1

1.2 Applicant Details

Applicant:	Lab42 LLC
Address:	340 S LEMON AVE #3231 WALNUT, CA 91789 UNITED STATES
Telephone:	(415) 797-7770
Fax:	(415) 797-7770

Manufacturer:	Lab42 LLC
Address:	340 S LEMON AVE #3231 WALNUT, CA 91789 UNITED STATES
Telephone:	(415) 797-7770
Fax:	(415) 797-7770

1.3 Description of EUT

Product:	MK5
Model No.:	501
Additional Model No.:	N/A
Brand Name:	N/A
Operation Frequency:	IEEE 802.11b: 2412-2462 MHz IEEE 802.11g: 2412-2462 MHz IEEE 802.11n: 2412-2462 MHz(HT 20), 2422-2452 MHz(HT 40)
Channel number:	IEEE 802.11b/g: 11, IEEE 802.11n: 11(HT 20), 7(HT 40)
Channel spacing:	5 MHz
Modulation Type:	IEEE 802.11b: DSSS IEEE 802.11g: OFDM IEEE 802.11n: OFDM
Antenna Designation:	SMA antenna, and the maximum antenna gain is 0dBi.
Power supply:	DC 9V Via Adapter Adapter Information: Model:BX-0901500 Input: AC 100-240V, 50/60Hz Output: DC 9V, 1.5A

1.4 Submitted Sample: 1pcs

1.5 Test Engineer

The sample tested by



Printed name: Jack Kang

2.0 Test equipments and Associated Equipment used during the test.

2.1 Test Equipments

Instrument Type	Manufacturer	Model	Serial No.	Date of Cal.	Due Date
ESPI Test Receiver	ROHDE&SCHWARZ	ESPI 3	100379	July 7, 2013	July 6, 2014
Ultra Broadband ANT	ROHDE&SCHWARZ	HL562	100157	July 7, 2013	July 6, 2014
System Controller	CT	SC100	-	July 8, 2013	July 7, 2014
Spectrum Analyzer	ROHDE&SCHWARZ	FSEM	848597/001	July 8, 2013	July 7, 2014
Pre-amplifier	Teseq	LAN6900	--	July 8, 2013	July 7, 2014
Pre-amplifier	Agilent	8447D	83153007374	July 8, 2013	July 7, 2014
Pre-amplifier	Agilent	8449B	3008A01738	July 8, 2013	July 7, 2014
Triple-loop antenna	ROHDE&SCHWARZ	HM020	843885/002	July 8, 2013	July 7, 2014
Horn Antenna	ETS LINDGREN	3117	--	July 8, 2013	July 7, 2014
Horn Antenna	ETS LINDGREN	3160	--	July 8, 2013	July 7, 2014
EMI Test Receiver	R&S	ESCS30	100139	July 7, 2013	July 6, 2014
LISN	AFJ	LS16C	16010222119	July 7, 2013	July 6, 2014

2.2 AE used during the test

Equipment type	Manufacturer	Model
Notebook	acer	ZQT

3.0 Technical Details

3.1 Summary of test results

The EUT has been tested according to the following specifications:			
Test Item	CFR 47 Section	Result	Notes
AC Power Line Conducted Emission	15.207(a)	PASS	Complies
Maximum Peak Output Power	15.247(b)(3)	PASS	Complies
6 dB bandwidth	15.247 (a)(2)	PASS	Complies
Maximum Power Density	15.247(e)	PASS	Complies
Band age Measurement	15.247 (d), 15.205 (a), 15.209 (a)	PASS	Complies
Radiated Emission	15.209	PASS	Complies
Antenna Requirement	15.203,15.247(c)	PASS	Complies
RF Exposure	15.247(b), 1.1307(b)	PASS	Complies

3.2 Test Standards

FCC Part 15:2012 Subpart C, Paragraph 15.247

4.0 EUT Modification

No modification by Shenzhen TCT Testing Technology Co., Ltd.

5.0 Measurement Uncertainty (95% confidence levels, k=2)

No.	Item	MU
1.	Radio Frequency	$\pm 1 \times 10^{-9}$
2.	Temperature	$\pm 0.1^{\circ}\text{C}$
3.	Humidity	$\pm 1.0\%$
4.	RF power, conducted	$\pm 0.34\text{dB}$
5.	RF power density, conducted	$\pm 1.45\text{dB}$
6.	Spurious emissions, conducted	$\pm 3.70\text{dB}$
7.	All emissions, radiated	$\pm 4.50\text{dB}$


Note: 1) For IEEE 802.11b/g/n (HT 20): Low channel: 2412MHz, Middle channel: 2437MHz,
High channel: 2462MHz

For IEEE 802.11n (HT 40): Low channel: 2422MHz, Middle channel: 2437MHz,
High channel: 2452MHz

2) The device is powered by an adapter. The EUT can operate in Wireless Router mode and Wireless Network Card mode. This Test Report is mainly about the Wireless Router, while the Wireless Network Card RF Test Report No. is **TCT130821017F2-2**.

6.0 Power Line Conducted Emission Test

6.1 Schematics of the test

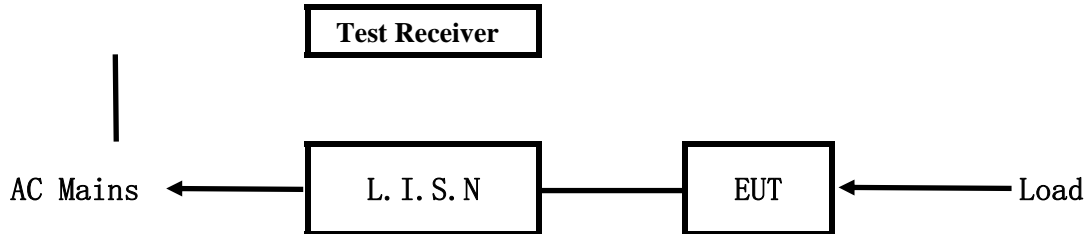


EUT: Equipment Under Test

6.2 Test Method and test Procedure

The EUT was tested according to ANSI C63.10-2009. The Frequency spectrum From 0.15MHz to 30MHz was investigated.

Test Voltage: 120V~, 60Hz

Block diagram of Test setup

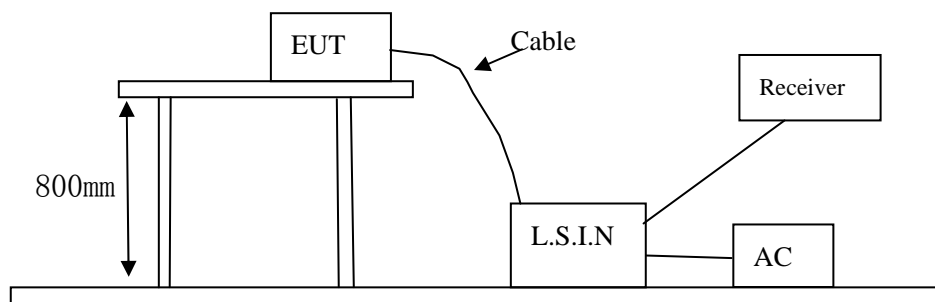

6.3 EUT Operating Condition

Operating condition is according to ANSI C63.10 -2009

- A Setup the EUT and simulators as shown on the following
- B Enable AF signal and confirm EUT active to normal condition

6.4 Test Equipment

Please refer to the Section 2

6.5 Conducted Emission Limit

Frequency(MHz)	Class A Limits (dB μ V)		Class B Limits (dB μ V)	
	Quasi-peak Level	Average Level	Quasi-peak Level	Average Level
0.15 ~ 0.50	79.0	66.0	66.0~56.0*	56.0~46.0*
0.50 ~ 5.00	73.0	60.0	56.0	46.0
5.00 ~ 30.00	73.0	60.0	60.0	50.0

Notes: 1. *Decreasing linearly with logarithm of frequency.
2. The tighter limit shall apply at the transition frequencies

6.6 Photo documentation of the test set-up

Please refer to the Section 17

6.7 Test specification:

Environmental conditions: Temperature: 23° C Humidity: 51% Atmospheric pressure: 103kPa

Frequency range: 0.15 MHz – 30 MHz

The test was carried out in the following operation mode(s):

- Wireless Router mode

6.8 Test result

Min. limit margin >10 dB from 0.15MHz to 30MHz


The requirements are FULFILLED

Remarks: According to FCC part 15.207.

A Conducted Emission on Line Terminal of the power line (150kHz to 30MHz)

EUT Description: MK5
 Operation Mode: Wireless Router mode
 Tested By: Beryl Zhao
 Test date: Aug. 29, 2013

Start Frequency Stop Frequency Step IF BW Detector Final M-Time
 0.15MHz 30MHz 4.5KHz 10KHz QP+AV 1s

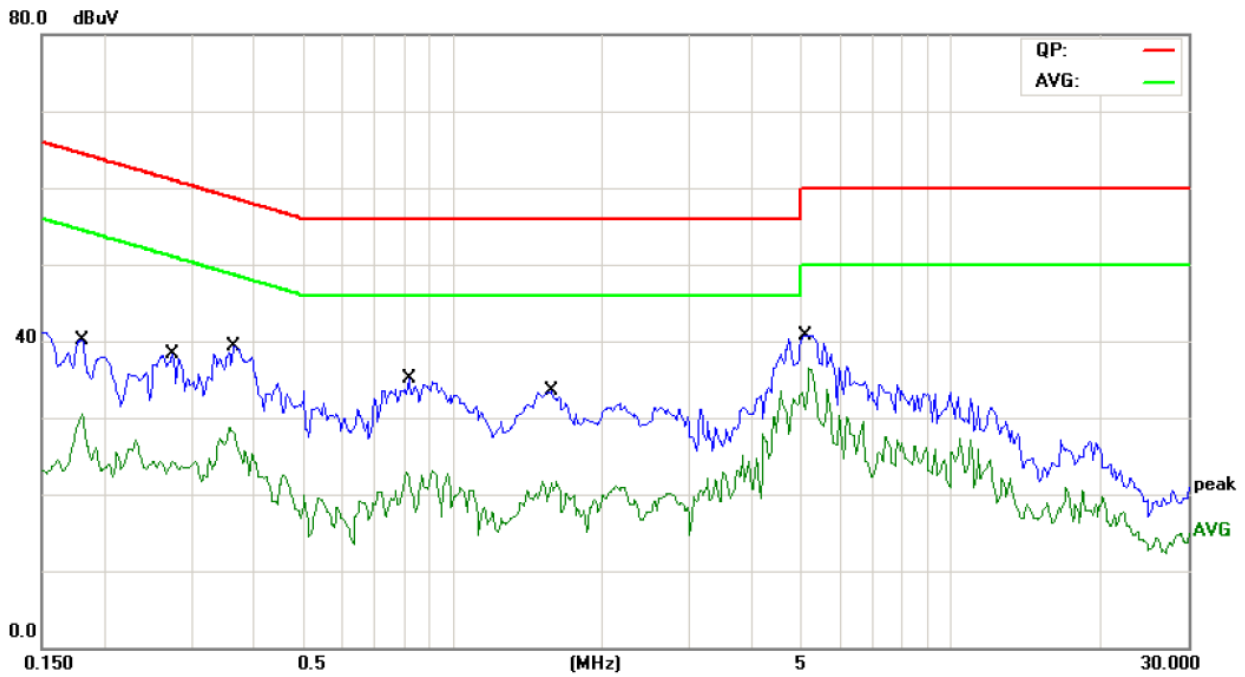


Frequency (MHz)	Reading(dB µ V)				Limit (dB µ V)	
	Live		Neutral		Quasi-peak	Average
	Quasi-peak	Average	Quasi-peak	Average		
0.1812	38.16	34.90	--	--	64.43	54.43
0.2750	36.26	30.70	--	--	60.96	50.96
0.3648	37.33	32.36	--	--	58.62	48.62
0.8179	33.04	31.06	--	--	56.00	46.00
1.5835	32.49	25.95	--	--	56.00	46.00
5.1171	37.79	31.26	--	--	60.00	50.00

B Conducted Emission on Neutral Terminal of the power line (150kHz to 30MHz)

EUT Description: MK5
 Operation Mode: Wireless Router mode
 Tested By: Beryl Zhao
 Test Date: Aug. 29, 2013


Start Frequency 0.15MHz Stop Frequency 30MHz Step 4.5KHz IF BW 10KHz Detector QP+AV Final M-Time 1s

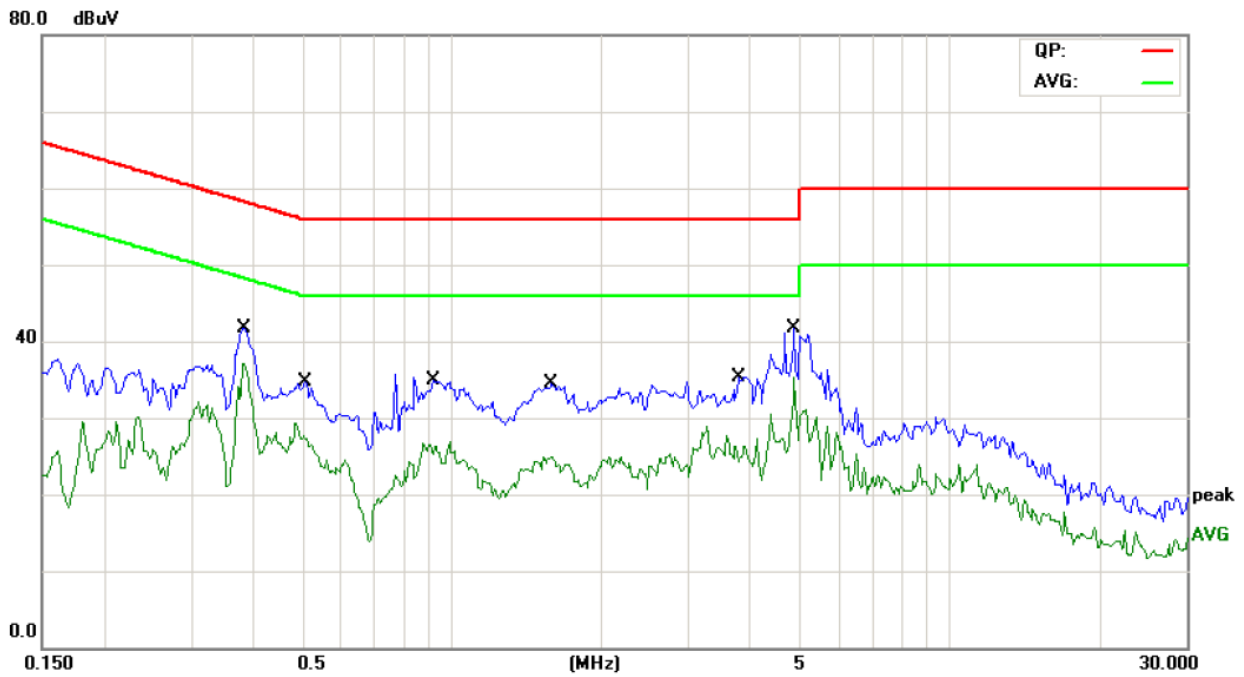

Frequency (MHz)	Reading(dB µ V)				Limit	
	Live		Neutral		(dB µ V)	
	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
0.3843	--	--	41.75	28.52	58.18	48.18
0.5093	--	--	34.65	30.77	56.00	46.00
0.9195	--	--	34.83	28.11	56.00	46.00
1.5914	--	--	33.43	30.26	56.00	46.00
3.7773	--	--	35.38	30.19	56.00	46.00
4.8867	--	--	40.70	33.09	56.00	46.00

7.0 Maximum Peak Output Power

7.1 Test Setup



7.2 Limits of Maximum Peak Output Power

The Maximum Peak Output Power Measurement is 30dBm.

7.3 Test Procedure


According to KDB 558074, the transmitter output was connected to the spectrum analyzer through an attenuator. The spectrum analyzer is setting as follows: RBW=1 MHz, VBW=3 MHz, Span=encompass the DTS bandwidth, Detector=peak, Sweep time=auto couple, Trace mode= max hold. Allow trace to fully stabilize. Use the spectrum analyzer's band/channel power measurement function with the band limits set equal to the DTS bandwidth edges.

7.4 Test Result


IEEE 802.11b mode			
Test channel	Peak output power (dBm)	Limit (dBm)	Result
Lowest	17.63	30	Pass
Middle	19.87	30	Pass
Highest	19.93	30	Pass
IEEE 802.11g mode			
Test channel	Peak output power (dBm)	Limit (dBm)	Result
Lowest	22.64	30	Pass
Middle	23.12	30	Pass
Highest	23.90	30	Pass
IEEE 802.11n (HT 20) mode			
Test channel	Peak output power (dBm)	Limit (dBm)	Result
Lowest	22.64	30	Pass
Middle	24.57	30	Pass
Highest	24.76	30	Pass
IEEE 802.11n(HT 40) mode			
Test channel	Peak output power (dBm)	Limit (dBm)	Result
Lowest	22.23	30	Pass
Middle	23.02	30	Pass
Highest	22.77	30	Pass

Test Mode: IEEE 802.11b mode


Low Channel

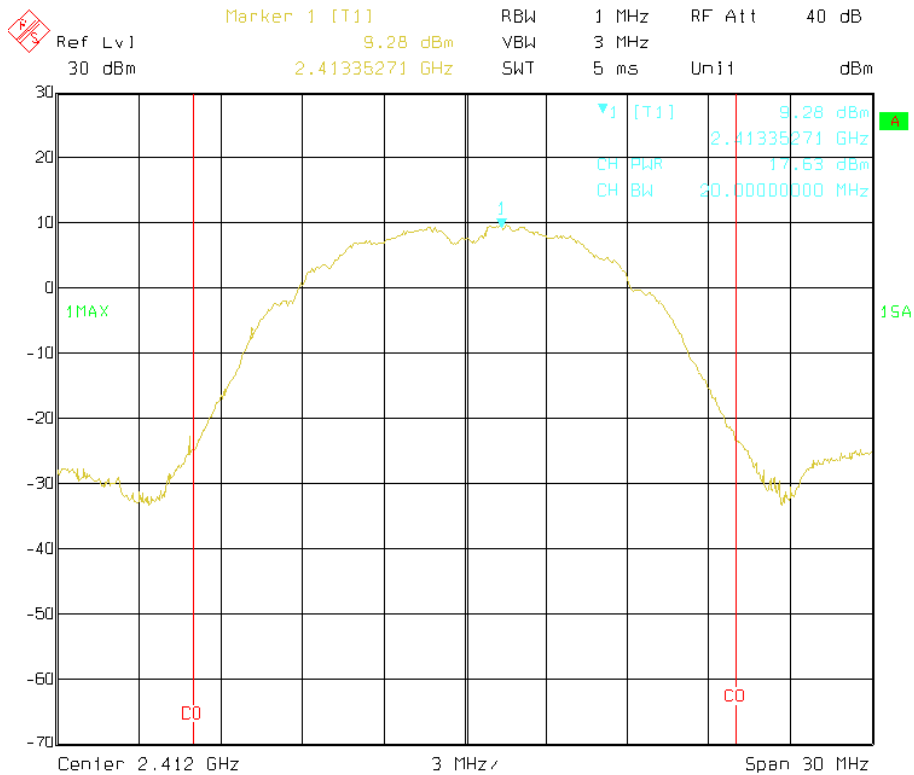

Middle channel

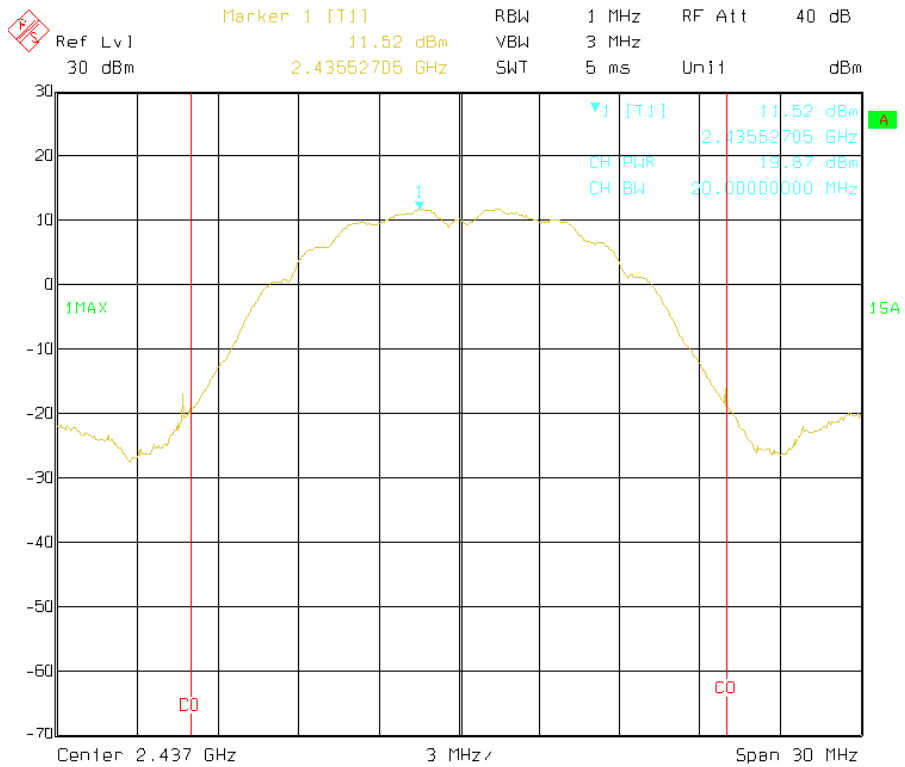


High channel

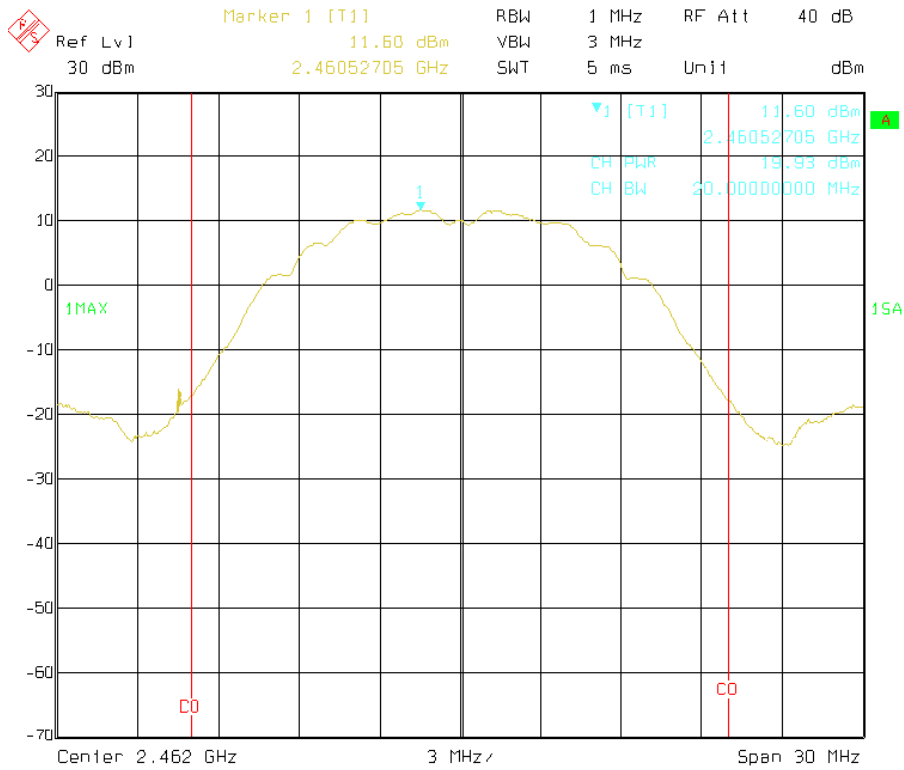


Test Mode: IEEE 802.11g mode


Low channel

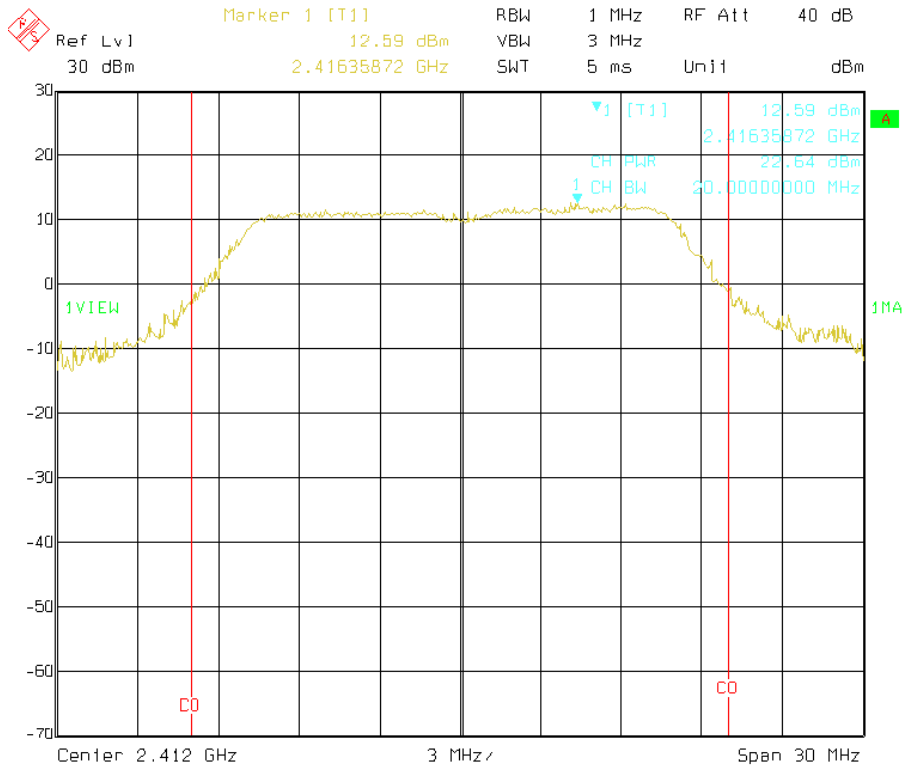

Middle channel

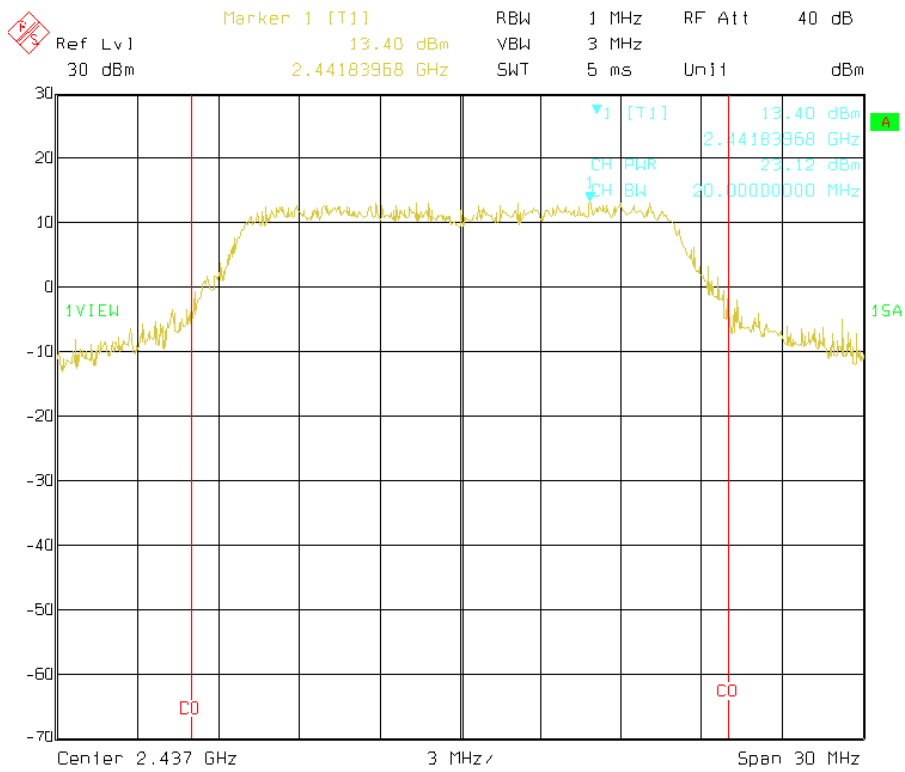


High channel

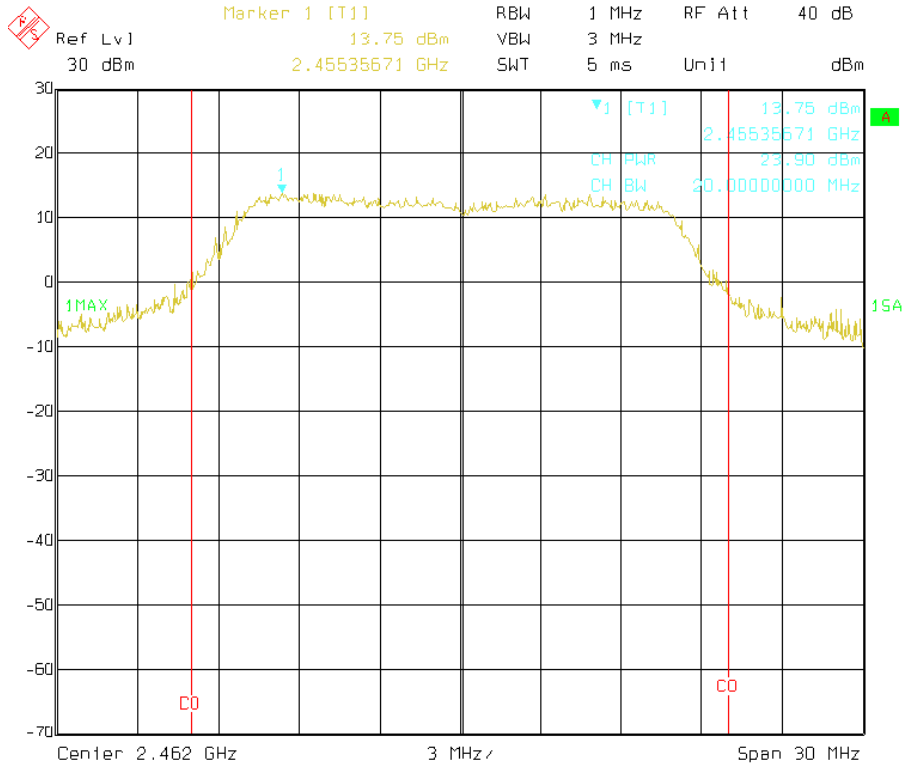


Test Mode: IEEE 802.11n (HT 20) mode


Low Channel

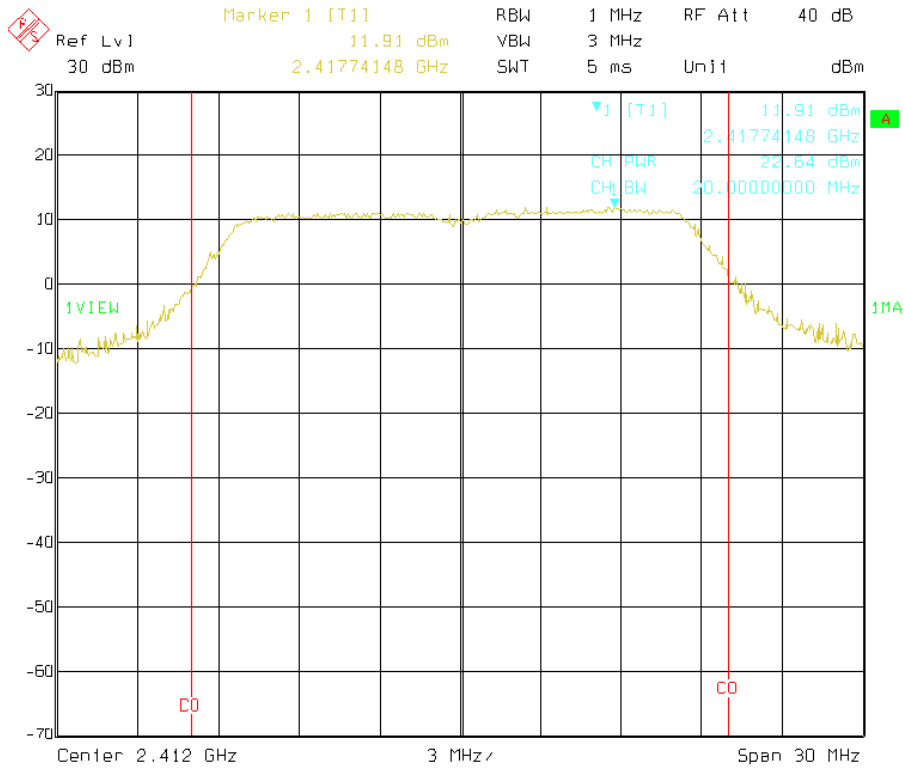

Middle channel

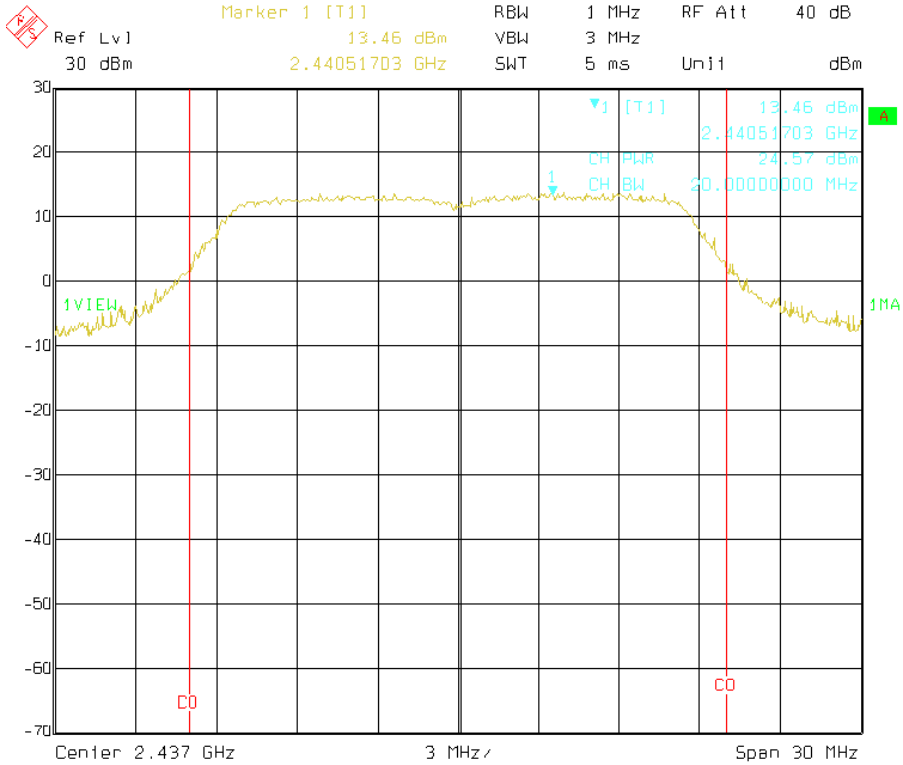


High channel

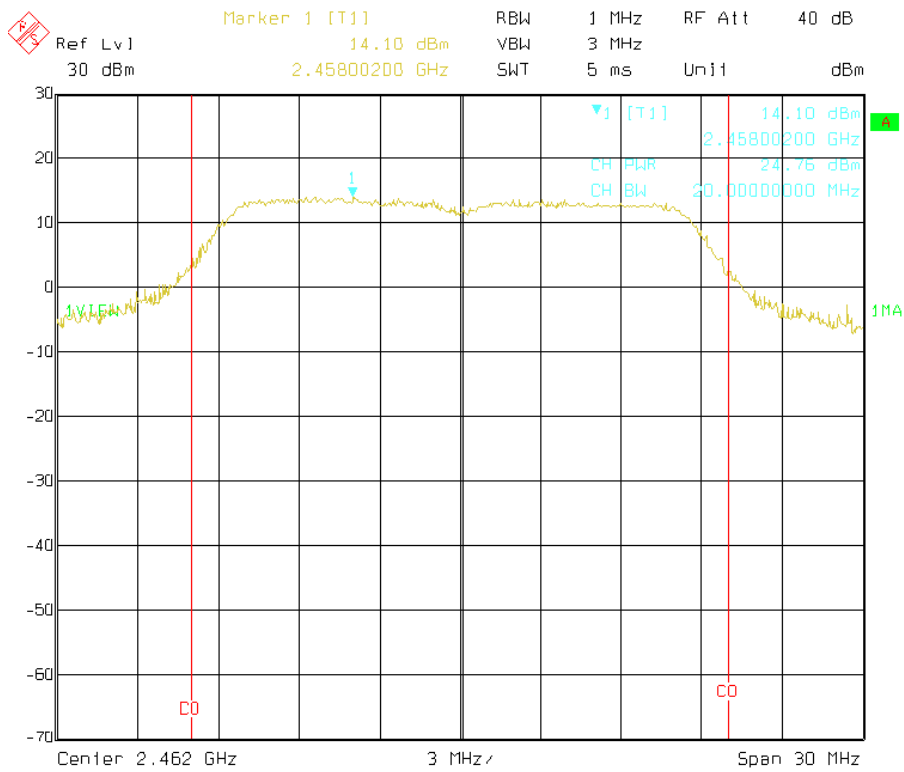


Test Mode: IEEE 802.11n (HT 40) mode


Low channel

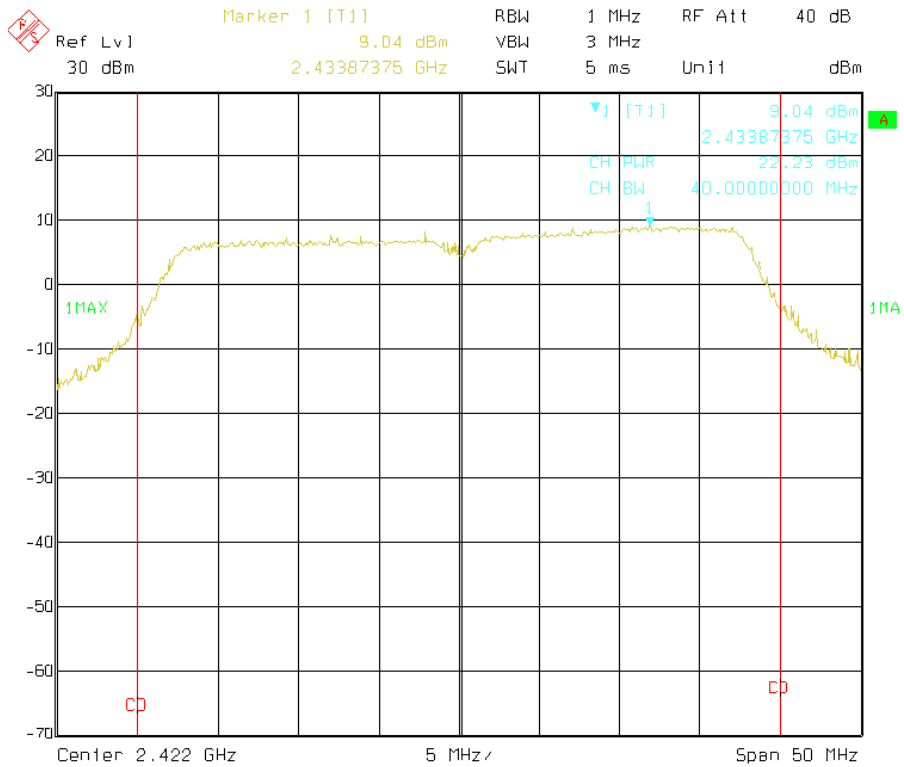

Middle channel

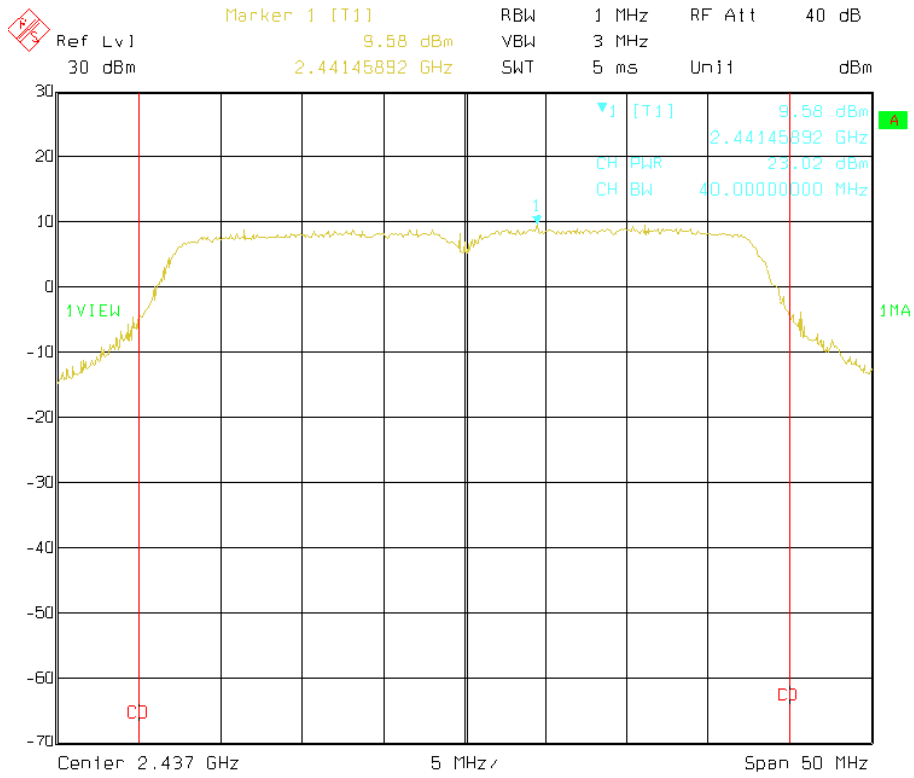


High channel

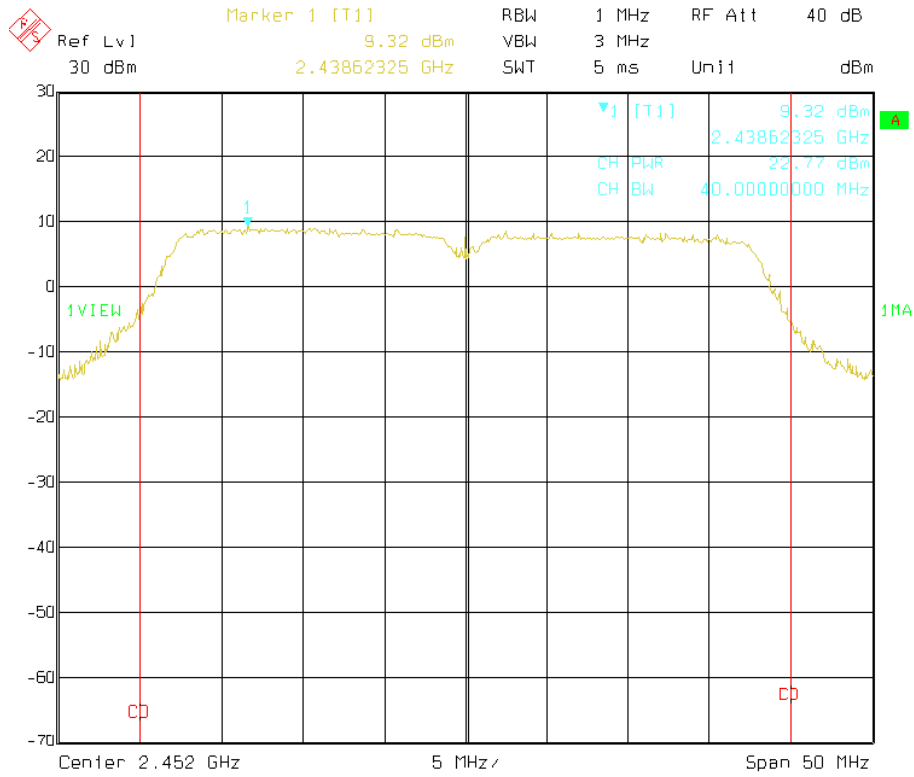

8.0 6dB Bandwidth Measurement

8.1 Test Setup



8.2 Limits of 6dB Bandwidth Measurement

The minimum of 6 dB Bandwidth is >500 kHz

8.3 Test Procedure

According to KDB 558074, the transmitter output was connected to the spectrum analyzer through an attenuator. The spectrum analyzer is setting as follows: RBW=100 kHz, VBW=300 kHz, Detector=Peak, Trace mode=max hold, Sweep=auto couple. The 6dB bandwidth is defined as the two outermost amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.


8.4 Test Result

IEEE 802.11b mode			
Test channel	6 dB occupied bandwidth (MHz)	Limit (kHz)	Result
Lowest	9.68	500	Pass
Middle	10.04	500	Pass
Highest	10.04	500	Pass
IEEE 802.11g mode			
Test channel	6 dB occupied bandwidth (MHz)	Limit (kHz)	Result
Lowest	16.41	500	Pass
Middle	16.41	500	Pass
Highest	16.41	500	Pass
IEEE 802.11n(HT 20) mode			
Test channel	6 dB occupied bandwidth (MHz)	Limit (kHz)	Result
Lowest	17.88	500	Pass
Middle	17.88	500	Pass
Highest	17.88	500	Pass
IEEE 802.11n(HT 40) mode			
Test channel	6 dB occupied bandwidth (MHz)	Limit (kHz)	Result
Lowest	36.67	500	Pass
Middle	36.67	500	Pass
Highest	36.67	500	Pass


Test plots:

Test Mode: IEEE 802.11b mode


Low channel

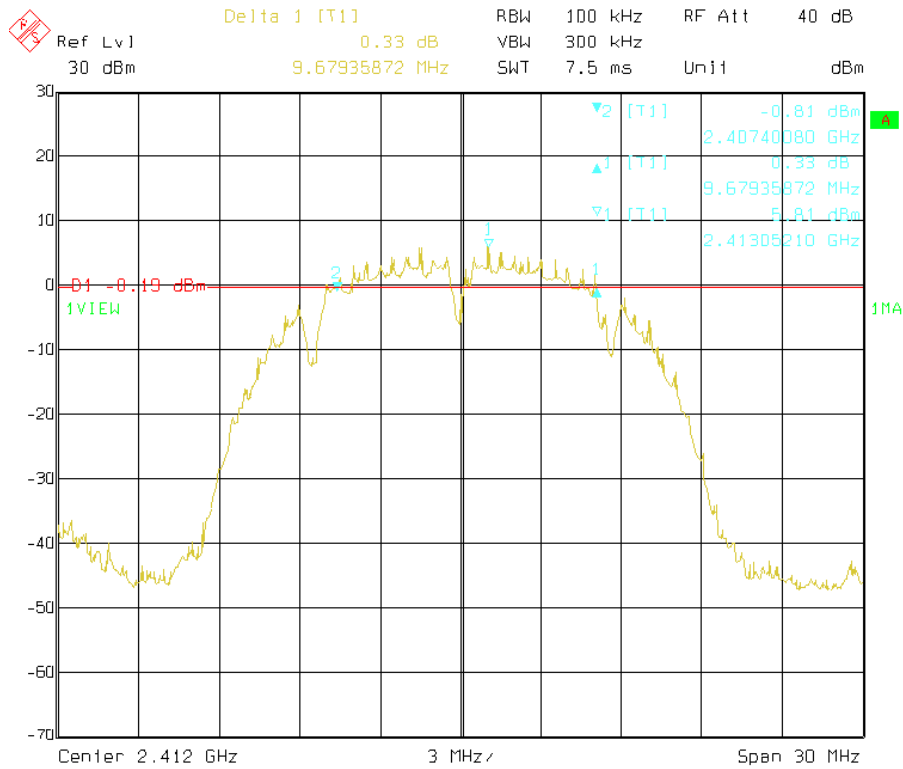

Middle channel

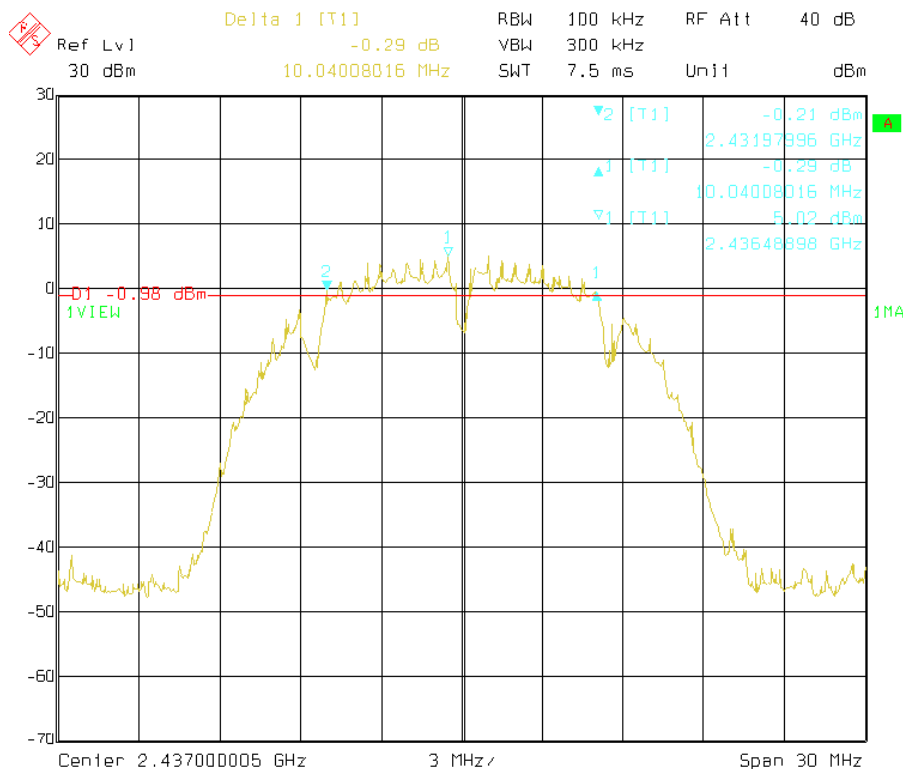


High channel

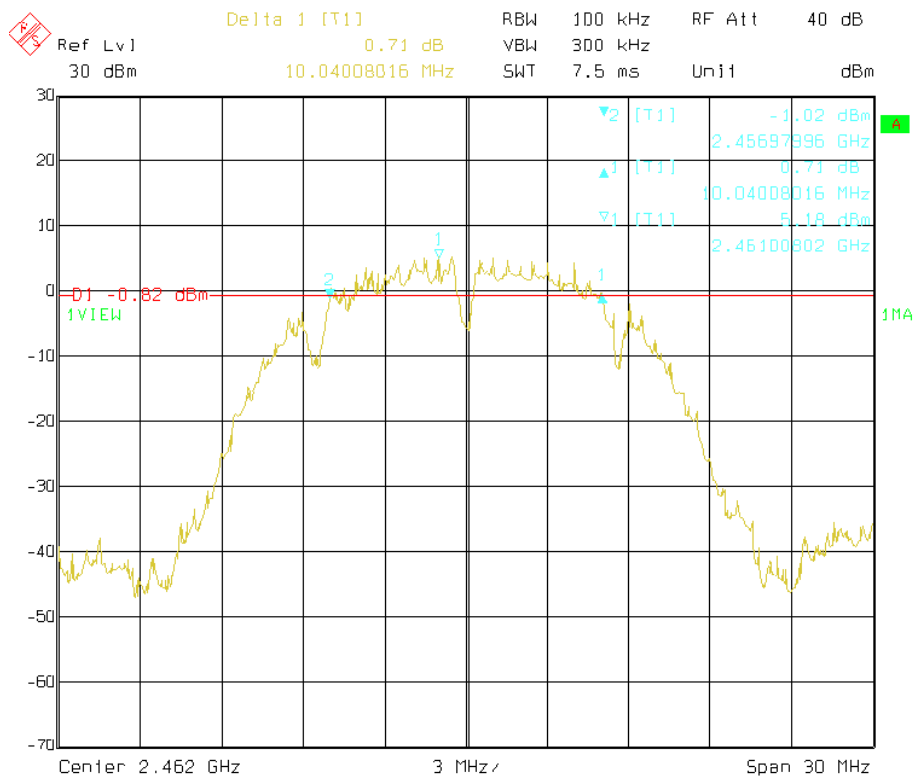


Test Mode: IEEE 802.11g mode


Low channel

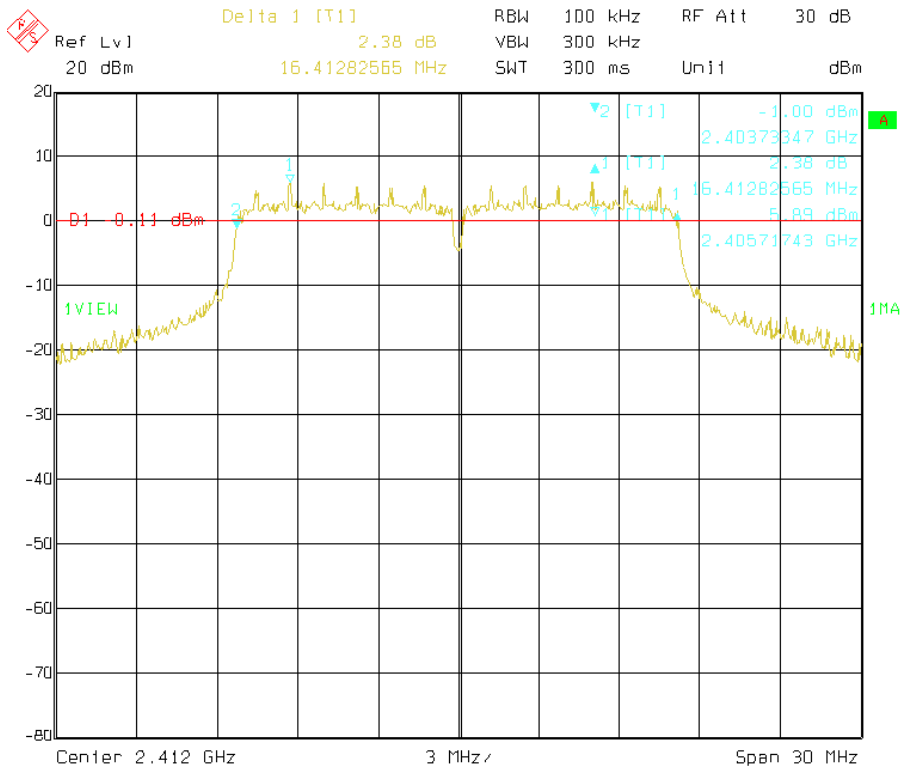

Middle channel

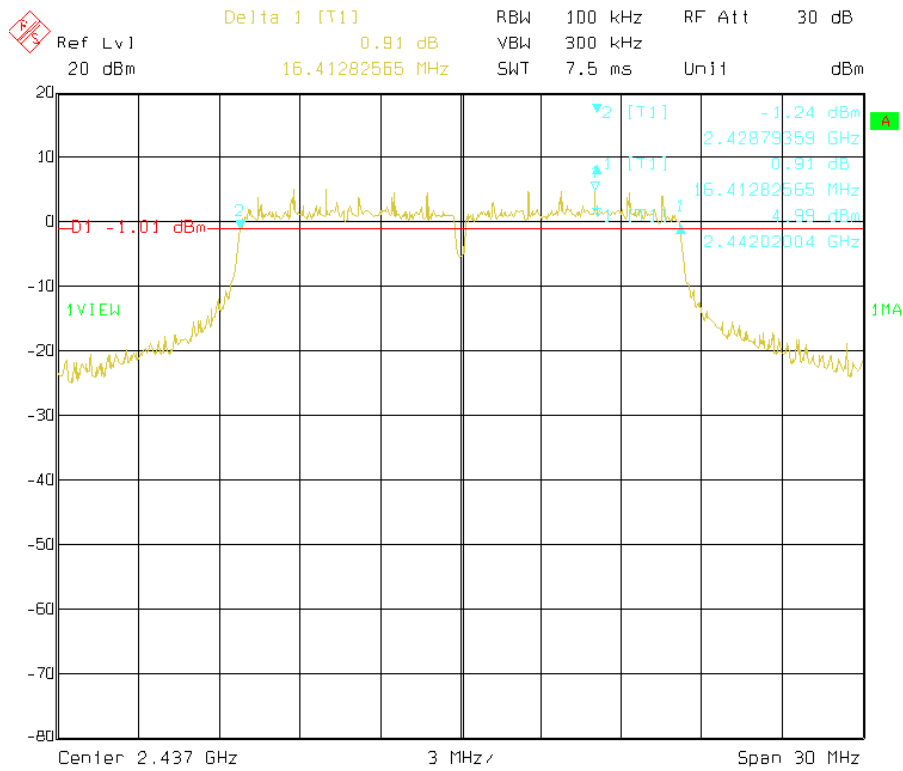


High channel

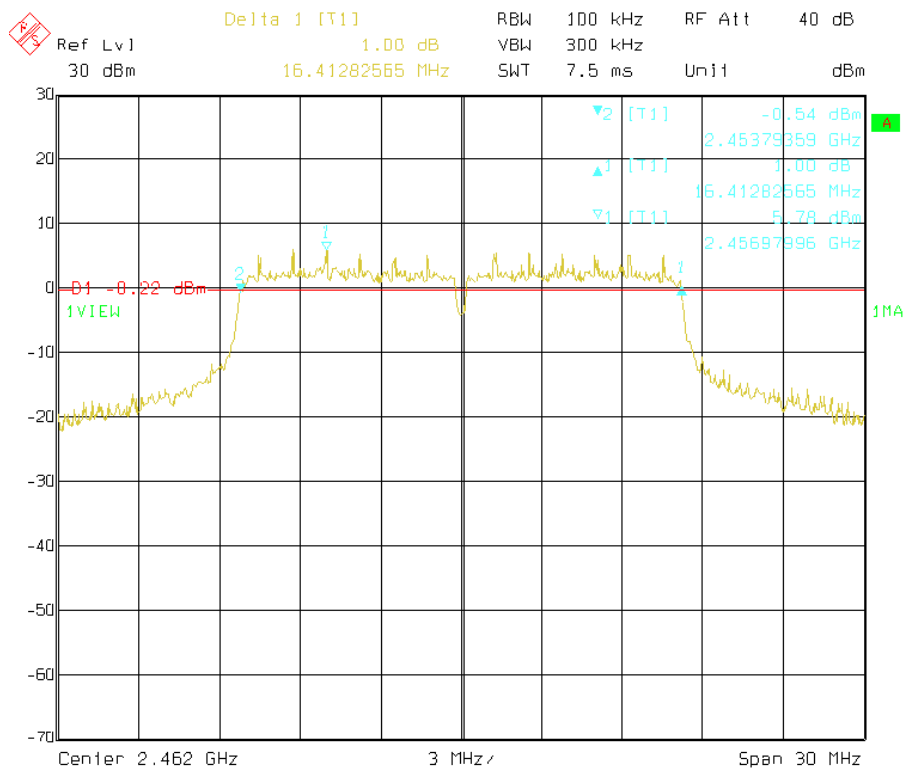


Test Mode: IEEE 802.11n (HT 20) mode


Low channel

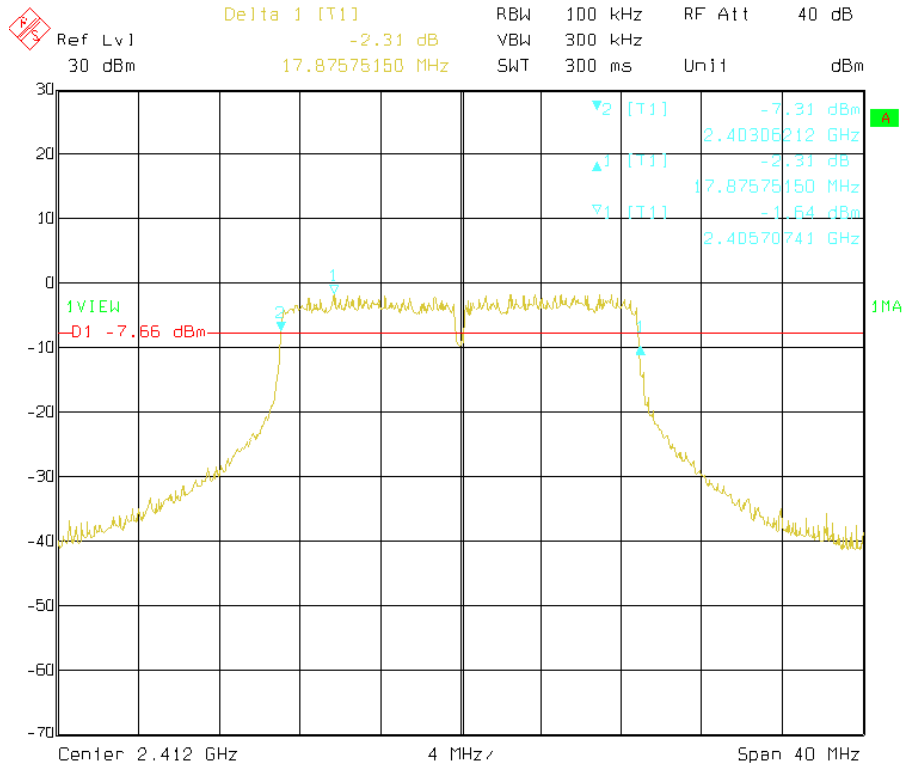

Middle channel

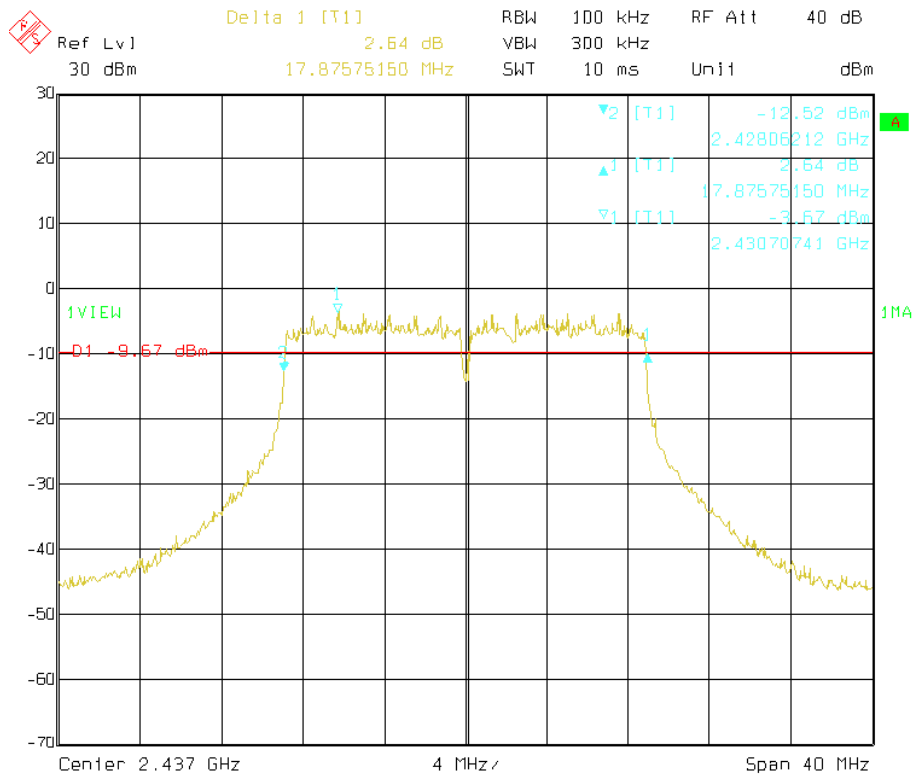


High channel

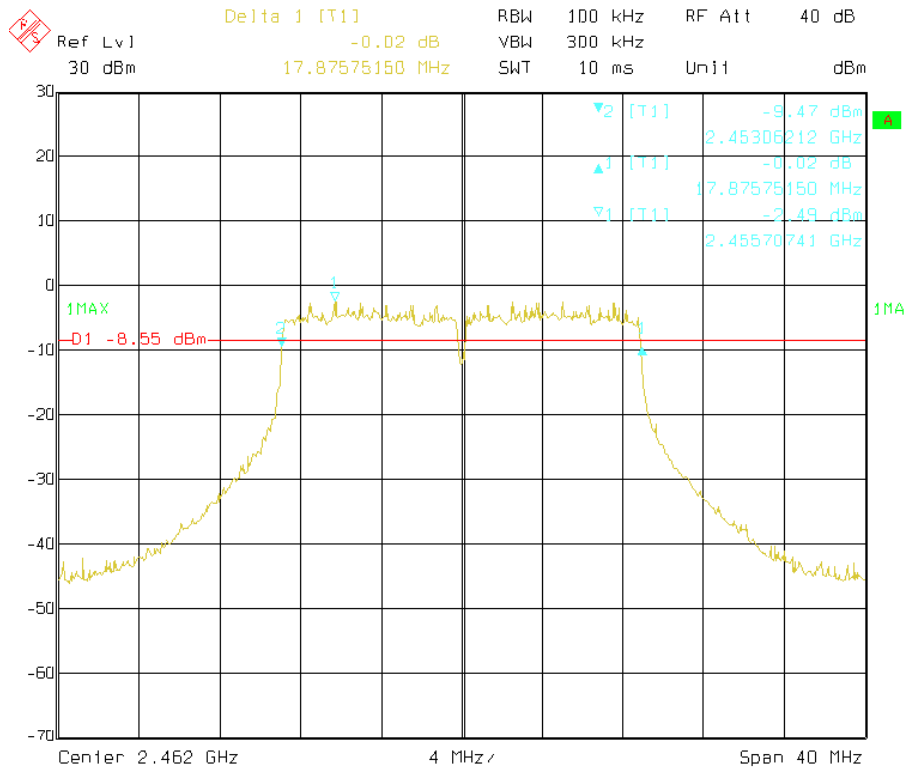


Test Mode: IEEE 802.11n(HT 40) mode


Low channel

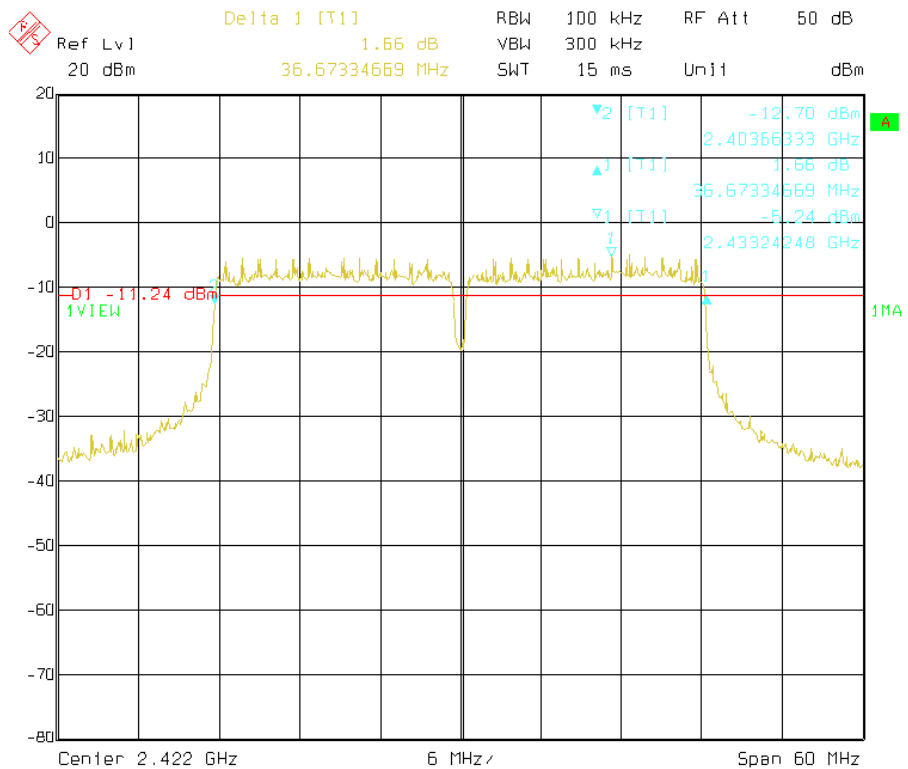

Middle channel

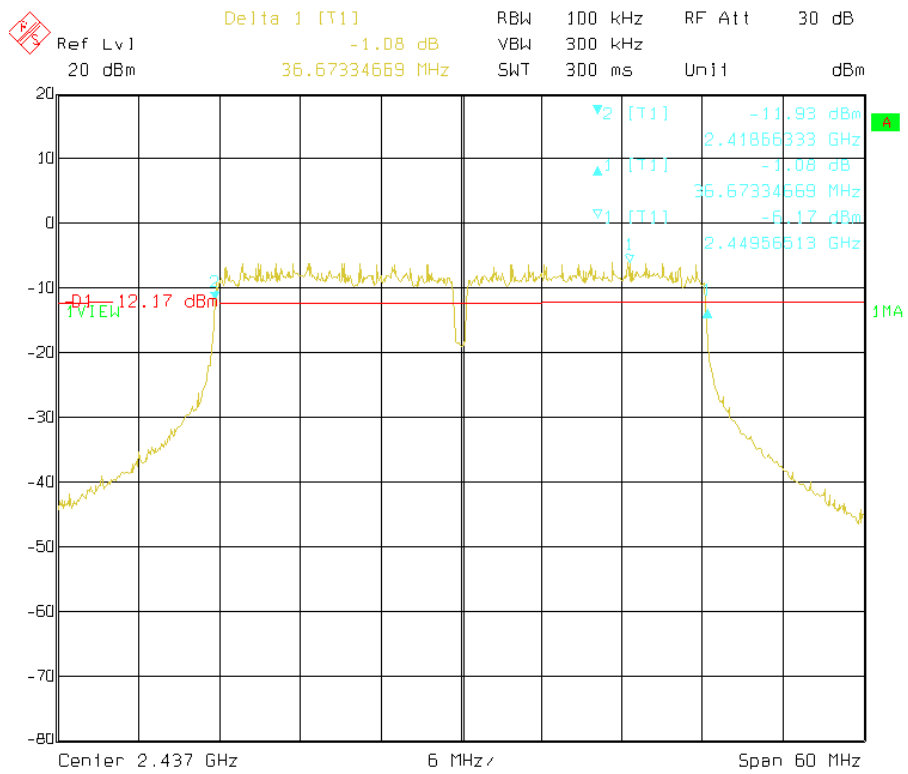


High channel

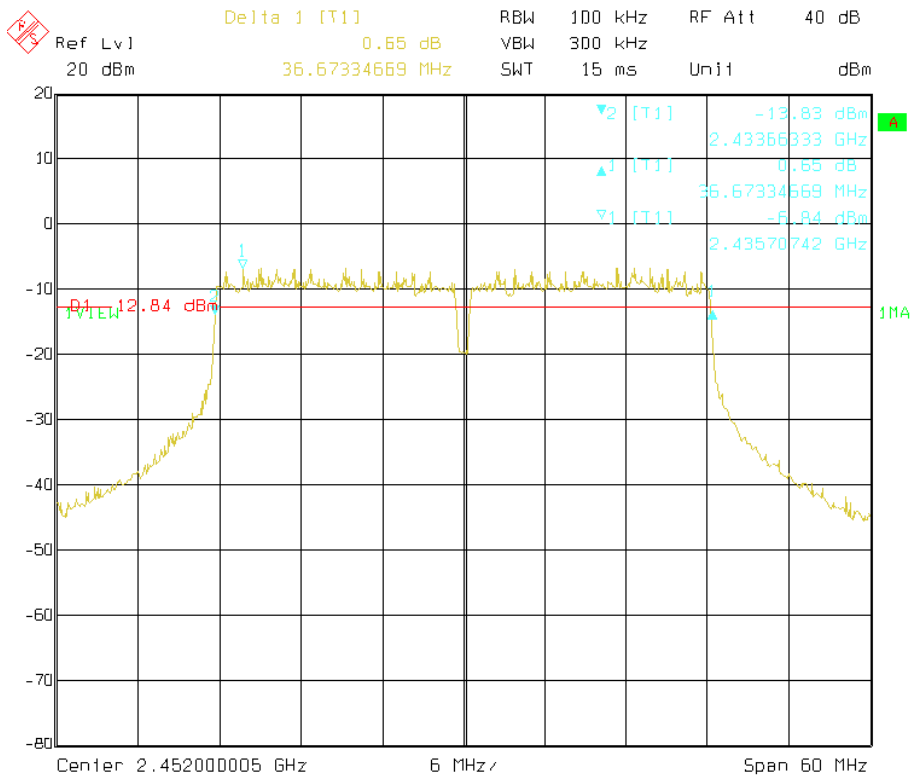

9.0 Power Spectral Density Measurement

9.1 Test Setup



9.2 Limits of Power Spectral Density Measurement

The Maximum Power Spectral Density is 8 dBm in any 3 kHz.

9.3 Test Procedure

According to KDB 558074, the transmitter output was connected to the spectrum analyzer through an attenuator.

The spectrum analyzer is setting as follows:

- 1) Set analyzer centre frequency to DTS channel centre frequency.
- 2) Set the span to 1.5 times the DTS channel bandwidth.
- 3) Set the RBW ≥ 3 kHz.
- 4) Set the VBW $\geq 3 * RBW$.
- 5) Detector=peak.
- 6) Sweep time=auto couple.
- 7) Trace mode=max hold.
- 8) Allow trace to fully stabilize.
- 9) Use the peak marker function to determine the maximum amplitude level.
- 10) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.


9.4 Test Result

IEEE 802.11b mode			
Test channel	Peak Power Spectral Density (dBm)	Limit (dBm)	Result
Lowest	-10.22	8	Pass
Middle	-10.54	8	Pass
Highest	-5.04	8	Pass
IEEE 802.11g mode			
Test channel	Peak Power Spectral Density (dBm)	Limit (dBm)	Result
Lowest	-9.92	8	Pass
Middle	-11.01	8	Pass
Highest	-10.35	8	Pass
IEEE 802.11n(HT 20) mode			
Test channel	Peak Power Spectral Density (dBm)	Limit (dBm)	Result
Lowest	-17.48	8	Pass
Middle	-19.11	8	Pass
Highest	-17.93	8	Pass
IEEE 802.11n(HT 40) mode			
Test channel	Peak Power Spectral Density (dBm)	Limit (dBm)	Result
Lowest	-21.13	8	Pass
Middle	-20.79	8	Pass
Highest	-22.24	8	Pass


Test plots:

Test Mode: IEEE 802.11b mode


Low channel

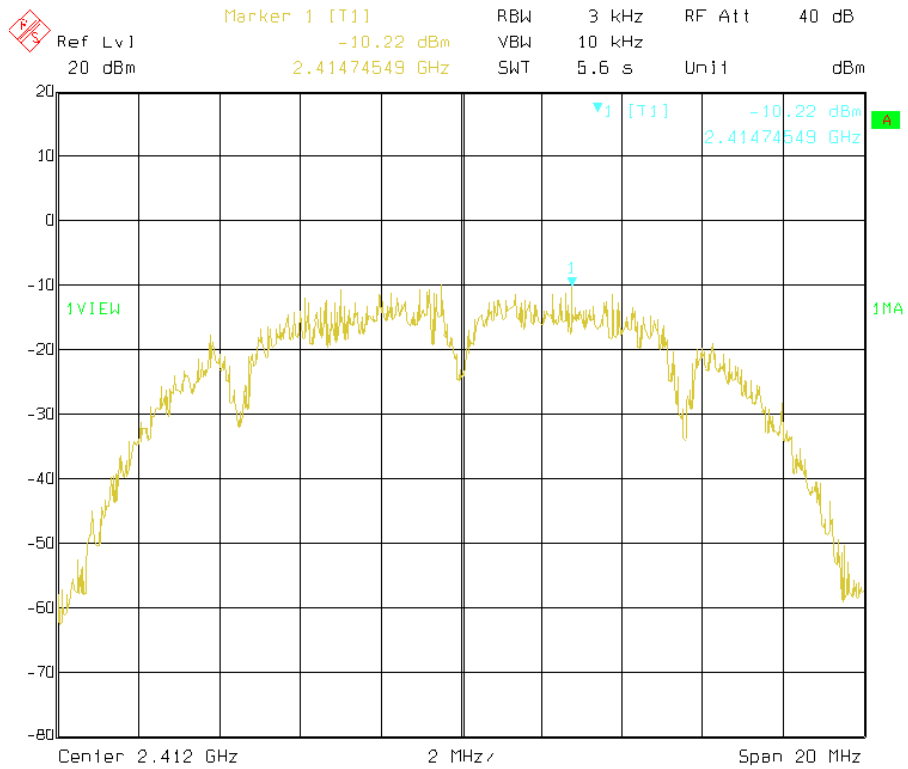

Middle channel

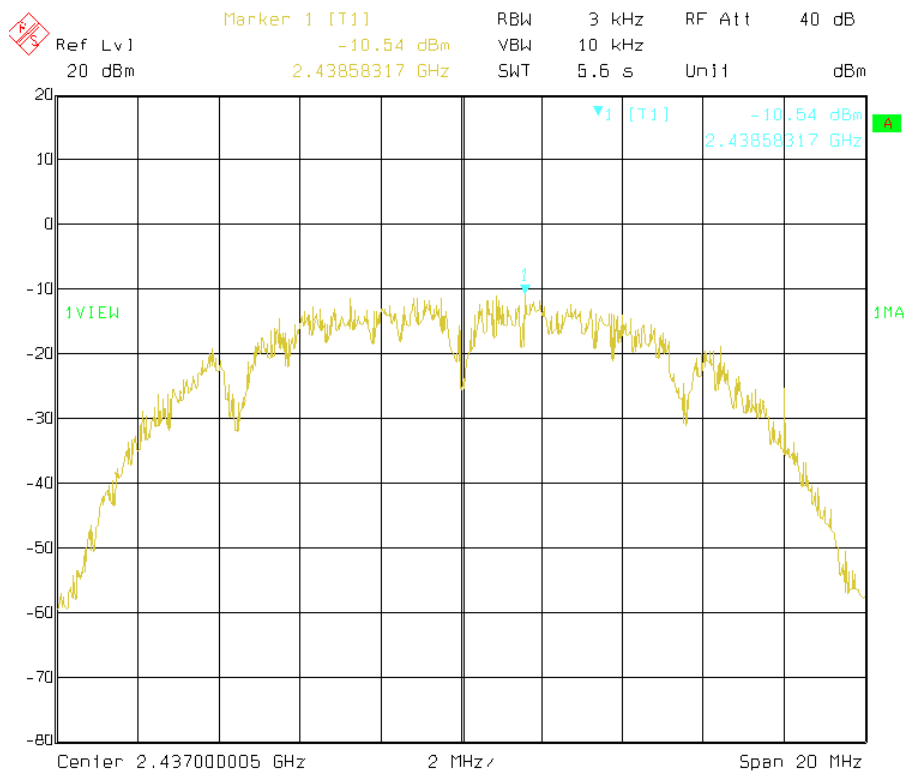


High channel

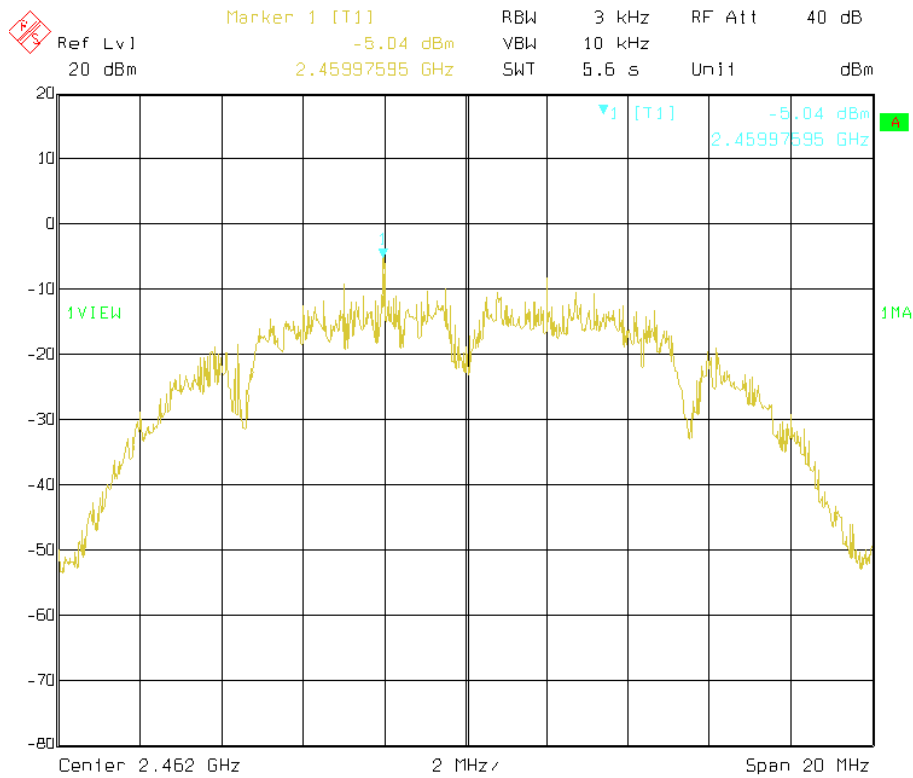


Test Mode: IEEE 802.11g mode


Low channel

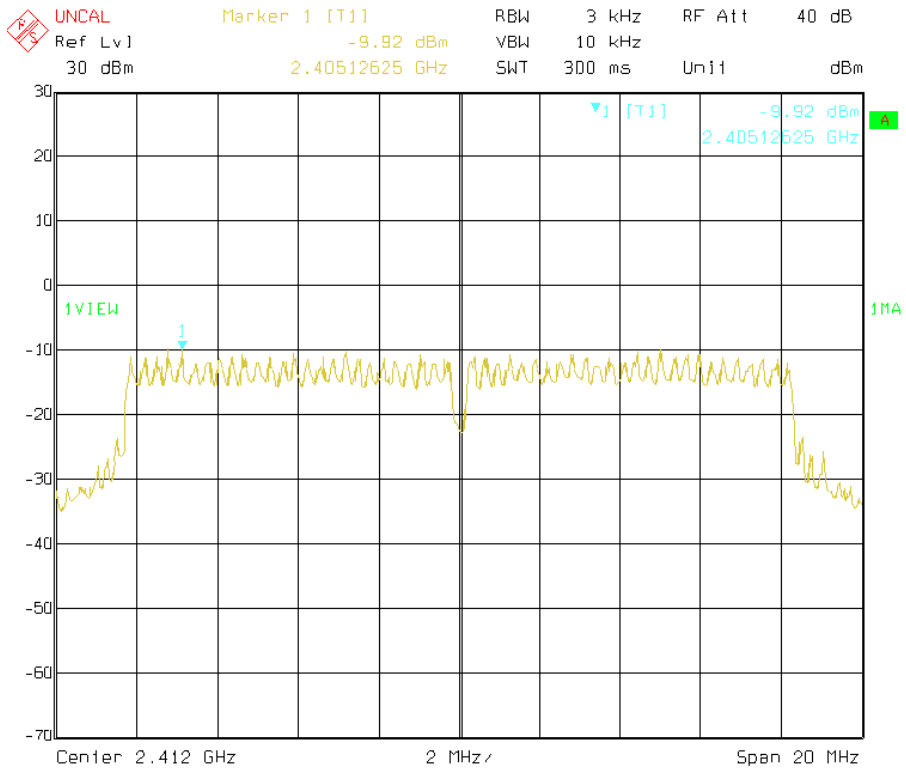

Middle channel

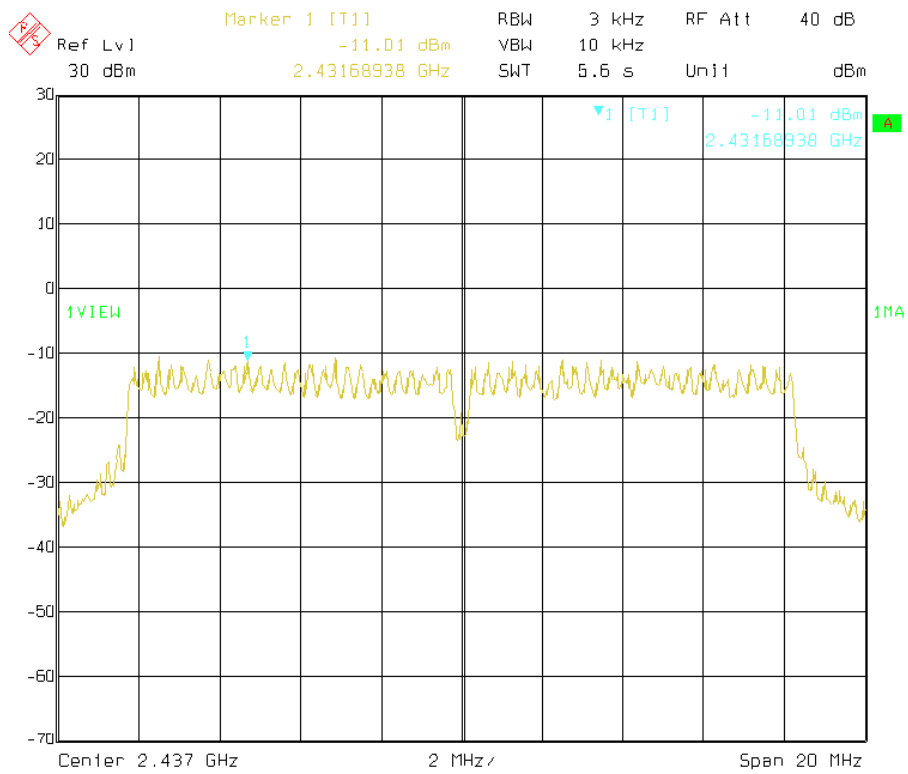


High channel

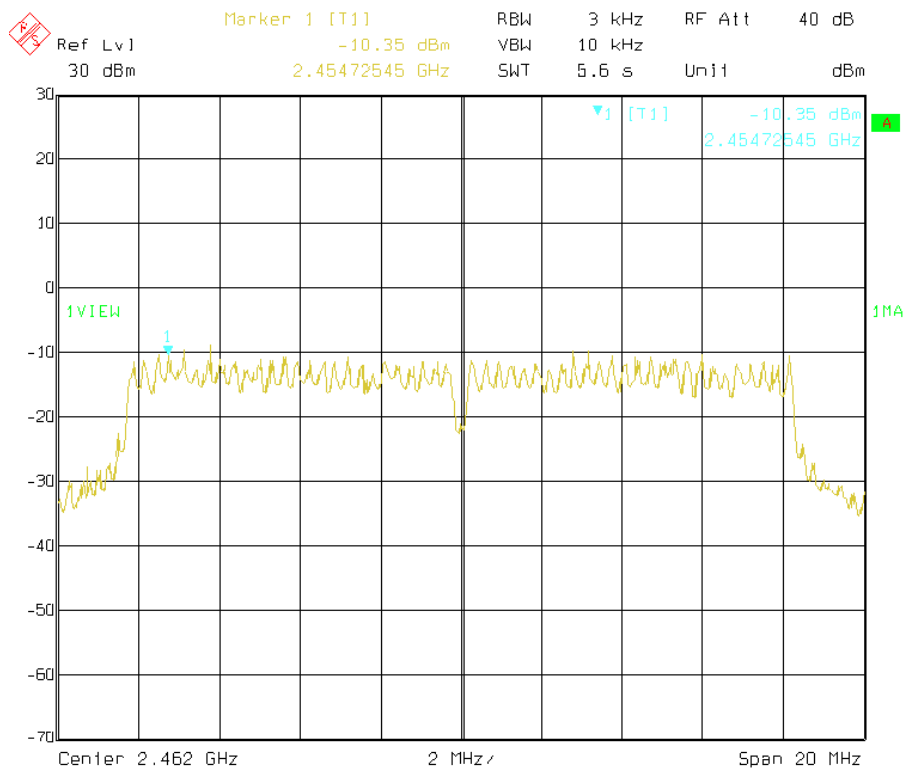


Test Mode: IEEE 802.11n (HT 20) mode


Low channel

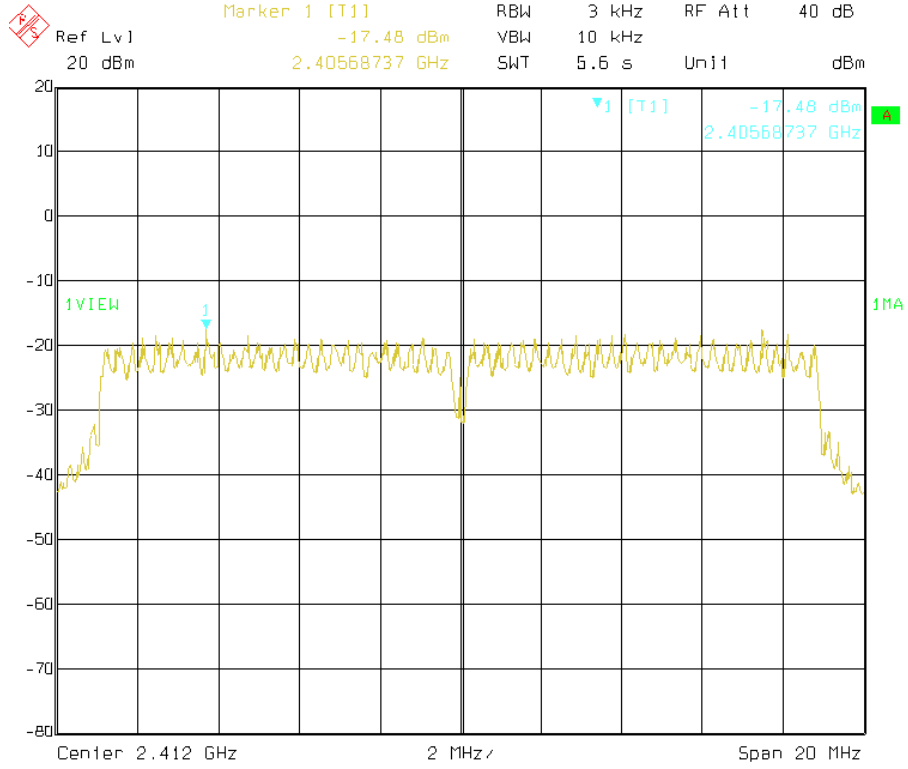

Middle channel

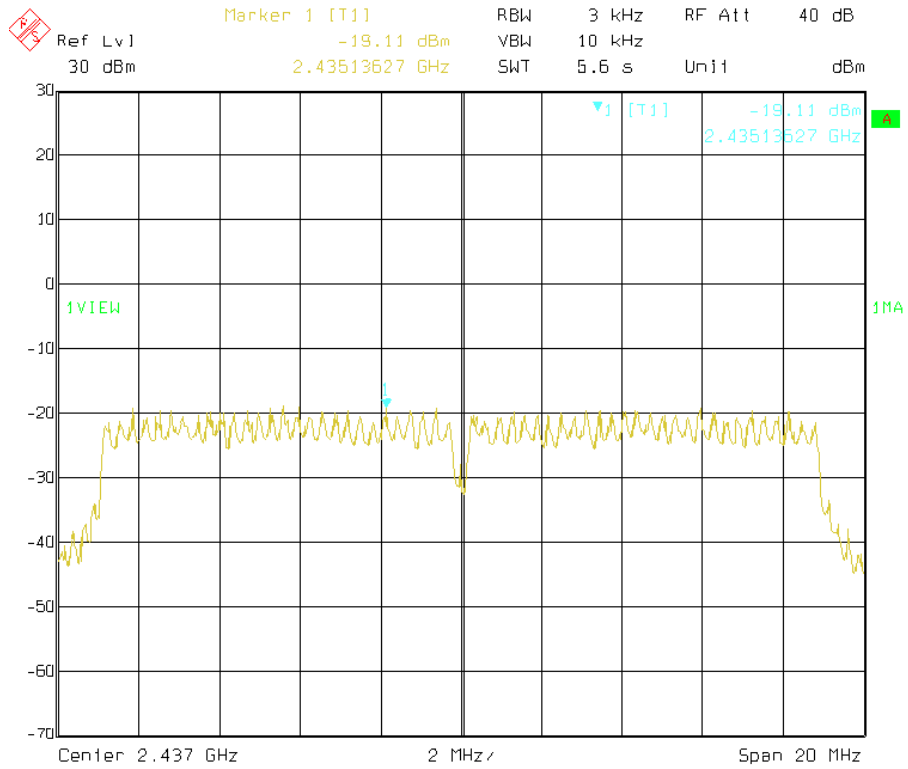


High channel

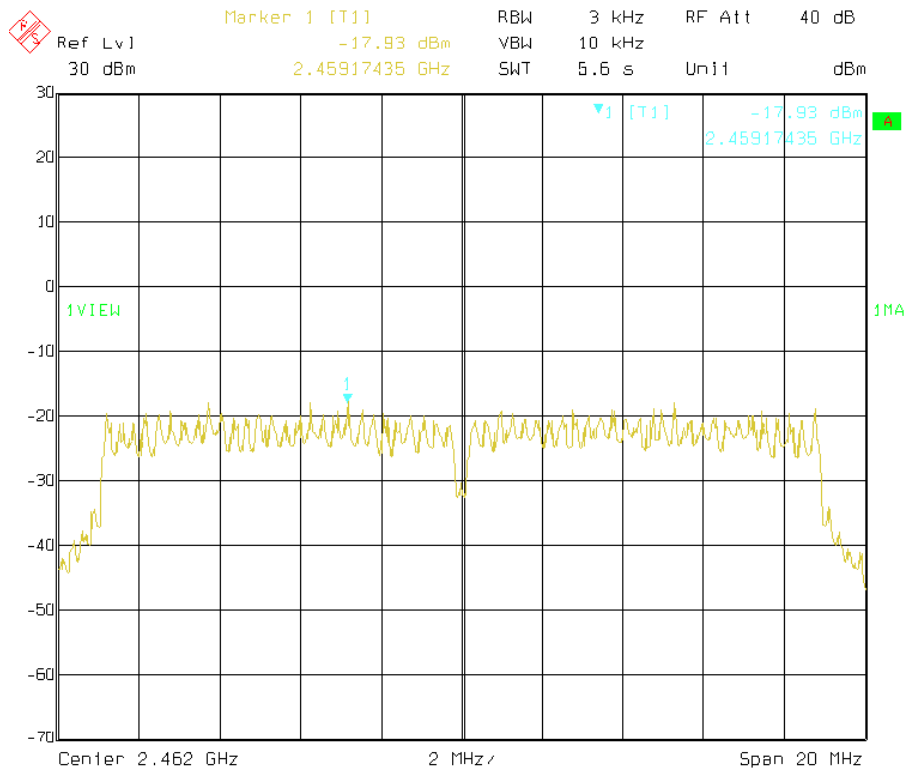


Test Mode: IEEE 802.11n(HT 40) mode


Low channel

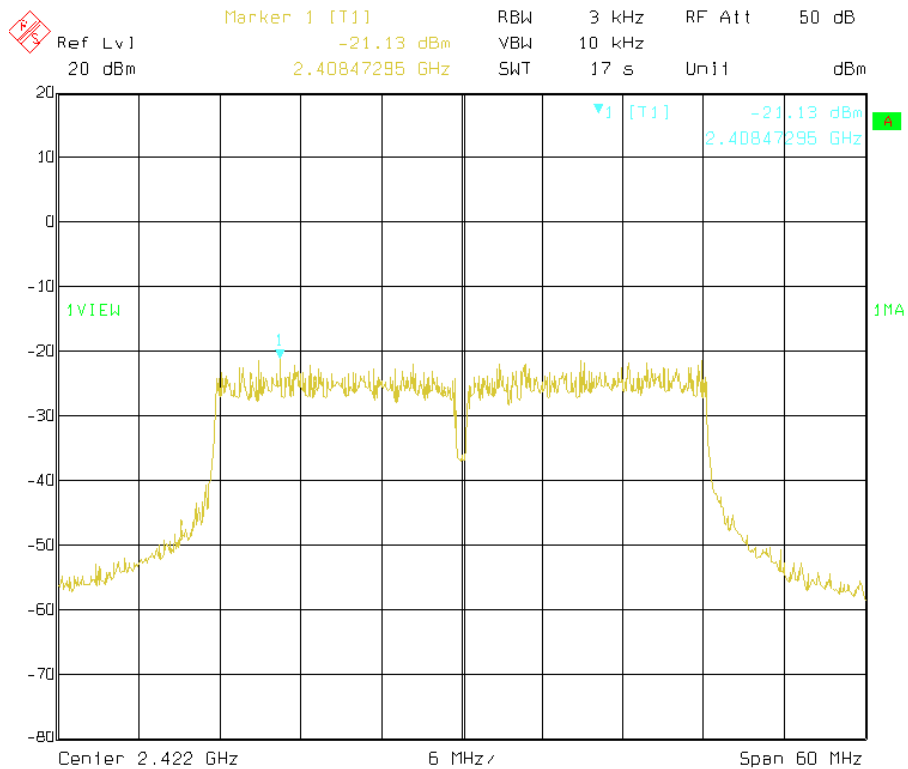

Middle channel

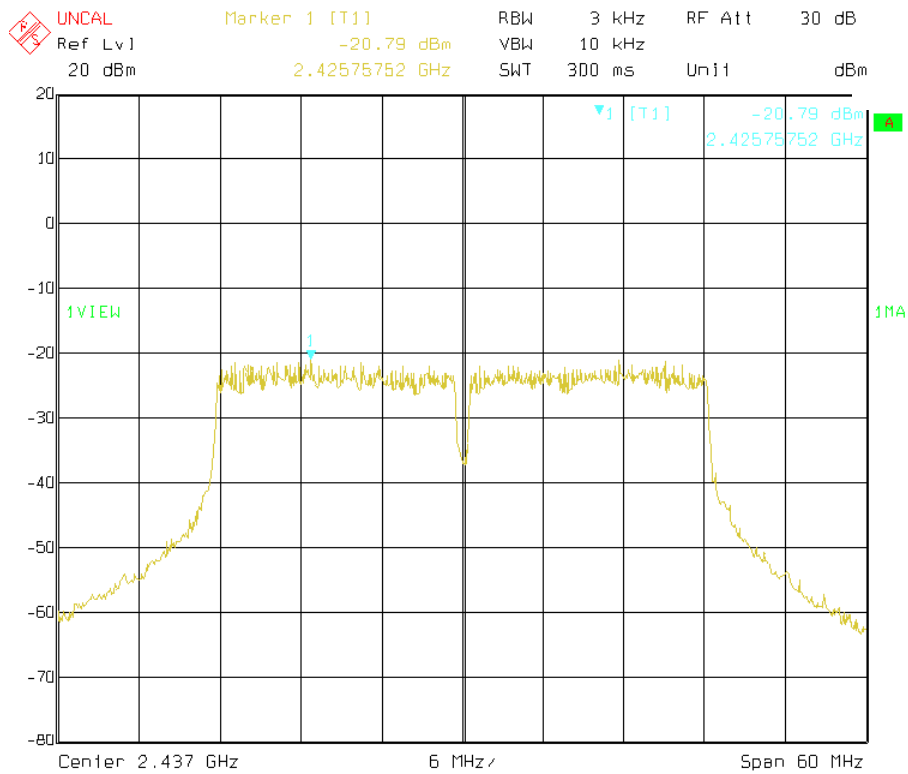

High channel

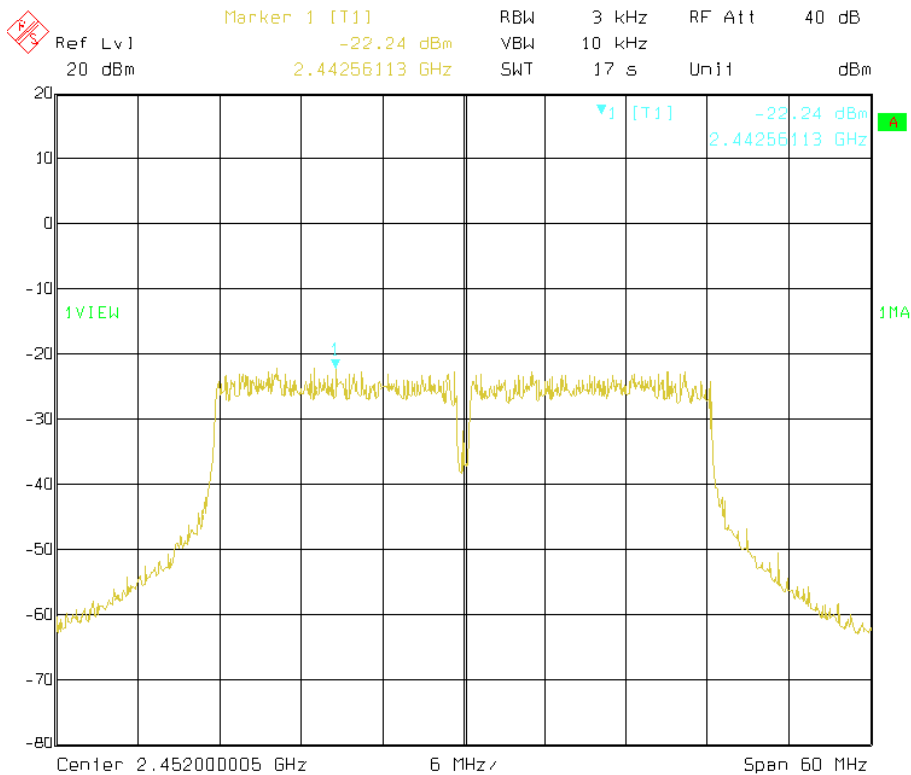

10.0 Band age Measurement

10.1 Test Equipment

Please refer to the Section 2

10.2 Test specification:

Environmental conditions: Temperature 22° C Humidity: 50% Atmospheric pressure: 103kPa

10.3 Limit:

Radiated emissions which fall in the restricted bands, as defined in section 15.205(a), must also comply with The radiated emission limits specified in 15.209(a)

10.4 Test Procedure

The EUT was setup according to ANSI C63.10:2009 and tested according to ANSI 63.10:2009 for compliance to FCC 47 CFR 15.247 requirements. The EUT is placed on a turn table which is 0.8 m above ground. The turn table is rotated 360 degrees to determine to the position of the maximum emission level. The EUT was positioned such That the distance from antenna to the EUT was 3 metres. The antenna is scanned from 1 metre to 4 metres to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10:2009 on radiated measurement.

Spectrum analyzer parameters setting as shown below:

1): Peak: RBW=1MHz, VBW=1MHz, Sweep=Auto

2): Average: RBW=1MHz, VBW=10Hz, Sweep=Auto


10.5 Test Result:

Test plots please refer to the next pages.

Test plots:

Test Mode: IEEE 802.11b mode

Low channel

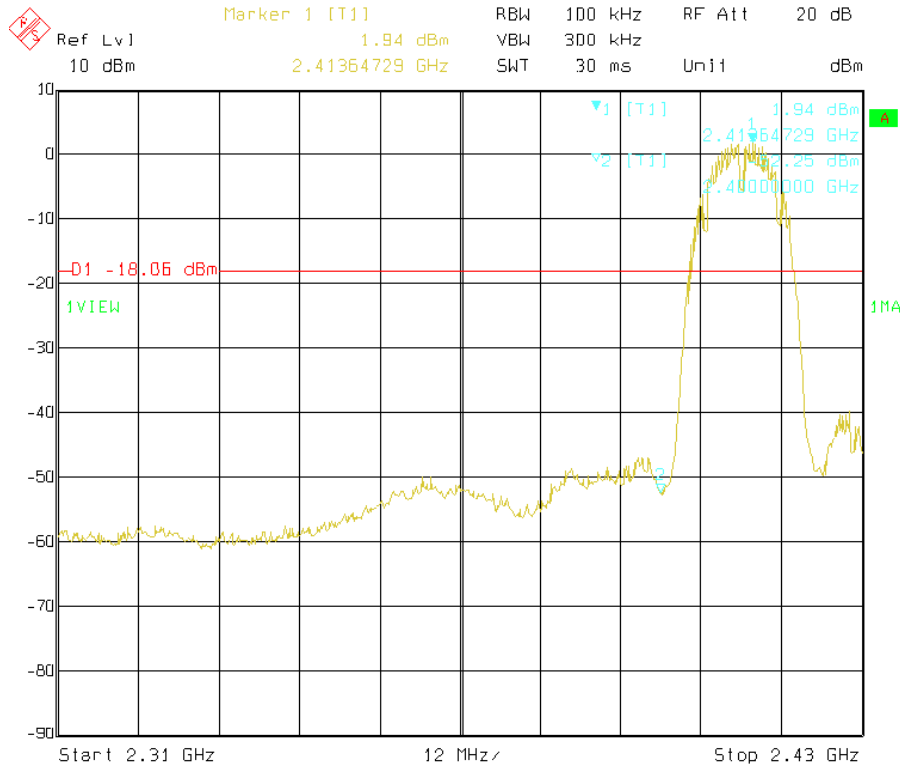


Remark: 1) The radiated measurement was made in horizontal and vertical polarity;

2) The maximum emission was 59.64dBuV at 2386.5 MHz, which comply with the Peak limit. While the Average emission was 50.08dBuV at 2386.5 MHz, which comply with the Average limit.

3) Radiated emissions which fall in the restricted band, as defined in 15.205(a), comply with the radiated emission limits specified in 15.209(a).

High channel

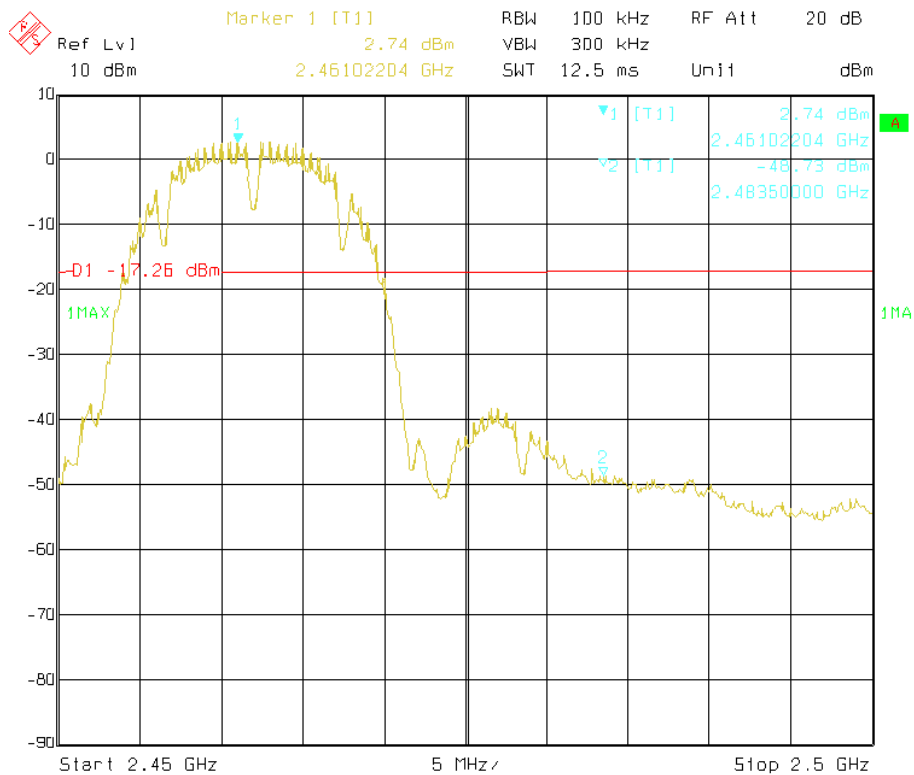


Remark: 1) The radiated measurement was made in horizontal and vertical polarity;

2) The maximum emission was 58.01dBuV at 2485.8 MHz, which comply with the Peak limit. While the Average emission was 48.97dBuV at 2485.8 MHz, which comply with the Average limit.

3) Radiated emissions which fall in the restricted band, as defined in 15.205(a), comply with the radiated emission limits specified in 15.209(a).

Test Mode: IEEE 802.11g mode

Low channel

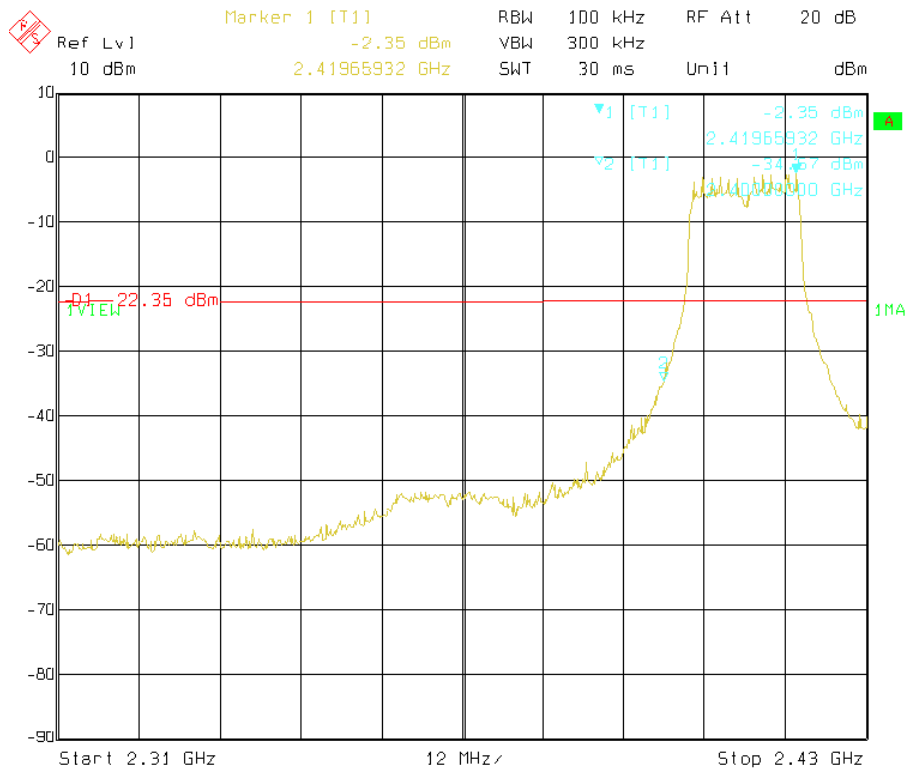


Remark: 1) The radiated measurement was made in horizontal and vertical polarity;

2) The maximum emission was 70.26dBuV at 2388.9 MHz, which comply with the Peak limit. While the Average emission was 51.57dBuV at 2388.9 MHz, which comply with the Average limit.

3) Radiated emissions which fall in the restricted band, as defined in 15.205(a), comply with the radiated emission limits specified in 15.209(a).


High channel

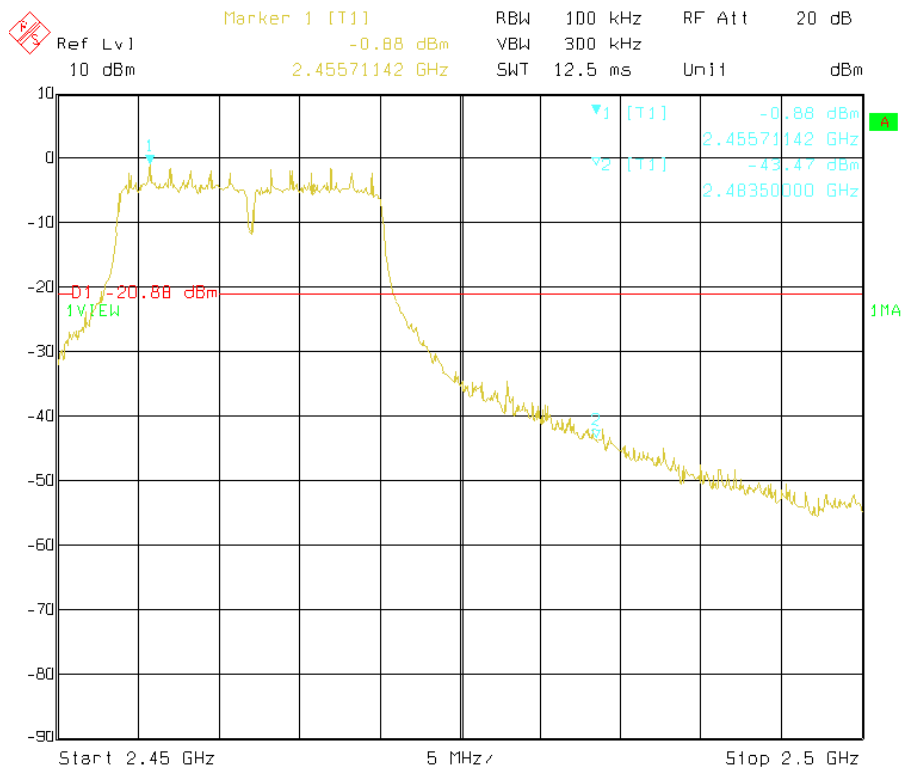

- Remark: 1) The radiated measurement was made in horizontal and vertical polarity;
- 2) The maximum emission was 65.06dBuV at 2485.7 MHz, which comply with the Peak limit. While the Average emission was 50.33dBuV at 2485.7 MHz, which comply with the Average limit.
- 3) Radiated emissions which fall in the restricted band, as defined in 15.205(a), comply with the radiated emission limits specified in 15.209(a).

Test Mode: IEEE 802.11n (HT 20) mode

Low channel

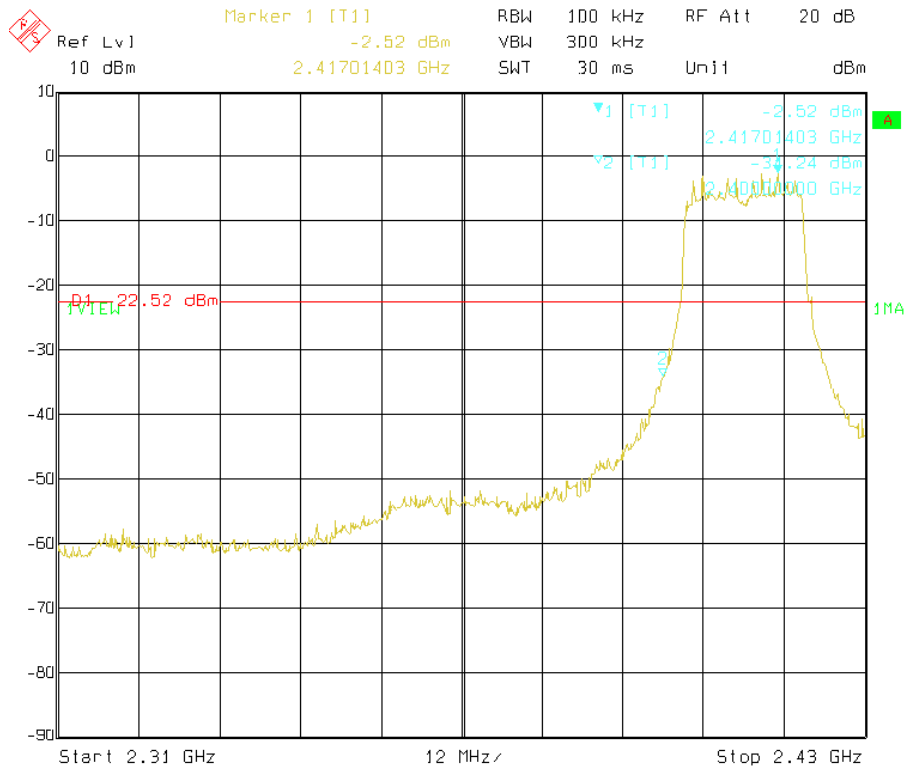


Remark: 1) The radiated measurement was made in horizontal and vertical polarity;

2) The maximum emission was 70.51dBuV at 2389.1 MHz, which comply with the Peak limit. While the Average emission was 51.85dBuV at 2389.1 MHz, which comply with the Average limit.

3) Radiated emissions which fall in the restricted band, as defined in 15.205(a), comply with the radiated emission limits specified in 15.209(a).

High channel

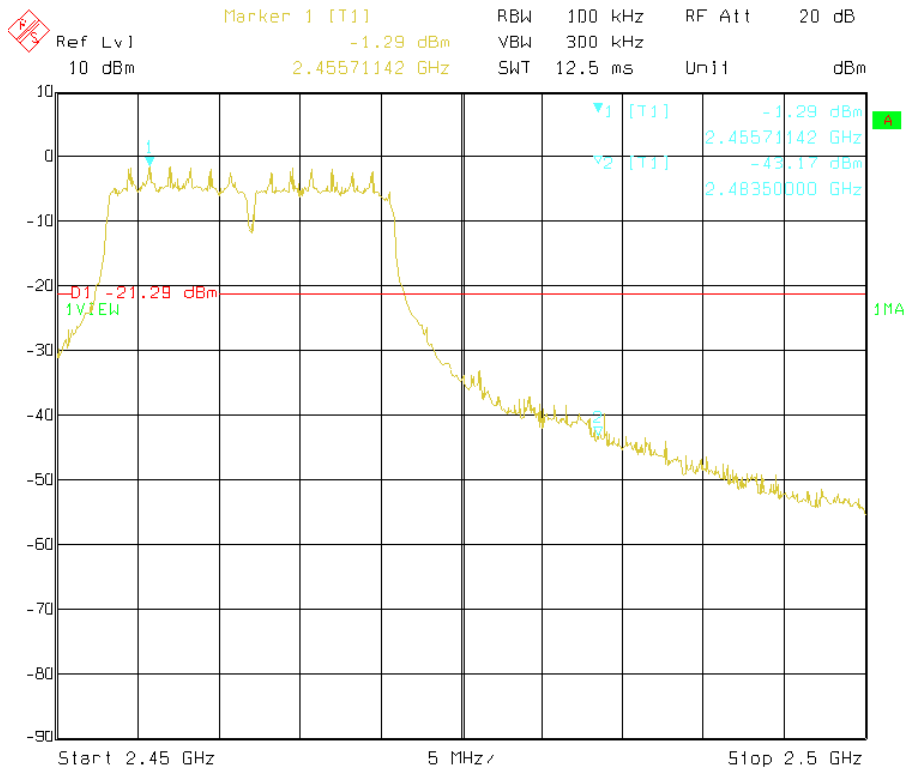


Remark: 1) The radiated measurement was made in horizontal and vertical polarity;

2) The maximum emission was 67.05dBuV at 2485.5 MHz, which comply with the Peak limit. While the Average emission was 49.67dBuV at 2485.5 MHz, which comply with the Average limit.

3) Radiated emissions which fall in the restricted band, as defined in 15.205(a), comply with the radiated emission limits specified in 15.209(a).

Test Mode: IEEE 802.11n (HT 40) mode

Low channel

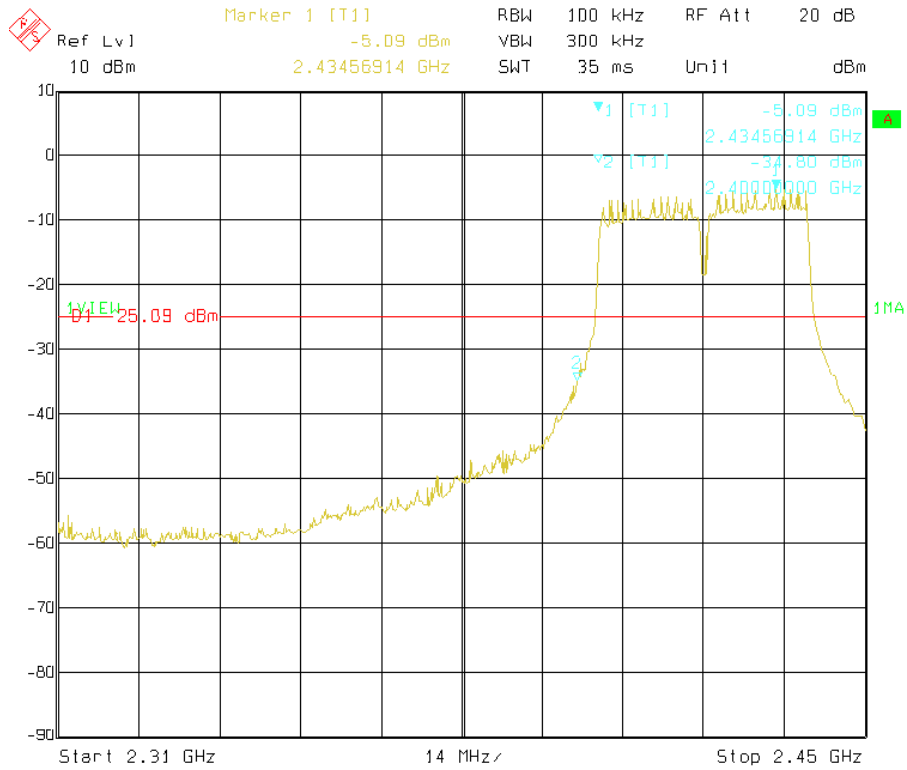


Remark: 1) The radiated measurement was made in horizontal and vertical polarity;

2) The maximum emission was 70.09dBuV at 2389.8 MHz, which comply with the Peak limit. While the Average emission was 48.44dBuV at 2389.8 MHz, which comply with the Average limit.

3) Radiated emissions which fall in the restricted band, as defined in 15.205(a), comply with the radiated emission limits specified in 15.209(a).

High channel

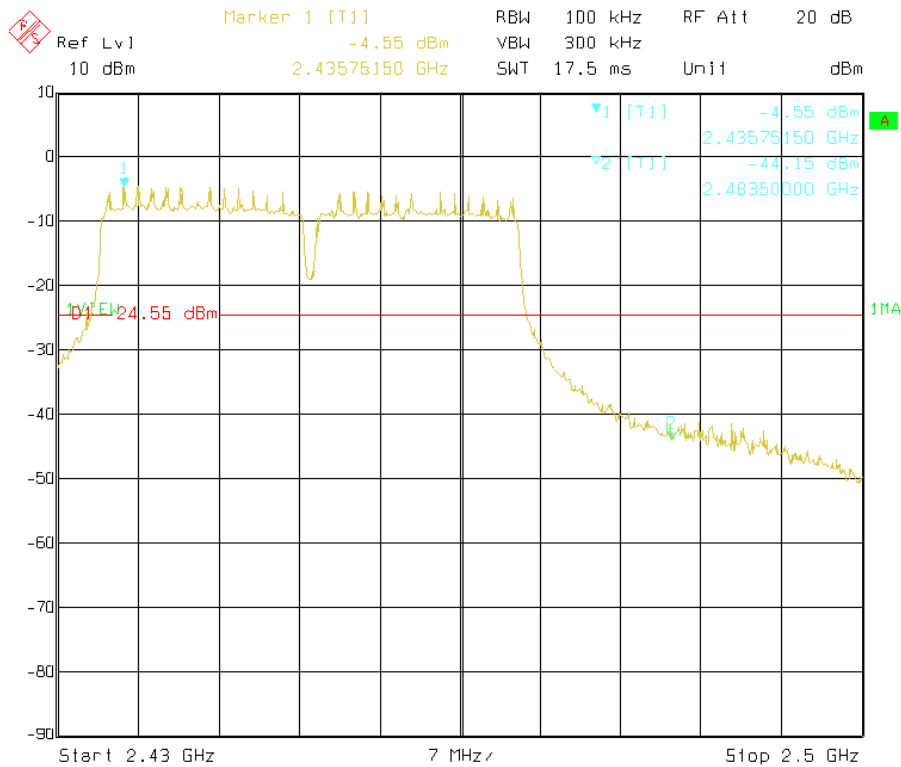


- Remark: 1) The radiated measurement was made in horizontal and vertical polarity;
- 2) The maximum emission was 64.61dBuv at 2486.1 MHz, which comply with the Peak limit. While the Average emission was 47.48dBuv at 2486.1 MHz, which comply with the Average limit.
- 3) Radiated emissions which fall in the restricted band, as defined in 15.205(a), comply with the radiated emission limits specified in 15.209(a).

11.0 Spurious Emission Test

11.1 Conducted Measurement

11.1.1 Test configuration



11.1.2 Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

11.1.3 Test procedure:

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site. The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 100 kHz. Measurements are made over the 30MHz to 26GHz range with the transmitter set to the lowest, middle, and highest channels.



11.1.4 Test Result:

Test plots please refer to next pages.



Test Plots:

Test Mode: IEEE 802.11b mode



Low channel

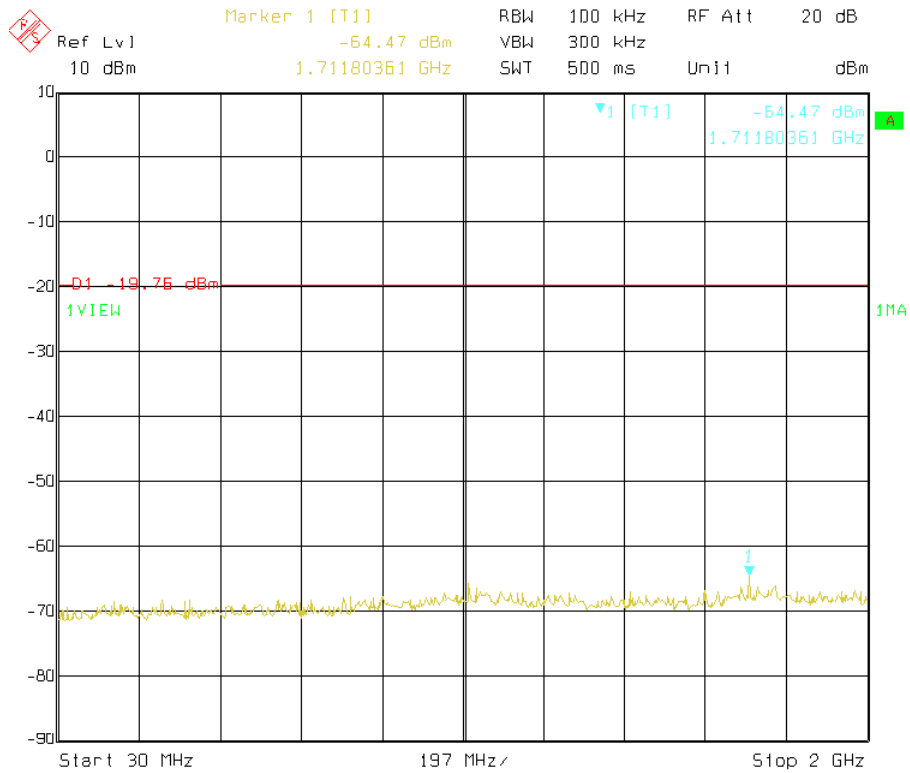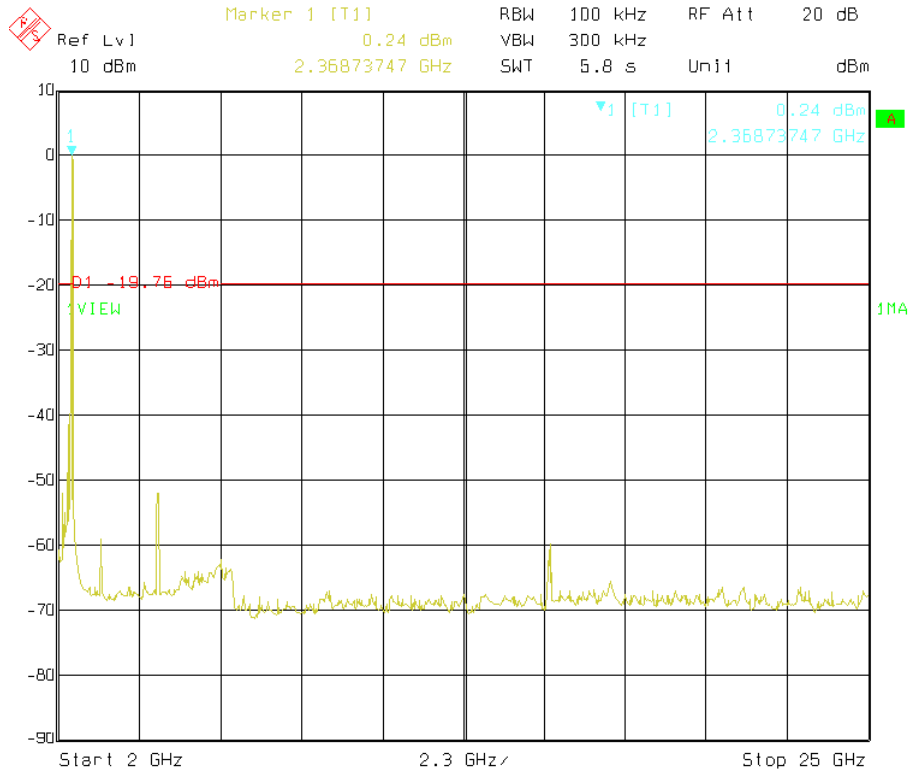

Middle channel

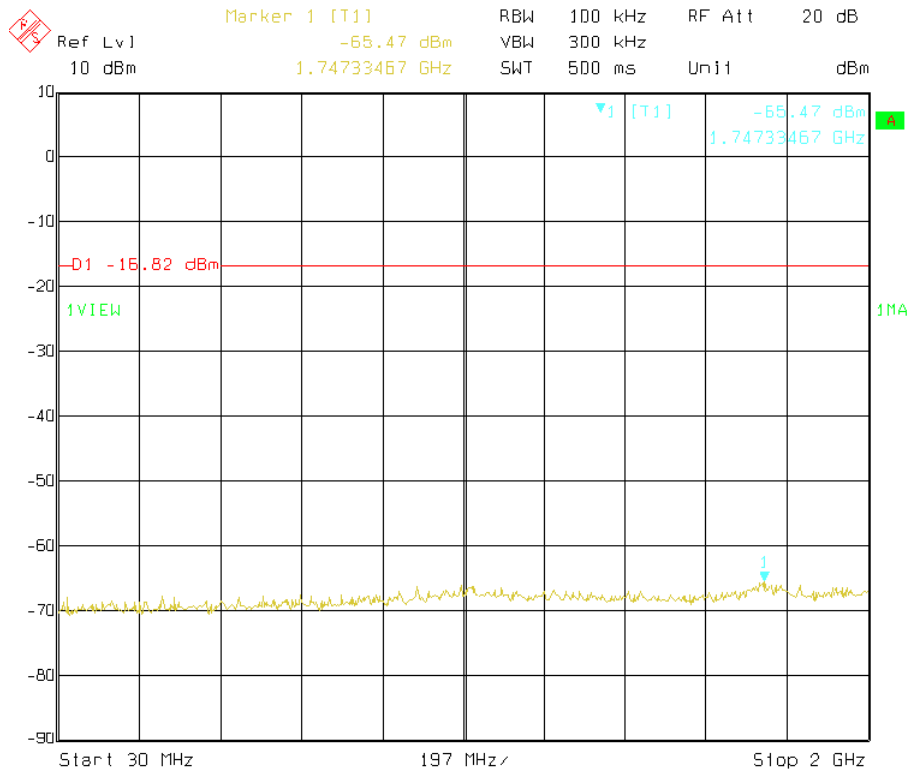
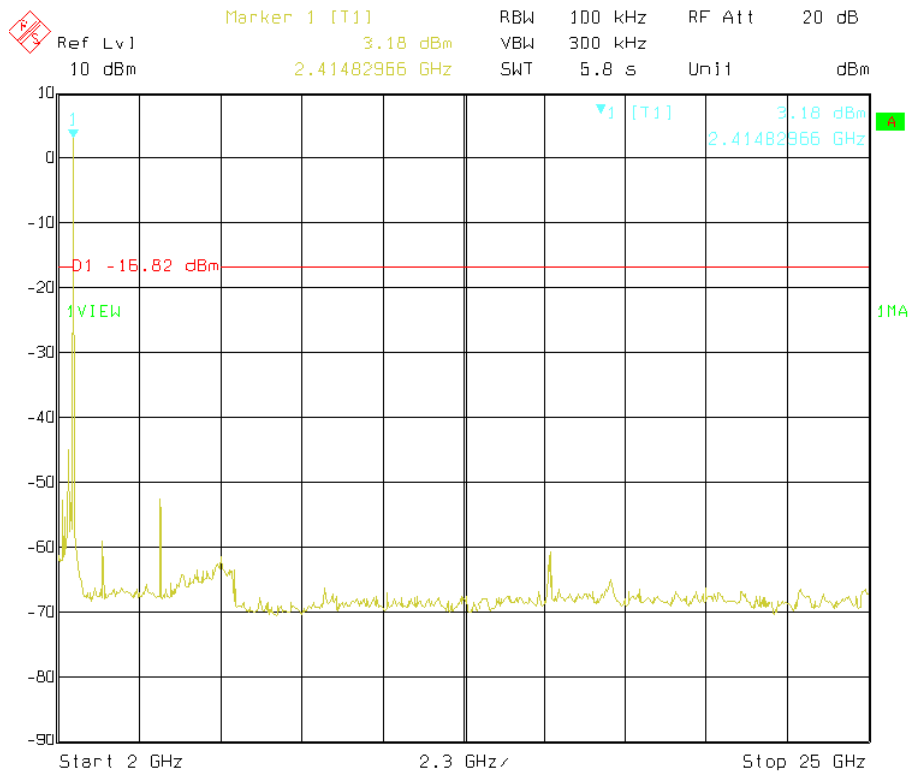


High channel

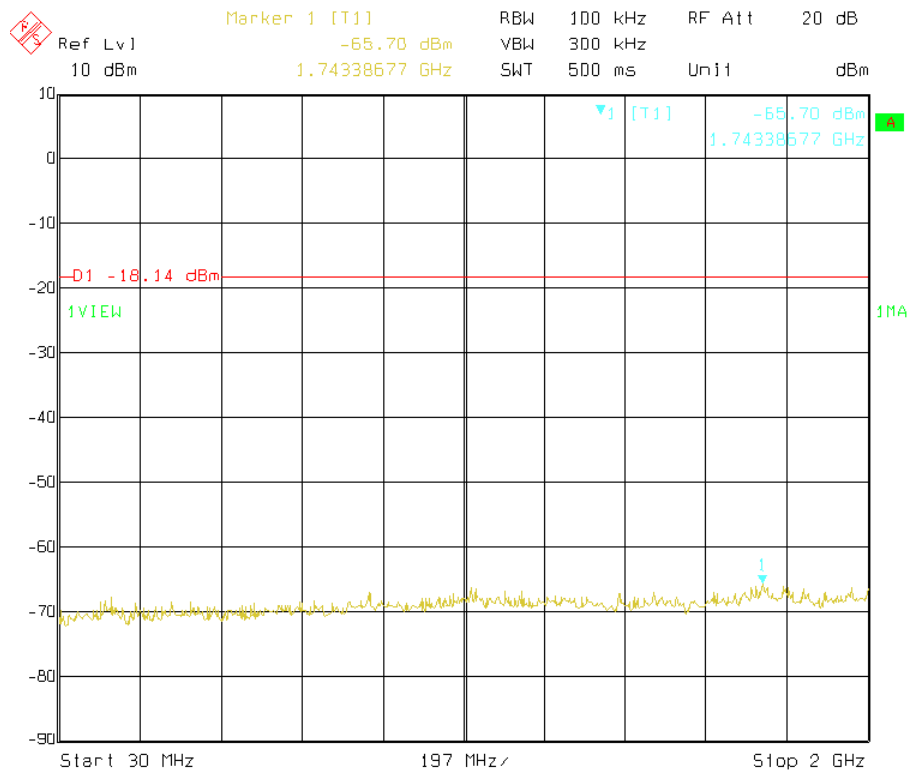
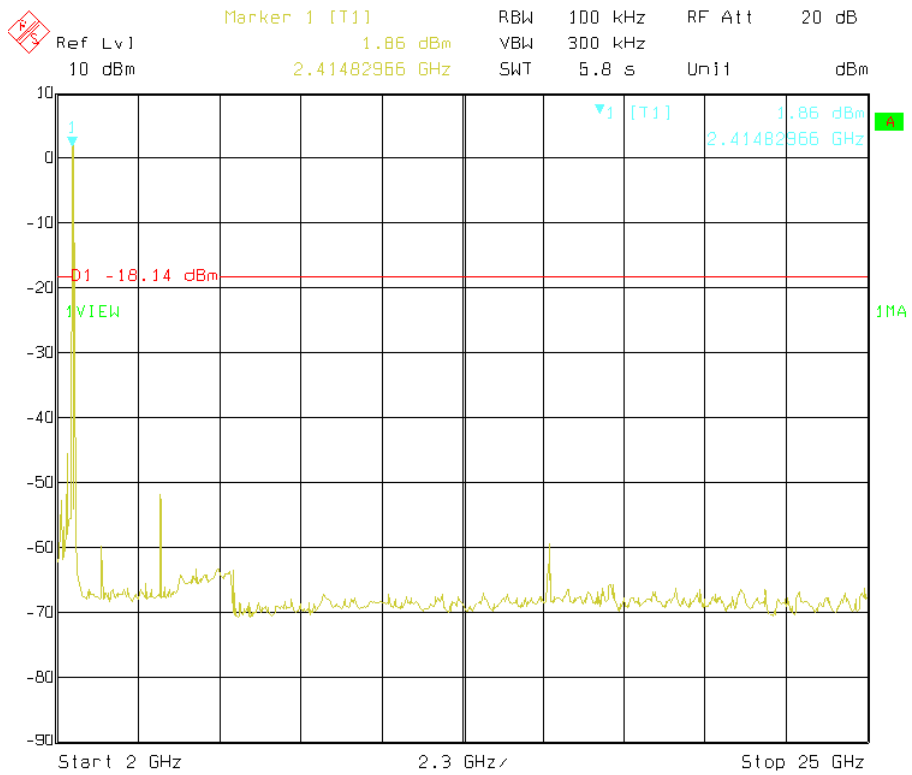


Test Mode: IEEE 802.11g mode



Low channel

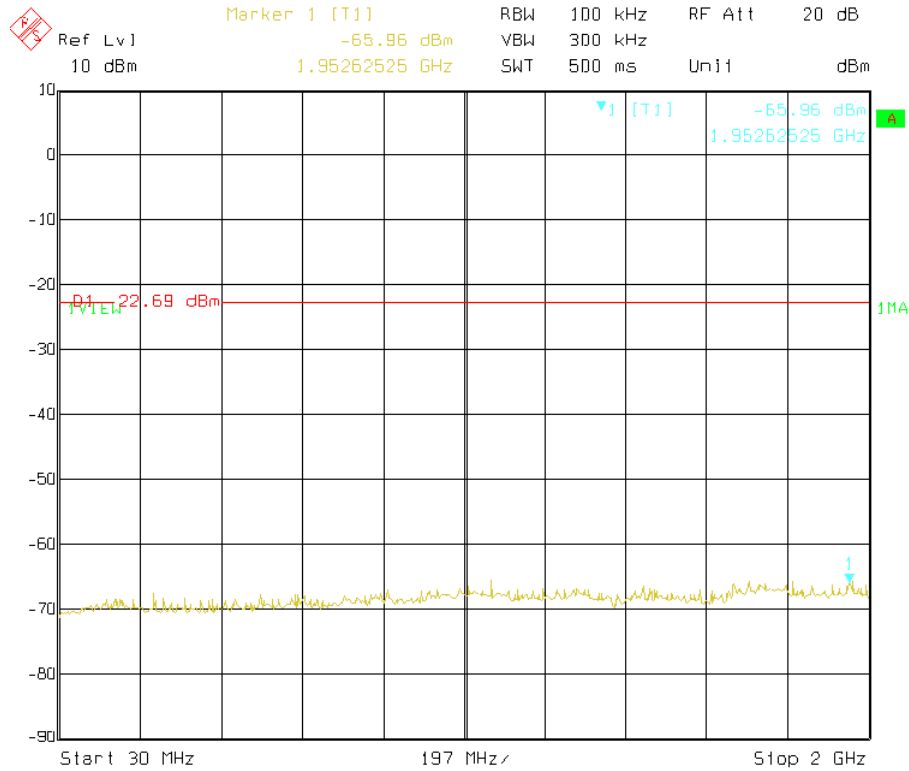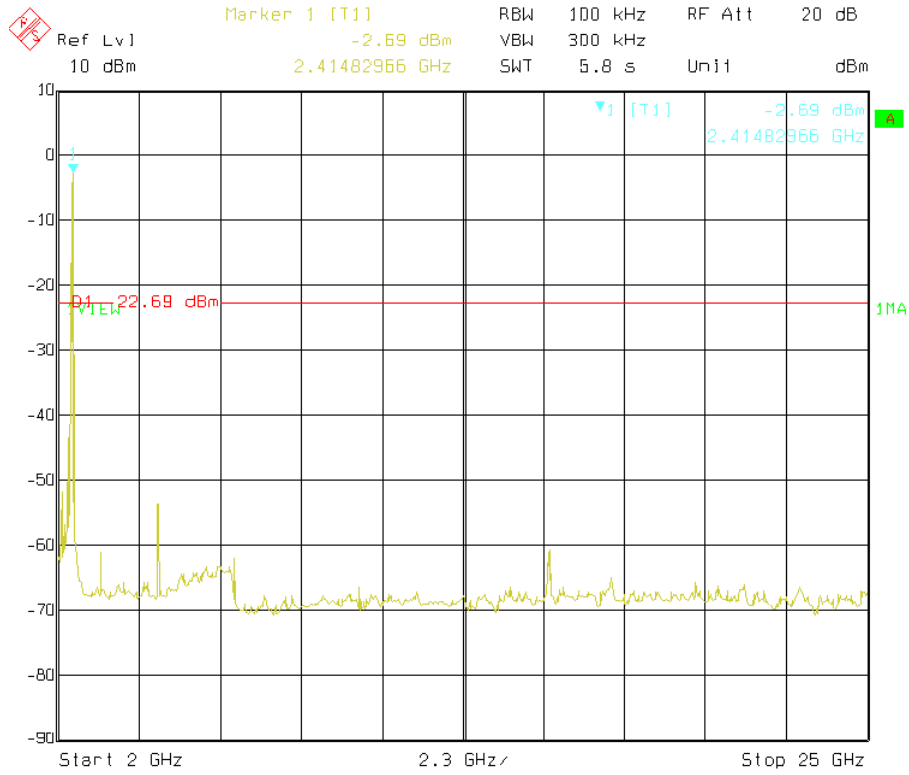

Middle channel

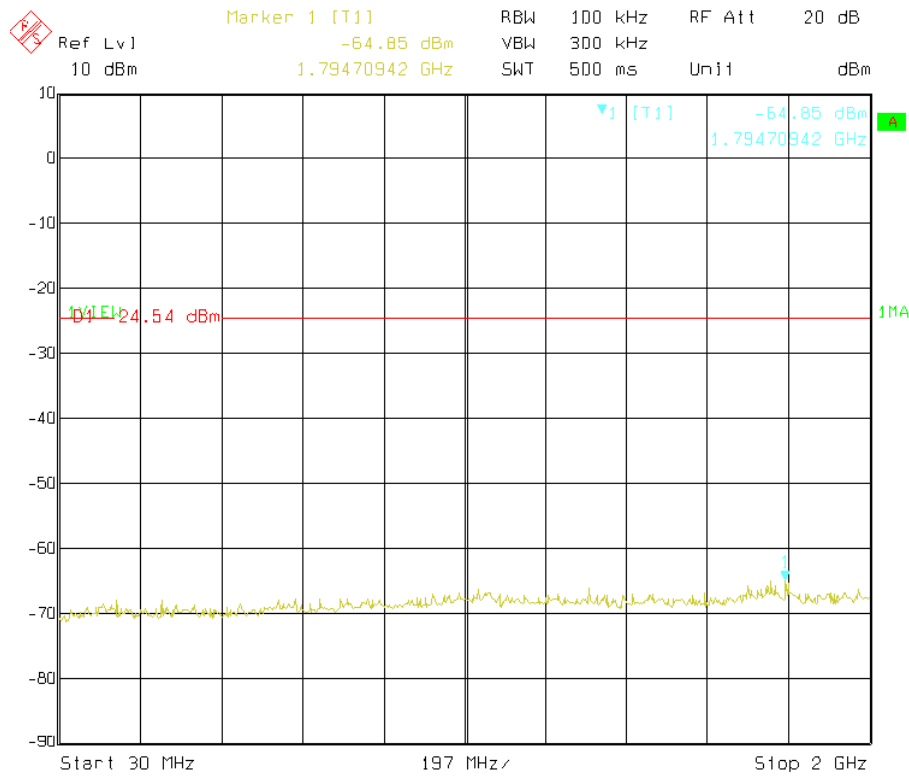
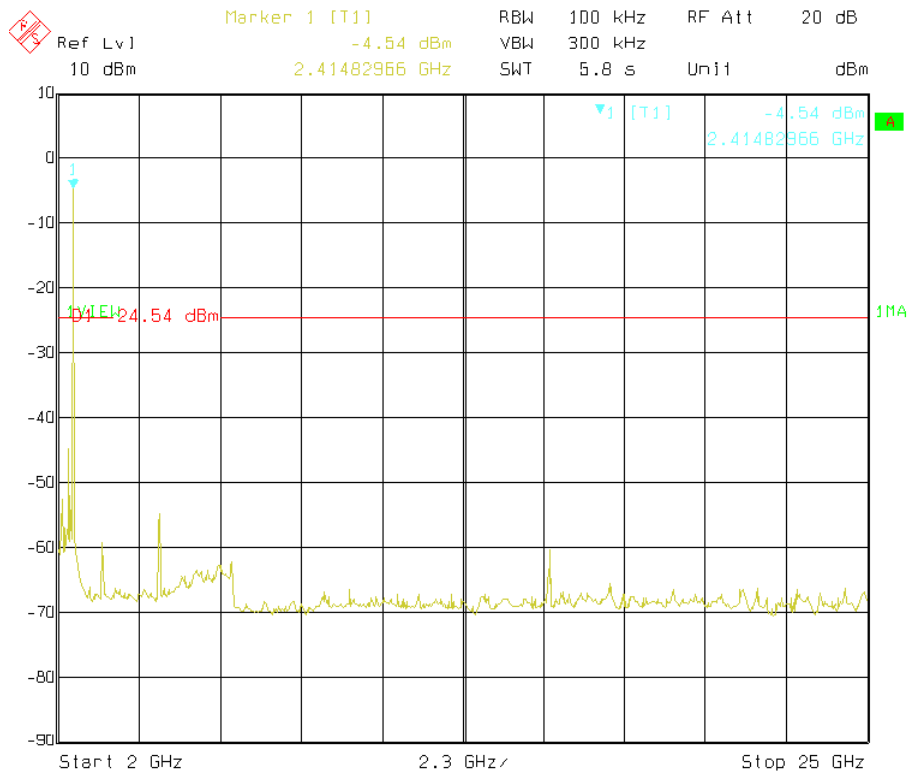


High channel

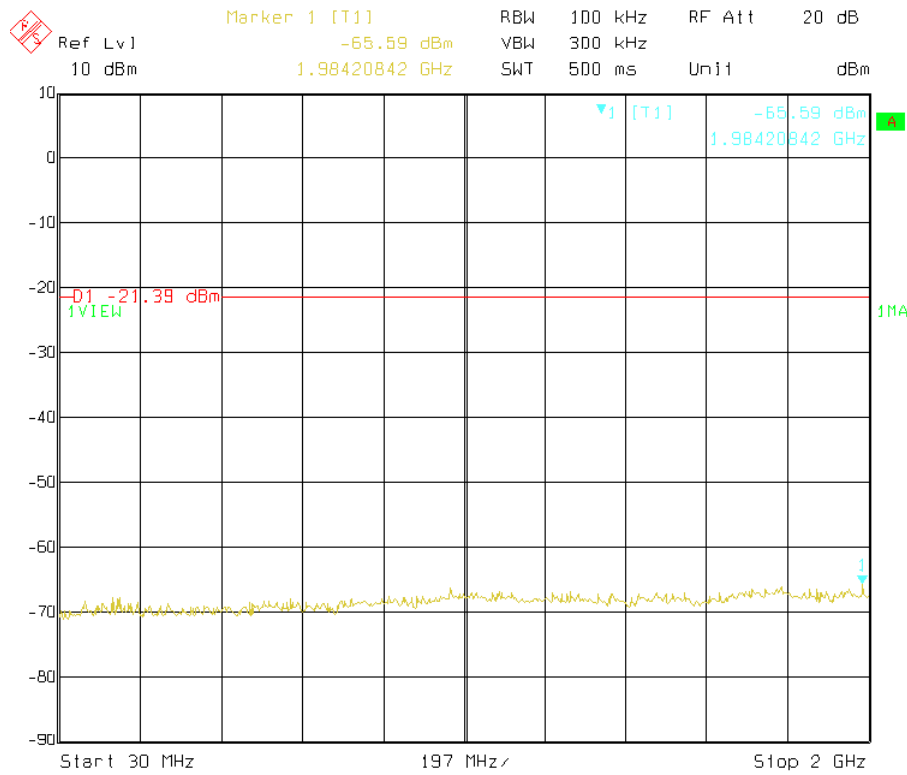
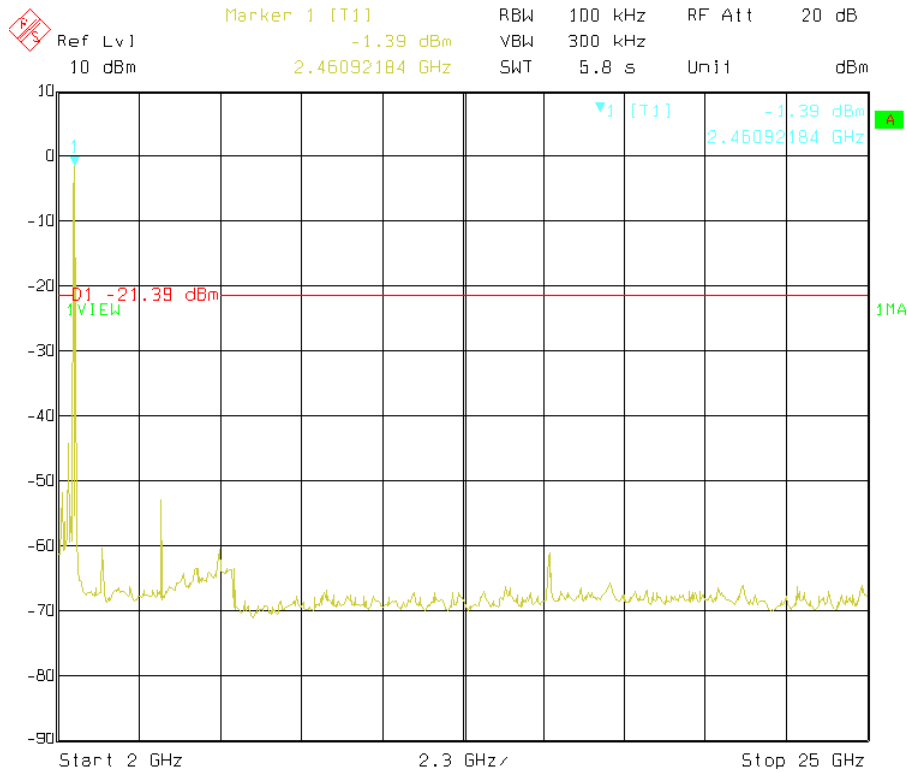


Test Mode: IEEE 802.11n(HT 20) mode



Low channel

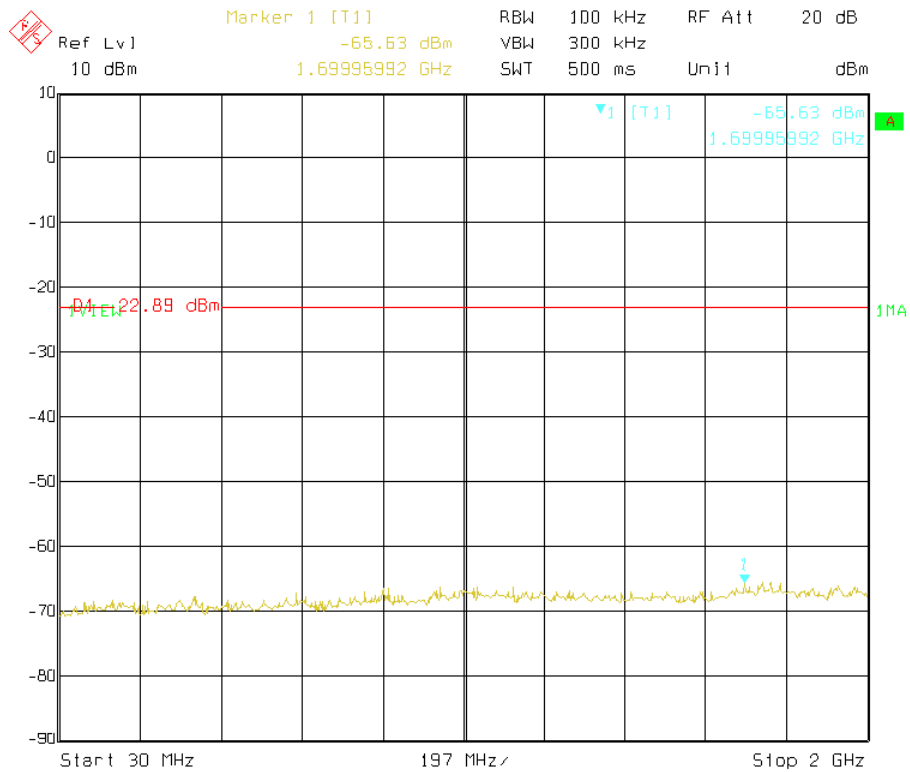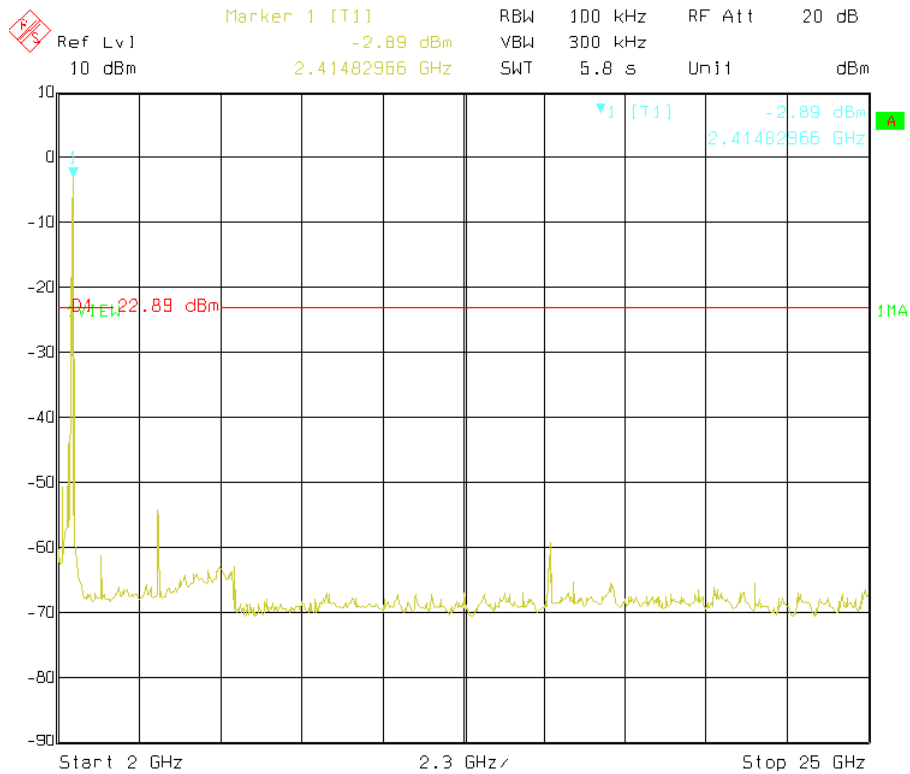

Middle channel

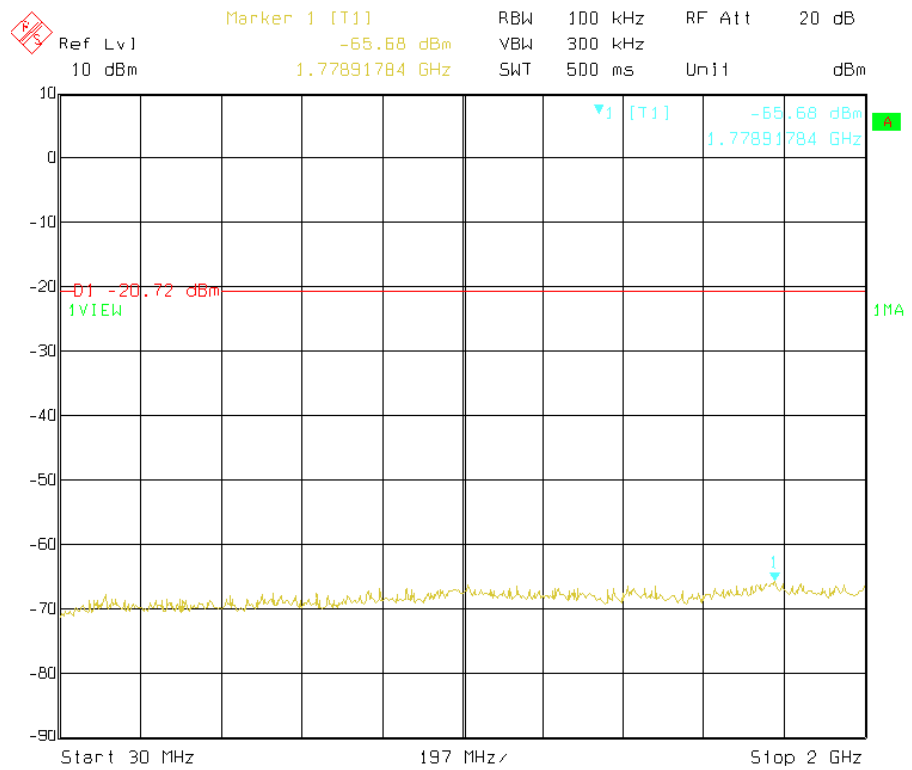
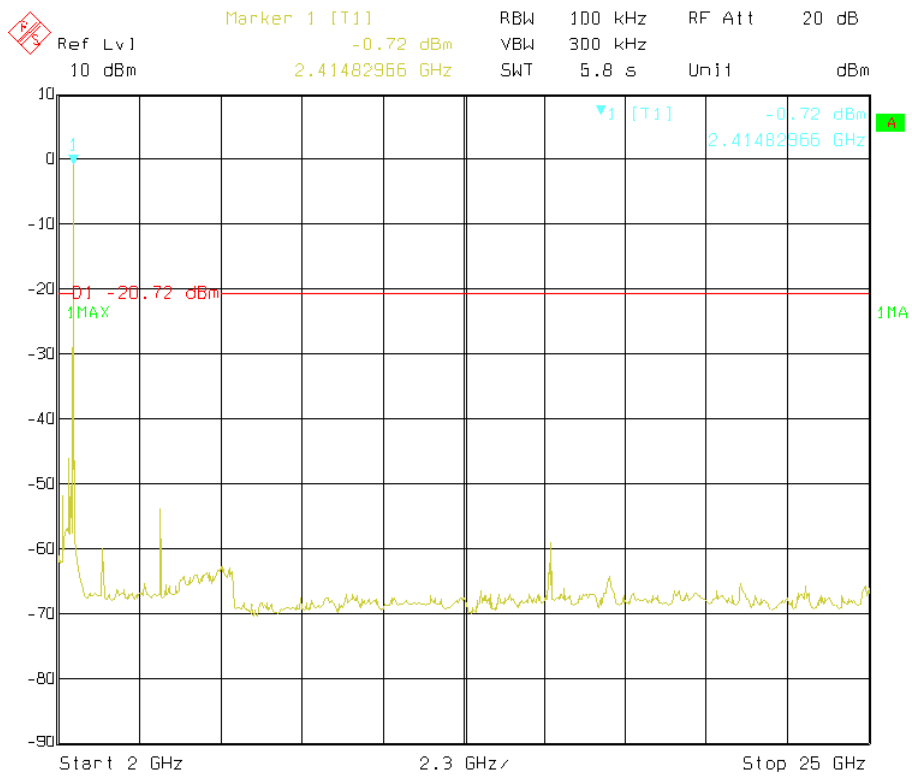


High channel

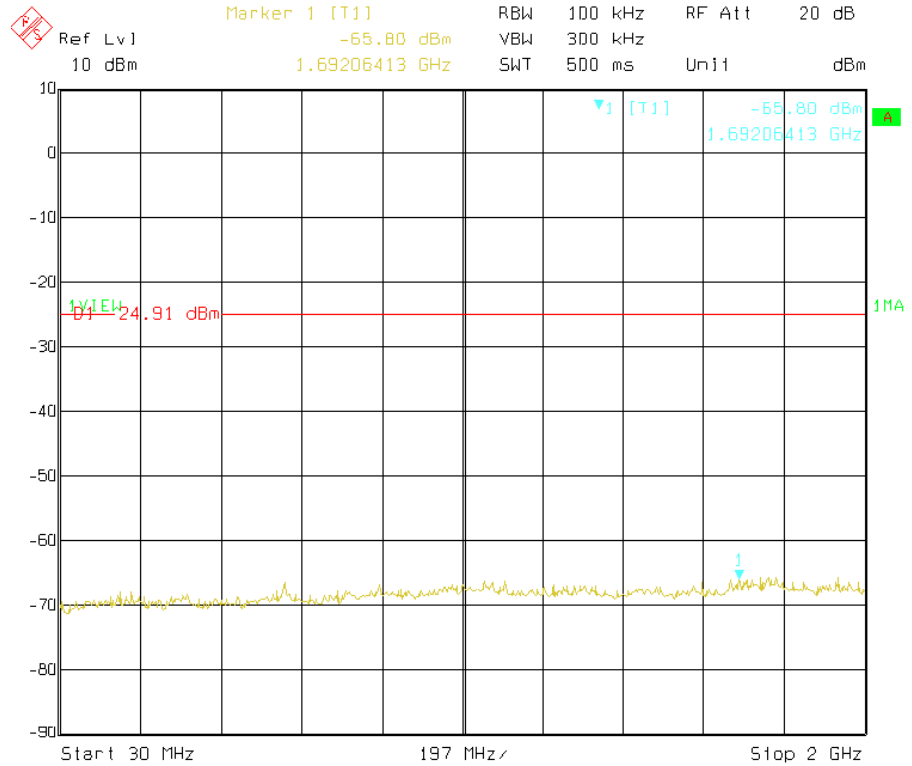
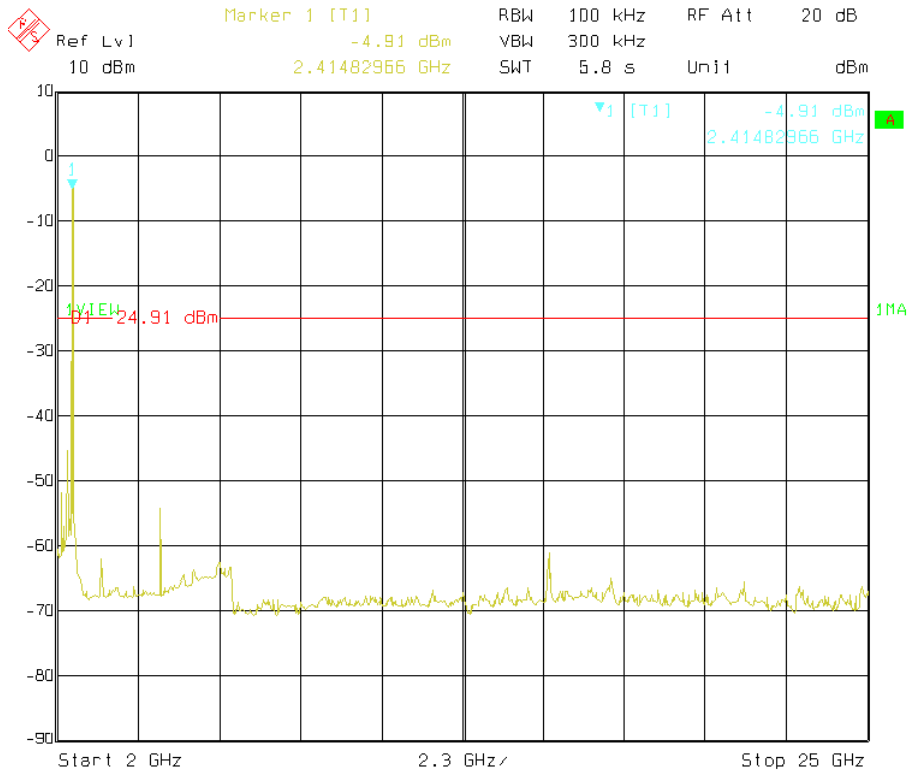


Test Mode: IEEE 802.11n(HT 40) mode



Low channel

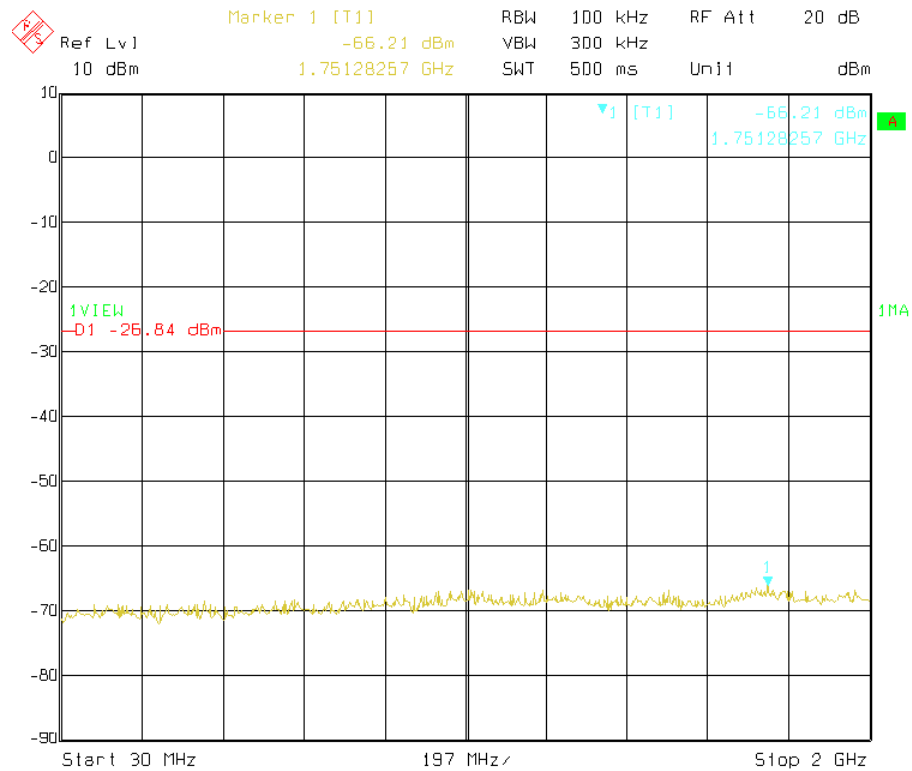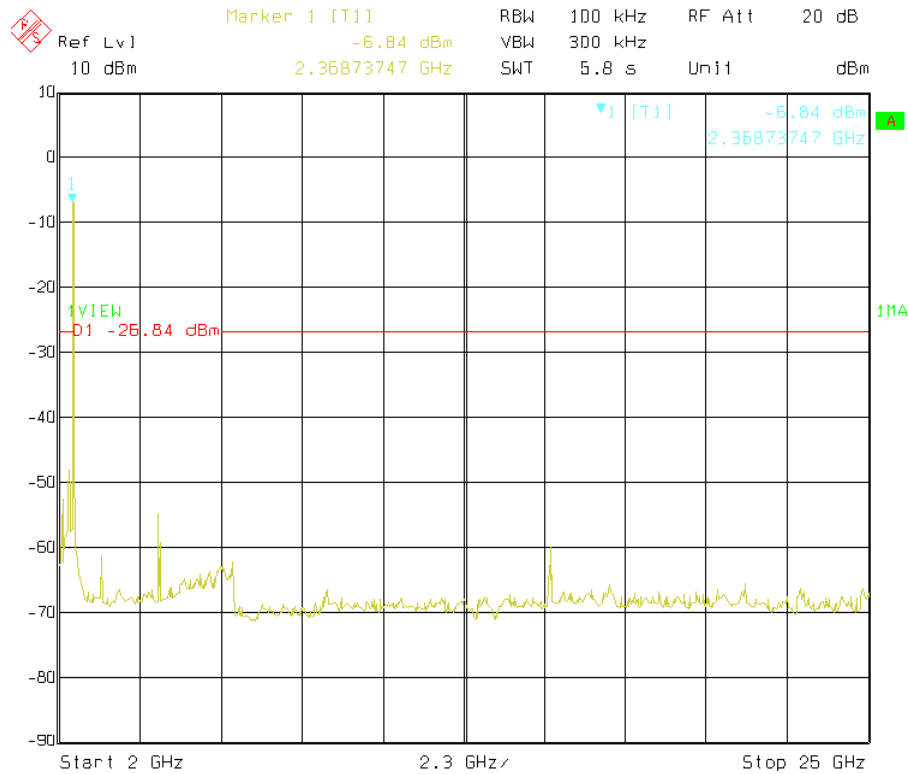

Middle channel

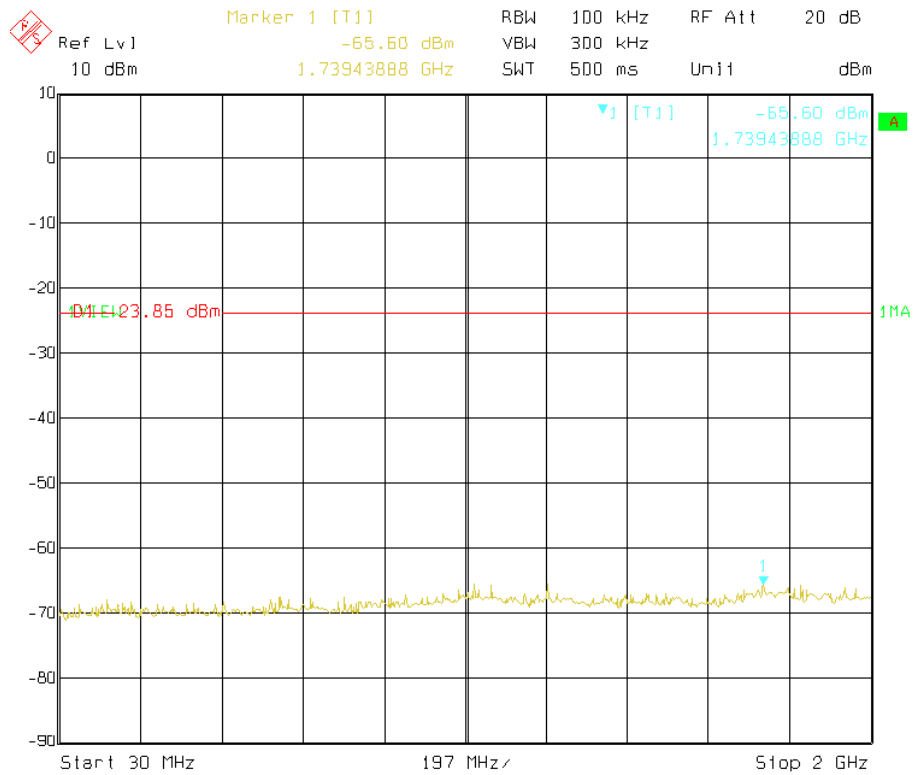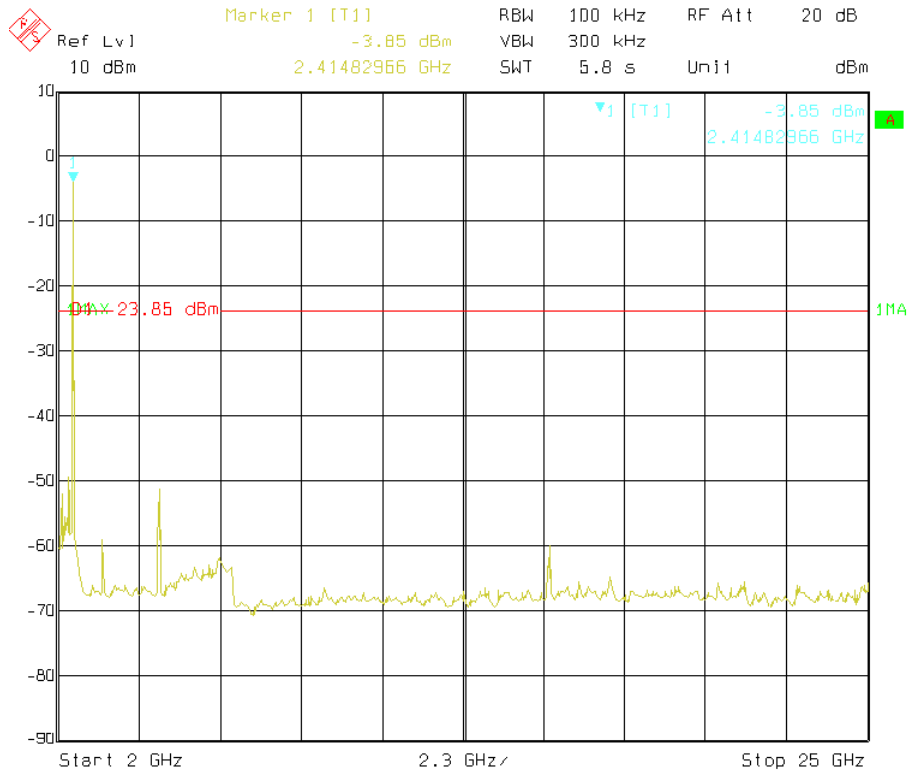

High channel

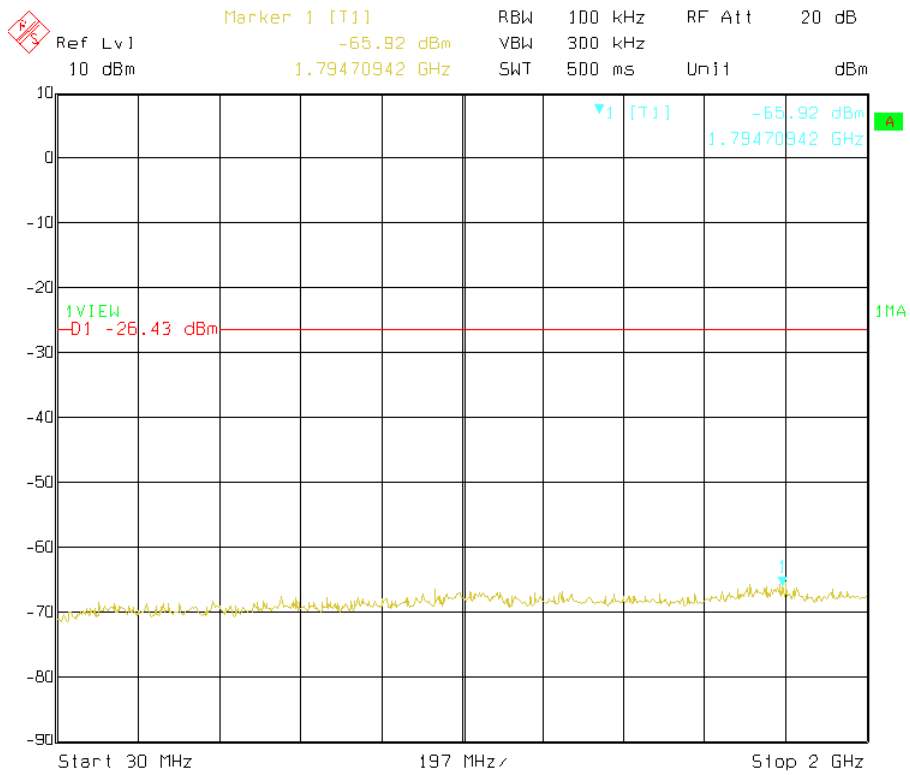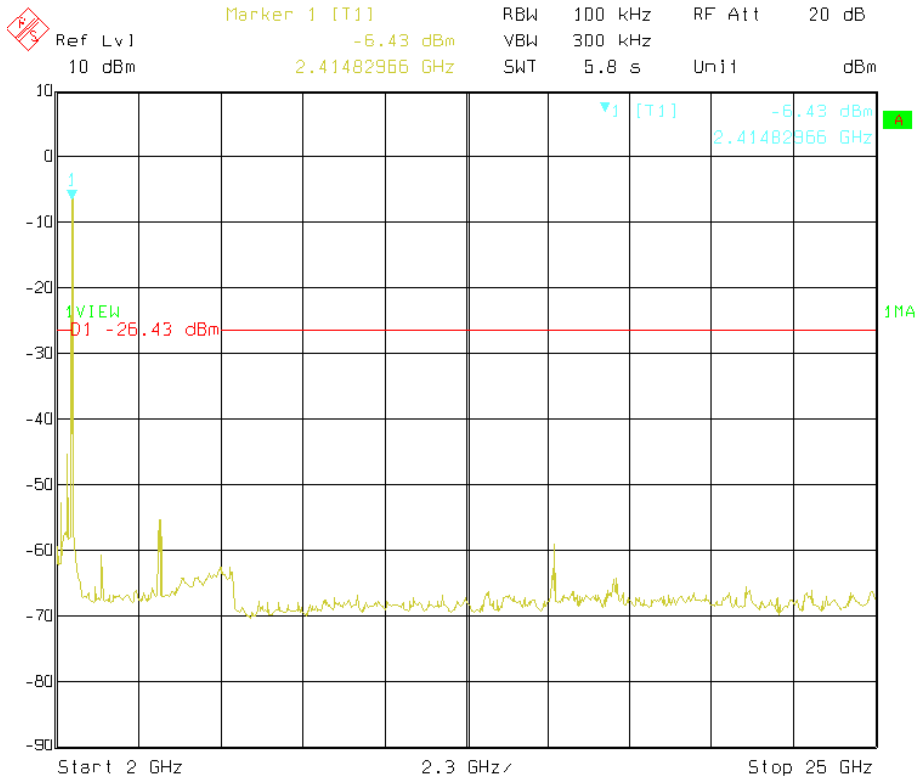


11.2 Radiated emissions


11.2.1 Test Method and test Procedure:

- 1) The EUT was tested according to ANSI C63.10 –2009.
- 2) The EUT, peripherals were put on the turntable which table size is 1m x 1.5 m, table high 0.8 m. All set up is according to ANSI C63.10-2009.
- 3) The frequency spectrum from 30 MHz to 25 GHz was investigated. All readings from 30 MHz to 1 GHz quasi-peak values with a resolution bandwidth of 120 kHz. All readings are above 1 GHz, peak values with a resolution bandwidth of 1 MHz . Measurements were made at 3 meters.
- 4) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- 5) The antenna polarization: Vertical polarization and Horizontal polarization.


Block diagram of Test setup

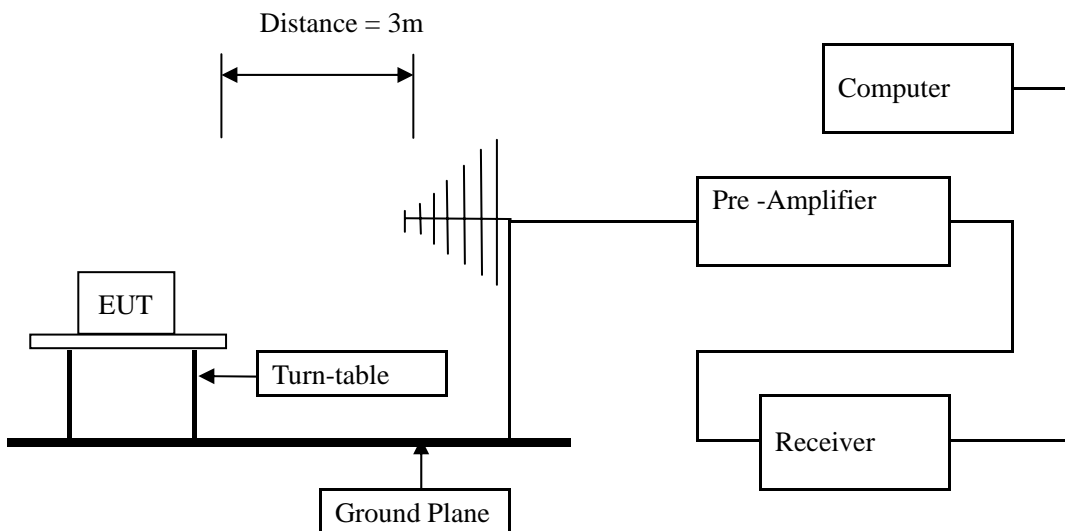

Block diagram of Test setup for frequency below 30MHz

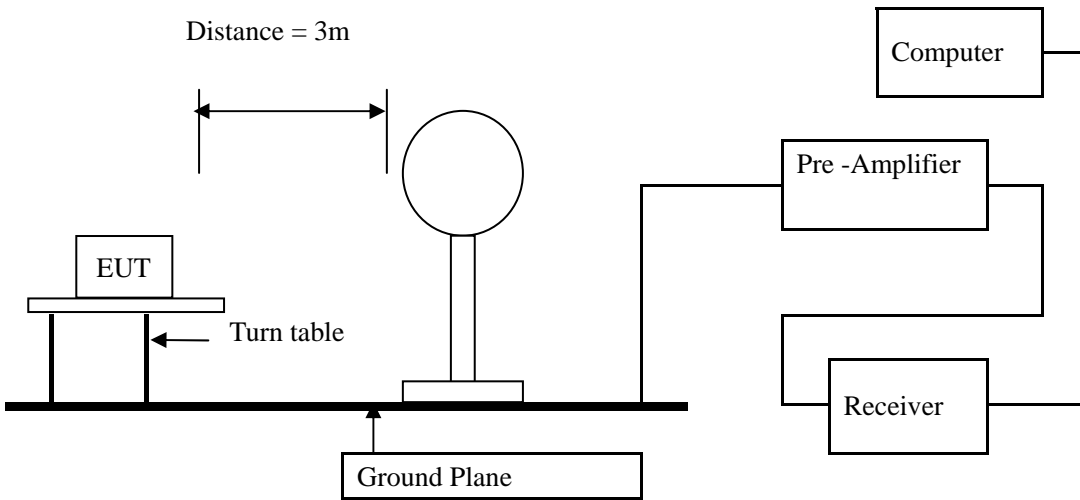

Block diagram of Test setup for frequency above 1GHz

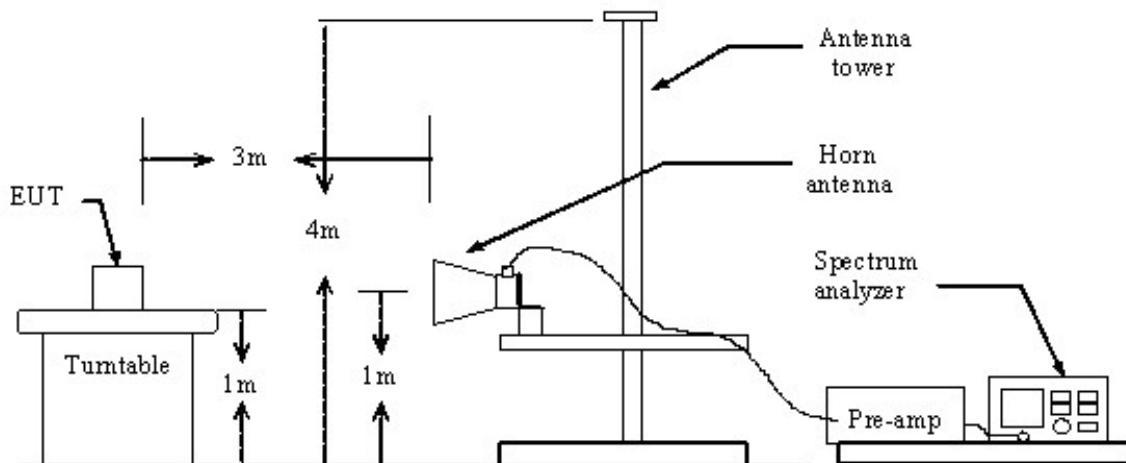

11.2.2 EUT Operating Condition

Operating condition is according to ANSI C63.10 -2009

11.2.3 Radiated Emission Limit

All emission from a digital device, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strength specified below:

Frequencies in restricted band are complied to limit on Paragraph 15.209.

Frequency Range (MHz)	Distance (m)	Field strength (dB μ V/m)
0.009-0.490	3	20log 2400/F (kHz) + 80
0.490-1.705	3	20log 24000/F (kHz) + 40
1.705-30	3	20log 30 + 40
30-88	3	40.0
88-216	3	43.5
216-960	3	46.0
Above 960	3	54.0

- Note:
- 1) RF Voltage (dBuV) = 20 log RF Voltage (uV)
 - 2) In the Above Table, the tighter limit applies at the band edges.
 - 3) Distance refers to the distance in meters between the measuring instrument antenna and the EUT
 - 4) This is a handheld device. The radiated emissions should be tested under 3-axes position (Lying, Side, and Stand), After pre-test. It was found that the worse radiated emission was get at the lying position.
 - 5) All scanning using PK detector. And the final emission level was get using QP detector for frequency range from 30-1000MHz.As to 1G-25G, the final emission level got using PK and AV detector.
 - 6) If measurement is made at 3m distance, then F.S Limitation at 3m distance is adjusted by using the formula $Ld1 = Ld2 * (d2/d1)$

11.2.4 Photo documentation of the test set-up

Please refer to the Section 16

11.2.5 Test Equipment:

Please refer to the Section 2

11.2.6 Test specification:

Environmental conditions: Temperature 22° C Humidity: 51% Atmospheric pressure: 103kPa

11.2.7 Test result

A Radiated Emission (9 kHz----30 MHz)


Note: 1) Emission Level=Reading+ Cable loss+ Antenna factor-Amp factor
2) The emission levels are 20 dB below the limit value, which are not reported. It is deemed to comply with the requirement

Result: Pass

Frequency (MHz)	Level@3m (dB μ V/m)	Antenna Polarity	Limit@3m (dB μ V/m)
--	--	V	--
--	--	H	--
--	--	V	--
--	--	H	--

B General Radiated Emissions Data
Radiated Emission In Horizontal (30MHz----1000MHz)


Please refer to following diagram for individual

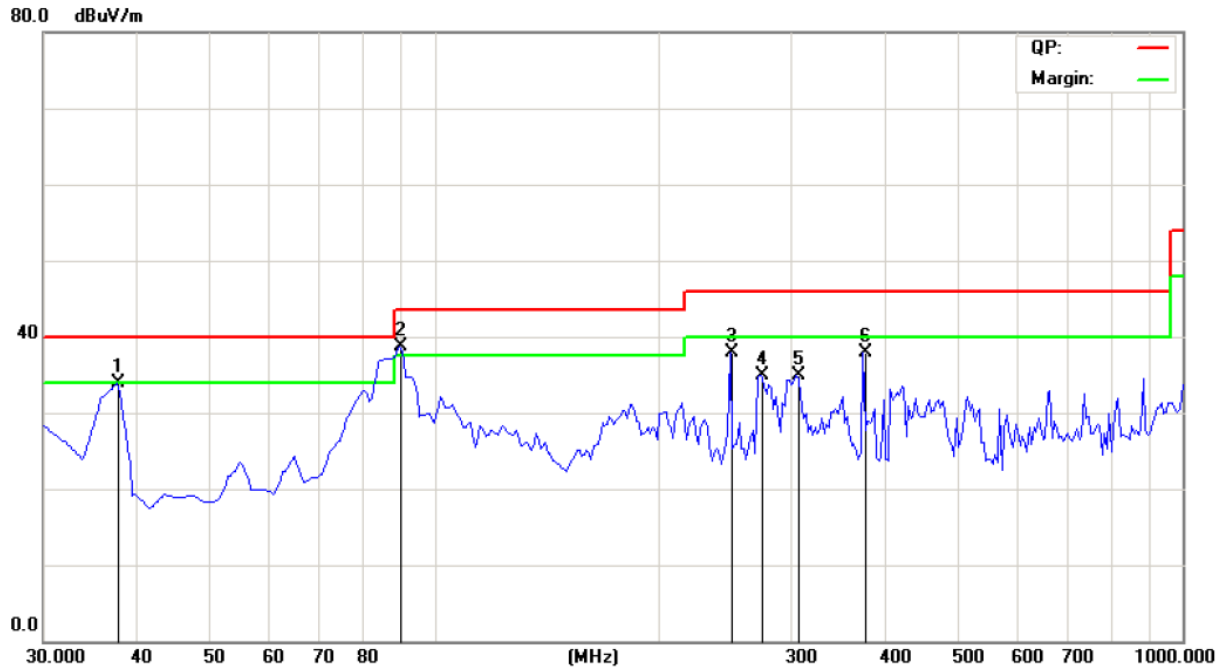

Frequency (MHz)	Level@3m (dB μ V/m)	Antenna Polarity	Limit@3m (dB μ V/m)
37.7754	32.90	H	40.00
90.2604	37.70	H	43.50
249.6593	36.82	H	46.00
272.9860	32.91	H	46.00
306.0321	35.97	H	46.00
374.0681	36.97	H	46.00

Radiated Emission In Vertical (30MHz----1000MHz)

Please refer to following diagram for individual

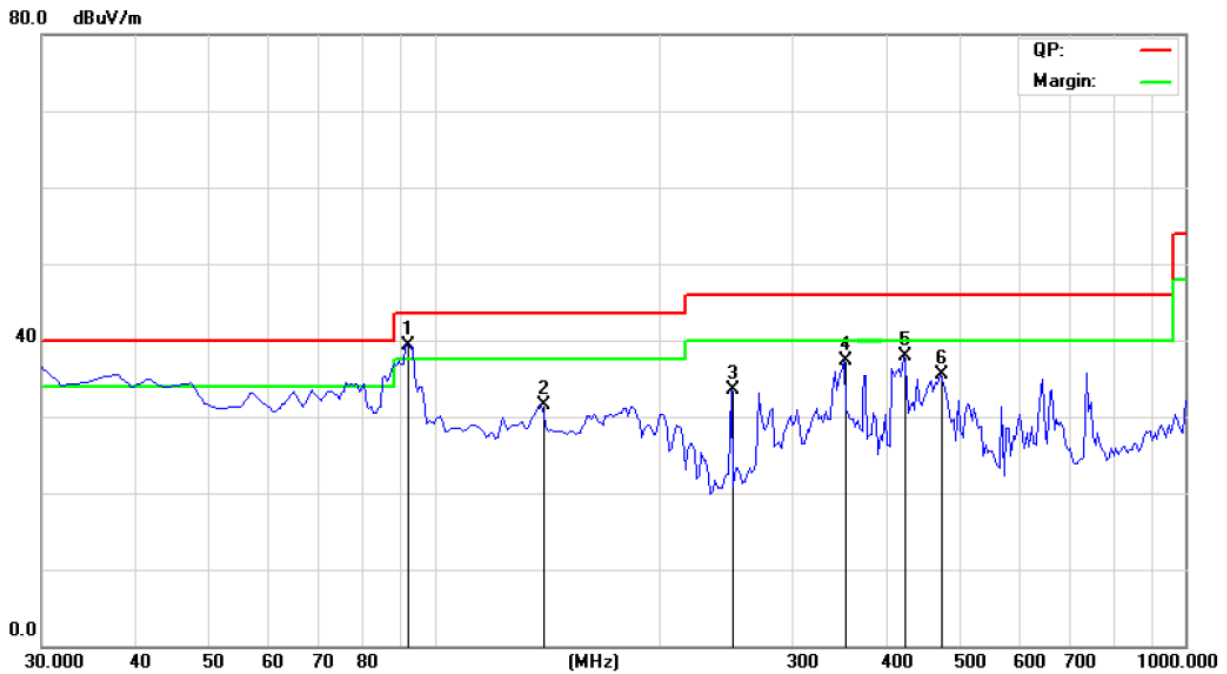

Frequency (MHz)	Level@3m (dB μ V/m)	Antenna Polarity	Limit@3m (dB μ V/m)
92.3461	39.37	V	43.50
138.8574	31.49	V	43.50
249.6574	33.59	V	46.00
352.6854	37.25	V	46.00
422.6653	37.92	V	46.00
473.2062	35.45	V	46.00

C Fundamental & Harmonics Radiated Emission Data (1000MHz-25000MHz)

IEEE 802.11b mode: Low channel: 2412 MHz									
Freq. (MHz)	Ant. Pol. H/V	Peak reading (dBuV)	AV reading (dBuV)	Correction Factor (dB)	Emission Level		Peak limit (dBuV/m)	AV limit (dBuV/m)	Margin (dB)
					Peak (dBuV/m)	AV (dBuV/m)			
1299.89	H	42.58	---	-4.20	38.38	---	74.00	54.00	-15.62
4824.00	H	55.26	---	-3.94	51.32	---	74.00	54.00	-2.68
5600.00	H	45.63	---	-2.83	42.80	---	74.00	54.00	-11.20
7236.00	H	46.85	---	0.52	47.37	---	74.00	54.00	-6.63
16884.00	H	40.69	---	6.73	47.42	---	74.00	54.00	-6.58
24120.00	H	41.42	---	8.11	49.53	---	74.00	54.00	-4.47
1310.01	V	41.57	---	-4.25	37.32	---	74.00	54.00	-16.68
4824.00	V	54.91	---	-3.94	50.97	---	74.00	54.00	-3.03
5600.00	V	43.18	---	-2.87	40.31	---	74.00	54.00	-13.69
7236.00	V	45.28	---	0.52	45.80	---	74.00	54.00	-8.20
16884.00	V	40.38	---	6.73	47.11	---	74.00	54.00	-6.89
24120.00	V	41.15	---	8.11	49.26	---	74.00	54.00	-4.74

Notes: 1) Measurements were conducted from 1 GHz to the 10th harmonic of highest fundamental frequency.

2) Radiated emissions measured in frequencies above 1GHz were made with peak detector and Average (AV) detector.

3) Average test would be performed if the peak readings were greater than the average limit.

4) Data of measurement shown “---“in the above table mean that the reading of emissions is attenuated more than 20 dB below the limits or the field strength is too small to be measured.

5) Emission Level=Peak (AV) Reading + Correction Factor;

Correction Factor= Antenna Factor + Cable loss – Pre-amplifier

6) Margin (dB) = Emission Level (Peak) (dBuV/m)-Average limit (dBuV/m)

IEEE 802.11b mode: Middle channel: 2437 MHz									
Freq. (MHz)	Ant. Pol. H/V	Peak reading (dBuV)	AV reading (dBuV)	Correction Factor (dB)	Emission Level		Peak limit (dBuV/m)	AV limit (dBuV/m)	Margin (dB)
					Peak (dBuV/m)	AV (dBuV/m)			
1299.89	H	43.05	---	-4.20	38.85	---	74.00	54.00	-15.15
4874.00	H	56.04	---	-3.98	52.06	---	74.00	54.00	-1.94
5600.00	H	45.26	---	-2.83	42.43	---	74.00	54.00	-11.57
7311.00	H	44.29	---	0.57	44.86	---	74.00	54.00	-9.14
17059.00	H	42.89	---	6.79	49.68	---	74.00	54.00	-4.32
24370.00	H	41.46	---	8.16	49.62	---	74.00	54.00	-4.38
1310.01	V	42.86	---	-4.25	38.61	---	74.00	54.00	-15.39
4874.00	V	55.62	---	-3.98	51.64	---	74.00	54.00	-2.36
5600.00	V	44.69	---	-2.87	41.82	---	74.00	54.00	-12.18
7311.00	V	43.15	---	0.57	43.72	---	74.00	54.00	-10.28
17059.00	V	41.62	---	6.79	48.41	---	74.00	54.00	-5.59
24370.00	V	42.21	---	8.16	50.37	---	74.00	54.00	-3.63

Notes: 1) Measurements were conducted from 1 GHz to the 10th harmonic of highest fundamental frequency.

2) Radiated emissions measured in frequencies above 1GHz were made with peak detector and Average (AV) detector.

3) Average test would be performed if the peak readings were greater than the average limit.

4) Data of measurement shown “---“in the above table mean that the reading of emissions is attenuated more than 20 dB below the limits or the field strength is too small to be measured.

5) Emission Level=Peak (AV) Reading + Correction Factor;

Correction Factor= Antenna Factor + Cable loss – Pre-amplifier

6) Margin (dB) = Emission Level (Peak) (dBuV/m)-Average limit (dBuV/m)

IEEE 802.11b mode: High channel: 2462 MHz									
Freq. (MHz)	Ant. Pol. H/V	Peak reading (dBuV)	AV reading (dBuV)	Correction Factor (dB)	Emission Level		Peak limit (dBuV/m)	AV limit (dBuV/m)	Margin (dB)
					Peak (dBuV/m)	AV (dBuV/m)			
1299.89	H	42.06	---	-4.20	37.86	---	74.00	54.00	-16.14
4924.00	H	55.77	---	-3.98	51.79	---	74.00	54.00	-2.21
5600.00	H	42.42	---	-2.83	39.59	---	74.00	54.00	-14.41
7386.00	H	44.25	---	0.57	44.82	---	74.00	54.00	-9.18
17234.00	H	41.06	---	6.79	47.85	---	74.00	54.00	-6.15
24620.00	H	40.38	---	8.16	48.54	---	74.00	54.00	-5.46
1310.01	V	43.15	---	-4.25	38.90	---	74.00	54.00	-15.1
4924.00	V	55.01	---	-3.98	51.03	---	74.00	54.00	-2.97
5600.00	V	41.96	---	-2.87	39.09	---	74.00	54.00	-14.91
7386.00	V	43.79	---	0.57	44.36	---	74.00	54.00	-9.64
17234.00	V	40.82	---	6.79	47.61	---	74.00	54.00	-6.39
24620.00	V	41.99	---	8.16	50.15	---	74.00	54.00	-3.85

Notes: 1) Measurements were conducted from 1 GHz to the 10th harmonic of highest fundamental frequency.

2) Radiated emissions measured in frequencies above 1GHz were made with peak detector and Average (AV) detector.

3) Average test would be performed if the peak readings were greater than the average limit.

4) Data of measurement shown “---“in the above table mean that the reading of emissions is attenuated more than 20 dB below the limits or the field strength is too small to be measured.

5) Emission Level=Peak (AV) Reading + Correction Factor;

Correction Factor= Antenna Factor + Cable loss – Pre-amplifier

6) Margin (dB) = Emission Level (Peak) (dBuV/m)-Average limit (dBuV/m)

IEEE 802.11g mode: Low channel: 2412 MHz									
Freq. (MHz)	Ant. Pol. H/V	Peak reading (dBuV)	AV reading (dBuV)	Correction Factor (dB)	Emission Level		Peak limit (dBuV/m)	AV limit (dBuV/m)	Margin (dB)
					Peak (dBuV/m)	AV (dBuV/m)			
1299.89	H	42.15	---	-4.20	37.95	---	74.00	54.00	-16.05
4824.00	H	54.29	---	-3.94	50.35	---	74.00	54.00	-3.65
5600.00	H	43.26	---	-2.83	40.43	---	74.00	54.00	-13.57
7236.00	H	44.26	---	0.52	44.78	---	74.00	54.00	-9.22
16884.00	H	43.21	---	6.73	49.94	---	74.00	54.00	-4.06
24120.00	H	41.69	---	8.11	49.80	---	74.00	54.00	-4.20
1310.01	V	41.68	---	-4.25	37.43	---	74.00	54.00	-16.57
4824.00	V	53.16	---	-3.94	49.22	---	74.00	54.00	-4.78
5600.00	V	43.95	---	-2.87	41.08	---	74.00	54.00	-12.92
7236.00	V	45.04	---	0.52	45.56	---	74.00	54.00	-8.44
16884.00	V	42.51	---	6.73	49.24	---	74.00	54.00	-4.76
24120.00	V	40.05	---	8.11	48.16	---	74.00	54.00	-5.84

Notes: 1) Measurements were conducted from 1 GHz to the 10th harmonic of highest fundamental frequency.

2) Radiated emissions measured in frequencies above 1GHz were made with peak detector and Average (AV) detector.

3) Average test would be performed if the peak readings were greater than the average limit.

4) Data of measurement shown “---“in the above table mean that the reading of emissions is attenuated more than 20 dB below the limits or the field strength is too small to be measured.

5) Emission Level=Peak (AV) Reading + Correction Factor;

Correction Factor= Antenna Factor + Cable loss – Pre-amplifier

6) Margin (dB) = Emission Level (Peak) (dBuV/m)-Average limit (dBuV/m)

IEEE 802.11g mode: Middle channel: 2437 MHz									
Freq. (MHz)	Ant. Pol. H/V	Peak reading (dBuV)	AV reading (dBuV)	Correction Factor (dB)	Emission Level		Peak limit (dBuV/m)	AV limit (dBuV/m)	Margin (dB)
					Peak (dBuV/m)	AV (dBuV/m)			
1299.89	H	40.13	---	-4.20	35.93	---	74.00	54.00	-18.07
4874.00	H	52.56	---	-3.98	48.58	---	74.00	54.00	-5.42
5600.00	H	43.19	---	-2.83	40.36	---	74.00	54.00	-13.64
7311.00	H	45.27	---	0.57	45.84	---	74.00	54.00	-8.16
17059.00	H	41.80	---	6.79	48.59	---	74.00	54.00	-5.41
24370.00	H	42.06	---	8.16	50.22	---	74.00	54.00	-3.78
1310.01	V	41.07	---	-4.25	36.82	---	74.00	54.00	-17.18
4874.00	V	51.18	---	-3.98	47.20	---	74.00	54.00	-6.80
5600.00	V	42.29	---	-2.87	39.42	---	74.00	54.00	-14.58
7311.00	V	46.62	---	0.57	47.19	---	74.00	54.00	-6.81
17059.00	V	40.47	---	6.79	47.26	---	74.00	54.00	-6.74
24370.00	V	41.29	---	8.16	49.45	---	74.00	54.00	-4.55

Notes: 1) Measurements were conducted from 1 GHz to the 10th harmonic of highest fundamental frequency.

2) Radiated emissions measured in frequencies above 1GHz were made with peak detector and Average (AV) detector.

3) Average test would be performed if the peak readings were greater than the average limit.

4) Data of measurement shown “---“in the above table mean that the reading of emissions is attenuated more than 20 dB below the limits or the field strength is too small to be measured.

5) Emission Level=Peak (AV) Reading + Correction Factor;

Correction Factor= Antenna Factor + Cable loss – Pre-amplifier

6) Margin (dB) = Emission Level (Peak) (dBuV/m)-Average limit (dBuV/m)

IEEE 802.11g mode: High channel: 2462 MHz									
Freq. (MHz)	Ant. Pol. H/V	Peak reading (dBuV)	AV reading (dBuV)	Correction Factor (dB)	Emission Level		Peak limit (dBuV/m)	AV limit (dBuV/m)	Margin (dB)
					Peak (dBuV/m)	AV (dBuV/m)			
1299.89	H	42.96	---	-4.20	38.76	---	74.00	54.00	-15.24
4924.00	H	55.02	---	-3.98	51.04	---	74.00	54.00	-2.96
5600.00	H	44.57	---	-2.83	41.74	---	74.00	54.00	-12.26
7386.00	H	45.38	---	0.57	45.95	---	74.00	54.00	-8.05
17234.00	H	41.85	---	6.79	48.64	---	74.00	54.00	-5.36
24620.00	H	43.03	---	8.16	51.19	---	74.00	54.00	-2.81
1310.01	V	41.27	---	-4.25	37.02	---	74.00	54.00	-16.98
4924.00	V	53.96	---	-3.98	49.98	---	74.00	54.00	-4.02
5600.00	V	44.93	---	-2.87	42.06	---	74.00	54.00	-11.94
7386.00	V	47.51	---	0.57	48.08	---	74.00	54.00	-5.92
17234.00	V	40.47	---	6.79	47.26	---	74.00	54.00	-6.74
24620.00	V	41.22	---	8.16	49.38	---	74.00	54.00	-4.62

Notes: 1) Measurements were conducted from 1 GHz to the 10th harmonic of highest fundamental frequency.

2) Radiated emissions measured in frequencies above 1GHz were made with peak detector and Average (AV) detector.

3) Average test would be performed if the peak readings were greater than the average limit.

4) Data of measurement shown “---“in the above table mean that the reading of emissions is attenuated more than 20 dB below the limits or the field strength is too small to be measured.

5) Emission Level=Peak (AV) Reading + Correction Factor;

Correction Factor= Antenna Factor + Cable loss – Pre-amplifier

6) Margin (dB) = Emission Level (Peak) (dBuV/m)-Average limit (dBuV/m)

IEEE 802.11n(HT20) mode: Low channel: 2412 MHz									
Freq. (MHz)	Ant. Pol. H/V	Peak reading (dBuV)	AV reading (dBuV)	Correction Factor (dB)	Emission Level		Peak limit (dBuV/m)	AV limit (dBuV/m)	Margin (dB)
					Peak (dBuV/m)	AV (dBuV/m)			
1299.89	H	40.64	---	-4.20	36.44	---	74.00	54.00	-17.56
4824.00	H	53.51	---	-3.94	49.57	---	74.00	54.00	-4.43
5600.00	H	43.62	---	-2.83	40.79	---	74.00	54.00	-13.21
7236.00	H	45.75	---	0.52	46.27	---	74.00	54.00	-7.73
16884.00	H	41.93	---	6.73	48.66	---	74.00	54.00	-5.34
24120.00	H	40.45	---	8.11	48.56	---	74.00	54.00	-5.44
1310.01	V	41.44	---	-4.25	37.19	---	74.00	54.00	-16.81
4824.00	V	55.19	---	-3.94	51.25	---	74.00	54.00	-2.75
5600.00	V	42.45	---	-2.87	39.58	---	74.00	54.00	-14.42
7236.00	V	46.96	---	0.52	47.48	---	74.00	54.00	-6.52
16884.00	V	40.41	---	6.73	47.14	---	74.00	54.00	-6.86
24120.00	V	41.18	---	8.11	49.29	---	74.00	54.00	-4.71

Notes: 1) Measurements were conducted from 1 GHz to the 10th harmonic of highest fundamental frequency.

2) Radiated emissions measured in frequencies above 1GHz were made with peak detector and Average (AV) detector.

3) Average test would be performed if the peak readings were greater than the average limit.

4) Data of measurement shown “---“in the above table mean that the reading of emissions is attenuated more than 20 dB below the limits or the field strength is too small to be measured.

5) Emission Level=Peak (AV) Reading + Correction Factor;

Correction Factor= Antenna Factor + Cable loss – Pre-amplifier

6) Margin (dB) = Emission Level (Peak) (dBuV/m)-Average limit (dBuV/m)

IEEE 802.11n(HT20) mode: Middle channel: 2437 MHz									
Freq. (MHz)	Ant. Pol. H/V	Peak reading (dBuV)	AV reading (dBuV)	Correction Factor (dB)	Emission Level		Peak limit (dBuV/m)	AV limit (dBuV/m)	Margin (dB)
					Peak (dBuV/m)	AV (dBuV/m)			
1299.89	H	41.82	---	-4.20	37.62	---	74.00	54.00	-16.38
4874.00	H	55.20	---	-3.98	51.22	---	74.00	54.00	-2.78
5600.00	H	44.37	---	-2.83	41.54	---	74.00	54.00	-12.46
7311.00	H	46.05	---	0.57	46.62	---	74.00	54.00	-7.38
17059.00	H	42.55	---	6.79	49.34	---	74.00	54.00	-4.66
24370.00	H	41.23	---	8.16	49.39	---	74.00	54.00	-4.61
1310.01	V	39.17	---	-4.25	34.92	---	74.00	54.00	-19.08
4874.00	V	53.71	---	-3.98	49.73	---	74.00	54.00	-4.27
5600.00	V	43.08	---	-2.87	40.21	---	74.00	54.00	-13.79
7311.00	V	44.22	---	0.57	44.79	---	74.00	54.00	-9.21
17059.00	V	41.15	---	6.79	47.94	---	74.00	54.00	-6.06
24370.00	V	39.46	---	8.16	47.62	---	74.00	54.00	-6.38

Notes: 1) Measurements were conducted from 1 GHz to the 10th harmonic of highest fundamental frequency.

2) Radiated emissions measured in frequencies above 1GHz were made with peak detector and Average (AV) detector.

3) Average test would be performed if the peak readings were greater than the average limit.

4) Data of measurement shown “---“in the above table mean that the reading of emissions is attenuated more than 20 dB below the limits or the field strength is too small to be measured.

5) Emission Level=Peak (AV) Reading + Correction Factor;

Correction Factor= Antenna Factor + Cable loss – Pre-amplifier

6) Margin (dB) = Emission Level (Peak) (dBuV/m)-Average limit (dBuV/m)

IEEE 802.11n(HT20) mode: High channel: 2462 MHz									
Freq. (MHz)	Ant. Pol. H/V	Peak reading (dBuV)	AV reading (dBuV)	Correction Factor (dB)	Emission Level		Peak limit (dBuV/m)	AV limit (dBuV/m)	Margin (dB)
					Peak (dBuV/m)	AV (dBuV/m)			
1299.89	H	42.93	---	-4.20	38.73	---	74.00	54.00	-15.27
4924.00	H	53.50	---	-3.98	49.52	---	74.00	54.00	-4.48
5600.00	H	42.64	---	-2.83	39.81	---	74.00	54.00	-14.19
7386.00	H	46.67	---	0.57	47.24	---	74.00	54.00	-6.76
17234.00	H	43.00	---	6.79	49.79	---	74.00	54.00	-4.21
24620.00	H	41.29	---	8.16	49.45	---	74.00	54.00	-4.55
1310.01	V	40.96	---	-4.25	36.71	---	74.00	54.00	-17.29
4924.00	V	55.79	---	-3.98	51.81	---	74.00	54.00	-2.19
5600.00	V	41.45	---	-2.87	38.58	---	74.00	54.00	-15.42
7386.00	V	44.50	---	0.57	45.07	---	74.00	54.00	-8.93
17234.00	V	41.78	---	6.79	48.57	---	74.00	54.00	-5.43
24620.00	V	42.00	---	8.16	50.16	---	74.00	54.00	-3.84

Notes: 1) Measurements were conducted from 1 GHz to the 10th harmonic of highest fundamental frequency.

2) Radiated emissions measured in frequencies above 1GHz were made with peak detector and Average (AV) detector.

3) Average test would be performed if the peak readings were greater than the average limit.

4) Data of measurement shown “---“in the above table mean that the reading of emissions is attenuated more than 20 dB below the limits or the field strength is too small to be measured.

5) Emission Level=Peak (AV) Reading + Correction Factor;

Correction Factor= Antenna Factor + Cable loss – Pre-amplifier

6) Margin (dB) = Emission Level (Peak) (dBuV/m)-Average limit (dBuV/m)

IEEE 802.11n(HT40) mode: Low channel: 2422 MHz									
Freq. (MHz)	Ant. Pol. H/V	Peak reading (dBuV)	AV reading (dBuV)	Correction Factor (dB)	Emission Level		Peak limit (dBuV/m)	AV limit (dBuV/m)	Margin (dB)
					Peak (dBuV/m)	AV (dBuV/m)			
1299.89	H	39.67	---	-4.20	35.47	---	74.00	54.00	-18.53
4824.00	H	53.52	---	-3.94	49.58	---	74.00	54.00	-4.42
5600.00	H	43.46	---	-2.83	40.63	---	74.00	54.00	-13.37
7236.00	H	45.93	---	0.52	46.45	---	74.00	54.00	-7.55
16884.00	H	43.50	---	6.73	50.23	---	74.00	54.00	-3.77
24120.00	H	41.48	---	8.11	49.59	---	74.00	54.00	-4.41
1310.01	V	41.48	---	-4.25	37.23	---	74.00	54.00	-16.77
4824.00	V	56.20	---	-3.94	52.26	---	74.00	54.00	-1.74
5600.00	V	42.48	---	-2.87	39.61	---	74.00	54.00	-14.39
7236.00	V	44.01	---	0.52	44.53	---	74.00	54.00	-9.47
16884.00	V	41.46	---	6.73	48.19	---	74.00	54.00	-5.81
24120.00	V	39.24	---	8.11	47.35	---	74.00	54.00	-6.65

Notes: 1) Measurements were conducted from 1 GHz to the 10th harmonic of highest fundamental frequency.

2) Radiated emissions measured in frequencies above 1GHz were made with peak detector and Average (AV) detector.

3) Average test would be performed if the peak readings were greater than the average limit.

4) Data of measurement shown “---“in the above table mean that the reading of emissions is attenuated more than 20 dB below the limits or the field strength is too small to be measured.

5) Emission Level=Peak (AV) Reading + Correction Factor;

Correction Factor= Antenna Factor + Cable loss – Pre-amplifier

6) Margin (dB) = Emission Level (Peak) (dBuV/m)-Average limit (dBuV/m)

IEEE 802.11n(HT40) mode: Middle channel: 2437 MHz									
Freq. (MHz)	Ant. Pol. H/V	Peak reading (dBuV)	AV reading (dBuV)	Correction Factor (dB)	Emission Level		Peak limit (dBuV/m)	AV limit (dBuV/m)	Margin (dB)
					Peak (dBuV/m)	AV (dBuV/m)			
1299.89	H	41.47	---	-4.20	37.27	---	74.00	54.00	-16.73
4874.00	H	56.91	---	-3.98	52.93	---	74.00	54.00	-1.07
5600.00	H	43.55	---	-2.83	40.72	---	74.00	54.00	-13.28
7311.00	H	46.67	---	0.57	47.24	---	74.00	54.00	-6.76
17059.00	H	42.99	---	6.79	49.78	---	74.00	54.00	-4.22
24370.00	H	41.50	---	8.16	49.66	---	74.00	54.00	-4.34
1310.01	V	43.22	---	-4.25	38.97	---	74.00	54.00	-15.03
4874.00	V	55.72	---	-3.98	51.74	---	74.00	54.00	-2.26
5600.00	V	42.79	---	-2.87	39.92	---	74.00	54.00	-14.08
7311.00	V	45.73	---	0.57	46.30	---	74.00	54.00	-7.70
17059.00	V	40.72	---	6.79	47.51	---	74.00	54.00	-6.49
24370.00	V	42.31	---	8.16	50.47	---	74.00	54.00	-3.53

Notes: 1) Measurements were conducted from 1 GHz to the 10th harmonic of highest fundamental frequency.

2) Radiated emissions measured in frequencies above 1GHz were made with peak detector and Average (AV) detector.

3) Average test would be performed if the peak readings were greater than the average limit.

4) Data of measurement shown “---“in the above table mean that the reading of emissions is attenuated more than 20 dB below the limits or the field strength is too small to be measured.

5) Emission Level=Peak (AV) Reading + Correction Factor;

Correction Factor= Antenna Factor + Cable loss – Pre-amplifier

6) Margin (dB) = Emission Level (Peak) (dBuV/m)-Average limit (dBuV/m)

IEEE 802.11n(H40) mode: High channel: 2452 MHz									
Freq. (MHz)	Ant. Pol. H/V	Peak reading (dBuV)	AV reading (dBuV)	Correction Factor (dB)	Emission Level		Peak limit (dBuV/m)	AV limit (dBuV/m)	Margin (dB)
					Peak (dBuV/m)	AV (dBuV/m)			
1299.89	H	41.13	---	-4.20	36.93	---	74.00	54.00	-17.07
4924.00	H	53.62	---	-3.98	49.64	---	74.00	54.00	-4.36
5600.00	H	44.78	---	-2.83	41.95	---	74.00	54.00	-12.05
7386.00	H	45.81	---	0.57	46.38	---	74.00	54.00	-7.62
17234.00	H	42.13	---	6.79	48.92	---	74.00	54.00	-5.08
24620.00	H	41.38	---	8.16	49.54	---	74.00	54.00	-4.46
1310.01	V	43.06	---	-4.25	38.81	---	74.00	54.00	-15.19
4924.00	V	51.91	---	-3.98	47.93	---	74.00	54.00	-6.07
5600.00	V	42.56	---	-2.87	39.69	---	74.00	54.00	-14.31
7386.00	V	46.58	---	0.57	47.15	---	74.00	54.00	-6.85
17234.00	V	40.89	---	6.79	47.68	---	74.00	54.00	-6.32
24620.00	V	42.07	---	8.16	50.23	---	74.00	54.00	-3.77

Notes: 1) Measurements were conducted from 1 GHz to the 10th harmonic of highest fundamental frequency.

2) Radiated emissions measured in frequencies above 1GHz were made with peak detector and Average (AV) detector.

3) Average test would be performed if the peak readings were greater than the average limit.

4) Data of measurement shown “---“in the above table mean that the reading of emissions is attenuated more than 20 dB below the limits or the field strength is too small to be measured.

5) Emission Level=Peak (AV) Reading + Correction Factor;

Correction Factor= Antenna Factor + Cable loss – Pre-amplifier

6) Margin (dB) = Emission Level (Peak) (dBuV/m)-Average limit (dBuV/m)

12.0 Antenna Requirement

12.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitter antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

12.2 Antenna Specification

According to the manufacturer declared, the EUT has a SMA antenna; the directional gain of antenna is 0 dBi, A reverse SMA connector (R-SMA) is considered unique. Therefore the EUT is considered sufficient to comply with the provision.




13.0 FCC ID Label

FCC ID: 2AA52MK5

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

The label must not be a stick-on paper label. The label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

Mark Location:

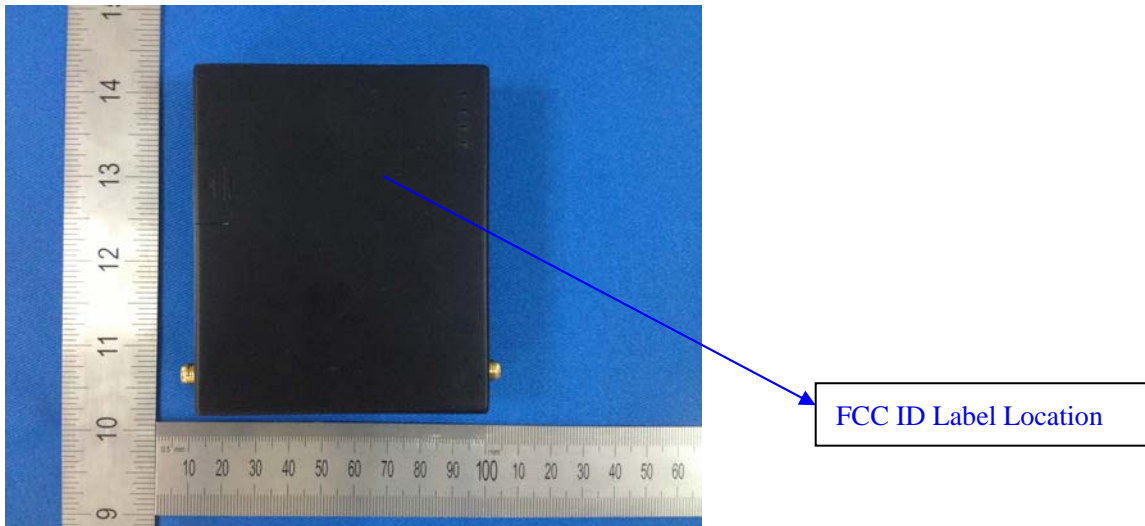

--End of the report--