

**ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT
INTENTIONAL RADIATOR CERTIFICATION TO
FCC PART 15 SUBPART C
REQUIREMENTS**

OF

LIFX GU10 Wi-Fi Downlight

MODEL No.: BUL-11-GU10-G

FCC ID: 2AA53-LIFX02

Trade Mark: LIFX

REPORT NO: ES140625234E1

ISSUE DATE: July 31, 2014

Prepared for
LIFI LABS INC
524 Union Street #309, San Francisco, CA, USA, 94133

Prepared by
SHENZHEN EMTEK CO., LTD

**Bldg 69, Majialong Industry Zone, Nanshan District,
Shenzhen, Guangdong, China**
TEL: 86-755-26954280
FAX: 86-755-26954282

VERIFICATION OF COMPLIANCE

Applicant:	LIFI LABS INC 524 Union Street #309, San Francisco, CA, USA, 94133
Manufacturer:	LIFI LABS INC 524 Union Street #309, San Francisco, CA, USA, 94133
Product Description:	LIFX GU10 Wi-Fi Downlight
Model Number:	BUL-11-GU10-G
File Number:	ES140625234E1
Date of Test:	July 23, 2014 to July 31, 2014

We hereby certify that:

The above equipment was tested by SHENZHEN EMTEK CO., LTD. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4 (2009) and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 15.247 REQUIREMENTS

The test results of this report relate only to the tested sample identified in this report.

Date of Test : July 23, 2014 to July 31, 2014

Prepared by : Joe Xia
King Kong Xia/Editor

Reviewer : Jack Li
Jack Li/Supervisor

Approve & Authorized Signer : Lisa Wang
Lisa Wang/Manager

Table of Contents

1. General Information	5
1.1 Product Description.....	5
1.2 Related Submittal(s) / Grant(s)	5
1.3 Test Methodology	6
1.4 Special Accessories.....	6
1.5 Equipment Modifications.....	6
1.6 Test Facility.....	6
2. System Test Configuration.....	7
2.1 EUT Configuration	7
2.2 EUT Exercise.....	7
2.3 Test Procedure.....	7
2.4 Configuration of Tested System.....	7
3. Description of Test Modes.....	9
4. Summary of Test Results	10
N/A	10
5. Conducted Emissions Test	11
5.1 Measurement Procedure.....	11
5.2 Test SET-UP (Block Diagram of Configuration)	11
5.3 Measurement Equipment Used	11
5.4 Conducted Emission Limit.....	11
5.5 Measurement Result.....	12
6. Radiated Emission Test	14
6.1 Measurement Procedure.....	14
6.2 Test SET-UP (Block Diagram of Configuration)	14
6.3 Measurement Equipment Used	15
6.4 Radiated Emission Limit.....	16
6.5 Measurement Result.....	17
7. 6dB Bandwidth Test	26
7.1 Measurement Procedure.....	26
7.2 Test SET-UP (Block Diagram of Configuration)	26
7.3 Measurement Equipment Used	26
7.4 Measurement Results	26
8. Maximum Peak Output Power Test.....	33
8.1 Measurement Procedure.....	33
8.2 Test SET-UP (Block Diagram of Configuration)	33
8.3 Measurement Equipment Used	33
8.4 Peak Power output limit.....	33
8.5 Measurement Results	33
9. Band Edge Test	35
9.1 Measurement Procedure.....	35
9.2 Test SET-UP (Block Diagram of Configuration)	35
9.3 Measurement Equipment Used	35
9.4 Measurement Results	35
10. Power Density	40
10.1 Test Equipment	40
10.2 Measuring Instruments and Setting	40

10.3	Test Procedures	40
10.4	Block Diagram of Test Setup	40
10.5	Limit.....	40
10.6	Test Result.....	41
11.	Antenna Port Emission	47
11.1	Test Equipment	47
11.2	Measuring Instruments and Setting	47
11.3	Test Procedures	47
11.4	Block Diagram of Test setup	47
11.5	Test Result.....	47
12.	Antenna Application	51
12.1	Antenna Requirement	51
12.2	Result	51
13.	Uncertainty	52

1. General Information

1.1 Product Description

A major technical descriptions of EUT is described as following:

- A). Standards: IEEE802.11b/g/n, IEEE802.15.4
- B). Operation Frequency: Zigbee: 2405-2480MHz, WIFI: 2412-2462MHz;
- C). Modulation: QPSK for Zigbee
 - OFDM with BPSK/QPSK/16QAM/64QAM for 802.11g/n,
 - DSSS with DBPSK/DQPSK/CCK for 802.11b for Wifi
- D). Number of Channel: Wifi: 11Channels;
 - Zigbee: 16 Channels;
- D). Channel spacing:5MHz
- E).Conducted Power:-3.42dBm for Zigbee, 16.12dBm for Wifi
- F) Antenna Gain: 1.1dBi for Zigbee, 1.5dBi for Wifi
- G). Antenna Type: Chip Antenna
- H). Power Supply: AC 100-240V 0.15A 12.5W 50/60Hz

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	5	2432	9	2452
2	2417	6	2437	10	2457
3	2422	7	2442	11	2462
4	2427	8	2447		

Note:

- 1. This device is included Wifi and Zigbee transceiver function.
- 2. Test of channel was included the lowest middle and highest frequency in lowest data rate and to perform the test, then record on this report.

1.2 Related Submittal(s) / Grant(s)

This submittal(s) (test report) is intended for FCC ID: 2AA53-LIFX02 filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules, The composite system is compliance with Subpart B is authorized under a DOC procedure.

1.3 Test Methodology

All the test program has follow FCC new test procedure KDB558074 D01 v03r01, Both conducted and radiated testing was performed according to the procedures in ANSI C63.10 (2009). Radiated testing was performed at an antenna to EUT distance 3 meters.

1.4 Special Accessories

Not available for this EUT intended for grant.

1.5 Equipment Modifications

Not available for this EUT intended for grant.

1.6 Test Facility

Site Description

EMC Lab. : Accredited by CNAS, 2013.10.29
The certificate is valid until 2016.10.28
The Laboratory has been assessed and proved to be in compliance with CNAS/CL01: 2006(identical to ISO/IEC17025: 2005)
The Certificate Registration Number is L2291

Accredited by TUV Rheinland Shenzhen 2010.5.25
The Laboratory has been assessed according to the requirements ISO/IEC 17025

Accredited by FCC, April 17, 2013
The Certificate Registration Number is 406365.

Accredited by Industry Canada, March 05, 2010
The Certificate Registration Number is 46405-4480.

Name of Firm

: SHENZHEN EMTEK CO., LTD.

Site Location

: Bldg 69, Majialong Industry Zone,
Nanshan District, Shenzhen, Guangdong, China

2. System Test Configuration

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT Exercise

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

2.3 Test Procedure

2.3.1 Conducted Emissions

The EUT is placed on a turn table which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4-2009 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode.

2.3.2 Radiated Emissions

The EUT is placed on a turn table which is 0.8 m above ground plane. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. Emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 13.1.4.1 of ANSI C63.4-2009.

2.4 Configuration of Tested System

Fig. 2-1 Configuration of Tested System




Table 2-1 Equipment Used in Tested System

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.	Note
1.	LIFX GU10 Wi-Fi Downlight	LIFX	BUL-11-GU10-G	2AA53-LIFX02	N/A	EUT

Note:

- (1) Unless otherwise denoted as EUT in "Remark" column, device(s) used in tested system is a support equipment.

3. Description of Test Modes

The Transmitter of EUT is an Mobile Internet Device and powered by host equipment; these is Digital Transmission system (DTS) and have modulation OFDM, DSSS, DBPSK, DQPSK, CCK, 16QAM, 64QAM. According exploratory test, EUT will have maximum output power in those data rate (802.11b: 1 Mbps; 802.11g: 6 Mbps; 802.11n: MCS0), so those data rate were used for all test.

The equipment enables high-speed access without wires to network assets. This adapter uses the IEEE 802.11 protocol to enable wireless communications between the host and Wireless rooter.

For 802.11b/g/n HT20:

1. For lowest channel : 2412MHz (Channel 1)
2. For middle channel : 2437MHz (Channel 6)
3. For highest channel : 2462MHz (Channel 11)

4. Summary of Test Results


FCC Rules	Description Of Test	Result
§15.247(a)(2)	6dB bandwidth	Pass
§15.247(b)(3)	Max Peak output Power test	Pass
§15.247(e)	Power density	Pass
§15.247(d)	Band edge test	Pass
§15.207	AC Power Conducted Emission	Pass
§15.247(d), §15.209	Radiated Emission	Pass
§15.247(d)	Antenna Port Emission	Pass
§15.247(b)&§15.203	Antenna Application	Pass
N/A	99%dB Bandwidth	Pass

5. Conducted Emissions Test

5.1 Measurement Procedure

1. The EUT was placed on a table which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete.

5.2 Test SET-UP (Block Diagram of Configuration)

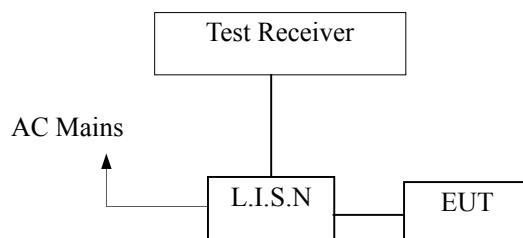

5.3 Measurement Equipment Used


Conducted Emission Test Site					
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Test Receiver	Rohde & Schwarz	ESCS30	828985/018	05/17/2014	05/16/2015
L.I.S.N.	Schwarzbeck	NNLK8129	8129203	05/17/2014	05/16/2015
50Ω Coaxial Switch	Anritsu	MP59B	M20531	N/A	N/A
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100006	05/17/2014	05/16/2015
Voltage Probe	Rohde & Schwarz	TK9416	N/A	05/17/2014	05/16/2015
I.S.N	Rohde & Schwarz	ENY22	1109.9508.02	05/17/2014	05/16/2015

5.4 Conducted Emission Limit

Conducted Emission		Quasi-peak	Average
Frequency(MHz)			
0.15-0.5		66-56	56-46
0.5-5.0		56	46
5.0-30.0		60	50

Note: 1. The lower limit shall apply at the transition frequencies
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

5.5 Measurement Result

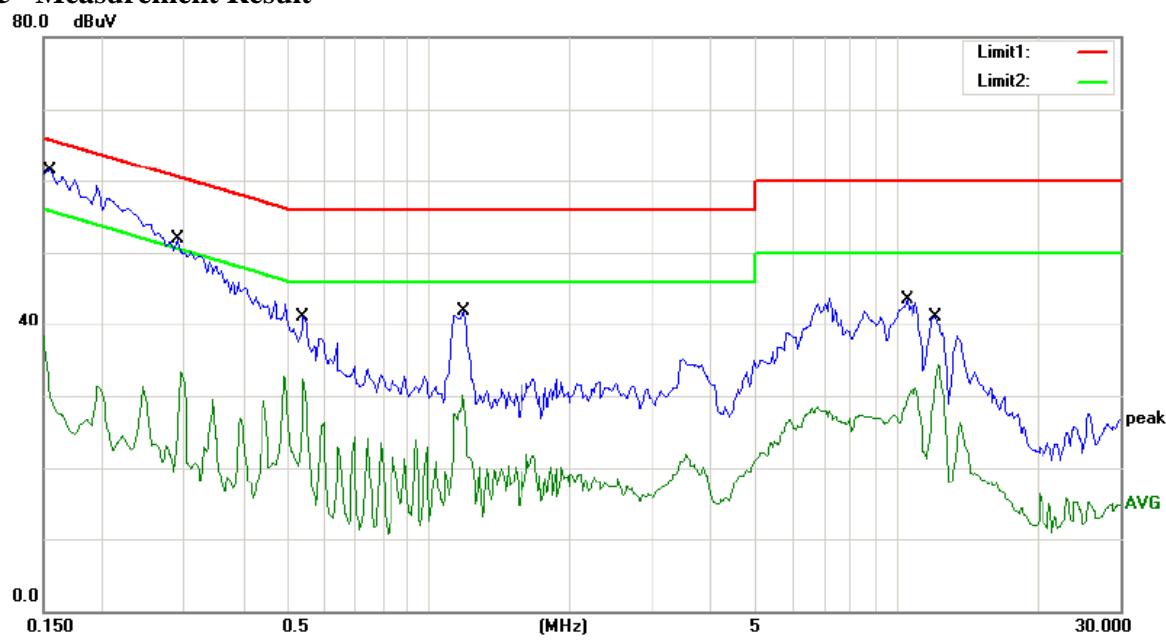

Site Conduction #1

Phase: **L1**

Temperature: 24

Limit: (CE)FCC PART 15 class B_QP

Power: AC 120V/60Hz


Humidity: 53 %

Mode: ON

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV				
1	*	0.1550	53.00	0.00	53.00	65.73	-12.73	QP	
2		0.1550	38.27	0.00	38.27	55.73	-17.46	AVG	
3		0.2900	43.00	0.00	43.00	60.52	-17.52	QP	
4		0.2900	33.26	0.00	33.26	50.52	-17.26	AVG	
5		0.5400	40.00	0.00	40.00	56.00	-16.00	QP	
6		0.5400	32.22	0.00	32.22	46.00	-13.78	AVG	
7		1.1850	38.00	0.00	38.00	56.00	-18.00	QP	
8		1.1850	30.09	0.00	30.09	46.00	-15.91	AVG	
9		10.5250	43.55	0.00	43.55	60.00	-16.45	QP	
10		10.5250	31.12	0.00	31.12	50.00	-18.88	AVG	
11		12.3000	41.15	0.00	41.15	60.00	-18.85	QP	
12		12.3000	34.35	0.00	34.35	50.00	-15.65	AVG	

*:Maximum data x:Over limit !:over margin Comment: Factor build in receiver. Operator: Jason

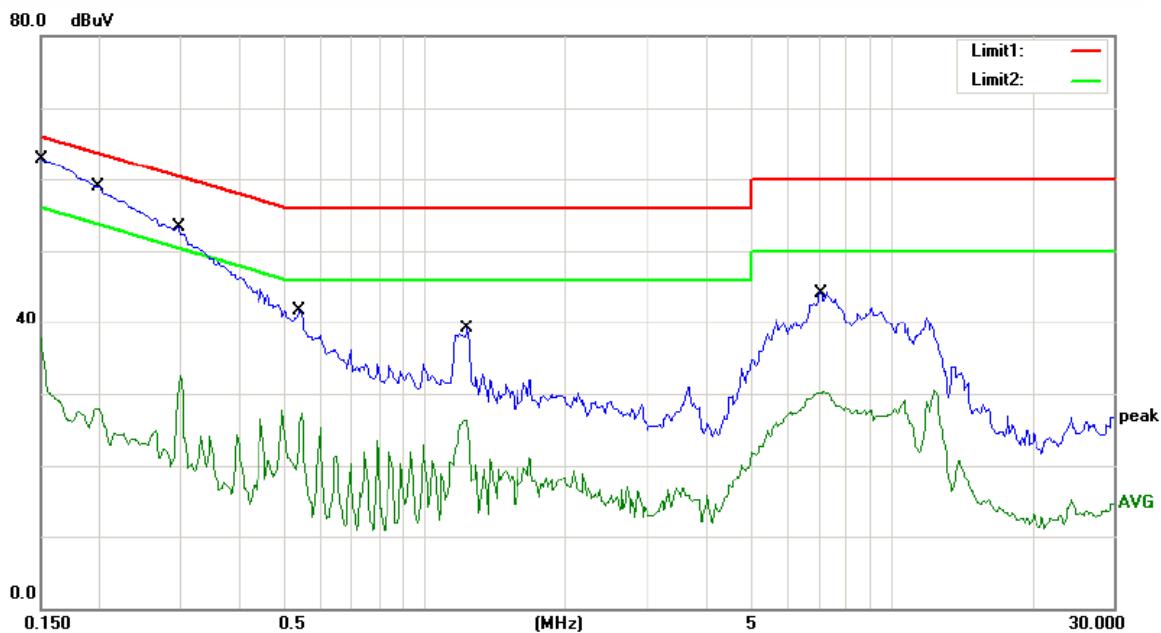

Site Conduction #1

Phase: **N**

Temperature: 24

Limit: (CE)FCC PART 15 class B_QP

Power: AC 120V/60Hz

Humidity: 53 %

Mode: ON

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV	dBuV	dB		
1	*	0.1500	54.00	0.00	54.00	66.00	-12.00	QP	
2		0.1500	37.77	0.00	37.77	56.00	-18.23	AVG	
3		0.2000	50.00	0.00	50.00	63.61	-13.61	QP	
4		0.2000	27.95	0.00	27.95	53.61	-25.66	AVG	
5		0.3000	46.00	0.00	46.00	60.24	-14.24	QP	
6		0.3000	32.56	0.00	32.56	50.24	-17.68	AVG	
7		0.5450	40.00	0.00	40.00	56.00	-16.00	QP	
8		0.5450	27.36	0.00	27.36	46.00	-18.64	AVG	
9		1.2300	39.06	0.00	39.06	56.00	-16.94	QP	
10		1.2300	26.38	0.00	26.38	46.00	-19.62	AVG	
11		7.1700	44.30	0.00	44.30	60.00	-15.70	QP	
12		7.1700	30.29	0.00	30.29	50.00	-19.71	AVG	

*:Maximum data x:Over limit !:over margin Comment: Factor build in receiver. Operator: Jason

6. Radiated Emission Test

6.1 Measurement Procedure

When spectrum scanned from 30 MHz to 1GHz setting resolution bandwidth 120 kHz and video bandwidth 300kHz.

EMI Test Receiver	Setting
Attenuation	Auto
RB	120kHz
VB	300kHz
Detector	QP
Trace	Max hold

When spectrum scanned above 1GHz setting resolution bandwidth 1MHz, video bandwidth 3MHz.


EMI Test Receiver	Setting
Attenuation	Auto
RB	1MHz
VB	3MHz
Detector	Peak
Trace	Max hold

When spectrum scanned above 1GHz setting resolution bandwidth 1MHz, video bandwidth 10Hz.


EMI Test Receiver	Setting
Attenuation	Auto
RB	1MHz
VB	10Hz
Detector	Peak
Trace	Max hold

6.2 Test SET-UP (Block Diagram of Configuration)


(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

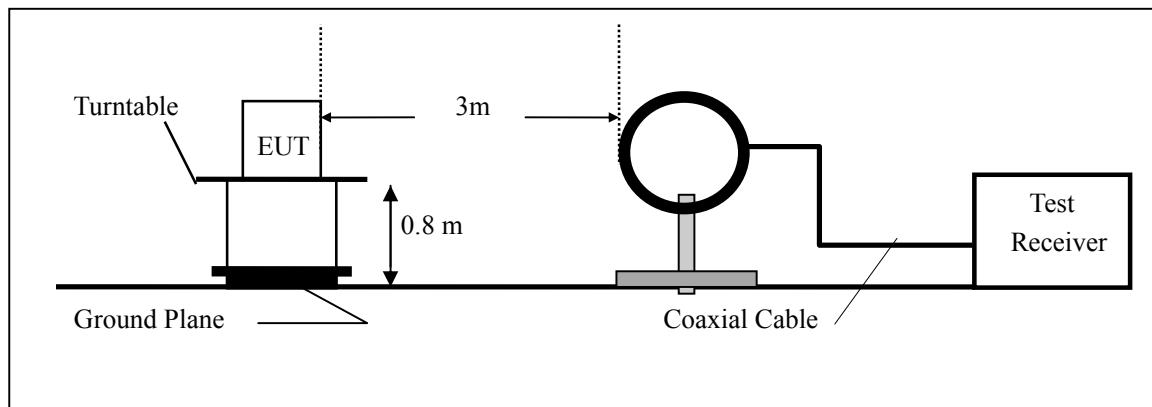

(B) Radiated Emission Test Set-Up, Frequency Below 1000MHz

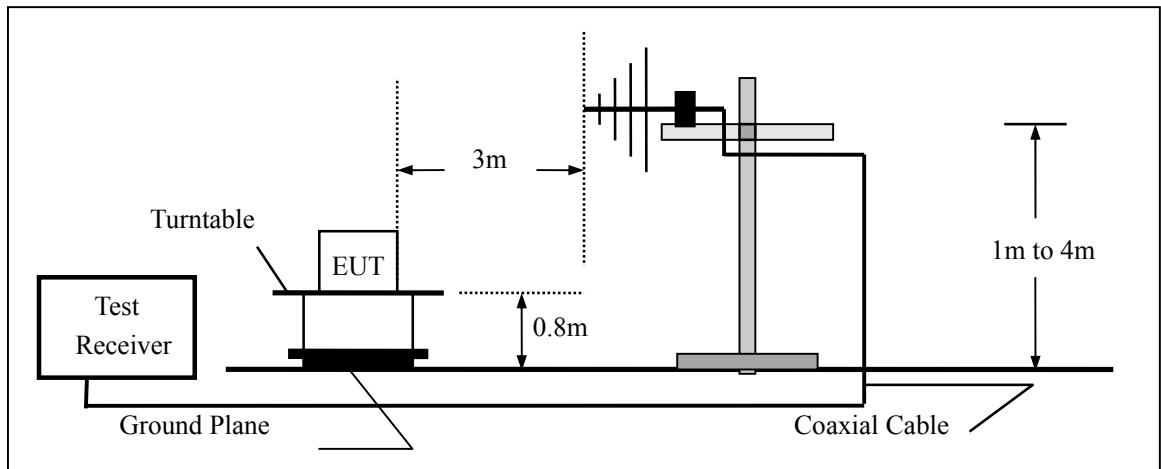

(C) Radiated Emission Test Set-Up, Frequency above 1000MHz

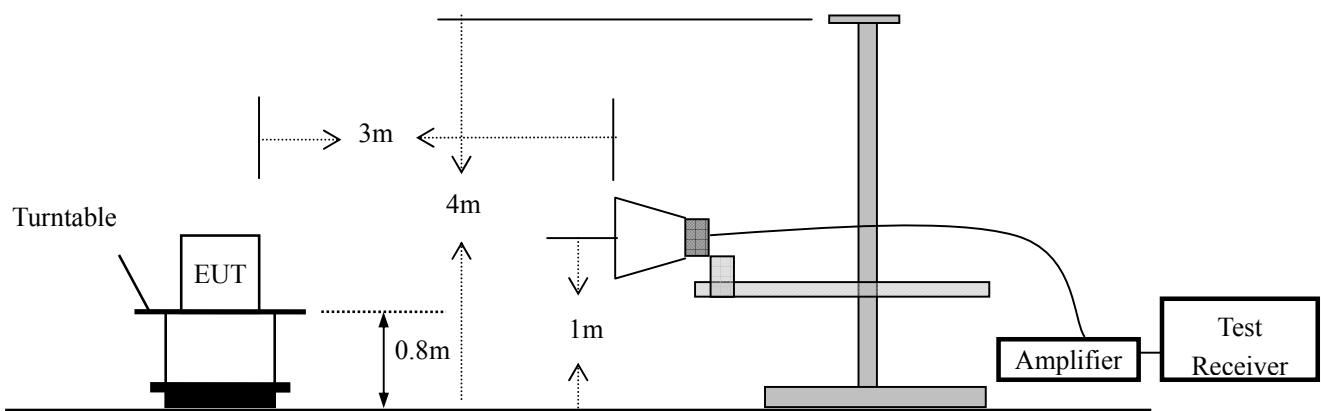

6.3 Measurement Equipment Used

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
EMI Test Receiver	Rohde & Schwarz	ESU	1302.6005.26	05/17/2014	05/16/2015
Pre-Amplifier	HP	8447D	2944A07999	05/17/2014	05/16/2015
Bilog Antenna	Schwarzbeck	VULB9163	142	05/17/2014	05/16/2015
Loop Antenna	ARA	PLA-1030/B	1029	05/17/2014	05/16/2015
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170399	05/17/2014	05/16/2015
Horn Antenna	Schwarzbeck	BBHA 9120	D143	05/17/2014	05/16/2015
Cable	Schwarzbeck	AK9513	ACRX1	05/17/2014	05/16/2015
Cable	Rosenberger	N/A	FP2RX2	05/17/2014	05/16/2015
Cable	Schwarzbeck	AK9513	CRPX1	05/17/2014	05/16/2015
Cable	Schwarzbeck	AK9513	CRRX2	05/17/2014	05/16/2015

6.4 Radiated Emission Limit

The emissions from an intentional radiator shall not exceed the field strength levels specified in the following table 15.209(a):

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

15.205 Restricted bands of operation

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)

Remark: 1. Emission level in dBuV/m=20 log (uV/m)

2. Measurement was performed at an antenna to the closed point of EUT distance of meters.

3. Only spurious frequency is permitted to locate within the Restricted Bands specified in provision of ¹ 15.205, and the emissions located in restricted bands also comply with 15.209 limit.

6.5 Measurement Result

All the modulation modes were tested the data of the worst mode (TX 11b) are recorded in the following pages and the others modulation methods do not exceed the limits.

Operation Mode: TX Mode Test Date : July 25, 2014
Frequency Range: 9KHz~30MHz Temperature : 28
Test Result: PASS Humidity : 65 %
Measured Distance: 3m Test By: KING KONG


Note:

Freq. (MHz)	Ant.Pol. H/V	Emission Level (dBuV/m)	Limit 3m (dBuV/m)	Over (dB)
--	--	--	--	--

Note: the amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.

Distance extrapolation factor = $40\log(\text{Specific distance} / \text{test distance})$ (dB);


Limit line=Specific limits(dBuV) + distance extrapolation factor.

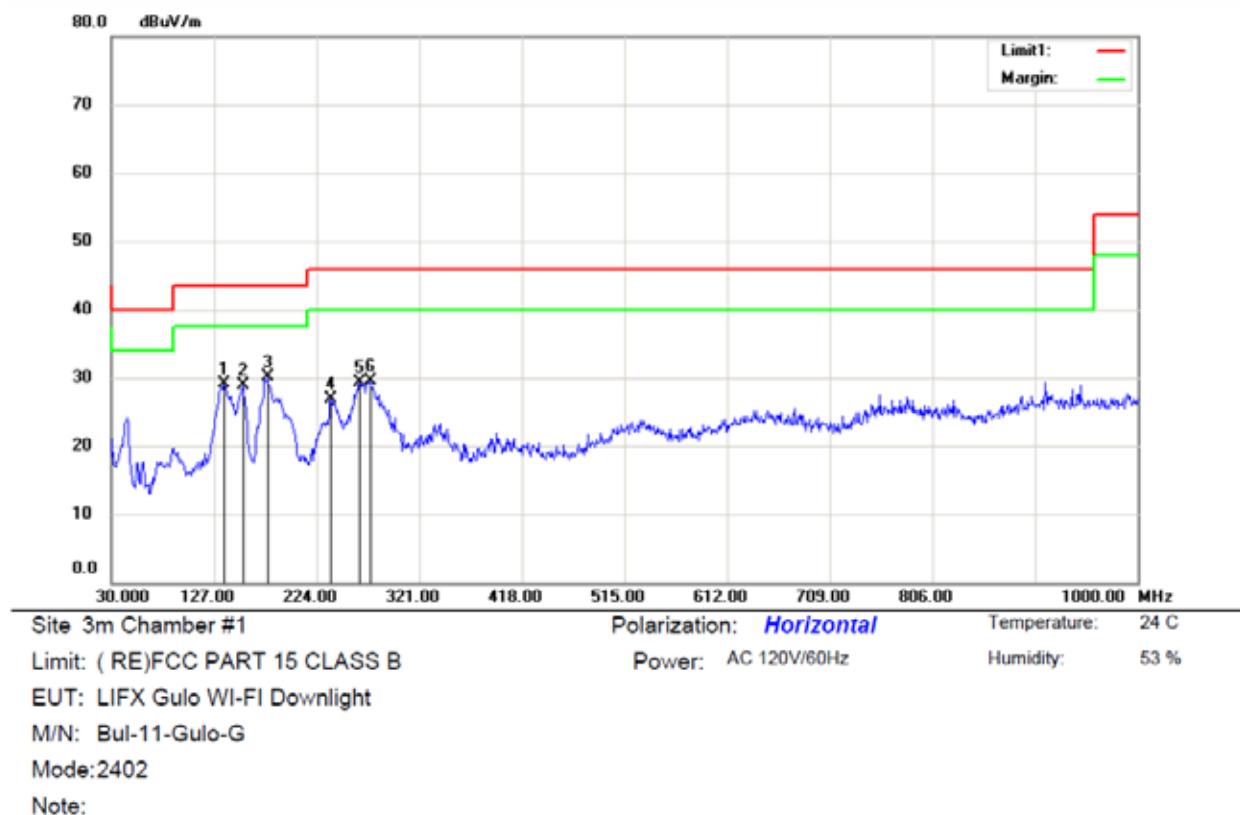

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		136.7000	19.67	9.42	29.09	43.50	-14.41	QP		
2		154.1600	20.30	8.51	28.81	43.50	-14.69	QP		
3	*	177.4400	21.80	8.22	30.02	43.50	-13.48	QP		
4		237.5800	13.76	13.11	26.87	46.00	-19.13	QP		
5		264.7400	14.68	14.60	29.28	46.00	-16.72	QP		
6		274.4400	14.31	15.13	29.44	46.00	-16.56	QP		


*:Maximum data x:Over limit !:over margin

Operator:

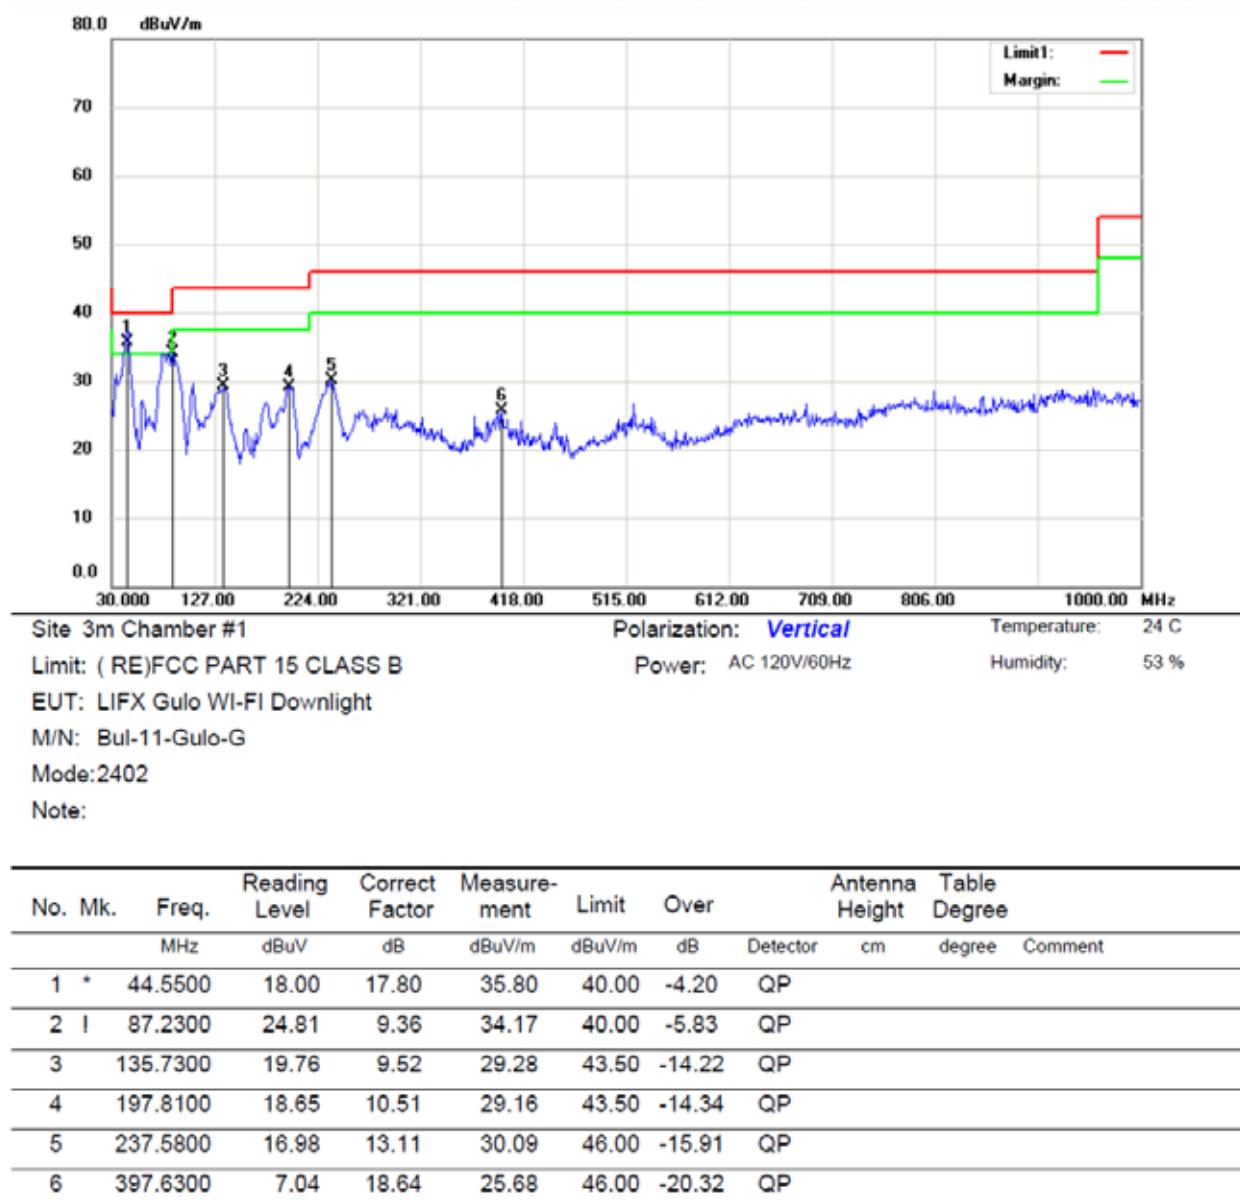


*:Maximum data x:Over limit l:over margin

Operator: Wang

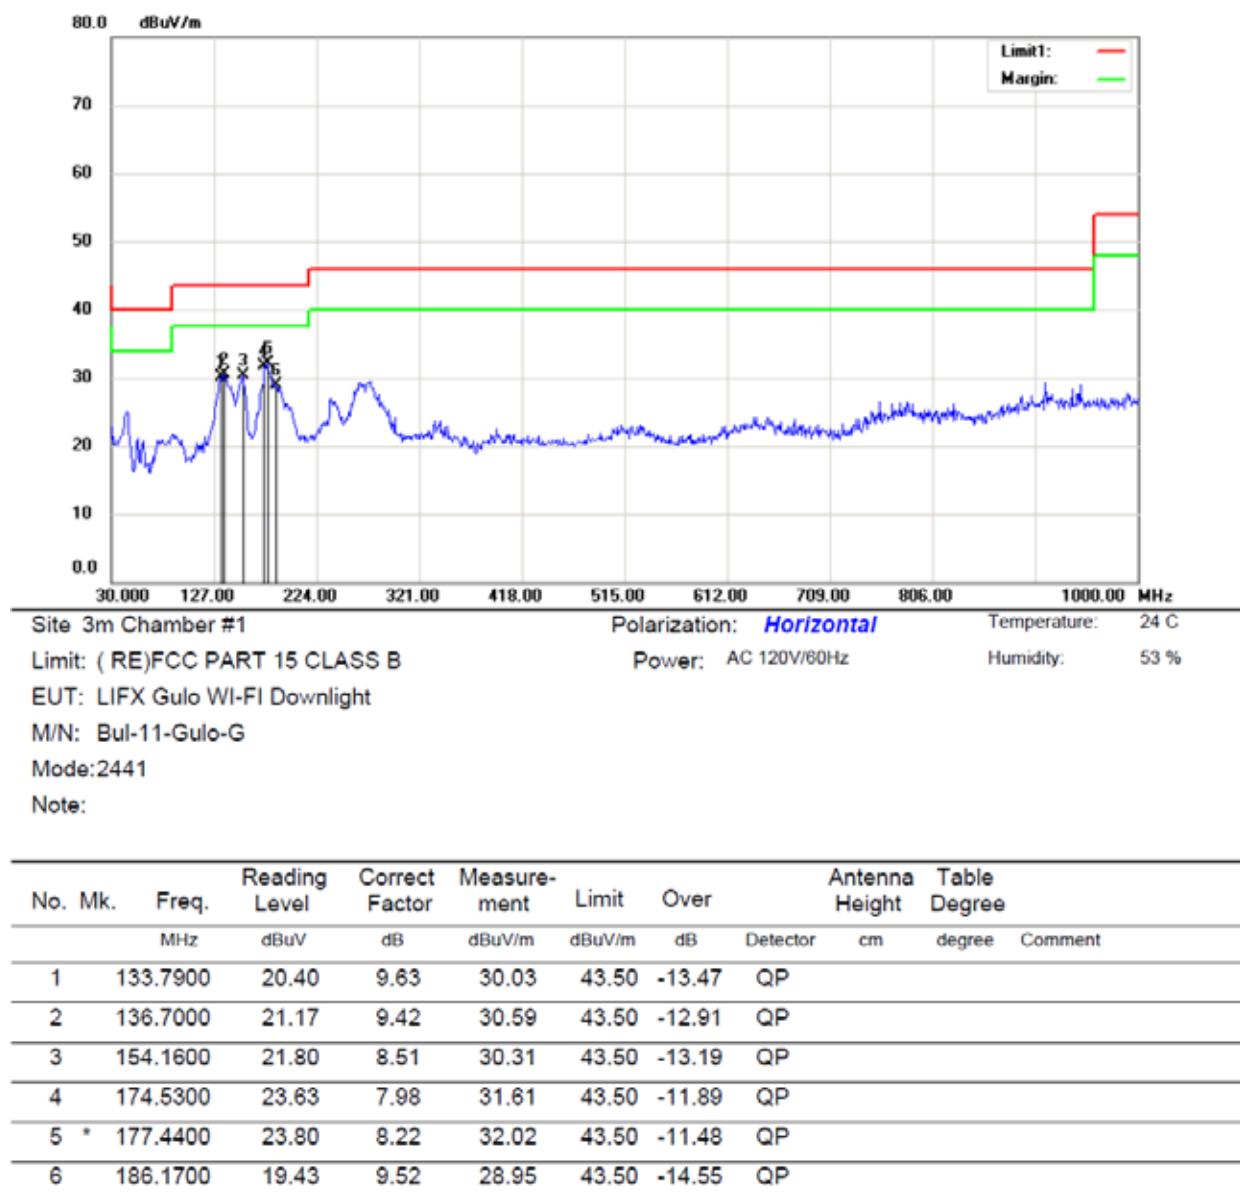

*:Maximum data x:Over limit !:over margin


Operator:

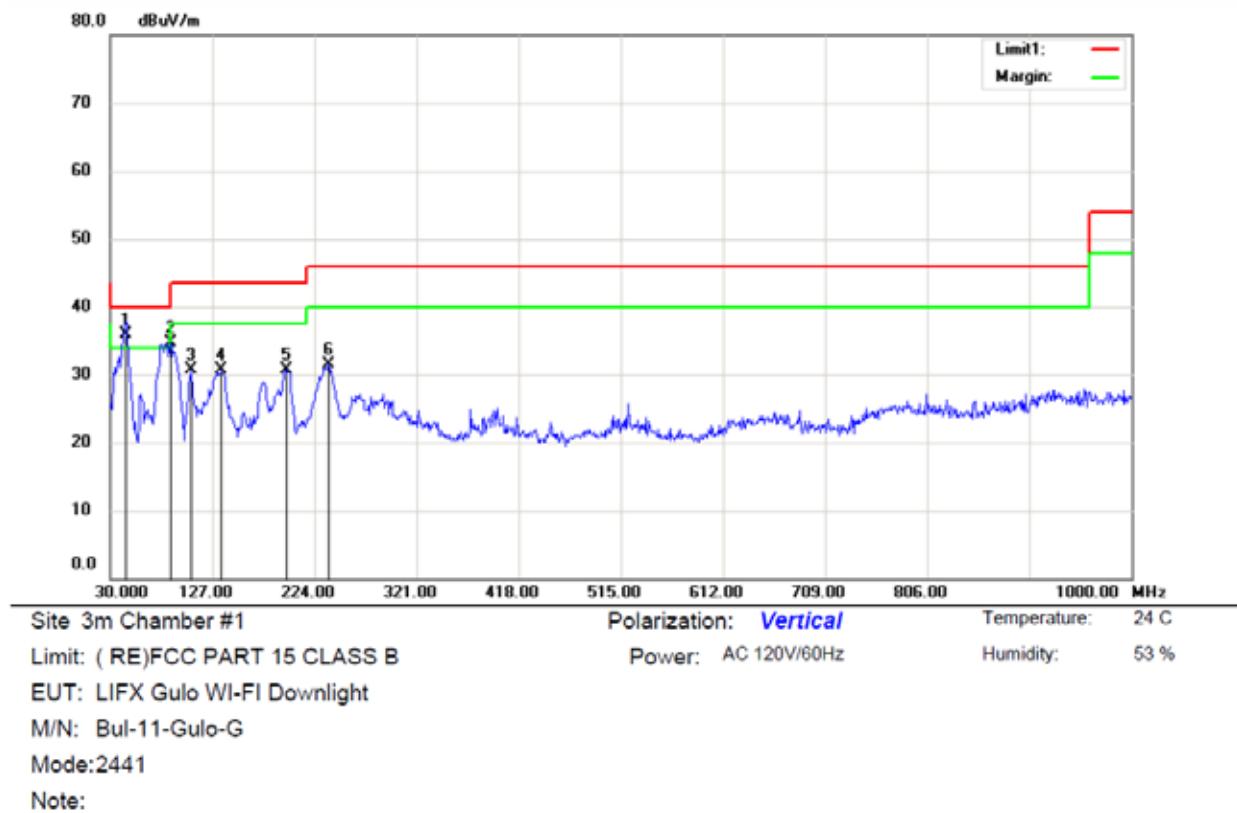

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table		
			Level	Factor	ment				Height	Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	
1	*	44.5500	18.20	17.80	36.00	40.00	-4.00	QP			
2	!	87.2300	25.31	9.36	34.67	40.00	-5.33	QP			
3		106.6300	17.76	12.86	30.62	43.50	-12.88	QP			
4		135.7300	21.26	9.52	30.78	43.50	-12.72	QP			
5		197.8100	20.15	10.51	30.66	43.50	-12.84	QP			
6		237.5800	18.48	13.11	31.59	46.00	-14.41	QP			

*:Maximum data x:Over limit !:over margin


Operator: Wang

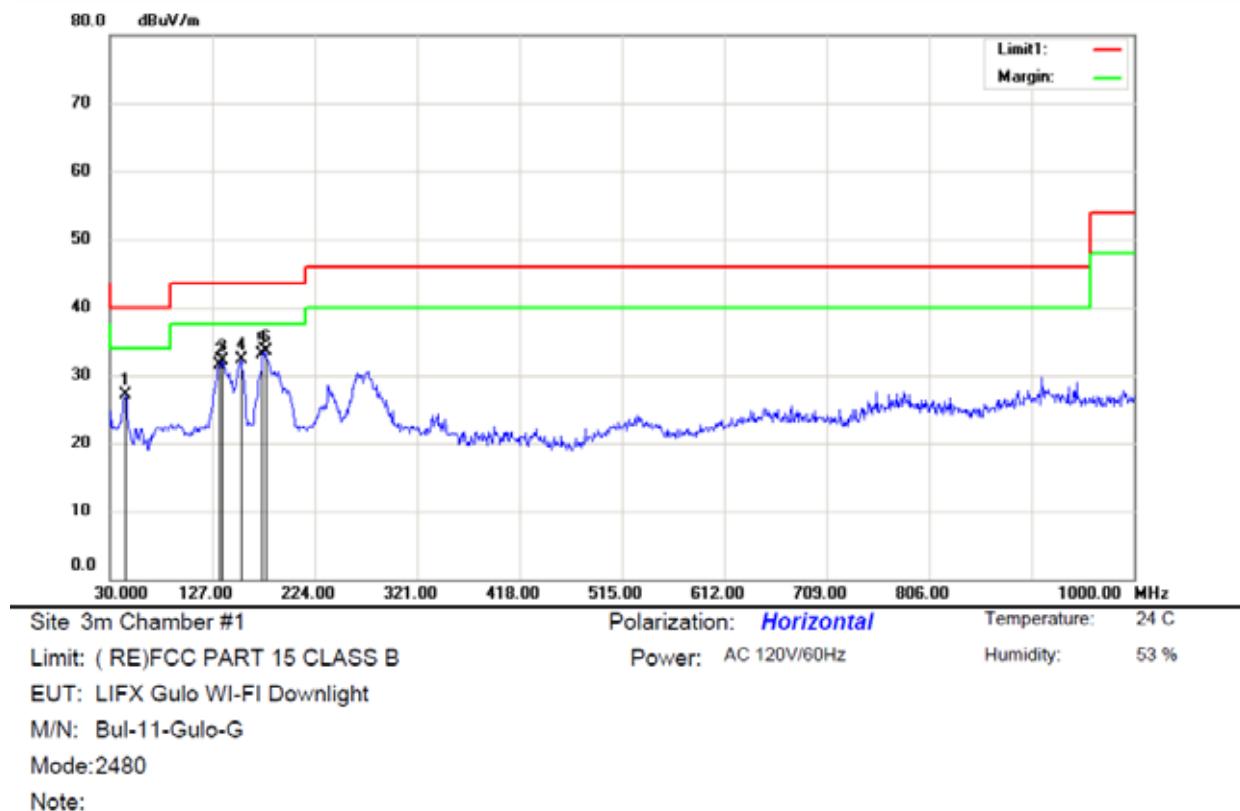

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree degree	Comment
1		44.6500	9.36	17.80	27.16	40.00	-12.84	QP			
2		133.7900	21.90	9.63	31.53	43.50	-11.97	QP			
3		136.7000	22.67	9.42	32.09	43.50	-11.41	QP			
4		154.1600	23.80	8.51	32.31	43.50	-11.19	QP			
5		174.5300	25.13	7.98	33.11	43.50	-10.39	QP			
6	*	177.4400	25.30	8.22	33.52	43.50	-9.98	QP			

*:Maximum data x:Over limit !:over margin

Operator:

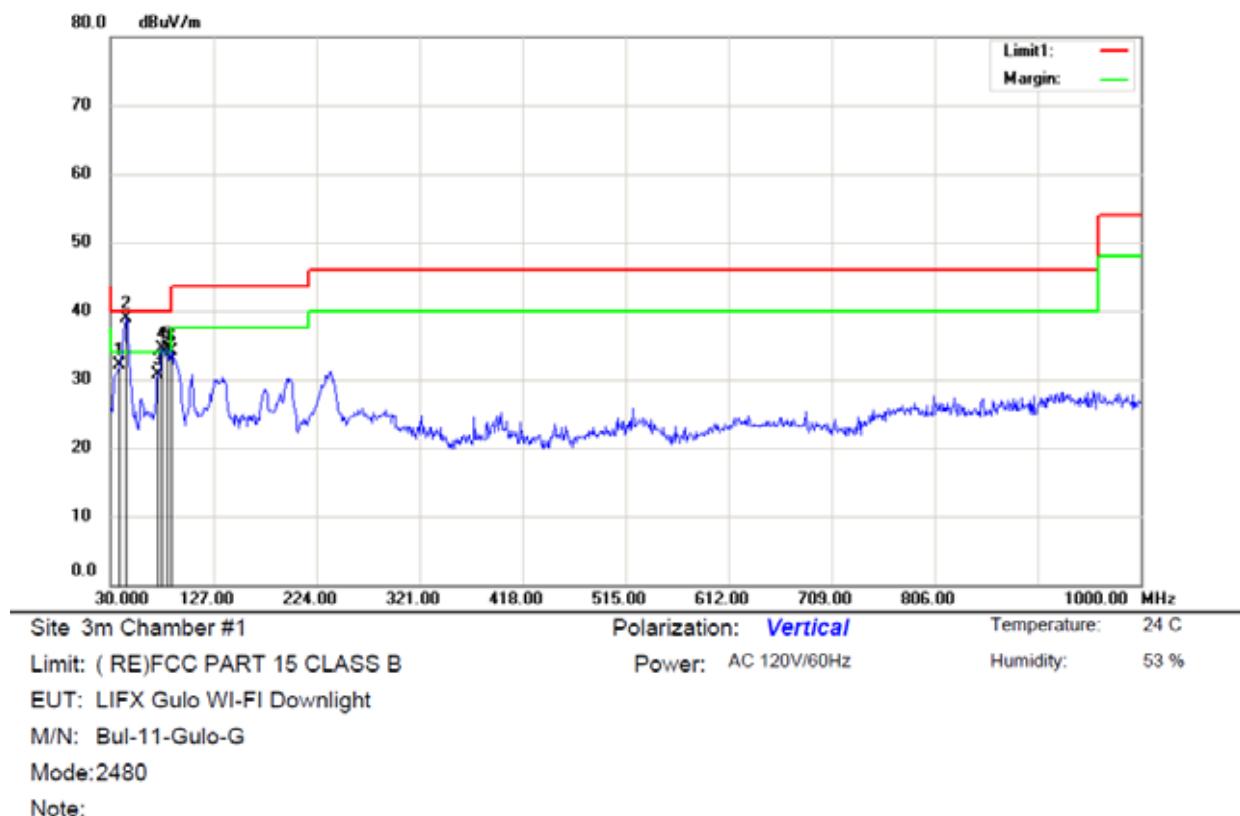

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
			Level	Factor	ment				Height	Degree
		MHz	dBuV	dB	dBuV/m	dB	Detector	cm	degree	Comment
1		37.7600	18.03	14.15	32.18	40.00	-7.82	QP		
2	*	44.5500	18.14	17.80	35.94	40.00	-4.06	QP		
3		74.6200	23.58	7.20	30.78	40.00	-9.22	QP		
4	!	78.5000	27.26	7.27	34.53	40.00	-5.47	QP		
5	!	83.3500	26.36	8.17	34.53	40.00	-5.47	QP		
6	!	87.2300	24.81	9.36	34.17	40.00	-5.83	QP		

*:Maximum data x:Over limit !:over margin

Operator: Wang

Operation Mode: 802.11b TX Channel 1 Test Date : July 25, 2014
 Frequency Range: Above 1GHz Temperature : 28
 Test Result: PASS Humidity : 65 %
 Measured Distance: 3m Test By: KING KONG

Freq. (MHz)	Ant.Pol.	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		H/V	PK	AV	PK	AV	PK
4823.75	V	54.59	41.19	74.00	54.00	-19.41	-12.81
7235.43	V	49.88	38.36	74.00	54.00	-24.12	-15.64
9748.12	V	50.28	37.06	74.00	54.00	-23.72	-16.94
4821.81	H	55.27	41.74	74.00	54.00	-18.73	-12.26
7235.51	H	49.68	38.28	74.00	54.00	-24.32	-15.72
9747.94	H	44.78	32.55	74.00	54.00	-29.22	-21.45

All emissions not reported were more than 20dB below the specified limit or in the noise floor.

Note: (1) All Readings are Peak Value and AV.
 (2) Emission Level= Reading Level+Probe Factor +Cable Loss.
 (3) Data of measurement within this frequency range shown “ -- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

Operation Mode: 802.11b TX Channel 6 Test Date : July 25, 2014
 Frequency Range: Above 1GHz Temperature : 28
 Test Result: PASS Humidity : 65 %
 Measured Distance: 3m Test By: KING KONG

Freq. (MHz)	Ant.Pol.	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		H/V	PK	AV	PK	AV	PK
4874.19	V	53.53	40.23	74.00	54.00	-20.47	-13.77
7310.59	V	49.47	37.75	74.00	54.00	-24.53	-16.25
9750.18	V	47.98	37.14	74.00	54.00	-26.02	-16.86
4873.62	H	56.94	42.92	74.00	54.00	-17.06	-11.08
7311.18	H	50.38	37.72	74.00	54.00	-23.62	-16.28
9748.33	H	43.22	31.21	74.00	54.00	-30.78	-22.79

All emissions not reported were more than 20dB below the specified limit or in the noise floor.

Note: (1) All Readings are Peak Value and AV.
 (2) Emission Level= Reading Level+Probe Factor +Cable Loss.
 (3) Data of measurement within this frequency range shown “ -- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

Operation Mode: 802.11b TX Channel 11 Test Date : July 25, 2014
Frequency Range: Above 1GHz Temperature : 28
Test Result: PASS Humidity : 65 %
Measured Distance: 3m Test By: KING KONG

Freq. (MHz)	Ant.Pol.	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		H/V	PK	AV	PK	AV	PK
4941.45	V	53.35	40.54	74.00	54.00	-20.65	-13.46
7460.37	V	50.55	38.48	74.00	54.00	-23.45	-15.52
9888.25	V	51.19	37.74	74.00	54.00	-22.81	-16.26
4941.57	H	55.43	41.67	74.00	54.00	-18.57	-12.33
7460.76	H	49.78	38.34	74.00	54.00	-24.22	-15.66
9887.91	H	44.92	32.55	74.00	54.00	-29.08	-21.45

No others harmonics emissions are higher than 20dB below the limits of 47 CFR Part 15.247.


Note: (1) All Readings are Peak Value and AV.
(2) Emission Level= Reading Level+Probe Factor +Cable Loss.
(3) Data of measurement within this frequency range shown “ -- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

7. 6dB Bandwidth Test

7.1 Measurement Procedure

1. The testing follows FCC KDB Publication No. 558074 DTS 001 Meas. Guidance v03r02
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement The 6dB bandwidth must be greater than 500 kHz
5. Measure and record the results in the test report.

7.2 Test SET-UP (Block Diagram of Configuration)



7.3 Measurement Equipment Used

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Spectrum Analyzer	Agilent	E4407B	88156318	05/17/2014	05/16/2015


7.4 Measurement Results



6db Bandwidth Test Data Chart:
Refer to attached data chart.

6db Bandwidth Test

Spectrum Detector: PK Test Date : July 25, 2014
Test By: King Kong Temperature : 28
Test Result: PASS Humidity : 65 %
Operation Mode: 802.11b


Channel number	Channel frequency (MHz)	Measurement level (MHz)	Mode
1	2412	7.047	6db Bandwidth
6	2437	7.326	6db Bandwidth
11	2462	8.030	6db Bandwidth


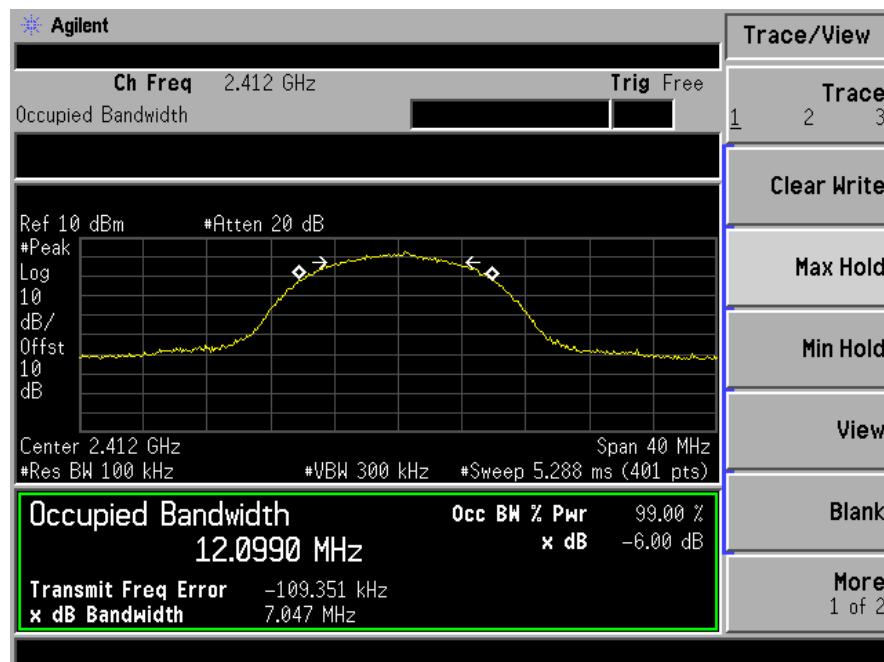


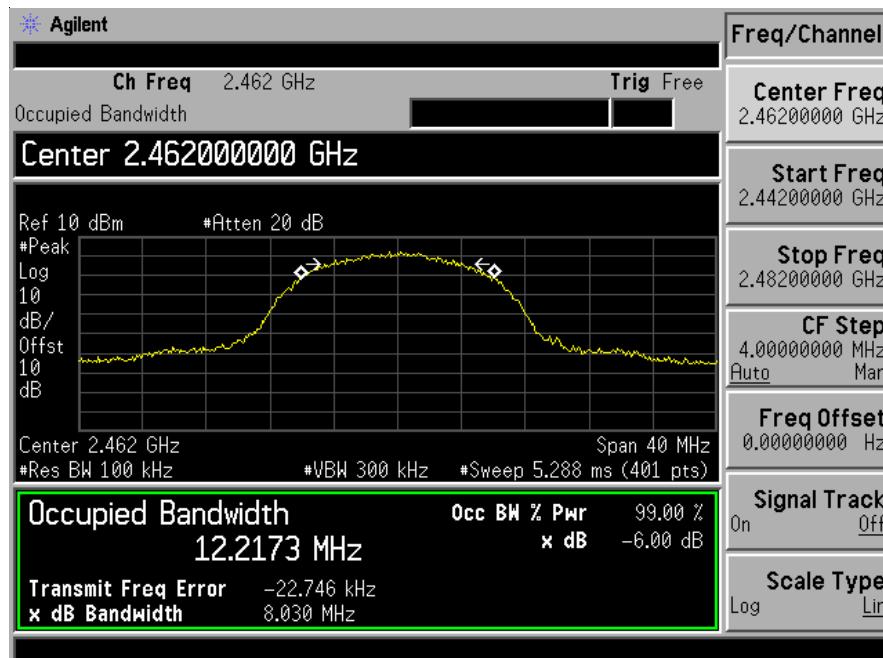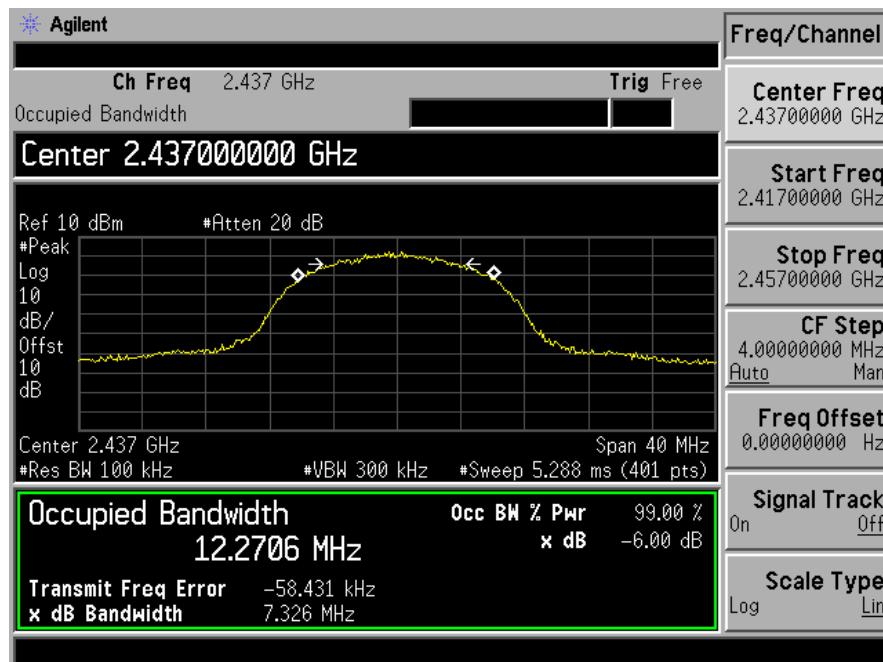

Spectrum Detector: PK Test Date : July 25, 2014
Test By: King Kong Temperature : 28
Test Result: PASS Humidity : 65 %
Operation Mode: 802.11 g


Channel number	Channel frequency (MHz)	Measurement level (MHz)	Mode
1	2412	15.381	6db Bandwidth
6	2437	15.192	6db Bandwidth
11	2462	15.519	6db Bandwidth


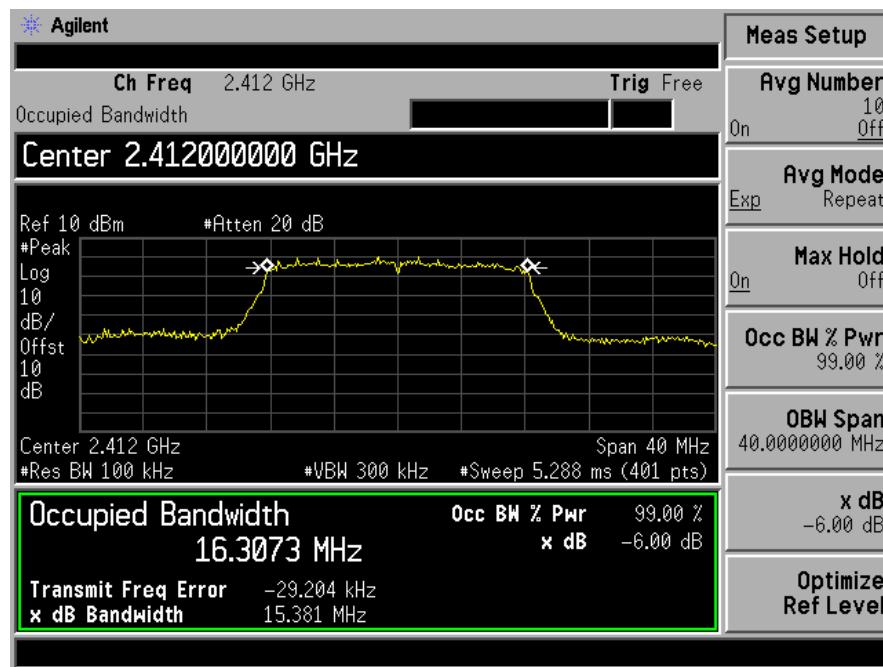


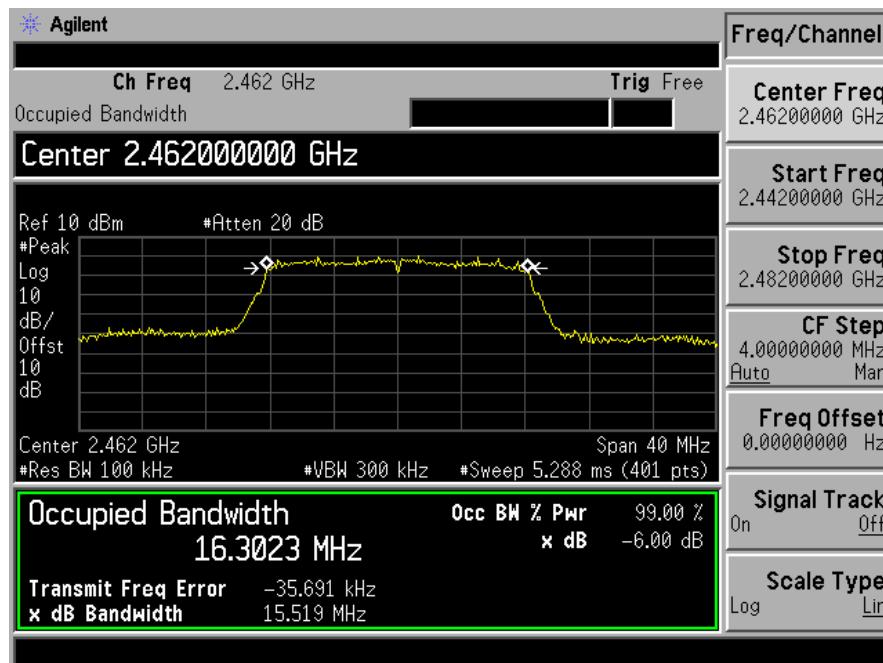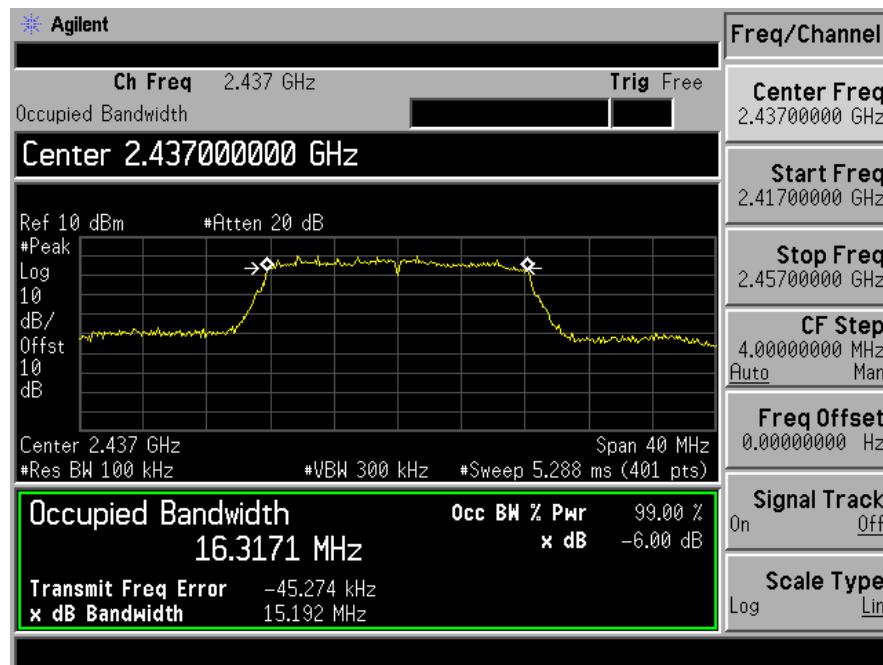

Spectrum Detector: PK Test Date : July 25, 2014
Test By: King Kong Temperature : 28
Test Result: PASS Humidity : 65 %
Operation Mode: 802.11 n HT20

Channel number	Channel frequency (MHz)	Measurement level (MHz)	Mode
1	2412	15.224	6db Bandwidth
6	2437	16.019	6db Bandwidth
11	2462	16.020	6db Bandwidth

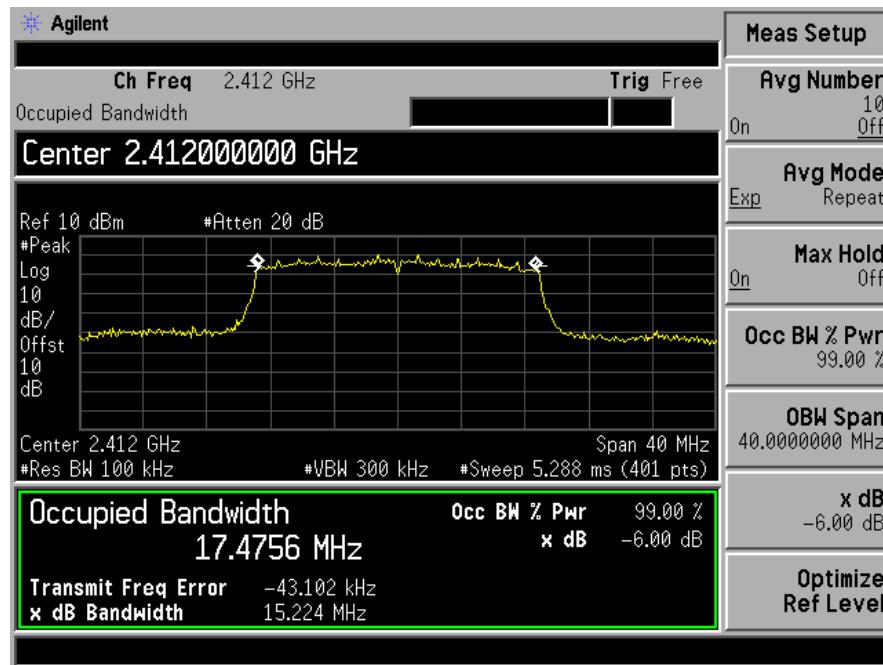

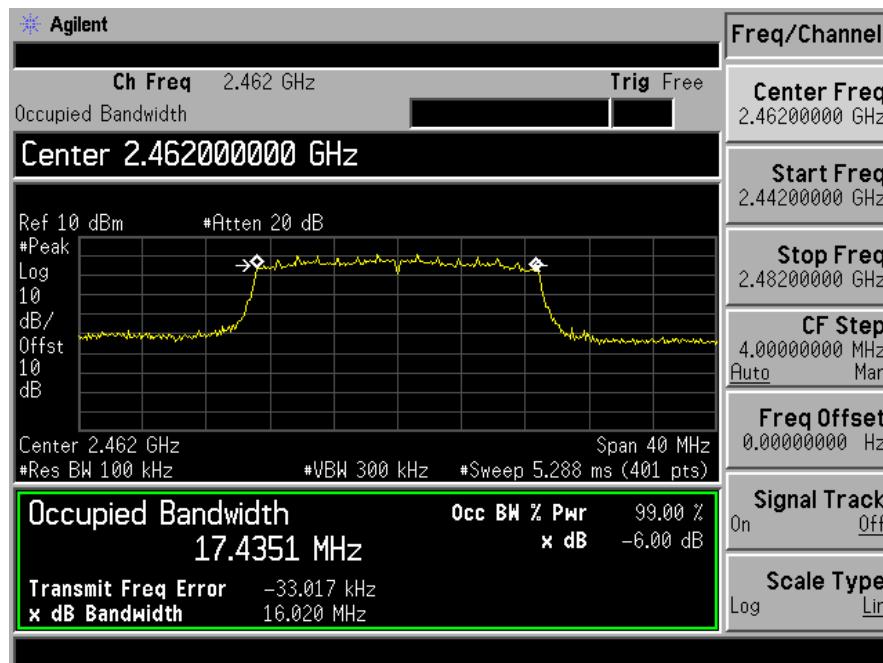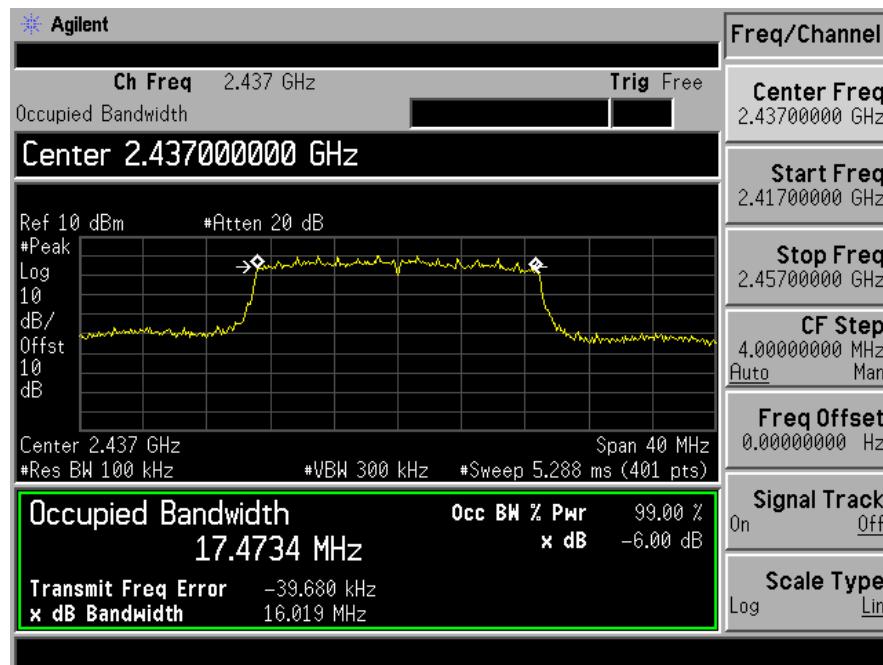

8. Maximum Peak Output Power Test

8.1 Measurement Procedure

The maximum peak conducted output power can be measured using a broadband peak RF power meter. The power meter must have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast, average-responding diode type sensor.

- a. The Transmitter output (antenna port) was connected to the power meter.
- b. Turn on the EUT and power meter and then record the peak power value.
- c. Repeat above procedures on all channels needed to be tested.

8.2 Test SET-UP (Block Diagram of Configuration)



8.3 Measurement Equipment Used

EQUIPMENT TYPE	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Power meter	ML2495A	0824006	05/17/2014	05/16/2015
Power sensor	MA2411B	0738172	05/17/2014	05/16/2015

8.4 Peak Power output limit

The maximum peak power shall be less 1Watt.

8.5 Measurement Results

Spectrum Detector: PK Test Date : July 25, 2014
Test By: King Kong Temperature : 28
Test Result: PASS Humidity : 65 %
Operation Mode: 802.11b

Channel number	Channel Frequency(MHz)	Peak Power output(dBm)	Peak Power Limit(W)	Pass/Fail
1	2412	13.36	1W(30dBm)	PASS
6	2437	13.60	1W(30dBm)	PASS
11	2462	13.76	1W(30dBm)	PASS

Spectrum Detector: PK Test Date : July 25, 2014
Test By: King Kong Temperature : 28
Test Result: PASS Humidity : 65 %
Operation Mode: 802.11g

Channel number	Channel Frequency (MHz)	Peak Power output(dBm)	Peak Power Limit(W)	Pass/Fail
1	2412.00	15.69	1W(30dBm)	PASS
6	2437.00	15.88	1W(30dBm)	PASS
11	2462.00	16.12	1W(30dBm)	PASS

Spectrum Detector: PK Test Date : July 25, 2014
Test By: King Kong Temperature : 28
Test Result: PASS Humidity : 65 %
Operation Mode: 802.11n H20

Channel number	Channel Frequency (MHz)	Peak Power output(dBm)	Peak Power Limit(W)	Pass/Fail
1	2412.00	15.73	1W(30dBm)	PASS
6	2437.00	15.80	1W(30dBm)	PASS
11	2462.00	15.94	1W(30dBm)	PASS

Spectrum Detector: PK Test Date : July 25, 2014
Test By: King Kong Temperature : 28
Test Result: PASS Humidity : 65 %
Operation Mode: Wifi+Zigbee

Max Wifi Peak Power output(dBm)	Max Zigbee Peak Power output(dBm)	Combined Peak Power output(dBm)	Peak Power Limit(W)	Pass/Fail
16.12	-3.42	16.17	1W(30dBm)	PASS

9. Band Edge Test

9.1 Measurement Procedure

1. The EUT was Operating in hopping mode or could be controlled its channel. Printed out test result from the spectrum by hard copy function.
2. The EUT was placed on a turn table which is 0.8m above ground plane.
3. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
4. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
5. Repeat above procedures until all frequency measured were complete.

When spectrum scanned above 1GHz setting resolution bandwidth 1MHz, video bandwidth 3MHz.

EMI Test Receiver	Setting
Attenuation	Auto
RB	1MHz
VB	3MHz
Detector	Peak
Trace	Max hold

When spectrum scanned above 1GHz setting resolution bandwidth 1MHz, video bandwidth 10Hz.

EMI Test Receiver	Setting
Attenuation	Auto
RB	1MHz
VB	10Hz
Detector	Peak
Trace	Max hold


9.2 Test SET-UP (Block Diagram of Configuration)

As 6.2 Test set up (B) and (C)

9.3 Measurement Equipment Used

Same as 6.3 Radiated Emission Measurement.


9.4 Measurement Results

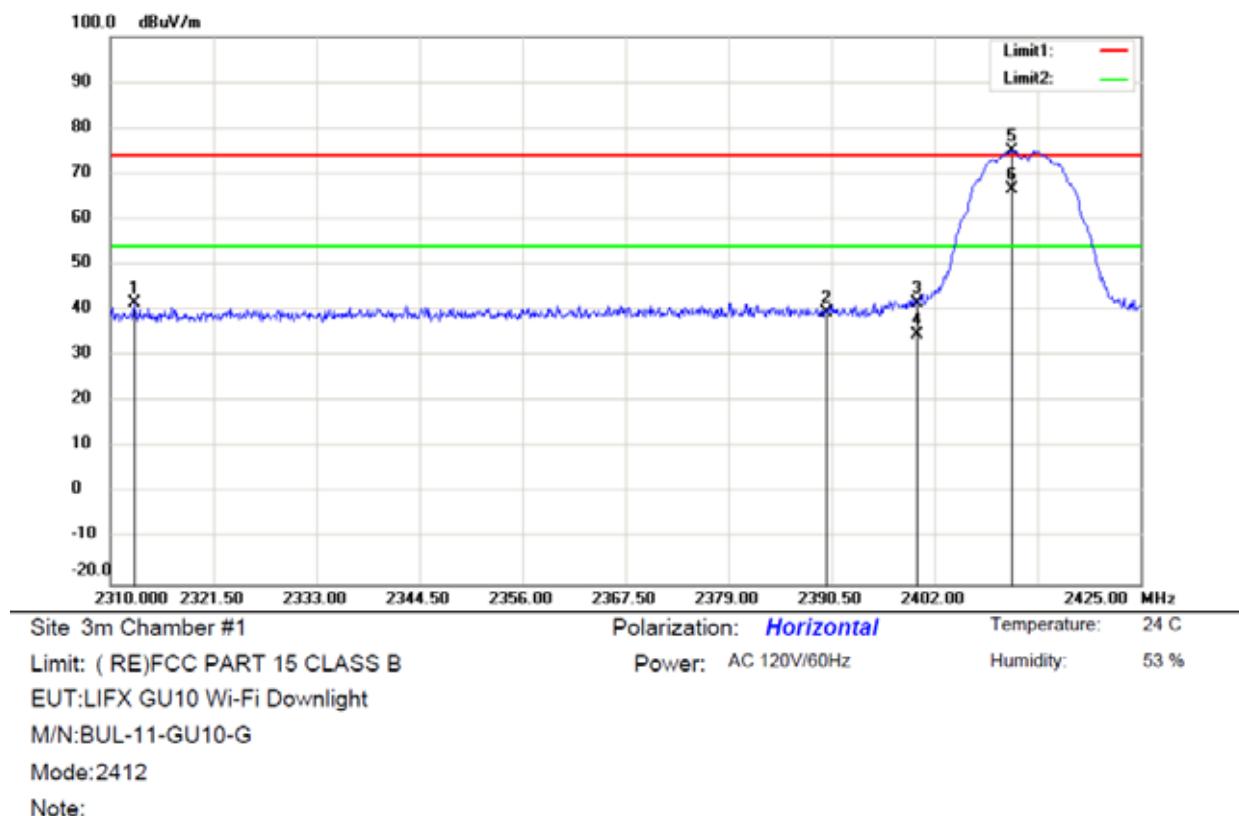

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		2312.645	49.52	-7.87	41.65	74.00	-32.35	peak		
2		2390.000	46.70	-7.18	39.52	74.00	-34.48	peak		
3		2400.000	48.75	-7.09	41.66	74.00	-32.34	peak		
4		2400.000	41.75	-7.09	34.66	54.00	-19.34	AVG		
5	X	2410.625	82.07	-7.00	75.07	74.00	1.07	peak		
6	*	2410.625	73.45	-7.00	66.45	54.00	12.45	AVG		

*:Maximum data x:Over limit l:over margin


Operator: KK

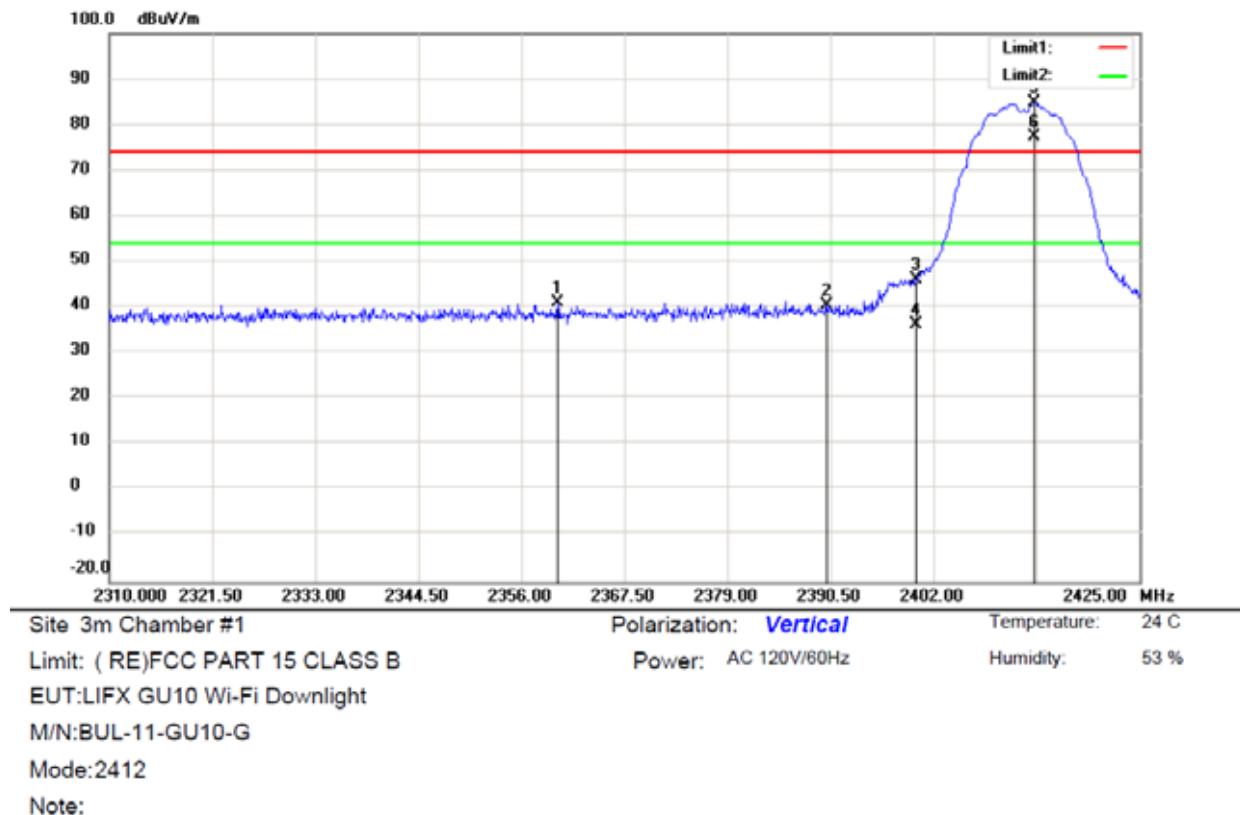

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		2360.025	48.60	-7.45	41.15	74.00	-32.85	peak		
2		2390.000	47.55	-7.18	40.37	74.00	-33.63	peak		
3		2400.000	53.26	-7.09	46.17	74.00	-27.83	peak		
4		2400.000	43.25	-7.09	36.16	54.00	-17.84	AVG		
5	X	2413.270	91.75	-6.98	84.77	74.00	10.77	peak		
6	*	2413.270	84.39	-6.98	77.41	54.00	23.41	AVG		

*:Maximum data x:Over limit !:over margin


Operator: KK

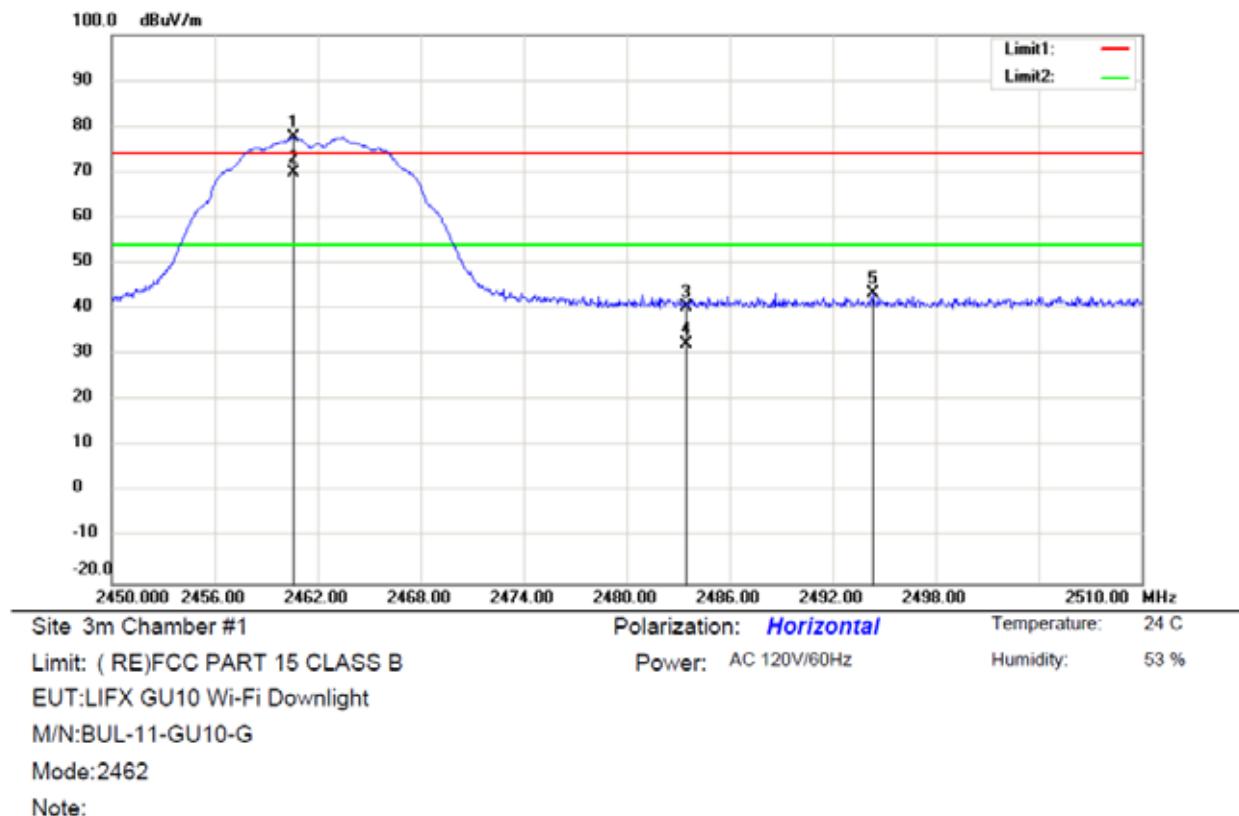

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	X	2460.620	84.11	-6.56	77.55	74.00	3.55	peak		
2	*	2460.620	76.45	-6.56	69.89	54.00	15.89	AVG		
3		2483.500	46.73	-6.36	40.37	74.00	-33.63	peak		
4		2483.500	38.69	-6.36	32.33	54.00	-21.67	AVG		
5		2494.340	49.85	-6.26	43.59	74.00	-30.41	peak		

*:Maximum data x:Over limit !:over margin

Operator: KK

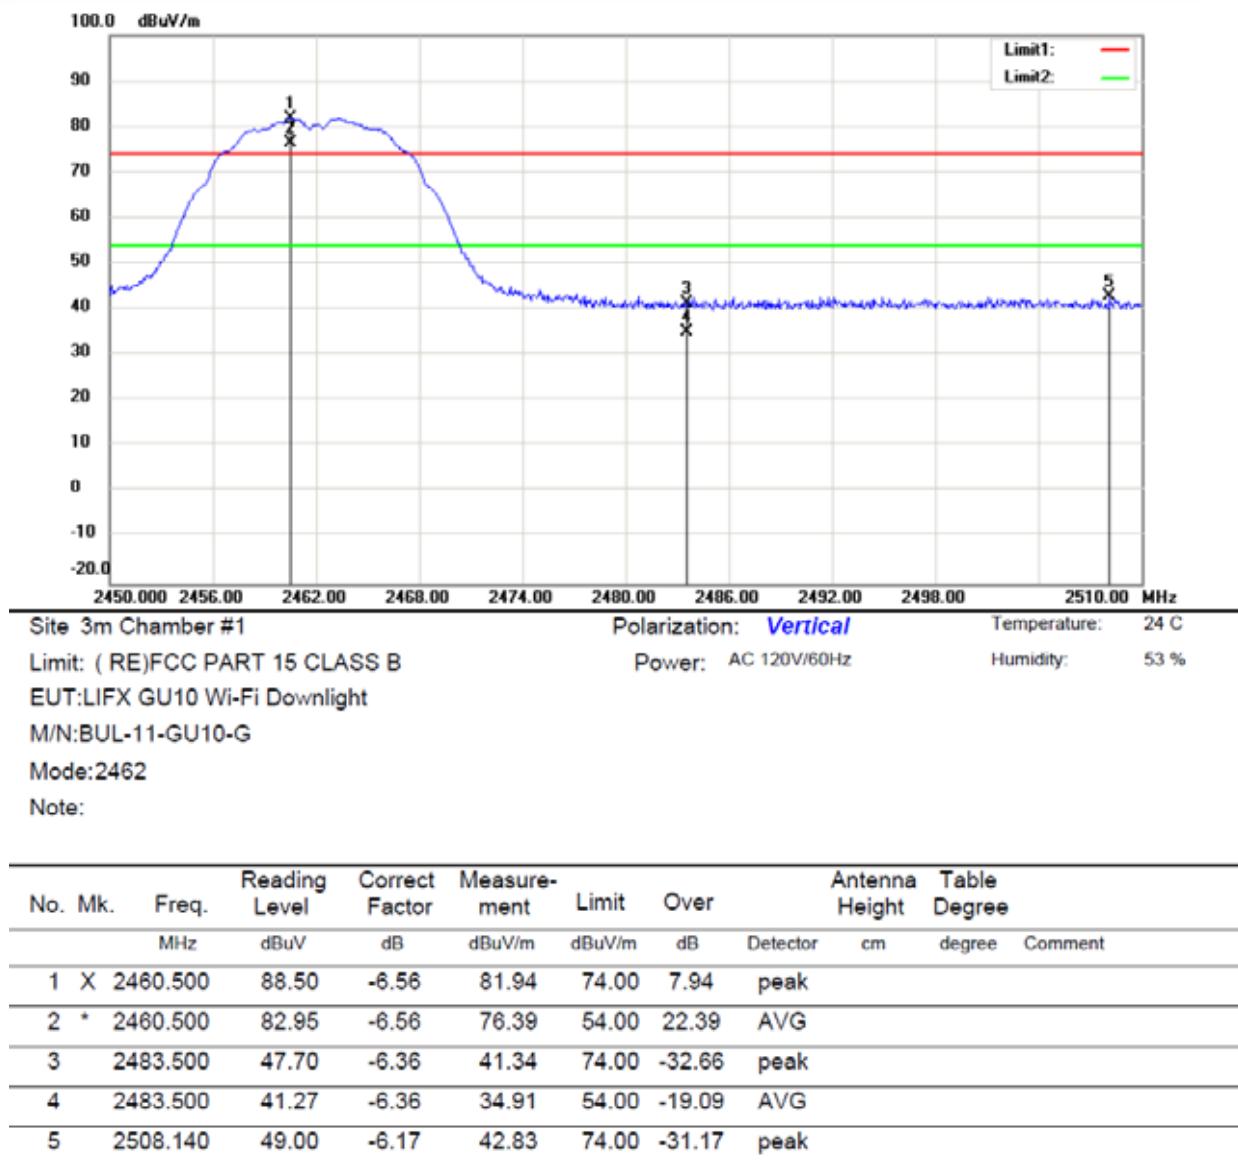

*:Maximum data x:Over limit !:over margin

Operator: KK

10. Power Density

10.1 Test Equipment

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Spectrum Analyzer	Agilent	E4407B	88156318	05/17/2014	05/16/2015

10.2 Measuring Instruments and Setting


The following table is the setting of spectrum analyzer.

Spectrum analyzer	Setting
Attenuation	Auto
Span Frequency	Set the span to 1.5 times the DTS bandwidth.
RB	3kHz RBW 100KHz
VB	3 x RBW
Detector	Peak
Trace	Max hold
Sweep Time	Automatic

10.3 Test Procedures

- a. The transmitter output (antenna port) was connected to the spectrum analyzer.
- b. Set analyzer center frequency to DTS channel center frequency.
- c. Set the analyzer span to a minimum of 1.5 times the DTS bandwidth.
- d. Set the RBW \geq 3 kHz. Set the VBW \geq 3 x RBW.
- e. Detector = peak.
- f. Sweep time = auto couple.
- g. Trace mode = max hold.
- h. Allow trace to fully stabilize.
- i. Use the peak marker function to determine the maximum amplitude level within the RBW.

10.4 Block Diagram of Test Setup




10.5 Limit



The transmitted power density averaged over any 1 second interval shall not be greater +8dBm in any 3 kHz bandwidth.

10.6 Test Result

Spectrum Detector: PK Test Date : July 25, 2014
Test By: King Kong Temperature : 28
Test Result: PASS Humidity : 65 %
Operation Mode: 802.11 b


Channel	Measurement Level (dBm)	Required Limit (dBm)	Result
1	-12.94	<8dBm	PASS
6	-12.76	<8dBm	PASS
11	-12.82	<8dBm	PASS


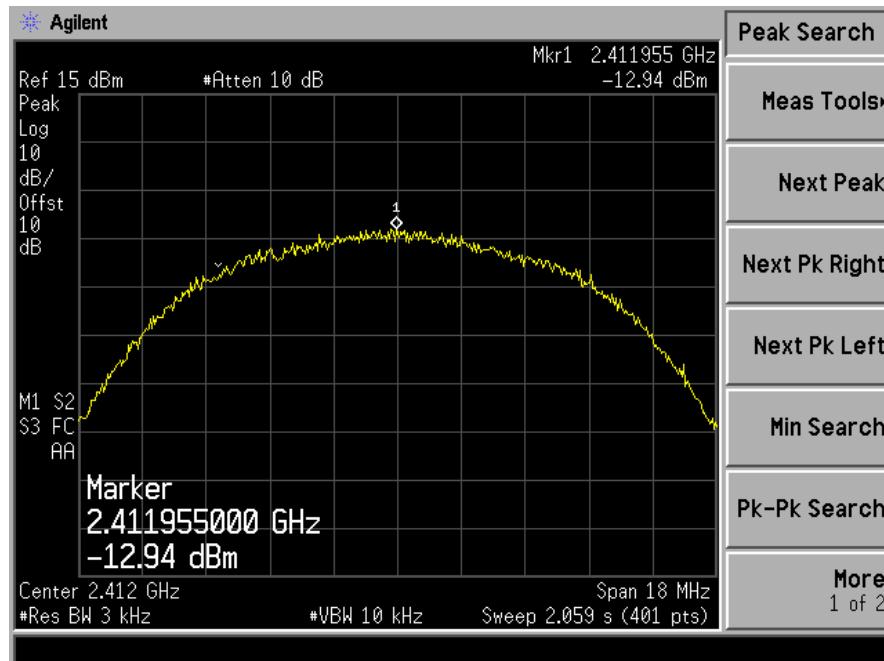


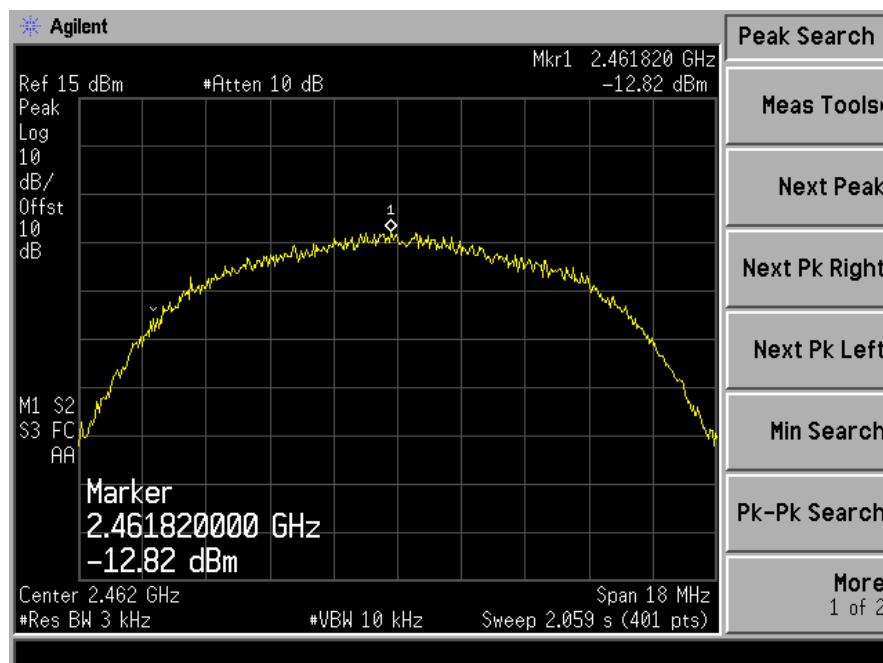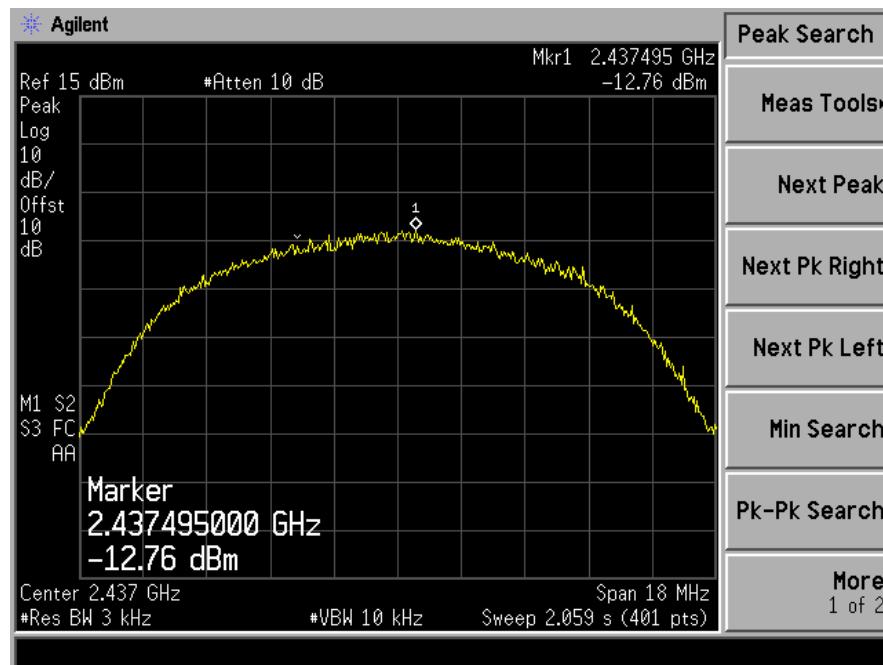

Spectrum Detector: PK Test Date : July 25, 2014
Test By: King Kong Temperature : 28
Test Result: PASS Humidity : 65 %
Operation Mode: 802.11 g


Channel	Measurement Level (dBm)	Required Limit (dBm)	Result
1	-13.25	<8dBm	PASS
6	-13.73	<8dBm	PASS
11	-13.67	<8dBm	PASS


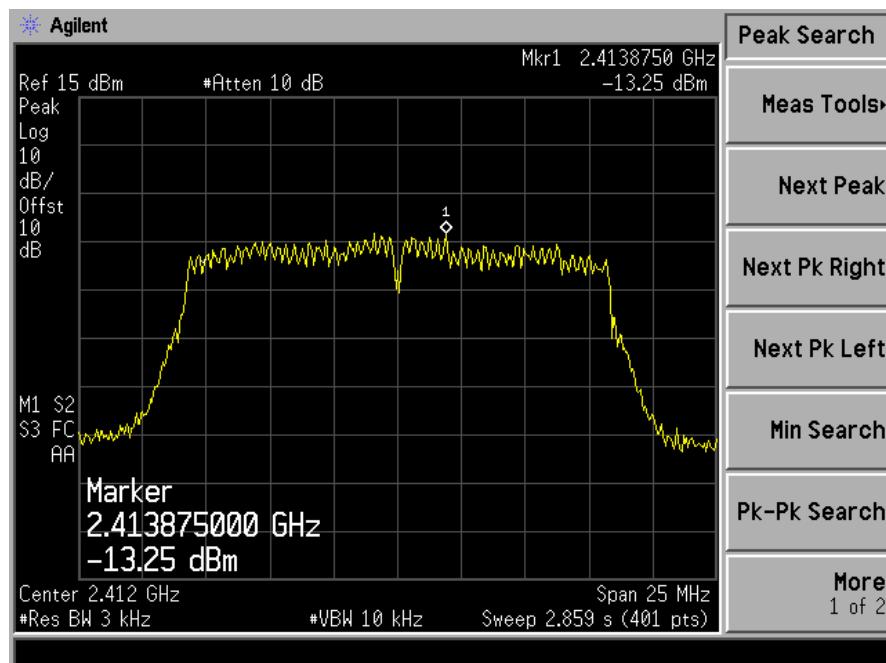


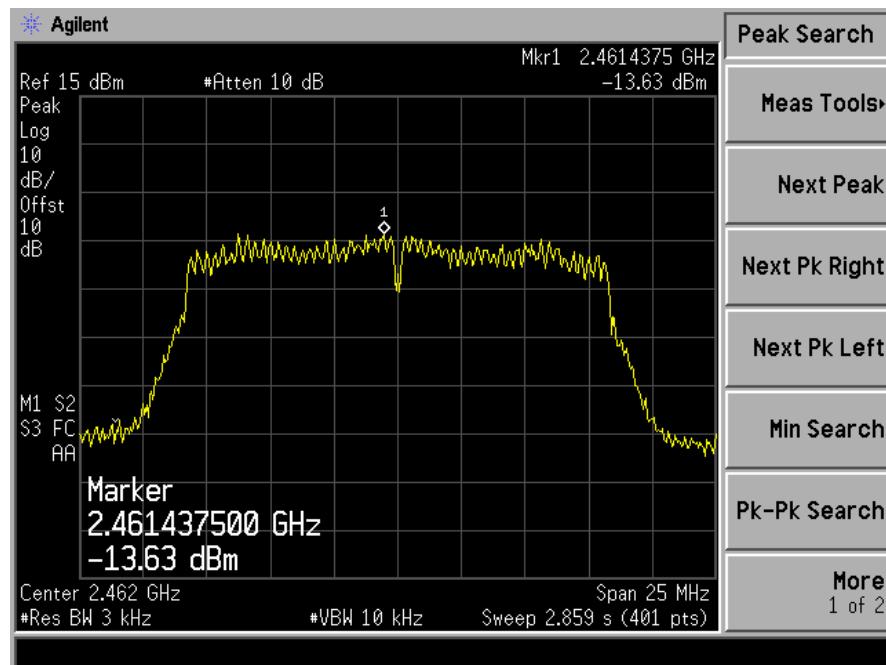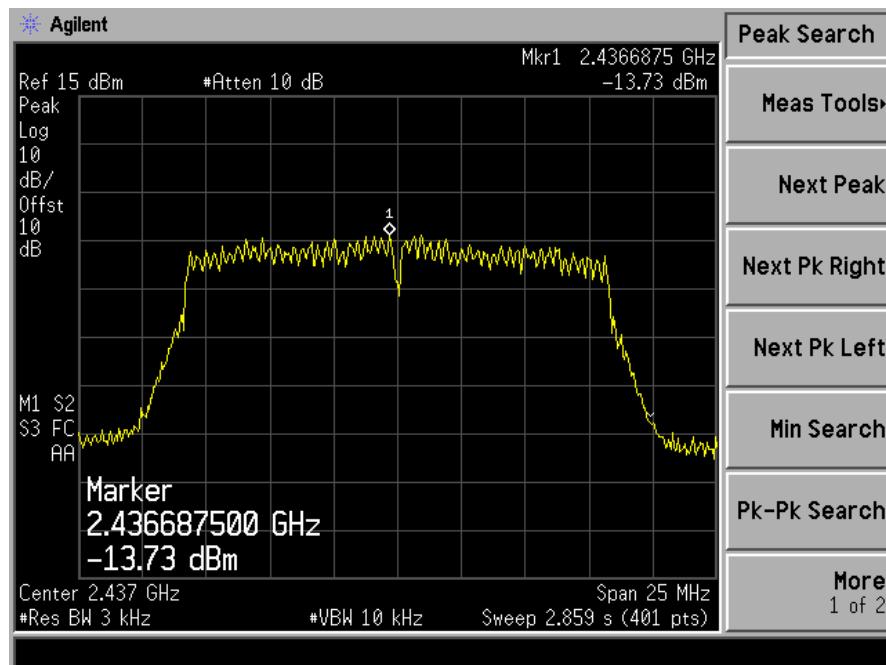

Spectrum Detector: PK Test Date : July 25, 2014
Test By: King Kong Temperature : 28
Test Result: PASS Humidity : 65 %
Operation Mode: 802.11 n HT20

Channel	Measurement Level (dBm)	Required Limit (dBm)	Result
1	-14.33	<8dBm	PASS
6	-14.28	<8dBm	PASS
11	-13.73	<8dBm	PASS

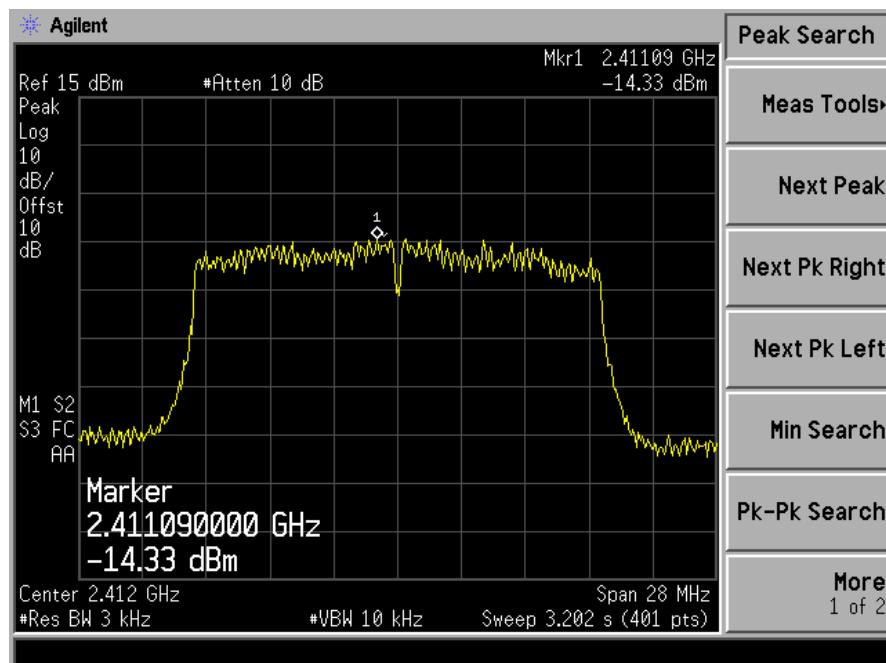

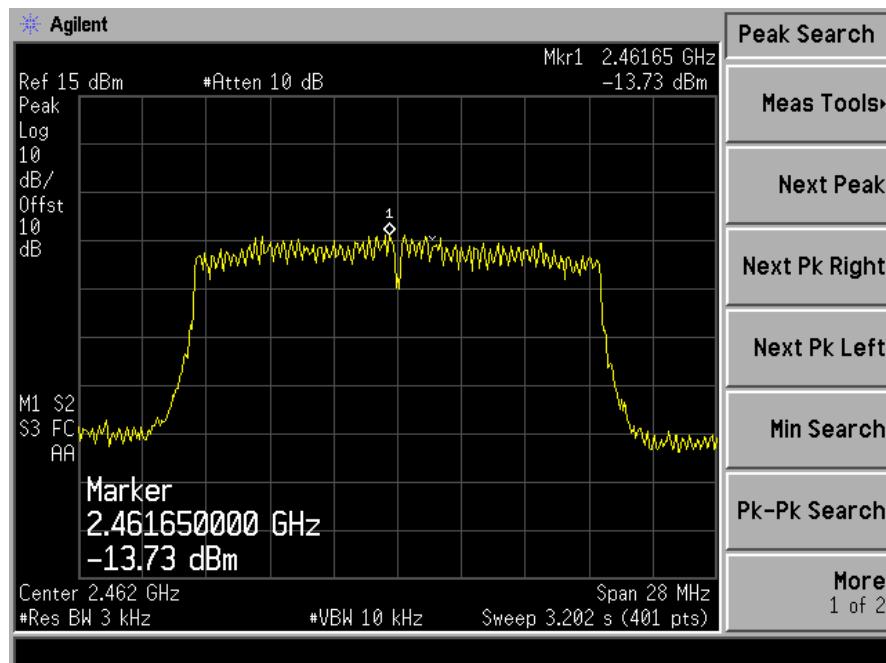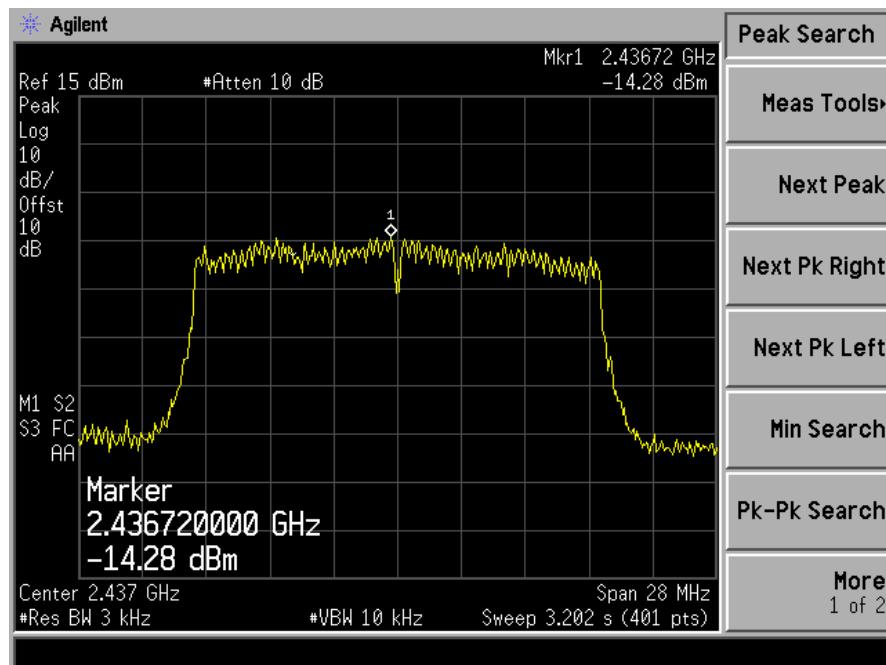

11. Antenna Port Emission

11.1 Test Equipment

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Spectrum Analyzer	Agilent	E4407B	88156318	05/17/2014	05/16/2015

11.2 Measuring Instruments and Setting


The following table is the setting of spectrum analyzer.

Spectrum analyzer	Setting
Attenuation	Auto
RB	100kHz
VB	300KHz
Detector	Peak
Trace	Max hold

11.3 Test Procedures

The conducted spurious emissions were measured conducted using a spectrum analyzer at low, Middle, and high channels, the limit was determined by attenuation 20dB of the RF peak power output.

11.4 Block Diagram of Test setup





11.5 Test Result



PASS.

All the modulation modes were tested the data of the worst mode (TX 11b) are recorded in the following pages and the others modulation methods do not exceed the limits



802.11b Low Channel 1

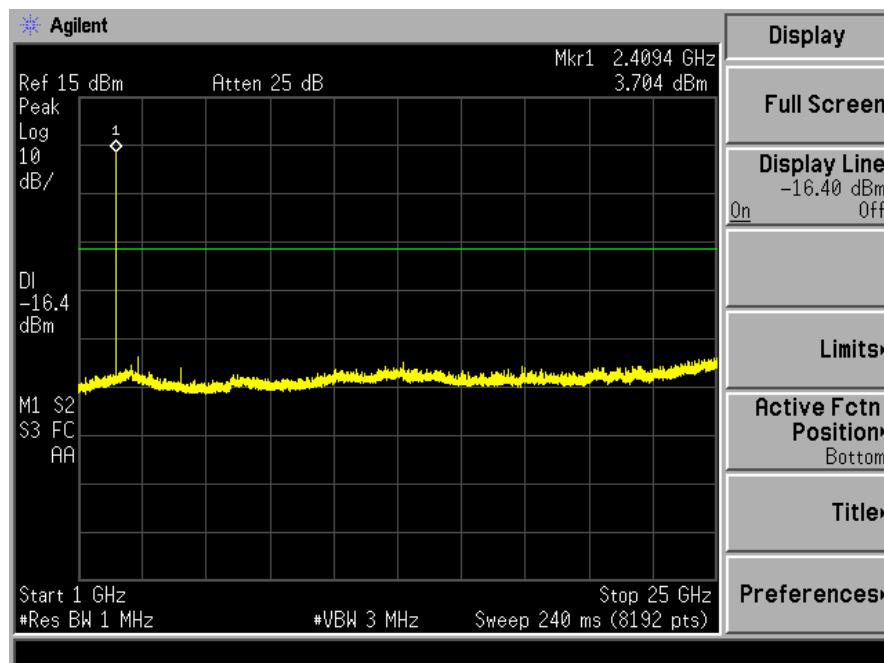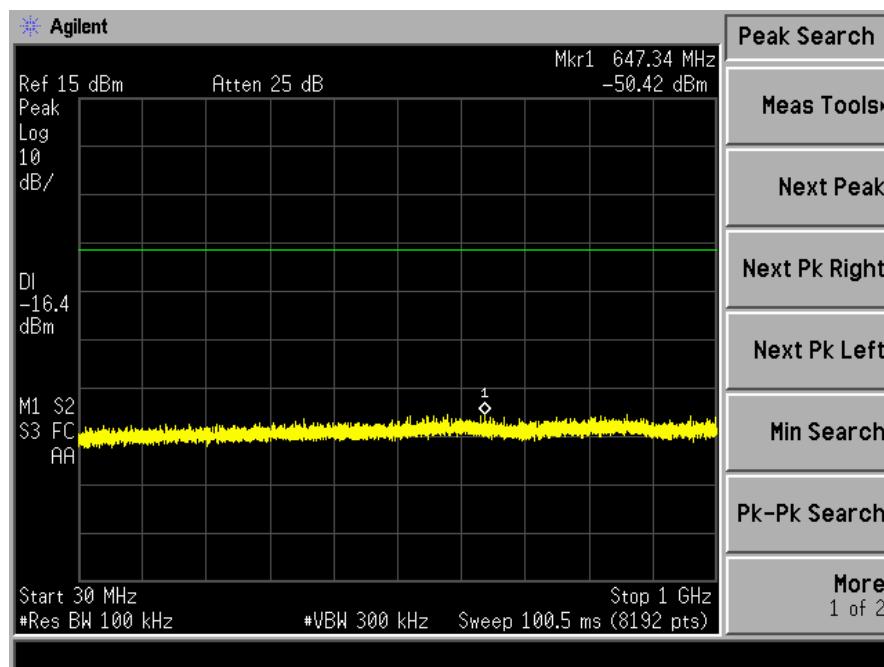

802.11b Mid Channel 6

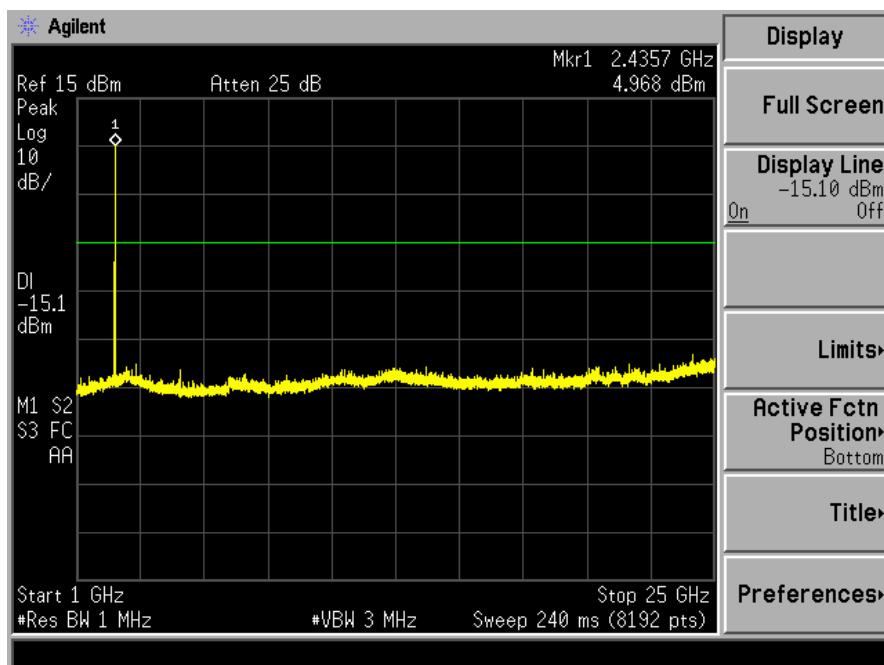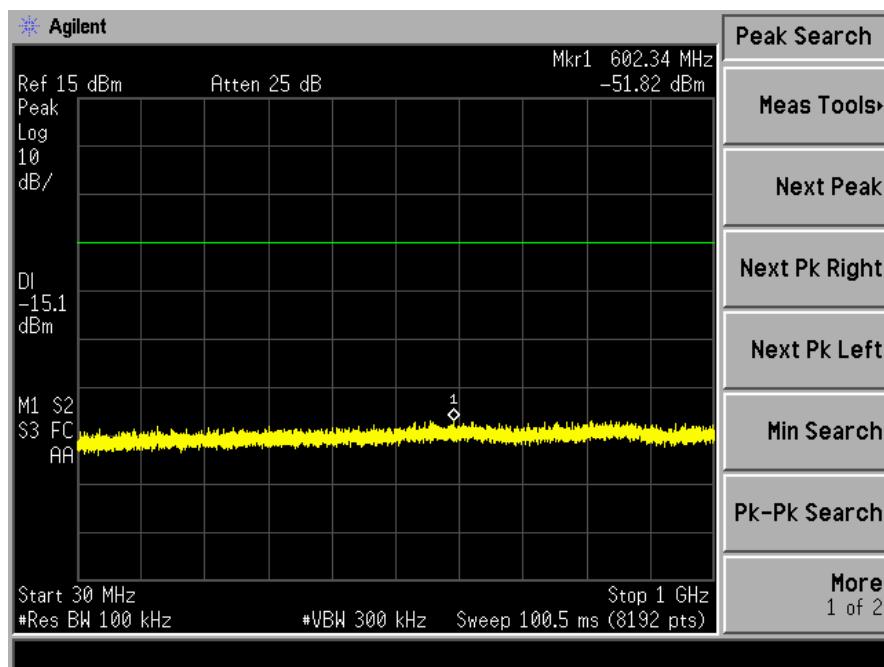

802.11b High Channel 11

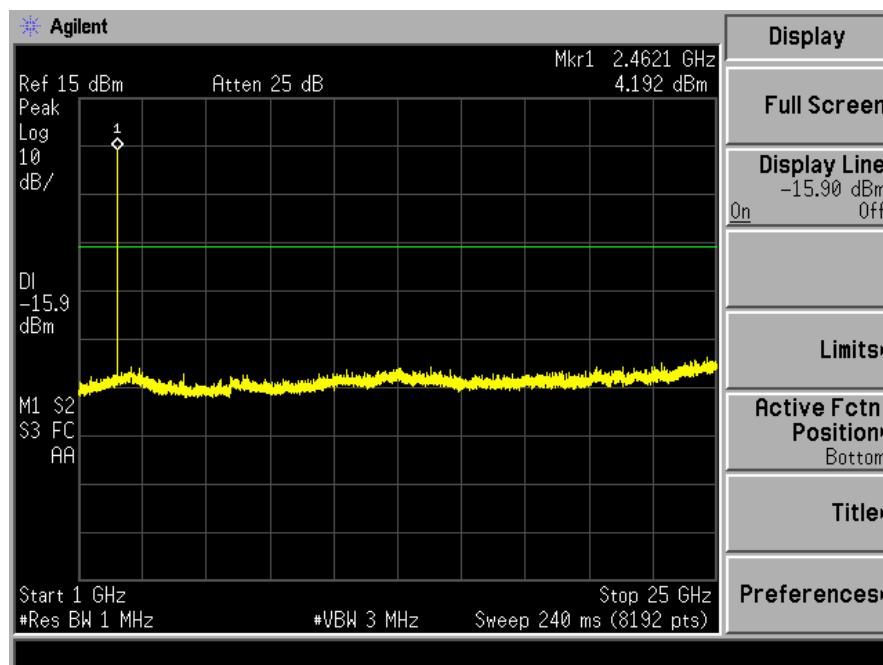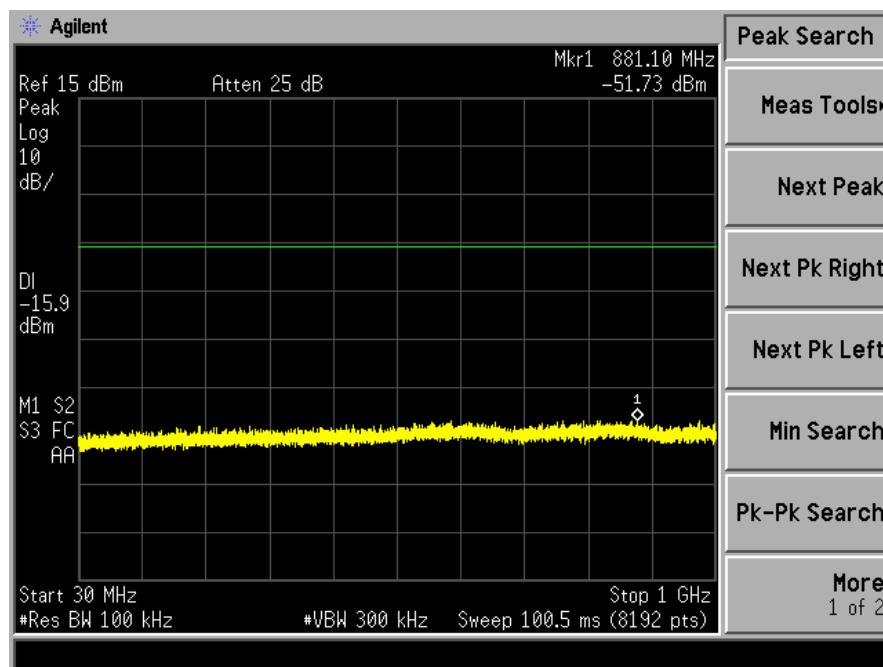

12. Antenna Application

12.1 Antenna Requirement

Standard	Requirement
FCC CRF Part 15.203	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

The EUT has 2 antennas: a Chip antenna for 2.4G WIFI, the gain is 1.5 dBi;
a Chip antenna for Zigbee, the gain is 1.1 dBi;

Note:Antenna use a permanently attached antenna which is not replaceable.
which in accordance to section 15.203, please refer to the internal photos.

12.2 Result

PASS.

13. Uncertainty

Measurement Uncertainty for a level of Confidence of 95%

Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-5}$
Maximum Peak Output Power Test	$\pm 1.0 \text{dB}$
Conducted Emissions Test	$\pm 2.0 \text{dB}$
Radiated Emission Test	$\pm 2.0 \text{dB}$
Power Density	$\pm 2.0 \text{dB}$
Occupied Bandwidth Test	$\pm 1.0 \text{dB}$
Band Edge Test	$\pm 3 \text{dB}$
All emission, radiated	$\pm 3 \text{dB}$
Antenna Port Emission	$\pm 3 \text{dB}$
Temperature	± 0.5
Humidity	$\pm 3\%$