



Test Report No.:RF130909N051



## TEST REPORT

Applicant	XIONG FENG TOYS FACTORY
Address	Industrial zone xia village Lianxia Town Chenghai., Shantou,China

Manufacturer or Supplier	XIONG FENG TOYS FACTORY
Address	Industrial zone xia village Lianxia Town Chenghai., Shantou,China
Product	REMOTE CONTROL CAR
Brand Name	N/A
Model	989-331 (319 Series, 27MHz)
Additional Model & Model Difference	989-332、333、334, etc. See item 3.1
Date of tests	Sep. 09, 2013 ~ Oct. 07, 2013

The tests have been carried out according to the requirements of the following standards:

FCC Part 15, Subpart C, Section 15.227(2012-10)

**CONCLUSION: The submitted sample was found to COMPLY with the test requirement**

Tested by Venless long  
Project Engineer / EMC Department

Approved by Glyn He  
Supervisor / EMC Department

Venless

Glyn

Date: Oct. 07, 2013

This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.



## TABLE OF CONTENTS

<b>RELEASE CONTROL RECORD .....</b>	<b>3</b>
<b>1 SUMMARY OF TEST RESULTS .....</b>	<b>4</b>
<b>2 MEASUREMENT UNCERTAINTY.....</b>	<b>4</b>
<b>3 GENERAL INFORMATION .....</b>	<b>5</b>
3.1 GENERAL DESCRIPTION OF EUT .....	5
3.2 DESCRIPTION OF TEST MODES .....	6
3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS .....	6
3.4 DESCRIPTION OF SUPPORT UNITS .....	6
<b>4 TEST TYPES AND RESULTS .....</b>	<b>7</b>
4.1 RADIATED EMISSION MEASUREMENT .....	7
4.1.1 LIMITS OF RADIATED EMISSION MEASUREMENT .....	7
4.1.2 TEST INSTRUMENTS.....	8
4.1.3 TEST PROCEDURES .....	9
4.1.4 DEVIATION FROM TEST STANDARD .....	9
4.1.5 TEST SETUP.....	10
4.1.6 EUT OPERATING CONDITIONS .....	11
4.1.7 TEST RESULTS .....	11
4.2 20dB BANDWIDTH MEASUREMENT.....	16
4.2.1 LIMITS OF 20dB BANDWIDTH MEASUREMENT.....	16
4.2.2 TEST INSTRUMENTS .....	16
4.2.3 TEST PROCEDURE .....	16
4.2.4 DEVIATION FROM TEST STANDARD .....	17
4.2.5 TEST SETUP .....	17
4.2.6 EUT OPERATING CONDITIONS.....	17
4.2.7 TEST RESULTS .....	17
<b>5 PHOTOGRAPHS OF THE TEST CONFIGURATION.....</b>	<b>19</b>
<b>6 APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB .....</b>	<b>20</b>



Test Report No.:RF130909N051

## RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF130909N051	Original release	Oct. 07, 2013



Test Report No.:RF130909N051

BUREAU  
VERITAS

## 1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC PART 15, SUBPART C , SECTION 15.227(2012-10)			
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT	REMARK
§15.207 (a)	Conducted Emission	N/A	EUT is powered by battery
§15.209 §15.227	Radiated Emission	PASS	Compliant
§15.215(c)	20dB Bandwidth Test	PASS	Compliant

## 2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	9kHz~30MHz	2.67dB
Radiated emissions	9KHz ~ 30MHz	2.74dB
	30MHz ~ 1GHz	4.81dB
	1GHz ~ 18GHz	4.3 dB
	18GHz ~ 40GHz	1.94dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k = 2$ .



Test Report No.:RF130909N051

BUREAU  
VERITAS

### 3 GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	REMOTE CONTROL CAR
MODEL NO.	989-331 ( 319 Series, 27MHz )
ADDITIONAL MODEL	989-332、333、334、335、336、337 338、339、340、341、342、343、345 · 53989-1 ·53989-2 ·53989-3 ·53989-5 ·53989-6 ·55989-1 · 55989-2 ·55989-8 ·56989-1 ·56989-2 ·58989-1 ·58989-2 · 58989-8 ·989-353 ·989-363 ·989-373 ·989-383 ·989-393 · 989-333 ·989-616 444 555 666 777 888 999 ·989-133 · 233 ·433 ·533 ·633 ·733 ·833 ·933 · 24518 ·62989 · 61989,61989-2,61989-4,61989-5,61989-6,61989A,61989 -2A,61989-4A,61989-5A,61989-6A,,989-311 to 989-325,989-311A to 989-325A,989-311B to 989-323B,989-511 to 989-525,989-511A to 989-525A,989-311 to 989-345,989-551 to 989-565,989-611 to 989-625,989-711 to 989-725
FCC ID	2AA6O2720130912
NOMINAL VOLTAGE	TX: DC 3V(Battery)
MODULATION TYPE	ASK
OPERATING FREQUENCY	27.145MHz
NUMBER OF CHANNEL	1
ANTENNA TYPE	External Wire Antenna
I/O PORTS	N/A
CABLE SUPPLIED	N/A

#### NOTE:

1. Additional models listed in the above table are identical with the test model 989-331 except the model name and appearance for marketing purpose.
2. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.
3. For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.



Test Report No.:RF130909N051

BUREAU  
VERITAS

### 3.2 DESCRIPTION OF TEST MODES

The EUT was tested under the following mode.

FREQUENCY	TEST MODES
27.145 MHz	Transmitting

### 3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**FCC Part 15, Subpart C, 15.227(2012-10)**

**ANSI C63.4-2003**

**ANSI C63.10-2009**

All test items have been performed and recorded as per the above standards.

### 3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit without any other necessary accessories or support units.



## 4 TEST TYPES AND RESULTS

### 4.1 RADIATED EMISSION MEASUREMENT

#### 4.1.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

According to §15.227(a), the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Frequency Range of Fundamental [MHz]	Field Strength of Fundamental Emission [Peak] [ $\mu$ V/m]	Field Strength of Fundamental Emission [Average] [ $\mu$ V/m]
26.96 – 27.28	100,000 (100 dB $\mu$ V/m)	10,000 (80 dB $\mu$ V/m)

**NOTE:**

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dB $\mu$ V/m) = 20 log Emission level ( $\mu$ V/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



Test Report No.:RF130909N051

BUREAU  
VERITAS

#### 4.1.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Spectrum Analyzer	Agilent	E4446A	MY46180622	April 24,13	April 23,14
EMI Test Receiver	Rohde&Schwarz	ESVD	847398/003	May 14,13	May 13,14
Bilog Antenna (20MHz-2GHz)	Teseq	CBL 6111D	25757	Nov. 22,12	Nov. 21,13
Horn Antenna (1GHz -18GHz)	EMCO	3117	00062558	Oct.18,12	Oct.17,13
Pre-Amplifier (20MHz-3GHz)	EMCI	EMC 330	980095	Nov. 02,12	Nov.01,13
Pre-Amplifier (100MHz-26.5GHz)	Agilent	8449B	3008A00409	May 14,13	May 13,14
Horn Antenna (15GHz-40GHz)	SCHWARZBECK	BBHA 9170	BBHA9170242	Jan. 04,11	Jan. 03,14
Pre-Amplifier (18GHz-40GHz)	EMCI	EMC 184045	980102	Nov. 04,12	Nov. 03,13
10m Semi-anechoic Chamber	CHANGLING	21.4m*12.1m*8.8m	NSEMC006	Mar. 24,13	Mar. 23,14
Digital Multimeter	FLUKE	15B	A1220010DG	Oct. 31,12	Oct. 30,13
Loop antenna (9kHz~30MHz)	Daze	ZN30900A	0708	Nov. 28,12	Nov. 27,13
Pre-Amplifier (9kHz~1GHz)	SONOMA	310D	186955	Mar. 06,13	Mar. 05,14
Test Software	ADT	ADT_Radiated_V7.6.15	N/A	N/A	N/A

NOTE:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
2. The test site was performed in Chamber
3. The FCC Site Registration No. is 502831



#### 4.1.3 TEST PROCEDURES

The basic test procedure was in accordance with ANSI C63.4 (section 12).

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meters Semi-anechoic chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, For battery operated equipment, the equipment tests shall be perform using new battery. The turntable was rotated to maximize the emission level.
- g. For below 30MHz, a loop antenna with its vertical plane is place 3m from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT. And the centre of the loop shall be 1m above the ground.

#### NOTE:


1. The resolution bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
3. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
4. Margin value = Emission level – Limit value.
5. Fundamental AV value =PK Emission +duty cycle.

#### 4.1.4 DEVIATION FROM TEST STANDARD


No deviation

#### 4.1.5 TEST SETUP

##### Below 30MHz

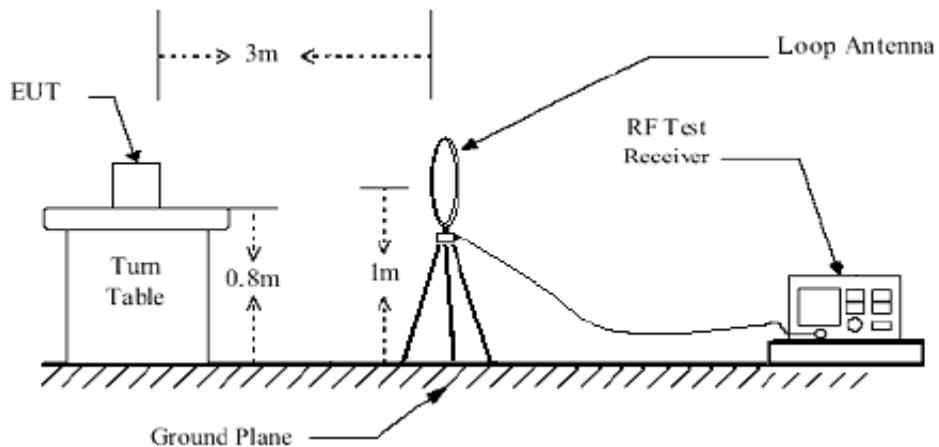

##### 30MHz~1GHz

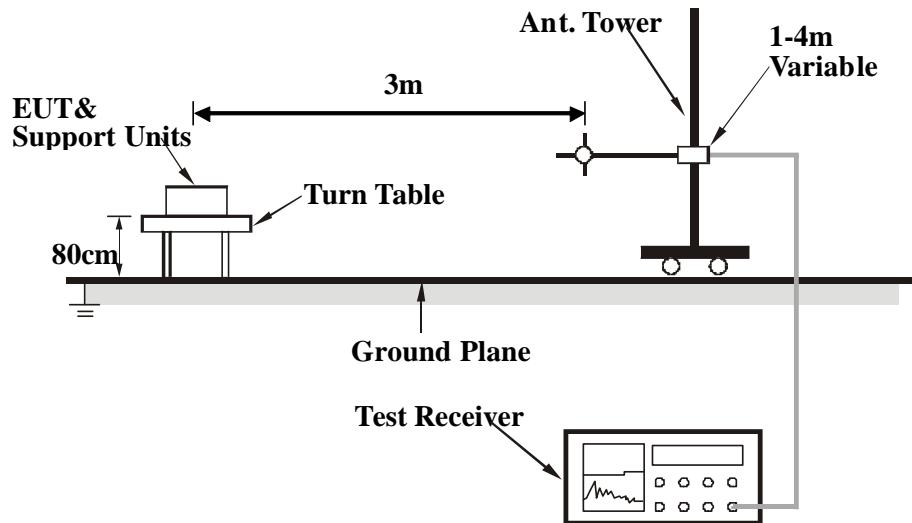

For the actual test configuration, please refer to the attached file (Test Setup Photo).



#### 4.1.6 EUT OPERATING CONDITIONS

- a. Turned on the power of equipment.
- b. Hold down the TX of button, then the EUT was operating.
- c. EUT was operated according to the type used was description in manufacturer's specifications or the User's Manual.

#### 4.1.7 TEST RESULTS

##### FIELD STRENGTH OF FUNDAMENTAL

###### ANTENNA POLARITY: 0°

No.	Freq. (MHz)	Correction Factor (dB/m)	Raw Value (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
*	27.145(PK)	21. 62	43. 44	65.06	100	-34.94.
*	27.145(AV)	-		60.88	80	-19.12

###### ANTENNA POLARITY: 90°

No.	Freq. (MHz)	Correction Factor (dB/m)	Raw Value (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
*	27.145(PK)	21. 02	16.63	38.25	100	-61.75
*	27.145(AV)	-		34.07	80	-45.93

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
  2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. “\*”: Fundamental frequency.
  6. The average value of fundamental frequency is: Average value = Peak value +AV factor, where the AV factor is calculated from following formula: AV factor=20 log (Duty cycle) = 20 log (10.91/17.65) = -4.18 dB , Please see page 14~15 for plotted duty.



Test Report No.:RF130909N051


BUREAU  
VERITAS

<b>FREQUENCY RANGE</b>	30MHz ~ 1GHz	<b>DETECTOR FUNCTION</b>	Quasi-Peak (QP)
------------------------	--------------	--------------------------	-----------------

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	54.25	24.2 QP	40.0	-15.8	1.11 H	0	14.59	9.57
2	351.72	29.2 QP	46.0	-16.8	1.40 H	352	12.31	16.87
3	379.20	30.9 QP	46.0	-15.1	1.28 H	359	13.39	17.53
4	406.68	32.7 QP	46.0	-13.3	1.01 H	0	14.05	18.64
5	434.17	28.6 QP	46.0	-17.4	1.00 H	0	9.32	19.31
6	487.52	27.1 QP	46.0	-18.9	1.00 H	0	6.45	20.66

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. For the test results, the EUT had been tested from 9KHz ~1GHz. But only the worst case was shown in test report.

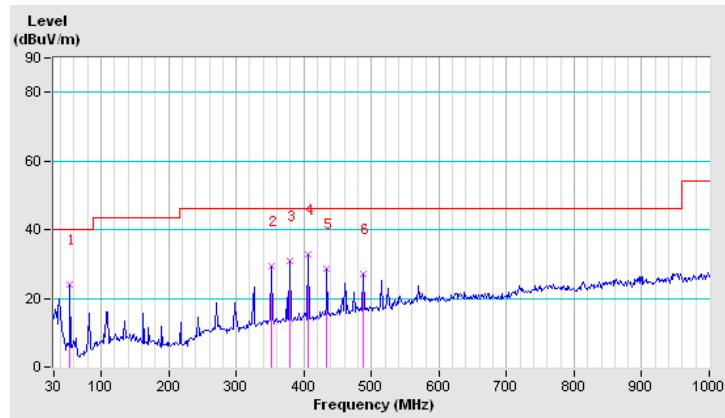



Test Report No.:RF130909N051


BUREAU  
VERITAS

<b>FREQUENCY RANGE</b>	30MHz ~ 1GHz	<b>DETECTOR FUNCTION</b>	Quasi-Peak (QP)
------------------------	--------------	--------------------------	-----------------

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	54.25	33.9 QP	40.0	-6.1	1.00 V	296	24.29	9.57
2	81.73	29.5 QP	40.0	-10.5	1.00 V	310	20.59	8.89
3	109.22	33.1 QP	43.5	-10.4	1.35 V	245	20.86	12.21
4	351.72	35.1 QP	46.0	-10.9	1.00 V	354	18.25	16.87
5	379.20	39.4 QP	46.0	-6.6	1.00 V	340	21.83	17.53
6	406.68	41.1 QP	46.0	-4.9	1.00 V	327	22.42	18.64

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. For the test results, the EUT had been tested from 9KHz ~1GHz. But only the worst case was shown in test report.

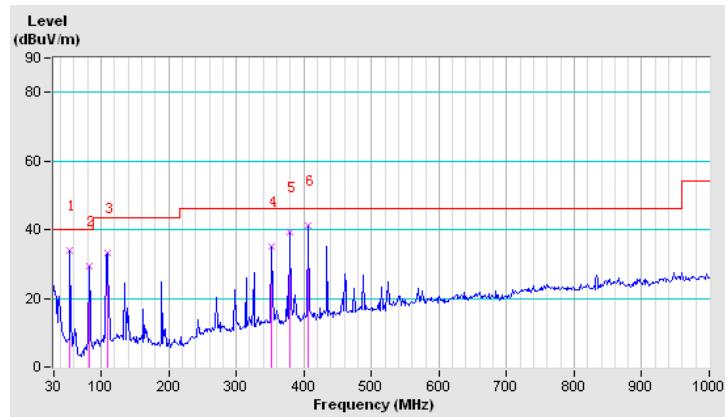



Test Report No.:RF130909N051

BUREAU  
VERITAS


### Duty Cycle:

$T_p = 17.65 \text{ ms}$

$T_{on} = T_{on1} * \text{Number} + T_{on2} * \text{Number} = 1.488 * 4 + 0.496 * 10 = 10.91 \text{ ms}$

Duty Cycle =  $T_{on} / T_p * 100\% = 10.91 / 17.65 * 100\% = 61.81\%$

$T_p = 17.65 \text{ ms}$

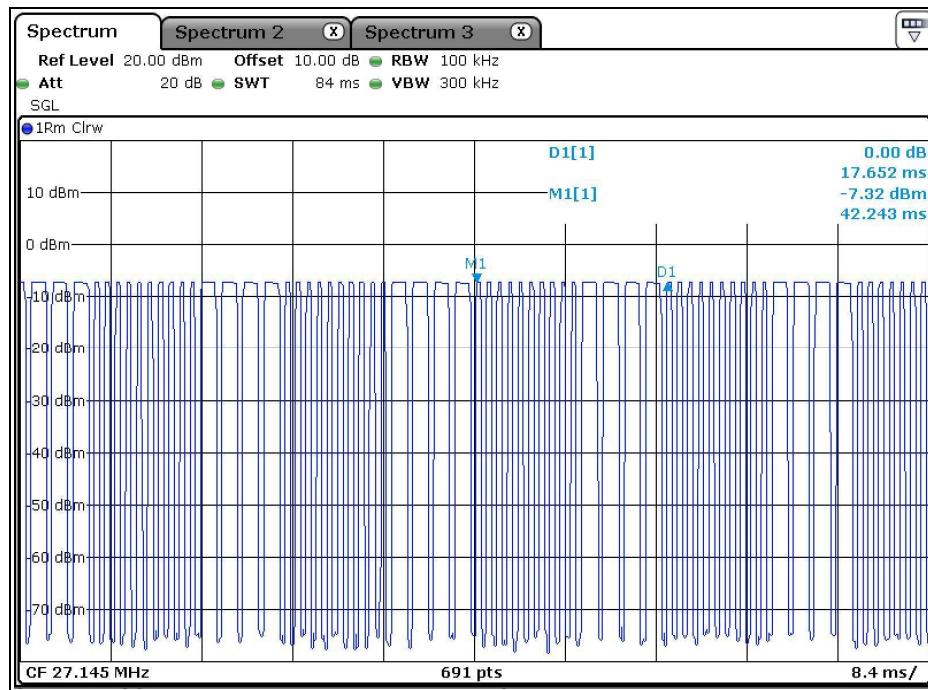





Test Report No.:RF130909N051

BUREAU  
VERITAS

**Ton1=1.488 ms**

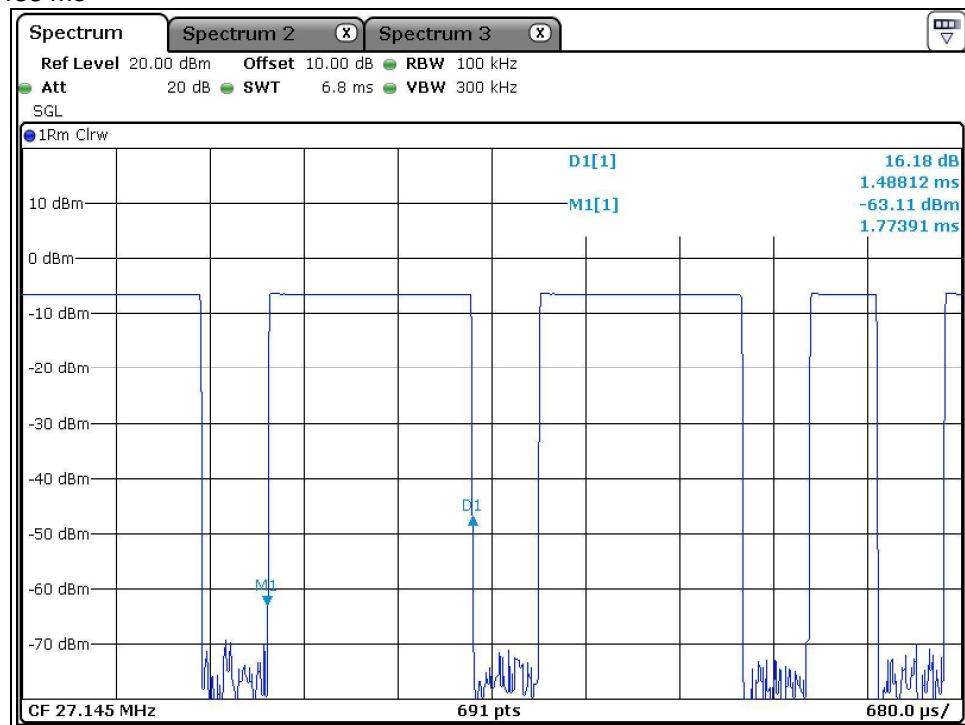

**Ton2=0.496 ms**

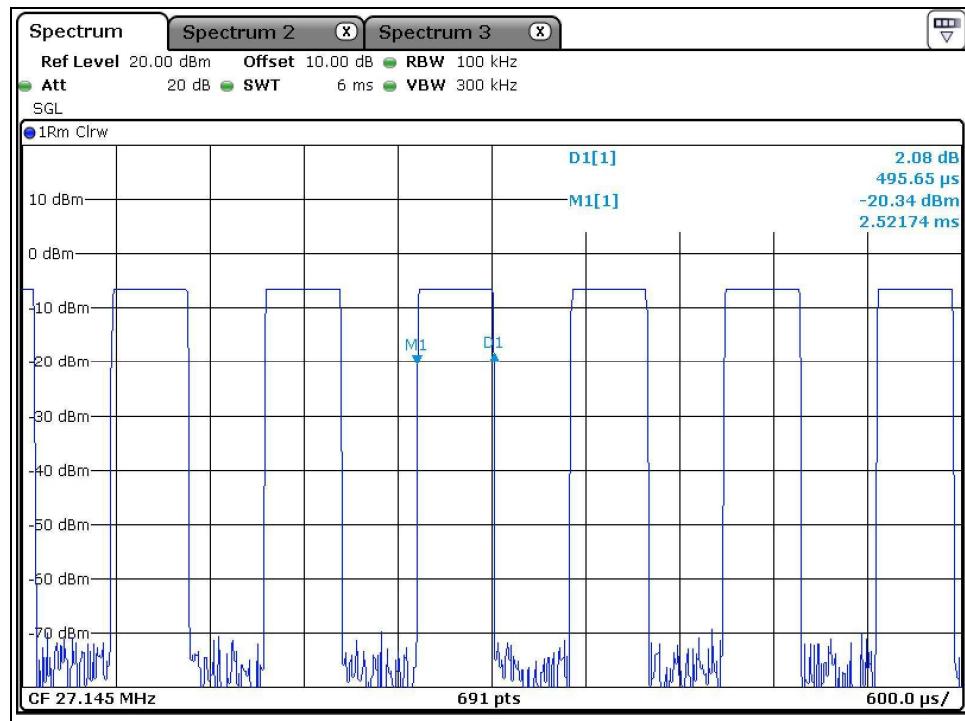



## 4.2 20dB BANDWIDTH MEASUREMENT

### 4.2.1 LIMITS OF 20dB BANDWIDTH MEASUREMENT

According to FCC 15.215(c), must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

### 4.2.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Signal Analyzer	Rohde&Schwarz	FSV7	102331	Nov. 26,12	Nov. 25,13
Spectrum Analyzer (9KHz-25GHz)	Agilent	E7405A	MY45118807	May 14,13	May 13,14
Digital Multimeter	FLUKE	15B	A1220010DG	Oct. 31,12	Oct. 30,13
Bluetooth tester	Rohde&Schwarz	CBT	100325	N/A	N/A

**NOTE:** 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.

2. The test site was performed in Oven room

### 4.2.3 TEST PROCEDURE

- a. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- c. Measure the frequency difference of two frequencies that were attenuated 20dB from the reference level. Record the frequency difference as the emission bandwidth.
- d. Repeat above procedures until all frequencies measured were complete.




Test Report No.:RF130909N051

BUREAU  
VERITAS

#### 4.2.4 DEVIATION FROM TEST STANDARD

No deviation.

#### 4.2.5 TEST SETUP

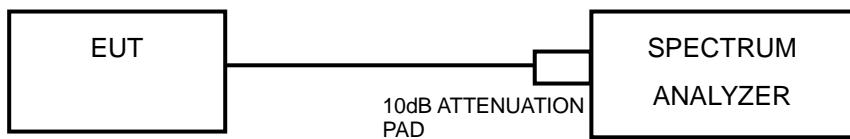

#### 4.2.6 EUT OPERATING CONDITIONS

Same as item 4.1.6

#### 4.2.7 TEST RESULTS


CHANNEL FREQUENCY (MHz)	20dB BANDWIDTH (KHz)
27.145	47.76



Test Report No.:RF130909N051

BUREAU  
VERITAS

**Test Data:**

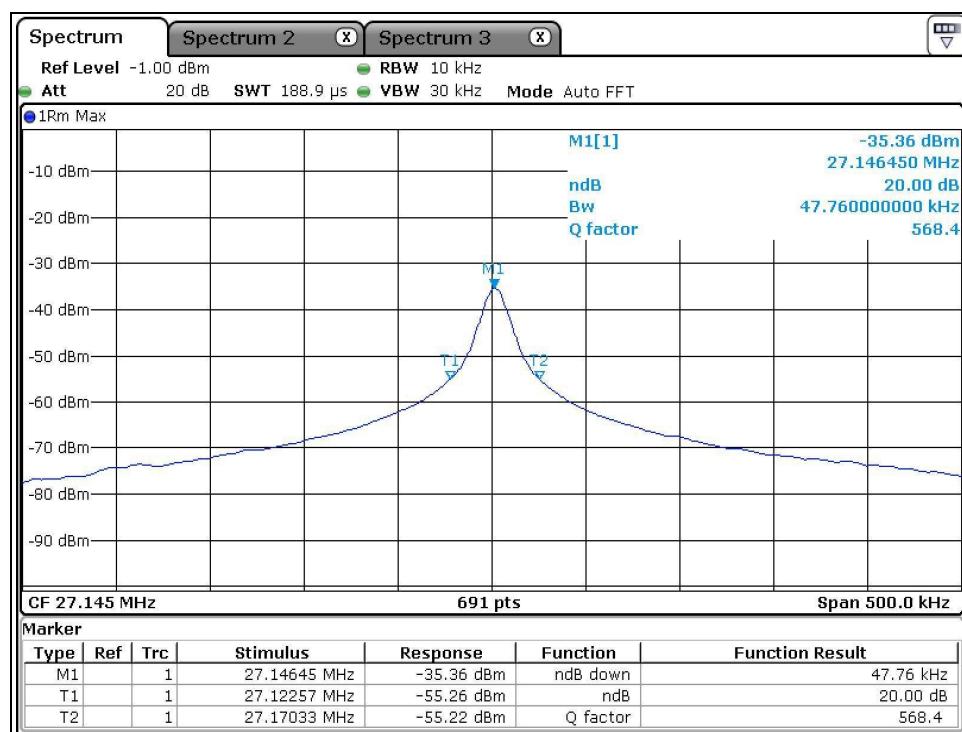



Test Report No.:RF130909N051

BUREAU  
VERITAS

## 5 PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



Test Report No.:RF130909N051

## 6 APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.

---END---