



Frequency: 1GHz~18GHz

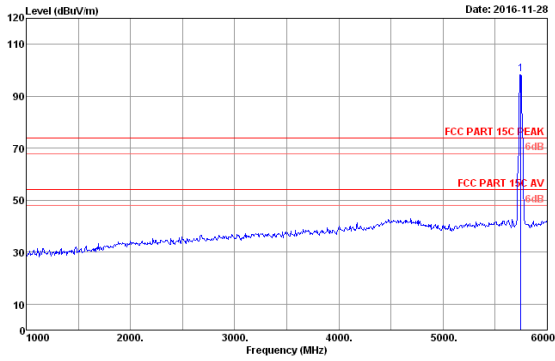

Site no. : 3m Chamber Data no. : 1
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.6°C/54.6% Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEB802.11a 5745MHz Tx Mode
 M/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/a)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/a)	Limits (dBuV/a)	Margin (dB)	Remark
1	5745.00	32.94	11.97	88.96	35.45	98.42	74.00	-24.42	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

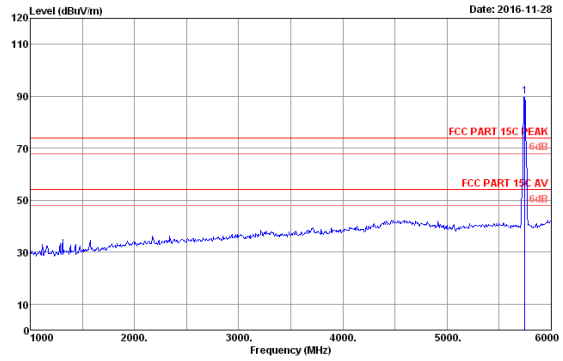

Site no. : 3m Chamber Data no. : 2
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.6°C/54.6% Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEB802.11a 5745MHz Tx Mode
 M/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/a)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/a)	Limits (dBuV/a)	Margin (dB)	Remark
1	5745.00	32.94	11.97	80.53	35.45	88.99	74.00	-15.99	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

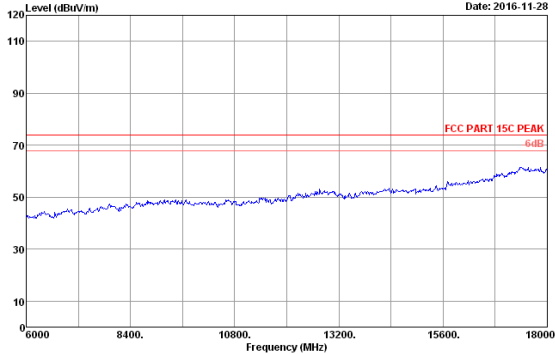

Site no. : 3m Chamber Data no. : 3
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.6°C/54.6% Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEB802.11a 5745MHz Tx Mode
 M/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/a)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/a)	Limits (dBuV/a)	Margin (dB)	Remark
1	11490.00	38.31	13.49	29.58	35.36	46.02	54.00	7.98	Average
2	11490.00	38.31	13.49	41.69	35.36	56.13	74.00	15.87	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

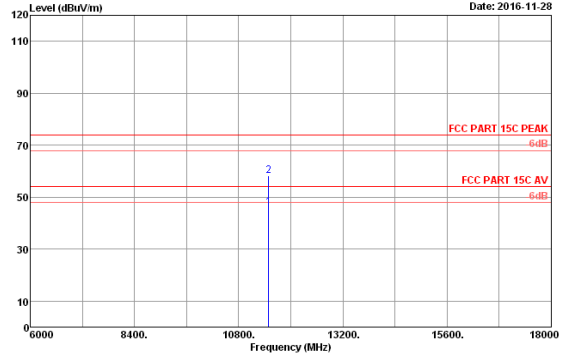


Site no. : 3m Chamber Data no. : 4
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.6°C/54.6% Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEB802.11a 5745MHz Tx Mode
 M/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/a)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/a)	Limits (dBuV/a)	Margin (dB)	Remark
1	11490.00	38.31	13.49	29.58	35.36	46.02	54.00	7.98	Average
2	11490.00	38.31	13.49	41.69	35.36	56.13	74.00	15.87	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

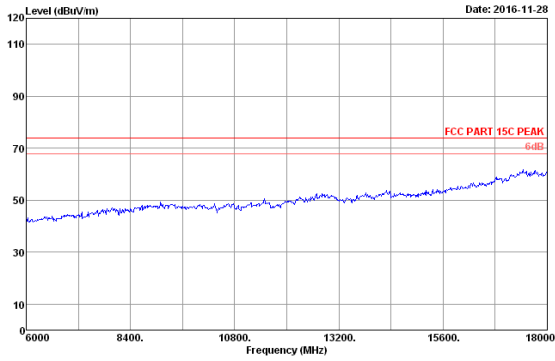


Site no. : 3m Chamber Data no. : 5
 Dis. / Ant. : 3m 2016 MCID1209 3007 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.6nC/54.0N Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11a 5745MHz Tx Mode
 M/N:CR2

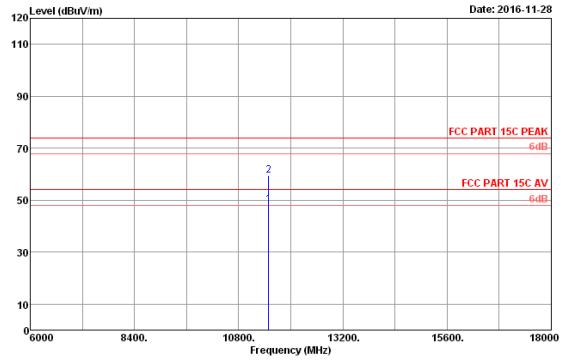

Site no. : 3m Chamber Data no. : 6
 Dis. / Ant. : 3m 2016 MCID1209 3007 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.6nC/54.0N Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11a 5745MHz Tx Mode
 M/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11490.00	38.31	13.49	31.83	35.36	48.27	54.00	5.73	Average
2	11490.00	38.31	13.49	43.11	35.36	59.55	74.00	14.45	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -AMP Factor
 2. The emission levels that are 20dB below the official limit are not reported.

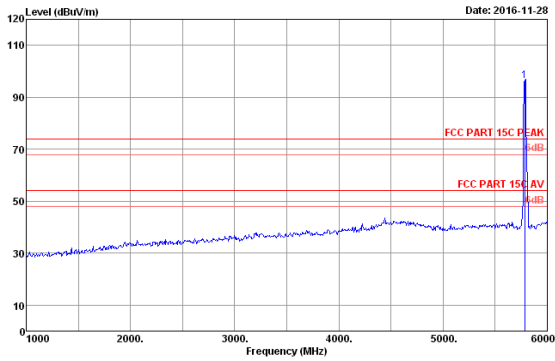

Site no. : 3m Chamber Data no. : 11
 Dis. / Ant. : 3m 2016 MCID1209 3007 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.6nC/54.0N Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11a 5785MHz Tx Mode
 M/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5785.00	33.03	11.97	86.71	35.45	96.26	74.00	-22.26	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -AMP Factor
 2. The emission levels that are 20dB below the official limit are not reported.

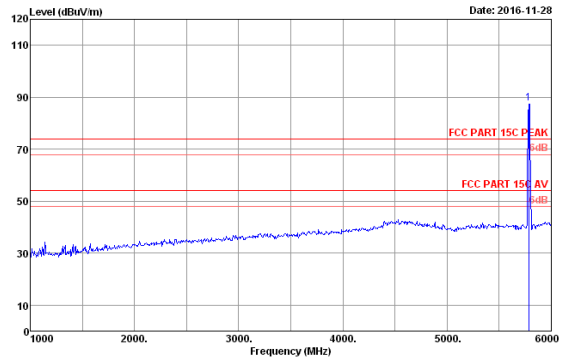


Site no. : 3m Chamber Data no. : 12
 Dis. / Ant. : 3m 2016 MCID1209 3007 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.6nC/54.0N Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11a 5785MHz Tx Mode
 M/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5785.00	33.03	11.97	78.26	35.45	87.81	74.00	-13.81	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -AMP Factor
 2. The emission levels that are 20dB below the official limit are not reported.

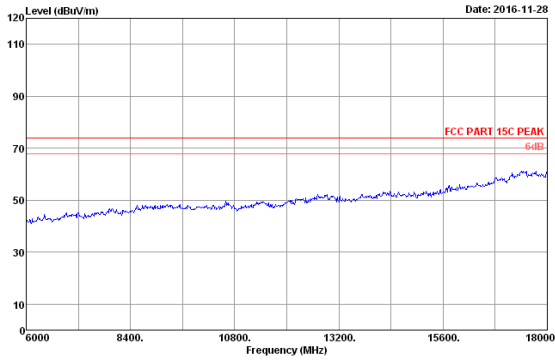


Site no. : 3m Chamber Data no. : 13
 Dis. / Ant. : 3m 2016 MCID1209 3007 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.6mC/54.0m Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11a 5735MHz Tx Mode
 M/N:CR2

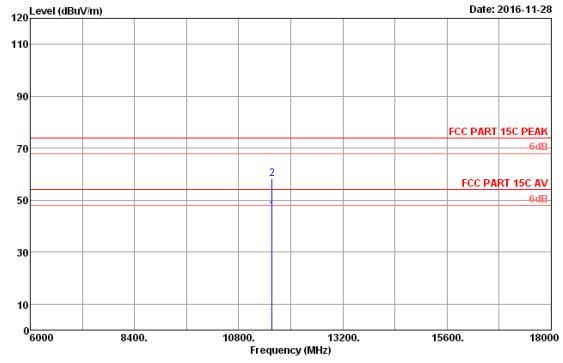


Site no. : 3m Chamber Data no. : 14
 Dis. / Ant. : 3m 2016 MCID1209 3007 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.6mC/54.0m Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11a 5735MHz Tx Mode
 M/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11570.00	38.27	13.50	29.34	35.35	45.76	54.00	8.24	Average
2	11570.00	38.27	13.50	41.85	35.35	58.27	74.00	15.73	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

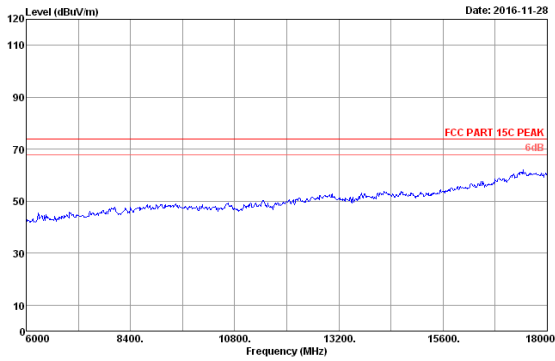


Site no. : 3m Chamber Data no. : 15
 Dis. / Ant. : 3m 2016 MCID1209 3007 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.6mC/54.0m Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11a 5735MHz Tx Mode
 M/N:CR2

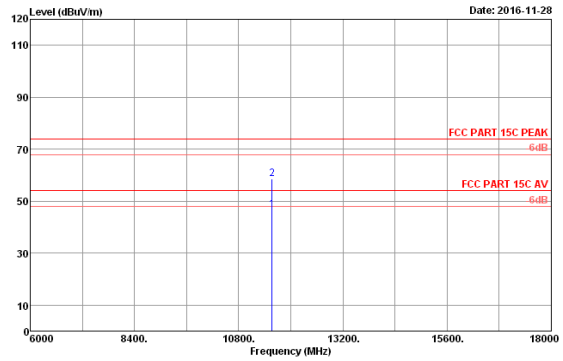

Site no. : 3m Chamber Data no. : 16
 Dis. / Ant. : 3m 2016 MCID1209 3007 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.6mC/54.0m Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11a 5735MHz Tx Mode
 M/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11570.00	38.27	13.50	30.28	35.35	46.70	54.00	7.30	Average
2	11570.00	38.27	13.50	42.16	35.35	58.58	74.00	15.42	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

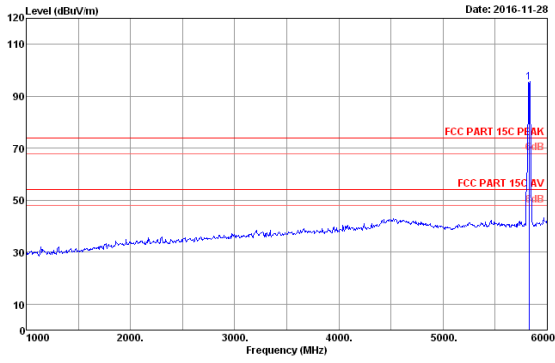

Date: 2016-11-28
 Site no. : 3m Chamber Data no. : 17
 Dis. / Ant. : 3m 2016 MCID1209 3007 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.6nC/54.0kV Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11a 5825MHz Tx Mode
 M/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5825.00	33.12	11.98	85.85	35.45	95.50	74.00	-21.50	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Ant Factor
 2. The emission levels that are 20dB below the official limit are not reported.

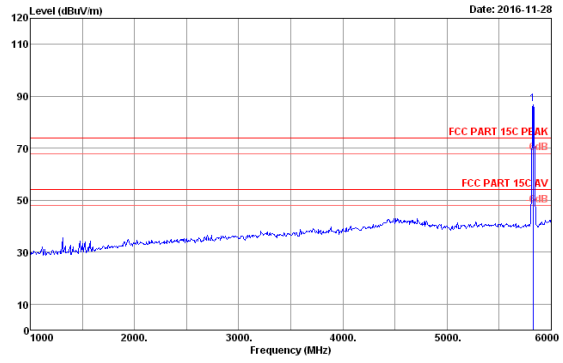

Date: 2016-11-28
 Site no. : 3m Chamber Data no. : 18
 Dis. / Ant. : 3m 2016 MCID1209 3007 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.6nC/54.0kV Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11a 5825MHz Tx Mode
 M/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5825.00	33.12	11.98	77.25	35.45	86.90	74.00	-12.90	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Ant Factor
 2. The emission levels that are 20dB below the official limit are not reported.

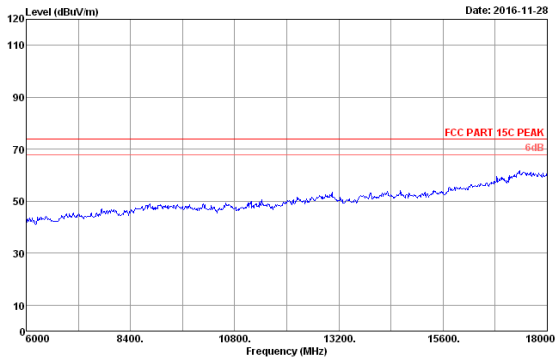

Date: 2016-11-28
 Site no. : 3m Chamber Data no. : 19
 Dis. / Ant. : 3m 2016 MCID1209 3007 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.6nC/54.0kV Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11a 5825MHz Tx Mode
 M/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11650.00	38.24	13.52	29.19	35.37	45.58	54.00	8.42	Average
2	11650.00	38.24	13.52	42.86	35.37	59.25	74.00	14.75	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Ant Factor
 2. The emission levels that are 20dB below the official limit are not reported.

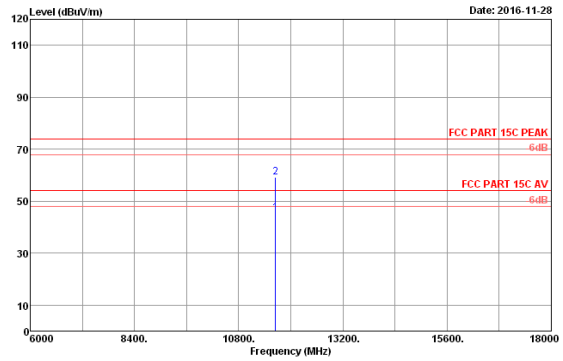


Date: 2016-11-28
 Site no. : 3m Chamber Data no. : 20
 Dis. / Ant. : 3m 2016 MCID1209 3007 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.6nC/54.0kV Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11a 5825MHz Tx Mode
 M/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11650.00	38.24	13.52	29.19	35.37	45.58	54.00	8.42	Average
2	11650.00	38.24	13.52	42.86	35.37	59.25	74.00	14.75	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Ant Factor
 2. The emission levels that are 20dB below the official limit are not reported.

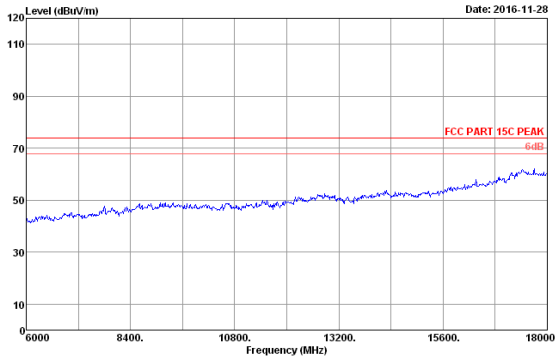


Site no. : 3m Chamber Data no. : 21
 Dis. / Ant. : 3m 2016 MCID1209 3007 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.6nC/54.0kV Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11a 5825MHz Tx Mode
 M/N:CR2

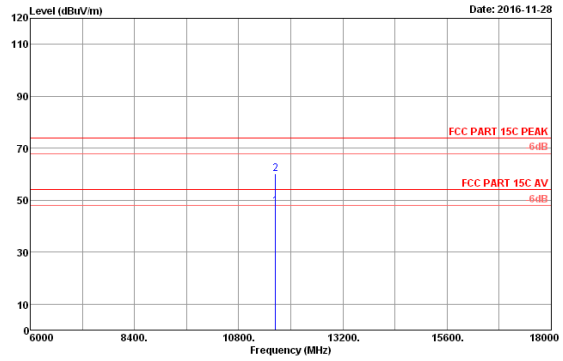

Site no. : 3m Chamber Data no. : 22
 Dis. / Ant. : 3m 2016 MCID1209 3007 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.6nC/54.0kV Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11a 5825MHz Tx Mode
 M/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11650.00	38.24	13.52	31.19	35.37	47.58	54.00	6.42	Average
2	11650.00	38.24	13.52	43.68	35.37	60.07	74.00	13.93	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -AMP Factor
 2. The emission levels that are 20dB below the official limit are not reported.

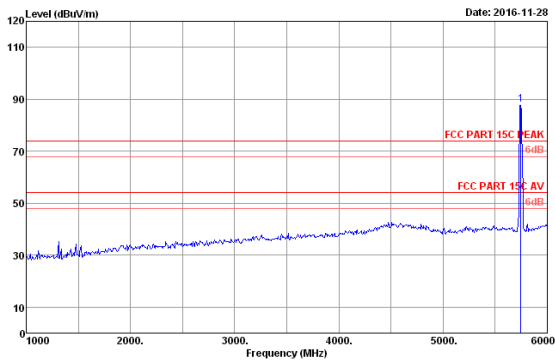

Site no. : 3m Chamber Data no. : 27
 Dis. / Ant. : 3m 2016 MCID1209 3007 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.6nC/54.0kV Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11n HT20 5745MHz Tx Mode
 M/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5745.00	32.94	11.97	78.68	35.45	88.14	74.00	-14.14	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -AMP Factor
 2. The emission levels that are 20dB below the official limit are not reported.

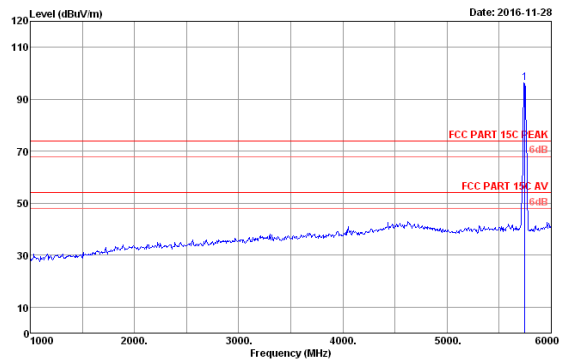


Site no. : 3m Chamber Data no. : 28
 Dis. / Ant. : 3m 2016 MCID1209 3007 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.6nC/54.0kV Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11n HT20 5745MHz Tx Mode
 M/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5745.00	32.94	11.97	86.87	35.45	96.33	74.00	-22.33	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -AMP Factor
 2. The emission levels that are 20dB below the official limit are not reported.

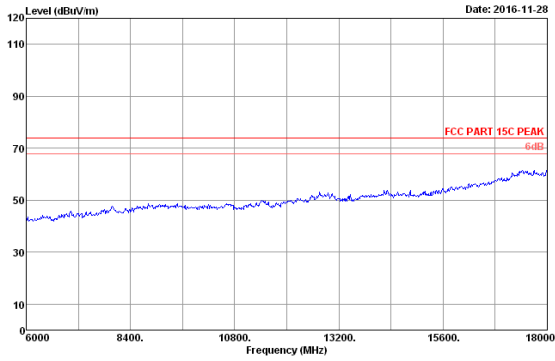


Site no. : 3m Chamber Data no. : 29
 Dis. / Ant. : 3m 2016 MCID1209 3007 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.6mC/54.0k Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11n HT20 5745MHz Tx Mode
 M/N:CR2

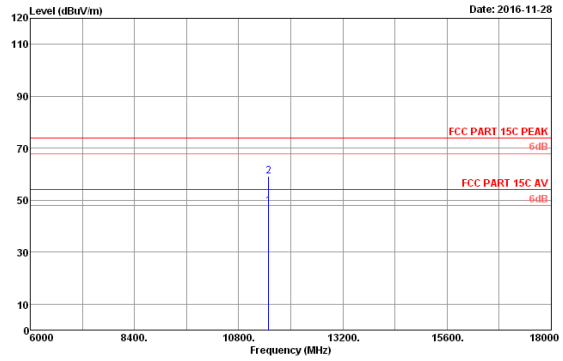


Site no. : 3m Chamber Data no. : 30
 Dis. / Ant. : 3m 2016 MCID1209 3007 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.6mC/54.0k Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11n HT20 5745MHz Tx Mode
 M/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11490.00	38.31	13.49	31.15	35.36	47.59	54.00	6.41	Average
2	11490.00	38.31	13.49	42.88	35.36	59.32	74.00	14.68	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

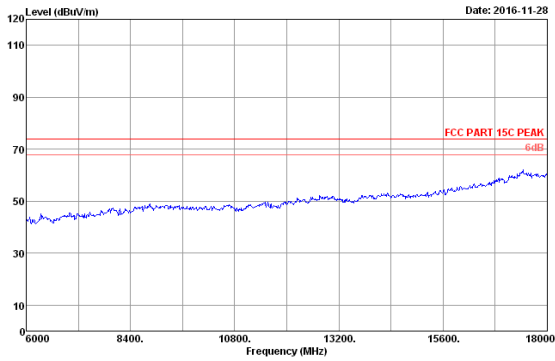


Site no. : 3m Chamber Data no. : 31
 Dis. / Ant. : 3m 2016 MCID1209 3007 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.6mC/54.0k Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11n HT20 5745MHz Tx Mode
 M/N:CR2

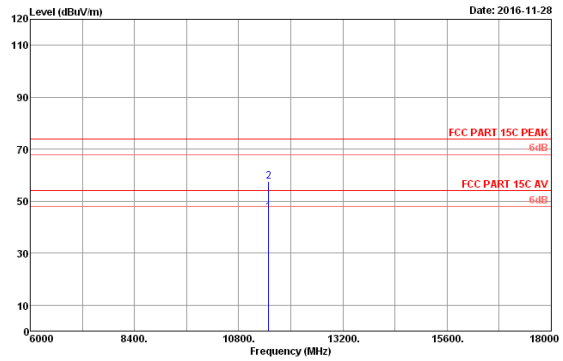

Site no. : 3m Chamber Data no. : 32
 Dis. / Ant. : 3m 2016 MCID1209 3007 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.6mC/54.0k Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11n HT20 5745MHz Tx Mode
 M/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11490.00	38.31	13.49	29.35	35.36	45.79	54.00	8.21	Average
2	11490.00	38.31	13.49	41.22	35.36	57.66	74.00	16.34	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

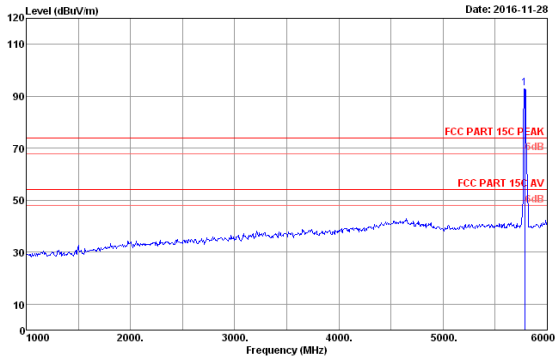

Date: 2016-11-28
 Site no. : 3m Chamber Data no. : 37
 Dis. / Ant. : 3m 2016 MCID1209 3007 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.6mC/54.0k Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11n HT20 5785MHz Tx Mode
 M/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5785.00	33.03	11.97	83.66	35.45	93.21	74.00	-19.21	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

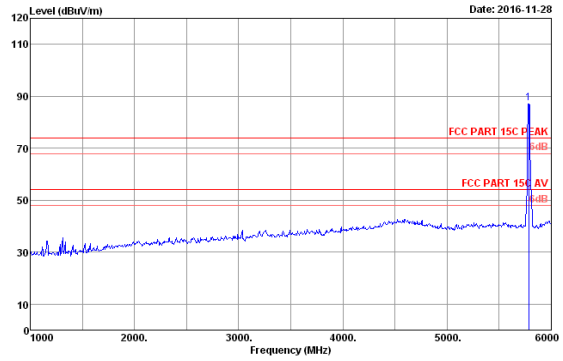

Date: 2016-11-28
 Site no. : 3m Chamber Data no. : 38
 Dis. / Ant. : 3m 2016 MCID1209 3007 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.6mC/54.0k Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11n HT20 5785MHz Tx Mode
 M/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5785.00	33.03	11.97	77.89	35.45	87.44	74.00	-13.44	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

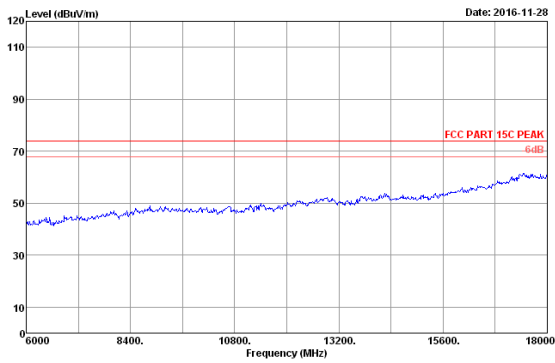

Date: 2016-11-28
 Site no. : 3m Chamber Data no. : 39
 Dis. / Ant. : 3m 2016 MCID1209 3007 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.6mC/54.0k Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11n HT20 5785MHz Tx Mode
 M/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11570.00	38.27	13.50	29.37	35.35	45.79	54.00	8.21	Average
2	11570.00	38.27	13.50	41.55	35.35	57.97	74.00	16.03	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

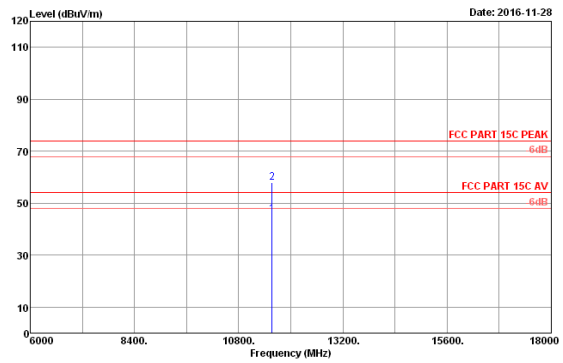


Date: 2016-11-28
 Site no. : 3m Chamber Data no. : 40
 Dis. / Ant. : 3m 2016 MCID1209 3007 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.6mC/54.0k Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11n HT20 5785MHz Tx Mode
 M/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11570.00	38.27	13.50	29.37	35.35	45.79	54.00	8.21	Average
2	11570.00	38.27	13.50	41.55	35.35	57.97	74.00	16.03	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

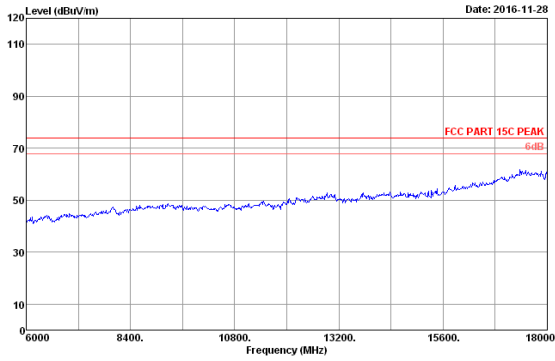


Site no. : 3m Chamber Data no. : 41
 Dis. / Ant. : 3m 2016 MCID1209 3007 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.6mC/54.0m Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11n HT20 5785MHz Tx Mode
 M/N:CR2

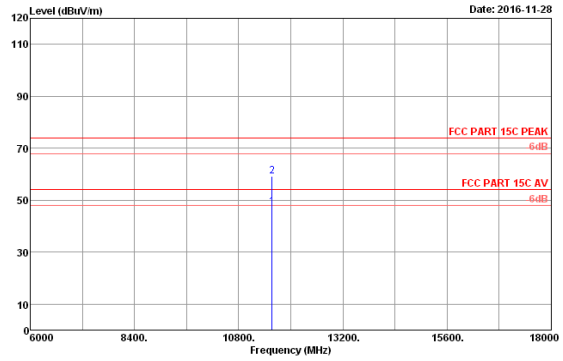

Site no. : 3m Chamber Data no. : 42
 Dis. / Ant. : 3m 2016 MCID1209 3007 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.6mC/54.0m Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11n HT20 5785MHz Tx Mode
 M/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11570.00	38.27	13.50	31.05	35.35	47.47	54.00	6.53	Average
2	11570.00	38.27	13.50	42.81	35.35	59.23	74.00	14.77	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

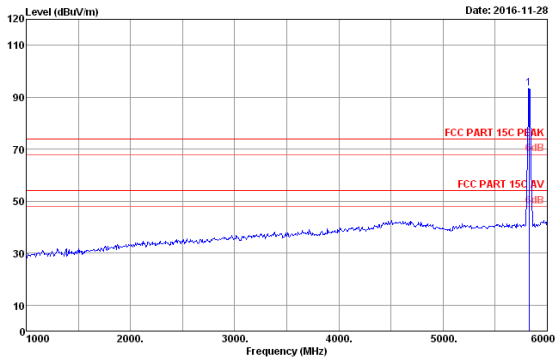

Site no. : 3m Chamber Data no. : 43
 Dis. / Ant. : 3m 2016 MCID1209 3007 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.6mC/54.0m Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11n HT20 5825MHz Tx Mode
 M/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5825.00	33.12	11.98	83.67	35.45	93.32	74.00	-19.32	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

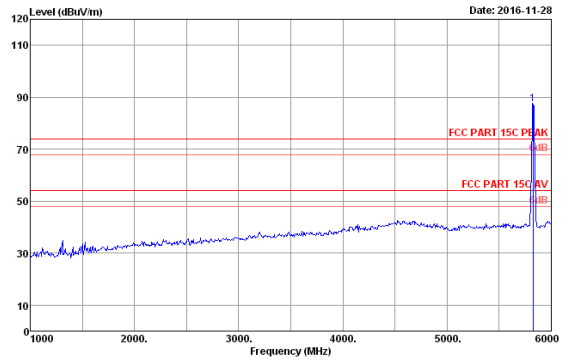


Site no. : 3m Chamber Data no. : 44
 Dis. / Ant. : 3m 2016 MCID1209 3007 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.6mC/54.0m Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11n HT20 5825MHz Tx Mode
 M/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5825.00	33.12	11.98	77.68	35.45	87.33	74.00	-13.33	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

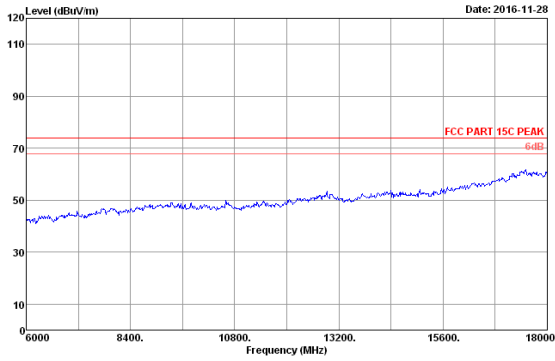


Site no. : 3m Chamber Data no. : 45
 Dis. / Ant. : 3m 2016 MCID1209 3007 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.6nC/54.0kV Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11n HT20 5825MHz Tx Mode
 M/N:CR2

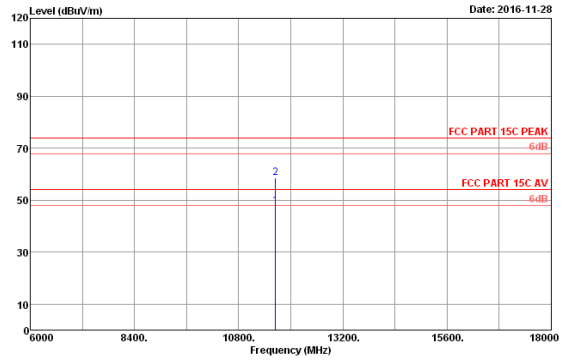


Site no. : 3m Chamber Data no. : 46
 Dis. / Ant. : 3m 2016 MCID1209 3007 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.6nC/54.0kV Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11n HT20 5825MHz Tx Mode
 M/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11650.00	38.24	13.52	31.24	35.37	47.63	54.00	6.37	Average
2	11650.00	38.24	13.52	42.16	35.37	58.55	74.00	15.45	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

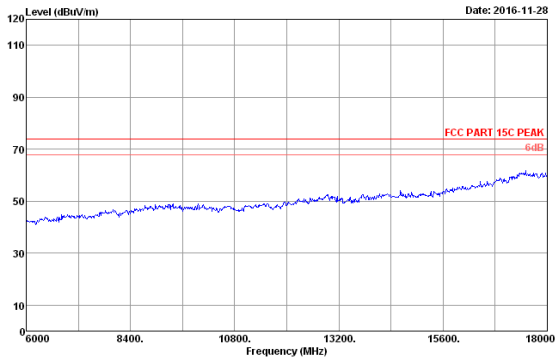


Site no. : 3m Chamber Data no. : 47
 Dis. / Ant. : 3m 2016 MCID1209 3007 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.6nC/54.0kV Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11n HT20 5825MHz Tx Mode
 M/N:CR2

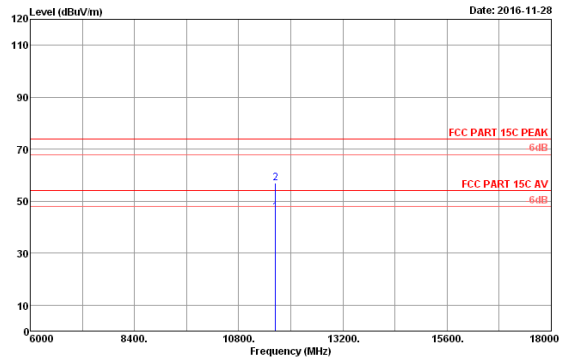

Site no. : 3m Chamber Data no. : 48
 Dis. / Ant. : 3m 2016 MCID1209 3007 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.6nC/54.0kV Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11n HT20 5825MHz Tx Mode
 M/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11650.00	38.24	13.52	29.38	35.37	45.77	54.00	8.23	Average
2	11650.00	38.24	13.52	40.55	35.37	56.94	74.00	17.06	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

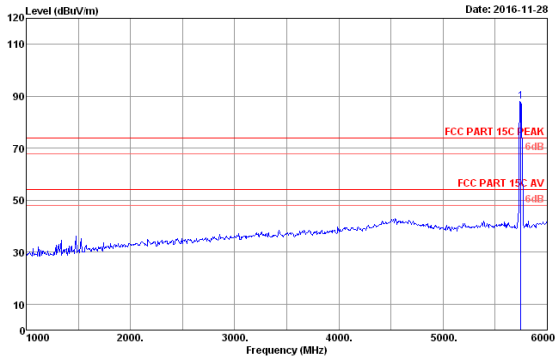

Date: 2016-11-28
 Site no. : 3m Chamber Data no. : 53
 Dis. / Ant. : 3m 2016 MCID1209 3007 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.6nC/54.0W Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT20 5745MHz Tx Mode
 M/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5745.00	32.94	11.97	78.69	35.45	88.15	74.00	-14.15	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Ant Factor
 2. The emission levels that are 20dB below the official limit are not reported.

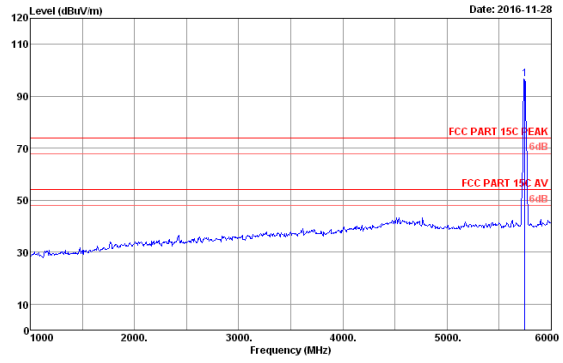


Date: 2016-11-28
 Site no. : 3m Chamber Data no. : 54
 Dis. / Ant. : 3m 2016 MCID1209 3007 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.6nC/54.0W Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT20 5745MHz Tx Mode
 M/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5745.00	32.94	11.97	87.08	35.45	96.54	74.00	-22.54	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Ant Factor
 2. The emission levels that are 20dB below the official limit are not reported.

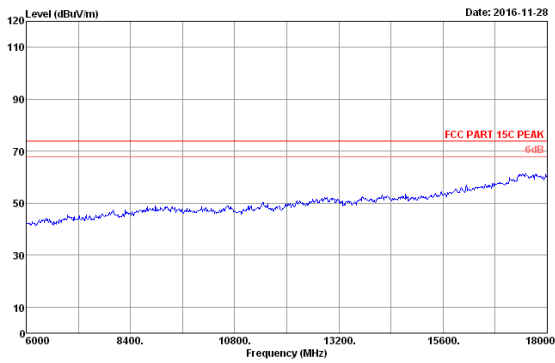


Date: 2016-11-28
 Site no. : 3m Chamber Data no. : 55
 Dis. / Ant. : 3m 2016 MCID1209 3007 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.6nC/54.0W Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT20 5745MHz Tx Mode
 M/N:CR2

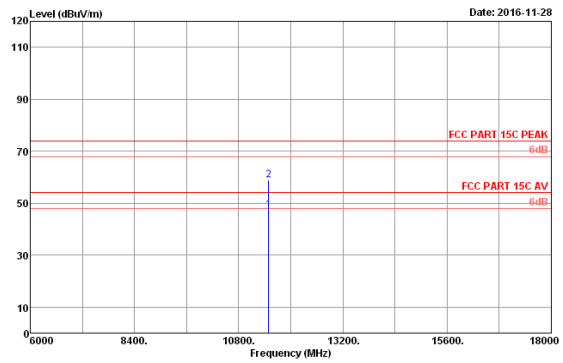


Date: 2016-11-28
 Site no. : 3m Chamber Data no. : 56
 Dis. / Ant. : 3m 2016 MCID1209 3007 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.6nC/54.0W Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT20 5745MHz Tx Mode
 M/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11490.00	38.31	13.49	30.88	35.36	47.32	54.00	6.68	Average
2	11490.00	38.31	13.49	42.39	35.36	58.83	74.00	15.17	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Ant Factor
 2. The emission levels that are 20dB below the official limit are not reported.

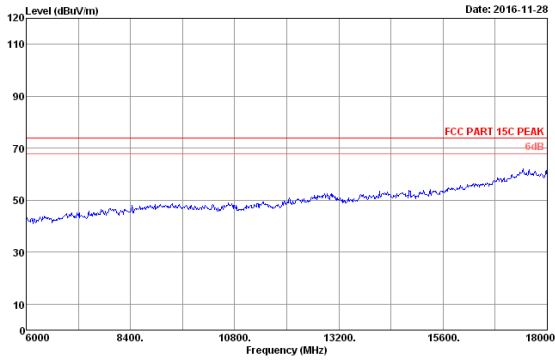


Site no. : 3m Chamber Data no. : 57
 Dis. / Ant. : 3m 2016 MCID1209 3007 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.6mC/54.0m Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT20 5745MHz Tx Mode
 M/N:CR2

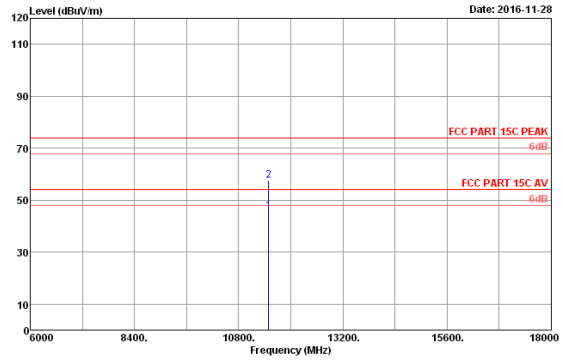

Site no. : 3m Chamber Data no. : 58
 Dis. / Ant. : 3m 2016 MCID1209 3007 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.6mC/54.0m Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT20 5745MHz Tx Mode
 M/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11490.00	38.31	13.49	29.24	35.36	45.68	54.00	8.32	Average
2	11490.00	38.31	13.49	41.27	35.36	57.71	74.00	16.29	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

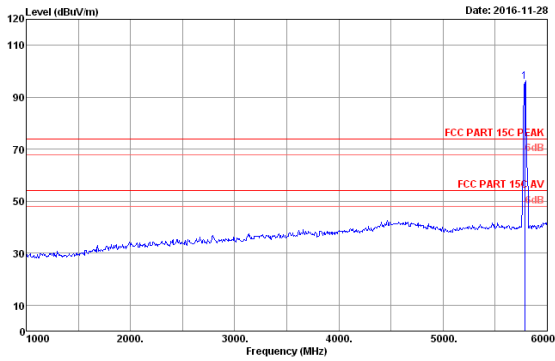

Site no. : 3m Chamber Data no. : 63
 Dis. / Ant. : 3m 2016 MCID1209 3007 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.6mC/54.0m Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT20 5785MHz Tx Mode
 M/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5785.00	33.03	11.97	86.34	35.45	95.89	74.00	-21.89	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

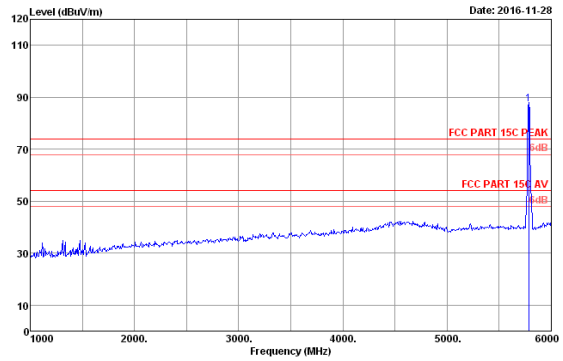


Site no. : 3m Chamber Data no. : 64
 Dis. / Ant. : 3m 2016 MCID1209 3007 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.6mC/54.0m Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT20 5785MHz Tx Mode
 M/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5785.00	33.03	11.97	77.86	35.45	87.41	74.00	-13.41	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

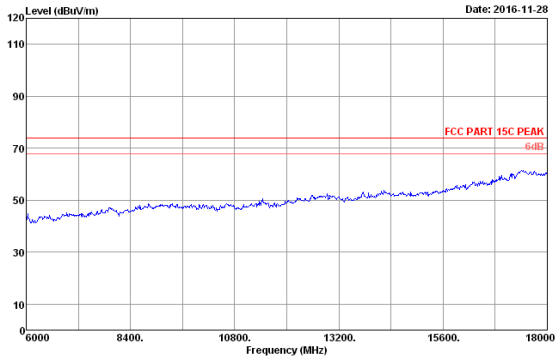


Site no. : 3m Chamber Data no. : 65
 Dis. / Ant. : 3m 2016 MCID1209 3007 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.6mC/54.0m Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT20 5785MHz Tx Mode
 M/N:CR2

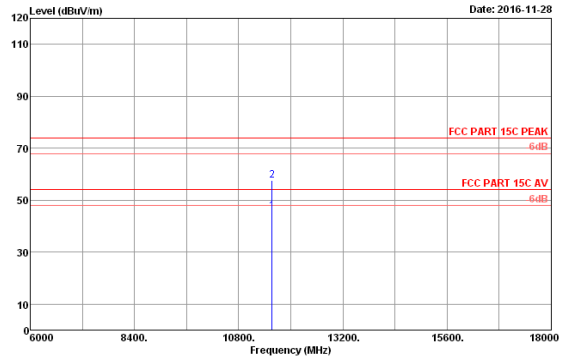


Site no. : 3m Chamber Data no. : 66
 Dis. / Ant. : 3m 2016 MCID1209 3007 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.6mC/54.0m Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT20 5785MHz Tx Mode
 M/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11570.00	38.27	13.50	29.37	35.35	45.79	54.00	8.21	Average
2	11570.00	38.27	13.50	41.11	35.35	57.53	74.00	16.47	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

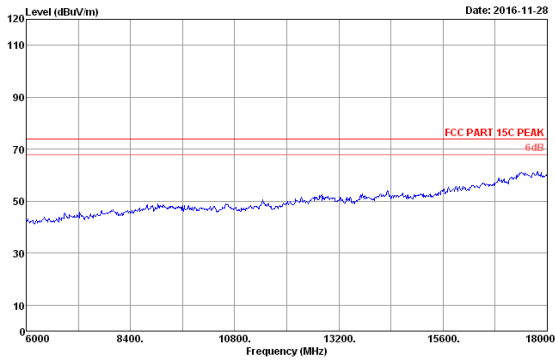


Site no. : 3m Chamber Data no. : 67
 Dis. / Ant. : 3m 2016 MCID1209 3007 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.6mC/54.0m Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT20 5785MHz Tx Mode
 M/N:CR2

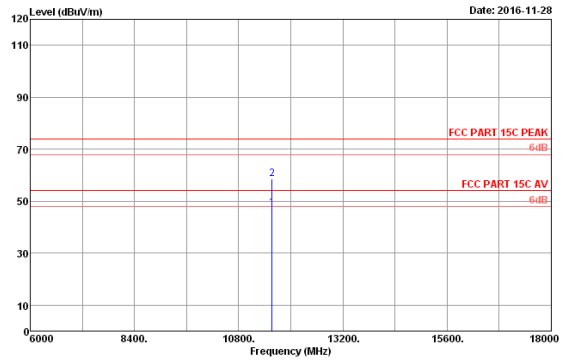

Site no. : 3m Chamber Data no. : 68
 Dis. / Ant. : 3m 2016 MCID1209 3007 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.6mC/54.0m Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT20 5785MHz Tx Mode
 M/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11570.00	38.27	13.50	31.05	35.35	47.47	54.00	6.53	Average
2	11570.00	38.27	13.50	42.18	35.35	58.60	74.00	15.40	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

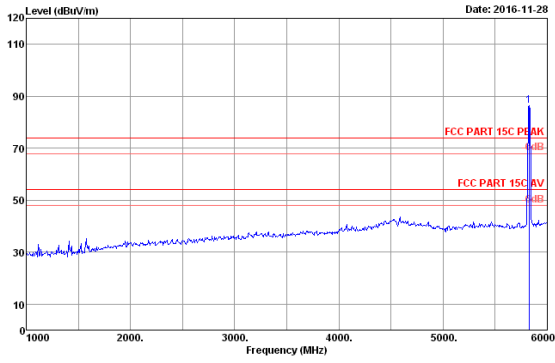

Site no. : 3m Chamber Data no. : 69
 Dis. / Ant. : 3m 2016 MCID1209 3007 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.6nC/54.0kV Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT20 5825MHz Tx Mode
 M/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5825.00	33.12	11.98	76.84	35.45	86.49	74.00	-12.49	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Ant Factor
 2. The emission levels that are 20dB below the official limit are not reported.

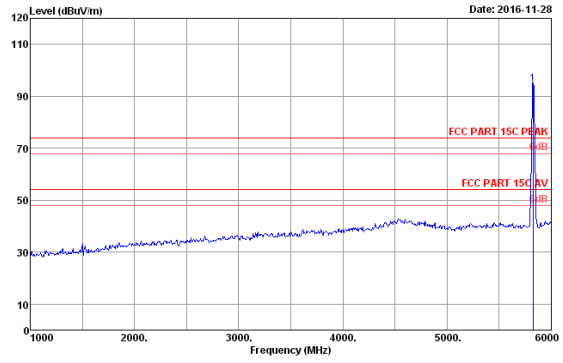

Site no. : 3m Chamber Data no. : 70
 Dis. / Ant. : 3m 2016 MCID1209 3007 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.6nC/54.0kV Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT20 5825MHz Tx Mode
 M/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5825.00	33.12	11.98	85.15	35.45	94.80	74.00	-20.80	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Ant Factor
 2. The emission levels that are 20dB below the official limit are not reported.

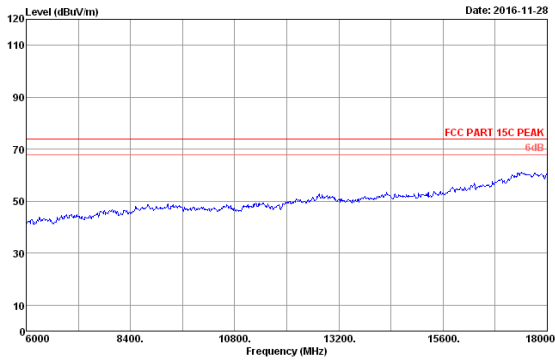

Site no. : 3m Chamber Data no. : 71
 Dis. / Ant. : 3m 2016 MCID1209 3007 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.6nC/54.0kV Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT20 5825MHz Tx Mode
 M/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11650.00	38.24	13.52	30.95	35.37	47.34	74.00	26.66	Average
2	11650.00	38.24	13.52	42.18	35.37	58.57	74.00	15.43	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Ant Factor
 2. The emission levels that are 20dB below the official limit are not reported.

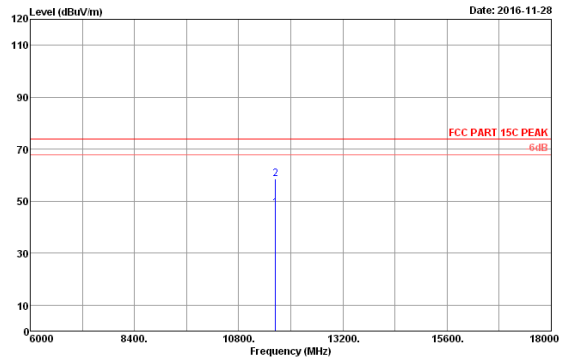


Site no. : 3m Chamber Data no. : 72
 Dis. / Ant. : 3m 2016 MCID1209 3007 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.6nC/54.0kV Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT20 5825MHz Tx Mode
 M/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11650.00	38.24	13.52	30.95	35.37	47.34	74.00	26.66	Average
2	11650.00	38.24	13.52	42.18	35.37	58.57	74.00	15.43	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Ant Factor
 2. The emission levels that are 20dB below the official limit are not reported.

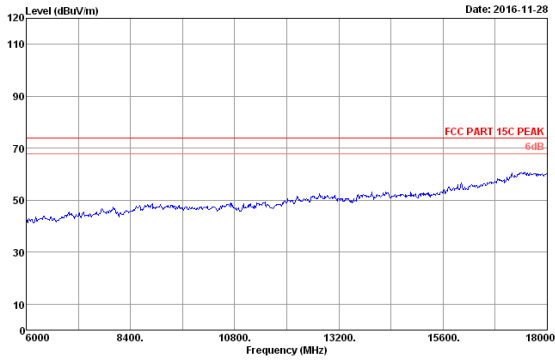


Site no. : 3m Chamber Data no. : 73
 Dis. / Ant. : 3m 2016 MCID1209 3007 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.6nC/54.0kV Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT20 5825MHz Tx Mode
 M/N:CR2

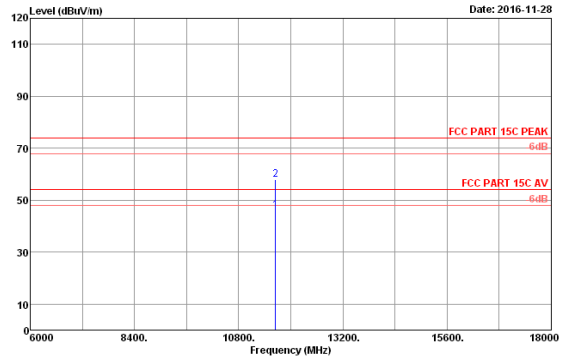

Site no. : 3m Chamber Data no. : 74
 Dis. / Ant. : 3m 2016 MCID1209 3007 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.6nC/54.0kV Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT20 5825MHz Tx Mode
 M/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11650.00	38.24	13.52	29.68	35.37	46.07	54.00	7.93	Average
2	11650.00	38.24	13.52	41.58	35.37	57.97	74.00	16.03	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

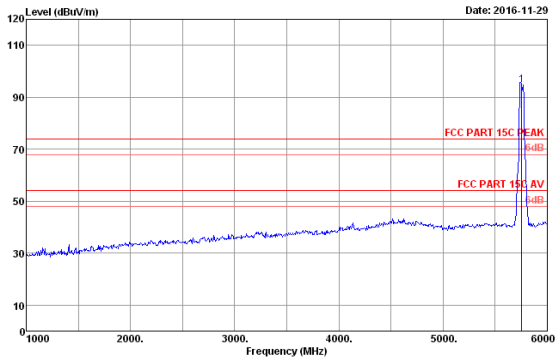

Site no. : 3m Chamber Data no. : 79
 Dis. / Ant. : 3m 2016 MCID1209 3007 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.6nC/54.0kV Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11n HT40 5755MHz Tx Mode
 M/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5755.00	32.96	11.97	85.29	35.45	94.77	74.00	-20.77	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

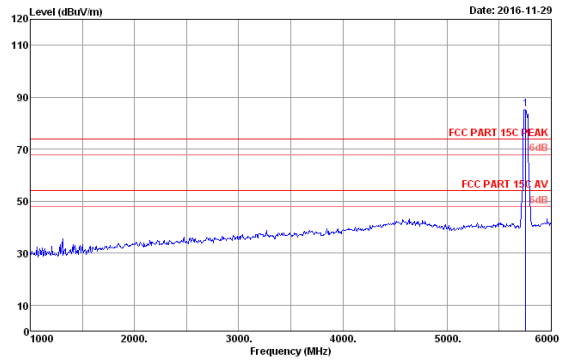


Site no. : 3m Chamber Data no. : 80
 Dis. / Ant. : 3m 2016 MCID1209 3007 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.6nC/54.0kV Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11n HT40 5755MHz Tx Mode
 M/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5755.00	32.96	11.97	76.01	35.45	85.49	74.00	-11.49	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

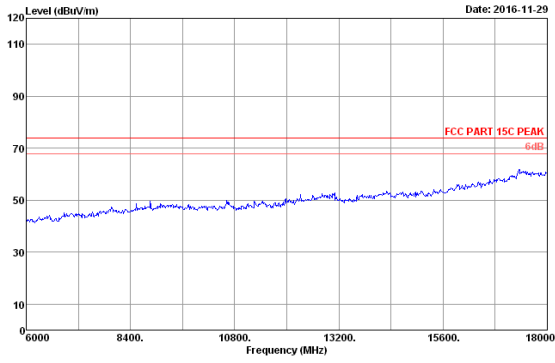


Site no. : 3m Chamber Data no. : 81
 Dis. / Ant. : 3m 2016 MCID1209 3007 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.6mC/54.0m Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11n HT40 5755MHz Tx Mode
 M/N:CR2

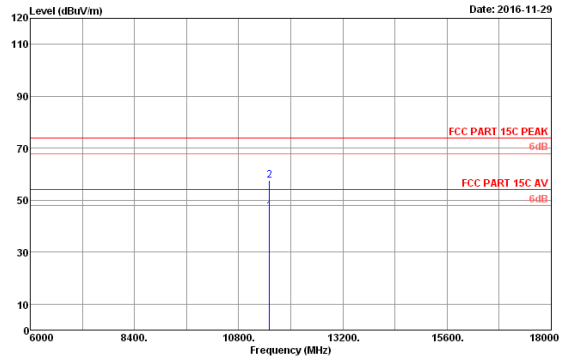


Site no. : 3m Chamber Data no. : 82
 Dis. / Ant. : 3m 2016 MCID1209 3007 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.6mC/54.0m Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11n HT40 5755MHz Tx Mode
 M/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11510.00	38.30	13.49	29.42	35.34	45.87	54.00	8.13	Average
2	11510.00	38.30	13.49	41.05	35.34	57.50	74.00	16.50	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

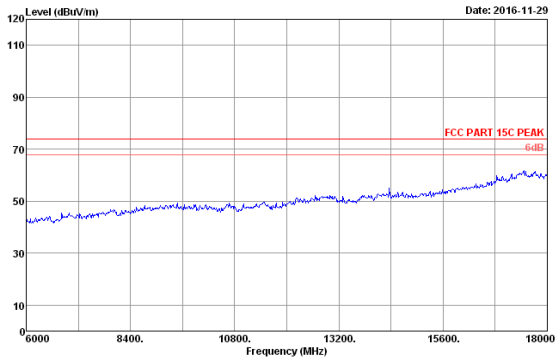


Site no. : 3m Chamber Data no. : 83
 Dis. / Ant. : 3m 2016 MCID1209 3007 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.6mC/54.0m Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11n HT40 5755MHz Tx Mode
 M/N:CR2

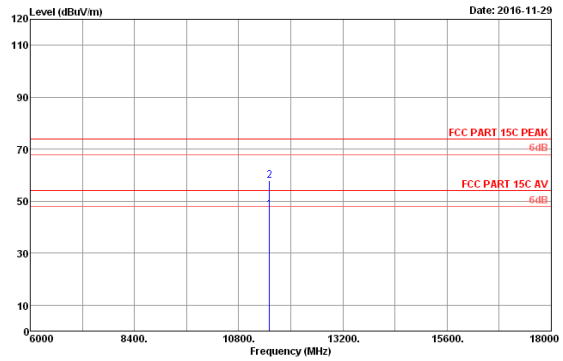

Site no. : 3m Chamber Data no. : 84
 Dis. / Ant. : 3m 2016 MCID1209 3007 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.6mC/54.0m Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11n HT40 5755MHz Tx Mode
 M/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11510.00	38.30	13.49	30.17	35.34	46.62	54.00	7.38	Average
2	11510.00	38.30	13.49	41.55	35.34	58.00	74.00	16.00	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

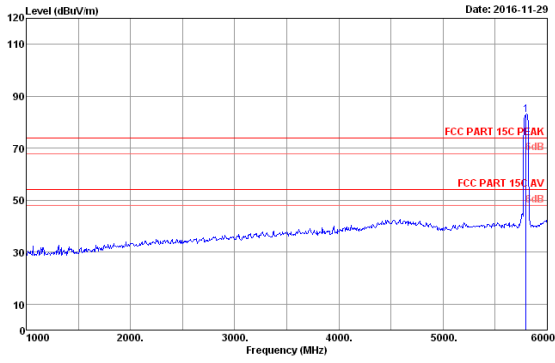

Site no. : 3m Chamber Data no. : 89
 Dis. / Ant. : 3m 2016 MCID1209 3007 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.6m/54.0m Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11n HT40 5795MHz Tx Mode
 M/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5795.00	33.05	11.97	73.25	35.45	82.82	74.00	-8.82	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Ant Factor
 2. The emission levels that are 20dB below the official limit are not reported.

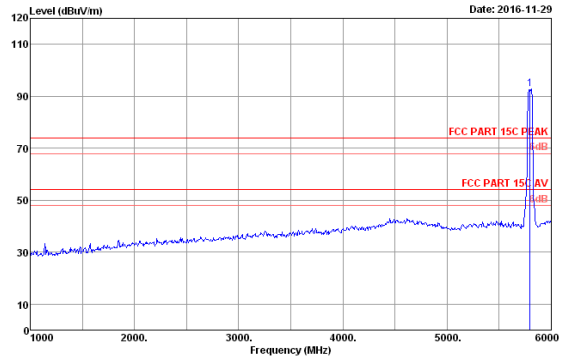

Site no. : 3m Chamber Data no. : 90
 Dis. / Ant. : 3m 2016 MCID1209 3007 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.6m/54.0m Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11n HT40 5795MHz Tx Mode
 M/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5795.00	33.05	11.97	83.13	35.45	92.70	74.00	-18.70	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Ant Factor
 2. The emission levels that are 20dB below the official limit are not reported.

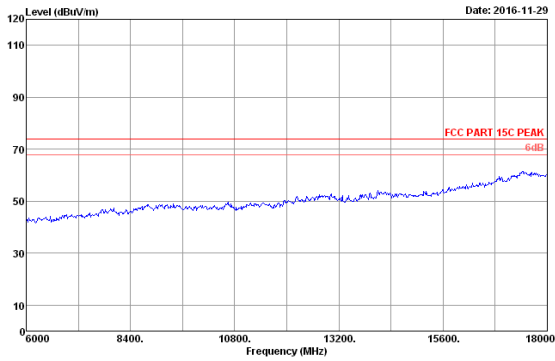

Site no. : 3m Chamber Data no. : 91
 Dis. / Ant. : 3m 2016 MCID1209 3007 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.6m/54.0m Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11n HT40 5795MHz Tx Mode
 M/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11590.00	38.26	13.51	30.86	35.36	47.27	54.00	6.73	Average
2	11590.00	38.26	13.51	41.70	35.36	58.11	74.00	15.89	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Ant Factor
 2. The emission levels that are 20dB below the official limit are not reported.

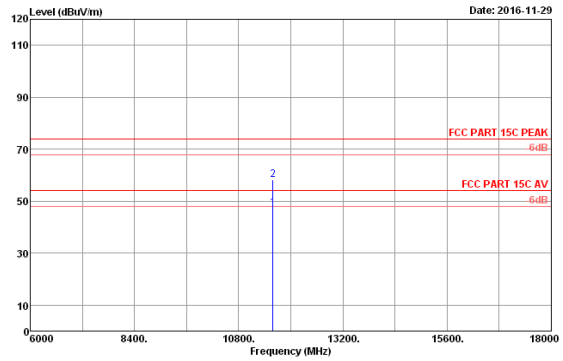


Site no. : 3m Chamber Data no. : 92
 Dis. / Ant. : 3m 2016 MCID1209 3007 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.6m/54.0m Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11n HT40 5795MHz Tx Mode
 M/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11590.00	38.26	13.51	30.86	35.36	47.27	54.00	6.73	Average
2	11590.00	38.26	13.51	41.70	35.36	58.11	74.00	15.89	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Ant Factor
 2. The emission levels that are 20dB below the official limit are not reported.

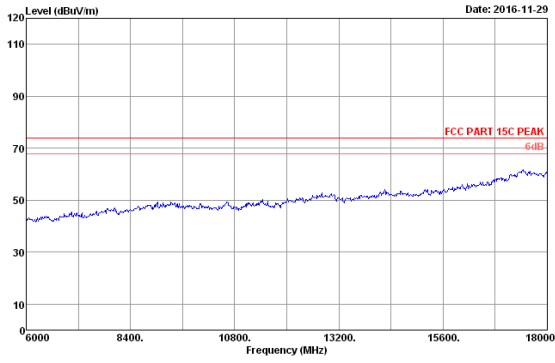


Site no. : 3m Chamber Data no. : 93
 Dis. / Ant. : 3m 2016 MCID1209 3007 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.6mC/54.0m Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11n HT40 5755MHz Tx Mode
 M/N:CR2

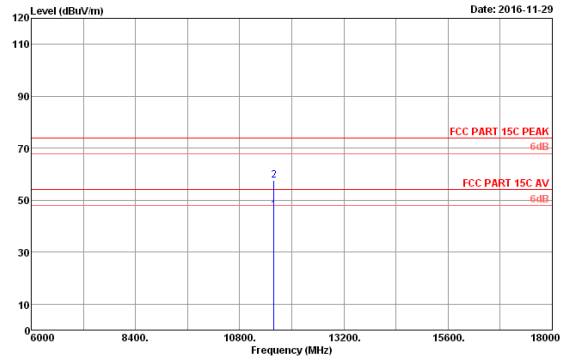

Site no. : 3m Chamber Data no. : 94
 Dis. / Ant. : 3m 2016 MCID1209 3007 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.6mC/54.0m Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11n HT40 5755MHz Tx Mode
 M/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11590.00	38.26	13.51	29.65	35.36	46.06	54.00	7.94	Average
2	11590.00	38.26	13.51	41.26	35.36	57.67	74.00	16.33	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

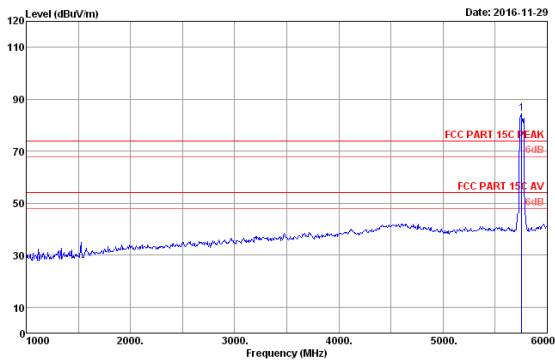

Site no. : 3m Chamber Data no. : 99
 Dis. / Ant. : 3m 2016 MCID1209 3007 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.6mC/54.0m Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT40 5755MHz Tx Mode
 M/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5755.00	32.96	11.97	74.85	35.45	84.33	74.00	-10.33	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

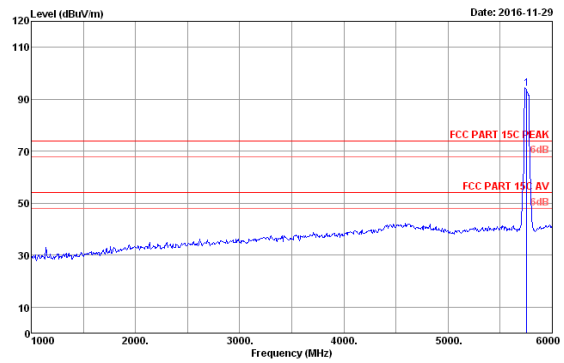


Site no. : 3m Chamber Data no. : 100
 Dis. / Ant. : 3m 2016 MCID1209 3007 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.6mC/54.0m Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT40 5755MHz Tx Mode
 M/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5755.00	32.96	11.97	84.55	35.45	94.03	74.00	-20.03	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

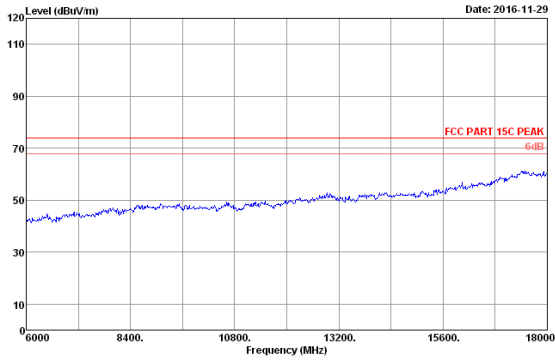


Site no. : 3m Chamber Data no. : 101
 Dis. / Ant. : 3m 2016 MCID1209 3007 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.6nC/54.0kV Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT40 5755MHz Tx Mode
 M/N:CR2

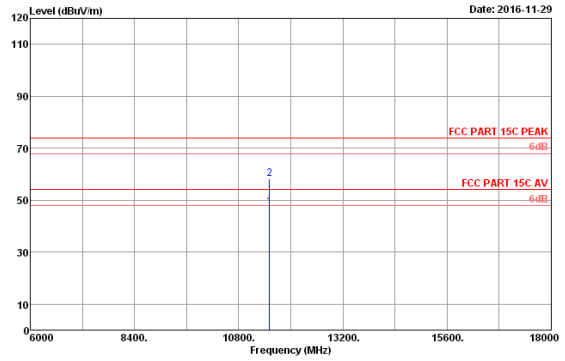


Site no. : 3m Chamber Data no. : 102
 Dis. / Ant. : 3m 2016 MCID1209 3007 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.6nC/54.0kV Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT40 5755MHz Tx Mode
 M/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11510.00	38.30	13.49	30.77	35.34	47.22	54.00	6.78	Average
2	11510.00	38.30	13.49	41.68	35.34	58.13	74.00	15.87	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

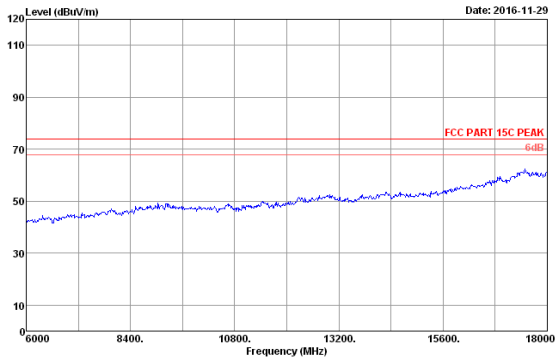


Site no. : 3m Chamber Data no. : 103
 Dis. / Ant. : 3m 2016 MCID1209 3007 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.6nC/54.0kV Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT40 5755MHz Tx Mode
 M/N:CR2

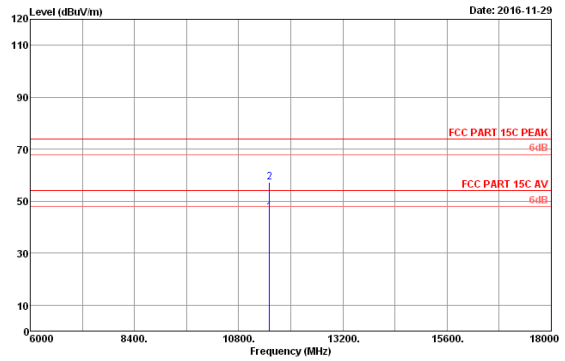

Site no. : 3m Chamber Data no. : 104
 Dis. / Ant. : 3m 2016 MCID1209 3007 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.6nC/54.0kV Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT40 5755MHz Tx Mode
 M/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11510.00	38.30	13.49	29.25	35.34	45.70	54.00	8.30	Average
2	11510.00	38.30	13.49	40.96	35.34	57.41	74.00	16.59	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

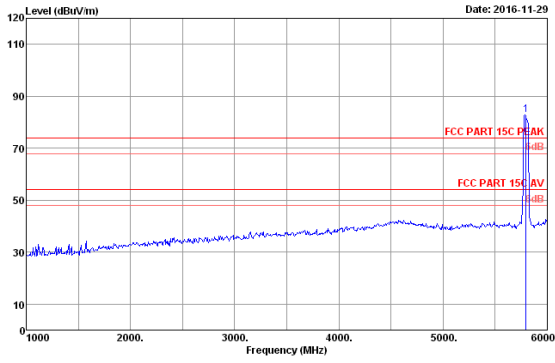

Date: 2016-11-29
 Site no. : 3m Chamber Data no. : 109
 Dis. / Ant. : 3m 2016 MCID1209 3007 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.6m/54.0m Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT40 5795MHz Tx Mode
 M/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5795.00	33.05	11.97	73.22	35.45	82.79	74.00	-8.79	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Ant Factor
 2. The emission levels that are 20dB below the official limit are not reported.

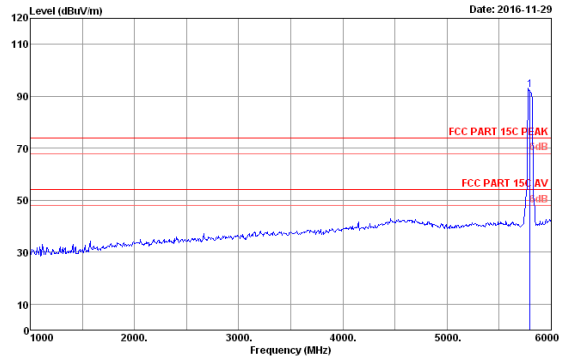


Date: 2016-11-29
 Site no. : 3m Chamber Data no. : 110
 Dis. / Ant. : 3m 2016 MCID1209 3007 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.6m/54.0m Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT40 5795MHz Tx Mode
 M/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5795.00	33.05	11.97	82.86	35.45	92.43	74.00	-18.43	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Ant Factor
 2. The emission levels that are 20dB below the official limit are not reported.

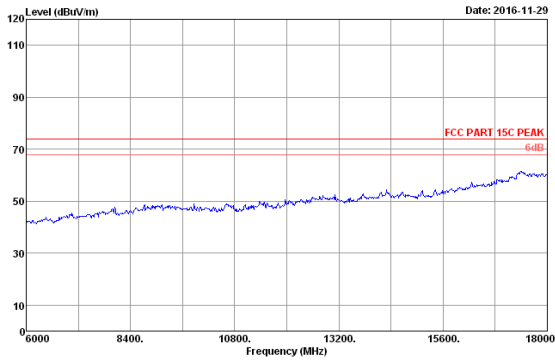


Date: 2016-11-29
 Site no. : 3m Chamber Data no. : 111
 Dis. / Ant. : 3m 2016 MCID1209 3007 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.6m/54.0m Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT40 5795MHz Tx Mode
 M/N:CR2

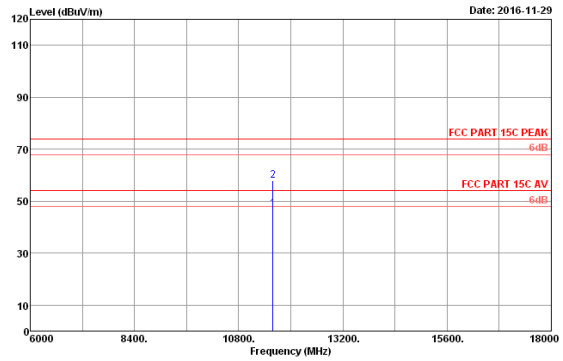


Date: 2016-11-29
 Site no. : 3m Chamber Data no. : 112
 Dis. / Ant. : 3m 2016 MCID1209 3007 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.6m/54.0m Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT40 5795MHz Tx Mode
 M/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11590.00	38.26	13.51	30.56	35.36	46.97	54.00	7.03	Average
2	11590.00	38.26	13.51	41.59	35.36	58.00	74.00	16.00	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Ant Factor
 2. The emission levels that are 20dB below the official limit are not reported.

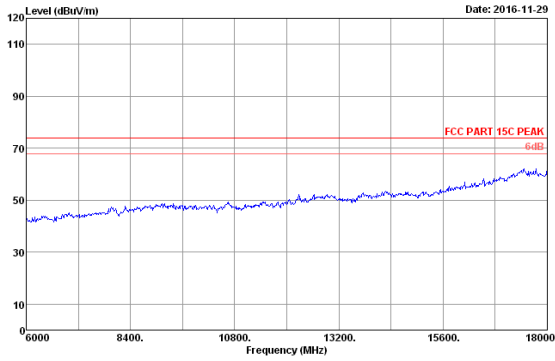


Site no. : 3m Chamber Data no. : 113
 Dis. / Ant. : 3m 2016 MCID1209 3007 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.6mC/54.0m Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT40 5795MHz Tx Mode
 M/N:CR2

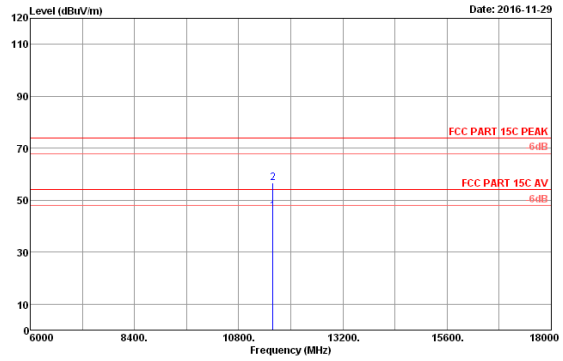

Site no. : 3m Chamber Data no. : 114
 Dis. / Ant. : 3m 2016 MCID1209 3007 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.6mC/54.0m Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT40 5795MHz Tx Mode
 M/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11590.00	38.26	13.51	29.35	35.36	45.76	54.00	8.24	Average
2	11590.00	38.26	13.51	40.28	35.36	56.69	74.00	17.31	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

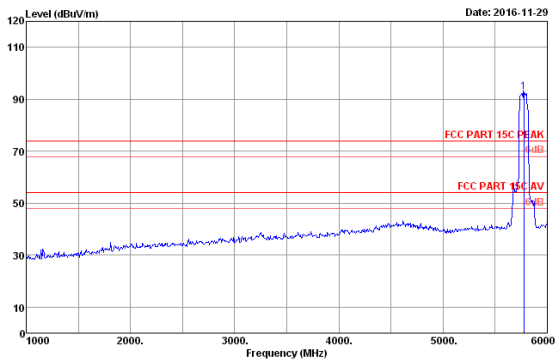

Site no. : 3m Chamber Data no. : 119
 Dis. / Ant. : 3m 2016 MCID1209 3007 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.6mC/54.0m Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT40 5775MHz Tx Mode
 M/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5775.00	33.01	11.97	83.28	35.45	92.81	74.00	-18.81	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

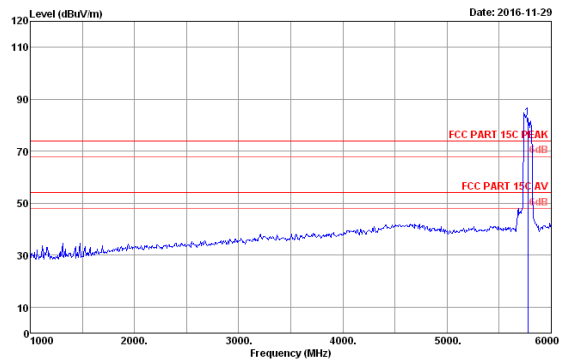


Site no. : 3m Chamber Data no. : 120
 Dis. / Ant. : 3m 2016 MCID1209 3007 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.6mC/54.0m Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT40 5775MHz Tx Mode
 M/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading factor (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5775.00	33.01	11.97	73.25	35.45	82.78	74.00	-8.78	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

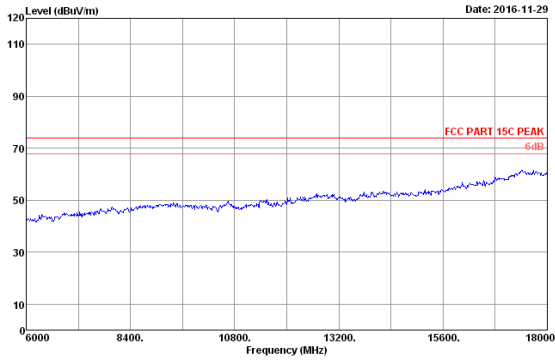


Site no. : 3m Chamber Data no. : 121
 Dis. / Ant. : 3m 2016 MCID1209 3007 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.6mC/54.0m Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT80 5775MHz Tx Mode
 M/N:CR2

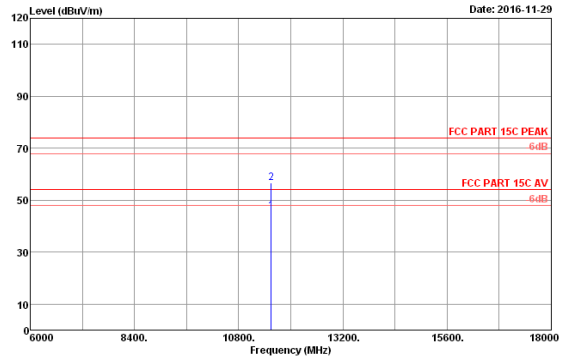


Site no. : 3m Chamber Data no. : 122
 Dis. / Ant. : 3m 2016 MCID1209 3007 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.6mC/54.0m Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT80 5775MHz Tx Mode
 M/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11550.00	38.28	13.50	29.36	35.35	45.79	54.00	8.21	Average
2	11550.00	38.28	13.50	40.28	35.35	56.71	74.00	17.29	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

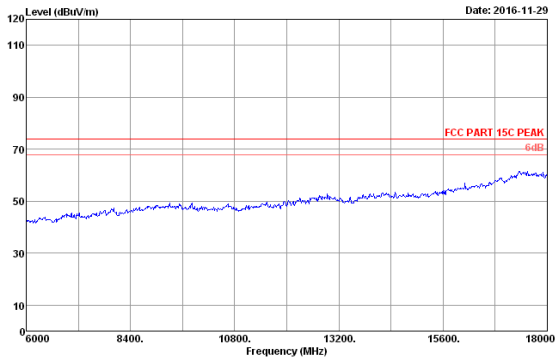

Site no. : 3m Chamber Data no. : 123
 Dis. / Ant. : 3m 2016 MCID1209 3007 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.6mC/54.0m Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT80 5775MHz Tx Mode
 M/N:CR2

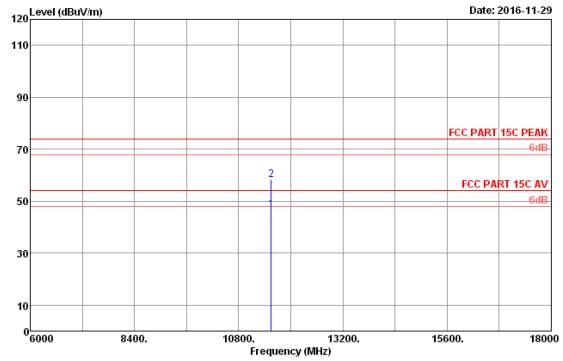

Site no. : 3m Chamber Data no. : 124
 Dis. / Ant. : 3m 2016 MCID1209 3007 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.6mC/54.0m Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT80 5775MHz Tx Mode
 M/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11550.00	38.28	13.50	30.27	35.35	46.70	54.00	7.30	Average
2	11550.00	38.28	13.50	41.77	35.35	58.20	74.00	15.80	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

5. BAND EDGE COMPLIANCE TEST

5.1. Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Spectrum	Agilent	E4446A	US44300459	Apr.24,16	1 Year
2.	Amp	HP	8449B	3008A02495	Apr.24,16	1 Year
3.	Horn Antenna	ETC	MCTD 1209	DRH15F03007	Apr.11,16	1 Year
4.	HF Cable	Hubersuhner	Sucoflex104	274094/4	Apr.24,16	1 Year

5.2. Limit

For transmitters operating in the band 5150-5250 MHz, all emissions outside the band 5150-5350 MHz shall not exceed -27 dBm/MHz e.i.r.p.

For the band 5725-5850 MHz, emissions at frequencies from the band edges to 10 MHz above or below the band edges shall not exceed -17 dBm/MHz e.i.r.p.

For emissions at frequencies more than 10 MHz above or below the band edges, the emissions power shall not exceed -27 dBm/MHz.


5.3. Test Produce

1. The EUT is placed on a turntable, which is 0.8m above the ground plane and worked at highest radiated power.
2. The turntable was rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
 - (a) PEAK: RBW=1MHz; VBW=3MHz; Sweep=AUTO
 - (b) AVERAGE: RBW=1MHz; VBW=10Hz; Sweep=AUTO
5. Per KDB789033 clause H 2)d).if the test distance is 3m,the EIRP(dBm)=E(dBuv/m)-95.2
Get the final compare with limit.

5.4. Test Results

Pass (The testing data was attached in the next pages.)


5180-5240MHz Band:

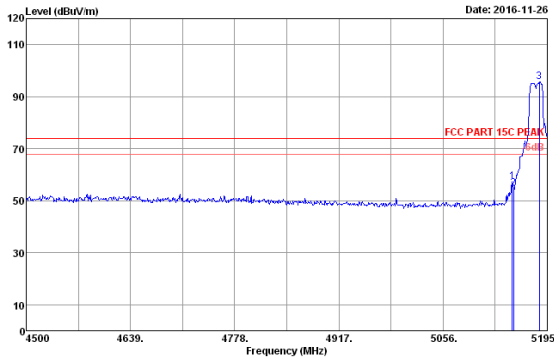

Site no. : 3m Chamber Data no. : 7
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.1°C/54.9% Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEB802.11a 5180MHz Tx Mode
 M/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5148.44	32.40	11.90	48.61	35.64	57.27	74.00	16.73	Peak
2	5150.00	32.40	11.90	45.95	35.64	54.61	74.00	19.39	Peak
3	5184.58	32.40	11.91	86.94	35.62	95.63	74.00	-21.63	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

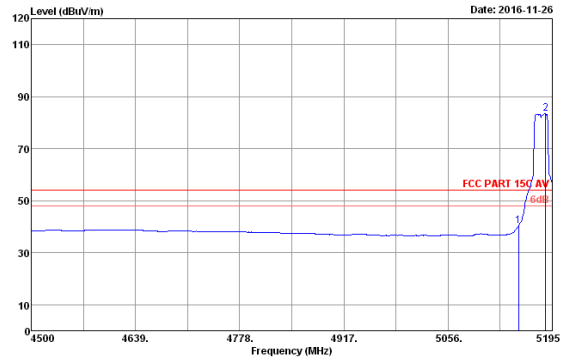

Site no. : 3m Chamber Data no. : 8
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV Pre : 101.2kPa
 Env. / Ins. : 23.1°C/54.9% Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEB802.11a 5180MHz Tx Mode
 M/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.00	32.40	11.90	31.57	35.64	40.23	54.00	13.77	Average
2	5185.97	32.40	11.91	74.74	35.62	83.43	54.00	-29.43	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

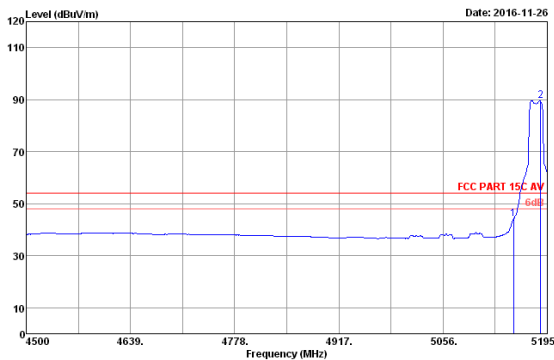

Site no. : 3m Chamber Data no. : 9
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV Pre : 101.2kPa
 Env. / Ins. : 23.1°C/54.9% Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEB802.11a 5180MHz Tx Mode
 M/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.00	32.40	11.90	35.47	35.64	44.13	54.00	9.87	Average
2	5185.97	32.40	11.91	81.05	35.62	89.74	54.00	-35.74	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

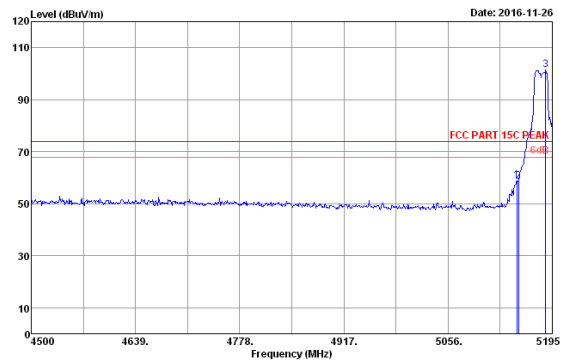

Site no. : 3m Chamber Data no. : 10
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.1°C/54.9% Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEB802.11a 5180MHz Tx Mode
 M/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5147.74	32.40	11.90	50.31	35.64	58.97	74.00	15.03	Peak
2	5150.00	32.40	11.90	49.77	35.64	58.43	74.00	15.57	Peak
3	5185.97	32.40	11.91	92.61	35.62	101.30	74.00	-27.30	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

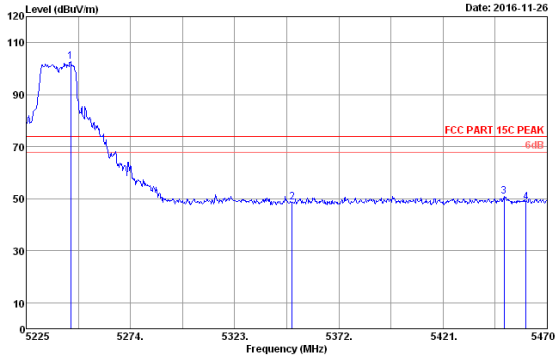

Site no. : 3m Chamber Data no. : 23
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.14C/54.9W Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11a 5240MHz Tx Mode
 M/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5245.83	32.40	11.91	93.98	35.59	102.70	74.00	-28.70	Peak
2	5360.00	32.40	11.93	39.88	35.53	48.68	74.00	25.32	Peak
3	5449.87	32.40	11.94	42.03	35.48	50.89	74.00	23.11	Peak
4	5460.00	32.40	11.94	39.89	35.47	48.76	74.00	25.24	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

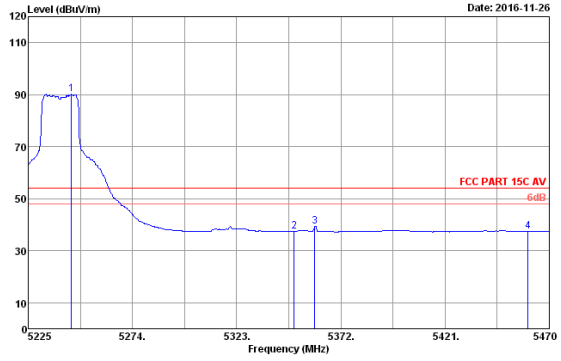

Site no. : 3m Chamber Data no. : 24
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV Pre : 101.2kPa
 Env. / Ins. : 23.14C/54.9W Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11a 5240MHz Tx Mode
 M/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5245.34	32.40	11.91	81.57	35.59	90.29	54.00	-36.29	Average
2	5360.00	32.40	11.93	28.51	35.53	37.31	54.00	16.69	Average
3	5449.76	32.40	11.93	30.49	35.53	39.29	54.00	14.71	Average
4	5460.00	32.40	11.94	28.62	35.47	37.49	54.00	16.51	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

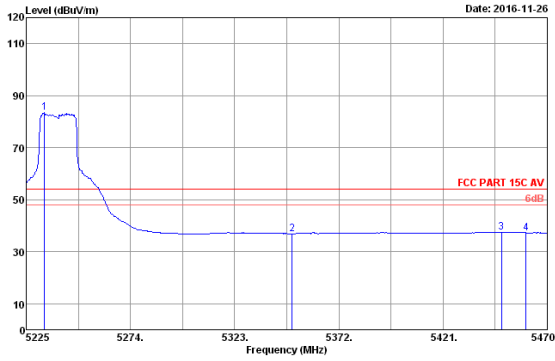

Site no. : 3m Chamber Data no. : 25
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV Pre : 101.2kPa
 Env. / Ins. : 23.14C/54.9W Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11a 5240MHz Tx Mode
 M/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5233.58	32.40	11.91	74.67	35.59	83.39	54.00	-29.39	Average
2	5360.00	32.40	11.93	28.16	35.53	36.96	54.00	17.04	Average
3	5449.84	32.40	11.94	29.58	35.48	37.44	54.00	16.56	Average
4	5460.00	32.40	11.94	28.40	35.47	37.27	54.00	16.73	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

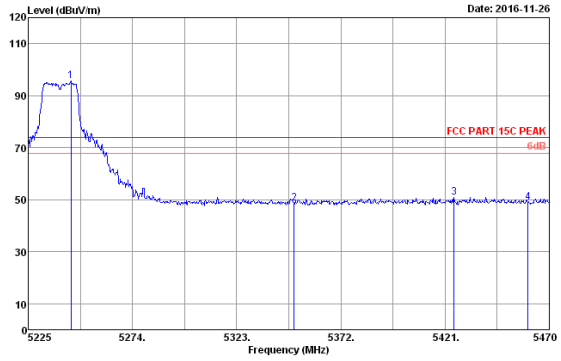

Site no. : 3m Chamber Data no. : 26
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.14C/54.9W Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11a 5240MHz Tx Mode
 M/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5245.09	32.40	11.91	86.85	35.59	95.57	74.00	-21.57	Peak
2	5360.00	32.40	11.93	39.83	35.53	48.63	74.00	25.37	Peak
3	5449.17	32.40	11.94	42.19	35.49	51.94	74.00	22.06	Peak
4	5460.00	32.40	11.94	40.02	35.47	48.89	74.00	25.11	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

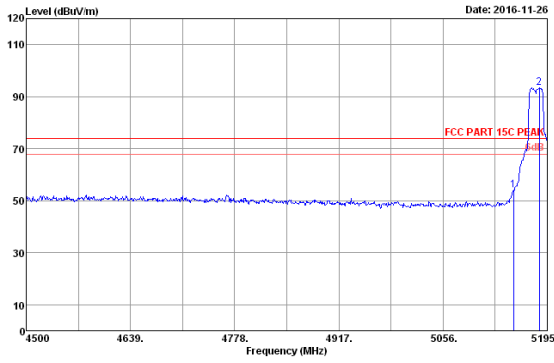

Site no. : 3m Chamber Data no. : 33
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.14C/54.9% Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11n HT20 5180MHz Tx Mode
 M/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.00	32.40	11.90	45.52	35.64	54.18	74.00	19.82	Peak
2	5184.58	32.40	11.91	84.73	35.62	93.42	74.00	-19.42	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

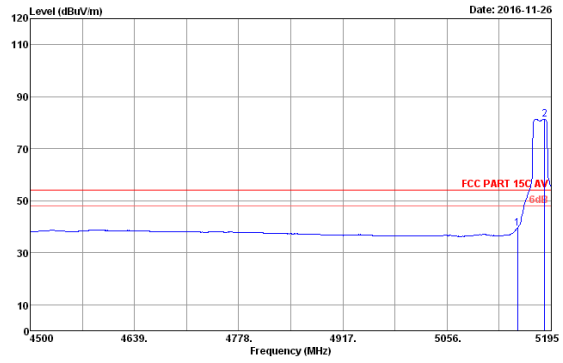

Site no. : 3m Chamber Data no. : 34
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV Pre : 101.2kPa
 Env. / Ins. : 23.14C/54.9% Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11n HT20 5180MHz Tx Mode
 M/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.00	32.40	11.90	30.83	35.64	39.49	54.00	14.51	Average
2	5185.97	32.40	11.91	72.74	35.62	81.43	54.00	-27.43	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

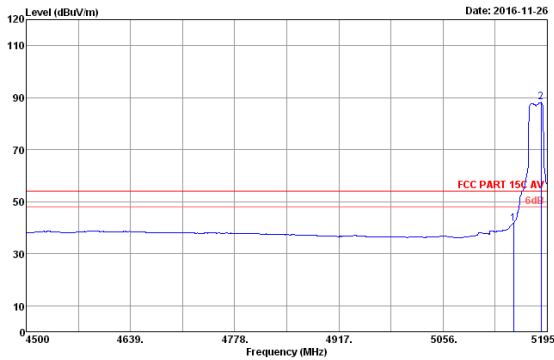

Site no. : 3m Chamber Data no. : 35
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV Pre : 101.2kPa
 Env. / Ins. : 23.14C/54.9% Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11n HT20 5180MHz Tx Mode
 M/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.00	32.40	11.90	33.06	35.64	41.72	54.00	12.28	Average
2	5186.66	32.40	11.91	79.47	35.62	88.16	54.00	-34.16	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

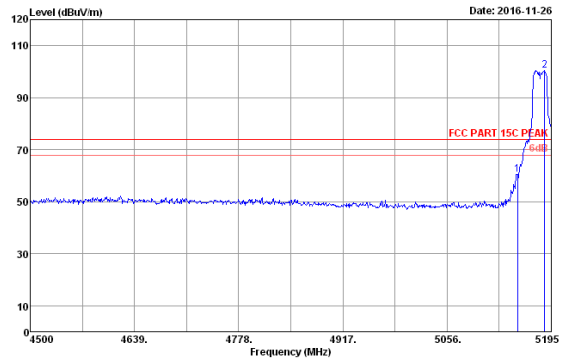

Site no. : 3m Chamber Data no. : 36
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.14C/54.9% Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11n HT20 5180MHz Tx Mode
 M/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.00	32.40	11.90	51.73	35.64	60.39	74.00	13.61	Peak
2	5185.97	32.40	11.91	91.72	35.62	100.41	74.00	-26.41	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

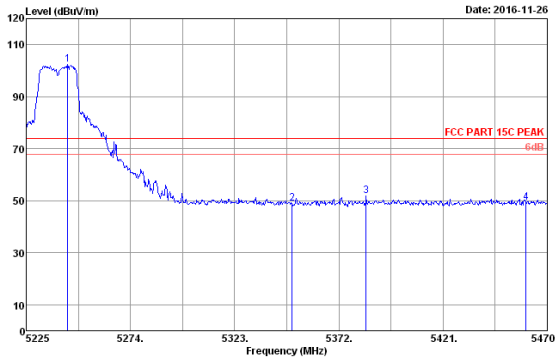

Site no. : 3m Chamber Data no. : 49
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.1kV/54.9kV Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11n HT20 5240MHz Tx Mode
 M/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5244.60	32.40	11.91	93.68	35.59	102.40	74.00	-28.40	Peak
2	5350.00	32.40	11.93	40.02	35.53	48.82	74.00	25.18	Peak
3	5394.74	32.40	11.93	42.97	35.51	51.79	74.00	22.21	Peak
4	5460.00	32.40	11.94	40.56	35.47	49.43	74.00	24.57	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

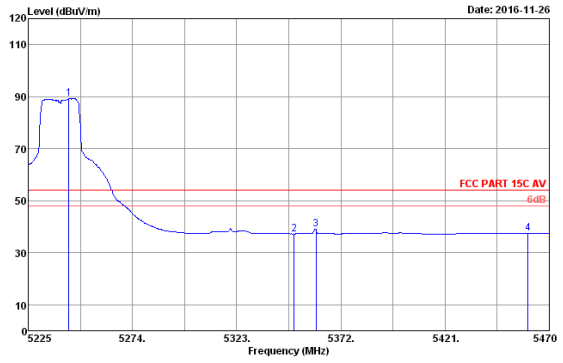

Site no. : 3m Chamber Data no. : 50
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV Pre : 101.2kPa
 Env. / Ins. : 23.1kV/54.9kV Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11n HT20 5240MHz Tx Mode
 M/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5244.11	32.40	11.91	80.59	35.59	89.31	54.00	-35.31	Average
2	5350.00	32.40	11.93	28.42	35.53	37.22	54.00	16.78	Average
3	5394.74	32.40	11.93	30.38	35.53	39.13	54.00	14.82	Average
4	5460.00	32.40	11.94	28.63	35.47	37.50	54.00	16.50	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

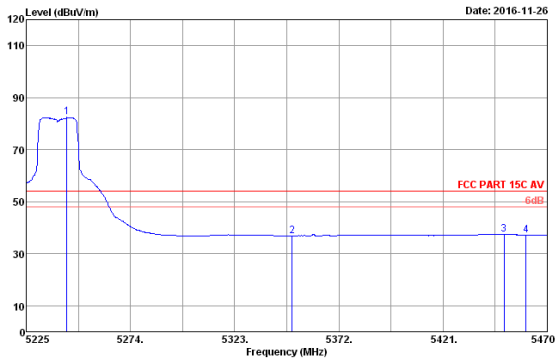

Site no. : 3m Chamber Data no. : 51
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV Pre : 101.2kPa
 Env. / Ins. : 23.1kV/54.9kV Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11n HT20 5240MHz Tx Mode
 M/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5244.11	32.40	11.91	73.72	35.59	82.44	54.00	-28.44	Average
2	5350.00	32.40	11.93	28.09	35.53	36.89	54.00	17.11	Average
3	5422.23	32.40	11.94	28.53	35.48	37.39	54.00	16.61	Average
4	5460.00	32.40	11.94	28.35	35.47	37.22	54.00	16.78	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

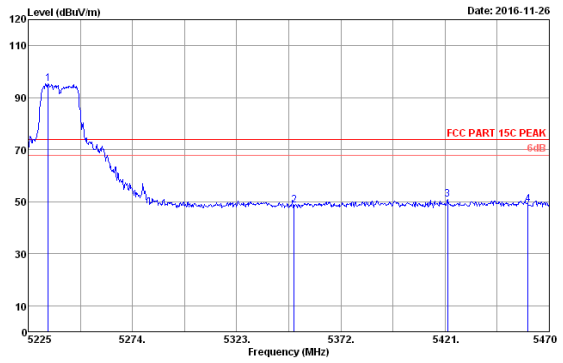

Site no. : 3m Chamber Data no. : 52
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.1kV/54.9kV Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11n HT20 5240MHz Tx Mode
 M/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5234.31	32.40	11.91	86.68	35.59	95.40	74.00	-21.40	Peak
2	5350.00	32.40	11.93	39.79	35.53	48.59	74.00	25.41	Peak
3	5422.23	32.40	11.94	42.11	35.49	50.90	74.00	23.04	Peak
4	5460.00	32.40	11.94	40.16	35.47	49.03	74.00	24.97	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

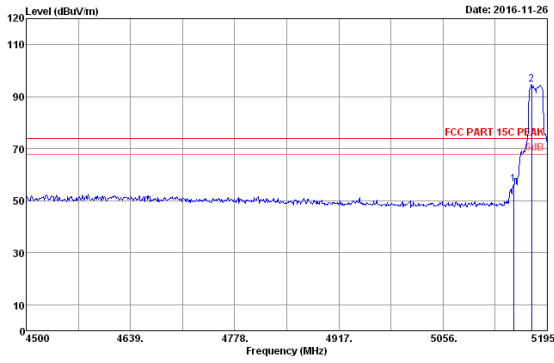

Site no. : 3m Chamber Data no. : 59
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.14C/54.9% Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT20 5180MHz Tx Mode
 M/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.00	32.40	11.90	47.56	35.64	56.22	74.00	17.78	Peak
2	5174.15	32.40	11.90	86.14	35.63	94.81	74.00	-20.81	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

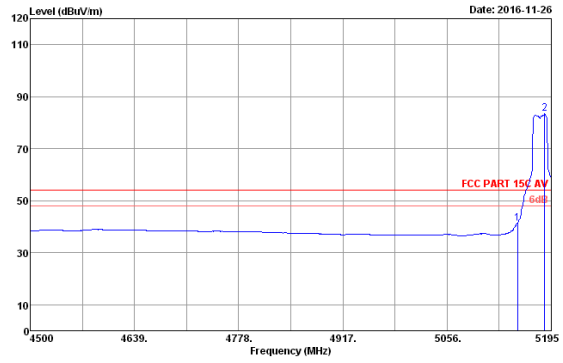

Site no. : 3m Chamber Data no. : 60
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV Pre : 101.2kPa
 Env. / Ins. : 23.14C/54.9% Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT20 5180MHz Tx Mode
 M/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.00	32.40	11.90	32.66	35.64	41.32	54.00	12.68	Average
2	5185.97	32.40	11.91	74.72	35.62	83.41	54.00	-29.41	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

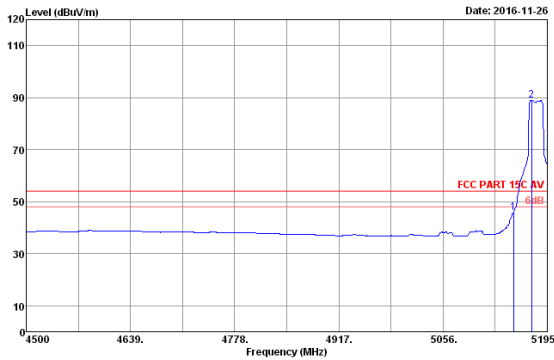

Site no. : 3m Chamber Data no. : 61
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV Pre : 101.2kPa
 Env. / Ins. : 23.14C/54.9% Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT20 5180MHz Tx Mode
 M/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.00	32.40	11.90	37.14	35.64	45.80	54.00	8.20	Average
2	5174.15	32.40	11.90	80.34	35.63	89.01	54.00	-35.01	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

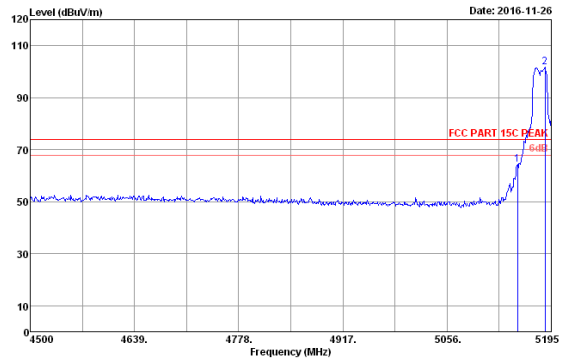

Site no. : 3m Chamber Data no. : 62
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.14C/54.9% Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT20 5180MHz Tx Mode
 M/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.00	32.40	11.90	55.63	35.64	64.29	74.00	9.71	Peak
2	5186.66	32.40	11.91	92.96	35.62	101.65	74.00	-27.65	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

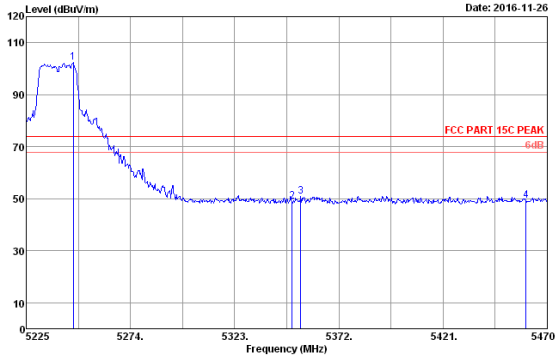

Site no. : 3m Chamber Data no. : 75
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.1kV/54.9kV Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT20 5240MHz Tx Mode
 M/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5247.05	32.40	11.91	93.56	35.59	102.28	74.00	-28.28	Peak
2	5350.00	32.40	11.93	40.21	35.53	49.01	74.00	24.99	Peak
3	5354.12	32.40	11.93	42.12	35.53	50.92	74.00	23.08	Peak
4	5460.00	32.40	11.94	40.34	35.47	49.21	74.00	24.79	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

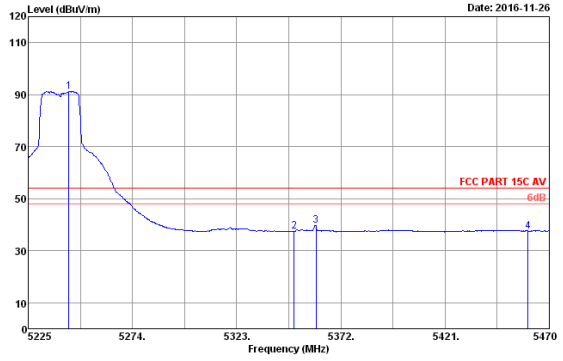

Site no. : 3m Chamber Data no. : 76
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV Pre : 101.2kPa
 Env. / Ins. : 23.1kV/54.9kV Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT20 5240MHz Tx Mode
 M/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5244.11	32.40	11.91	82.59	35.59	91.31	54.00	-37.31	Average
2	5350.00	32.40	11.93	28.54	35.53	37.34	54.00	16.66	Average
3	5360.24	32.40	11.93	30.97	35.53	39.77	54.00	14.23	Average
4	5460.00	32.40	11.94	28.73	35.47	37.60	54.00	16.40	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

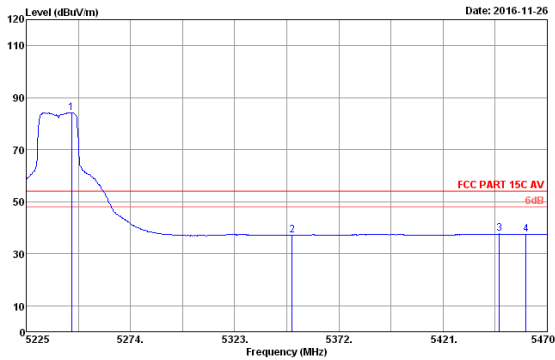

Site no. : 3m Chamber Data no. : 77
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV Pre : 101.2kPa
 Env. / Ins. : 23.1kV/54.9kV Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT20 5240MHz Tx Mode
 M/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5246.32	32.40	11.91	75.54	35.59	84.26	54.00	-30.26	Average
2	5350.00	32.40	11.93	28.28	35.53	37.08	54.00	16.92	Average
3	5447.46	32.40	11.94	28.75	35.48	37.61	54.00	16.39	Average
4	5460.00	32.40	11.94	28.55	35.47	37.42	54.00	16.58	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

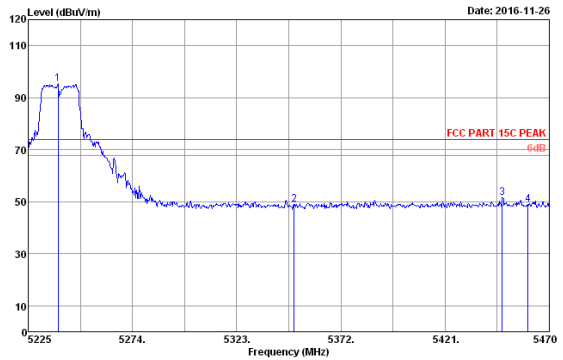

Site no. : 3m Chamber Data no. : 78
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.1kV/54.9kV Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT20 5240MHz Tx Mode
 M/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5238.97	32.40	11.91	86.74	35.59	95.46	74.00	-21.46	Peak
2	5350.00	32.40	11.93	40.17	35.53	48.97	74.00	25.03	Peak
3	5447.95	32.40	11.94	42.55	35.48	51.41	74.00	22.59	Peak
4	5460.00	32.40	11.94	40.00	35.47	48.87	74.00	25.13	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

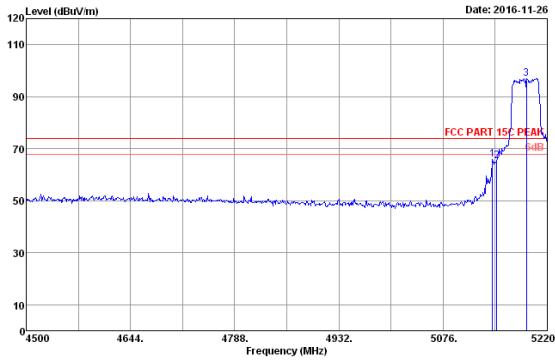

Site no. : 3m Chamber Data no. : 85
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.14C/54.9% Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11n HT40 5190MHz Tx Mode
 M/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5144.40	32.40	11.90	57.23	35.64	65.89	74.00	8.11	Peak
2	5150.00	32.40	11.90	66.55	35.64	85.21	74.00	8.79	Peak
3	5191.20	32.40	11.91	68.38	35.62	97.07	74.00	-23.07	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

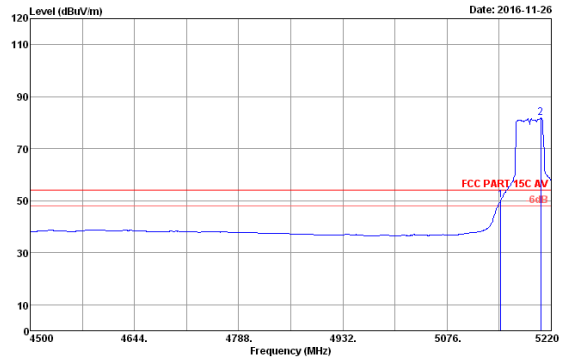

Site no. : 3m Chamber Data no. : 86
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV Pre : 101.2kPa
 Env. / Ins. : 23.14C/54.9% Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11n HT40 5190MHz Tx Mode
 M/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.00	32.40	11.90	41.54	35.64	50.20	54.00	3.80	Average
2	5205.60	32.40	11.91	73.07	35.61	81.77	54.00	-27.77	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

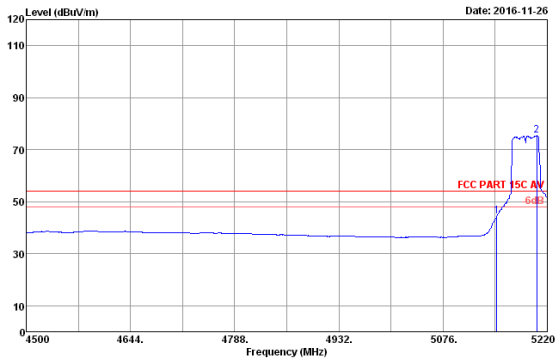

Site no. : 3m Chamber Data no. : 87
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV Pre : 101.2kPa
 Env. / Ins. : 23.14C/54.9% Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11n HT40 5190MHz Tx Mode
 M/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.00	32.40	11.90	35.82	35.64	44.48	54.00	9.52	Average
2	5205.60	32.40	11.91	66.78	35.61	75.48	54.00	-21.48	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

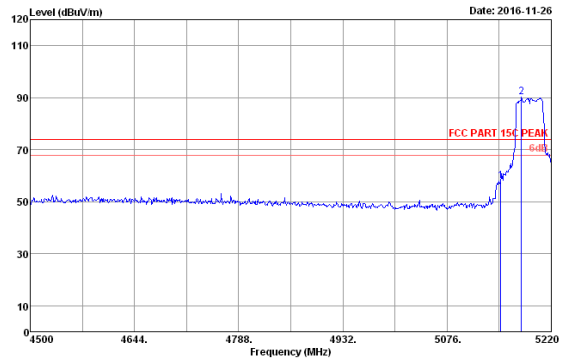

Site no. : 3m Chamber Data no. : 88
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.14C/54.9% Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11n HT40 5190MHz Tx Mode
 M/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.16	32.40	11.90	49.31	35.64	57.97	74.00	16.03	Peak
2	5178.96	32.40	11.91	81.70	35.62	90.39	74.00	-16.39	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

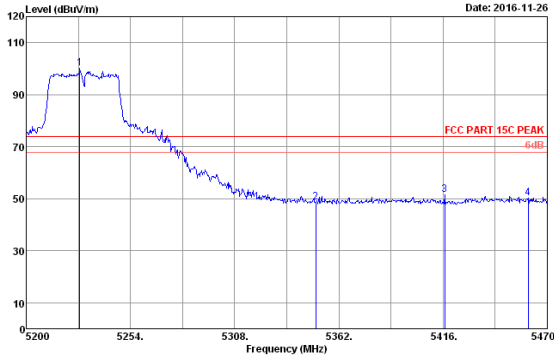

Site no. : 3m Chamber Data no. : 95
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.1kV/54.9kV Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11n HT40 5230MHz Tx Mode
 M/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5227.81	32.40	11.91	91.34	35.60	100.05	74.00	-26.05	Peak
2	5360.00	32.40	11.93	40.00	35.53	48.80	74.00	25.20	Peak
3	5416.81	32.40	11.94	42.62	35.49	51.47	74.00	22.53	Peak
4	5460.00	32.40	11.94	41.25	35.47	50.12	74.00	23.88	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

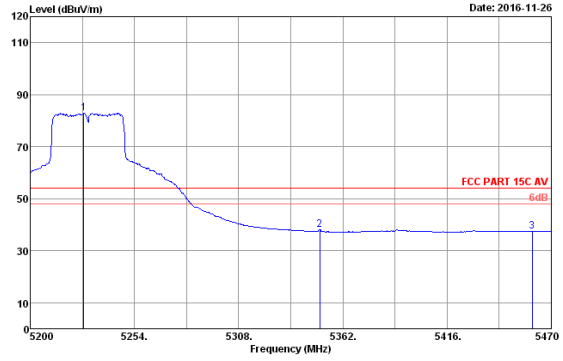

Site no. : 3m Chamber Data no. : 96
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV Pre : 101.2kPa
 Env. / Ins. : 23.1kV/54.9kV Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11n HT40 5230MHz Tx Mode
 M/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5227.81	32.40	11.91	74.33	35.60	83.04	54.00	-29.04	Average
2	5360.00	32.40	11.93	28.39	35.53	38.19	54.00	16.81	Average
3	5460.00	32.40	11.94	28.53	35.47	37.40	54.00	16.60	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

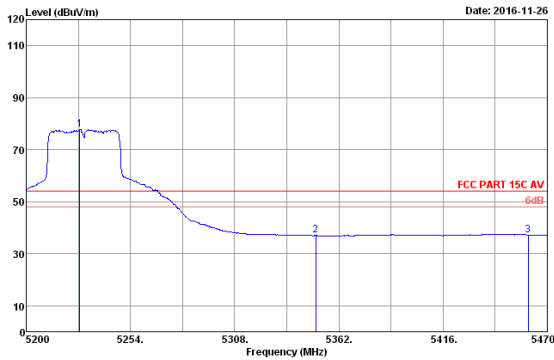

Site no. : 3m Chamber Data no. : 97
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV Pre : 101.2kPa
 Env. / Ins. : 23.1kV/54.9kV Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11n HT40 5230MHz Tx Mode
 M/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5227.81	32.40	11.91	69.18	35.60	77.89	54.00	-23.89	Average
2	5360.00	32.40	11.93	28.36	35.53	37.16	54.00	16.84	Average
3	5460.00	32.40	11.94	28.40	35.47	37.27	54.00	16.73	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

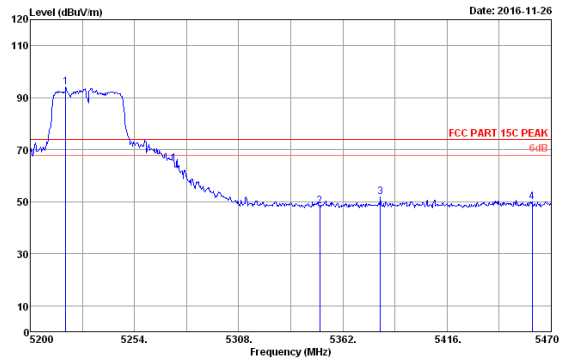

Site no. : 3m Chamber Data no. : 98
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.1kV/54.9kV Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11n HT40 5230MHz Tx Mode
 M/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5218.36	32.40	11.91	85.45	35.60	94.16	74.00	-20.16	Peak
2	5360.00	32.40	11.93	39.50	35.53	48.30	74.00	25.70	Peak
3	5381.44	32.40	11.93	42.93	35.51	51.75	74.00	22.25	Peak
4	5460.00	32.40	11.94	41.16	35.47	50.03	74.00	23.97	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

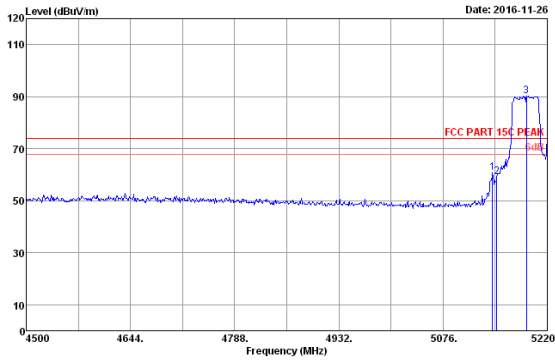

Site no. : 3m Chamber Data no. : 89
 Dis. / Ant. : 3m 2016 MCD1209 3007 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.1kV/54.9kV Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT40 5190MHz Tx Mode
 M/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5144.40	32.40	11.90	51.99	35.64	80.65	74.00	13.35	Peak
2	5150.00	32.40	11.90	80.43	35.64	89.09	74.00	14.91	Peak
3	5191.20	32.40	11.91	81.55	35.62	90.24	74.00	-16.24	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

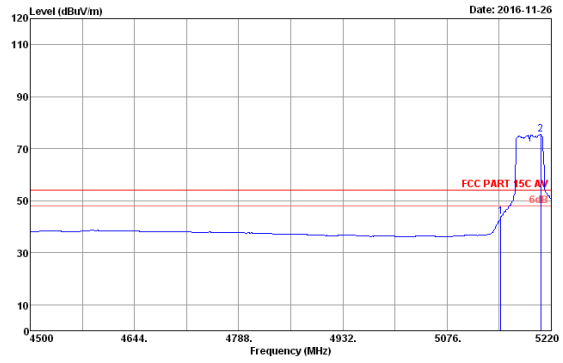

Site no. : 3m Chamber Data no. : 100
 Dis. / Ant. : 3m 2016 MCD1209 3007 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV Pre : 101.2kPa
 Env. / Ins. : 23.1kV/54.9kV Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT40 5190MHz Tx Mode
 M/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.00	32.40	11.90	35.09	35.64	43.75	54.00	10.25	Average
2	5205.60	32.40	11.91	66.76	35.61	75.46	54.00	-21.46	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

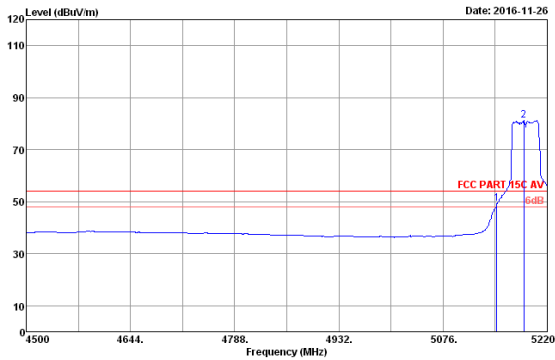

Site no. : 3m Chamber Data no. : 101
 Dis. / Ant. : 3m 2016 MCD1209 3007 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV Pre : 101.2kPa
 Env. / Ins. : 23.1kV/54.9kV Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT40 5190MHz Tx Mode
 M/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.00	32.40	11.90	40.54	35.64	49.20	54.00	4.80	Average
2	5187.60	32.40	11.91	72.51	35.62	81.20	54.00	-27.20	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

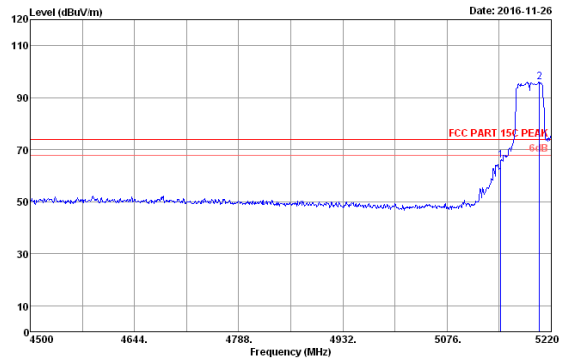

Site no. : 3m Chamber Data no. : 102
 Dis. / Ant. : 3m 2016 MCD1209 3007 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.1kV/54.9kV Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT40 5190MHz Tx Mode
 M/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.00	32.40	11.90	57.34	35.64	66.00	74.00	8.00	Peak
2	5203.44	32.40	11.91	87.33	35.61	96.03	74.00	-22.03	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

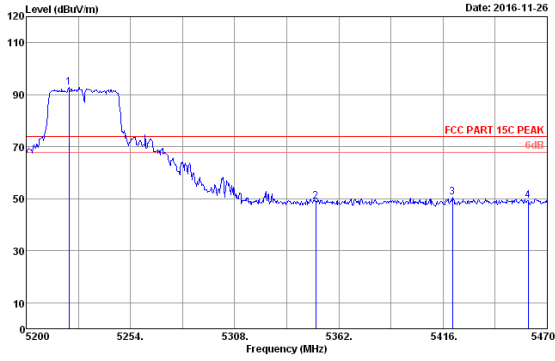

Site no. : 3m Chamber Data no. : 115
 Dis. / Ant. : 3m 2016 MCD1209 3007 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.14C/54.9W Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT40 5230MHz Tx Mode
 M/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5222.14	32.40	11.91	84.22	35.60	92.93	74.00	-18.93	Peak
2	5350.00	32.40	11.93	40.17	35.53	48.97	74.00	25.03	Peak
3	5420.86	32.40	11.94	41.76	35.49	50.81	74.00	23.39	Peak
4	5460.00	32.40	11.94	40.52	35.47	49.39	74.00	24.61	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

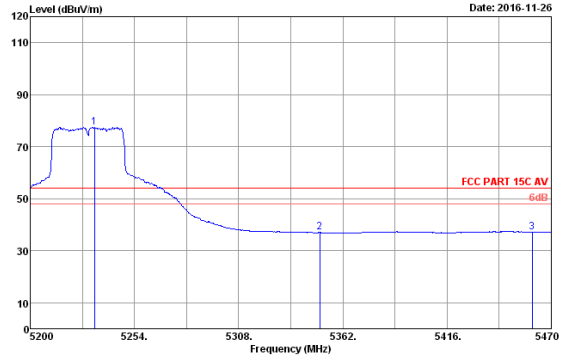

Site no. : 3m Chamber Data no. : 116
 Dis. / Ant. : 3m 2016 MCD1209 3007 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV Pre : 101.2kPa
 Env. / Ins. : 23.14C/54.9W Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT40 5230MHz Tx Mode
 M/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5233.21	32.40	11.91	68.76	35.59	77.48	54.00	-23.48	Average
2	5350.00	32.40	11.93	28.33	35.53	37.13	54.00	16.87	Average
3	5460.00	32.40	11.94	28.31	35.47	37.18	54.00	16.82	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

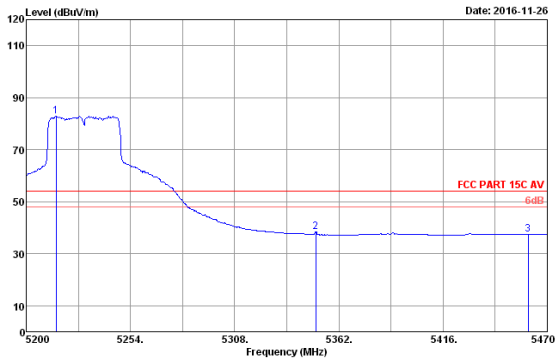

Site no. : 3m Chamber Data no. : 117
 Dis. / Ant. : 3m 2016 MCD1209 3007 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV Pre : 101.2kPa
 Env. / Ins. : 23.14C/54.9W Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT40 5230MHz Tx Mode
 M/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5215.39	32.40	11.91	74.24	35.60	82.95	54.00	-28.95	Average
2	5350.00	32.40	11.93	29.51	35.53	38.31	54.00	15.69	Average
3	5460.00	32.40	11.94	28.50	35.47	37.37	54.00	16.63	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

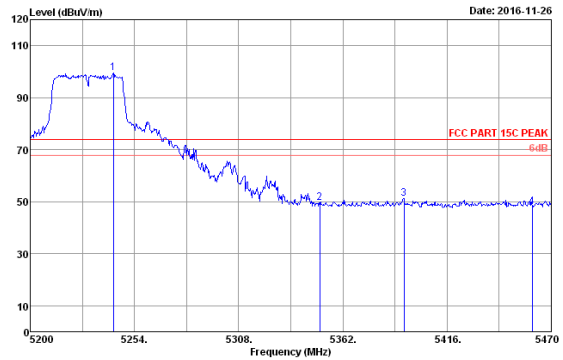

Site no. : 3m Chamber Data no. : 118
 Dis. / Ant. : 3m 2016 MCD1209 3007 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.14C/54.9W Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT40 5230MHz Tx Mode
 M/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5243.20	32.40	11.91	90.64	35.59	99.36	74.00	-25.36	Peak
2	5350.00	32.40	11.93	40.95	35.53	49.75	74.00	24.25	Peak
3	5393.59	32.40	11.94	42.44	35.51	51.27	74.00	22.73	Peak
4	5460.00	32.40	11.94	39.27	35.47	48.14	74.00	25.86	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

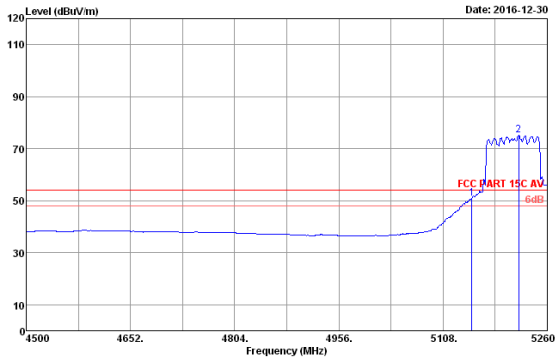


Date: 2016-11-20

Site no. : 3m Chamber Data no. : 125
 Dis. / Ant. : 3m 2016 MCD1209 3007 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV Pre : 101.2kPa
 Env. / Ins. : 23.14C/54.9% Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT80 5210MHz Tx Mode
 M/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.00	32.40	11.90	42.16	35.64	50.82	54.00	3.18	Average
2	5218.20	32.40	11.91	66.58	35.60	75.29	54.00	-21.29	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

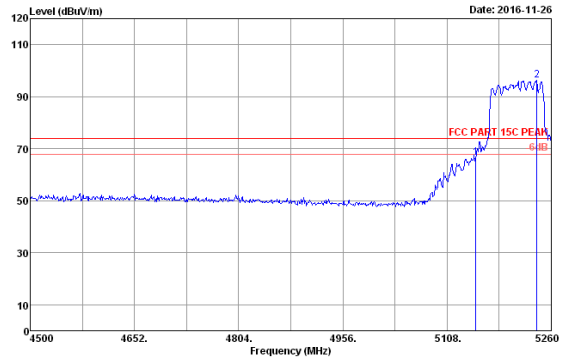


Date: 2016-11-26

Site no. : 3m Chamber Data no. : 126
 Dis. / Ant. : 3m 2016 MCD1209 3007 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.14C/54.9% Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT80 5210MHz Tx Mode
 M/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.00	32.40	11.90	57.91	35.64	66.57	74.00	7.43	Peak
2	5238.72	32.40	11.91	87.53	35.59	96.25	74.00	-22.25	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

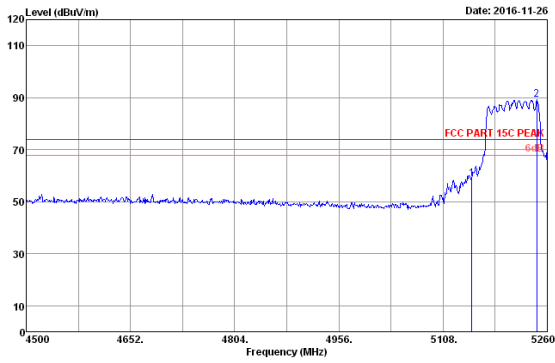


Date: 2016-11-26

Site no. : 3m Chamber Data no. : 127
 Dis. / Ant. : 3m 2016 MCD1209 3007 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.14C/54.9% Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT80 5210MHz Tx Mode
 M/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.00	32.40	11.90	50.16	35.64	58.82	74.00	15.18	Peak
2	5244.80	32.40	11.91	80.48	35.59	89.20	74.00	-15.20	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

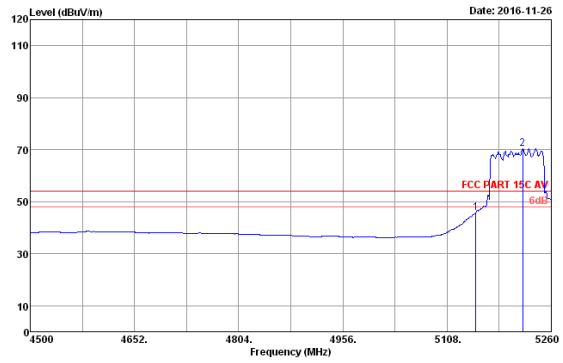


Date: 2016-11-26

Site no. : 3m Chamber Data no. : 128
 Dis. / Ant. : 3m 2016 MCD1209 3007 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV Pre : 101.2kPa
 Env. / Ins. : 23.14C/54.9% Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT80 5210MHz Tx Mode
 M/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.00	32.40	11.90	37.12	35.64	45.78	54.00	8.22	Average
2	5218.20	32.40	11.91	61.76	35.60	70.47	54.00	-16.47	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

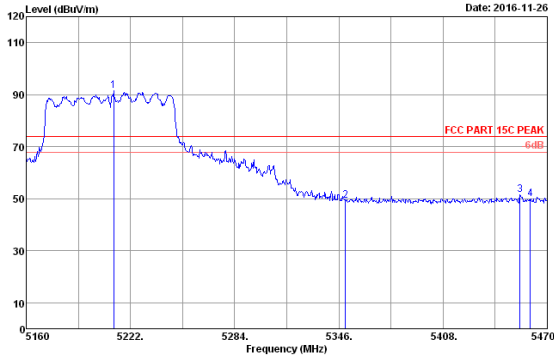

Site no. : 3m Chamber Data no. : 129
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.14C/54.9% Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT80 5210MHz Tx Mode
 M/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5212.08	32.40	11.91	82.66	35.61	91.36	74.00	-17.36	Peak
2	5350.00	32.40	11.93	40.44	35.53	49.24	74.00	24.76	Peak
3	5453.88	32.40	11.94	42.72	35.47	51.59	74.00	22.41	Peak
4	5460.00	32.40	11.94	40.92	35.47	49.79	74.00	24.21	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

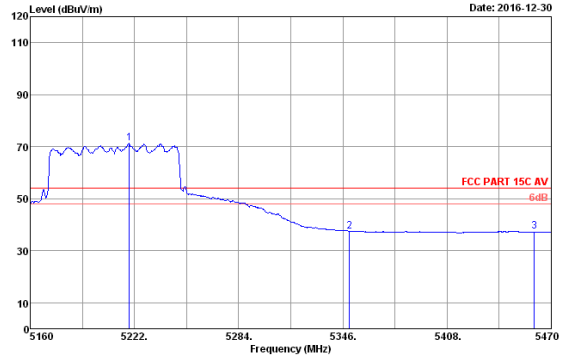

Site no. : 3m Chamber Data no. : 130
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV Pre : 101.2kPa
 Env. / Ins. : 23.14C/54.9% Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT80 5210MHz Tx Mode
 M/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5218.90	32.40	11.91	62.65	35.60	71.36	54.00	-17.36	Average
2	5350.00	32.40	11.93	28.68	35.53	37.48	54.00	16.52	Average
3	5460.00	32.40	11.94	28.61	35.47	37.48	54.00	16.52	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

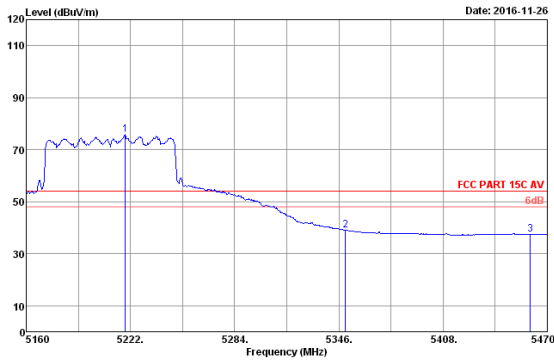

Site no. : 3m Chamber Data no. : 131
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV Pre : 101.2kPa
 Env. / Ins. : 23.14C/54.9% Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT80 5210MHz Tx Mode
 M/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5218.90	32.40	11.91	67.21	35.60	75.92	54.00	-21.92	Average
2	5350.00	32.40	11.93	30.20	35.53	39.00	54.00	15.00	Average
3	5460.00	32.40	11.94	28.50	35.47	37.37	54.00	16.63	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

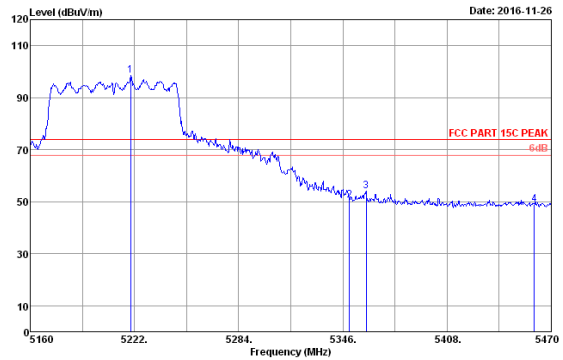


Site no. : 3m Chamber Data no. : 132
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.14C/54.9% Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT80 5210MHz Tx Mode
 M/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5218.83	32.40	11.91	89.72	35.60	98.43	74.00	-24.43	Peak
2	5350.00	32.40	11.93	41.73	35.53	50.53	74.00	23.47	Peak
3	5359.95	32.40	11.93	45.12	35.53	53.92	74.00	20.08	Peak
4	5460.00	32.40	11.94	39.93	35.47	48.80	74.00	25.20	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.


5745-5825MHz Band:

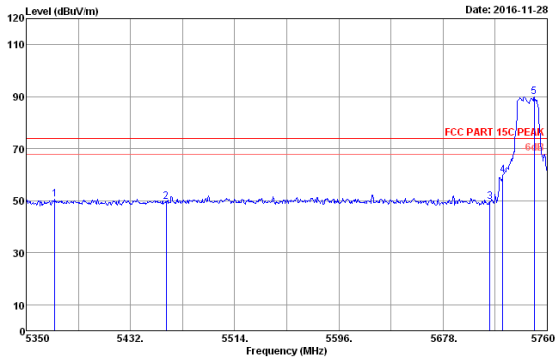

Site no. : 3m Chamber Data no. : 7
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.6°C/54.0% Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEB802.11a 5745MHz Tx Mode
 M/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5372.55	32.40	11.93	41.75	35.52	50.56	74.00	23.44	Peak
2	5450.00	32.40	11.94	40.63	35.47	49.50	74.00	24.50	Peak
3	5715.00	32.87	11.97	40.25	35.45	49.64	74.00	24.36	Peak
4	5725.00	32.90	11.97	50.43	35.45	59.85	74.00	14.15	Peak
5	5749.75	32.85	11.97	80.53	35.45	90.00	74.00	-16.00	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Ant Factor
 2. The emission levels that are 20dB below the official limit are not reported.

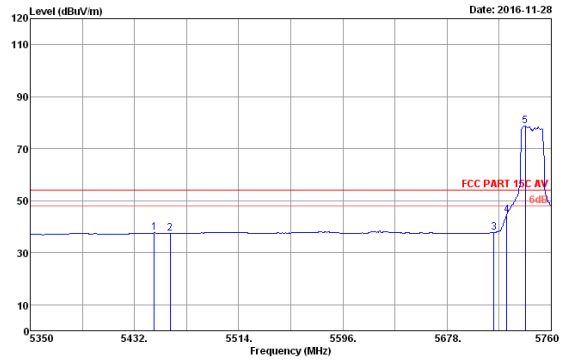

Site no. : 3m Chamber Data no. : 8
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV Pre : 101.2kPa
 Env. / Ins. : 23.6°C/54.0% Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEB802.11a 5745MHz Tx Mode
 M/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5447.58	32.40	11.94	28.75	35.48	37.61	54.00	16.39	Average
2	5450.00	32.40	11.94	28.55	35.47	37.42	54.00	16.58	Average
3	5715.00	32.87	11.97	28.33	35.45	37.72	54.00	16.28	Average
4	5725.00	32.90	11.97	35.12	35.45	44.54	54.00	9.46	Average
5	5739.50	32.93	11.97	69.28	35.45	78.73	54.00	-24.73	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Ant Factor
 2. The emission levels that are 20dB below the official limit are not reported.

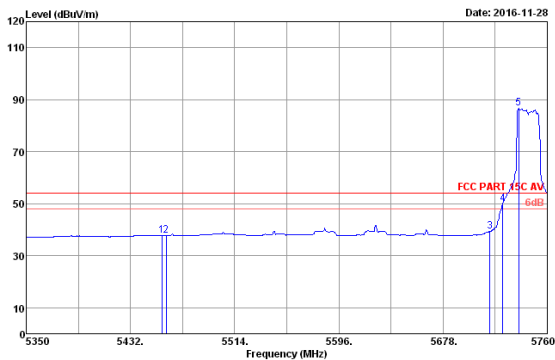

Site no. : 3m Chamber Data no. : 9
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV Pre : 101.2kPa
 Env. / Ins. : 23.6°C/54.0% Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEB802.11a 5745MHz Tx Mode
 M/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5456.60	32.40	11.94	28.93	35.47	37.80	54.00	16.20	Average
2	5450.00	32.40	11.94	28.86	35.47	37.72	54.00	16.28	Average
3	5715.00	32.87	11.97	29.99	35.45	39.38	54.00	14.62	Average
4	5725.00	32.90	11.97	40.52	35.45	49.94	54.00	4.06	Average
5	5737.45	32.92	11.97	77.21	35.45	86.65	54.00	-32.65	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Ant Factor
 2. The emission levels that are 20dB below the official limit are not reported.

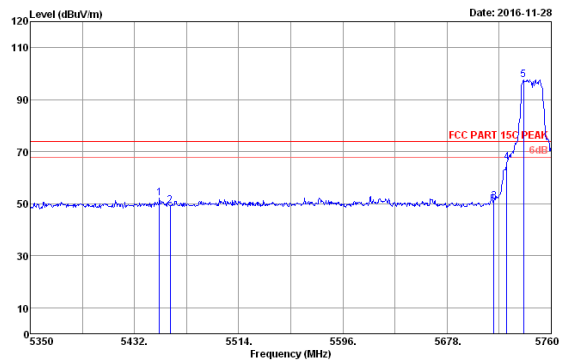

Site no. : 3m Chamber Data no. : 10
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.6°C/54.0% Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEB802.11a 5745MHz Tx Mode
 M/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5451.68	32.40	11.94	43.17	35.48	52.03	74.00	21.97	Peak
2	5450.00	32.40	11.94	40.57	35.47	49.44	74.00	24.56	Peak
3	5715.00	32.87	11.97	41.43	35.45	50.82	74.00	23.18	Peak
4	5725.00	32.90	11.97	56.35	35.45	65.77	74.00	8.23	Peak
5	5738.27	32.92	11.97	89.30	35.45	97.74	74.00	-23.74	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Ant Factor
 2. The emission levels that are 20dB below the official limit are not reported.

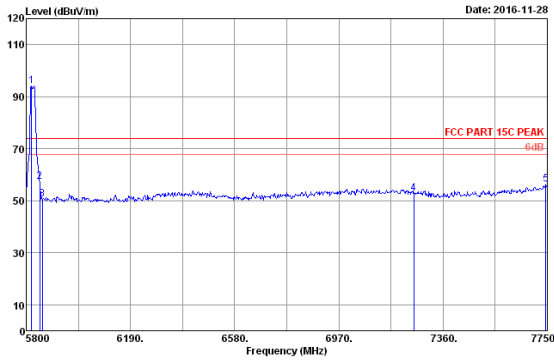

Site no. : 3m Chamber Data no. : 23
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.6C/54.0W Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11a 5825MHz Tx Mode
 M/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5819.50	33.10	11.98	84.51	35.45	94.14	74.00	-20.14	Peak
2	5850.00	33.17	11.98	47.46	35.45	57.16	74.00	16.84	Peak
3	5850.00	33.19	11.98	41.00	35.45	50.72	74.00	23.28	Peak
4	7250.00	35.90	12.48	40.06	35.56	52.88	74.00	21.12	Peak
5	7744.15	36.44	12.78	42.49	35.53	56.18	74.00	17.82	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

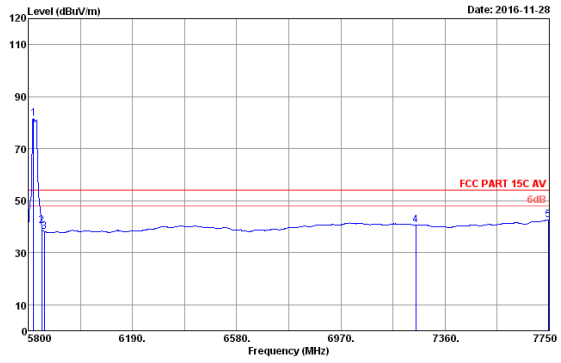

Site no. : 3m Chamber Data no. : 24
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV Pre : 101.2kPa
 Env. / Ins. : 23.6C/54.0W Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11a 5825MHz Tx Mode
 M/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5819.50	33.10	11.98	72.01	35.45	81.64	54.00	-27.64	Average
2	5850.00	33.17	11.98	30.58	35.45	40.28	54.00	13.72	Average
3	5850.00	33.19	11.98	28.41	35.45	38.13	54.00	15.87	Average
4	7250.00	35.90	12.48	27.78	35.56	40.60	54.00	13.40	Average
5	7746.10	36.44	12.78	28.87	35.53	42.56	54.00	11.44	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

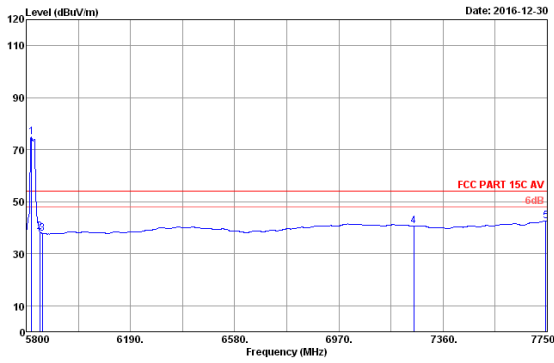

Site no. : 3m Chamber Data no. : 25
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV Pre : 101.2kPa
 Env. / Ins. : 23.6C/54.0W Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11a 5825MHz Tx Mode
 M/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5819.50	33.10	11.98	65.19	35.45	74.82	54.00	-20.82	Average
2	5850.00	33.17	11.98	28.77	35.45	38.47	54.00	15.53	Average
3	5850.00	33.19	11.98	28.13	35.45	37.85	54.00	16.15	Average
4	7250.00	35.90	12.48	27.76	35.56	40.58	54.00	13.42	Average
5	7744.15	36.44	12.78	28.91	35.53	42.60	54.00	11.40	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

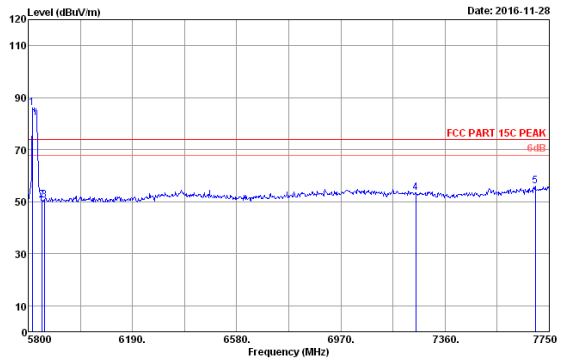

Site no. : 3m Chamber Data no. : 26
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.6C/54.0W Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11a 5825MHz Tx Mode
 M/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5815.60	33.09	11.98	76.60	35.45	86.22	74.00	-12.22	Peak
2	5850.00	33.17	11.98	40.75	35.45	50.46	74.00	23.55	Peak
3	5850.00	33.19	11.98	40.58	35.45	50.40	74.00	23.60	Peak
4	7250.00	35.90	12.48	40.59	35.56	53.41	74.00	20.59	Peak
5	7697.35	36.36	12.76	42.37	35.54	55.95	74.00	18.05	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

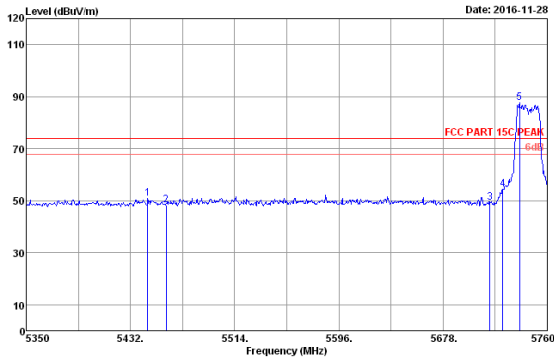

Site no. : 3m Chamber Data no. : 33
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.6C/54.0W Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11n HT20 5745MHz Tx Mode
 M/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5445.53	32.40	11.94	42.08	35.48	50.94	74.00	23.06	Peak
2	5460.00	32.40	11.94	39.51	35.47	48.38	74.00	25.62	Peak
3	5715.00	32.87	11.97	39.78	35.45	49.11	74.00	24.83	Peak
4	5725.00	32.90	11.97	44.87	35.45	54.29	74.00	19.71	Peak
5	5738.27	32.92	11.97	78.14	35.45	87.58	74.00	-13.58	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

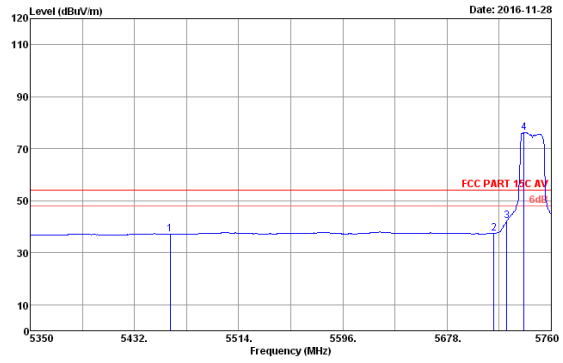

Site no. : 3m Chamber Data no. : 34
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV Pre : 101.2kPa
 Env. / Ins. : 23.6C/54.0W Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11n HT20 5745MHz Tx Mode
 M/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5460.00	32.40	11.94	28.28	35.47	37.15	54.00	16.85	Average
2	5715.00	32.87	11.97	28.04	35.45	37.43	54.00	16.57	Average
3	5725.00	32.90	11.97	32.35	35.45	42.27	54.00	11.73	Average
4	5738.68	32.93	11.97	66.72	35.45	76.17	54.00	-22.17	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

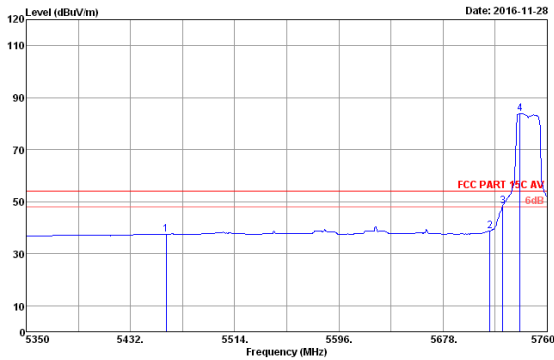

Site no. : 3m Chamber Data no. : 35
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV Pre : 101.2kPa
 Env. / Ins. : 23.6C/54.0W Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11n HT20 5745MHz Tx Mode
 M/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5460.00	32.40	11.94	28.53	35.47	37.40	54.00	16.60	Average
2	5715.00	32.87	11.97	29.38	35.45	38.77	54.00	15.23	Average
3	5725.00	32.90	11.97	38.92	35.45	48.34	54.00	5.66	Average
4	5738.68	32.93	11.97	74.51	35.45	83.96	54.00	-29.96	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

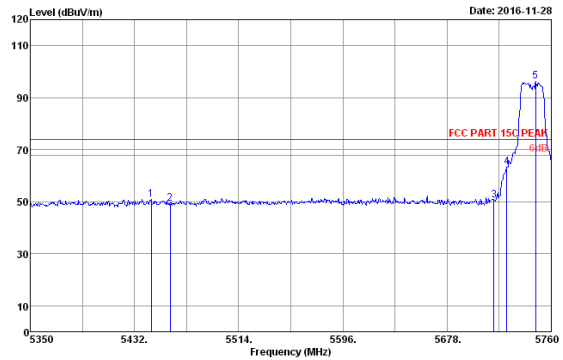

Site no. : 3m Chamber Data no. : 36
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.6C/54.0W Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11n HT20 5745MHz Tx Mode
 M/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5445.12	32.40	11.94	41.97	35.48	50.83	74.00	23.17	Peak
2	5460.00	32.40	11.94	40.35	35.47	49.22	74.00	24.78	Peak
3	5715.00	32.87	11.97	41.25	35.45	50.64	74.00	23.36	Peak
4	5725.00	32.90	11.97	53.82	35.45	63.24	74.00	10.76	Peak
5	5747.70	32.94	11.97	86.88	35.45	96.34	74.00	-22.34	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

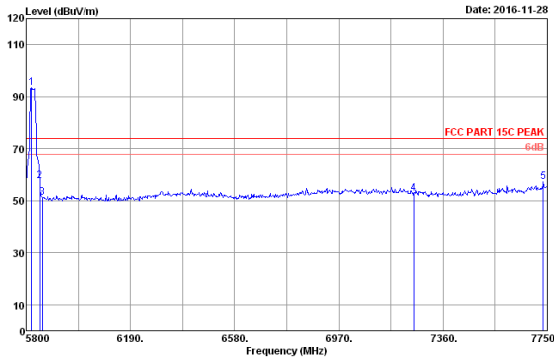

Date: 2016-11-28
 Site no. : 3m Chamber Data no. : 49
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.6C/54.0W Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11n HT20 5825MHz Tx Mode
 M/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5819.50	33.10	11.98	83.68	35.45	93.31	74.00	-19.31	Peak
2	5850.00	33.17	11.98	47.84	35.45	57.54	74.00	16.46	Peak
3	5850.00	33.19	11.98	41.36	35.45	51.09	74.00	22.92	Peak
4	7250.00	35.90	12.48	40.11	35.56	52.93	74.00	21.07	Peak
5	7734.40	36.42	12.77	43.59	35.53	57.25	74.00	16.75	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

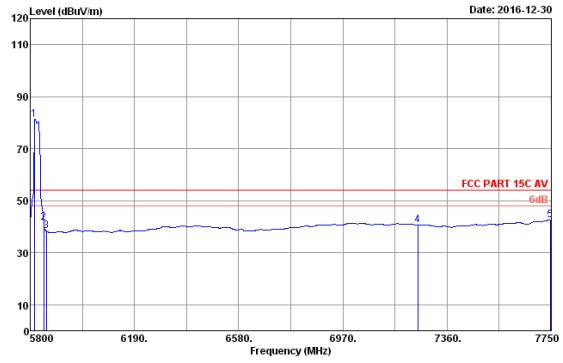

Date: 2016-12-30
 Site no. : 3m Chamber Data no. : 50
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV Pre : 101.2kPa
 Env. / Ins. : 23.6C/54.0W Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11n HT20 5825MHz Tx Mode
 M/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5815.60	33.09	11.98	71.57	35.45	81.19	54.00	-27.19	Average
2	5850.00	33.17	11.98	31.84	35.45	41.54	54.00	12.46	Average
3	5850.00	33.19	11.98	28.59	35.45	38.31	54.00	15.69	Average
4	7250.00	35.90	12.48	27.85	35.56	40.67	54.00	13.33	Average
5	7746.10	36.44	12.78	28.86	35.53	42.55	54.00	11.45	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

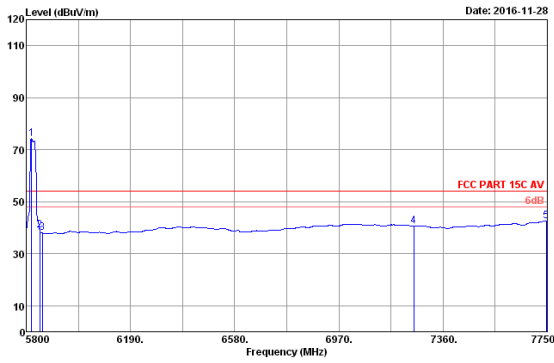

Date: 2016-11-28
 Site no. : 3m Chamber Data no. : 51
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV Pre : 101.2kPa
 Env. / Ins. : 23.6C/54.0W Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11n HT20 5825MHz Tx Mode
 M/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5819.50	33.10	11.98	64.48	35.45	74.11	54.00	-20.11	Average
2	5850.00	33.17	11.98	29.32	35.45	39.02	54.00	14.98	Average
3	5850.00	33.19	11.98	28.21	35.45	37.83	54.00	16.07	Average
4	7250.00	35.90	12.48	27.80	35.56	40.62	54.00	13.38	Average
5	7746.10	36.44	12.78	28.92	35.53	42.61	54.00	11.39	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

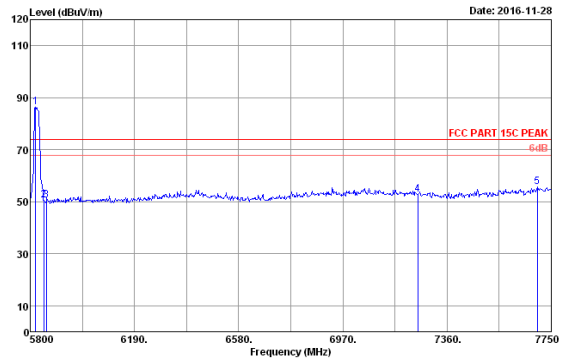

Date: 2016-11-28
 Site no. : 3m Chamber Data no. : 52
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.6C/54.0W Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11n HT20 5825MHz Tx Mode
 M/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5819.50	33.10	11.98	76.69	35.45	86.32	74.00	-12.32	Peak
2	5850.00	33.17	11.98	40.83	35.45	50.53	74.00	23.47	Peak
3	5850.00	33.19	11.98	40.88	35.45	50.60	74.00	23.40	Peak
4	7250.00	35.90	12.48	39.87	35.56	52.69	74.00	21.31	Peak
5	7697.35	36.36	12.76	42.09	35.54	55.67	74.00	18.33	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

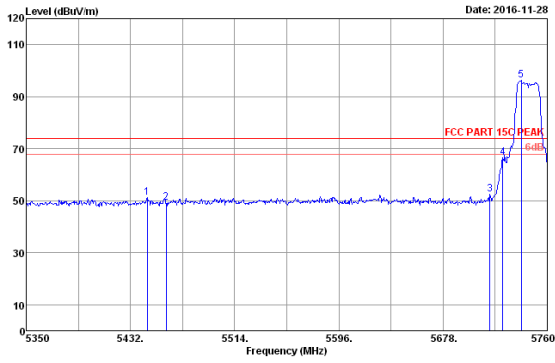

Site no. : 3m Chamber Data no. : 59
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.6C/54.0W Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT20 5745MHz Tx Mode
 M/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5445.12	32.40	11.94	42.29	35.48	51.15	74.00	22.85	Peak
2	5460.00	32.40	11.94	40.41	35.47	49.28	74.00	24.72	Peak
3	5715.00	32.87	11.97	43.01	35.45	52.40	74.00	21.60	Peak
4	5725.00	32.90	11.97	57.23	35.45	66.65	74.00	7.35	Peak
5	5739.50	32.93	11.97	86.72	35.45	96.17	74.00	-22.17	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

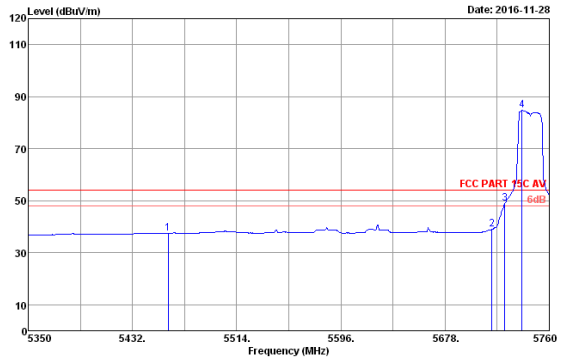

Site no. : 3m Chamber Data no. : 60
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV Pre : 101.2kPa
 Env. / Ins. : 23.6C/54.0W Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT20 5745MHz Tx Mode
 M/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5460.00	32.40	11.94	28.56	35.47	37.43	54.00	16.57	Average
2	5715.00	32.87	11.97	29.57	35.45	38.96	54.00	15.04	Average
3	5725.00	32.90	11.97	39.51	35.45	48.93	54.00	5.07	Average
4	5738.68	32.93	11.97	75.26	35.45	84.71	54.00	-30.71	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

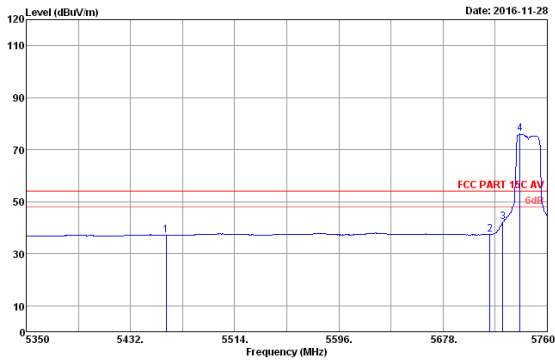

Site no. : 3m Chamber Data no. : 61
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV Pre : 101.2kPa
 Env. / Ins. : 23.6C/54.0W Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT20 5745MHz Tx Mode
 M/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5460.00	32.40	11.94	28.28	35.47	37.15	54.00	16.85	Average
2	5715.00	32.87	11.97	28.07	35.45	37.46	54.00	16.54	Average
3	5725.00	32.90	11.97	32.77	35.45	42.19	54.00	11.81	Average
4	5738.68	32.93	11.97	66.56	35.45	76.01	54.00	-22.01	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

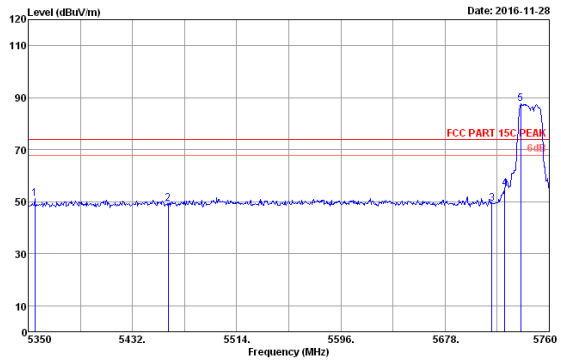

Site no. : 3m Chamber Data no. : 62
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.6C/54.0W Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT20 5745MHz Tx Mode
 M/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5355.33	32.40	11.93	42.25	35.53	51.05	74.00	22.95	Peak
2	5460.00	32.40	11.94	40.41	35.47	49.28	74.00	24.72	Peak
3	5715.00	32.87	11.97	39.97	35.45	49.36	74.00	24.64	Peak
4	5725.00	32.90	11.97	45.71	35.45	55.13	74.00	18.87	Peak
5	5737.45	32.92	11.97	78.28	35.45	87.72	74.00	-13.72	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

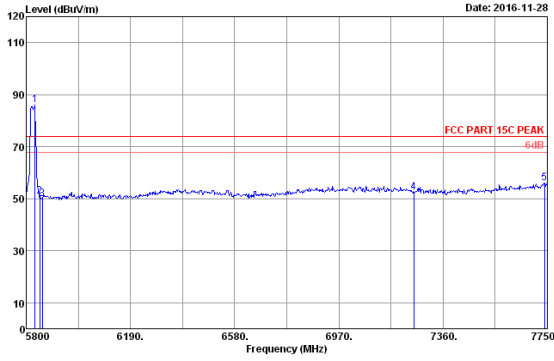

Date: 2016-11-28
 Site no. : 3m Chamber Data no. : 75
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.6C/54.0W Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT20 5825MHz Tx Mode
 M/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5833.15	33.13	11.98	76.39	35.45	86.05	74.00	-12.05	Peak
2	5850.00	33.17	11.98	41.10	35.45	50.80	74.00	23.20	Peak
3	5850.00	33.19	11.98	40.24	35.45	49.96	74.00	24.04	Peak
4	7250.00	35.90	12.48	39.82	35.56	52.64	74.00	21.36	Peak
5	7740.25	36.43	12.78	42.42	35.53	56.10	74.00	17.90	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

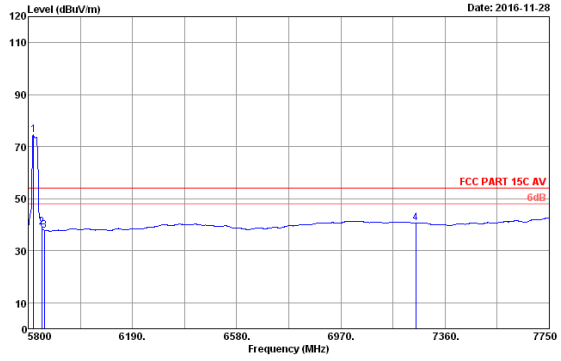

Date: 2016-11-28
 Site no. : 3m Chamber Data no. : 76
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV Pre : 101.2kPa
 Env. / Ins. : 23.6C/54.0W Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT20 5825MHz Tx Mode
 M/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5819.50	33.10	11.98	64.81	35.45	74.44	54.00	-20.44	Average
2	5850.00	33.17	11.98	29.26	35.45	38.96	54.00	15.04	Average
3	5850.00	33.19	11.98	28.14	35.45	37.86	54.00	16.14	Average
4	7250.00	35.90	12.48	27.74	35.56	40.56	54.00	13.44	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

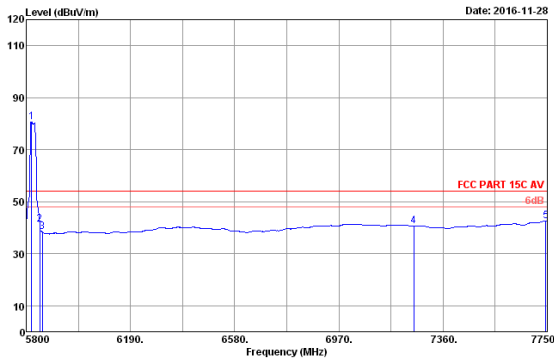

Date: 2016-11-28
 Site no. : 3m Chamber Data no. : 77
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV Pre : 101.2kPa
 Env. / Ins. : 23.6C/54.0W Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT20 5825MHz Tx Mode
 M/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5819.50	33.10	11.98	71.14	35.45	80.77	54.00	-26.77	Average
2	5850.00	33.17	11.98	31.67	35.45	41.37	54.00	12.63	Average
3	5850.00	33.19	11.98	28.56	35.45	38.23	54.00	15.72	Average
4	7250.00	35.90	12.48	27.74	35.56	40.56	54.00	13.44	Average
5	7744.15	36.44	12.78	28.89	35.53	42.58	54.00	11.42	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

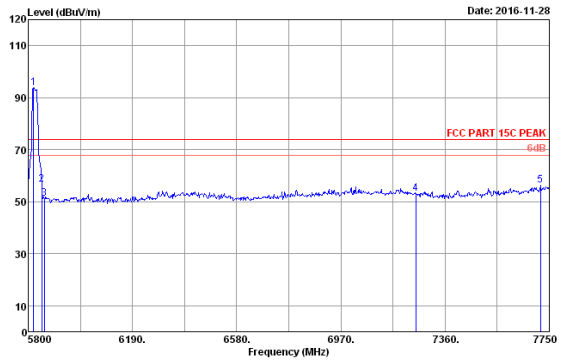

Date: 2016-11-28
 Site no. : 3m Chamber Data no. : 78
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.6C/54.0W Engineer : Lynn
 EUT : CaptionCall Wireless Router 2
 Power rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT20 5825MHz Tx Mode
 M/N:CR2

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5819.50	33.10	11.98	84.17	35.45	93.80	74.00	-19.80	Peak
2	5850.00	33.17	11.98	46.87	35.45	56.57	74.00	17.43	Peak
3	5850.00	33.19	11.98	41.38	35.45	51.10	74.00	22.90	Peak
4	7250.00	35.90	12.48	40.39	35.56	53.21	74.00	20.79	Peak
5	7716.85	36.39	12.77	42.60	35.54	56.22	74.00	17.78	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.