

No. 1 Workshop, M-10, Middle section, Science & Technology Park, Nanshan

District, Shenzhen, Guangdong, China 518057

Telephone: +86 (0) 755 2601 2053 Fax: +86 (0) 755 2671 0594 Report No.: SZEM160300114601

Email: ee.shenzhen@sgs.com Page: 1 of 43

### **FCC REPORT**

Application No:SZEM1603001146CRApplicant:Buzz Products Pty Ltd

Manufacturer:Shenzhen Longtech Electronics Co., LtdFactory:Shenzhen Longtech Electronics Co., Ltd

Product Name: BLE Connected Glassware

Model No.(EUT): BUZCONBT

FCC ID: 2AA7CBUZCONBT

Standards: 47 CFR Part 15, Subpart C (2015)

**Date of Receipt:** 2016-03-10

**Date of Test:** 2016-03-15 to 2016-03-16

**Date of Issue:** 2016-05-10

Test Result: PASS \*

\* In the configuration tested, the EUT complied with the standards specified above.

#### Authorized Signature:



Jack Zhang EMC Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.



Report No.: SZEM160300114601

Page: 2 of 43

#### 2 Version

Revision Record						
Version	Chapter	Date	Modifier	Remark		
00		2016-05-10		Original		

Authorized for issue by:		
	Brix Chen	2016-03-16
Tested By	(Bill Chen) /Project Engineer	Date
	Iris Zhou	2016-05-10
Prepared By	(Iris Zhou) /Clerk	Date
	Eric Fu	2016-05-10
Checked By	(Eric Fu) /Reviewer	Date



Report No.: SZEM160300114601

Page: 3 of 43

### 3 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15, Subpart C Section 15.203/15.247 (c)	ANSI C63.10 2013	PASS
Conducted Peak Output Power	47 CFR Part 15, Subpart C Section 15.247 (b)(3)	ANSI C63.10 2013	PASS
6dB Occupied Bandwidth	47 CFR Part 15, Subpart C Section 15.247 (a)(2)	ANSI C63.10 2013	PASS
Power Spectral Density	47 CFR Part 15, Subpart C Section 15.247 (e)	ANSI C63.10 2013	PASS
Band-edge for RF Conducted Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	ANSI C63.10 2013	PASS
RF Conducted Spurious Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	ANSI C63.10 2013	PASS
Radiated Spurious Emissions	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 2013	PASS
Restricted bands around fundamental frequency (Radiated Emission)	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 2013	PASS



Report No.: SZEM160300114601

Page: 4 of 43

#### 4 Contents

			Page
1	CC	OVER PAGE	1
2	VE	ERSION	2
		EST SUMMARY	
3			
4	CC	ONTENTS	4
5	GE	ENERAL INFORMATION	5
	5.1	CLIENT INFORMATION	5
	5.2	GENERAL DESCRIPTION OF EUT	
	5.3	TEST ENVIRONMENT	
	5.4	DESCRIPTION OF SUPPORT UNITS	
	5.5	TEST LOCATION	
	5.6	TEST FACILITY	
	5.7	DEVIATION FROM STANDARDS	
	5.8	ABNORMALITIES FROM STANDARD CONDITIONS	
	5.9	OTHER INFORMATION REQUESTED BY THE CUSTOMER	
	5.10	EQUIPMENT LIST	
6	TE	EST RESULTS AND MEASUREMENT DATA	10
	6.1	Antenna Requirement	
	6.2	CONDUCTED PEAK OUTPUT POWER	
	6.3	6DB OCCUPY BANDWIDTH	
	6.4	POWER SPECTRAL DENSITY	
	6.5	BAND-EDGE FOR RF CONDUCTED EMISSIONS	
	6.6	SPURIOUS RF CONDUCTED EMISSIONS	
	6.7	RADIATED SPURIOUS EMISSION	
	-	7.1 Spurious Emissions	
	6.8	RESTRICTED BANDS AROUND FUNDAMENTAL FREQUENCY	
7	PH	HOTOGRAPHS - EUT TEST SETUP	42
	7.1	RADIATED EMISSION	42
	7.2	RADIATED SPURIOUS EMISSION	
8	PH	HOTOGRAPHS - FUT CONSTRUCTIONAL DETAILS	43



Report No.: SZEM160300114601

Page: 5 of 43

### 5 General Information

#### 5.1 Client Information

Applicant:	Buzz Products Pty Ltd
Address of Applicant:	18 Studley Street, Abbottsford, 3067, VIC, Australia
Manufacturer:	Shenzhen Longtech Electronics Co., Ltd
Address of Manufacturer:	Zhengfeng Industrial Area, No.148, Donghuan Road, Huangpu Village Shajing Town, Baoan District, Shenzhen City, PRC
Factory:	Shenzhen Longtech Electronics Co., Ltd
Address of Factory:	Zhengfeng Industrial Area, No.148, Donghuan Road, Huangpu Village Shajing Town, Baoan District, Shenzhen City, PRC

#### **5.2 General Description of EUT**

Product Name:	BLE Connected Glassware
Model No.:	BUZCONBT
Operation Frequency:	2402MHz~2480MHz
Modulation Type:	GFSK
Number of Channel:	40
RF Function (Frequency):	BLE
Sample Type:	Portable production
Antenna Type:	Integral
Antenna Gain:	0dBi
Power Supply:	Battery: 3.0V DC (1.5V x 2 "AAA" Size Batteries)



Report No.: SZEM160300114601

Page: 6 of 43

Operation F	Operation Frequency each of channel						
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
0	2402MHz	10	2422MHz	20	2442MHz	30	2462MHz
1	2404MHz	11	2424MHz	21	2444MHz	31	2464MHz
2	2406MHz	12	2426MHz	22	2446MHz	32	2466MHz
3	2408MHz	13	2428MHz	23	2448MHz	33	2468MHz
4	2410MHz	14	2430MHz	24	2450MHz	34	2470MHz
5	2412MHz	15	2432MHz	25	2452MHz	35	2472MHz
6	2414MHz	16	2434MHz	26	2454MHz	36	2474MHz
7	2416MHz	17	2436MHz	27	2456MHz	37	2476MHz
8	2418MHz	18	2438MHz	28	2458MHz	38	2478MHz
9	2420MHz	19	2440MHz	29	2460MHz	39	2480MHz

#### Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency	
The lowest channel (CH0)	2402MHz	
The middle channel (CH19)	2440MHz	
The highest channel (CH39)	2480MHz	



Report No.: SZEM160300114601

Page: 7 of 43

#### 5.3 Test Environment

Operating Environment:				
Temperature:	25.0 °C			
Humidity:	50 % RH			
Atmospheric Pressure:	1015mbar			

#### 5.4 Description of Support Units

The EUT has been tested independent unit.

#### 5.5 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch E&E Lab,

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, Guangdong, China. 518057.

Tel: +86 755 2601 2053 Fax: +86 755 2671 0594

No tests were sub-contracted.



Report No.: SZEM160300114601

Page: 8 of 43

#### 5.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

#### CNAS (No. CNAS L2929)

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

#### · A2LA (Certificate No. 3816.01)

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 3816.01.

#### VCCI

The 10m Semi-anechoic chamber and Shielded Room of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-823, R-4188, T-1153 and C-2383 respectively.

#### FCC – Registration No.: 556682

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 556682.

#### Industry Canada (IC)

Two 3m Semi-anechoic chambers and the 10m Semi-anechoic chamber of SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab have been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-1, 4620C-2, 4620C-3.

#### 5.7 Deviation from Standards

None.

#### 5.8 Abnormalities from Standard Conditions

None.

#### 5.9 Other Information Requested by the Customer

None.



Report No.: SZEM160300114601

Page: 9 of 43

#### 5.10 Equipment List

	RE in Chamber						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date (yyyy-mm-dd)	Cal.Due date (yyyy-mm-dd)	
1	10m Semi-Anechoic Chamber	SAEMC	FSAC1018	SEM001-03	2015-08-01	2016-08-01	
2	EMI Test Receiver (9k-3GHz)	Rohde & Schwarz	ESCI	SEM004-01	2016-04-25	2017-04-25	
3	Trilog-Broadband Antenna(30M-1GHz)	Schwarzbeck	VULB9168	SEM003-17	2016-01-26	2017-01-26	
4	Pre-amplifier	Sonoma Instrument Co	310N	SEM005-03	2015-05-13	2016-05-13	
5	Loop Antenna	ETS-Lindgren	6502	SEM003-08	2015-08-14	2016-08-14	

	RF connected test						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date (yyyy-mm-dd)	Cal.Due date (yyyy-mm-dd)	
1	DC Power Supply	ZhaoXin	RXN-305D	SEM011-02	2015-10-09	2016-10-09	
2	Spectrum Analyzer	Rohde & Schwarz	FSP	SEM004-06	2015-10-17	2016-10-17	
3	Barometer	ChangChun	DYM3	SEM002-01	2015-05-13	2016-05-13	
4	Signal Generator	Rohde & Schwarz	SML03	SEM006-02	2016-04-25	2017-04-25	
5	Power Meter	Rohde & Schwarz	NRVS	SEM014-02	2015-10-09	2016-10-09	



Report No.: SZEM160300114601

Page: 10 of 43

#### 6 Test results and Measurement Data

#### 6.1 Antenna Requirement

Standard requirement: 47 CFR Part 15C Section 15.203 /247(c)


15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### **EUT Antenna:**

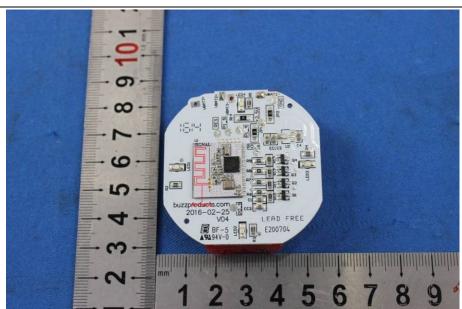


The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 0dBi.



Report No.: SZEM160300114601

Page: 11 of 43

#### 6.2 Conducted Peak Output Power

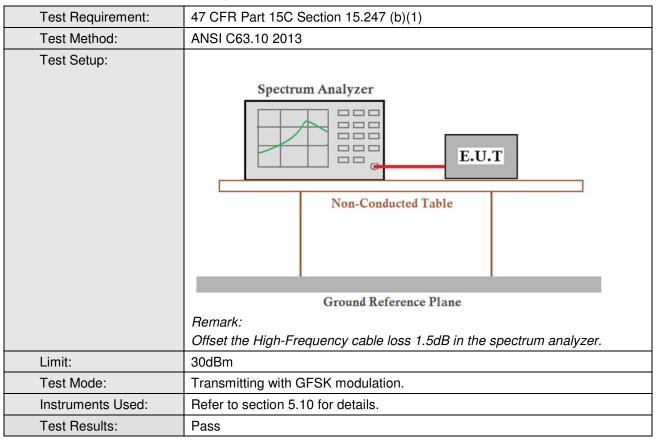

#### **Measurement Data**

GFSK mode						
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result			
Lowest	-0.86	30.00	Pass			
Middle	-2.03	30.00	Pass			
Highest	-3.28	30.00	Pass			




Report No.: SZEM160300114601


Page: 12 of 43

#### Test plot as follows:

Test mode: GFSK Test channel: Lowest

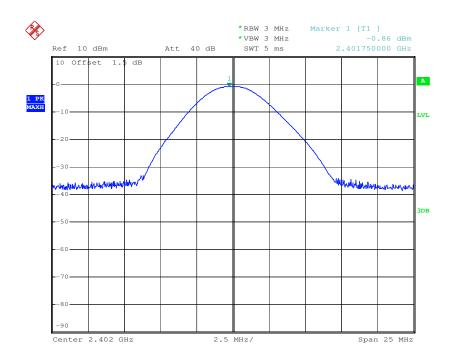



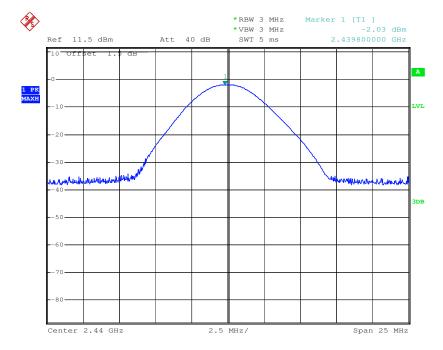




Report No.: SZEM160300114601

Page: 13 of 43



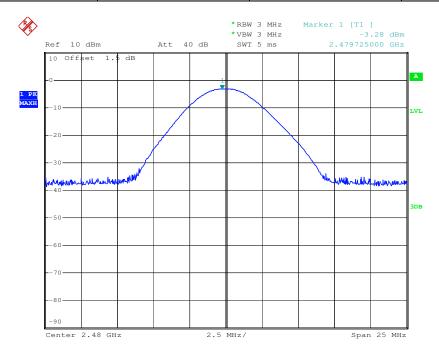




Report No.: SZEM160300114601

Page: 14 of 43

### 6.3 6dB Occupy Bandwidth

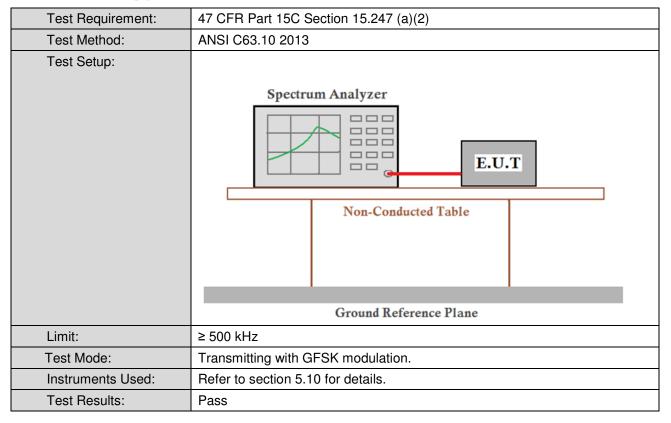

#### **Measurement Data**

GFSK mode									
Test channel	6dB Occupy Bandwidth (MHz)	Result							
Lowest	0.681	≥500	Pass						
Middle	0.678	≥500	Pass						
Highest	0.687	≥500	Pass						




Report No.: SZEM160300114601


Page: 15 of 43

#### Test plot as follows:

Test mode: GFSK Test channel: Lowest

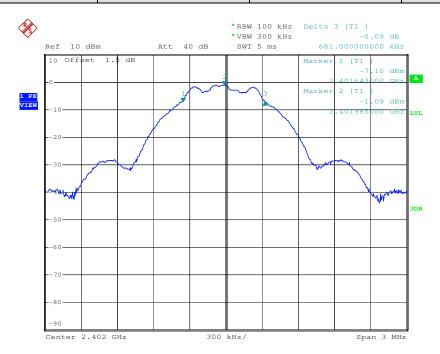



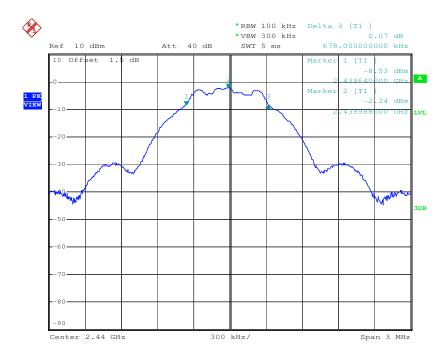




Report No.: SZEM160300114601

Page: 16 of 43

Test mode: GFSK Test channel: Highest

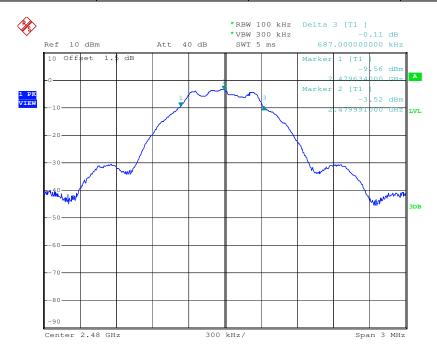




Report No.: SZEM160300114601

Page: 17 of 43

### 6.4 Power Spectral Density

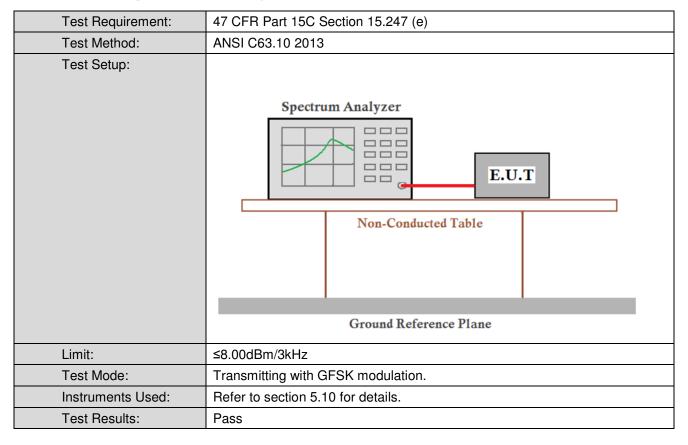

#### **Measurement Data**


GFSK mode										
Test channel	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result							
Lowest	-13.96	≤8.00	Pass							
Middle	-14.71	≤8.00	Pass							
Highest	-16.43	≤8.00	Pass							





Report No.: SZEM160300114601


Page: 18 of 43

Test plot as follows:



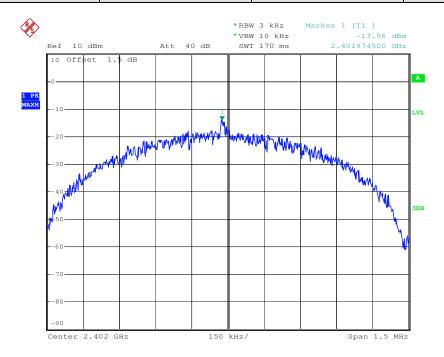



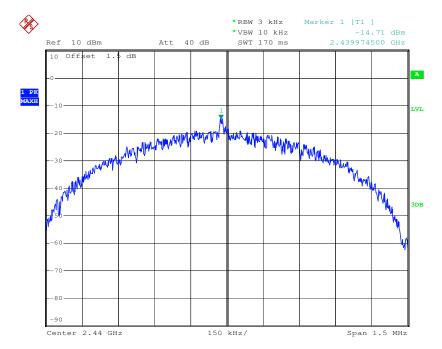




Report No.: SZEM160300114601

Page: 19 of 43

Test mode: GFSK Test channel: Highest

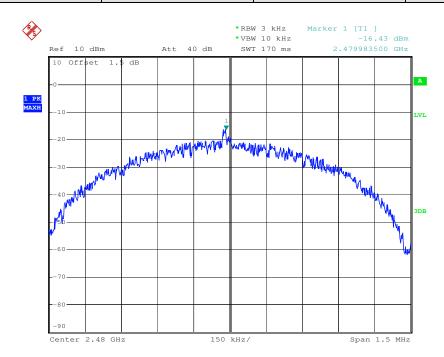




Report No.: SZEM160300114601

Page: 20 of 43

#### 6.5 Band-edge for RF Conducted Emissions

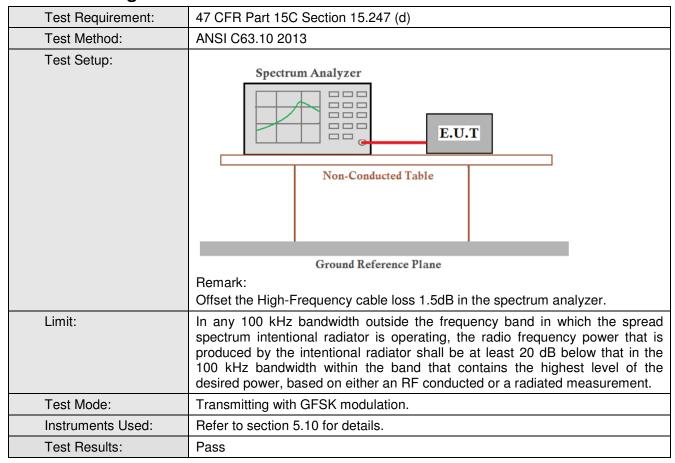




Report No.: SZEM160300114601


Page: 21 of 43

#### Test plot as follows:

Test mode: GFSK Test channel: Lowest

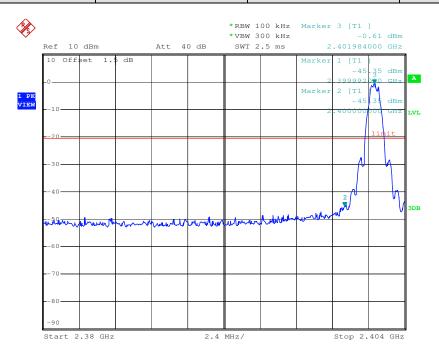



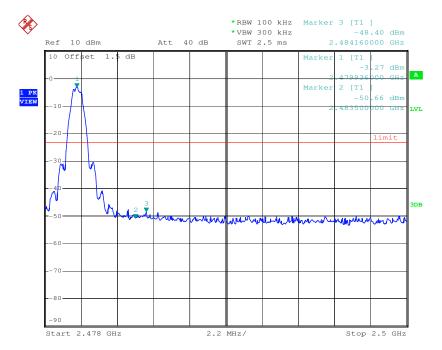



Report No.: SZEM160300114601

Page: 22 of 43

#### 6.6 Spurious RF Conducted Emissions

Test Requirement:	47 CFR Part 15C Section 15.247 (d)					
Test Method:	ANSI C63.10 2013					
Test Setup:	Spectrum Analyzer  E.U.T  Non-Conducted Table					
	Ground Reference Plane					
	Remark: Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.					
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.					
Test Mode:	Transmitting with GFSK modulation.					
Instruments Used:	Refer to section 5.10 for details.					
Test Results:	Pass					





Report No.: SZEM160300114601

Page: 23 of 43

#### Test plot as follows:

Test mode: GFSK Test channel: Lowest

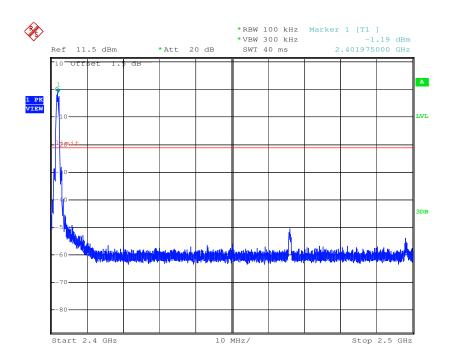


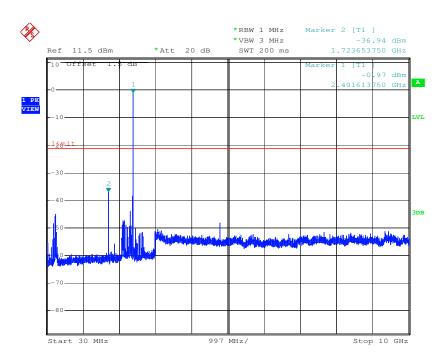




Report No.: SZEM160300114601

Page: 24 of 43

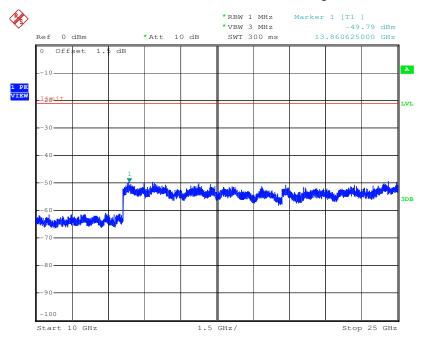




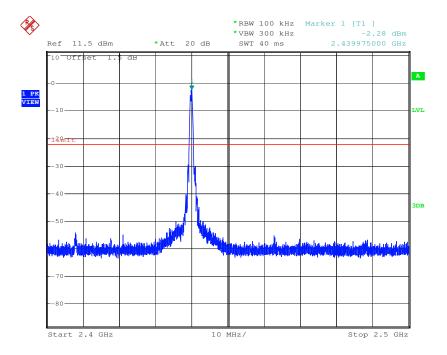




Report No.: SZEM160300114601

Page: 25 of 43

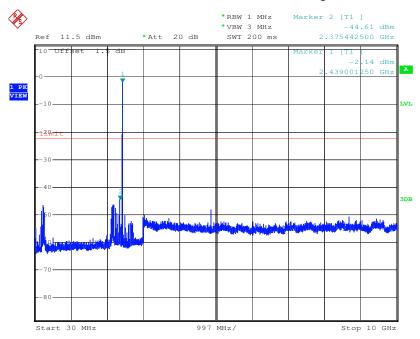


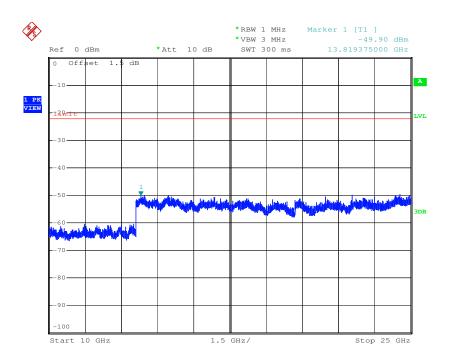





Report No.: SZEM160300114601

Page: 26 of 43



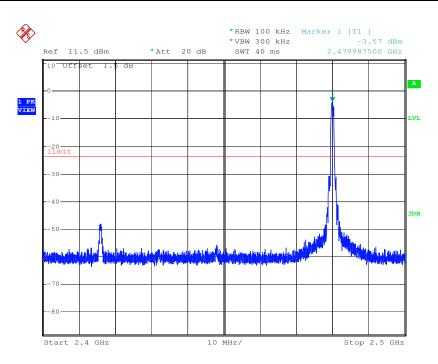


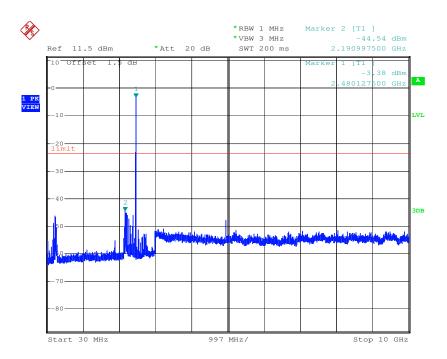



Report No.: SZEM160300114601

Page: 27 of 43

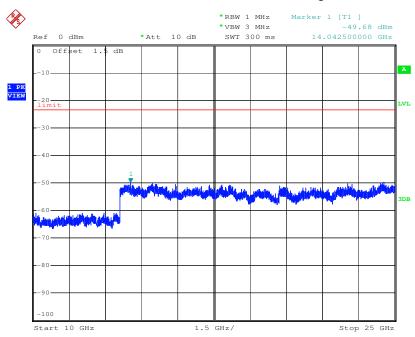

#### Remark:

Use 100kHz RBW to determine the relative limit in the band 2.4GHz to 2.5GHz, and Use 1MHz RBW to measure spurious emissions in the band 30MHz to 10GHz and 10GHz to 25GHz. The sweep points set to 30001.



Report No.: SZEM160300114601

Page: 28 of 43

#### 6.7 Radiated Spurious Emission


6.7.1 Spurious Emiss	sions									
Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205									
Test Method:	ANSI C63.10 2013									
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)									
		Measurement Distance: 10m (Semi-Anechoic Chamber) Measurement Distance: 3m (Full-Anechoic Chamber)								
Receiver Setup:	Frequency		Detector	RBW	VBW	Remark				
	0.009MHz-0.090MH	z	Peak	10kHz	z 30kHz	Peak				
	0.009MHz-0.090MH	z	Average	10kHz	z 30kHz	Average				
	0.090MHz-0.110MH	Z	Quasi-peak	10kHz	z 30kHz	Quasi-peak				
	0.110MHz-0.490MH	z	Peak	10kHz	30kHz	Peak				
	0.110MHz-0.490MH	z	Average	10kHz	30kHz	Average				
	0.490MHz -30MHz		Quasi-peak	10kHz	30kHz	Quasi-peak				
	30MHz-1GHz		Quasi-peak	100 kH	lz 300kHz	Quasi-peak				
	Above 1GHz		Peak	1MHz	: 3MHz	Peak				
	Above rariz		Peak	1MHz	10Hz	Average				
Limit:	Frequency		eld strength crovolt/meter)	Limit (dBuV/m)	Remark	Measuremen distance (m)				
	0.009MHz-0.490MHz	2	400/F(kHz)	-	-	300				
	0.490MHz-1.705MHz	24	1000/F(kHz)	-	-	30				
	1.705MHz-30MHz		30	-	-	30				
	30MHz-88MHz		29.9	40.0	Quasi-peak	3				
	88MHz-216MHz		44.7	43.5	Quasi-peak	3				
	216MHz-960MHz		60.3	46.0	Quasi-peak	3				
	960MHz-1GHz		100	54.0	Quasi-peak	3				
	Above 1GHz		500	54.0	Average	3				
	Note: 15.35(b), frequency emissions is limit applicable to the epeak emission level race	20c quip	B above the oment under to	maximum est. This p	permitted ave	erage emission				



Report No.: SZEM160300114601

Page: 29 of 43

#### Test Setup:

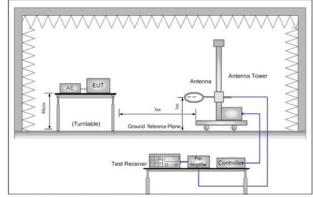

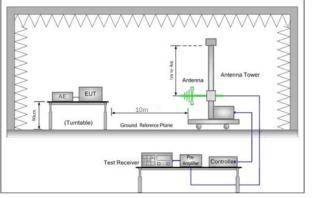


Figure 1. Below 30MHz

Figure 2. 30MHz to 1GHz

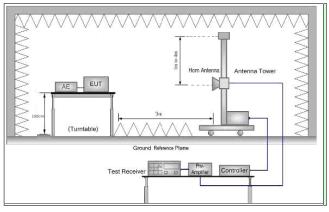


Figure 3. Above 1 GHz

#### Test Procedure:

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 and 10 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter full-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 10dB lower than the



Report No.: SZEM160300114601

Page: 30 of 43

	limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.  h. Test the EUT in the lowest channel (2402MHz),the middle channel (2440MHz),the Highest channel (2480MHz)  i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.  j. Repeat above procedures until all frequencies measured was complete.
Exploratory Test Mode:	Transmitting with GFSK modulation.  Transmitting mode
Final Test Mode:	Transmitting with GFSK modulation.
	Transmitting mode
	For below 1GHz part, through pre-scan, the worst case is the lowest channel.
	Only the worst case is recorded in the report.
Instruments Used:	Refer to section 5.10 for details.
Test Results:	Pass



Report No.: SZEM160300114601

Page: 31 of 43

#### Radiated Emission below 1GHz

30MHz~1GHz (QP)

The test was performed at a 10m test site. According to below formulate and the test data at 10m test distance,

 $L_3 / L_{10} = D_{10} / D_3$ 

Note:

 $L_3$ : Level @ 3m distance. Unit: uV/m;  $L_{10}$ : Level @ 10m distance. Unit: uV/m;

D<sub>3</sub>: 3m distance. Unit: m D<sub>10</sub>: 10m distance. Unit: m

The level at 3m test distance is below:

Frequency (MHz)	Level @ 10m (dBuV/m)	Level @ 10m (uV/m)	Level @ 3m (uV/m)	Level @ 3m (dBuV/m)	Limit @ 3m (dBuV/m)	Margin (dB)	Ant. Polarization
36.51	12.52	4.23	14.09	22.98	40.00	-17.02	V
150.54	13.72	4.85	16.18	24.18	43.50	-19.32	V
396.24	16.5	6.68	22.28	26.96	46.00	-19.04	V
580.70	20.69	10.83	36.09	31.15	46.00	-14.85	V
771.45	24.39	16.58	55.26	34.85	46.00	-11.15	V
916.07	26.95	22.26	74.20	37.41	46.00	-8.59	V
58.41	12.94	4.44	14.79	23.40	40.00	-16.60	Н
154.82	14.21	5.13	17.12	24.67	43.50	-18.83	Н
365.54	15.61	6.03	20.11	26.07	46.00	-19.93	Н
513.63	19.547	9.49	31.64	30.00	46.00	-16.00	Н
704.23	23.23	14.50	48.35	33.69	46.00	-12.31	Н
919.29	25.68	19.23	64.10	36.14	46.00	-9.86	Н


<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM160300114601

Page: 32 of 43

Test mode:	Transmitting mode	Vertical

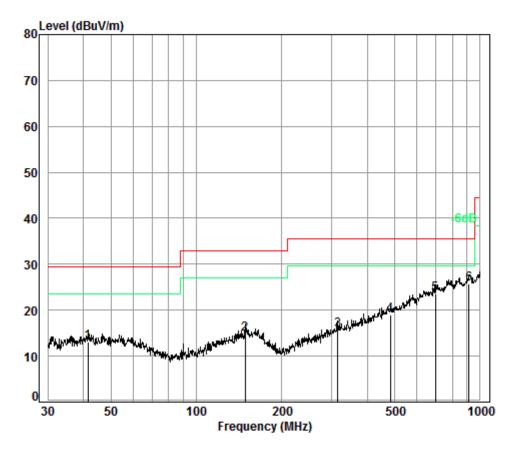

Condition: 10m Vertical

Job No. : 1146CR

Test Mode: TX


		Cable	Ant	Preamp	Read		Limit	0ver
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit
-	MU-						dD: 3// /m	
	MHz	dB	ub/m	dB	abuv	abuv/m	dBuV/m	dB
1	41.57	6.80	13.18	32.99	26.20	13.19	29.50	-16.31
2	148.44	7.44	13.31	32.74	26.91	14.92	33.00	-18.08
3	315.48	8.09	13.11	32.60	27.10	15.70	35.60	-19.90
4	483.91	8.52	16.57	32.60	26.50	18.99	35.60	-16.61
5	696.86	9.14	20.08	32.60	26.92	23.54	35.60	-12.06
6 pp	912.86	9.50	22.40	32.50	26.28	25.68	35.60	-9.92



Report No.: SZEM160300114601

Page: 33 of 43

Test mode:	Transmitting mode	Horizontal
------------	-------------------	------------

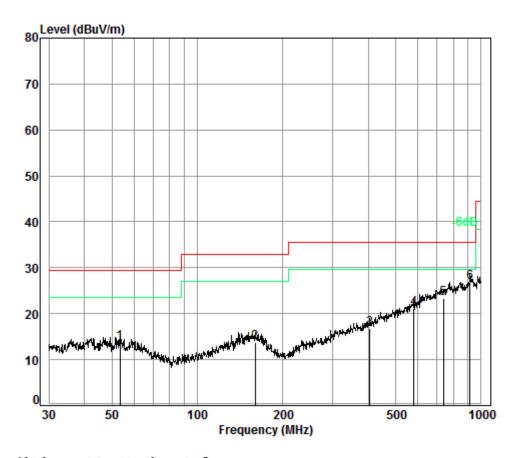

Condition: 10m Horizontal

Job No. : 1146CR

Test Mode: TX

		Cable	Ant	Preamp	Read		Limit	0ver
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	53.51	6.97	12.49	32.98	27.25	13.73	29.50	-15.77
2	159.78	7.50	13.39	32.73	25.68	13.84	33.00	-19.16
3	406.09	8.32	15.03	32.60	26.11	16.86	35.60	-18.74
4	578.67	8.85	18.26	32.60	26.53	21.04	35.60	-14.56
5	737.07	9.20	20.61	32.60	26.12	23.33	35.60	-12.27
6 pp	912.86	9.50	22.40	32.50	27.47	26.87	35.60	-8.73



Report No.: SZEM160300114601

Page: 34 of 43

Transmitter Emission above 1GHz										
Test mode:		GFSK	-	Test	channel:	Lowest		Rema	ırk:	Peak
Frequency (MHz)	Antenn factors (dB/m	Loss	Prea Fac (dE	tor	Read Level (dBuV)	Level (dBuV/m)		t Line ıV/m)	Over Limit (dB)	Polarization
3737.975	32.66	7.72	38.4	46	44.51	46.43	7	<b>'</b> 4	-27.57	Vertical
4804.000	34.10	8.87	38.7	75	49.75	53.97	7	<b>'</b> 4	-20.03	Vertical
5744.707	34.23	9.84	38.9	92	46.47	51.62	7	<b>'</b> 4	-22.38	Vertical
7206.000	35.60	10.68	37.6	64	41.30	49.94	7	<b>'</b> 4	-24.06	Vertical
9608.000	37.10	12.50	36.3	35	35.42	48.67	7	<b>'</b> 4	-25.33	Vertical
11757.650	37.50	14.30	36.9	94	38.50	53.36	7	<b>'</b> 4	-20.64	Vertical
3668.321	32.38	7.69	38.4	43	44.36	46.00	7	<b>'</b> 4	-28.00	Horizontal
4804.000	34.10	8.87	38.7	75	48.86	53.08	7	<b>'</b> 4	-20.92	Horizontal
5956.314	34.59	10.44	38.9	95	44.40	50.48	7	<b>'</b> 4	-23.52	Horizontal
7206.000	35.60	10.68	37.6	64	41.25	49.89	7	<b>'</b> 4	-24.11	Horizontal
9608.000	37.10	12.50	36.3	35	35.37	48.62	7	<b>'</b> 4	-25.38	Horizontal
11774.670	37.50	14.32	36.9	95	38.41	53.28	7	<b>'</b> 4	-20.72	Horizontal

Test mode:	st mode: GFSK		Tes	Test channel:		Rem	nark:	Peak
Frequency (MHz)	Antenna factors (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
3522.674	31.99	7.64	38.37	44.70	45.96	74	-28.04	Vertical
4880.000	34.18	8.97	38.76	48.73	53.12	74	-20.88	Vertical
5956.314	34.59	10.44	38.95	44.52	50.60	74	-23.40	Vertical
7320.000	35.54	10.72	37.59	40.78	49.45	74	-24.55	Vertical
9760.000	37.10	12.58	36.14	40.12	53.66	74	-20.34	Vertical
12120.390	37.66	14.46	37.29	38.18	53.01	74	-20.99	Vertical
3663.017	32.36	7.69	38.43	44.16	45.78	74	-28.22	Horizontal
4880.000	34.18	8.97	38.76	46.97	51.36	74	-22.64	Horizontal
5930.516	34.53	10.37	38.95	43.11	49.06	74	-24.94	Horizontal
7320.000	35.54	10.72	37.59	40.66	49.33	74	-24.67	Horizontal
9760.000	37.10	12.58	36.14	39.15	52.69	74	-21.31	Horizontal
11998.250	37.60	14.56	37.17	38.68	53.67	74	-20.33	Horizontal



Report No.: SZEM160300114601

Page: 35 of 43

Test mode:		GFSK		st channel:	Highest	Rem	ark:	Peak
Frequency (MHz)	Antenna factors (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
3641.878	32.27	7.68	38.42	45.93	47.46	74	-26.54	Vertical
4960.000	34.26	9.09	38.78	47.10	51.67	74	-22.33	Vertical
6175.716	34.79	10.33	38.73	45.64	52.03	74	-21.97	Vertical
7440.000	35.60	10.77	37.54	41.75	50.58	74	-23.42	Vertical
9920.000	37.22	12.67	35.93	38.11	52.07	74	-21.93	Vertical
11757.650	37.50	14.30	36.94	38.16	53.02	74	-20.98	Vertical
3748.808	32.70	7.72	38.47	44.83	46.78	74	-27.22	Horizontal
4960.000	34.26	9.09	38.78	45.71	50.28	74	-23.72	Horizontal
6393.941	34.80	10.06	38.45	45.54	51.95	74	-22.05	Horizontal
7440.000	35.60	10.77	37.54	37.36	46.19	74	-27.81	Horizontal
9920.000	37.22	12.67	35.93	37.89	51.85	74	-22.15	Horizontal
11757.650	37.50	14.30	36.94	38.98	53.84	74	-20.16	Horizontal

#### Remark:

- 1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
  - Final Test Level = Receiver Reading + Antenna Factor + Cable Factor Preamplifier Factor
- 2) Scan from 9kHz to 25GHz, the disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
- 3) As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak measurements were shown in the report.




Report No.: SZEM160300114601

Page: 36 of 43

#### 6.8 Restricted bands around fundamental frequency

Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205								
Test Method:	ANSI C63.10 2013								
Test Site:		Measurement Distance: 3m (Semi-Anechoic Chamber) Measurement Distance: 3m (Full-Anechoic Chamber)							
Limit:	Frequency	Limit (dBuV/m @3m)	Remark						
	30MHz-88MHz	40.0	Quasi-peak Value						
	88MHz-216MHz	43.5	Quasi-peak Value						
	216MHz-960MHz	Quasi-peak Value							
	960MHz-1GHz 54.0 Quasi-peak Val								
	Above 1GHz	Average Value							
	Above IGHZ	74.0	Peak Value						
Test Setup:									

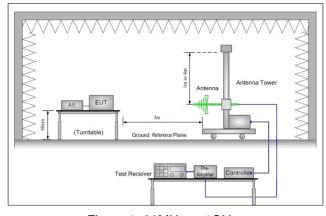

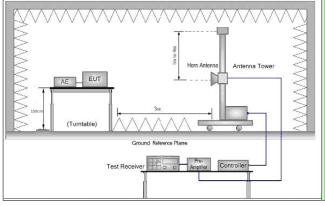


Figure 1. 30MHz to 1GHz

Figure 2. Above 1 GHz

#### Test Procedure:

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter full-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and



Report No.: SZEM160300114601

Page: 37 of 43

	<ul> <li>modulation for lowest and highest channel</li> <li>h. Test the EUT in the lowest channel , the Highest channel</li> <li>i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.</li> <li>j. Repeat above procedures until all frequencies measured was complete.</li> </ul>
Exploratory Test Mode:	Transmitting with GFSK modulation.
	Transmitting mode
Final Test Mode:	Transmitting with GFSK modulation.
	Transmitting mode
	Only the worst case is recorded in the report.
Instruments Used:	Refer to section 5.10 for details.
Test Results:	Pass




Report No.: SZEM160300114601

Page: 38 of 43

Test plot as follows:

Test mode: GFSK Test channel: Lowest Remark: Peak Vertical

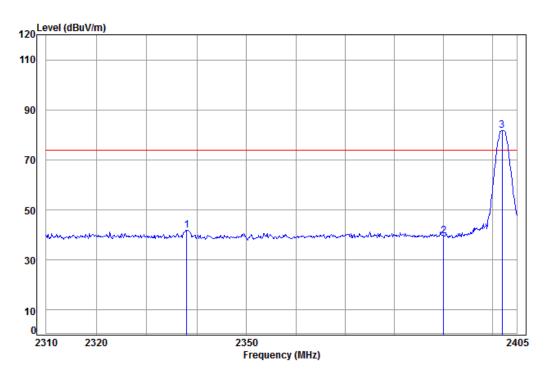

Condition: 3m Vertical Job No: : 1146CR

Mode: : 2402 Band edge

: BLE

1


Cable Ant Preamp Read Limit 0ver Freq Loss Factor Factor Limit Level Level Line MHz dB dB dBuV dBuV/m dBuV/m dB dB/m 2338.01 5.30 28.42 38.11 46.37 41.98 74.00 -32.02 2390.00 5.34 28.57 38.11 43.89 39.69 74.00 -34.31 2402.00 28.61 38.11 85.99 81.84



Report No.: SZEM160300114601

Page: 39 of 43

Test mode:	GFSK	Test channel:	Lowest	Remark:	Peak	Horizontal
------------	------	---------------	--------	---------	------	------------

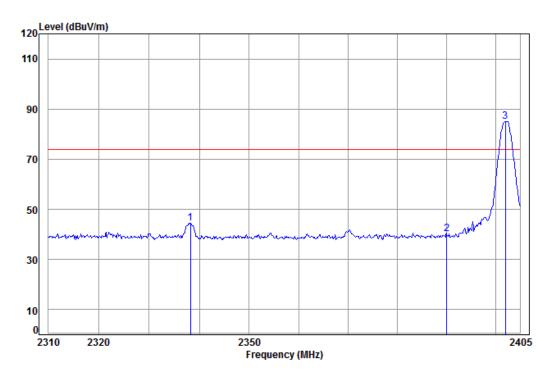

Condition: 3m Horizontal

Job No: : 1146CR

Mode: : 2402 Band edge

: BLE


		Cable	Ant	Preamp	Read		Limit	0ver
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
		45	u.,		454.	usur,	ubur,	
1	2338.19	5.30	28.42	38.11	48.91	44.52	74.00	-29.48
2	2390.00	5.34	28.57	38.11	44.32	40.12	74.00	-33.88
3 рр	2402.00	5.35	28.61	38.11	89.09	84.94	74.00	10.94



Report No.: SZEM160300114601

Page: 40 of 43

Test mode:	GFSK	Test channel:	Highest	Remark:	Peak	Vertical
	J., J.,					

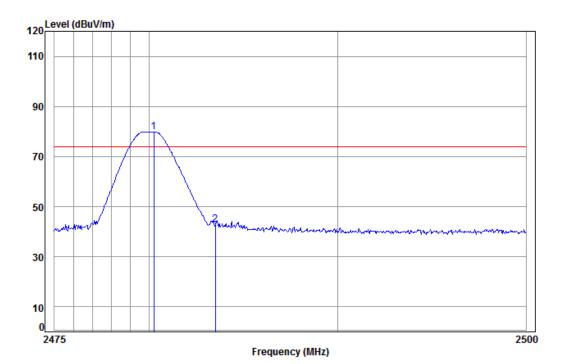

Condition: 3m Vertical Job No: : 1146CR

Mode: : 2480 Band edge

: BLE


Cable Ant Preamp Read Limit 0ver Freq Loss Factor Factor Level Level Line Limit MHz dB dB/m dBuV dBuV/m dBuV/m dB 2480.25 5.41 28.97 38.12 83.67 79.93 74.00 5.93 2483.50 5.41 28.98 38.12 46.50 42.77 74.00 -31.23



Report No.: SZEM160300114601

Page: 41 of 43

Test mode:	GFSK	Test channel:	Highest	Remark:	Peak	Horizontal
Tool Illoud.	ai oit	1 Cot onamici.	riigiicat	i tomant.	1 Car	Horizontai

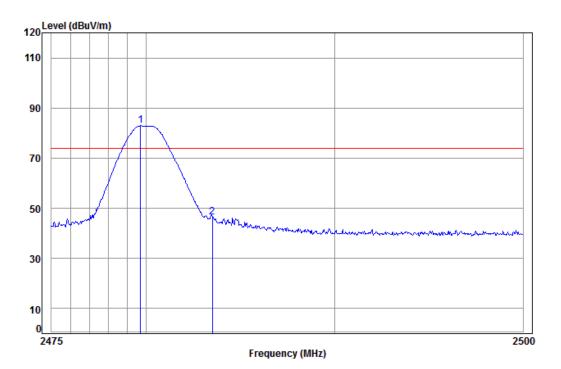

Condition: 3m Horizontal

Job No: : 1146CR

Mode: : 2480 Band edge

: BLE

	Freq			Preamp Factor				
-	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 pp	2479.71							
2	2483.50	5.41	28.98	38.12	50.28	46.55	/4.00	-27.45

#### Note:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level =Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor



Report No.: SZEM160300114601

Page: 42 of 43


### 7 Photographs - EUT Test Setup

Test model No.: BUZCONBT

#### 7.1 Radiated Emission



### 7.2 Radiated Spurious Emission

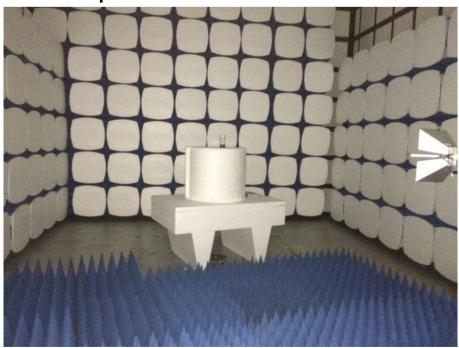



Report No.: SZEM160300114601

Page: 43 of 43

### 8 Photographs - EUT Constructional Details

Refer to Appendix A - Photographs of EUT Constructional Details for SZEM1603001146CR.