

FCC RADIO TEST REPORT

FCC ID : 2AA7Y-MOSHIQI001

Equipment : Otto Q wireless charging pad

Brand Name : moshi

Model Name : otto Q

Applicant : Aevoe Inc.
27F., NO.68, Sec. 5, Zhongxiao E. Rd., Xinyi Dist.,
Taipei City 11065, Taiwan

Manufacturer : Powergene Technology Co., Ltd. Taiwan Branch
1F-5, No.1, Wuquan 1st Rd., Xinzhuang Dist.,
New Taipei City, Taiwan

Standard : 47 CFR FCC Part 15.209

The product was received on Jun. 29, 2018, and testing was started from Jul. 27, 2018 and completed on Aug. 03, 2018. We, SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2013 and shown compliance with the applicable technical standards.

The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any agency of government.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.



Approved by: Allen Lin

SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)



Table of Contents

1 GENERAL DESCRIPTION5

1.1 Information.....5

1.2 Testing Applied Standards6

1.3 Testing Location Information6

1.4 Measurement Uncertainty6

2 TEST CONFIGURATION OF EUT.....7

2.1 The Worst Case Configuration7

2.2 The Worst Charger Frequencies Configuration7

2.3 The Worst Case Measurement Configuration7

2.4 Accessories and Support Equipment8

2.5 Test Setup Diagram9

3 TRANSMITTER TEST RESULT10

3.1 AC Power-line Conducted Emissions10

3.2 Transmitter Radiated Emissions14

3.3 Emission Bandwidth22

4 TEST EQUIPMENT AND CALIBRATION DATA.....24

APPENDIX A. TEST PHOTOS

PHOTOGRAPHS OF EUT v01



History of this test report

Report No.	Version	Description	Issued Date
FR862906AW	01	Initial issue of report	Aug. 16, 2018



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
1.1.2	15.203	Antenna Requirement	PASS	-
3.1	15.207	AC Power-line Conducted Emissions	PASS	-
3.2	15.209	Transmitter Radiated Emissions	PASS	-
3.3	15.215(c)	Emission Bandwidth	PASS	-

Reviewed by: Sam Tsai

Report Producer: Amber Chiu



1 General Description

1.1 Information

1.1.1 General Information

Wireless Power Transfer General Information			
Frequency Range	Modulation	Charging Freq. (kHz)	Field Strength (dBuV/m)
110-145 kHz	ASK	127.5	66.00
Power Transfer Method	Output power from each primary coil	That may have multiple primary coils	Charging Method
Magnetic induction and only single primary coil coupling secondary coil	<15W	No	Client directly contact

Note 1: Field strength performed peak level at 3m.

1.1.2 Antenna Information

Antenna Category	
<input type="checkbox"/>	Equipment placed on the market without antennas
<input checked="" type="checkbox"/>	Integral antenna (antenna permanently attached)
<input type="checkbox"/>	External antenna (dedicated antennas)

1.1.3 Type of EUT

Type of EUT	
<input checked="" type="checkbox"/>	Stand-alone
<input type="checkbox"/>	Combined (EUT where the radio part is fully integrated within another device)
	Combined Equipment - Brand Name / Model No.:
<input type="checkbox"/>	Plug-in radio (EUT intended for a variety of host systems)
	Host System - Brand Name / Model No.:
<input type="checkbox"/>	Other: The EUT place with the platform.

1.1.4 Test Signal Duty Cycle

Operated Mode for Worst Duty Cycle	
<input type="checkbox"/>	Operated normally mode for worst duty cycle
<input checked="" type="checkbox"/>	Operated test mode for worst duty cycle
Test Signal Duty Cycle (x)	
<input checked="" type="checkbox"/>	100%

1.1.5 EUT Operational Condition

Supply Voltage	<input checked="" type="checkbox"/> AC mains	<input type="checkbox"/> DC	
Type of DC Source	<input type="checkbox"/> Internal DC supply	<input checked="" type="checkbox"/> External AC adapter	<input type="checkbox"/> From System

1.2 Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ◆ 47 CFR FCC Part 15
- ◆ ANSI C63.10-2013
- ◆ KDB 680106 D01 RF Exposure Wireless Charging Apps v03

1.3 Testing Location Information

Testing Location		
<input checked="" type="checkbox"/>	HWA YA	ADD : No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL : 886-3-327-3456 FAX : 886-3-327-0973
Test site Designation No. TW1190 with FCC.		
<input type="checkbox"/>	JHUBEI	ADD : No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County, Taiwan (R.O.C.) TEL : 886-3-656-9065 FAX : 886-3-656-9085
Test site Designation No. TW0006 with FCC.		

Test Condition	Test Site No.	Test Engineer	Test Environment	Test Date
AC Conduction	CO04-HY	Jeff	24.2°C/56%	03/Aug/2018
RF Conducted	TH01-HY	Randy	22.5°C/61.5%	27/Jul/2018
Radiated Emission	03CH02-HY	Daniel	23.8°C /53.6%	31/Jul/2018

1.4 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Measurement Uncertainty			
Test Item		Uncertainty	Limit
Radio Frequency		$\pm 6.7 \times 10^{-8}$	$\pm 1 \times 10^{-7}$
All emissions, radiated	9 – 150 kHz	± 2.5 dB	± 6 dB
	0.15 – 30 MHz	± 2.3 dB	± 6 dB
	30 – 1000 MHz	± 2.6 dB	± 6 dB
Temperature		± 0.8 °C	± 1 °C
Humidity		± 5 %	± 5 %
DC and low frequency voltages		± 0.9 %	± 3 %

2 Test Configuration of EUT

2.1 The Worst Case Configuration


Modulation Mode	Field Strength (dBuV/m at 3m)
ASK	66.00
Wireless charger were performed all charging conditions including variable loading and non-charging operation, the worst mode is full charging loading.	

2.2 The Worst Charger Frequencies Configuration

Modulation Mode	Charger Frequencies (kHz)
ASK	127.5 kHz
Wireless charger frequencies are variable frequency range (110-145 kHz) and depend on charging loading. The charging frequency is 127.5 kHz.	

2.3 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests	
Tests Item	AC power-line conducted emissions
Condition	AC power-line conducted measurement for line and neutral Test Voltage: 110Vac / 60Hz
Operating Mode	Operating Mode Description
1	Adapter mode

The Worst Case Mode for Following Conformance Tests	
Tests Item	Transmitter Radiated Emissions, Emission Bandwidth
Test Condition	Radiated measurement
User Position	<input type="checkbox"/> EUT will be placed in fixed position. <input checked="" type="checkbox"/> EUT will be placed in mobile position and operating multiple positions. <input type="checkbox"/> EUT will be a hand-held or body-worn battery-powered devices and operating multiple positions.
Operating Mode < 1GHz	<input checked="" type="checkbox"/> 1. Adapter mode
Modulation Mode	ASK
Orthogonal Planes of EUT	Z Plane 
Worst Planes of EUT	V

2.4 Accessories and Support Equipment

Accessories Information				
USB Cable	Brand Name	moshi	Model Name	1700000237
	Power Rating	1 meter, Shielded cable, without ferrite core		



Note: Regarding to more detail and other information, please refer to user manual.

Support Equipment – AC Conduction				
No.	Equipment	Brand Name	Model Name	FCC ID
1	Mobile phone	APPLE	iPhone 8	-
2	AC adapter	Apple	A1305	-

Support Equipment – Conducted				
No.	Equipment	Brand Name	Model Name	FCC ID
1	Notebook	DELL	E5410	R33002 / DOC
2	Adapter for NB	DELL	HA65NM130	R35737 / DOC
3	DC Power Supply	GW	GPS-3030DD	-
4	IPhone	Apple	MRRM2TA/A	-

Support Equipment – Radiated				
No.	Equipment	Brand Name	Model Name	FCC ID
1	Mobile phone	APPLE	iPhone 8	-
2	AC adapter	Apple	A1305	-

2.5 Test Setup Diagram

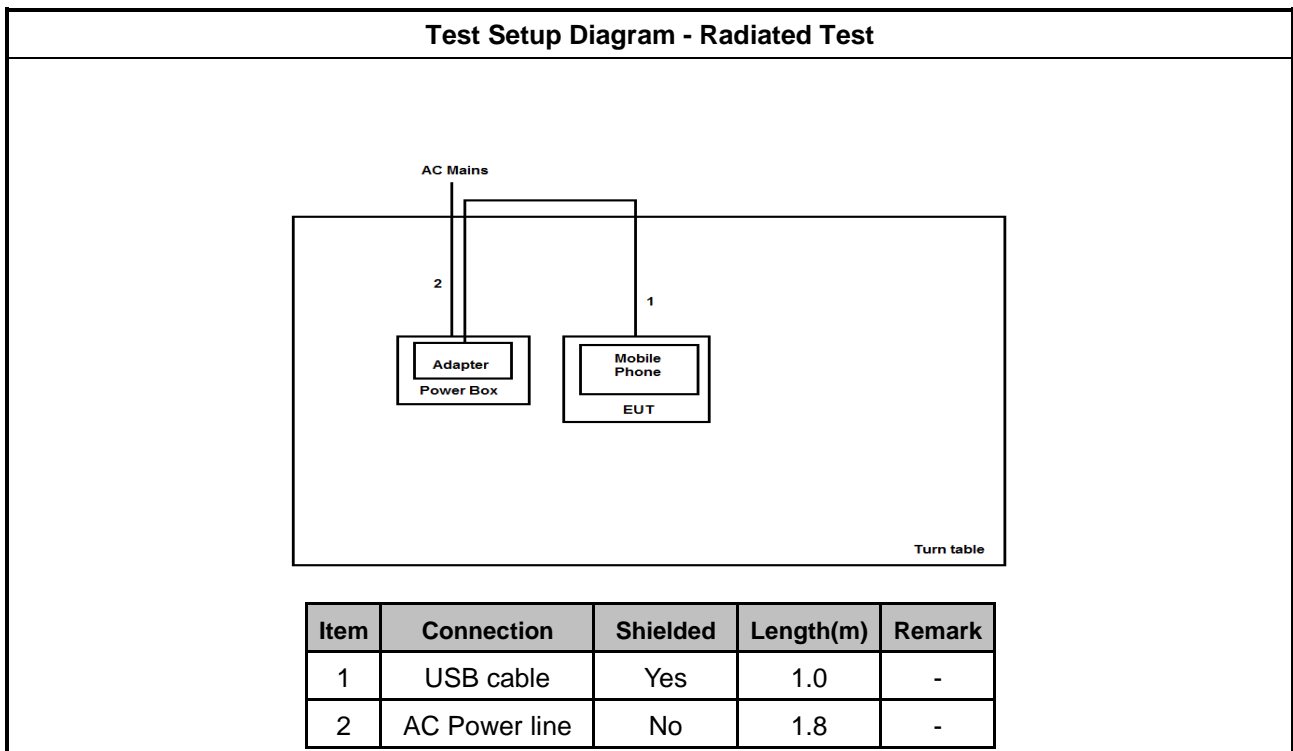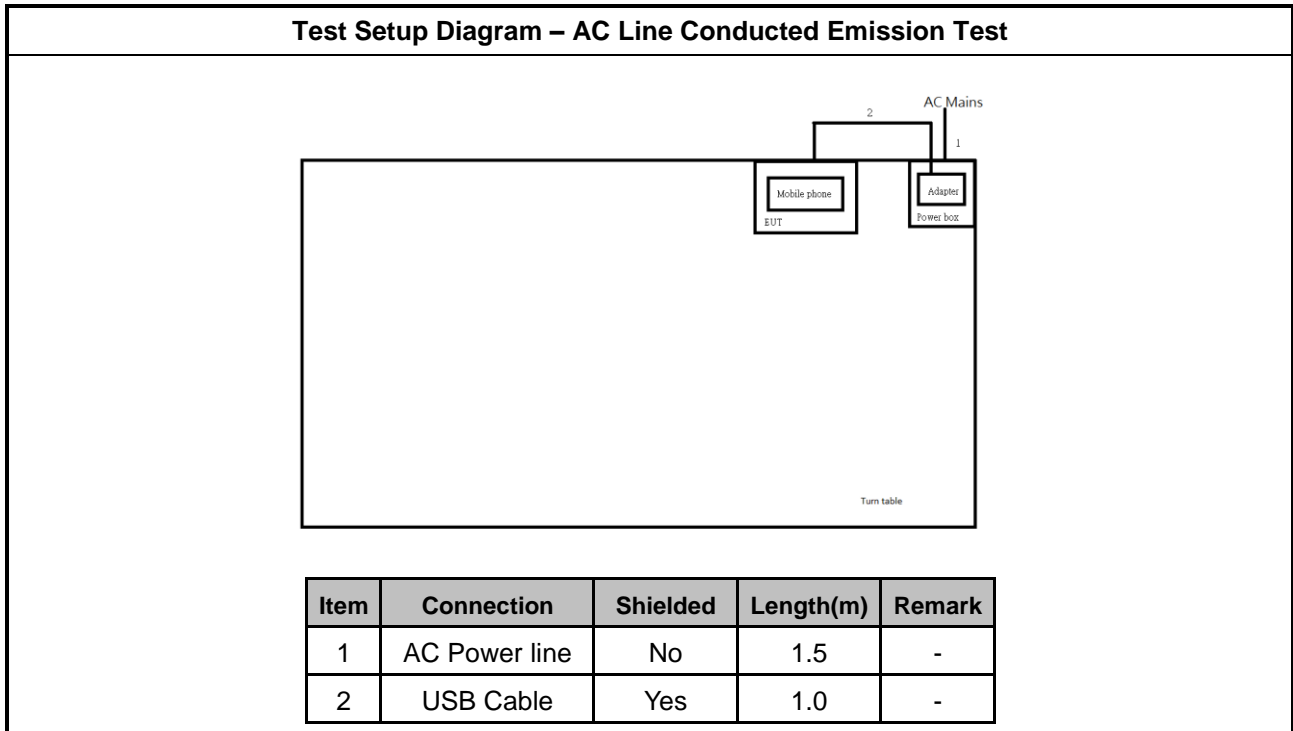



3 Transmitter Test Result

3.1 AC Power-line Conducted Emissions

3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: * Decreases with the logarithm of the frequency.


3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.1.3 Test Procedures

Test Method	
<input checked="" type="checkbox"/>	Refer as ANSI C63.10-2013, clause 6.2 for AC power-line conducted emissions.
<input checked="" type="checkbox"/>	If AC conducted emissions fall in operating band, then following below test method confirm final result.
<input type="checkbox"/>	Accept measurements done with a suitable dummy load replacing the antenna under the following conditions: (1) Perform the AC line conducted tests with the antenna connected to determine compliance with FCC 15.207 limits outside the transmitter's fundamental emission band; (2) Retest with a dummy load to determine compliance with FCC 15.207 limits within the transmitter's fundamental emission band.
<input checked="" type="checkbox"/>	For a device with a permanent antenna operating at or below 30 MHz, accept measurements done with a suitable dummy load, in lieu of the permanent antenna under the following conditions: (1) Perform the AC line conducted tests with the permanent antenna to determine compliance with the FCC 15.207 limits outside the transmitter's fundamental emission band; (2) Retest with a dummy load in lieu of the permanent antenna to determine compliance with the FCC 15.207 limits within the transmitter's fundamental emission band.

3.1.4 Test Setup

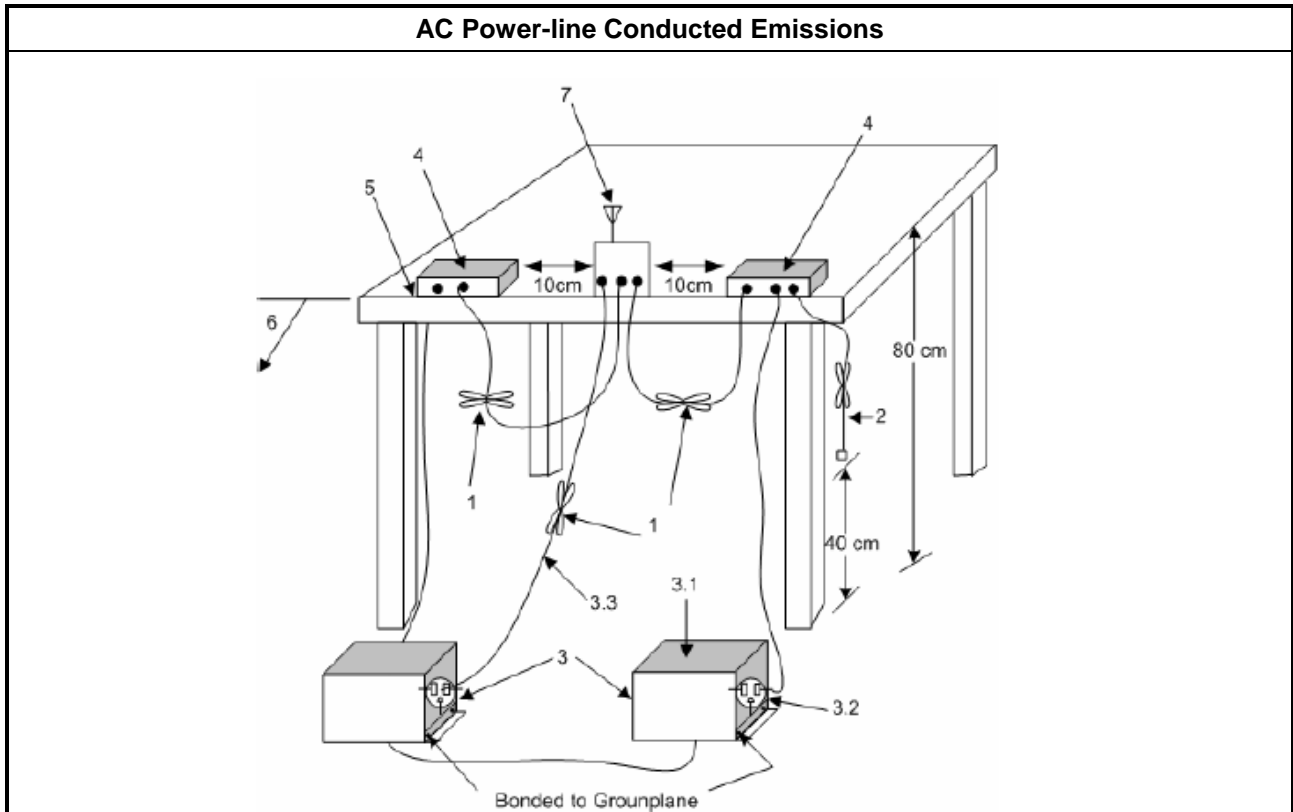




3.1.5 Test Result of AC Power-line Conducted Emissions

AC Power-line Conducted Emissions Result																																																																																																																																	
Operating Mode	1	Power Phase	Neutral																																																																																																																														
Operating Function	Adapter mode																																																																																																																																
<div style="display: flex; justify-content: space-between;"> <div> <p>Level (dBuV)</p> <p style="text-align: right;">Date: 2018-08-03</p> </div> </div>																																																																																																																																	
<table border="1" style="width:100%; border-collapse: collapse;"> <thead> <tr> <th></th> <th>Freq</th> <th>Level</th> <th>Over Limit</th> <th>Limit Line</th> <th>Read Level</th> <th>LISN Factor</th> <th>Cable Loss</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV</th> <th>dB</th> <th>dBuV</th> <th>dBuV</th> <th>dB</th> <th>dB</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>0.16</td> <td>32.35</td> <td>-22.99</td> <td>55.34</td> <td>22.69</td> <td>9.63</td> <td>0.03</td> <td>Average</td> </tr> <tr> <td>2 MAX</td> <td>0.16</td> <td>48.00</td> <td>-17.34</td> <td>65.34</td> <td>38.34</td> <td>9.63</td> <td>0.03</td> <td>QP</td> </tr> <tr> <td>3</td> <td>0.24</td> <td>22.14</td> <td>-29.90</td> <td>52.04</td> <td>12.49</td> <td>9.62</td> <td>0.03</td> <td>Average</td> </tr> <tr> <td>4</td> <td>0.24</td> <td>37.37</td> <td>-24.67</td> <td>62.04</td> <td>27.72</td> <td>9.62</td> <td>0.03</td> <td>QP</td> </tr> <tr> <td>5</td> <td>0.41</td> <td>21.56</td> <td>-26.17</td> <td>47.73</td> <td>11.85</td> <td>9.61</td> <td>0.10</td> <td>Average</td> </tr> <tr> <td>6</td> <td>0.41</td> <td>39.06</td> <td>-18.67</td> <td>57.73</td> <td>29.35</td> <td>9.61</td> <td>0.10</td> <td>QP</td> </tr> <tr> <td>7</td> <td>0.63</td> <td>17.05</td> <td>-28.95</td> <td>46.00</td> <td>7.39</td> <td>9.61</td> <td>0.05</td> <td>Average</td> </tr> <tr> <td>8</td> <td>0.63</td> <td>34.20</td> <td>-21.80</td> <td>56.00</td> <td>24.54</td> <td>9.61</td> <td>0.05</td> <td>QP</td> </tr> <tr> <td>9</td> <td>0.72</td> <td>22.36</td> <td>-23.64</td> <td>46.00</td> <td>12.70</td> <td>9.62</td> <td>0.04</td> <td>Average</td> </tr> <tr> <td>10</td> <td>0.72</td> <td>33.01</td> <td>-22.99</td> <td>56.00</td> <td>23.35</td> <td>9.62</td> <td>0.04</td> <td>QP</td> </tr> <tr> <td>11</td> <td>22.06</td> <td>19.62</td> <td>-30.38</td> <td>50.00</td> <td>9.80</td> <td>9.71</td> <td>0.11</td> <td>Average</td> </tr> <tr> <td>12</td> <td>22.06</td> <td>23.75</td> <td>-36.25</td> <td>60.00</td> <td>13.93</td> <td>9.71</td> <td>0.11</td> <td>QP</td> </tr> </tbody> </table>					Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark		MHz	dBuV	dB	dBuV	dBuV	dB	dB		1	0.16	32.35	-22.99	55.34	22.69	9.63	0.03	Average	2 MAX	0.16	48.00	-17.34	65.34	38.34	9.63	0.03	QP	3	0.24	22.14	-29.90	52.04	12.49	9.62	0.03	Average	4	0.24	37.37	-24.67	62.04	27.72	9.62	0.03	QP	5	0.41	21.56	-26.17	47.73	11.85	9.61	0.10	Average	6	0.41	39.06	-18.67	57.73	29.35	9.61	0.10	QP	7	0.63	17.05	-28.95	46.00	7.39	9.61	0.05	Average	8	0.63	34.20	-21.80	56.00	24.54	9.61	0.05	QP	9	0.72	22.36	-23.64	46.00	12.70	9.62	0.04	Average	10	0.72	33.01	-22.99	56.00	23.35	9.62	0.04	QP	11	22.06	19.62	-30.38	50.00	9.80	9.71	0.11	Average	12	22.06	23.75	-36.25	60.00	13.93	9.71	0.11	QP
	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark																																																																																																																									
	MHz	dBuV	dB	dBuV	dBuV	dB	dB																																																																																																																										
1	0.16	32.35	-22.99	55.34	22.69	9.63	0.03	Average																																																																																																																									
2 MAX	0.16	48.00	-17.34	65.34	38.34	9.63	0.03	QP																																																																																																																									
3	0.24	22.14	-29.90	52.04	12.49	9.62	0.03	Average																																																																																																																									
4	0.24	37.37	-24.67	62.04	27.72	9.62	0.03	QP																																																																																																																									
5	0.41	21.56	-26.17	47.73	11.85	9.61	0.10	Average																																																																																																																									
6	0.41	39.06	-18.67	57.73	29.35	9.61	0.10	QP																																																																																																																									
7	0.63	17.05	-28.95	46.00	7.39	9.61	0.05	Average																																																																																																																									
8	0.63	34.20	-21.80	56.00	24.54	9.61	0.05	QP																																																																																																																									
9	0.72	22.36	-23.64	46.00	12.70	9.62	0.04	Average																																																																																																																									
10	0.72	33.01	-22.99	56.00	23.35	9.62	0.04	QP																																																																																																																									
11	22.06	19.62	-30.38	50.00	9.80	9.71	0.11	Average																																																																																																																									
12	22.06	23.75	-36.25	60.00	13.93	9.71	0.11	QP																																																																																																																									
<p>Note 1: ">20dB" means emission levels that exceed the level of 20 dB below the applicable limit. Note 2: "N/F" means Nothing Found emissions (No emissions were detected.) Note 3: When emissions are in operating band over limits, retest with a dummy load for final in-band results.</p>																																																																																																																																	

AC Power-line Conducted Emissions Result

Operating Mode	1	Power Phase	Line
Operating Function	Adapter mode		

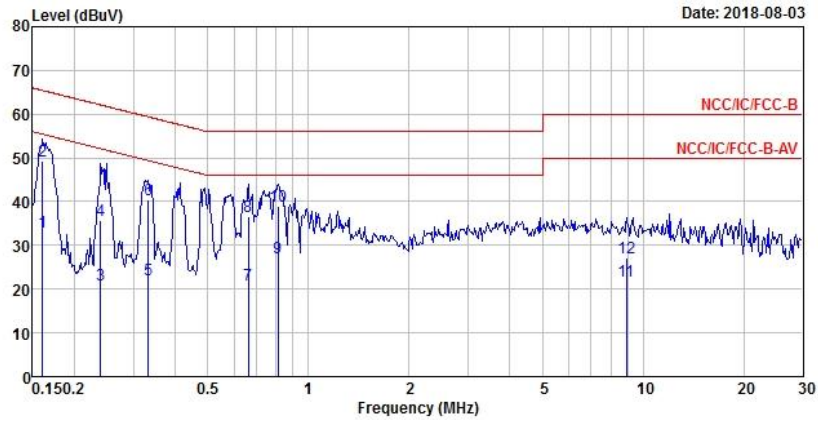

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.16	32.92	-22.51	55.43	23.27	9.62	0.03	Average
2	MAX	49.37	-16.06	65.43	39.72	9.62	0.03	QP
3	0.24	20.92	-31.21	52.13	11.27	9.62	0.03	Average
4	0.24	35.83	-26.30	62.13	26.18	9.62	0.03	QP
5	0.33	22.06	-27.34	49.40	12.38	9.61	0.07	Average
6	0.33	40.50	-18.90	59.40	30.82	9.61	0.07	QP
7	0.66	21.03	-24.97	46.00	11.37	9.61	0.05	Average
8	0.66	36.49	-19.51	56.00	26.83	9.61	0.05	QP
9	0.81	27.03	-18.97	46.00	17.40	9.61	0.02	Average
10	0.81	39.03	-16.97	56.00	29.40	9.61	0.02	QP
11	8.92	21.78	-28.22	50.00	11.93	9.66	0.19	Average
12	8.92	27.06	-32.94	60.00	17.21	9.66	0.19	QP

Note 1: ">20dB" means emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found emissions (No emissions were detected.)
 Note 3: When emissions are in operating band over limits, retest with a dummy load for final in-band results.

3.2 Transmitter Radiated Emissions

3.2.1 Transmitter Radiated Emissions Limit

Transmitter Radiated Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Note 3: the frequency bands 9-90 kHz, 110-490 kHz measurements employing an average detector and other below 1GHz measurements employing a CISPR quasi-peak detector.

3.2.2 Measuring Instruments



Refer a test equipment and calibration data table in this test report.



3.2.3 Test Procedures


Test Method	
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.5 for radiated emissions from 30 MHz to 1 GHz and test distance is 3m.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.4 for radiated emissions from below 30 MHz the frequency bands 110-145 kHz measurements employing an average detector and other below 30MHz measurements employing a CISPR quasi-peak detector. Test distance is 3m.
<input checked="" type="checkbox"/>	At frequencies below 30 MHz, measurements may be performed at a distance closer than that specified in the requirements; however, an attempt should be made to avoid making measurements in the near field. Pending the development of an appropriate measurement procedure for measurements performed below 30 MHz, when performing measurements at a closer distance than specified, the results shall be following below methods.
<input type="checkbox"/>	The results shall be extrapolated to the specified distance by making measurements at a minimum of two distances on at least one radial to determine the proper extrapolation factor.
<input checked="" type="checkbox"/>	The results shall be by using the square of an inverse linear distance extrapolation factor (40 dB/decade).
<input checked="" type="checkbox"/>	For radiated measurement. Loop antenna was rotated about the horizontal and vertical axis and the equipment to be measured and the test antenna shall be oriented to obtain the maximum emitted field strength level.
<input checked="" type="checkbox"/>	The any unwanted emissions level shall not exceed the fundamental emission level.
<input checked="" type="checkbox"/>	All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

3.2.4 Test Setup

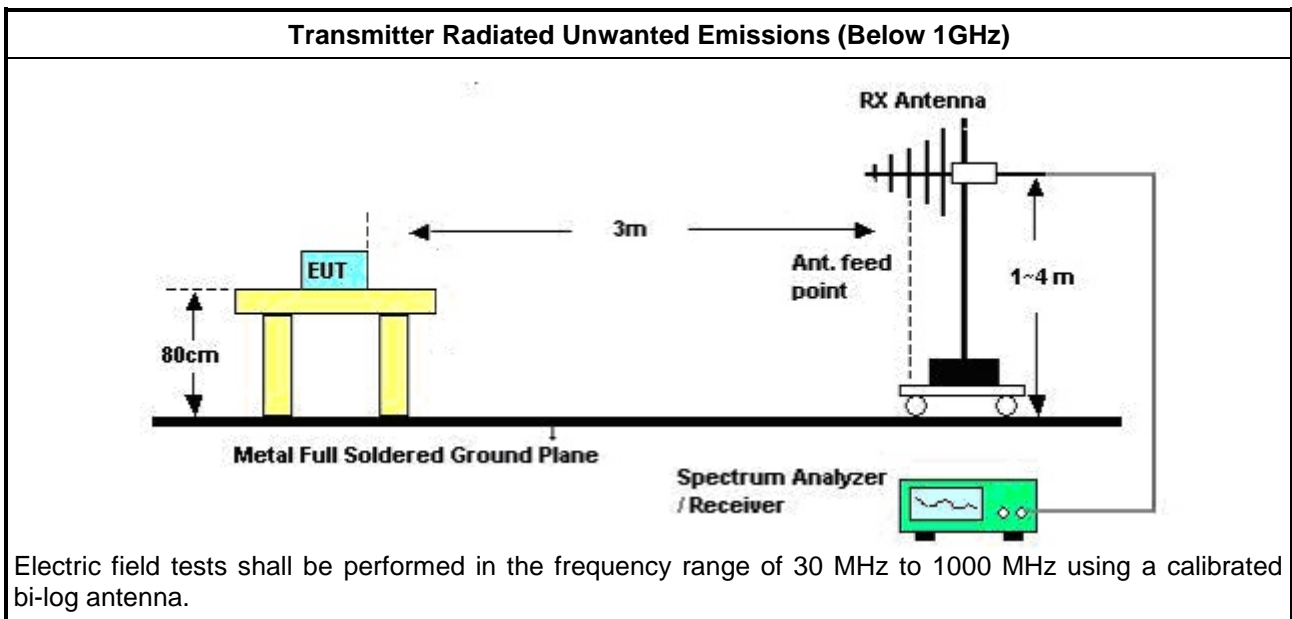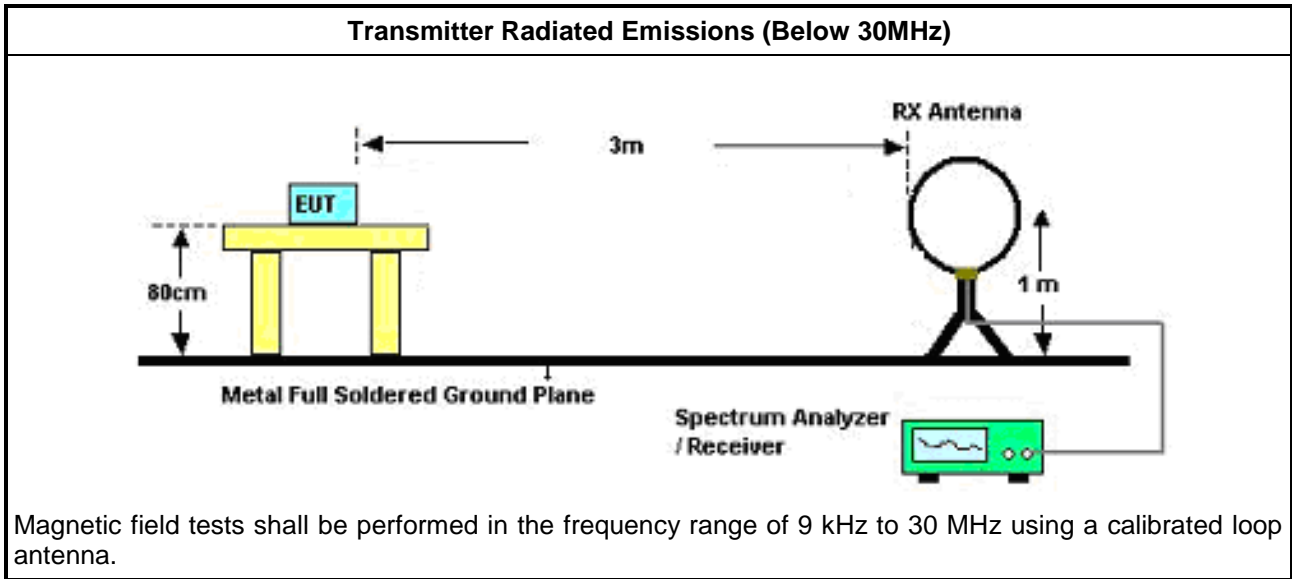




3.2.5 Transmitter Radiated Emissions (Below 30MHz)

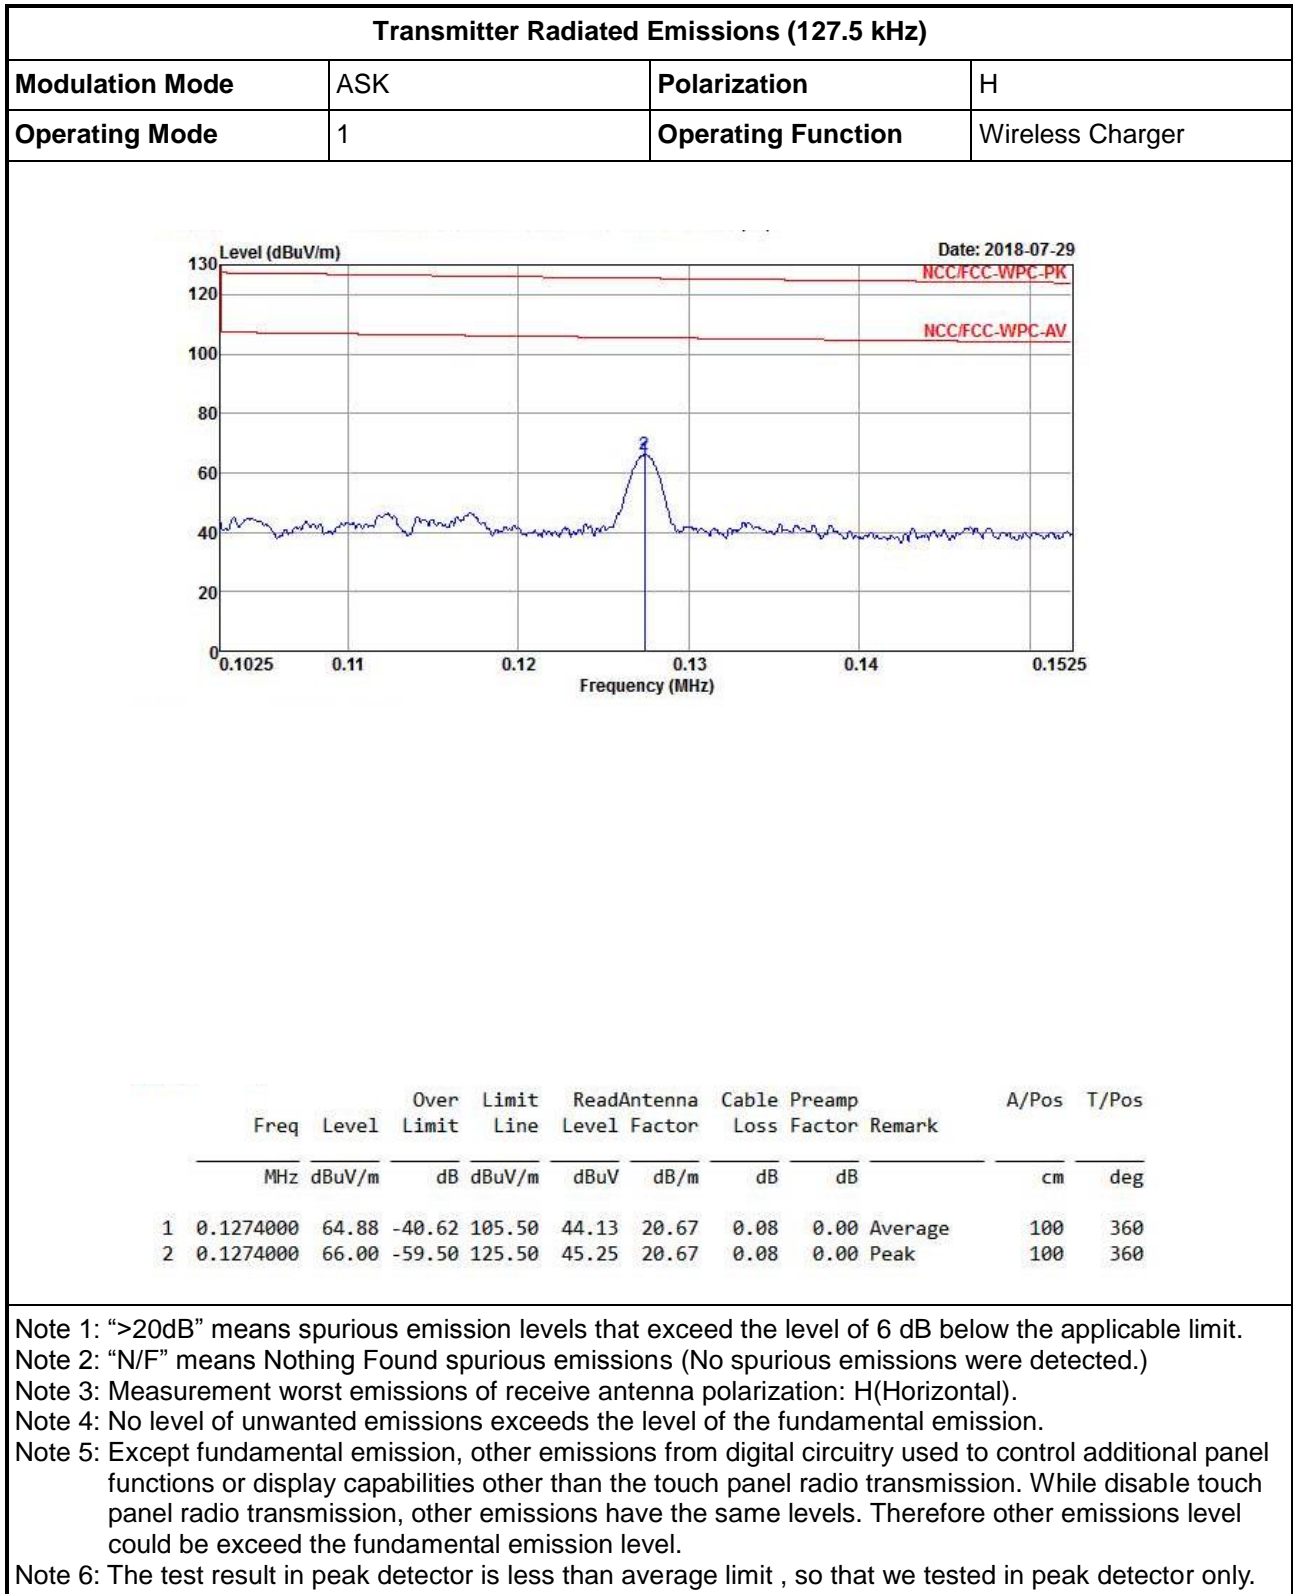

Transmitter Radiated Emissions (9 kHz – 150 kHz)

Modulation Mode	ASK	Polarization	H
Operating Mode	1	Operating Function	Wireless Charger

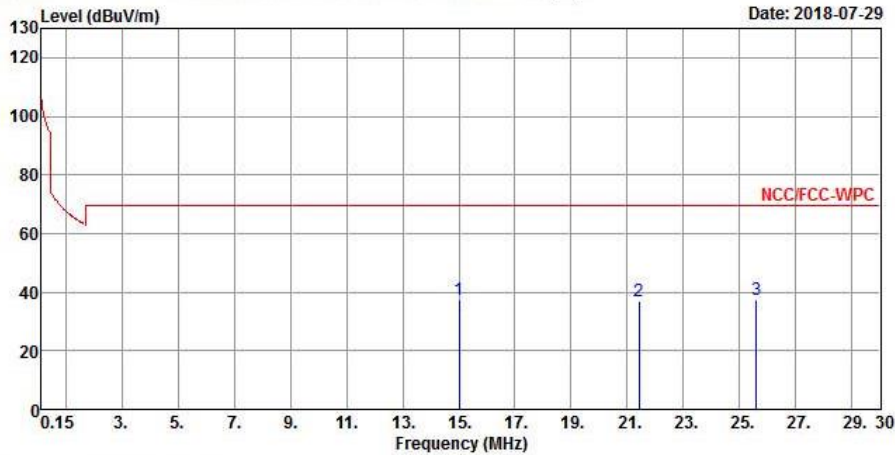


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	15.015300	37.33	-32.21	69.54	14.84	21.95	0.54	0.00	Peak	100	360
2	21.403200	37.16	-32.38	69.54	14.09	22.44	0.63	0.00	Peak	100	360
3	25.582200	37.52	-32.02	69.54	14.31	22.57	0.64	0.00	Peak	100	360

Note 1: ">20dB" means spurious emission levels that exceed the level of 6 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement worst emissions of receive antenna polarization: H(Horizontal).
 Note 4: No level of unwanted emissions exceeds the level of the fundamental emission.
 Note 5: Except fundamental emission, other emissions from digital circuitry used to control additional panel functions or display capabilities other than the touch panel radio transmission. While disable touch panel radio transmission, other emissions have the same levels. Therefore other emissions level could be exceed the fundamental emission level.

Transmitter Radiated Emissions (150 kHz – 30 MHz)

Modulation Mode	ASK	Polarization	H
Operating Mode	1	Operating Function	Wireless Charger

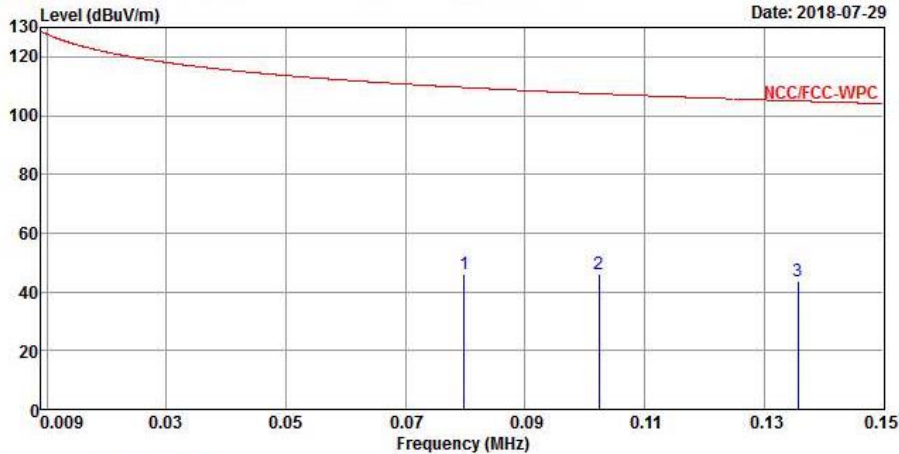


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	0.0797820	46.01	-63.56	109.57	25.08	20.86	0.07	0.00	Peak	100	0
2	0.1023420	46.02	-61.39	107.41	25.25	20.70	0.07	0.00	Peak	100	0
3	0.1356180	43.47	-61.49	104.96	22.73	20.66	0.08	0.00	Peak	100	0

Note 1: ">20dB" means spurious emission levels that exceed the level of 6 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement worst emissions of receive antenna polarization: H(Horizontal).
 Note 4: No level of unwanted emissions exceeds the level of the fundamental emission.
 Note 5: Except fundamental emission, other emissions from digital circuitry used to control additional panel functions or display capabilities other than the touch panel radio transmission. While disable touch panel radio transmission, other emissions have the same levels. Therefore other emissions level could be exceed the fundamental emission level.



3.2.6 Transmitter Radiated Emissions (Above 30MHz)

Transmitter Radiated Emissions (Above 30MHz)			
Modulation Mode	ASK	Test Freq. (kHz)	127.5 kHz
Operating Mode	1	Polarization	V

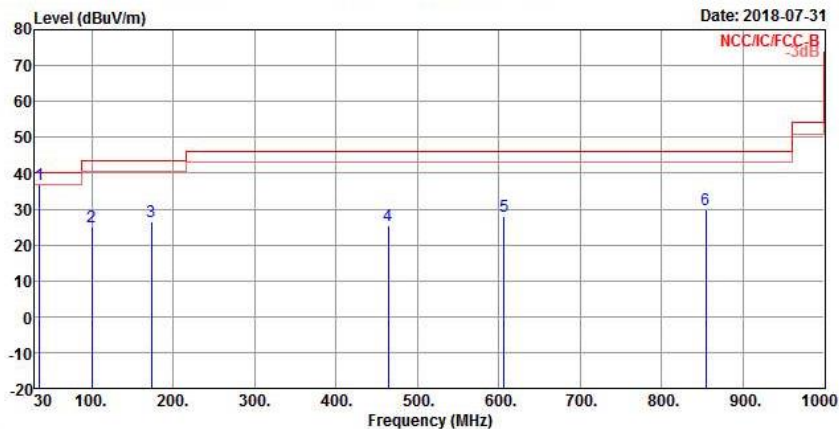


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	35.820000	36.87	-3.13	40.00	44.10	20.04	0.50	27.77	QP	100	215
2	99.840000	25.17	-18.33	43.50	35.54	15.97	1.47	27.81	Peak	100	360
3	173.560000	26.66	-16.84	43.50	37.38	14.76	2.06	27.54	Peak	100	360
4	464.560000	25.57	-20.43	46.00	28.19	22.43	3.25	28.30	Peak	100	360
5	606.180000	28.15	-17.85	46.00	29.02	23.99	3.69	28.55	Peak	100	360
6	854.500000	29.83	-16.17	46.00	27.79	25.63	4.26	27.85	Peak	100	360

Note 1: ">20dB" means spurious emission levels that exceed the level of 6 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: No level of unwanted emissions exceeds the level of the fundamental emission.
 Note 5: Except fundamental emission, other emissions from digital circuitry used to control additional panel functions or display capabilities other than the touch panel radio transmission. While disable touch panel radio transmission, other emissions have the same levels. Therefore other emissions level could be exceed the fundamental emission level.



Transmitter Radiated Emissions (Above 30MHz)

Modulation Mode	ASK	Test Freq. (kHz)	127.5 kHz
Operating Mode	1	Polarization	H

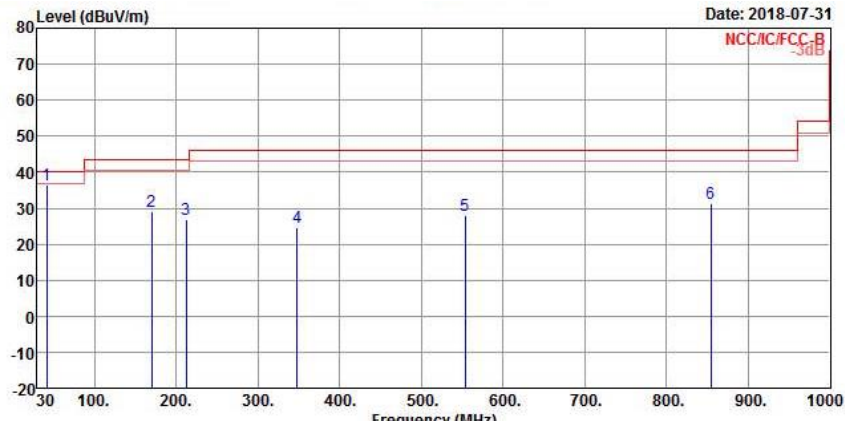

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	41.640000	36.33	-3.67	40.00	46.57	16.76	0.68	27.68	QP	234	62
2	169.680000	28.93	-14.57	43.50	39.54	14.91	2.03	27.55	Peak	100	0
3	212.360000	26.77	-16.73	43.50	37.42	14.28	2.48	27.41	Peak	100	0
4	348.160000	24.79	-21.21	46.00	29.70	19.56	3.10	27.57	Peak	100	0
5	553.800000	28.05	-17.95	46.00	28.92	24.06	3.60	28.53	Peak	100	0
6	854.500000	31.17	-14.83	46.00	29.13	25.63	4.26	27.85	Peak	100	0

Note 1: ">20dB" means spurious emission levels that exceed the level of 6 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: No level of unwanted emissions exceeds the level of the fundamental emission.
 Note 5: Except fundamental emission, other emissions from digital circuitry used to control additional panel functions or display capabilities other than the touch panel radio transmission. While disable touch panel radio transmission, other emissions have the same levels. Therefore other emissions level could be exceed the fundamental emission level.

3.3 Emission Bandwidth

3.3.1 Emission Bandwidth Limit

Emission Bandwidth Limit
N/A


3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.3.3 Test Procedures

Test Method
<input checked="" type="checkbox"/> For the emission bandwidth refer ANSI C63.10, clause 6.9.3 for occupied bandwidth testing.
<input checked="" type="checkbox"/> For radiated measurement. Loop antenna was rotated about the horizontal and vertical axis and the equipment to be measured and the test antenna shall be oriented to obtain the maximum emitted field strength level.


3.3.4 Test Setup

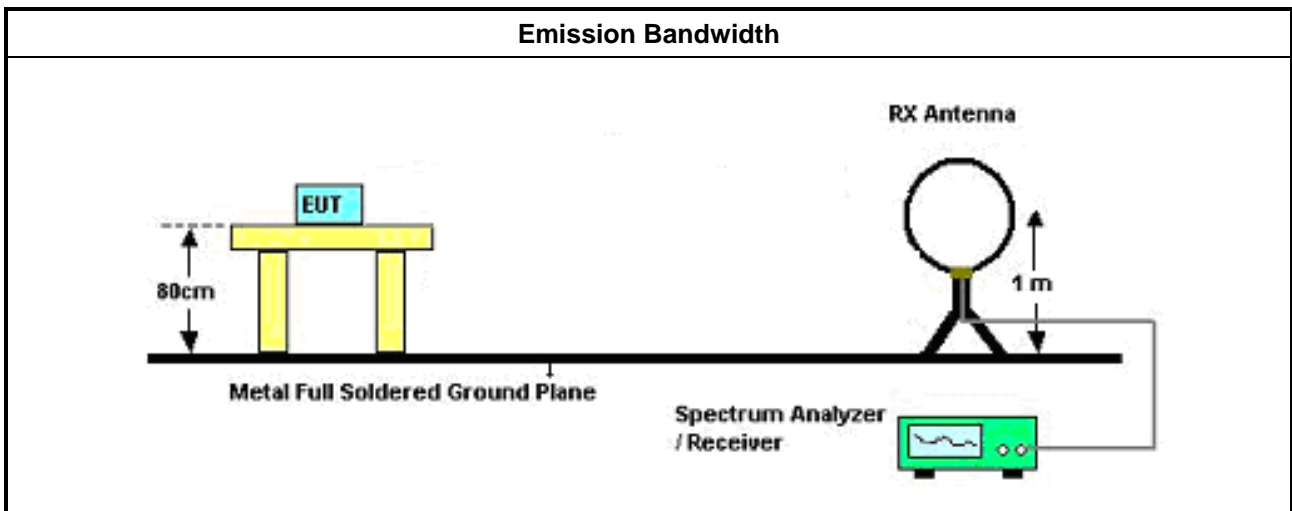


3.3.5 Test Result of Emission Bandwidth

Occupied Channel Bandwidth Result			
Modulation Mode	Frequency (kHz)	20dB Bandwidth (kHz)	99% Bandwidth (kHz)
ASK	127.5	2.4750	2.098408104
Limit		N/A	N/A
Result		Complied	

Emission Bandwidth Plot 20dB Bandwidth (127.5 kHz)

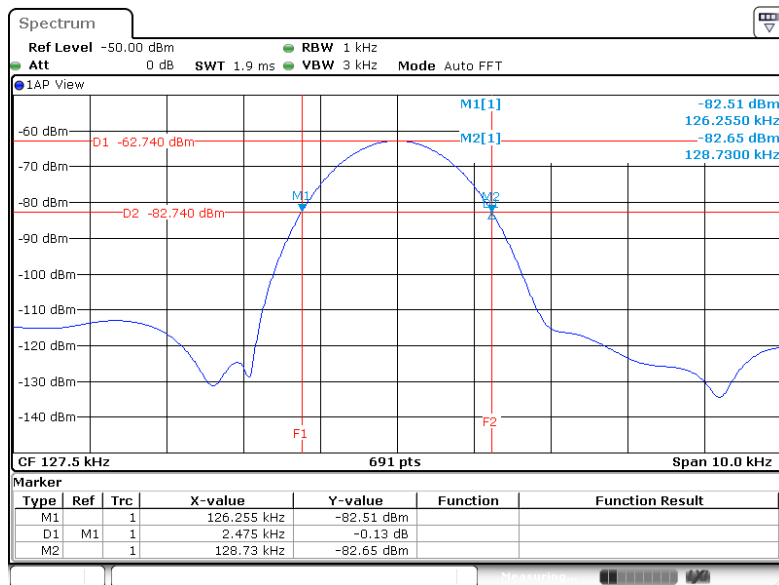

Emission Bandwidth Plot 99% Bandwidth (127.5 kHz)

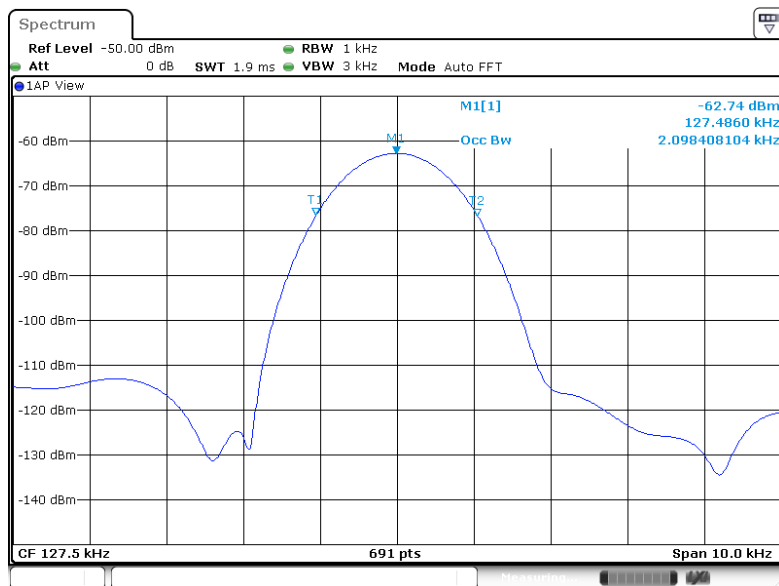



4 Test Equipment and Calibration Data

< AC Conduction >

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date
EMC Receiver	R&S	ESR	102051	9KHz ~ 3.6GHz	03/May/2018	02/May/2019
LISN	R&S	ENV216	101295	9kHz ~ 30MHz	17/Nov/2017	16/Nov/2018
RF Cable-CON	HUBER+SUHNER	RG213/U	07611832020001	9kHz ~ 30MHz	06/Oct/2017	05/Oct/2018
AC POWER	APC	AFC-11005G	F310050055	47Hz~63Hz 5~300V	NCR	NCR
Impuls Begrenzer Pul se Limiter	SCHWARZBECK	VTSD 9561-F	9561-F041	9 kHz ~ 30 MHz	12/Oct/2017	11/Oct/2018

NCR : Non-Calibration Require.

< RF Conducted >

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date
Spectrum Analyzer	R&S	FSV 40	101013	9kHz~40GHz	05/Feb/2018	04/Feb/2019
Loop Antenna	TESEQ	HLA 6120	31244	9 kHz~30 MHz	16/Mar/2018	15/Mar/2019

< Radiated Emission >

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH02-HY	30MHz ~ 1GHz 3m	20/Oct/2017	19/Oct/2018
Amplifier	Agilent	8447D	2944A11149	100kHz ~ 1.3GHz	03/Jul/2018	02/Jul/2019
Spectrum Analyzer	Rohde & Schwarz	FSP40	100593	9KHz - 40GHz	12/Dec/2017	11/Dec/2018
EMI Test Receiver	Rohde & Schwarz	ESCS 30	100354	9kHz ~ 2.75GHz	08/Dec/2017	07/Dec/2018
RF Cable-R03m	Jye Bao	RG142	CB017	9kHz ~ 1GHz	19/Jan/2018	18/Jan/2019
Bilog Antenna	SCHAFFNER	CBL 6112B	2723	30MHz ~ 1GHz	09/Sep/2017	08/Sep/2018
Loop Antenna	TESEQ	HLA 6120	31244	9k-30MHz	29/Mar/2018	28/Mar/2019