

APPLICATION CERTIFICATION FCC Part 15C  
On Behalf of  
ODSONIC INTERNATIONAL(HK)CO.,LIMITED

P2P  
Model No.: HC8301

FCC ID: 2AA8L-HC8301

Prepared for : ODSOINIC INTERNATIONAL(HK)CO.,LIMITED  
Address : FLAT/RM 704 7/F,BRIGHT WAY TOWER,33MONG  
KOK ROAD,MONG KOK KL,Hong Kong

Prepared by : ACCURATE TECHNOLOGY CO., LTD  
Address : F1, Bldg. A, Changyuan New Material Port, Keyuan Rd.  
Science & Industry Park, Nanshan, Shenzhen, Guangdong  
P.R. China

Tel: (0755) 26503290  
Fax: (0755) 26503396

Report Number : ATE20131932  
Date of Test : Oct 14-26, 2013  
Date of Report : Oct 28, 2013

## TABLE OF CONTENTS

Description	Page
Test Report Certification	
<b>1. GENERAL INFORMATION .....</b>	<b>5</b>
1.1. Description of Device (EUT).....	5
1.2. Carrier Frequency of Channels.....	6
1.3. Special Accessory and Auxiliary Equipment .....	6
1.4. Description of Test Facility .....	6
1.5. Measurement Uncertainty.....	7
<b>2. MEASURING DEVICE AND TEST EQUIPMENT .....</b>	<b>8</b>
<b>3. OPERATION OF EUT DURING TESTING .....</b>	<b>9</b>
3.1. Operating Mode.....	9
3.2. Configuration and peripherals .....	10
<b>4. TEST PROCEDURES AND RESULTS .....</b>	<b>11</b>
<b>5. 6DB BANDWIDTH MEASUREMENT.....</b>	<b>12</b>
5.1. Block Diagram of Test Setup.....	12
5.2. The Requirement For Section 15.247(a)(2).....	12
5.3. EUT Configuration on Measurement .....	12
5.4. Operating Condition of EUT .....	12
5.5. Test Procedure .....	12
5.6. Test Result .....	13
<b>6. MAXIMUM PEAK OUTPUT POWER .....</b>	<b>20</b>
6.1. Block Diagram of Test Setup.....	20
6.2. The Requirement For Section 15.247(b)(3).....	20
6.3. EUT Configuration on Measurement .....	20
6.4. Operating Condition of EUT .....	20
6.5. Test Procedure .....	20
6.6. Test Result .....	21
<b>7. POWER SPECTRAL DENSITY MEASUREMENT.....</b>	<b>28</b>
7.1. Block Diagram of Test Setup.....	28
7.2. The Requirement For Section 15.247(e).....	28
7.3. EUT Configuration on Measurement .....	28
7.4. Operating Condition of EUT .....	28
7.5. Test Procedure .....	28
7.6. Test Result .....	29
<b>8. BAND EDGE COMPLIANCE TEST .....</b>	<b>36</b>
8.1. Block Diagram of Test Setup.....	36
8.2. The Requirement For Section 15.247(d) .....	36
8.3. EUT Configuration on Measurement .....	36
8.4. Operating Condition of EUT .....	36
8.5. Test Procedure .....	36
8.6. Test Result .....	37
<b>9. RADIATED SPURIOUS EMISSION TEST .....</b>	<b>58</b>
9.1. Block Diagram of Test Setup.....	58
9.2. The Limit For Section 15.247(d) .....	58
9.3. Restricted bands of operation .....	59
9.4. Configuration of EUT on Measurement .....	59

- 9.5. Operating Condition of EUT .....60
- 9.6. Test Procedure .....60
- 9.7. The Field Strength of Radiation Emission Measurement Results .....60
- 10. CONDUCTED SPURIOUS EMISSION COMPLIANCE TEST .....87**
  - 10.1. Block Diagram of Test Setup.....87
  - 10.2. The Requirement For Section 15.247(d) .....87
  - 10.3. EUT Configuration on Measurement .....87
  - 10.4. Operating Condition of EUT .....87
  - 10.5. Test Procedure .....88
  - 10.6. Test Result .....88
- 11. AC POWER LINE CONDUCTED EMISSION FOR FCC PART 15 SECTION 15.207(A) 101**
  - 11.1. Block Diagram of Test Setup.....101
  - 11.2. The Emission Limit .....101
  - 11.3. Configuration of EUT on Measurement .....102
  - 11.4. Operating Condition of EUT .....102
  - 11.5. Test Procedure .....102
  - 11.6. Power Line Conducted Emission Measurement Results .....102
- 12. ANTENNA REQUIREMENT.....105**
  - 12.1. The Requirement .....105
  - 12.2. Antenna Construction .....105

### Test Report Certification

Applicant : ODSONIC INTERNATIONAL(HK)CO.,LIMITED  
 Manufacturer : ODSONIC INTERNATIONAL(HK)CO.,LIMITED  
 EUT Description : P2P  
 (A) MODEL NO.: HC8301  
 (B) SERIAL NO.: N/A  
 (C) POWER SUPPLY: AC100-240V 50/60Hz

Measurement Procedure Used:

**FCC Rules and Regulations Part 15 Subpart C Section 15.247**  
**ANSI C63.4: 2009**


The EUT was tested according to DTS test procedure of April 09, 2013 KDB558074 D01 DTS Meas Guidance v03 for compliance to FCC 47CFR 15.247 requirements

The device described above is tested by ACCURATE TECHNOLOGY CO. LTD to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart C Section 15.247 limits. The measurement results are contained in this test report and ACCURATE TECHNOLOGY CO. LTD is assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the Equipment Under Test (EUT) is to be technically compliant with the FCC requirements.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of ACCURATE TECHNOLOGY CO. LTD.

Date of Test : Oct 14-26, 2013

Prepared by :   
 (Engineer)

Approved & Authorized Signer :   
 (Manager)

# 1. GENERAL INFORMATION

## 1.1. Description of Device (EUT)

EUT	:	P2P
Model Number	:	HC8301
Frequency Range	:	802.11b/g/n(20MHz): 2412-2462MHz 802.11n(40MHz): 2422-2452MHz
Number of Channels	:	802.11b/g/n (20MHz):11 802.11n (40MHz): 7
Antenna Gain	:	2dBi
Power Supply	:	AC100-240V 50/60Hz
Adapter	:	Model number: 1-5-2000 Input: AC 100-240V; 50/60Hz 0.3A Output: DC 6V/2000mA USB line: Non-shielded, Non-detachable, 1.5m
Data Rate	:	802.11b: 11, 5.5, 2, 1 Mbps 802.11g: 54, 48, 36, 24, 18, 12, 9, 6 Mbps 802.11n: up to 150Mbps
Applicant	:	ODSONIC INTERNATIONAL(HK)CO.,LIMITED
Address	:	FLAT/RM 704 7/F,BRIGHT WAY TOWER,33MONG KOK ROAD,MONG KOK KL,Hong Kong
Manufacturer	:	ODSONIC INTERNATIONAL(HK)CO.,LIMITED
Address	:	FLAT/RM 704 7/F,BRIGHT WAY TOWER,33MONG KOK ROAD,MONG KOK KL,Hong Kong
Date of sample received	:	Sep 03, 2013
Date of Test	:	Oct 14-26, 2013

## 1.2. Carrier Frequency of Channels

802.11b, 802.11g, 802.11n (20MHz)

Channel	Frequency(MHz)	Channel	Frequency(MHz)
01	2412	07	2442
02	2417	08	2447
03	2422	09	2452
04	2427	10	2457
05	2432	11	2462
06	2437	---	---

802.11n (40MHz)

Channel	Frequency(MHz)	Channel	Frequency(MHz)
---	---	07	2442
---	---	08	2447
03	2422	09	2452
04	2427	---	---
05	2432	---	---
06	2437	---	---

## 1.3. Special Accessory and Auxiliary Equipment

n.a.

## 1.4. Description of Test Facility

EMC Lab : Accredited by TUV Rheinland Shenzhen

Listed by FCC  
The Registration Number is 752051

Listed by Industry Canada  
The Registration Number is 5077A-2

Accredited by China National Accreditation Committee  
for Laboratories  
The Certificate Registration Number is L3193

Name of Firm : ACCURATE TECHNOLOGY CO. LTD

Site Location : F1, Bldg. A, Changyuan New Material Port, Keyuan Rd.  
Science & Industry Park, Nanshan, Shenzhen, Guangdong  
P.R. China

### 1.5.Measurement Uncertainty

Conducted Emission Expanded Uncertainty = 2.23dB, k=2

Radiated emission expanded uncertainty  
(9kHz-30MHz) = 3.08dB, k=2

Radiated emission expanded uncertainty  
(30MHz-1000MHz) = 4.42dB, k=2

Radiated emission expanded uncertainty  
(Above 1GHz) = 4.06dB, k=2

## 2. MEASURING DEVICE AND TEST EQUIPMENT

**Table 1: List of Test and Measurement Equipment**

Kind of equipment	Manufacturer	Type	S/N	Calibrated dates	Calibrated until
EMI Test Receiver	Rohde&Schwarz	ESCS30	100307	Jan. 12, 2013	Jan. 11, 2014
EMI Test Receiver	Rohde&Schwarz	ESPI3	101526/003	Jan. 12, 2013	Jan. 11, 2014
Spectrum Analyzer	Agilent	E7405A	MY45115511	Jan. 12, 2013	Jan. 11, 2014
Pre-Amplifier	Rohde&Schwarz	CBLU118354 0-01	3791	Jan. 12, 2013	Jan. 11, 2014
Loop Antenna	Schwarzbeck	FMZB1516	1516131	Jan. 12, 2013	Jan. 11, 2014
Bilog Antenna	Schwarzbeck	VULB9163	9163-323	Jan. 12, 2013	Jan. 11, 2014
Horn Antenna	Schwarzbeck	BBHA9120D	9120D-655	Jan. 12, 2013	Jan. 11, 2014
Horn Antenna	Schwarzbeck	BBHA9170	9170-359	Jan. 12, 2013	Jan. 11, 2014
LISN	Rohde&Schwarz	ESH3-Z5	100305	Jan. 12, 2013	Jan. 11, 2014
LISN	Schwarzbeck	NSLK8126	8126431	Jan. 12, 2013	Jan. 11, 2014
Highpass Filter	Wainwright Instruments	WHKX3.6/18 G-10SS	N/A	Jan. 12, 2013	Jan. 11, 2014
Band Reject Filter	Wainwright Instruments	WRCG2400/2 485-2375/2510 -60/11SS	N/A	Jan. 12, 2013	Jan. 11, 2014



### **3. OPERATION OF EUT DURING TESTING**

#### **3.1.Operating Mode**

The mode is used: **1.802.11b Transmitting mode**

Low Channel: 2412MHz

Middle Channel: 2437MHz

High Channel: 2462MHz

**2.802.11g Transmitting mode**

Low Channel: 2412MHz

Middle Channel: 2437MHz

High Channel: 2462MHz

**3.802.11n (20MHz) Transmitting mode**

Low Channel: 2412MHz

Middle Channel: 2437MHz

High Channel: 2462MHz

**4.802.11n (40MHz) Transmitting mode**

Low Channel: 2422MHz

Middle Channel: 2437MHz

High Channel: 2452MHz

**5. Charging**

### 3.2. Configuration and peripherals

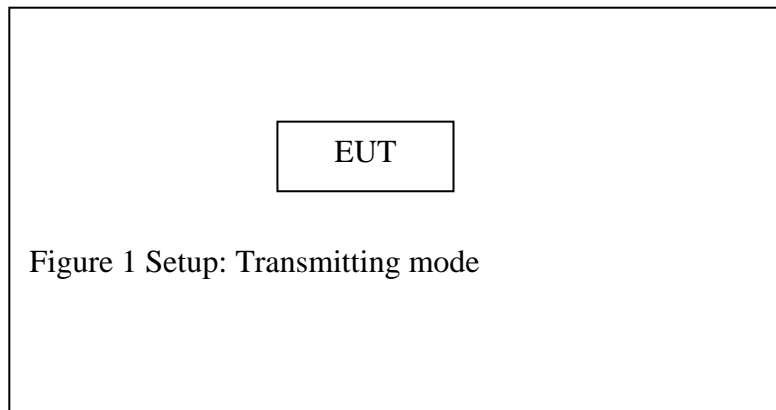


Figure 1 Setup: Transmitting mode

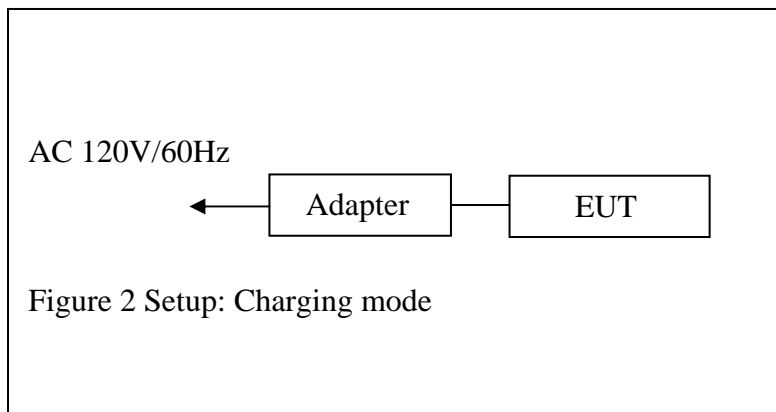



Figure 2 Setup: Charging mode

#### 4. TEST PROCEDURES AND RESULTS

<b>FCC Rules</b>	<b>Description of Test</b>	<b>Result</b>
Section 15.247(a)(2)	6dB Bandwidth Test	Compliant
Section 15.247(e)	Power Spectral Density Test	Compliant
Section 15.247(b)(3)	Maximum Peak Output Power Test	Compliant
Section 15.247(d)	Band Edge Compliance Test	Compliant
Section 15.247(d) Section 15.209	Radiated Spurious Emission Test	Compliant
Section 15.247(d)	Conducted Spurious Emission Test	Compliant
Section 15.207	AC Power Line Conducted Emission Test	Compliant
Section 15.203	Antenna Requirement	Compliant

## 5. 6DB BANDWIDTH MEASUREMENT

### 5.1. Block Diagram of Test Setup



### 5.2. The Requirement For Section 15.247(a)(2)

Section 15.247(a)(2): Systems using digital modulation techniques may operate in the 902-928MHz, 2400-2483.5MHz, and 5725-5850MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

### 5.3. EUT Configuration on Measurement

The equipment are installed on the emission measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

### 5.4. Operating Condition of EUT

5.4.1. Setup the EUT and simulator as shown as Section 5.1.

5.4.2. Turn on the power of all equipment.

5.4.3. Let the EUT work in TX modes measure it. The transmit frequency are 2412-2462 and 2422-2452MHz. We select 2412MHz, 2437MHz, 2462MHz and 2422MHz, 2437MHz, 2452MHz TX frequency to transmit.

### 5.5. Test Procedure

1. Set resolution bandwidth (RBW) = 100 kHz.
2. Set the video bandwidth (VBW)  $\geq 3 \times$  RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

## 5.6. Test Result

The test was performed with 802.11b			
Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)
Low	2412	10.12	> 0.5MHz
Middle	2437	10.12	> 0.5MHz
High	2462	10.12	> 0.5MHz


The test was performed with 802.11g			
Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)
Low	2412	16.40	> 0.5MHz
Middle	2437	16.40	> 0.5MHz
High	2462	16.40	> 0.5MHz

The test was performed with 802.11n (Bandwidth: 20 MHz)			
Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)
Low	2412	17.60	> 0.5MHz
Middle	2437	17.60	> 0.5MHz
High	2462	17.60	> 0.5MHz


The test was performed with 802.11n (Bandwidth: 40 MHz)			
Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)
Low	2422	35.28	> 0.5MHz
Middle	2437	35.36	> 0.5MHz
High	2452	35.28	> 0.5MHz

The spectrum analyzer plots are attached as below.


### 802.11b Channel Low 2412MHz

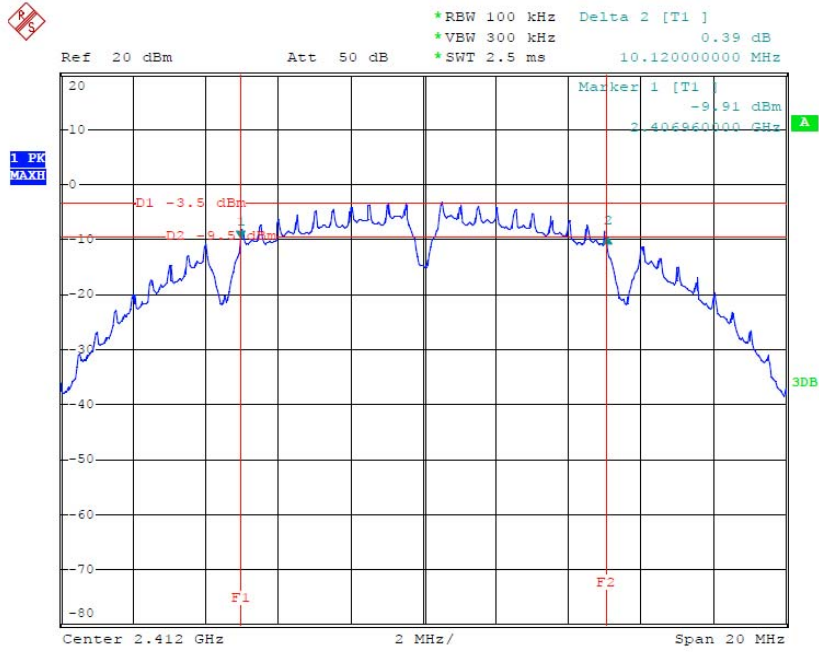


### 802.11b Channel Middle 2437MHz

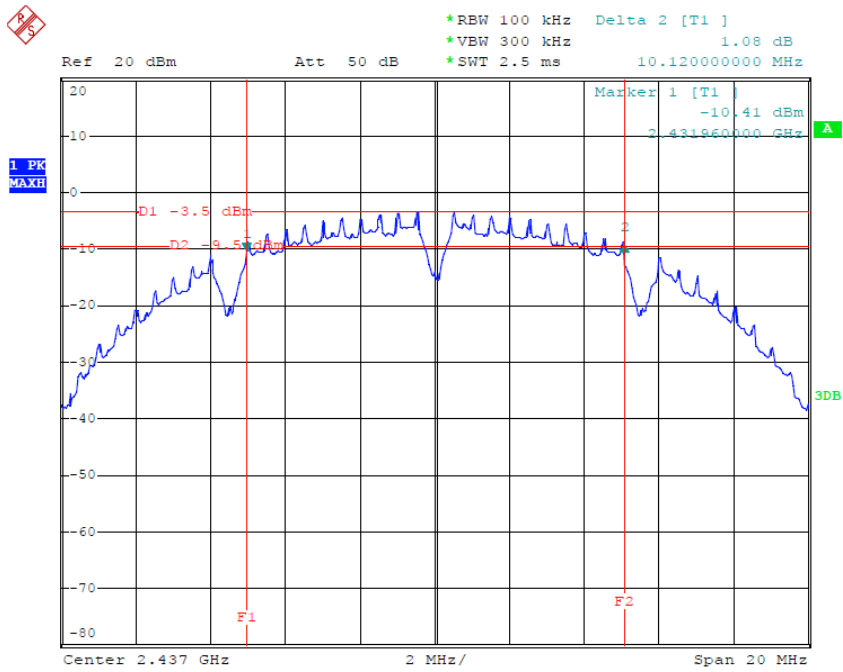


### 802.11b Channel High 2462MHz

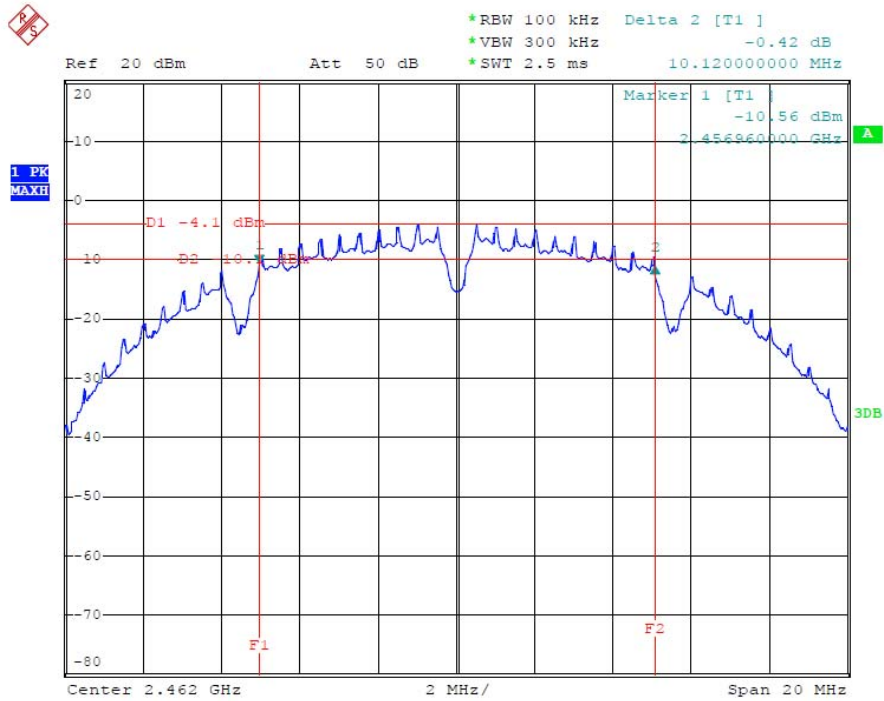


### 802.11g Channel Low 2412MHz

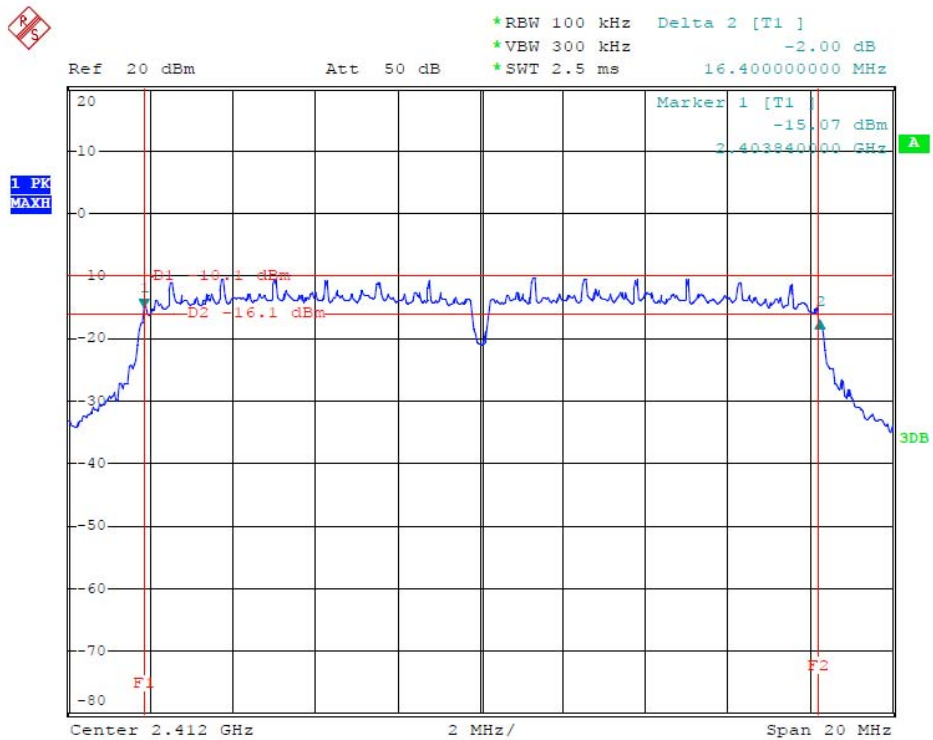

### 802.11g Channel Middle 2437MHz

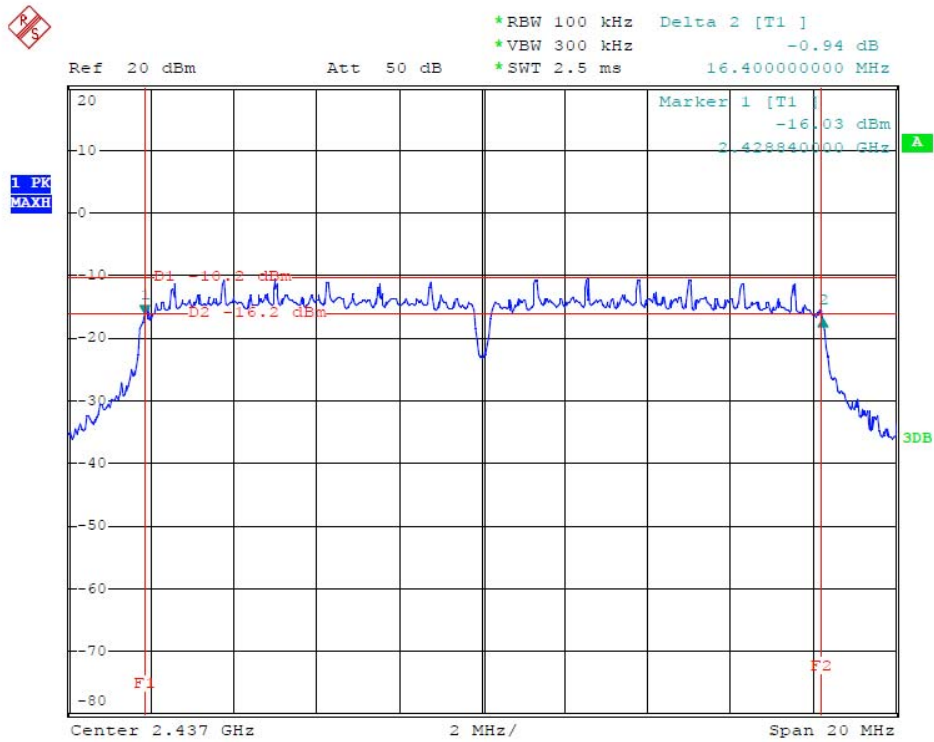


### 802.11g Channel High 2462MHz

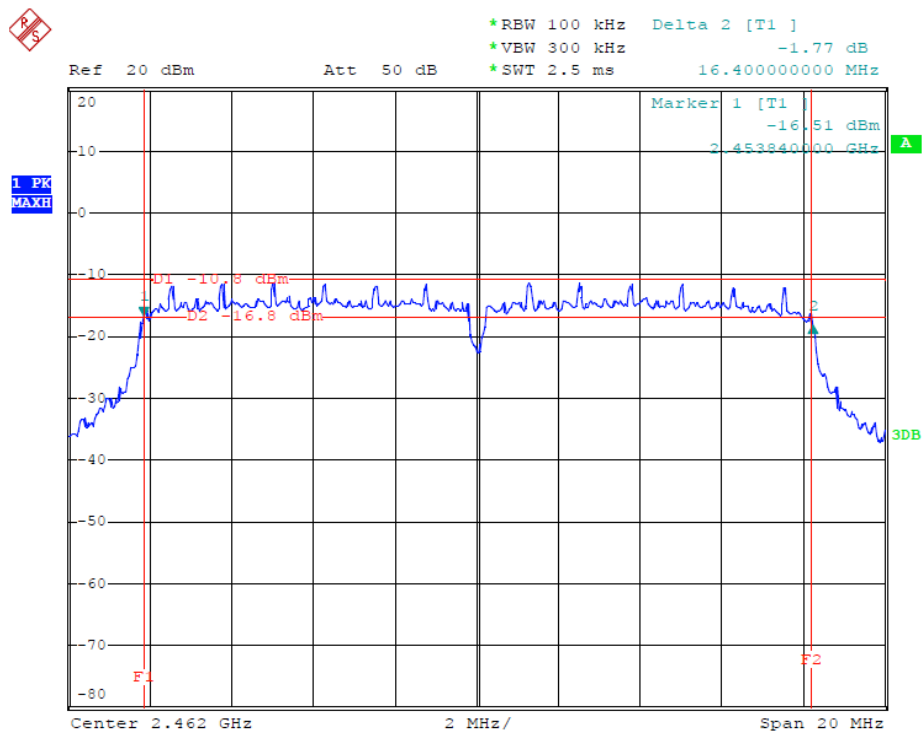


### 802.11n Channel Low 2412MHz (20MHz)




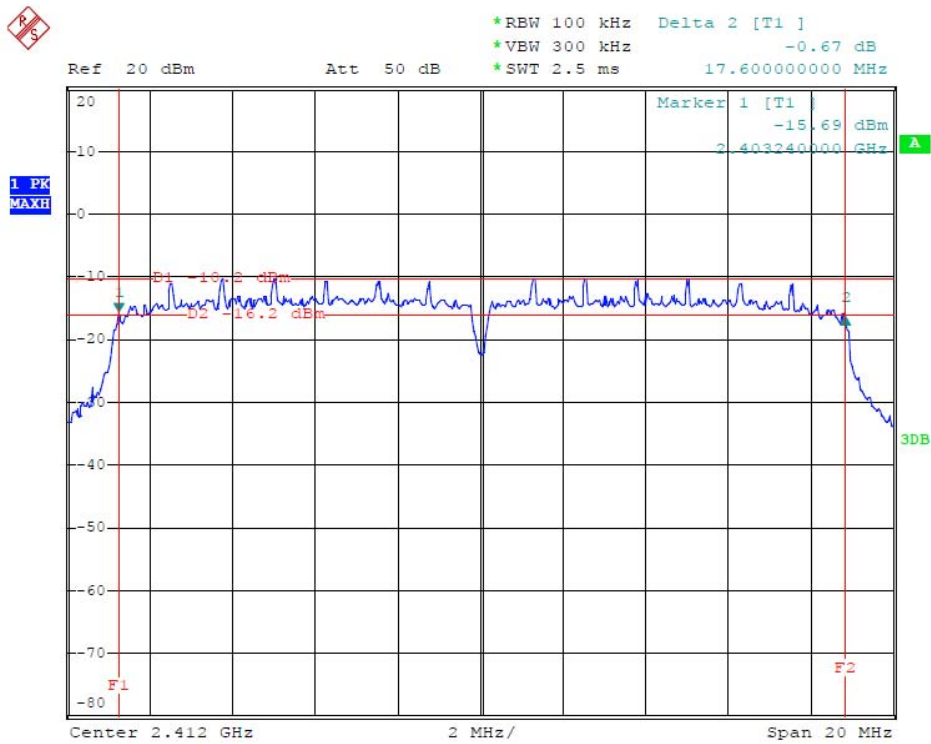


802.11n Channel Middle 2437MHz(20MHz)

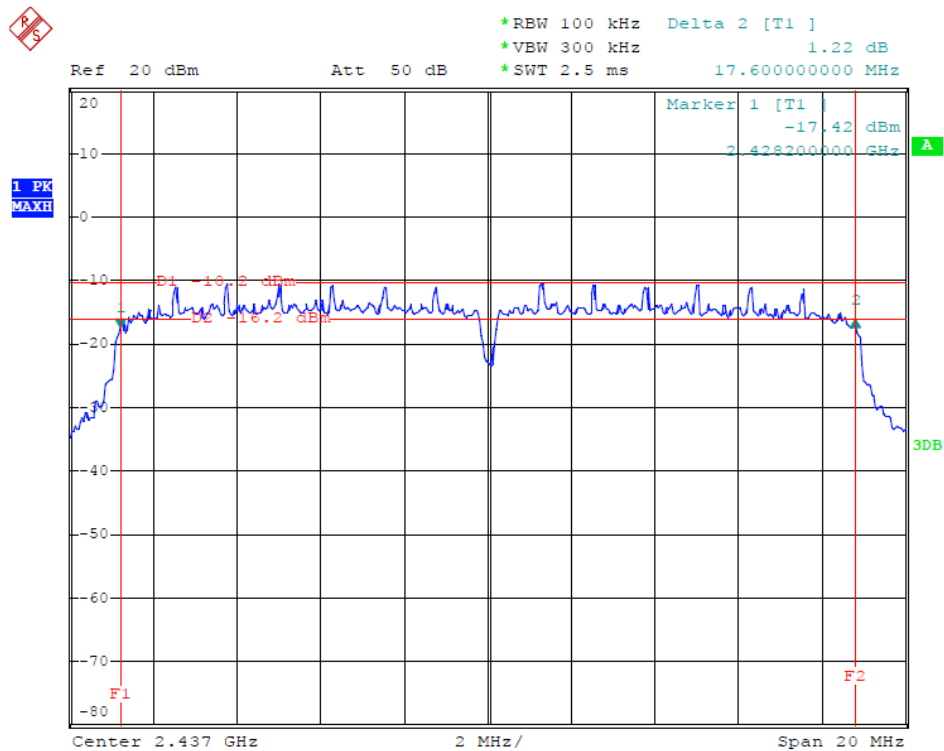


### 802.11n Channel High 2462MHz(20MHz)

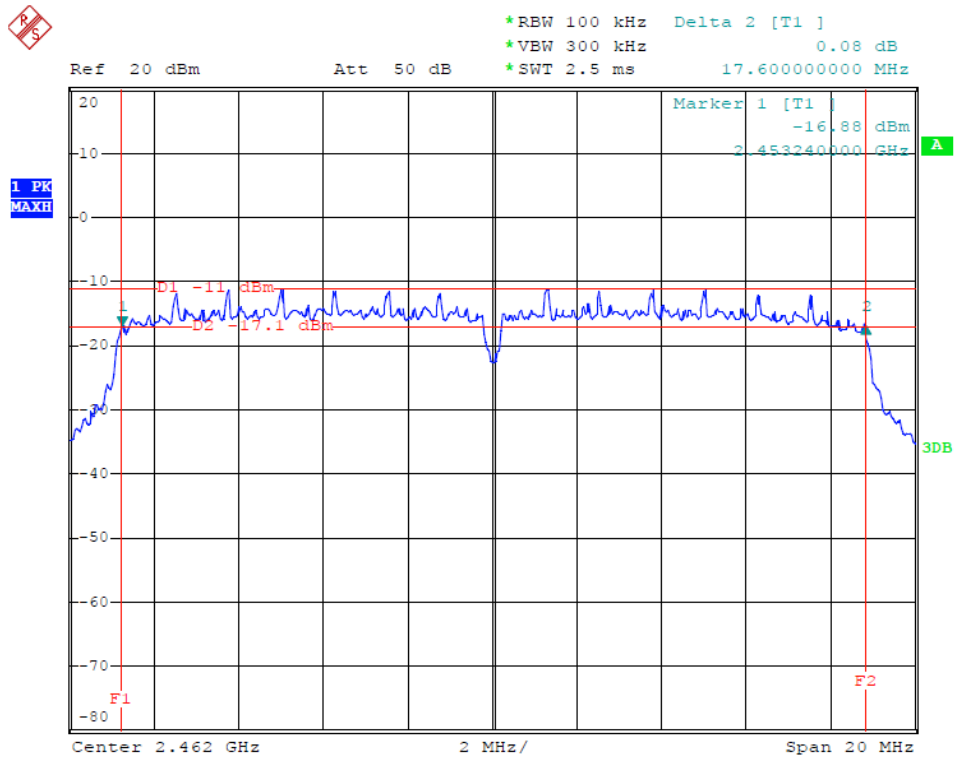


### 802.11n Channel Low 2422MHz (40MHz)

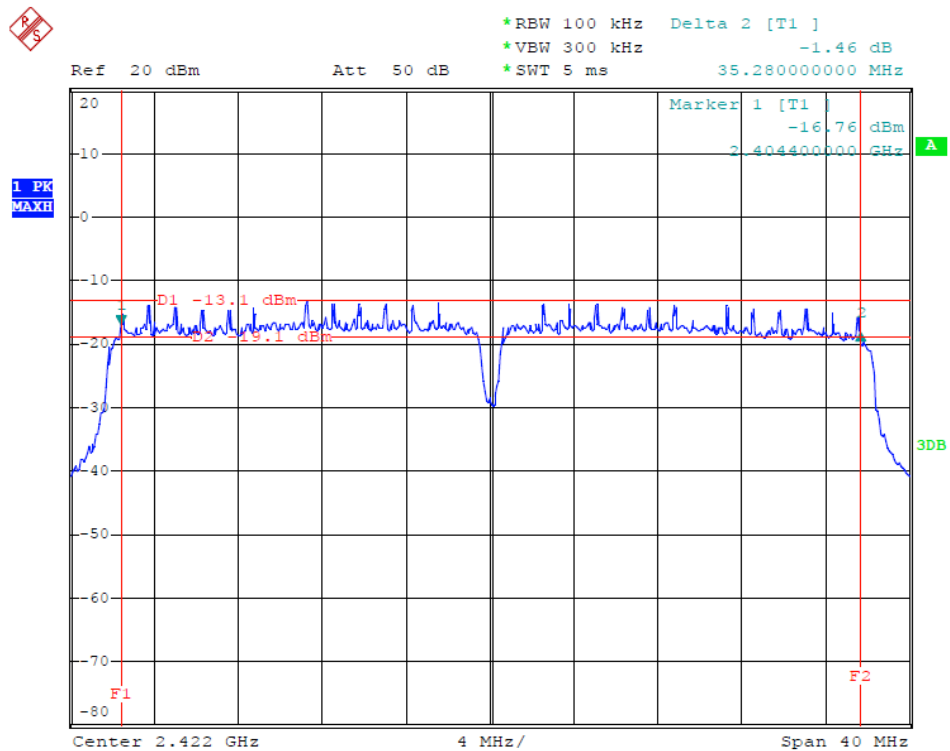

### 802.11n Channel Middle 2437MHz(40MHz)

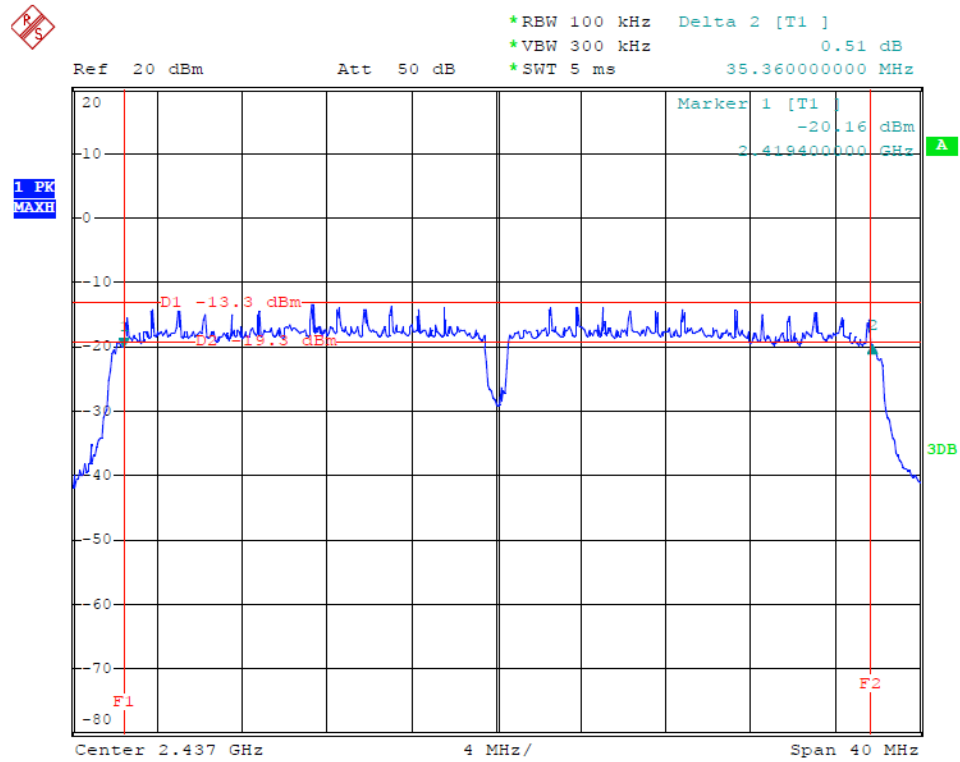


### 802.11n Channel High 2452MHz(40MHz)

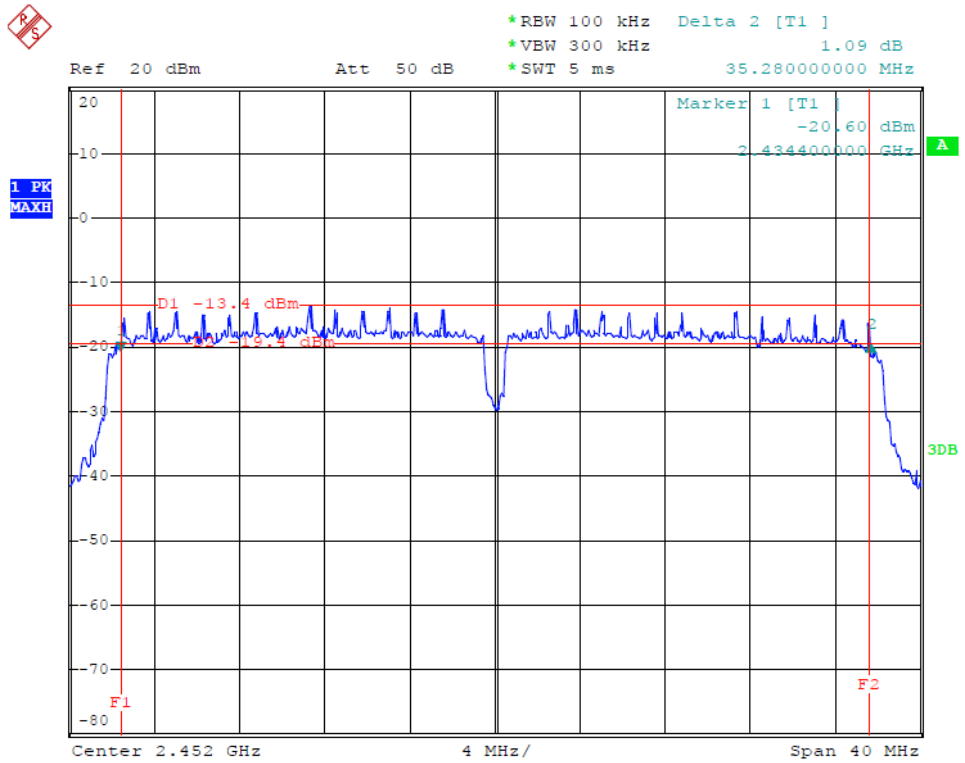

## 6. MAXIMUM PEAK OUTPUT POWER

### 6.1. Block Diagram of Test Setup



### 6.2. The Requirement For Section 15.247(b)(3)

Section 15.247(b)(3): For systems using digital modulation in the 902-928MHz, 2400-2483.5MHz, and 5725-5850MHz bands: 1 Watt.

### 6.3. EUT Configuration on Measurement

The equipment are installed on the emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

### 6.4. Operating Condition of EUT

6.4.1. Setup the EUT and simulator as shown as Section 6.1.

6.4.2. Turn on the power of all equipment.

6.4.3. Let the EUT work in TX modes measure it. The transmit frequency are 2412-2462 and 2422-2452MHz. We select 2412MHz, 2437MHz, 2462MHz and 2422MHz, 2437MHz, 2452MHz TX frequency to transmit.

### 6.5. Test Procedure

6.5.1. The EUT was tested according to DTS test procedure of April 09, 2013 KDB558074 D01 DTS Meas Guidance v03 for compliance to FCC 47CFR 15.247 requirements.

6.5.2. The transmitter output was connected to the spectrum analyzer through a low loss cable.

6.5.3. Set RBW of spectrum analyzer to 1MHz and VBW to 3MHz.

6.5.4. Measurement the maximum peak output power.

## 6.6. Test Result

The test was performed with 802.11b				
Channel	Frequency (MHz)	Peak Output Power (dBm)	Peak Output Power (mW)	Limits dBm / W
Low	2412	8.80	7.59	30 dBm / 1 W
Middle	2437	8.44	6.98	30 dBm / 1 W
High	2462	8.07	6.41	30 dBm / 1 W


The test was performed with 802.11g				
Channel	Frequency (MHz)	Peak Output Power (dBm)	Peak Output Power (mW)	Limits dBm / W
Low	2412	9.54	8.99	30 dBm / 1 W
Middle	2437	9.16	8.29	30 dBm / 1 W
High	2462	8.53	7.13	30 dBm / 1 W

The test was performed with 802.11n (20MHz)				
Channel	Frequency (MHz)	Peak Output Power (dBm)	Peak Output Power (mW)	Limits dBm / W
Low	2412	9.50	8.91	30 dBm / 1 W
Middle	2437	9.18	8.28	30 dBm / 1 W
High	2462	8.81	7.60	30 dBm / 1 W


The test was performed with 802.11n (40MHz)				
Channel	Frequency (MHz)	Peak Output Power (dBm)	Peak Output Power (mW)	Limits dBm / W
Low	2422	9.07	8.07	30 dBm / 1 W
Middle	2437	8.76	7.52	30 dBm / 1 W
High	2452	8.37	6.87	30 dBm / 1 W

The spectrum analyzer plots are attached as below.


### 802.11b Channel Low 2412MHz

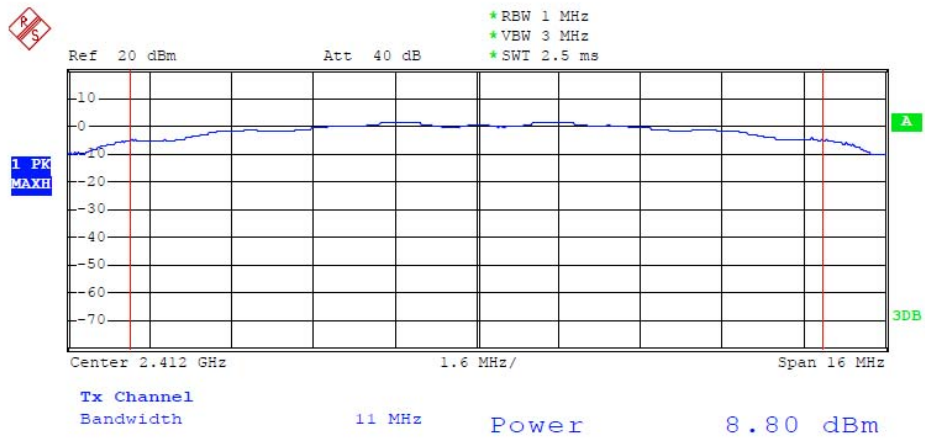


### 802.11b Channel Middle 2437MHz

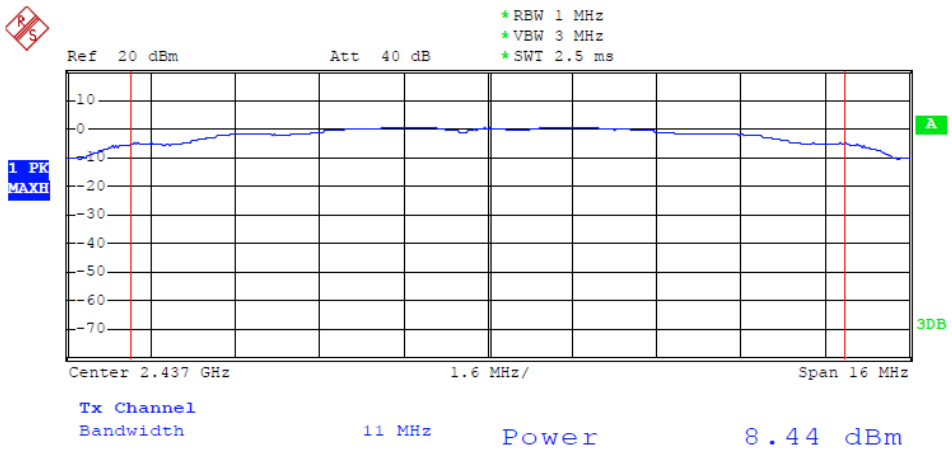


### 802.11b Channel High 2462MHz

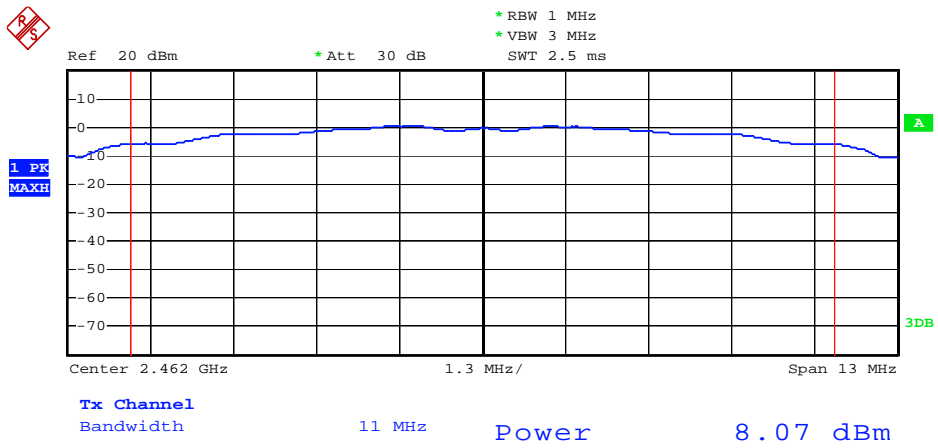


### 802.11g Channel Low 2412MHz

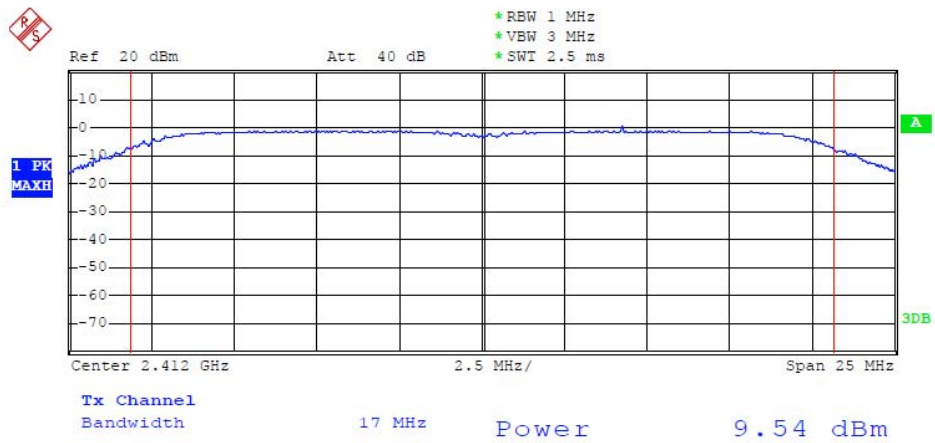

### 802.11g Channel Middle 2437MHz

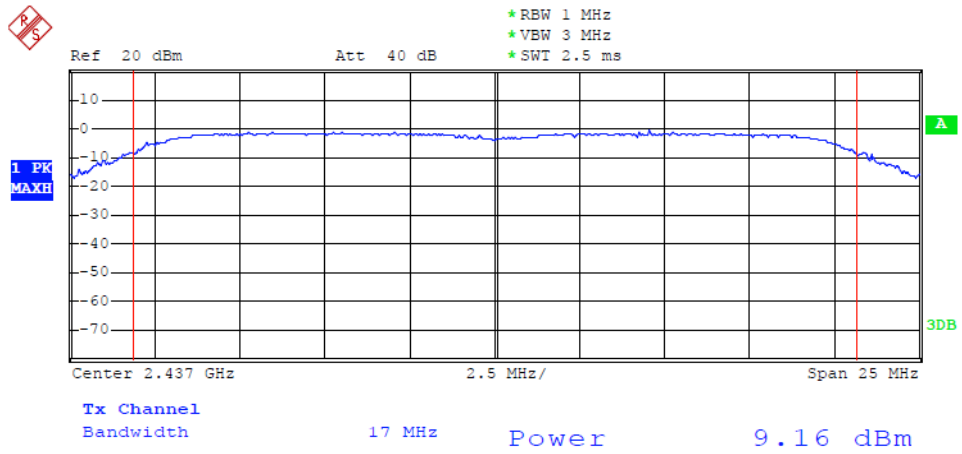


### 802.11g Channel High 2462MHz

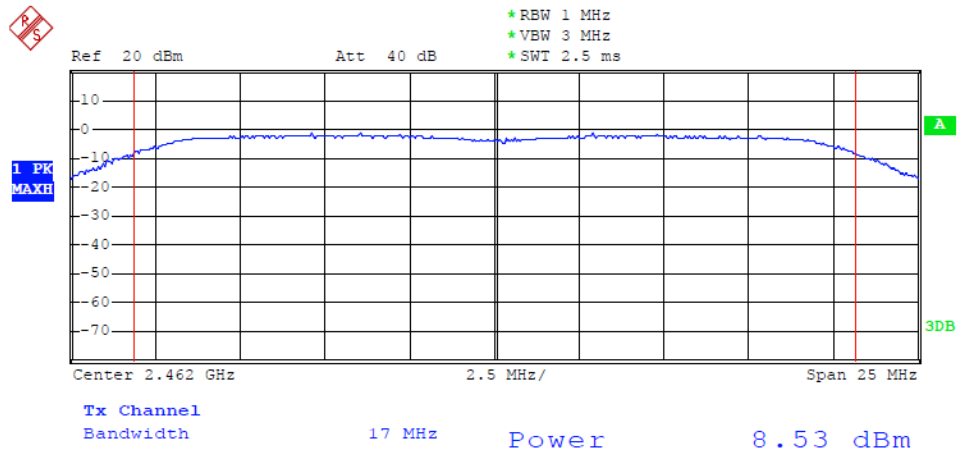





### 802.11n Channel Low 2412MHz (20MHz)

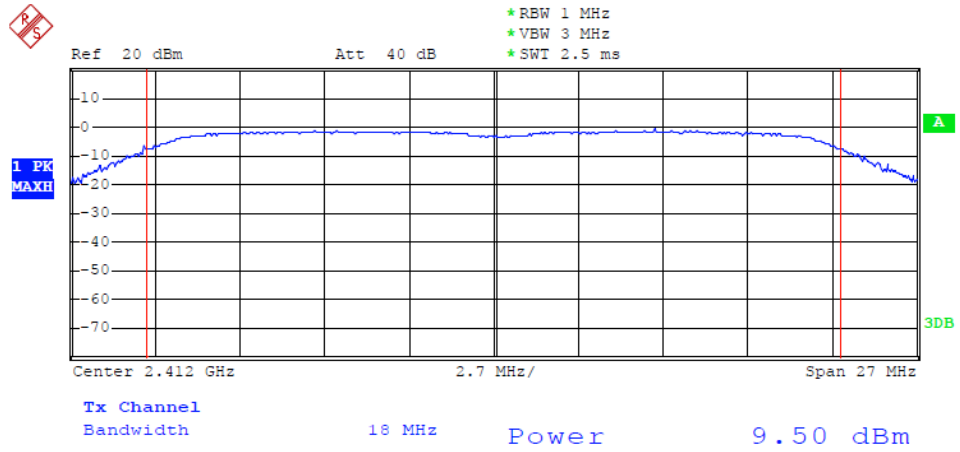


### 802.11n Channel Middle 2437MHz (20MHz)

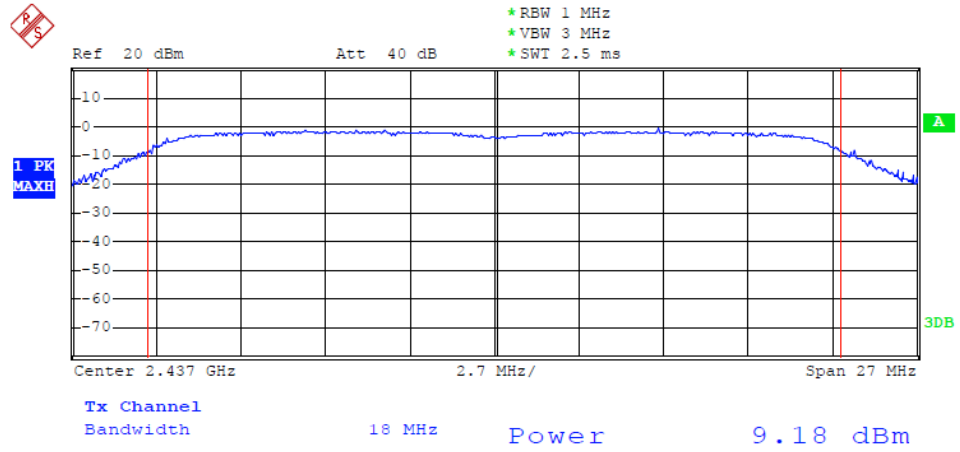


### 802.11n Channel High 2462MHz (20MHz)

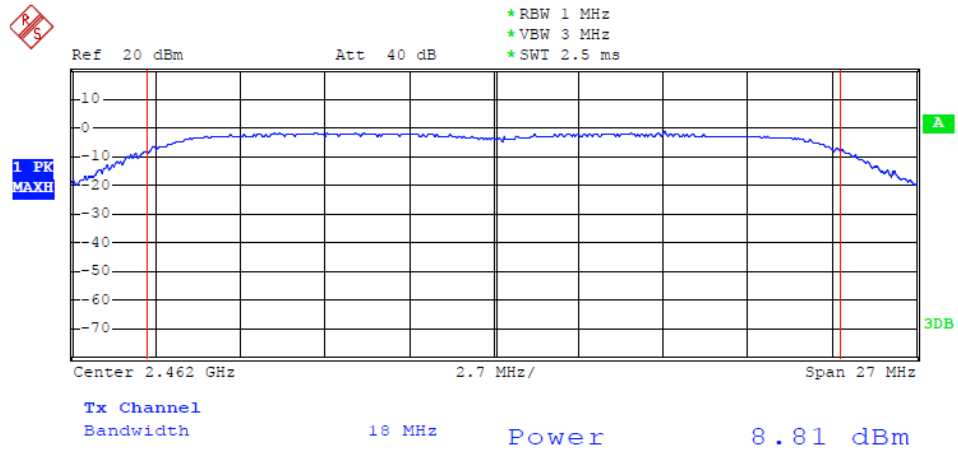


### 802.11n Channel Low 2422MHz (40MHz)

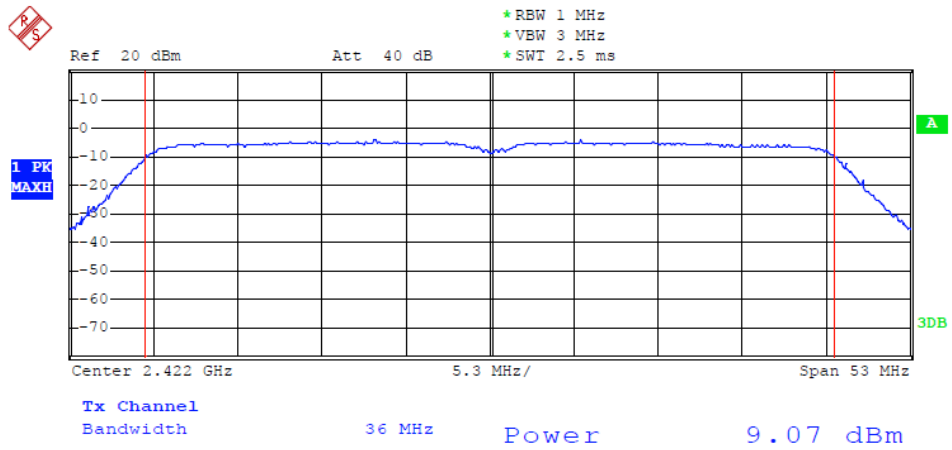

### 802.11n Channel Middle 2437MHz (40MHz)

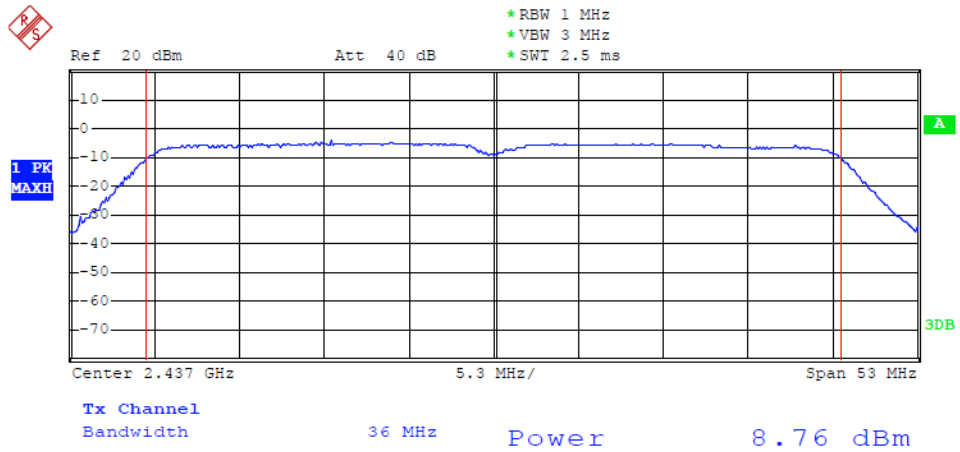


### 802.11n Channel High 2452MHz (40MHz)

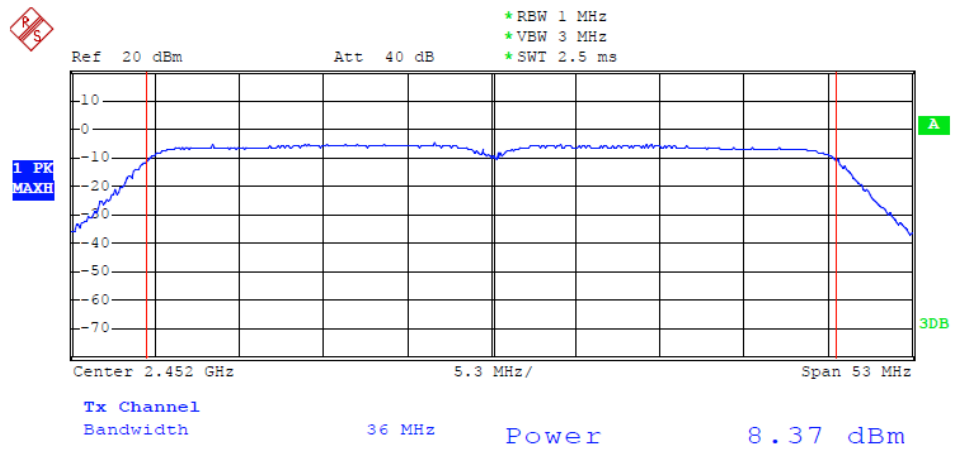

## 7. POWER SPECTRAL DENSITY MEASUREMENT

### 7.1. Block Diagram of Test Setup



### 7.2. The Requirement For Section 15.247(e)

Section 15.247(e): For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

### 7.3. EUT Configuration on Measurement

The equipment are installed on the emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

### 7.4. Operating Condition of EUT

7.4.1. Setup the EUT and simulator as shown as Section 7.1.

7.4.2. Turn on the power of all equipment.

7.4.3. Let the EUT work in TX modes measure it. The transmit frequency are 2412-2462 and 2422-2452MHz. We select 2412MHz, 2437MHz, 2462MHz and 2422MHz, 2437MHz, 2452MHz TX frequency to transmit.

### 7.5. Test Procedure

7.5.1. The transmitter output was connected to the spectrum analyzer through a low loss cable.

7.5.2. Measurement Procedure PKPSD:

This procedure must be used if maximum peak conducted output power was used to demonstrate compliance to the fundamental output power limit, and is optional if the maximum (average) conducted output power was used to demonstrate compliance.

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS channel bandwidth.
3. Set the RBW  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .

4. Set the VBW  $\geq 3 \times$  RBW.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

### 7.5.3.Measurement the maximum power spectral density.

## 7.6.Test Result

The test was performed with 802.11b			
Channel	Frequency (MHz)	Power Spectral Density (dBm)	Limits (dBm)
Low	2412	-18.24	8 dBm
Middle	2437	-18.57	8 dBm
High	2462	-18.51	8 dBm


The test was performed with 802.11g			
Channel	Frequency (MHz)	Power Spectral Density (dBm)	Limits (dBm)
Low	2412	-21.78	8 dBm
Middle	2437	-22.07	8 dBm
High	2462	-22.52	8 dBm

The test was performed with 802.11n (20MHz)			
Channel	Frequency (MHz)	Power Spectral Density (dBm)	Limits (dBm)
Low	2412	-24.76	8 dBm
Middle	2437	-26.30	8 dBm
High	2462	-26.11	8 dBm


The test was performed with 802.11n (40MHz)			
Channel	Frequency (MHz)	Power Spectral Density (dBm)	Limits (dBm)
Low	2422	-27.79	8 dBm
Middle	2437	-28.46	8 dBm
High	2452	-28.23	8 dBm

The spectrum analyzer plots are attached as below.


### 802.11b Channel Low 2412MHz

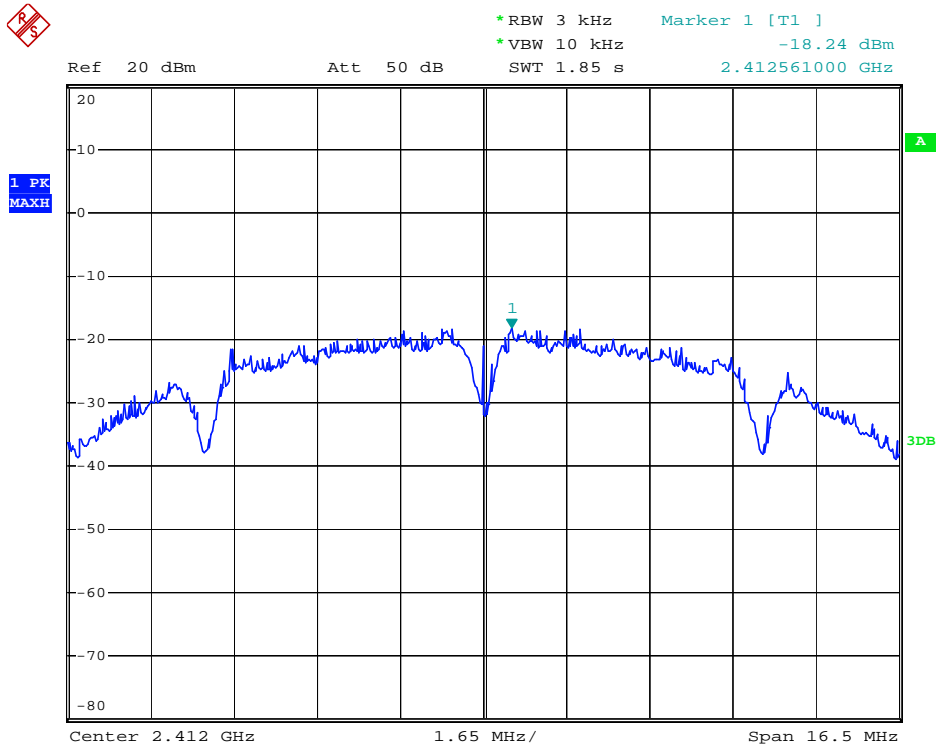


### 802.11b Channel Middle 2437MHz

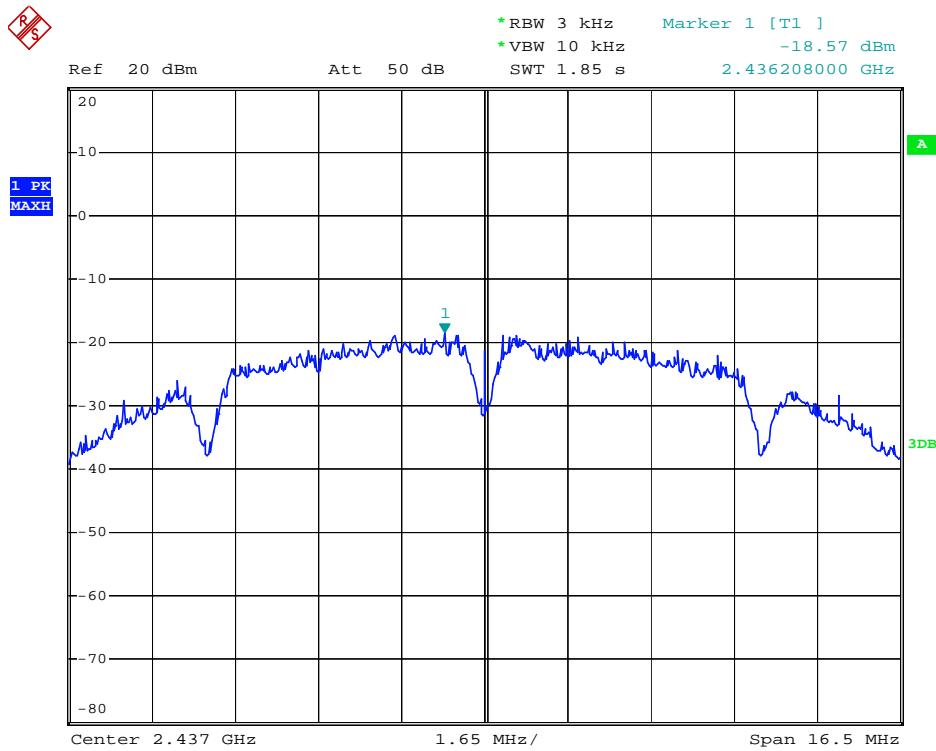


### 802.11b Channel High 2462MHz

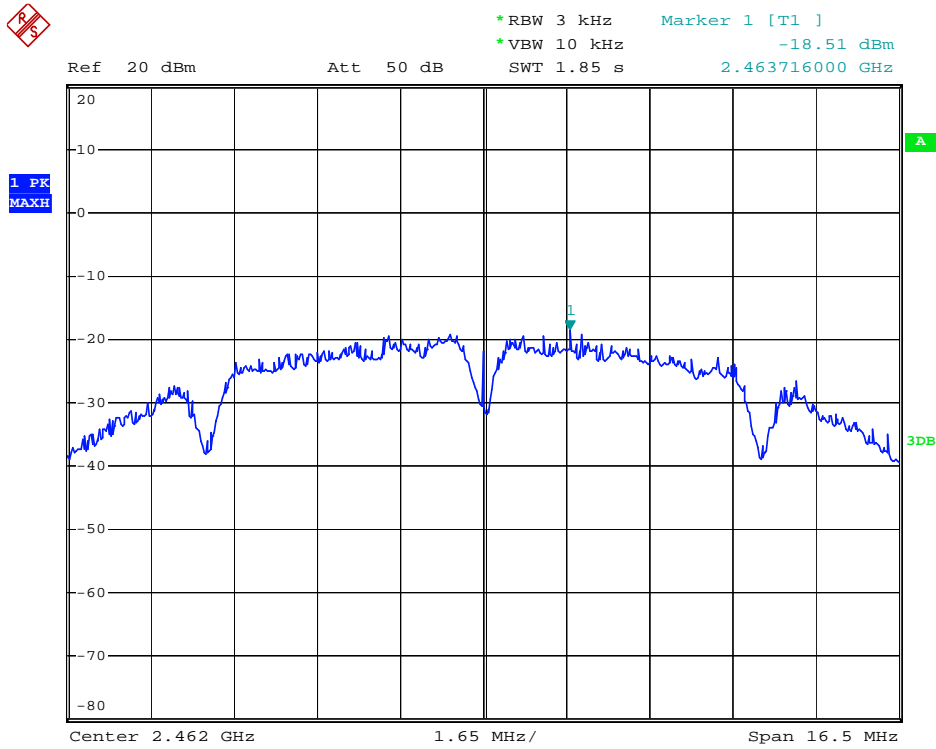


### 802.11g Channel Low 2412MHz

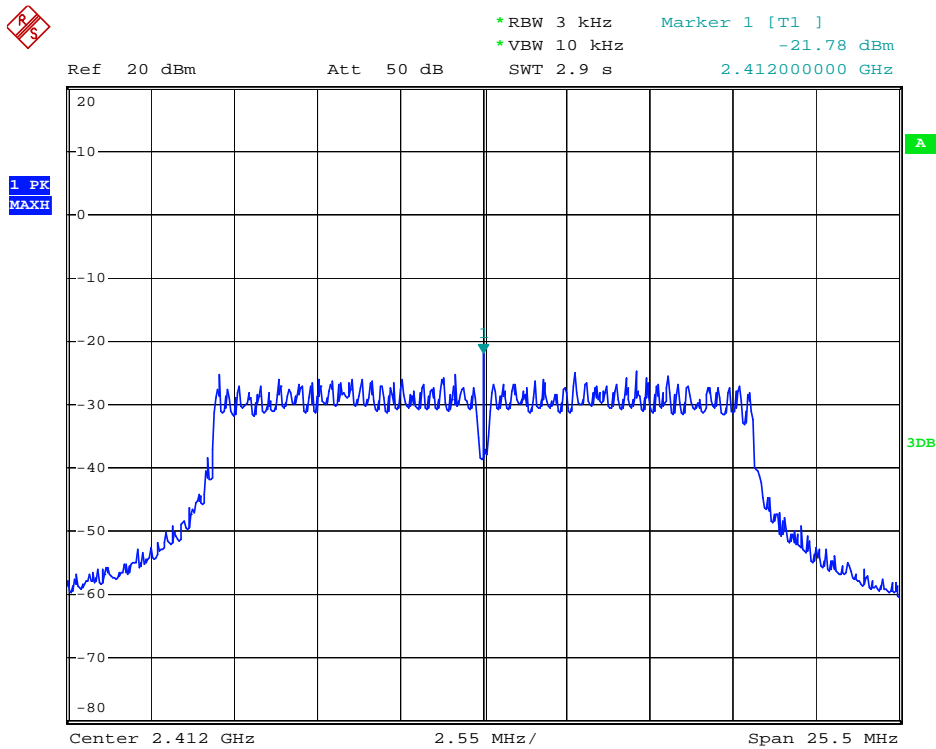

### 802.11g Channel Middle 2437MHz

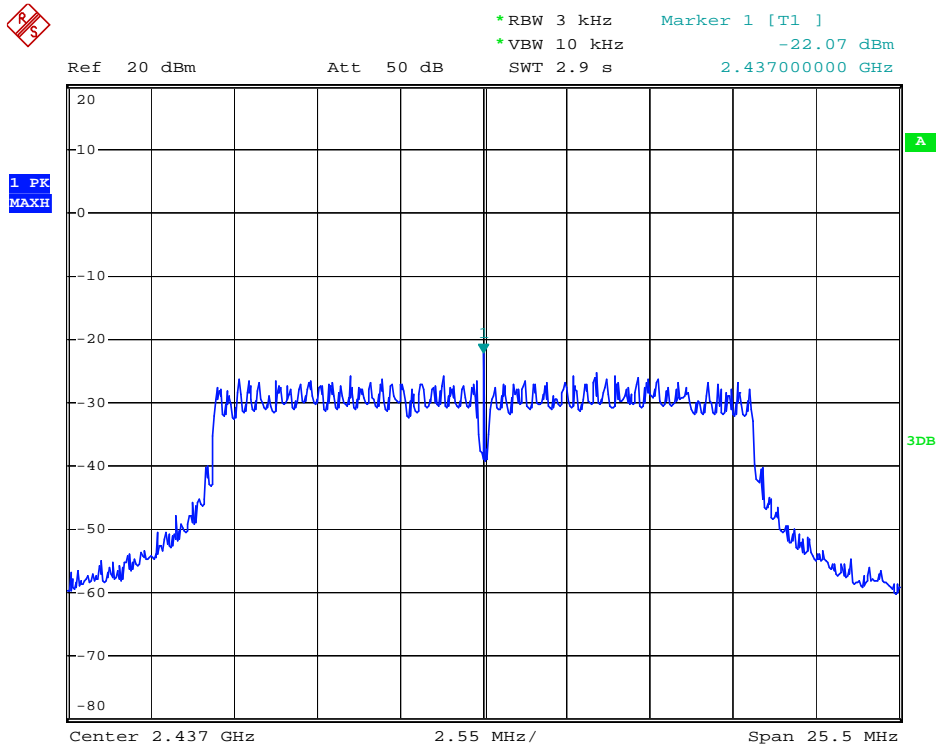


### 802.11g Channel High 2462MHz

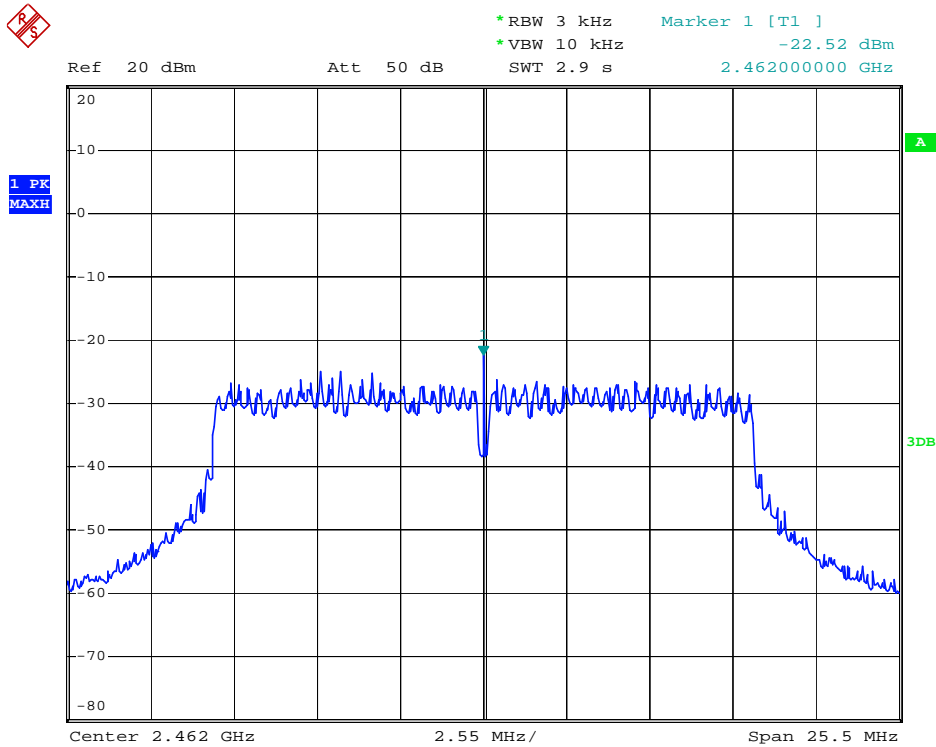





### 802.11n Channel Low 2412MHz (20MHz)

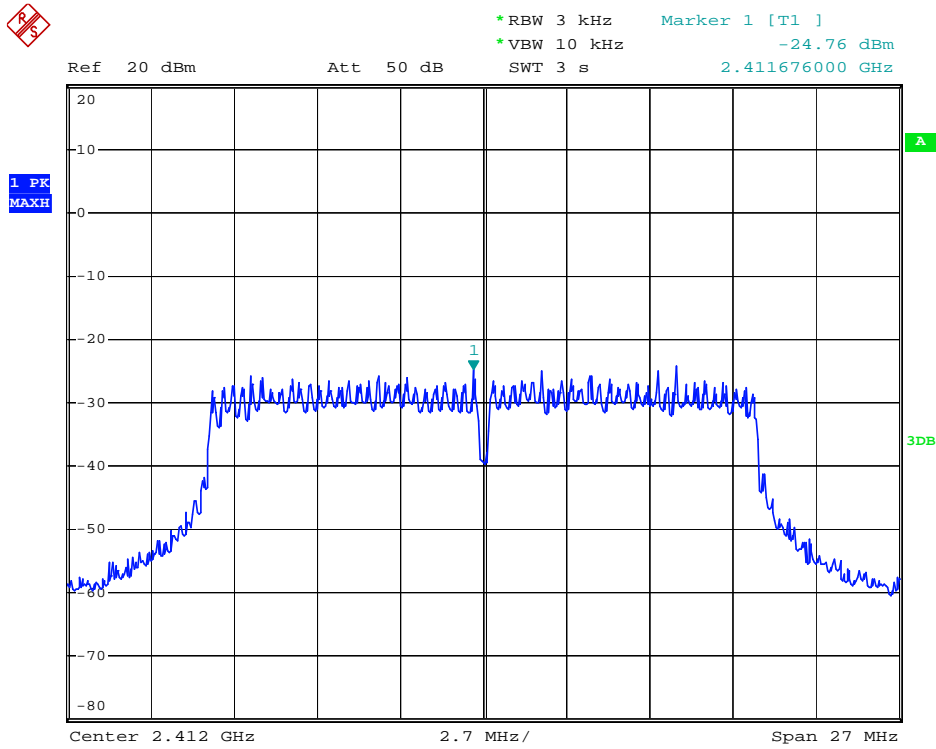


### 802.11n Channel Middle 2437MHz (20MHz)

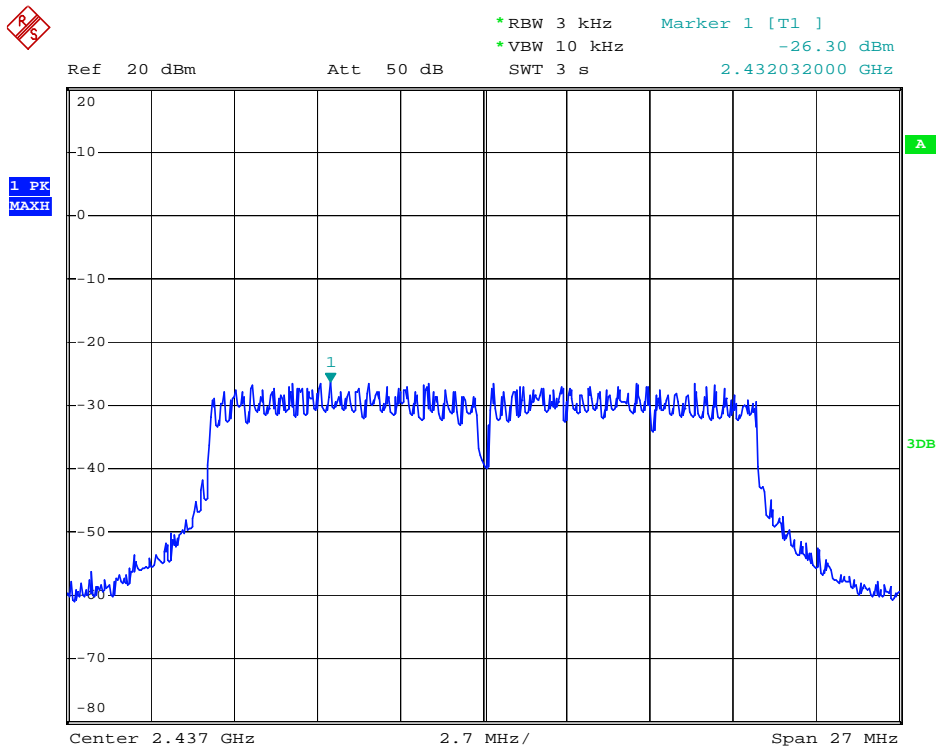


### 802.11n Channel High 2462MHz(20MHz)

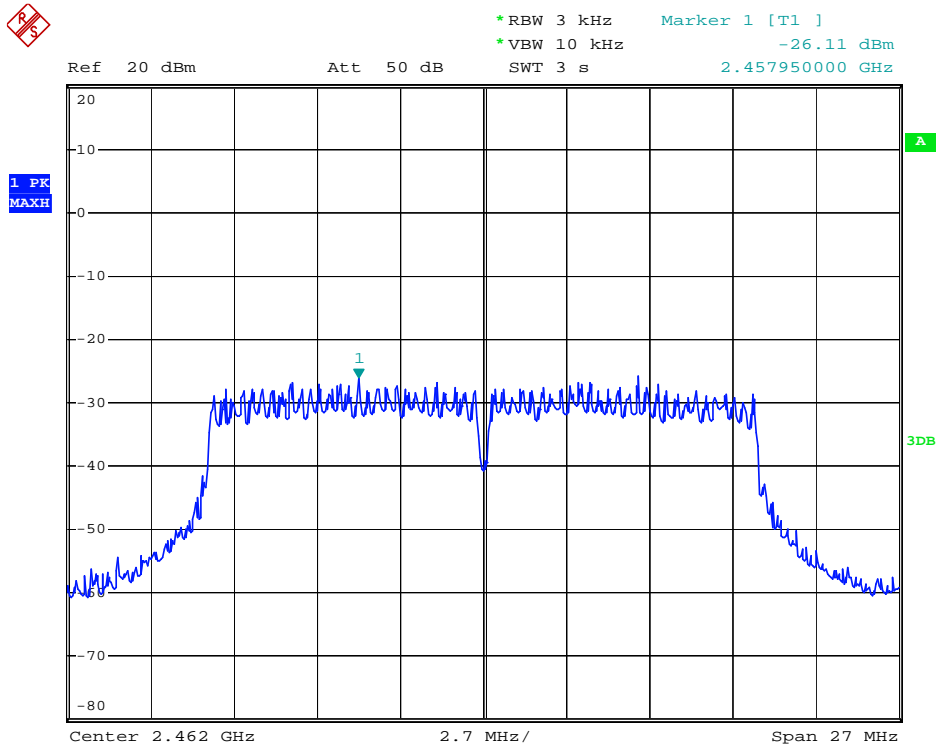


### 802.11n Channel Low 2422MHz (40MHz)

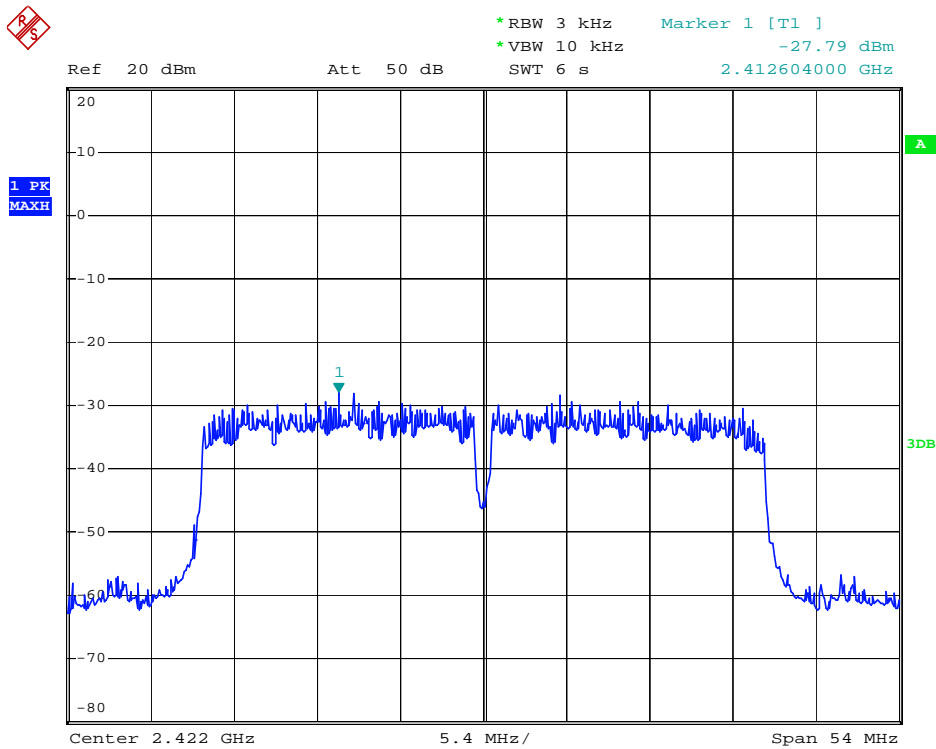

### 802.11n Channel Middle 2437MHz(40MHz)

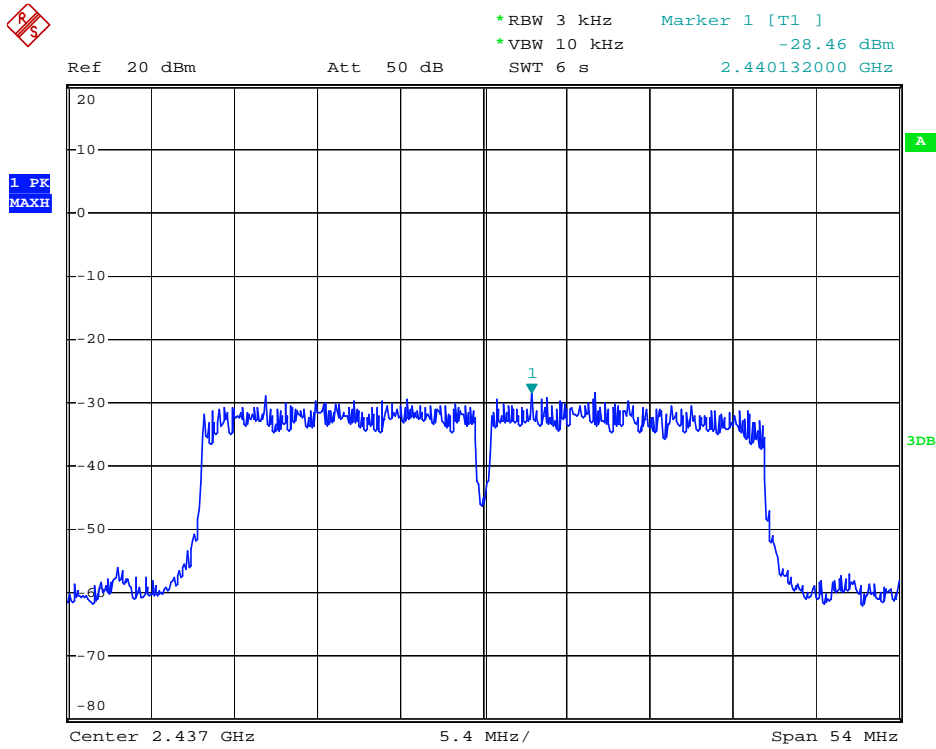


### 802.11n Channel High 2452MHz(40MHz)

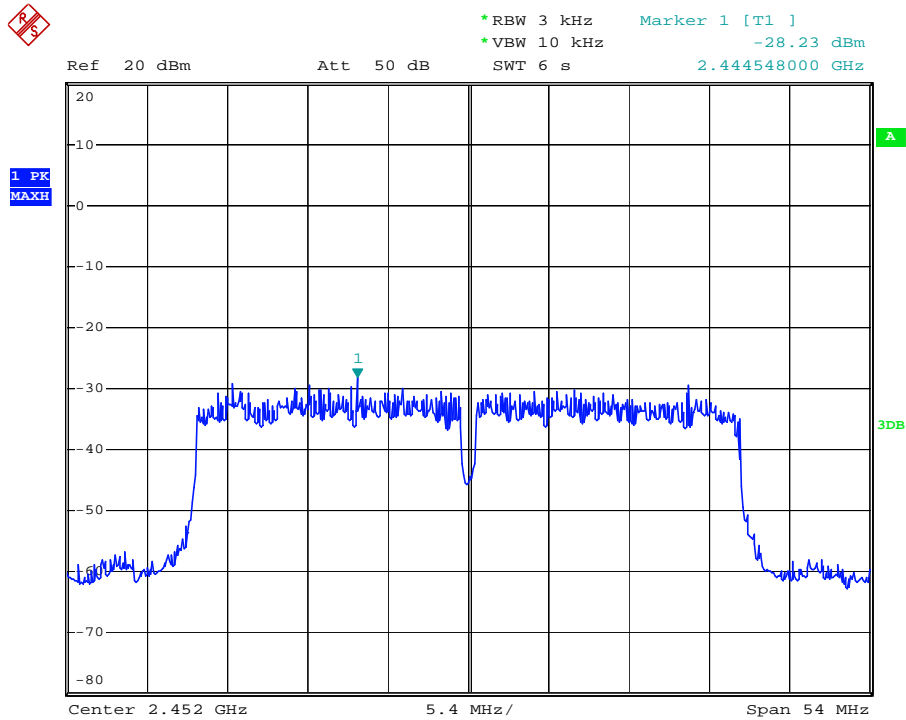

## 8. BAND EDGE COMPLIANCE TEST

### 8.1. Block Diagram of Test Setup



### 8.2. The Requirement For Section 15.247(d)

Section 15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

### 8.3. EUT Configuration on Measurement

The equipment are installed on the emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

### 8.4. Operating Condition of EUT

8.4.1. Setup the EUT and simulator as shown as Section 8.1.

8.4.2. Turn on the power of all equipment.

8.4.3. Let the EUT work in TX modes measure it. The transmit frequency are 2412-2462 and 2422-2452MHz MHz. We select 2412MHz, 2462MHz and 2422MHz, 2452MHz TX frequency to transmit.

### 8.5. Test Procedure

Conducted Band Edge:

8.5.1. The transmitter output was connected to the spectrum analyzer via a low loss cable.

8.5.2. Set RBW of spectrum analyzer to 100kHz and VBW to 300kHz.

Radiate Band Edge:

8.5.3. The EUT is placed on a turntable, which is 0.8m above the ground plane and worked at highest radiated power.

8.5.4. The turntable was rotated for 360 degrees to determine the position of maximum emission level.

8.5.5. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.

8.5.6. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:

RBW=1MHz, VBW=1MHz

8.5.7. The band edges was measured and recorded.

## 8.6. Test Result


The test was performed with 802.11b		
Frequency (MHz)	Result of Band Edge (dBc)	Limit of Band Edge (dBc)
2412	37.11	> 20dBc
2462	38.36	> 20dBc

The test was performed with 802.11g		
Frequency (MHz)	Result of Band Edge (dBc)	Limit of Band Edge (dBc)
2412	30.81	> 20dBc
2462	31.32	> 20dBc


The test was performed with 802.11n (20MHz)		
Frequency (MHz)	Result of Band Edge (dBc)	Limit of Band Edge (dBc)
2412	31.61	> 20dBc
2462	30.24	> 20dBc

The test was performed with 802.11n (40MHz)		
Frequency (MHz)	Result of Band Edge (dBc)	Limit of Band Edge (dBc)
2422	25.73	> 20dBc
2452	27.66	> 20dBc


### 802.11b Channel Low 2412MHz

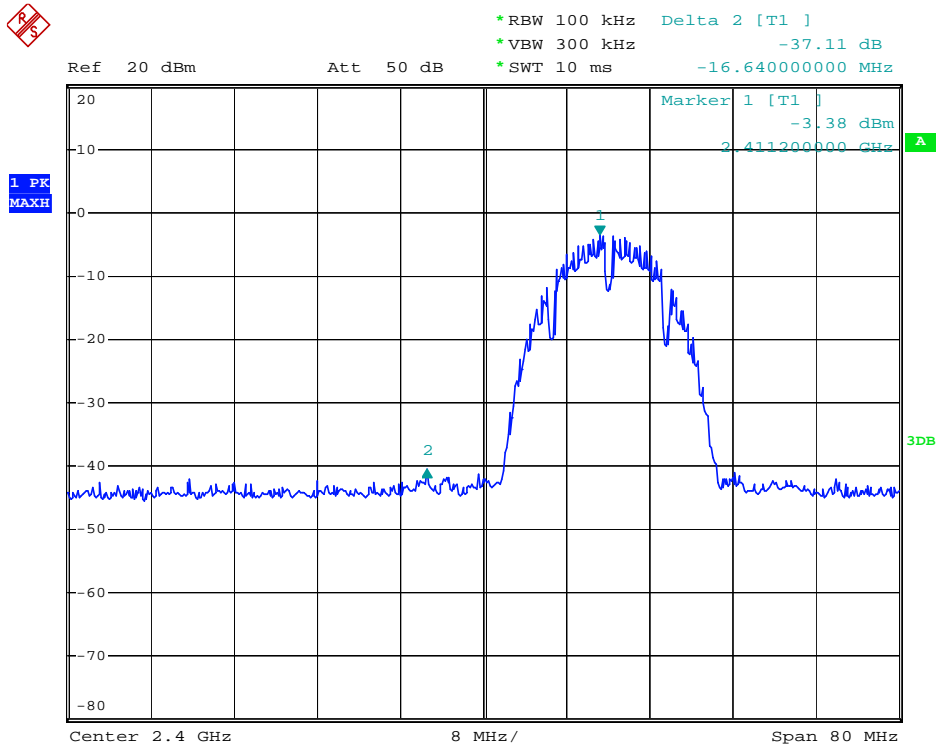


### 802.11b Channel High 2462MHz

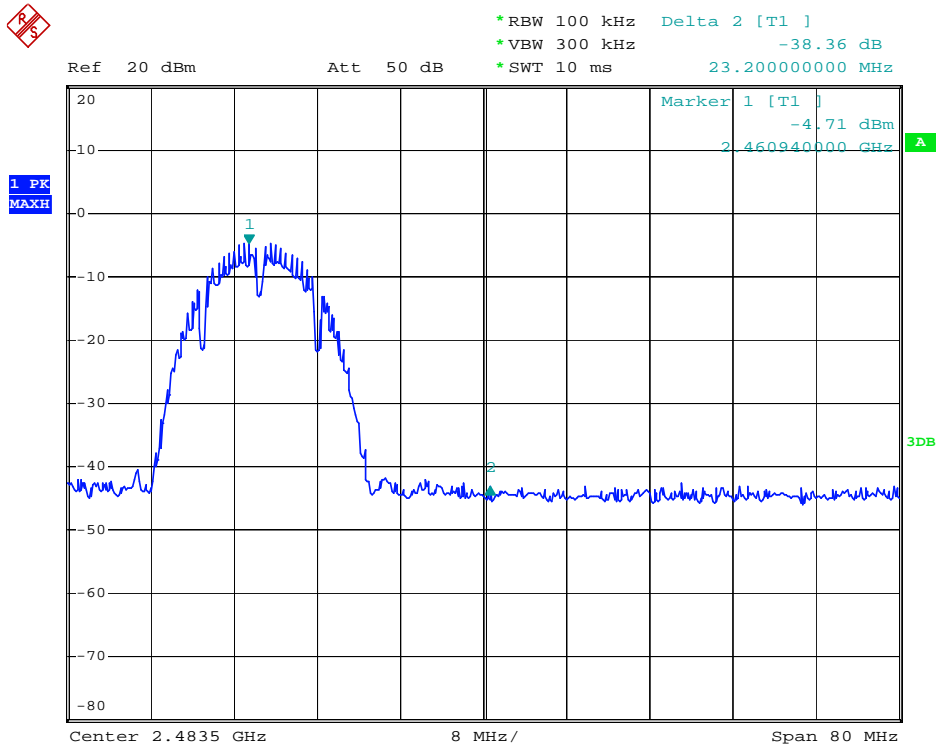


### 802.11g Channel Low 2412MHz

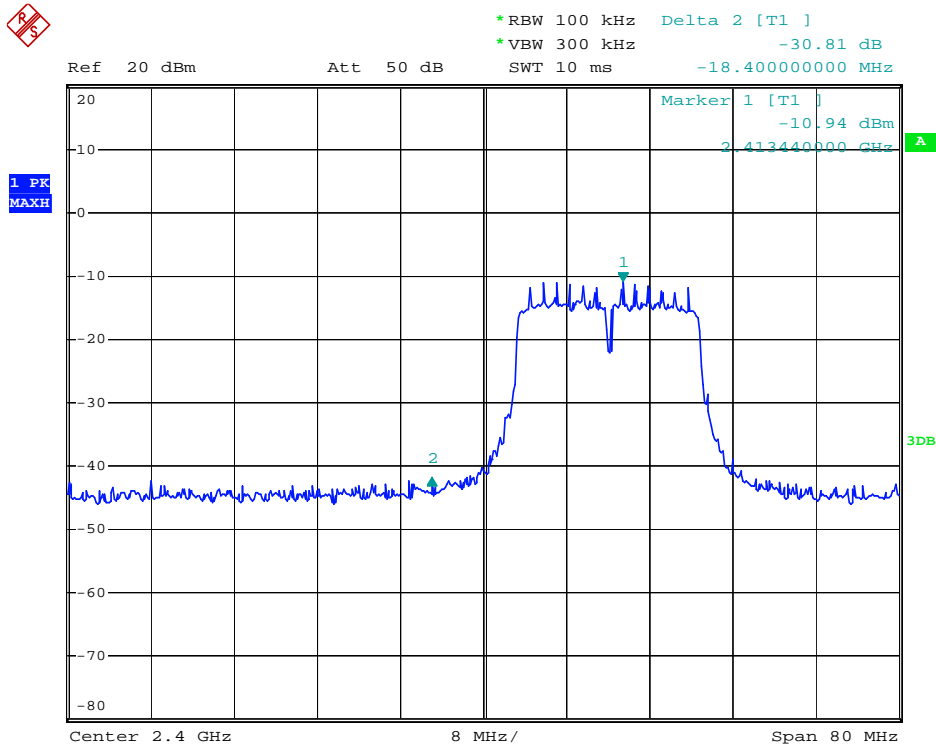


### 802.11g Channel High 2462MHz

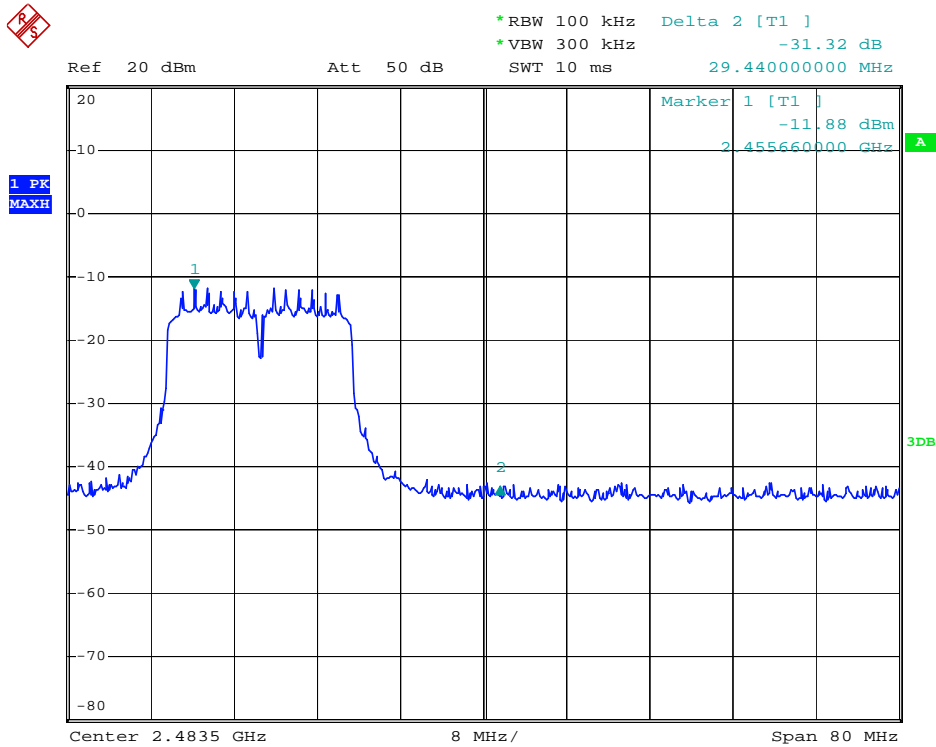

### 802.11n Channel Low 2412MHz (20MHz)

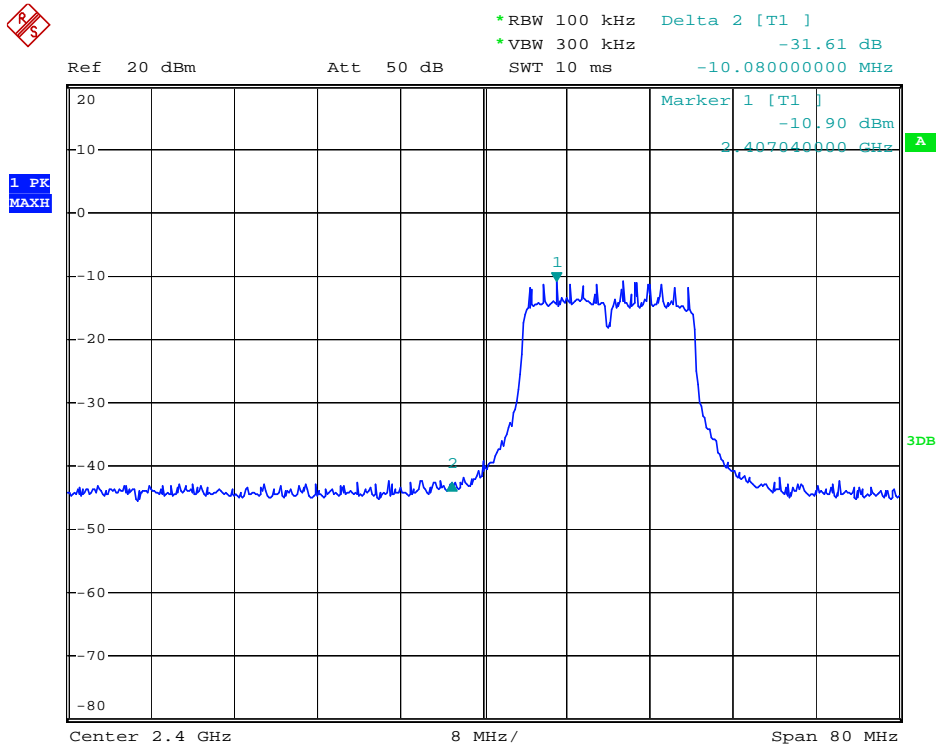


### 802.11n Channel High 2462MHz (20MHz)

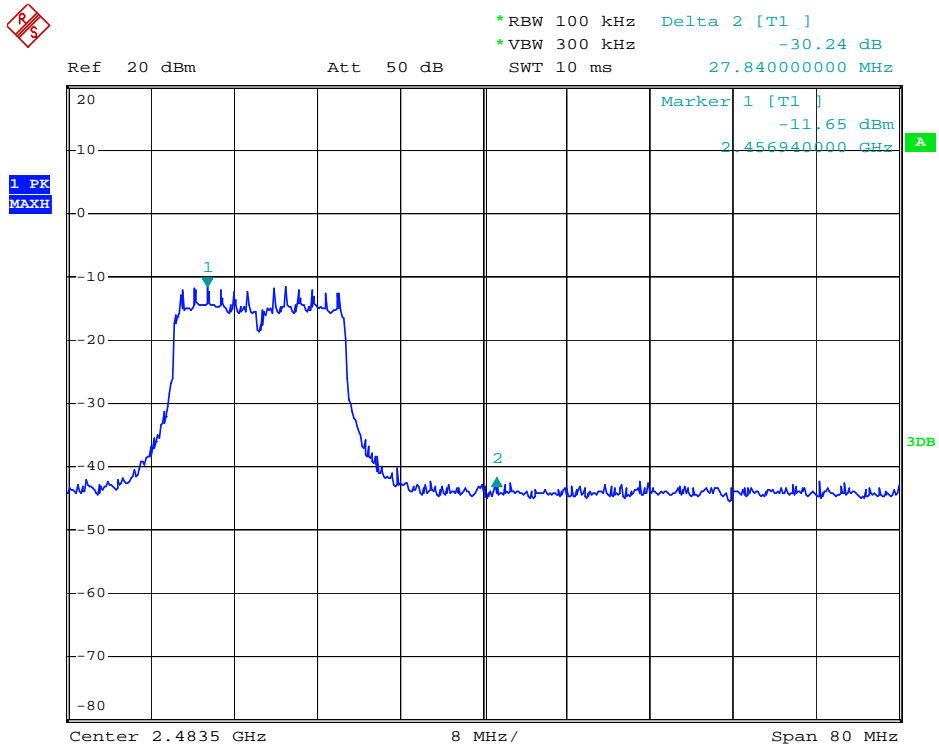




### 802.11n Channel Low 2422MHz (40MHz)

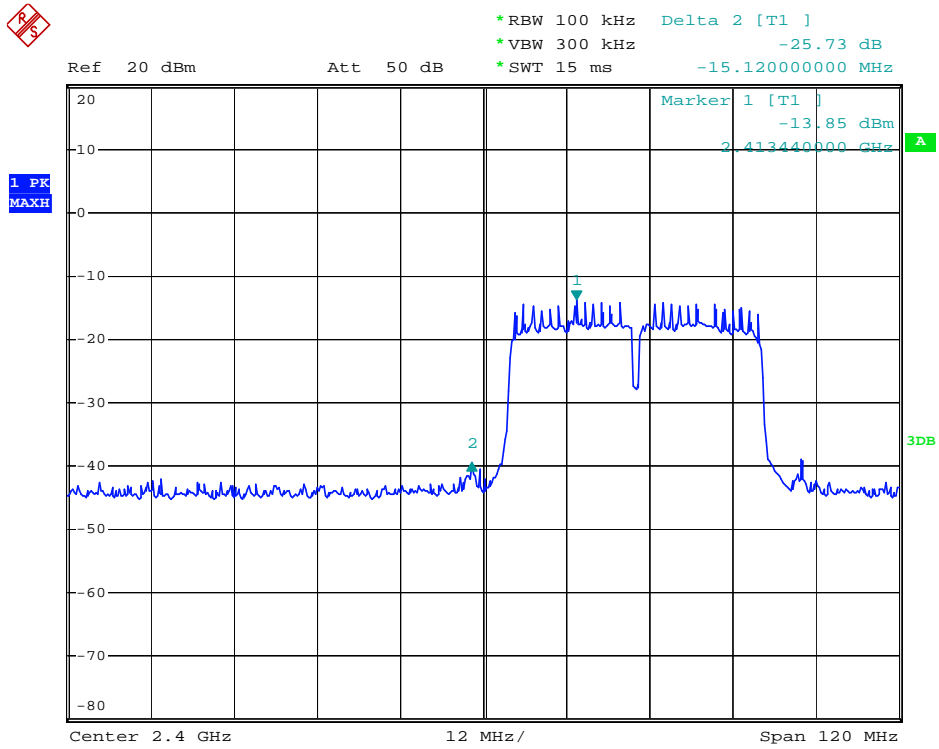

### 802.11n Channel High 2452MHz (40MHz)

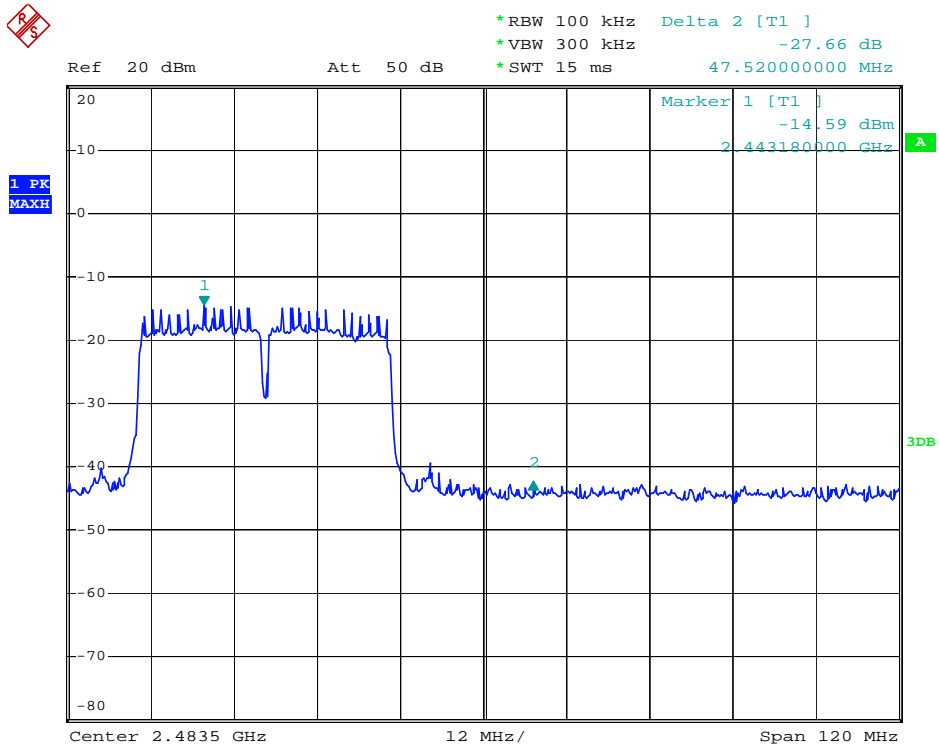

### Radiated Band Edge Result

Note:

1. Emissions attenuated more than 20 dB below the permissible value are not reported.
2. The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:

$$\text{Result} = \text{Reading} + \text{Corrected Factor}$$

3. Display the measurement of peak values.




### ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: RUCKY7 #222	Polarization: Vertical
Standard: FCC 15C	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 13/10/24/
Temp.( C)/Hum.(%) 23 C / 49 %	Time: 15/11/23
EUT: P2P	Engineer Signature: Ricky
Mode: TX Channel 1(802.11b)	Distance: 3m
Model: HC8301	
Manufacturer: ODSONIC	

Note: Report No.:ATE20131932

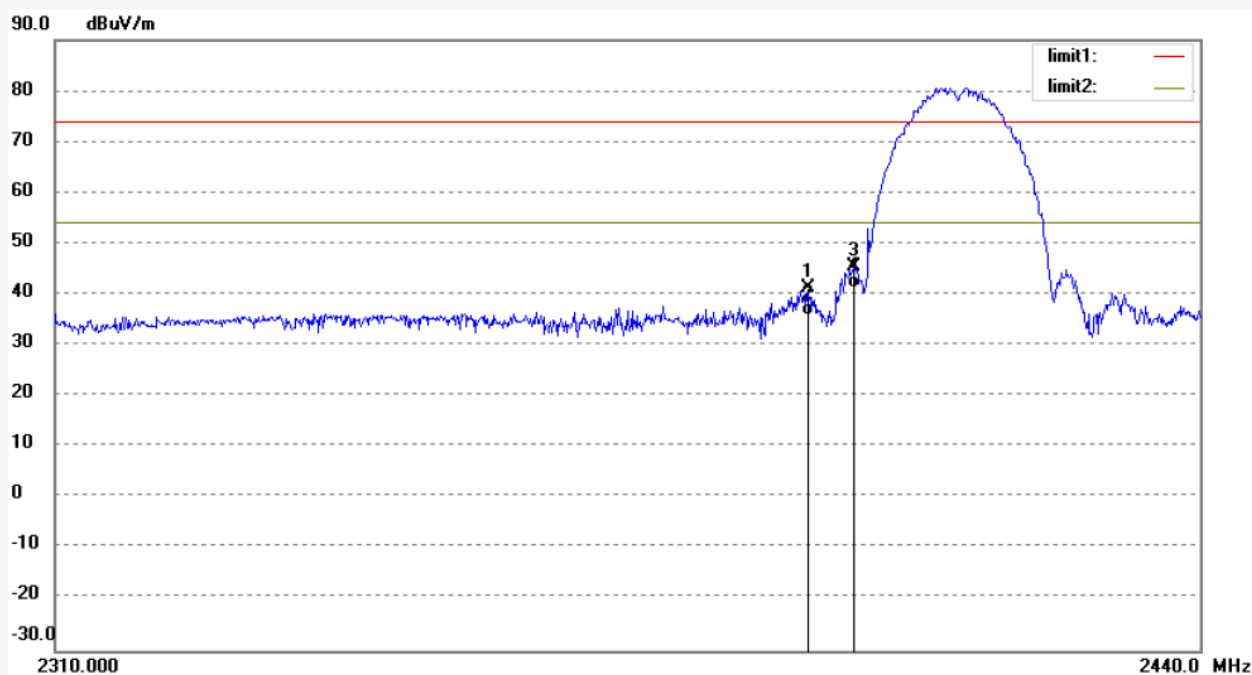

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2394.778	48.87	-7.49	41.38	74.00	-32.62	peak			
2	2394.778	43.36	-7.49	35.87	54.00	-18.13	AVG			
3	2400.000	52.86	-7.46	45.40	74.00	-28.60	peak			
4	2400.000	48.86	-7.46	41.40	54.00	-12.60	AVG			




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: RUCKY7 #223	Polarization: Horizontal
Standard: FCC 15C	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 13/10/24/
Temp.( C)/Hum.(%) 23 C / 49 %	Time: 15/12/15
EUT: P2P	Engineer Signature: Ricky
Mode: TX Channel 1(802.11b)	Distance: 3m
Model: HC8301	
Manufacturer: ODSOINIC	

Note: Report No.:ATE20131932

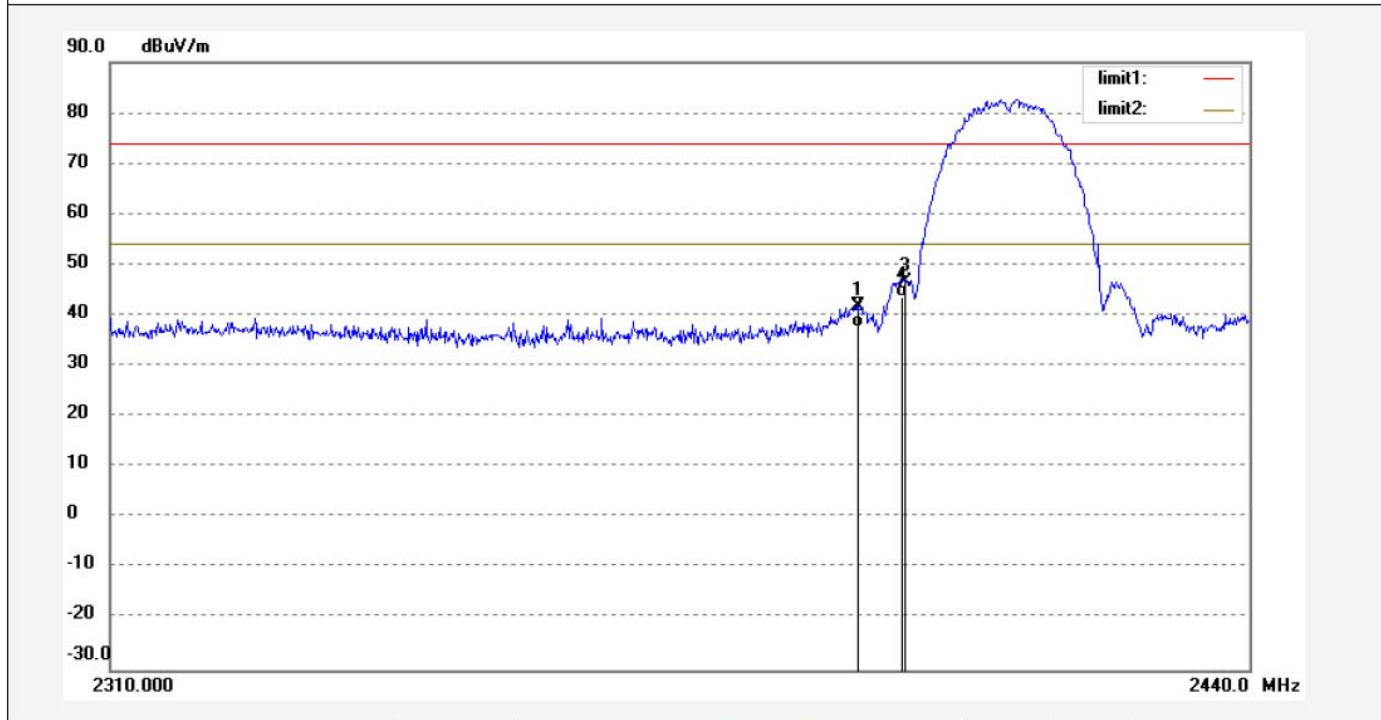

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2394.647	49.25	-7.49	41.76	74.00	-32.24	peak			
2	2394.647	45.29	-7.49	37.80	54.00	-16.20	AVG			
3	2400.000	54.08	-7.46	46.62	74.00	-27.38	peak			
4	2400.000	51.08	-7.46	43.62	54.00	-10.38	AVG			




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: RUCKY7 #224	Polarization: Horizontal
Standard: FCC 15C	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 13/10/24/
Temp.( C)/Hum.(%) 23 C / 49 %	Time: 15/14/03
EUT: P2P	Engineer Signature: Ricky
Mode: TX Channel 11(802.11b)	Distance: 3m
Model: HC8301	
Manufacturer: ODSOINIC	

Note: Report No.:ATE20131932

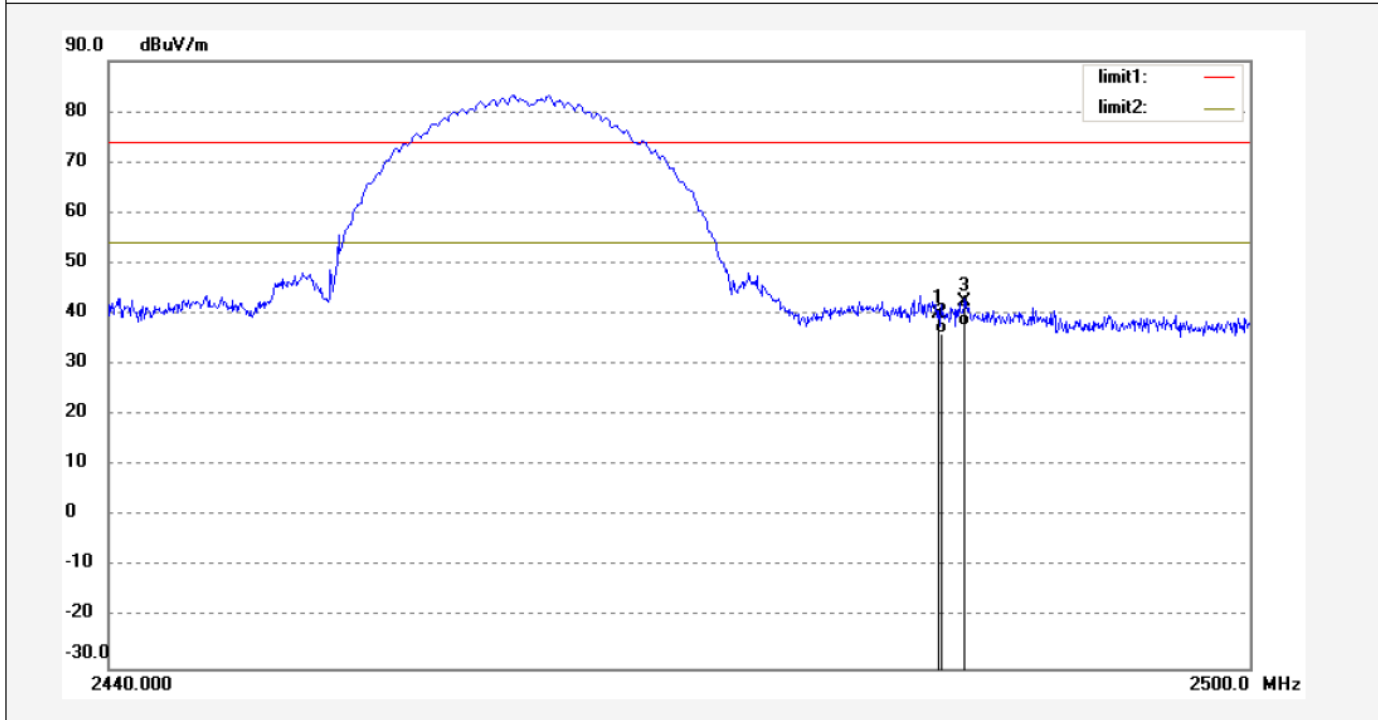

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2483.500	47.37	-7.37	40.00	74.00	-34.00	peak			
2	2483.500	43.38	-7.37	36.01	54.00	-17.99	AVG			
3	2484.893	49.87	-7.38	42.49	74.00	-31.51	peak			
4	2484.893	44.98	-7.38	37.60	54.00	-16.40	AVG			




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: RUCKY7 #225	Polarization: Vertical
Standard: FCC 15C	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 13/10/24/
Temp.( C)/Hum.(%) 23 C / 49 %	Time: 15/15/59
EUT: P2P	Engineer Signature: Ricky
Mode: TX Channel 11(802.11b)	Distance: 3m
Model: HC8301	
Manufacturer: ODSONIC	

Note: Report No.:ATE20131932

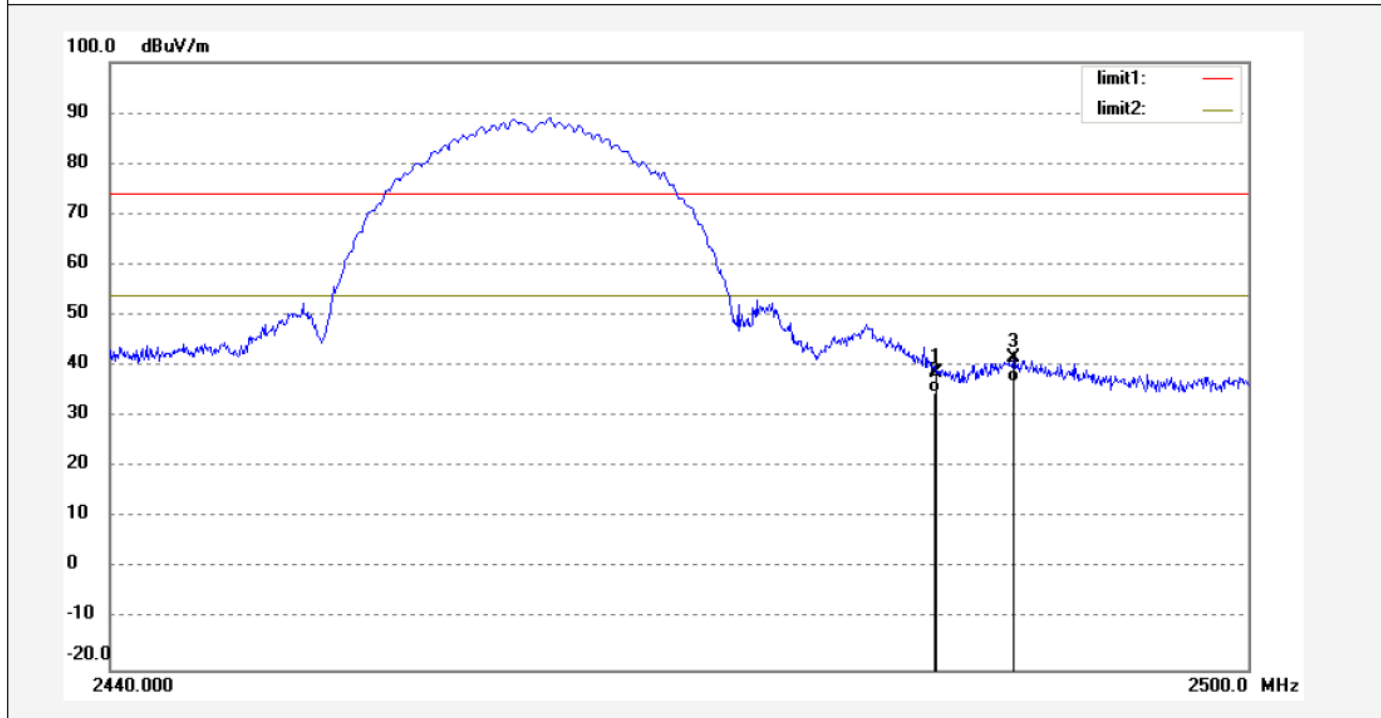

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2483.500	46.01	-7.37	38.64	74.00	-35.36	peak			
2	2483.500	42.11	-7.37	34.74	54.00	-19.26	AVG			
3	2487.556	48.98	-7.38	41.60	74.00	-32.40	peak			
4	2487.556	44.36	-7.38	36.98	54.00	-17.02	AVG			




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: RUCKY7 #228	Polarization: Horizontal
Standard: FCC 15C	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 13/10/24/
Temp.( C)/Hum.(%) 23 C / 49 %	Time: 15/21/28
EUT: P2P	Engineer Signature: Ricky
Mode: TX Channel 1(802.11g)	Distance: 3m
Model: HC8301	
Manufacturer: ODSOINIC	

Note: Report No.:ATE20131932

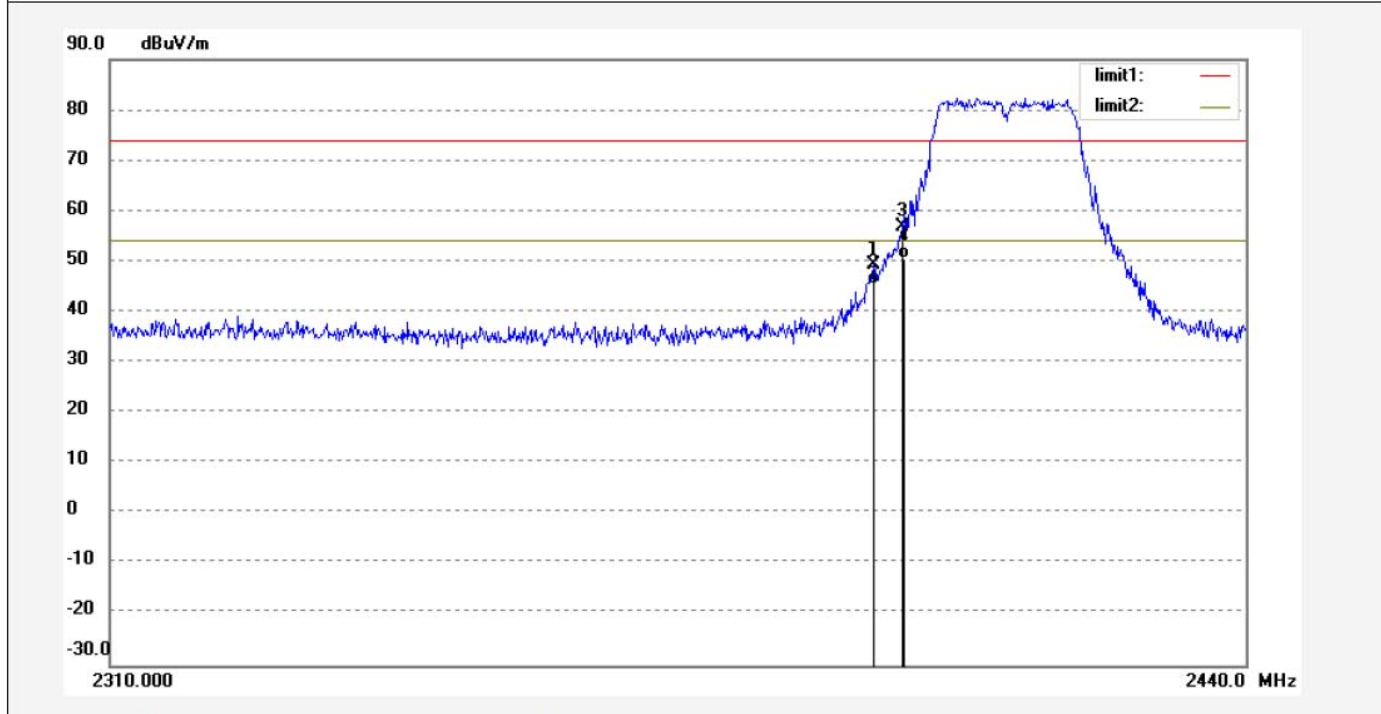

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2396.618	56.78	-7.48	49.30	74.00	-24.70	peak			
2	2396.618	52.99	-7.48	45.51	54.00	-8.49	AVG			
3	2400.000	64.21	-7.46	56.75	74.00	-17.25	peak			
4	2400.000	58.03	-7.46	50.57	54.00	-3.43	AVG			




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: RUCKY7 #229	Polarization: Vertical
Standard: FCC 15C	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 13/10/24/
Temp.( C)/Hum.(%) 23 C / 49 %	Time: 15/24/20
EUT: P2P	Engineer Signature: Ricky
Mode: TX Channel 1(802.11g)	Distance: 3m
Model: HC8301	
Manufacturer: ODSONIC	

Note: Report No.:ATE20131932

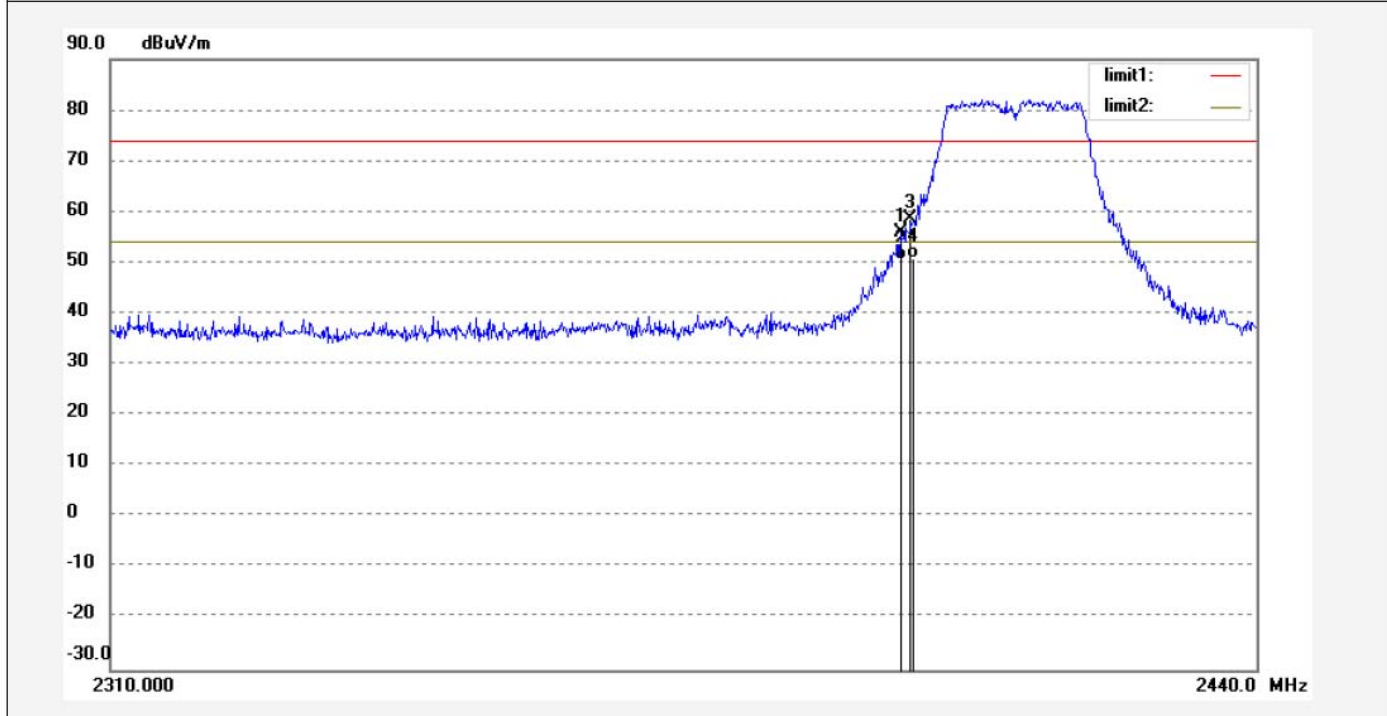

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2398.855	63.33	-7.46	55.87	74.00	-18.13	peak			
2	2398.855	58.15	-7.46	50.69	54.00	-3.31	AVG			
3	2400.000	66.19	-7.46	58.73	74.00	-15.27	peak			
4	2400.000	58.24	-7.46	50.78	54.00	-3.22	AVG			



**ACCURATE TECHNOLOGY CO., LTD.**


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: RUCKY7 #227  
Standard: FCC 15C  
Test item: Radiation Test  
Temp.( C)/Hum.(%) 23 C / 49 %  
EUT: P2P  
Mode: TX Channel 11(802.11g)  
Model: HC8301  
Manufacturer: ODSOINIC

Polarization:Horizontal  
Power Source: AC 120V/60Hz  
Date: 13/10/24/  
Time: 15/19/19  
Engineer Signature: Ricky  
Distance: 3m

Note: Report No.:ATE20131932

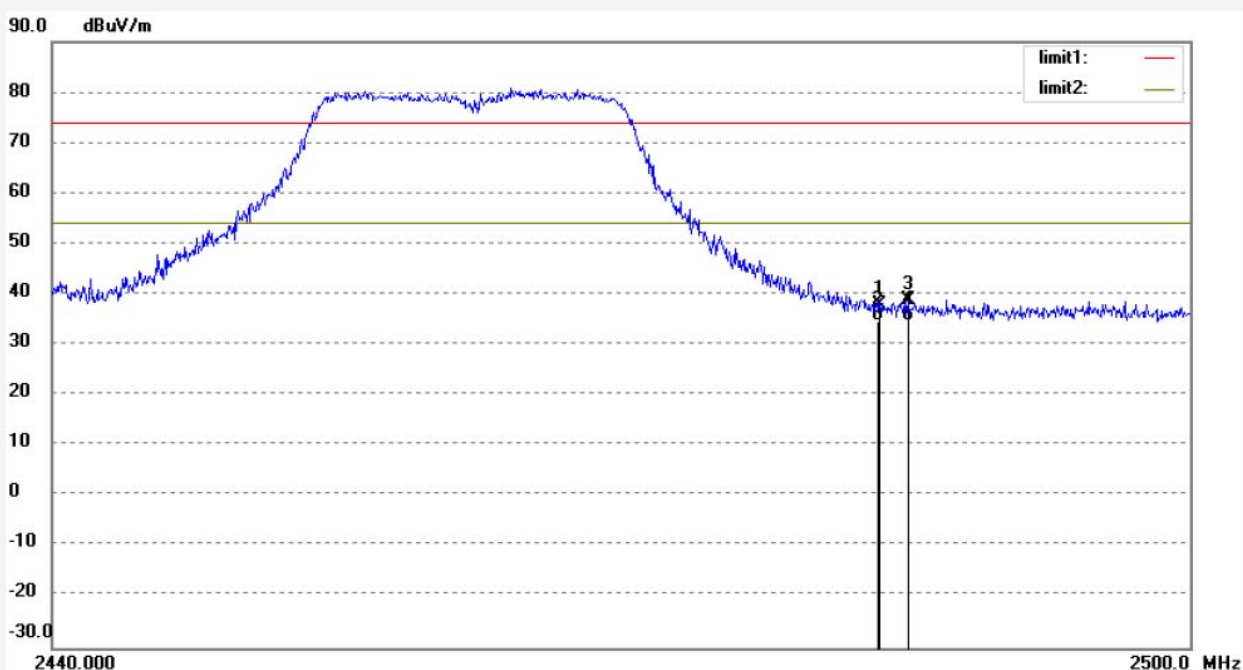

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2483.500	45.38	-7.37	38.01	74.00	-35.99	peak			
2	2483.500	42.00	-7.37	34.63	54.00	-19.37	AVG			
3	2485.014	46.35	-7.38	38.97	74.00	-35.03	peak			
4	2485.014	41.89	-7.38	34.51	54.00	-19.49	AVG			





**ACCURATE TECHNOLOGY CO., LTD.**

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 1# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: RUCKY7 #226	Polarization: Vertical
Standard: FCC 15C	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 13/10/24/
Temp.( C)/Hum.(%) 23 C / 49 %	Time: 15/17/52
EUT: P2P	Engineer Signature: Ricky
Mode: TX Channel 11(802.11g)	Distance: 3m
Model: HC8301	
Manufacturer: ODSONIC	

Note: Report No.:ATE20131932

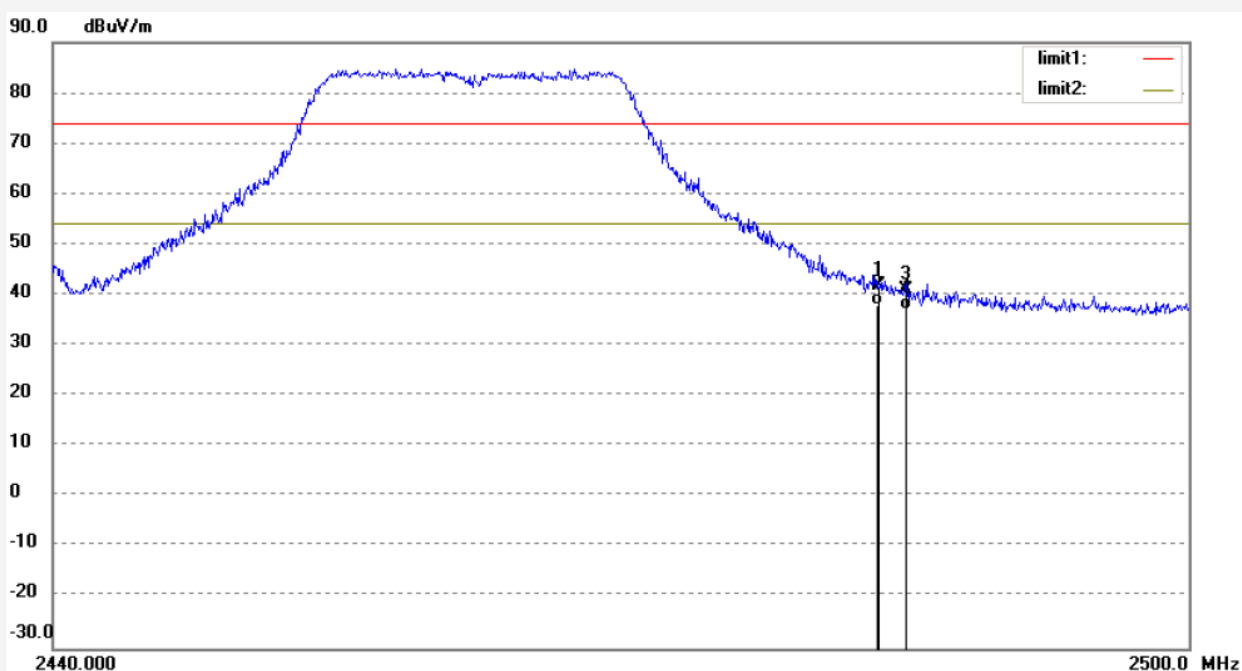

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2483.500	49.22	-7.37	41.85	74.00	-32.15	peak			
2	2483.500	45.27	-7.37	37.90	54.00	-16.10	AVG			
3	2484.954	48.41	-7.38	41.03	74.00	-32.97	peak			
4	2484.954	44.56	-7.38	37.18	54.00	-16.82	AVG			




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: RUCKY7 #230	Polarization: Vertical
Standard: FCC 15C	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 13/10/24/
Temp.( C)/Hum.(%) 23 C / 49 %	Time: 15/26/49
EUT: P2P	Engineer Signature: Ricky
Mode: TX Channel 1(802.11n)20MHz	Distance: 3m
Model: HC8301	
Manufacturer: ODSONIC	

Note: Report No.:ATE20131932

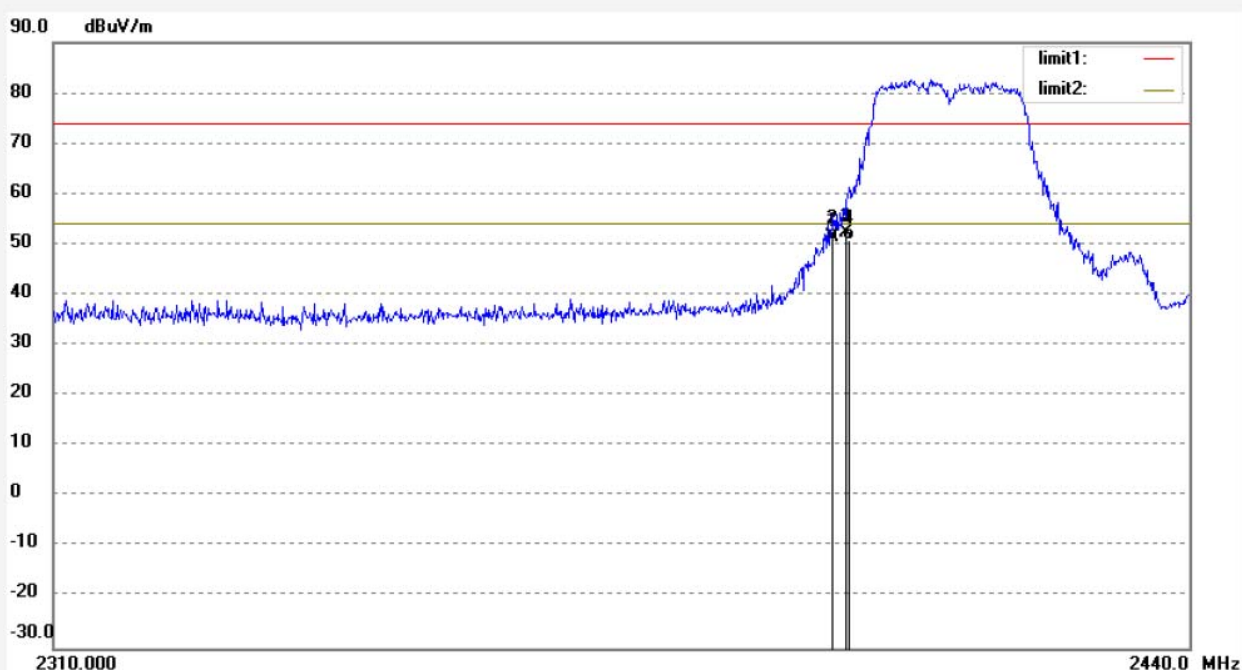

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2398.460	58.78	-7.47	51.31	74.00	-22.69	peak			
2	2398.460	58.24	-7.47	50.77	54.00	-3.23	AVG			
3	2400.000	59.79	-7.46	52.33	74.00	-21.67	peak			
4	2400.000	58.28	-7.46	50.82	54.00	-3.18	AVG			




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: RUCKY7 #231	Polarization: Horizontal
Standard: FCC 15C	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 13/10/24/
Temp.( C)/Hum.(%) 23 C / 49 %	Time: 15/27/59
EUT: P2P	Engineer Signature: Ricky
Mode: TX Channel 1(802.11n)20MHz	Distance: 3m
Model: HC8301	
Manufacturer: ODSONIC	

Note: Report No.:ATE20131932

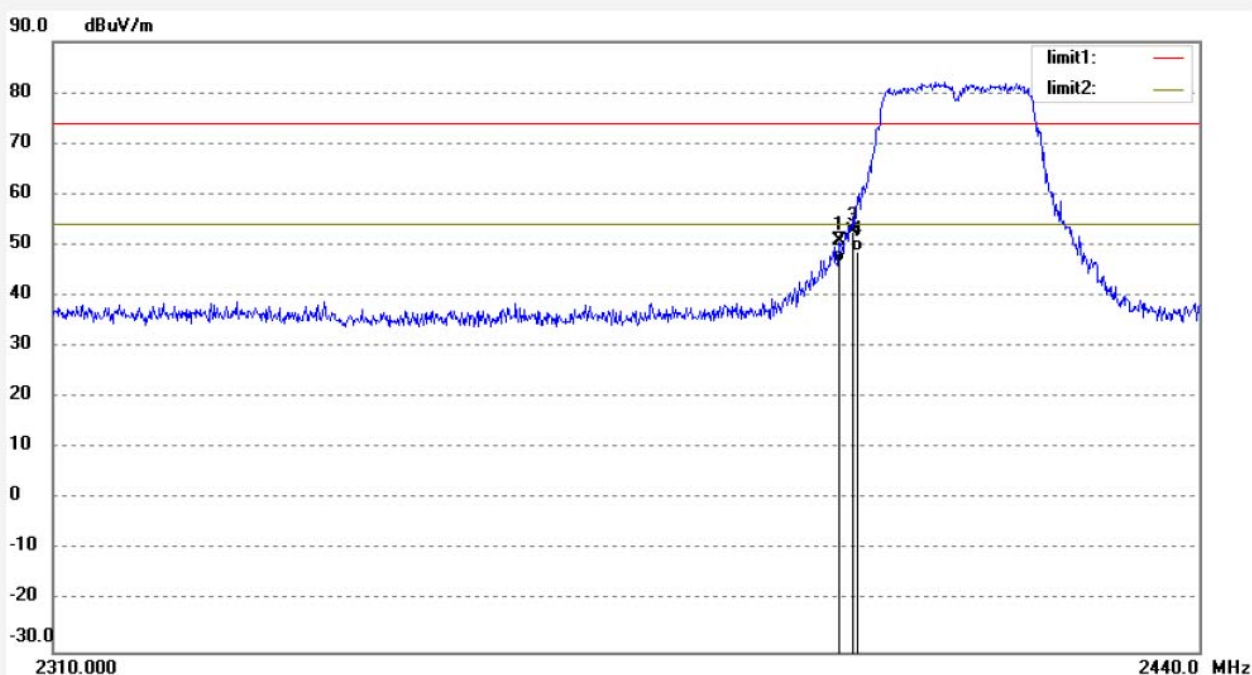

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2398.328	58.22	-7.47	50.75	74.00	-23.25	peak			
2	2398.328	54.21	-7.47	46.74	54.00	-7.26	AVG			
3	2400.000	60.18	-7.46	52.72	74.00	-21.28	peak			
4	2400.000	56.34	-7.46	48.88	54.00	-5.12	AVG			




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: RUCKY7 #233	Polarization: Vertical
Standard: FCC 15C	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 13/10/24/
Temp.( C)/Hum.(%) 23 C / 49 %	Time: 15/34/16
EUT: P2P	Engineer Signature: Ricky
Mode: TX Channel 11(802.11n)20MHz	Distance: 3m
Model: HC8301	
Manufacturer: ODSOINIC	

Note: Report No.:ATE20131932

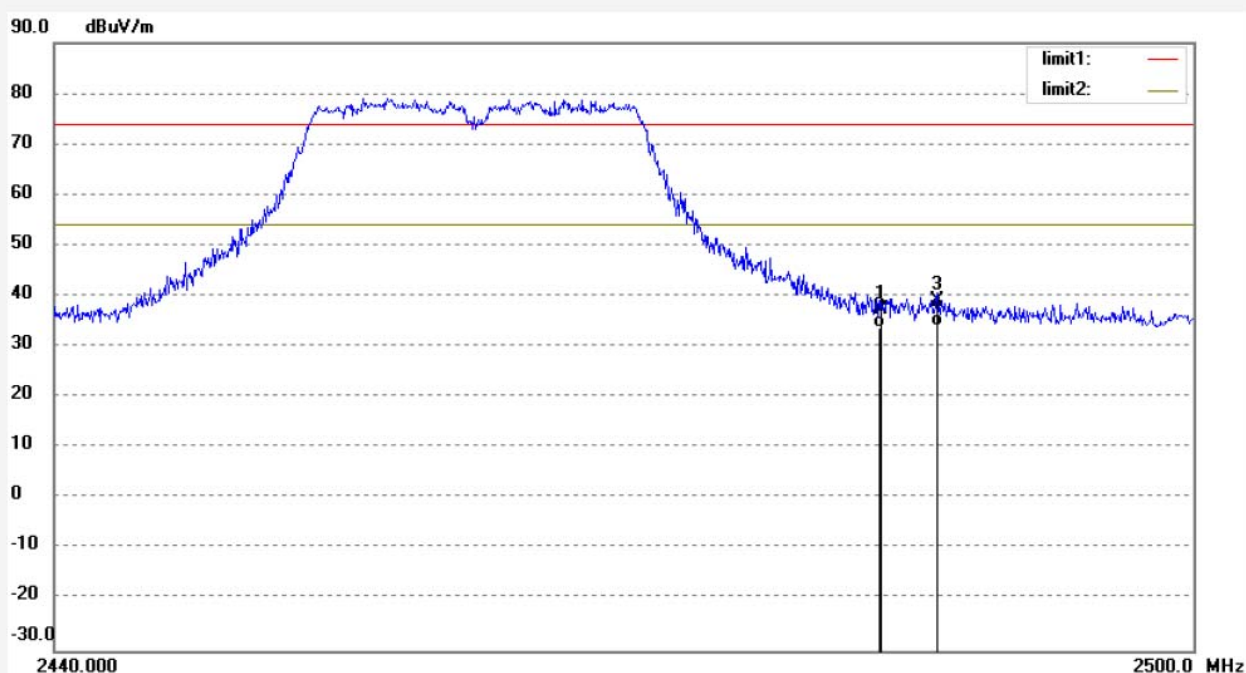

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2483.500	44.71	-7.37	37.34	74.00	-36.66	peak			
2	2483.500	41.03	-7.37	33.66	54.00	-20.34	AVG			
3	2486.406	46.55	-7.39	39.16	74.00	-34.84	peak			
4	2486.406	41.37	-7.39	33.98	54.00	-20.02	AVG			




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: RUCKY7 #232	Polarization: Horizontal
Standard: FCC 15C	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 13/10/24/
Temp.( C)/Hum.(%) 23 C / 49 %	Time: 15/30/12
EUT: P2P	Engineer Signature: Ricky
Mode: TX Channel 11(802.11n)20MHz	Distance: 3m
Model: HC8301	
Manufacturer: ODSOINIC	

Note: Report No.:ATE20131932

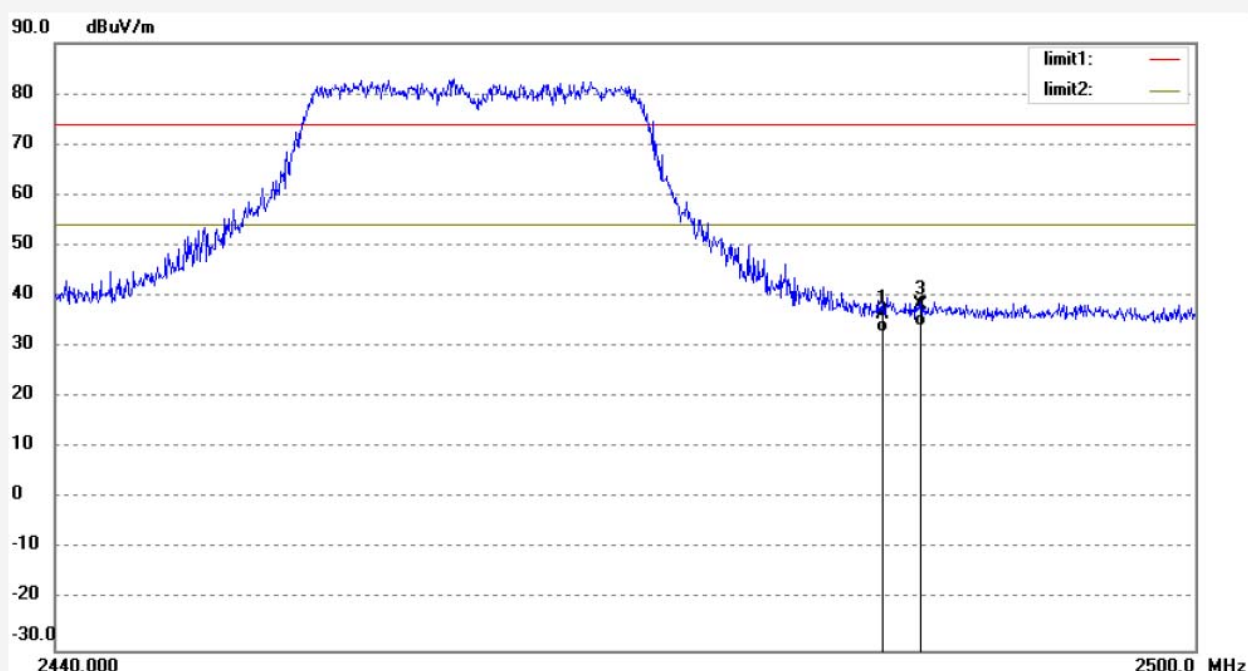

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2483.500	43.78	-7.37	36.41	74.00	-37.59	peak			
2	2483.500	40.18	-7.37	32.81	54.00	-21.19	AVG			
3	2485.438	45.55	-7.38	38.17	74.00	-35.83	peak			
4	2485.438	41.37	-7.38	33.99	54.00	-20.01	AVG			




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: RUCKY7 #236	Polarization: Horizontal
Standard: FCC 15C	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 13/10/24/
Temp.( C)/Hum.(%) 23 C / 49 %	Time: 15/40/53
EUT: P2P	Engineer Signature: Ricky
Mode: TX Channel 3(802.11n)40MHz	Distance: 3m
Model: HC8301	
Manufacturer: ODSOINIC	

Note: Report No.:ATE20131932

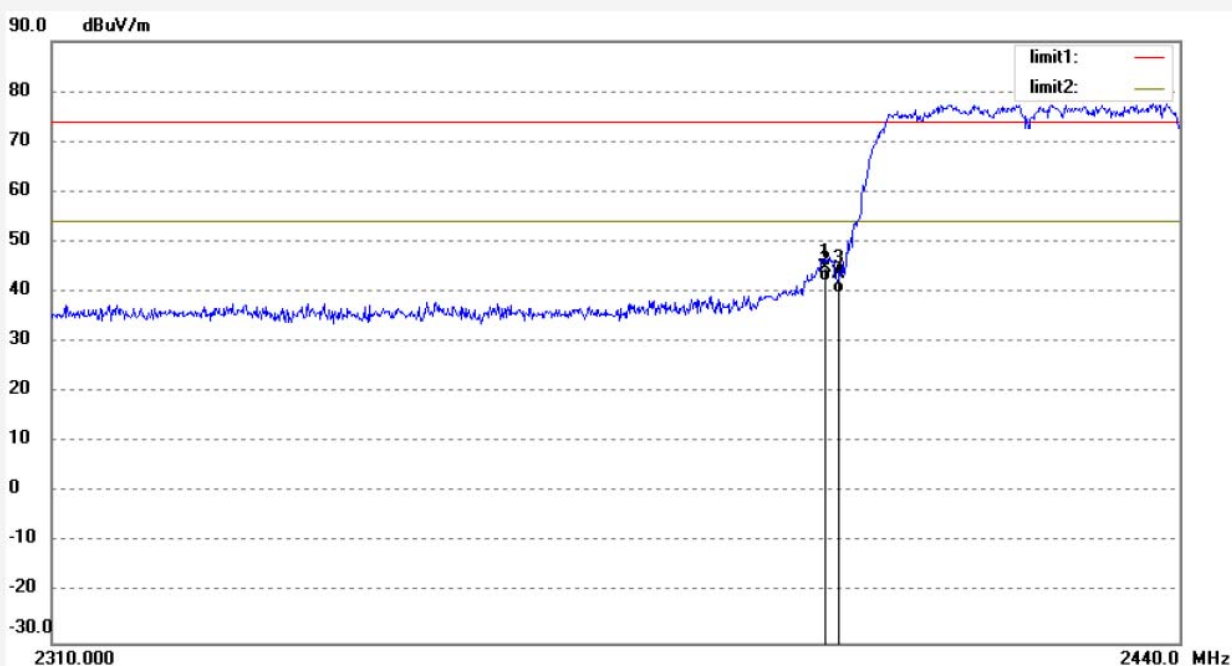

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2398.460	52.21	-7.47	44.74	74.00	-29.26	peak			
2	2398.460	49.68	-7.47	42.21	54.00	-11.79	AVG			
3	2400.000	51.21	-7.46	43.75	74.00	-30.25	peak			
4	2400.000	47.35	-7.46	39.89	54.00	-14.11	AVG			




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: RUCKY7 #237	Polarization: Vertical
Standard: FCC 15C	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 13/10/24/
Temp.( C)/Hum.(%) 23 C / 49 %	Time: 15/43/03
EUT: P2P	Engineer Signature: Ricky
Mode: TX Channel 3(802.11n)40MHz	Distance: 3m
Model: HC8301	
Manufacturer: ODSOINIC	

Note: Report No.:ATE20131932

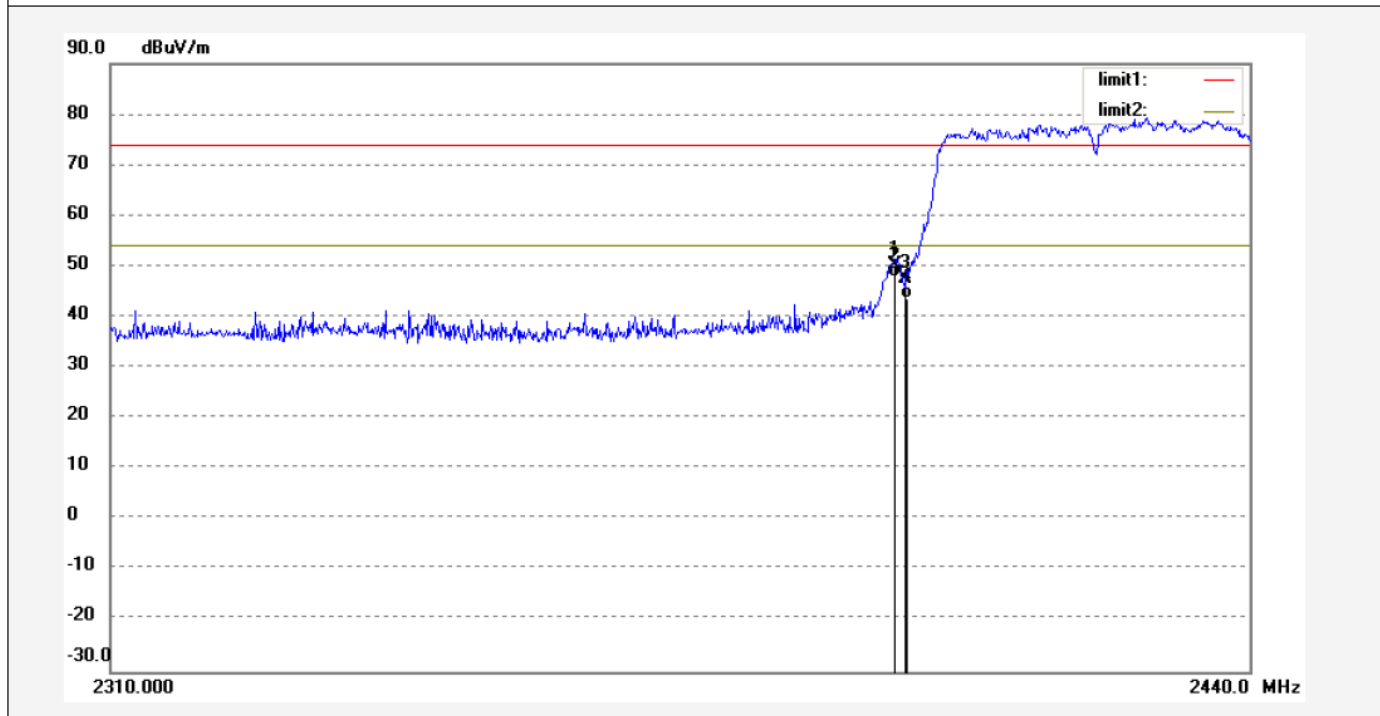

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2398.723	57.68	-7.47	50.21	74.00	-23.79	peak			
2	2398.723	55.46	-7.47	47.99	54.00	-6.01	AVG			
3	2400.000	54.99	-7.46	47.53	74.00	-26.47	peak			
4	2400.000	51.21	-7.46	43.75	54.00	-10.25	AVG			




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: RUCKY7 #235	Polarization:Horizontal
Standard: FCC 15C	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 13/10/24/
Temp.( C)/Hum.(%) 23 C / 49 %	Time: 15/38/49
EUT: P2P	Engineer Signature: Ricky
Mode: TX Channel 9(802.11n)40MHz	Distance: 3m
Model: HC8301	
Manufacturer: ODSOINIC	

Note: Report No.:ATE20131932

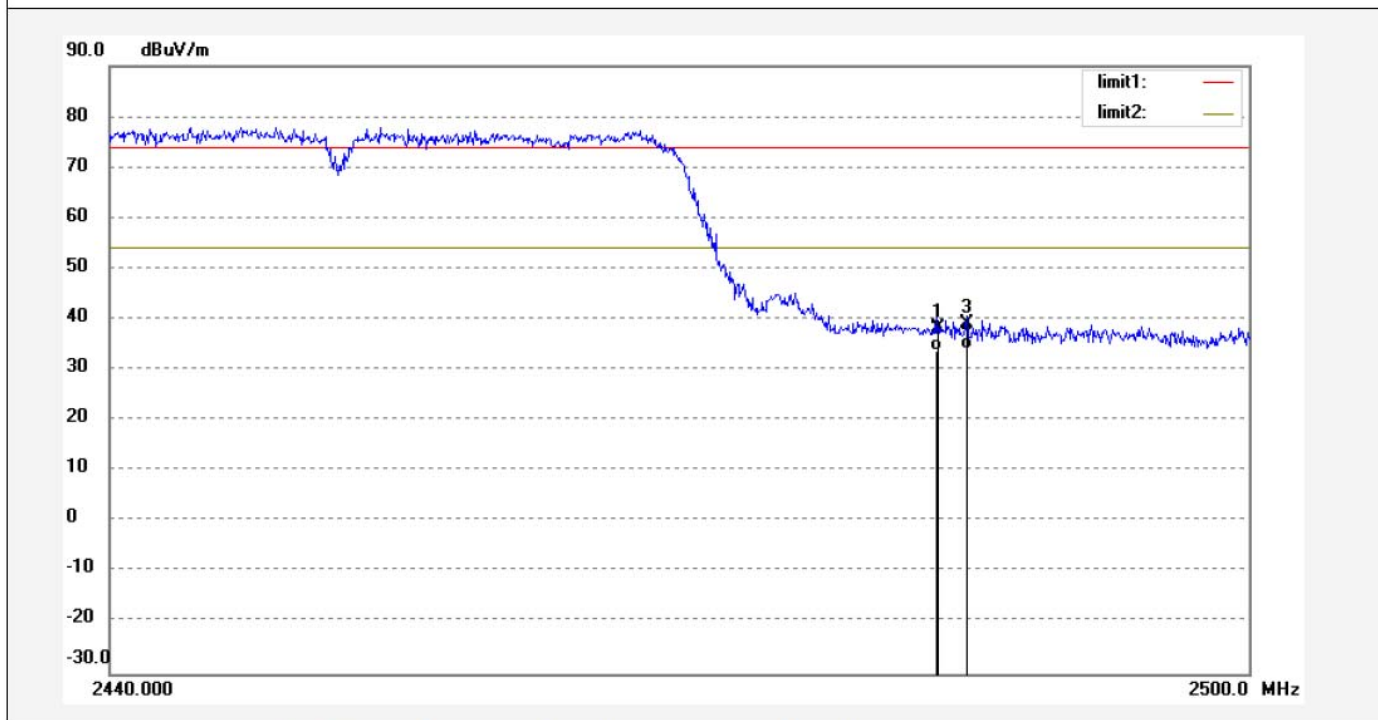

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2483.500	45.67	-7.37	38.30	74.00	-35.70	peak			
2	2483.500	41.23	-7.37	33.86	54.00	-20.14	AVG			
3	2485.014	46.68	-7.38	39.30	74.00	-34.70	peak			
4	2485.014	41.36	-7.38	33.98	54.00	-20.02	AVG			






**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: RUCKY7 #234	Polarization: Vertical
Standard: FCC 15C	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 13/10/24/
Temp.( C)/Hum.(%) 23 C / 49 %	Time: 15/37/16
EUT: P2P	Engineer Signature: Ricky
Mode: TX Channel 9(802.11n)40MHz	Distance: 3m
Model: HC8301	
Manufacturer: ODSOINIC	

Note: Report No.:ATE20131932

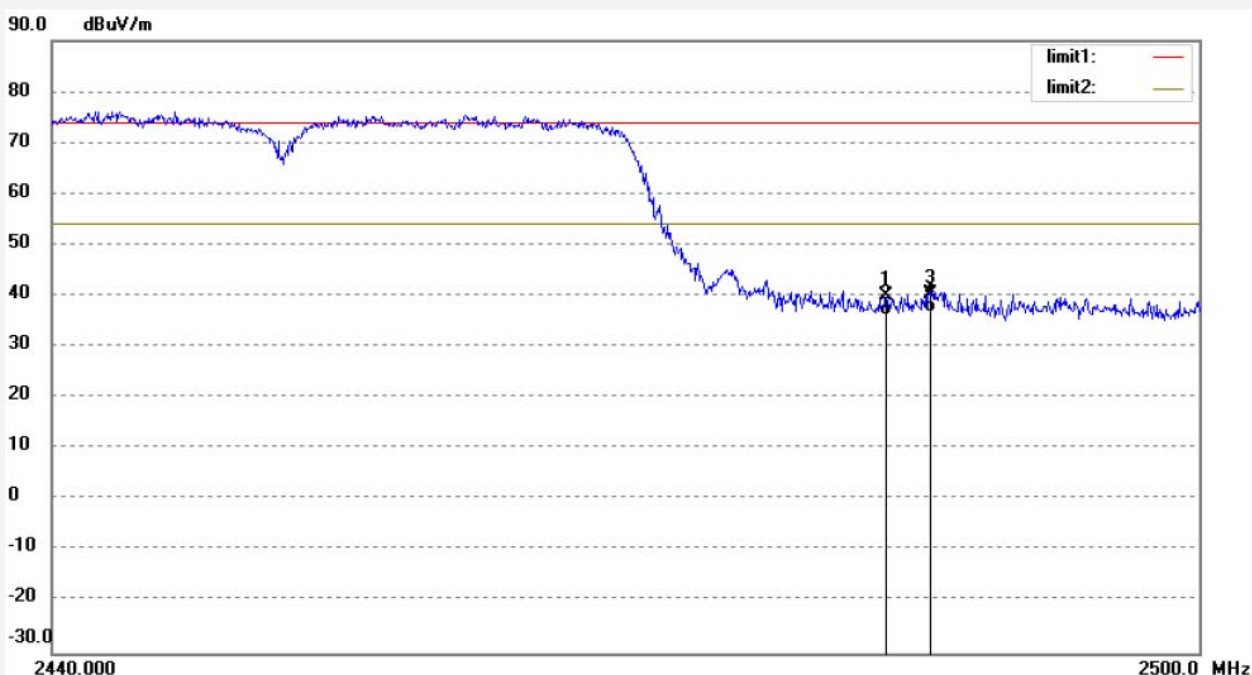


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2483.500	47.39	-7.37	40.02	74.00	-33.98	peak			
2	2483.500	43.45	-7.37	36.08	54.00	-17.92	AVG			
3	2485.861	47.61	-7.38	40.23	74.00	-33.77	peak			
4	2485.861	44.12	-7.38	36.74	54.00	-17.26	AVG			

## 9. RADIATED SPURIOUS EMISSION TEST


### 9.1. Block Diagram of Test Setup

#### 9.1.1. Block diagram of connection between the EUT and peripherals

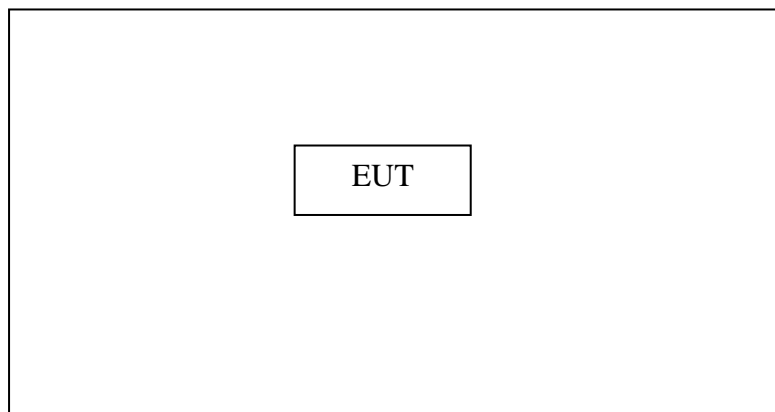

Setup: Transmitting mode

#### 9.1.2. Semi-Anechoic Chamber Test Setup Diagram

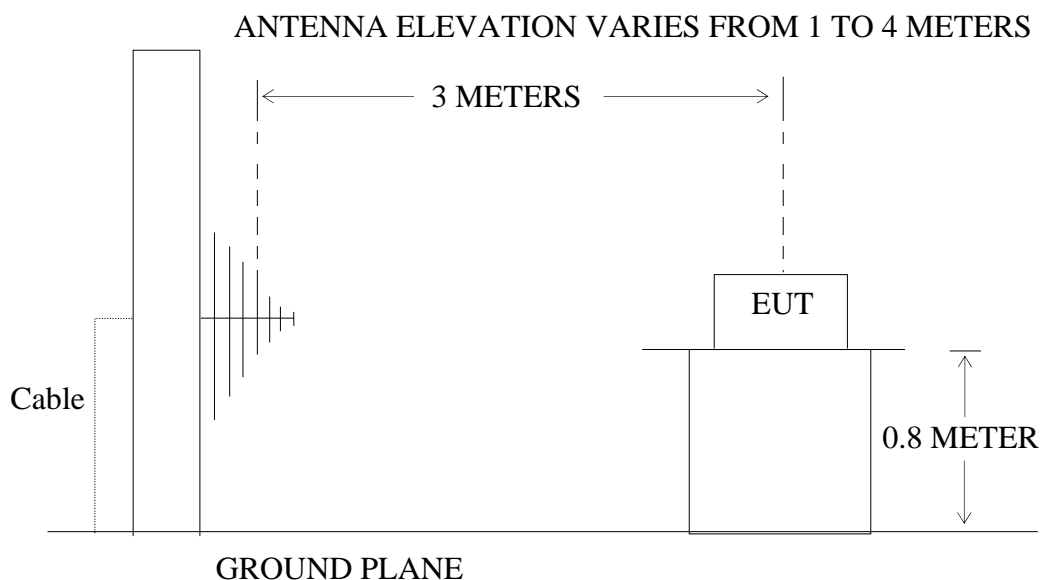

### 9.2. The Limit For Section 15.247(d)

Section 15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the

transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

### 9.3.Restricted bands of operation

#### 9.3.1.FCC Part 15.205 Restricted bands of operation

(a) Except as shown in paragraph (d) of this section, Only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
<sup>1</sup> 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	( <sup>2</sup> )
13.36-13.41			

<sup>1</sup>Until February 1, 1999, this restricted band shall be 0.490-0.510

<sup>2</sup>Above 38.6

(b) Except as provided in paragraphs (d) and (e), the field strength of emission appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000MHz, Compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

### 9.4.Configuration of EUT on Measurement

The equipment are installed on Radiated Emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

### 9.5.Operating Condition of EUT

9.5.1. Setup the EUT and simulator as shown as Section 9.1.

9.5.2. Turn on the power of all equipment.

9.5.3. Let the EUT work in TX modes measure it. The transmit frequency are 2412-2462 and 2422-2452MHz. We select 2412MHz, 2437MHz, 2462MHz and 2422MHz, 2437MHz, 2452MHz TX frequency to transmit.

## 9.6. Test Procedure

The EUT and its simulators are placed on a turntable, which is 0.8 meter high above ground. The turntable can rotate 360 degrees to determine the position of the maximum emission level. EUT is set 3.0 meters away from the receiving antenna, which is mounted on an antenna tower. The antenna can be moved up and down between 1.0 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bilog antenna) is used as receiving antenna. Both horizontal and vertical polarizations of the antenna are set on measurement. In order to find the maximum emission levels, all of the interface cables must be manipulated according to ANSI C63.4: 2009 on radiated emission measurement. The EUT was tested in 3 orthogonal planes.

The worst-case data rate for this channel to be 1Mbps for 802.11b mode and 6Mbps for 802.11g mode and 150Mbps for 802.11n mode, based on previous with 802.11 WLAN product design architectures.

The bandwidth of test receiver is set at 9kHz in below 30MHz. and set at 120kHz in 30-1000MHz, and 1MHz in above 1000MHz.

The frequency range from 9kHz to 25GHz is checked.

The final measurement in band 9-90kHz, 110-490kHz and above 1000MHz is performed with Average detector. Except those frequency bands mention above, the final measurement for frequencies below 1000MHz is performed with Quasi Peak detector.

The field strength is calculated by adding the antenna factor, and cable loss, and subtracting the amplifier gain from the measured reading. The basic equation calculation is as follows:

Result = Reading + Corrected Factor

Where Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

## 9.7. The Field Strength of Radiation Emission Measurement Results

Note: 1. Emissions attenuated more than 20 dB below the permissible value are not reported.

2. \*: Denotes restricted band of operation.

3. The fundamental radiated emissions were reduced by Band Reject Filter in the attached plots.

4. The EUT is tested radiation emission at each test mode(802.11 b/g/n) in three axes. The worst emissions are reported in all test mode and channels.

5. The 18-25GHz emissions are not reported, because the levels are too low against the limit.

### **Below 1G**



**ACCURATE TECHNOLOGY CO., LTD.**


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: RUCKY7 #172  
Standard: FCC Class B 3M Radiated  
Test item: Radiation Test  
Temp.( C)/Hum.(%) 25 C / 55 %  
EUT: P2P  
Mode: TX Channel 6(802.11b)  
Model: HC8301  
Manufacturer: ODSOINIC

Polarization: Vertical  
Power Source: AC 120V/60Hz  
Date: 13/10/24/  
Time: 9/20/57  
Engineer Signature:  
Distance: 3m

Note: Report No.:ATE20131932

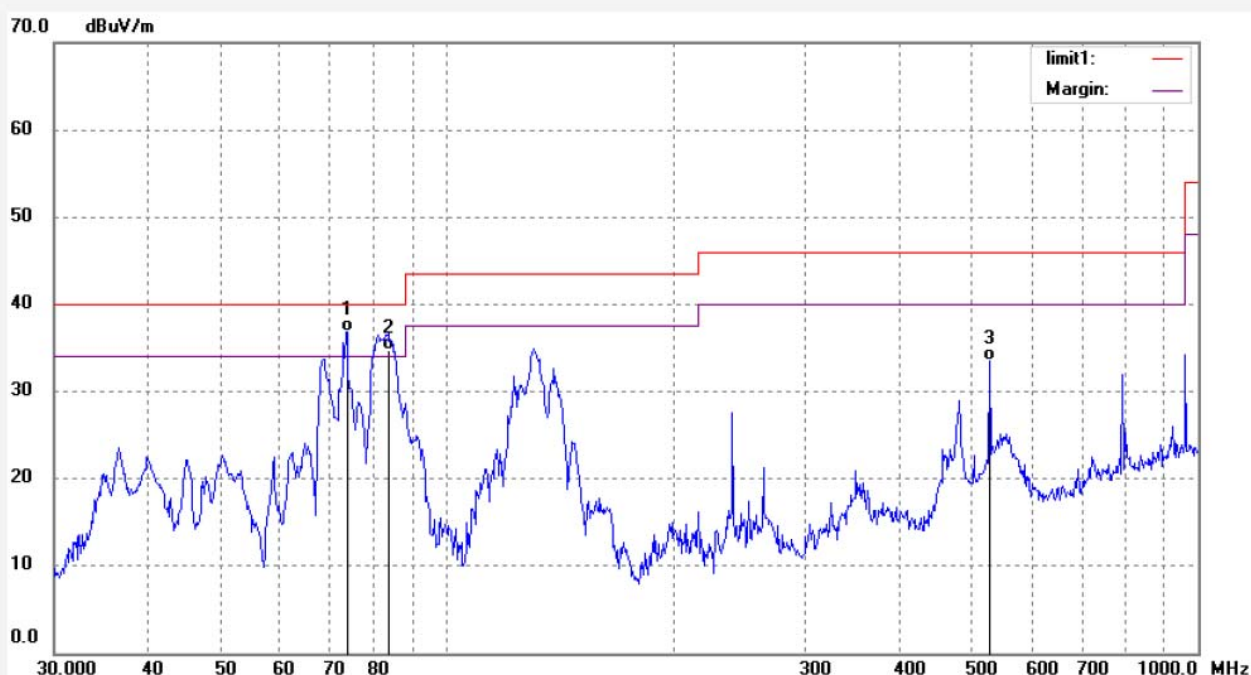

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	73.6170	58.33	-21.55	36.78	40.00	-3.22	QP			
2	83.5222	56.23	-21.50	34.73	40.00	-5.27	QP			
3	528.2458	46.89	-13.32	33.57	46.00	-12.43	QP			



**ACCURATE TECHNOLOGY CO., LTD.**


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: RUCKY7 #173  
Standard: FCC Class B 3M Radiated  
Test item: Radiation Test  
Temp.( C)/Hum.(%) 25 C / 55 %  
EUT: P2P  
Mode: TX Channel 6(802.11b)  
Model: HC8301  
Manufacturer: ODSONIC

Polarization: Horizontal  
Power Source: AC 120V/60Hz  
Date: 13/10/24/  
Time: 9/21/32  
Engineer Signature:  
Distance: 3m

Note: Report No.:ATE20131932

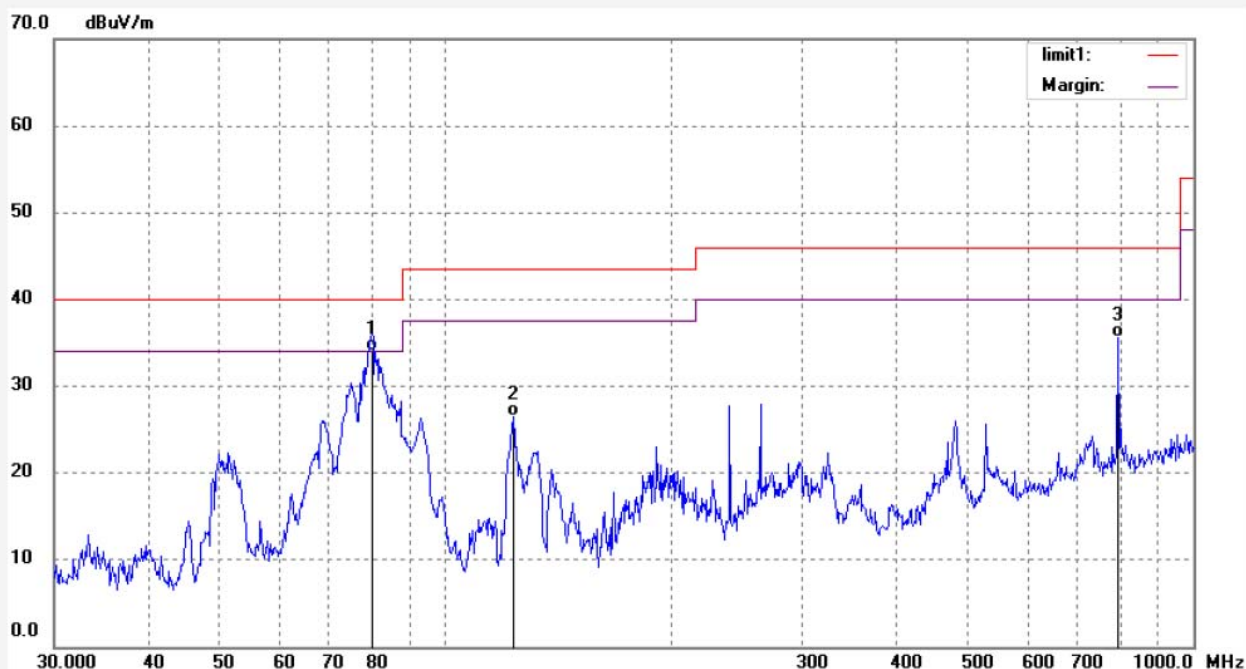

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	79.8003	55.40	-21.39	34.01	40.00	-5.99	QP			
2	123.2655	49.18	-22.70	26.48	43.50	-17.02	QP			
3	793.3960	43.49	-7.87	35.62	46.00	-10.38	QP			

### Above 1G




### ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: RUCKY7 #219	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 13/10/24/
Temp.( C)/Hum.(%) 25 C / 55 %	Time: 10/43/28
EUT: P2P	Engineer Signature:
Mode: TX Channel 1(802.11b)	Distance: 3m
Model: HC8301	
Manufacturer: ODSONIC	

Note: Report No.:ATE20131932

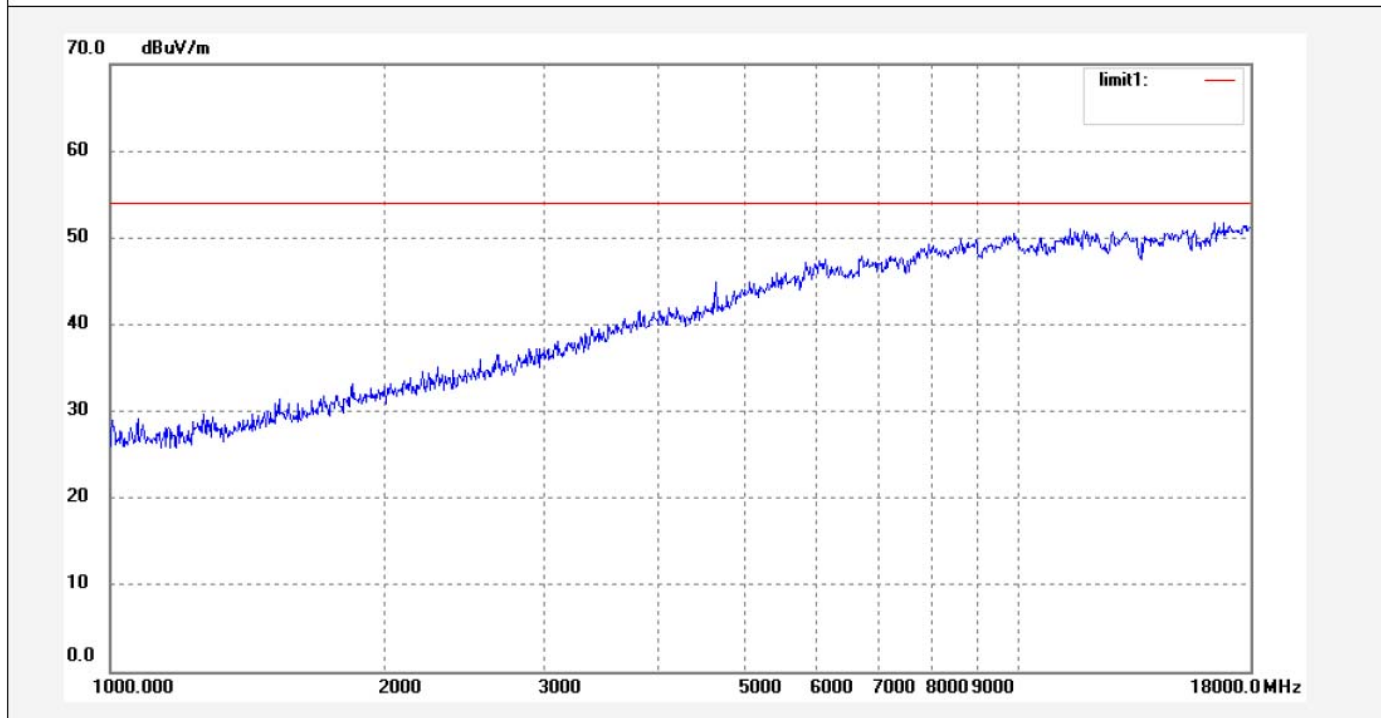

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------



**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: RUCKY7 #218

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.( C)/Hum.(%) 25 C / 55 %

EUT: P2P

Mode: TX Channel 1(802.11b)

Model: HC8301

Manufacturer: ODSOINIC

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 13/10/24/

Time: 10/42/11

Engineer Signature:

Distance: 3m

Note: Report No.:ATE20131932

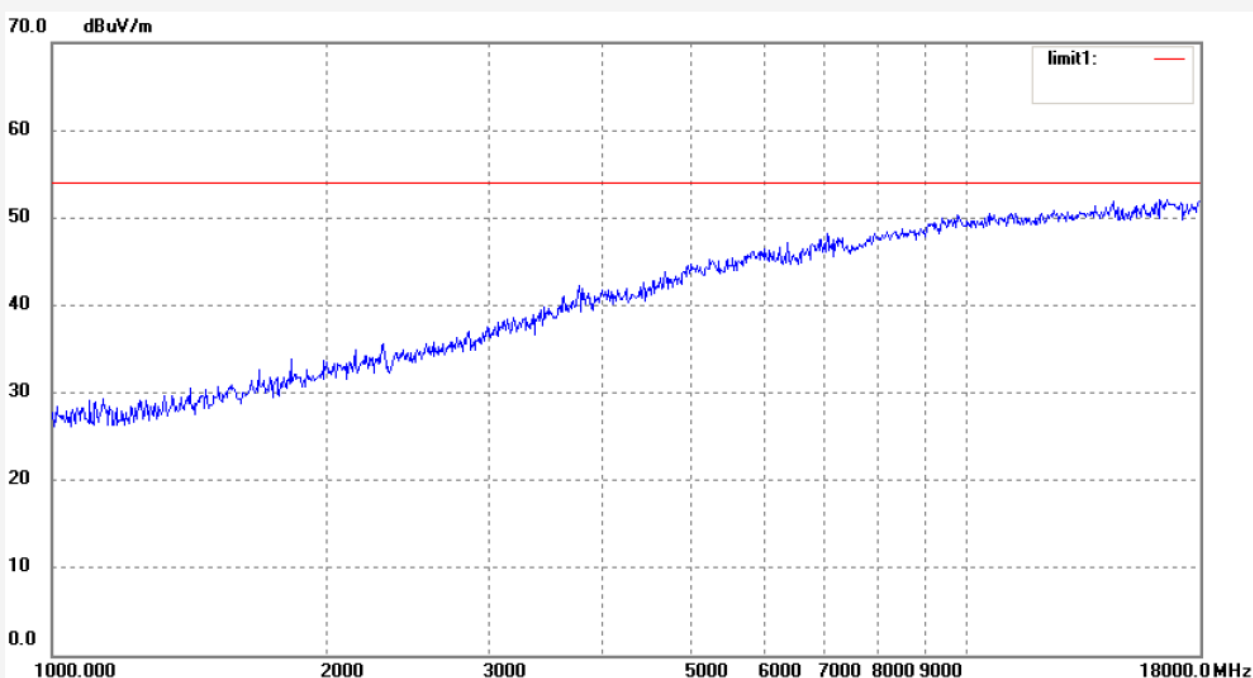

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------






**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: RUCKY7 #217	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 13/10/24/
Temp.( C)/Hum.(%) 25 C / 55 %	Time: 10/40/18
EUT: P2P	Engineer Signature:
Mode: TX Channel 6(802.11b)	Distance: 3m
Model: HC8301	
Manufacturer: ODSONIC	

Note: Report No.:ATE20131932

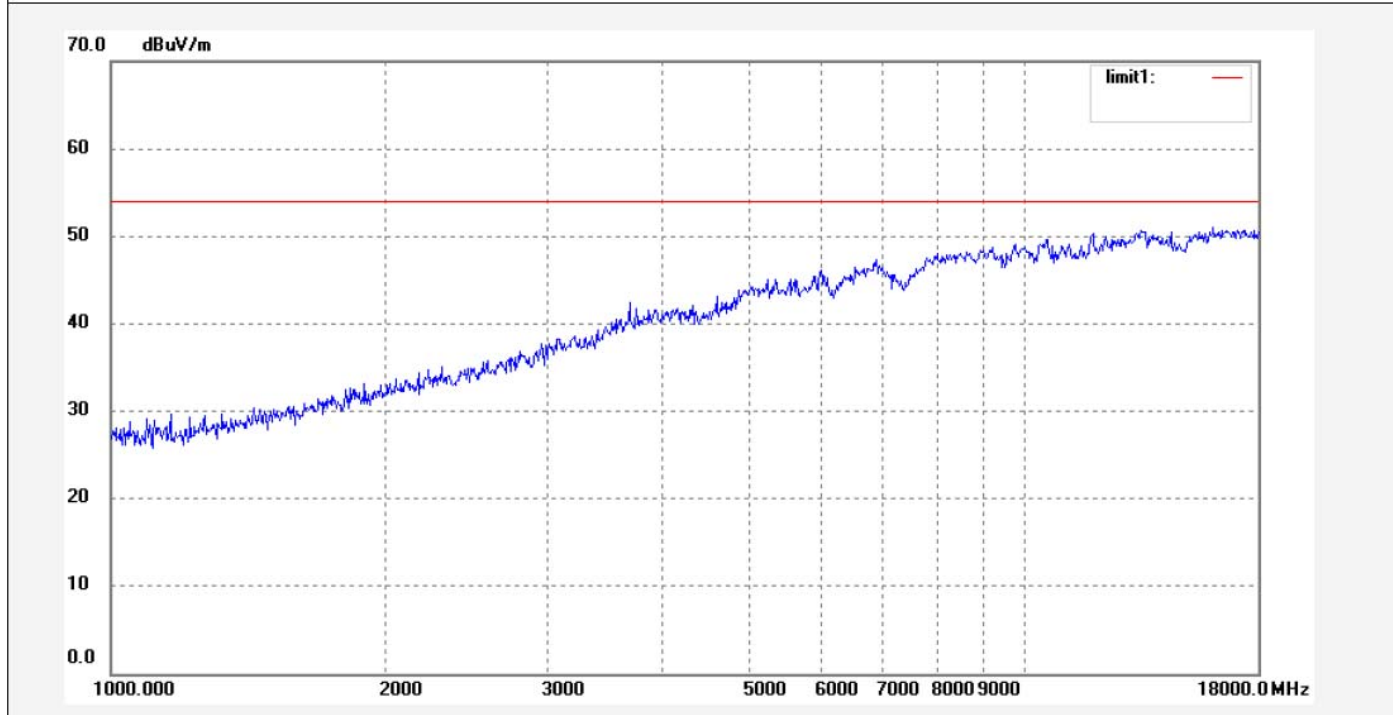

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------