



# TEST REPORT

**Test Report No. :** UL-RPT-RP-12579073-616-ISED-COLOUR5C

**Applicant** : Visteon Electronics Germany GmbH  
**PMN** : COLOUR 5C  
**HVIN** : PWB23707  
**IC ID** : 11505A-COLOUR5C  
**Technology** : RFID – 125 kHz  
**Test Standard(s)** : Innovation, Science and Economic Development Canada  
RSS-Gen Issue 5 April 2018, RSS-210 Issue 9 November 2017

For details of applied tests refer to test result summary

1. This test report shall not be reproduced in full or partial, without the written approval of UL International Germany GmbH.
2. The results in this report apply only to the sample tested.
3. The test results in this report are traceable to the national or international standards.
4. Test Report Version 1.0
5. Result of the tested sample: **PASS**

Prepared by: Abdoufataou, Salifou  
Title: Laboratory Engineer  
Date: 10.April.2019

Approved by: Ajit, Phadtare  
Title: Lead Test Engineer  
Date: 10.April.2019



Deutsche  
Akkreditierungsstelle  
D-PL-19381-02-00

This laboratory is accredited by DAkkS.  
The tests reported herein have been performed in  
accordance with its' terms of accreditation.

**UL INTERNATIONAL GERMANY GMBH**

Hedelfinger Str. 61  
70327 Stuttgart, Germany  
STU.CTECHLab@ul.com

This page has been left intentionally blank.

**Table of Contents**

<b>1. Customer Information.....</b>	<b>4</b>
1.1.Applicant Information	4
1.2.Manufacturer Information	4
<b>2. Summary of Testing.....</b>	<b>5</b>
2.1. General Information	5
Applied Standards	5
Location	5
Date information	5
2.2. Summary of Test Results	6
2.3. Methods and Procedures	6
2.4. Deviations from the Test Specification	6
<b>3. Equipment Under Test (EUT) .....</b>	<b>7</b>
3.1. Identification of Equipment Under Test (EUT)	7
3.2. Description of EUT	7
3.3. Modifications Incorporated in the EUT	7
3.4. Additional Information Related to Testing	8
3.5. Antenna Information Related to Testing	8
3.6. Support Equipment	8
<b>4. Operation and Monitoring of the EUT during Testing .....</b>	<b>9</b>
4.1. Operating Modes	9
4.2. Configuration and Peripherals	9
<b>5. Measurements, Examinations and Derived Results .....</b>	<b>10</b>
5.1. General Comments	10
5.2. Test Results	11
5.2.1. Transmitter Fundamental Field Strength	11
5.2.2. Transmitter Radiated Spurious Emissions	15
5.2.3. Transmitter 99 % Emission Bandwidth	21
<b>6. Measurement Uncertainty .....</b>	<b>24</b>
<b>7. Used equipment .....</b>	<b>25</b>
<b>8. Open-Area-Test Site comparison.....</b>	<b>27</b>
<b>9. Report Revision History .....</b>	<b>31</b>

## **1. Customer Information**

### **1.1.Applicant Information**

<b>Company Name:</b>	Visteon Electronics Germany GmbH
<b>Company Address:</b>	Visteonstrasse 4-10, Kerpen 50170, GERMANY
<b>Contact Person:</b>	Dr. Dennis Pril
<b>Contact E-Mail Address:</b>	+49-721-4766 1026
<b>Contact Phone No.:</b>	<a href="mailto:dprill@visteon.com">dprill@visteon.com</a>

### **1.2.Manufacturer Information**

<b>Company Name:</b>	Visteon Electronics Slovakia s.r.o,
<b>Company Address:</b>	Namestovo 10BB, 02901, SLOVAK REPUBLIK
<b>Contact Person:</b>	Dominik Belko
<b>Contact E-Mail Address:</b>	<a href="mailto:dbelko@visteon.com">dbelko@visteon.com</a>
<b>Contact Phone No.:</b>	+49 191 766 48 09

## **2. Summary of Testing**

### **2.1. General Information**

#### **Applied Standards**

<b>Specification Reference:</b>	RSS-Gen Issue 5 April 2018
<b>Specification Title:</b>	General Requirements for Compliance of Radio Apparatus
<b>Specification Reference:</b>	RSS-210 Issue 9 November 2017
<b>Specification Title:</b>	Licence –exempt Radio Apparatus (All Frequency Bands): Category I Equipment.
<b>Site Registration:</b>	22511-1

#### **Location**

<b>Location of Testing:</b>	UL International Germany GmbH Hedelfinger Str. 61 70327 Stuttgart Germany
-----------------------------	--

#### **Date information**

<b>Order Date:</b>	29 October 2018
<b>EUT arrived:</b>	15 January 2019
<b>Test Dates:</b>	16 January 2019 to 11 February 2019
<b>EUT returned:</b>	-/-

## **2.2. Summary of Test Results**

Clause	Measurement	Complied	Did not comply	Not performed	Not applicable
RSS-Gen 8.8	Transmitter AC Conducted Emissions	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
RSS-Gen 6.12	Transmitter Fundamental Field Strength	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
RSS-Gen 6.13	Transmitter Unwanted Emissions	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
RSS-Gen 6.7	Transmitter 99% Emission Bandwidth	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

### **Note(s):**

1. Not applicable the EUT will be powered via Car DC battery.

## **2.3. Methods and Procedures**

<b>Reference:</b>	ANSI C63.10-2013
<b>Title:</b>	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
<b>Reference:</b>	KDB 414788 D01 Radiated Test Site v01
<b>Title:</b>	TEST SITES FOR RADIATED EMISSION MEASUREMENTS

## **2.4. Deviations from the Test Specification**

For the measurements contained within this test report, there were no deviations from, additions to, or exclusions from the test specification identified above.

### **3. Equipment Under Test (EUT)**

#### **3.1. Identification of Equipment Under Test (EUT)**

<b>Brand Name:</b>	VISTEON
<b>PMN:</b>	COLOUR 5C
<b>Test Sample Serial Number:</b>	38569228
<b>HVIN:</b>	PWB23707
<b>FVIN:</b>	N/A
<b>Software Version Number:</b>	S210 RTA
<b>IC ID:</b>	11505A-COLOUR5C

#### **3.2. Description of EUT**

The equipment under test was a VW MQBAB2020 Instrument Cluster and Immobilizer supporting RFID 125 kHz technology.

EUT was the PCB with cable and coil. To put EUT into the operation a speedometer display and push button needs to be connected to the PCB.

In order to represent end user application setup and avoid short circuits during testing a representative external plastic housing was used.

Initial checks demonstrated that the external plastic housing had no influence on the measurements and obtained test results.

#### **3.3. Modifications Incorporated in the EUT**

No modifications were applied to the EUT during testing.

### 3.4. Additional Information Related to Testing

<b>Tested Technology:</b>	RFID	
<b>Category of Equipment:</b>	Transceiver	
<b>Channel Spacing:</b>	Single channel device	
<b>Transmit Frequency Range:</b>	125 kHz	
<b>Power Supply Requirement:</b>	V <sub>nom</sub>	12 V DC
	V <sub>min</sub>	6 V DC
	V <sub>max</sub>	V DC
<b>Tested Temperature Range:</b>	T <sub>nom</sub>	23 °C
	T <sub>min</sub>	-40 °C
	T <sub>max</sub>	80 °C

### 3.5. Antenna Information Related to Testing

Following Antenna types were used for the EUT testing:

<b>Antenna Reference:</b>	Antenna 1
<b>Antenna Designation:</b>	Kostal Air Coil
<b>Antenna Type:</b>	Air Coil
<b>Antenna Gain:</b>	0 dBi
<b>Part number:</b>	Kostal: No: 10141222   VW NO: 2Q0.953.254 (transponder coil)

<b>Antenna Reference:</b>	Antenna 2
<b>Antenna Designation:</b>	HUF
<b>Antenna Type:</b>	Mechanical Lock Coil NSS (BASIC) + WFS5c
<b>Antenna Gain:</b>	0 dBi
<b>Part number:</b>	VW PN: 2G0.905.855

### 3.6. Support Equipment

No support equipment was used to exercise the EUT during testing:

Item	Description	Brand Name	Model Name or Number	Serial Number
1	--	--	--	--
2	--	--	--	--

## **4. Operation and Monitoring of the EUT during Testing**

### **4.1. Operating Modes**

The EUT was tested in the following operating mode(s):

- Constantly transmitting at full power with a modulated carrier.

### **4.2. Configuration and Peripherals**

The EUT was tested in the following configuration(s):

- The EUT was powered via DC power supply 12 V DC.
- The customer provided test setup instructions 'InstructionsFor\_Operating\_And\_Testing\_MQB\_ClusterAndImmobilizer\_v2.docx' that were used to place the device into a continuous transmission mode.
- The EUT supports 3 test modes, which can be selected from the red selector button just below the dials and display panel.
- All tests were carried out in Continuous test mode : The RF is constantly on, without any modulation (just carrier transmission). Icon M5 (yellow triangle symbol) is lit.
- The worst case determination was done on both antenna types supplied by the customer. Antenna 1 was found to be the worst case Antenna in terms of H-field level producing maximum level. Therefore radiated spurious emissions & H-field extreme conditions measurements were only carried out with Antenna 1. For further Antenna details refer section 3.5.
- Refer to Appendix 1 of this test report for details of radiated tests on an open field test site.

## **5. Measurements, Examinations and Derived Results**

### **5.1. General Comments**

Measurement uncertainties are evaluated in accordance with current best practice. Our reported expanded uncertainties are based on standard uncertainties, which are multiplied by an appropriate coverage factor to provide a statistical confidence level of approximately 95%. Please refer to Section 6 *Measurement Uncertainty* for details.

In accordance with DAkkS requirements all the measurement equipment is on a calibration schedule. All equipment was within the calibration period on the date of testing.

## **5.2. Test Results**

### **5.2.1. Transmitter Fundamental Field Strength**

#### **Test Summary:**

<b>Test Engineer:</b>	Segun I. Adeniji	<b>Test Date:</b>	16 January 2019 & 11 February 2019
<b>Test Sample Serial Number:</b>	38569228		
<b>Test Site Identification</b>	SR 1/2		

<b>Industry Canada Reference:</b>	RSS-Gen 6.12
<b>Test Method Used:</b>	ANSI C63.10 Section 6.4

#### **Environmental Conditions:**


<b>Temperature (°C):</b>	23
<b>Relative Humidity (%):</b>	31

#### **Note(s):**


1. The limit is specified at a test distance of 300 metres. However, as specified by FCC Section 15.31 (f)(2), measurements may be performed at a closer distance and the measured level corrected to the specified measurement distance by using the square of an inverse linear distance extrapolation factor (40dB/decade).
2. In accordance with 414788 D01. Instead of an OATS a Semi Anechoic Chamber was used where evidence was shown that the behaviour is the same. A maximum deviation of 0.64 dB for 125 kHz was observed. This deviation is also taken into account to the result.
3. The measurement was done on both antenna types supplied by the customer. The Antenna details is given in section 3.5.
4. Pre-scan measurements were performed using a spectrum analyzer with a peak detector and measurement bandwidth of 200 Hz. The fundamental field strength was maximized by rotating the measurement antenna and EUT. The spectrum analyzer was then switched to test receiver mode and the final measurement on the maximized level was performed.
5. The measurement was performed at a measurement distance of 3 m where field strength of X dBuV/m was measured. This value was later extrapolated to a distance of 300 m by subtracting 80 dB from the result.
6. A transducer factor was used on the spectrum analyser during measurement. This factor includes correction between the fixed gain of the magnetic loop antenna and the calibration values. It also includes the value of the RF cable used to connect the antenna to the spectrum analyser which was incorporated into the annual calibration of the magnetic loop antenna.
7. Since the field strength level is below the quasi peak limit, hence no quasi-peak detector measurement is required.

**Transmitter Fundamental Field strength test setup**

**Open Area Test Site**

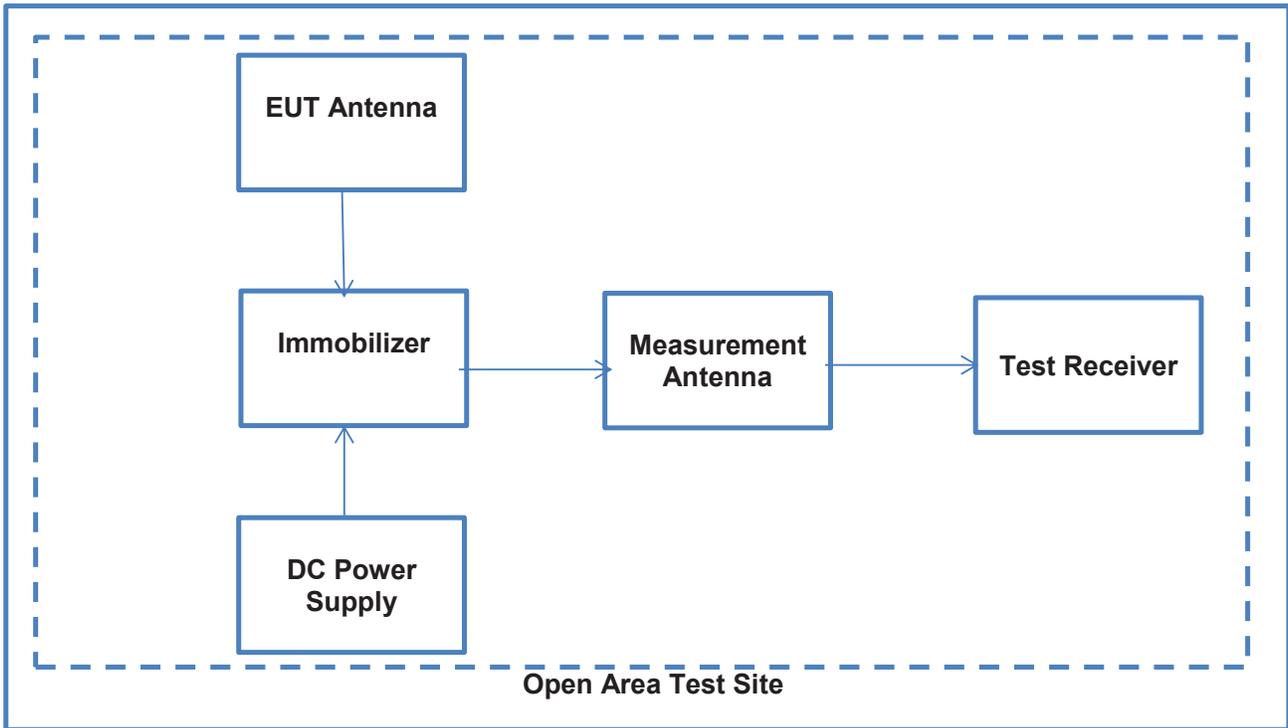


**Semi Anechoic Chamber**

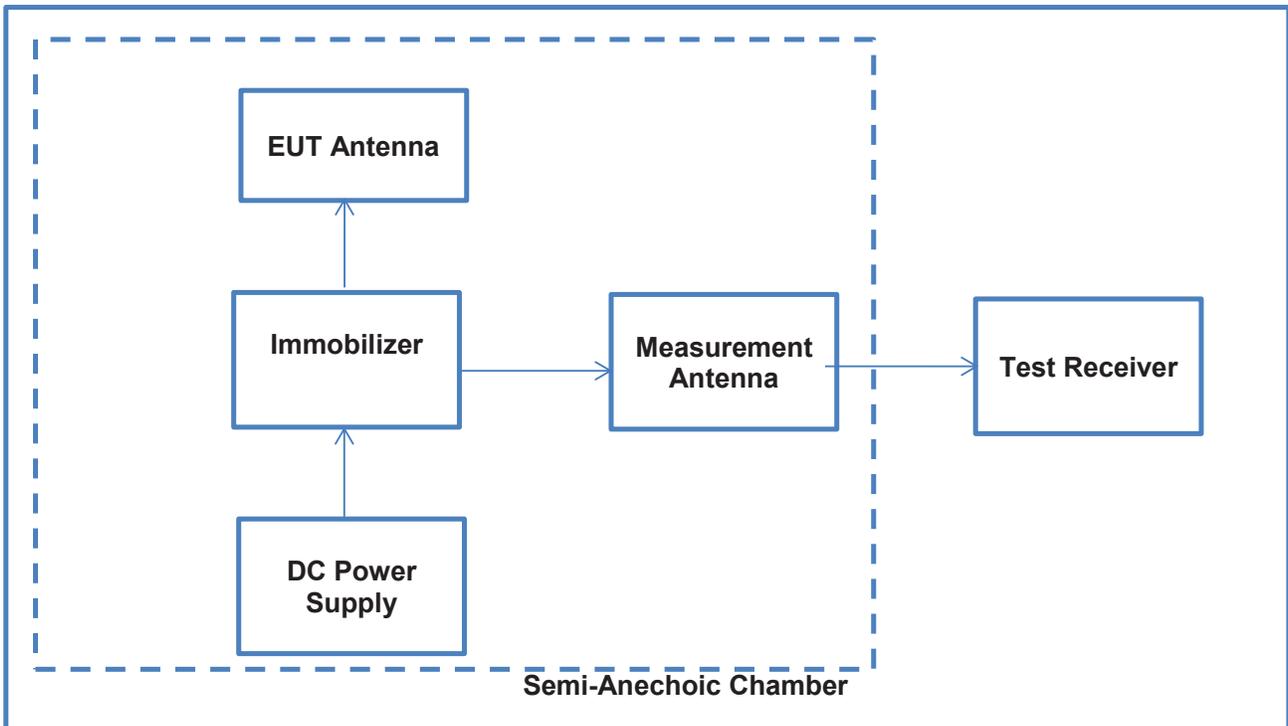

**Results: Antenna 1 / Peak**

Frequency (MHz)	Measurement Antenna Polarization	Measured Level at 3 m (dBµV/m)	Extrapolated Level at 300 m (dBµV/m)	Deviation from OATS to SAC	Corrected Level at 300 m (dBµV/m) with deviation added	Limit at 300 m (dBµV/m)	Margin (dB)	Result
124.91	90° to EUT	87.63	7.63	0.64	8.27	25.7	17.43	Pass


**Result: Pass**

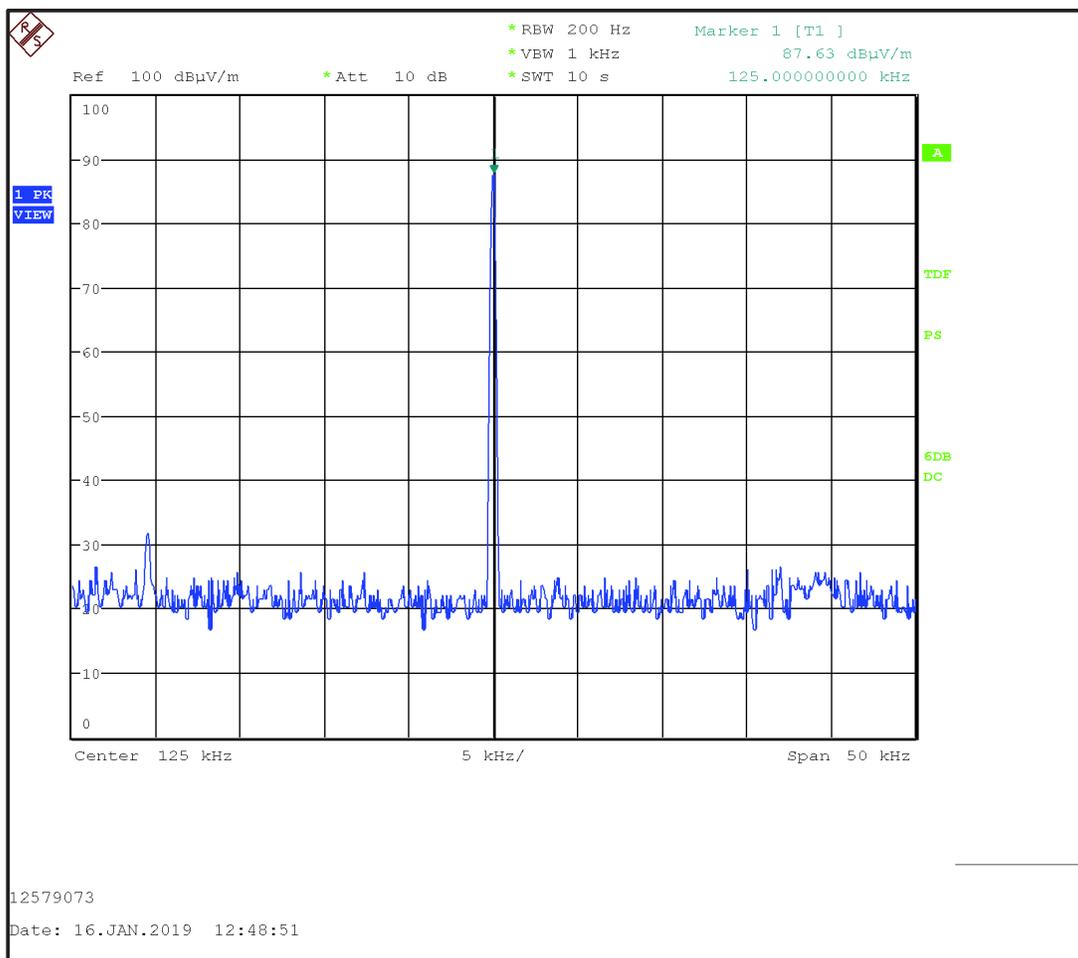

**Results: Antenna 2 / Peak**

Frequency (MHz)	Measurement Antenna Polarization	Measured Level at 3 m (dB $\mu$ V/m)	Extrapolated Level at 300 m (dB $\mu$ V/m)	Deviation from OATS to SAC	Corrected Level at 300 m (dB $\mu$ V/m) with deviation added	Limit at 300 m (dB $\mu$ V/m)	Margin (dB)	Result
124.91	0° to EUT	76.08	-3.92	0.64	-3.28	25.7	22.42	Pass

**Result: Pass**

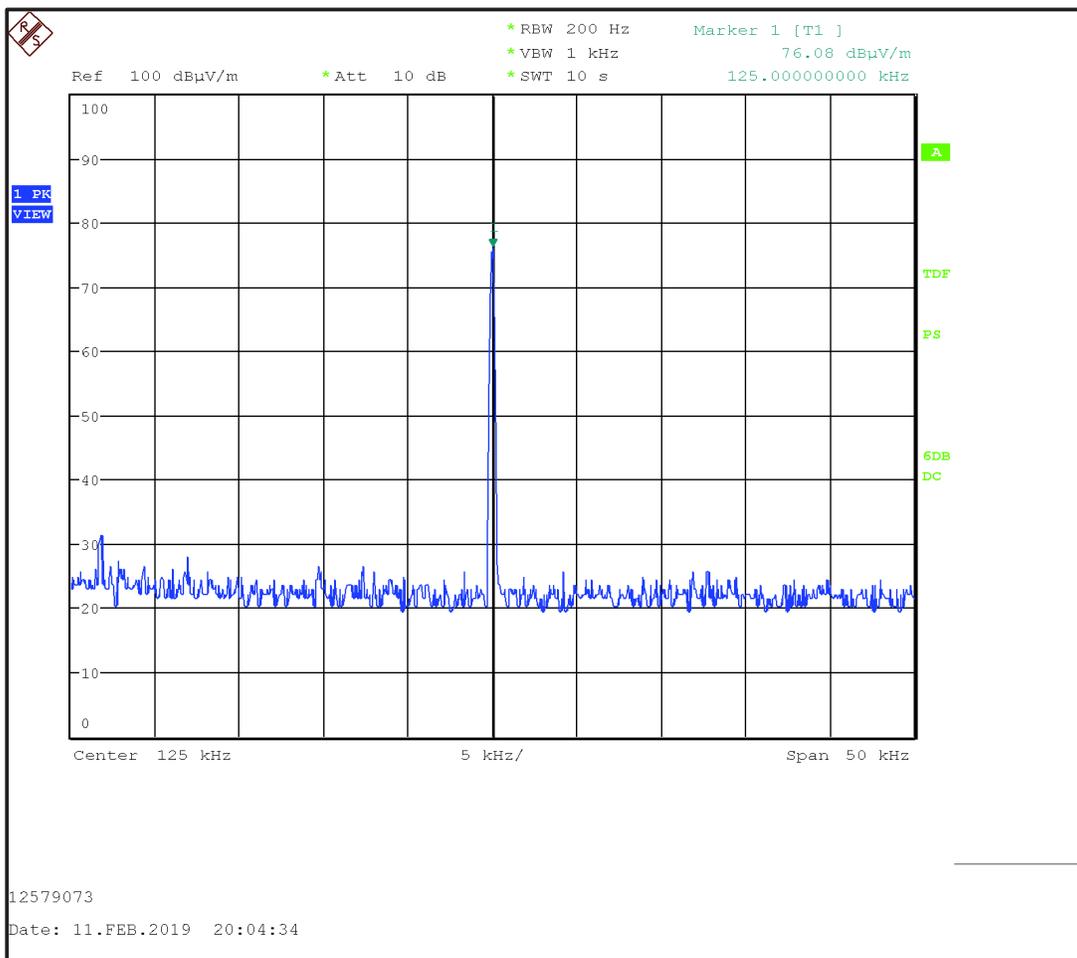

**5.2.2. Transmitter Radiated Spurious Emissions****Test Summary:**

<b>Test Engineer:</b>	Segun I. Adeniji	<b>Test Date:</b>	16 January 2019
<b>Test Sample Serial Number:</b>	38569228		
<b>Test Site Identification</b>	SR 1/2		

<b>Industry Canada Reference:</b>	RSS-Gen 6.13
<b>Test Method Used:</b>	ANSI C63.10 Sections 6.3, 6.4 and 6.5
<b>Frequency Range:</b>	9 kHz to 1000 MHz

**Environmental Conditions:**

<b>Temperature (°C):</b>	23
<b>Relative Humidity (%):</b>	31

**Settings of the Instrument**


Frequency Range	RBW	VBW	Detector
9 kHz-150 kHz	300 Hz	1 kHz	Peak Detector
150 kHz-30 MHz	10 kHz	30 kHz	Peak Detector
30 MHz-1 GHz	100 kHz	300 kHz	Peak Detector

**Note(s):**


- In accordance with FCC KDB 414788, an alternative test site may be used for the measurement. Therefore the result from the semi-anechoic chamber tests is shown in this section of the test report.
- The emissions from 9kHz to 1 GHz were recorded. Markers were placed on the peaks of the pre-scan plots and the worst case emissions were noted.
- All other emissions were greater than 20 dB below the applicable limit, below the noise floor of the measurement system or ambient.
- Measurements were performed in a semi-anechoic chamber at a distance of 3 metres. The EUT was placed at a height of 80 cm above the reference ground plane in the centre of the chamber turntable. Between 30 MHz and 1 GHz, maximum emission levels were determined by height searching the measurement antenna over the range 1 metre to 4 metres.
- A transducer factor was used on the spectrum analyser during open field tests. This factor includes correction between the fixed gain of the magnetic loop antenna and the calibration values. It also includes the value of the RF cable used to connect the antenna to the spectrum analyser which was incorporated into the annual calibration of the magnetic loop antenna.
- The emission shown at approximately 125 kHz is the fundamental emission. The worst case emissions were presented in the result table.
- Since the field strength level is below the quasi peak limit, hence no quasi-peak detector measurement is required.
- The worst case determination was done on both antenna types supplied by the customer. Antenna 1 was found to be the worst case Antenna in terms of H-field level producing maximum level. Therefore radiated spurious emissions measurements were only carried out with Antenna 1. For further Antenna details refer section 3.5.
- The measurement was performed at a measurement distance of 3 m where field strength of X dBuV/m was measured.
  - 9 kHz- 490 kHz: measured level extrapolated to a distance of 300 m by subtracting 80 dB from the result.

- 490kHz-1705 kHz: measured level extrapolated to a distance of 30 m by subtracting 40 dB from the result.

**Transmitter Radiated Spurious Emission test setup (Measurement below 30 MHz)**

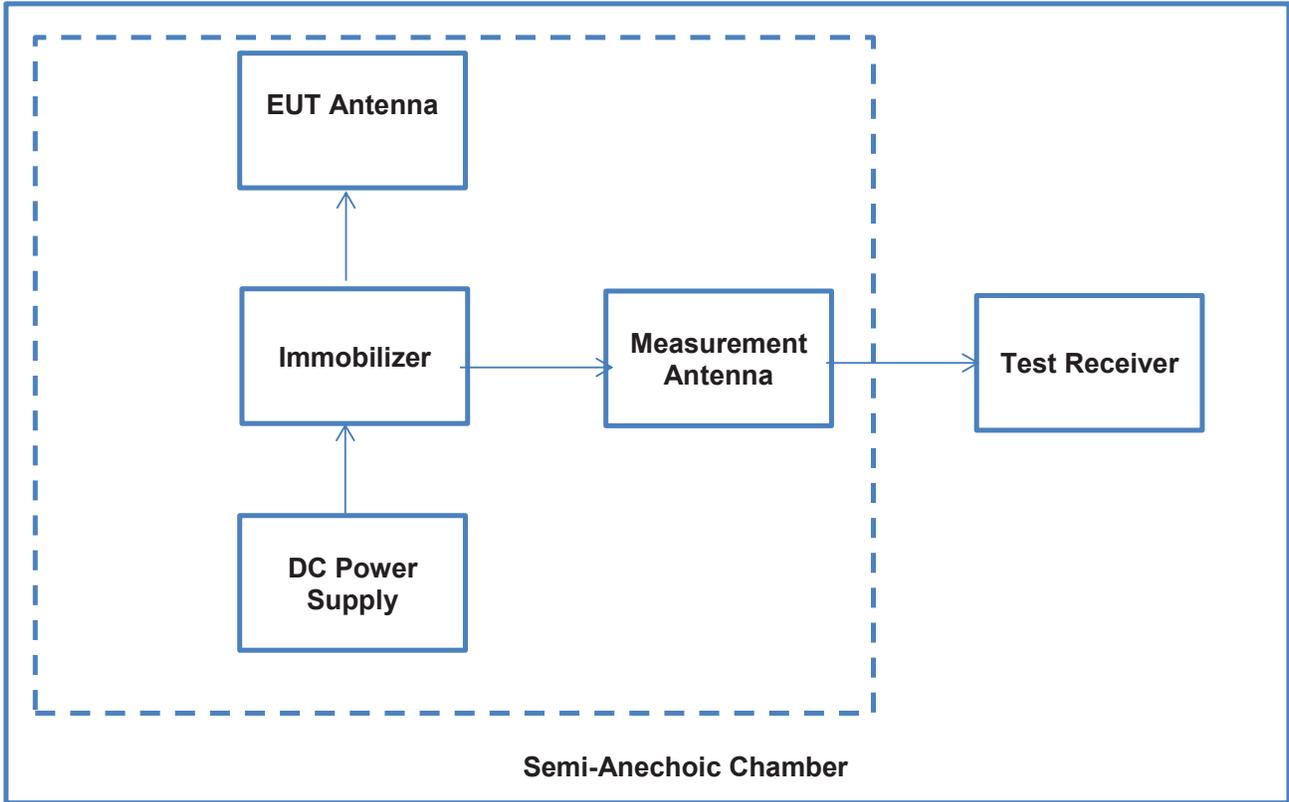

**Transmitter Radiated Spurious Emission test setup (Measurement above 30 MHz)**

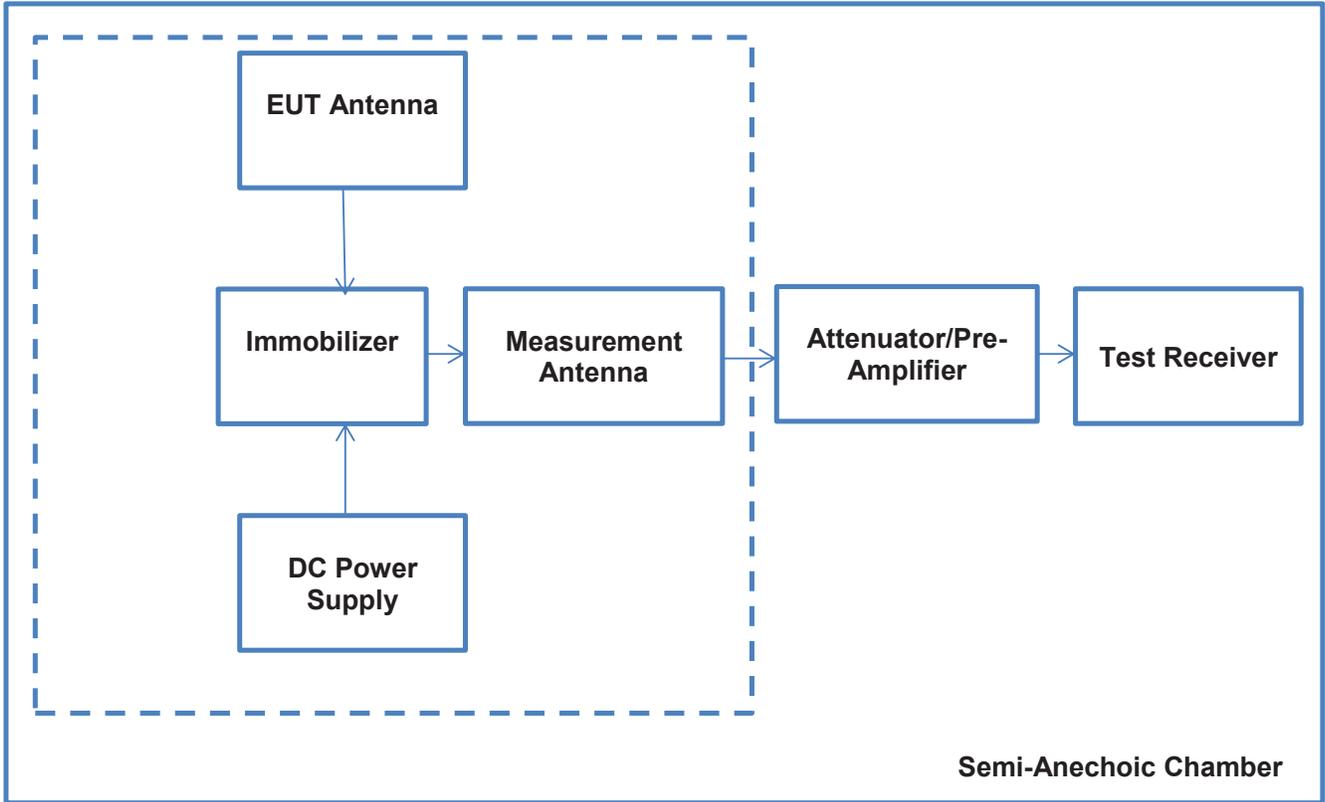


**Results: Antenna 1 / Peak Detector**

Frequency (MHz)	Antenna Polarization	Extrapolated Levels (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Result
0.374	Vertical	-28.23	16.15	44.38	Complied
4.053	Vertical	19.57	29.54	9.97	Complied
66.49	Vertical	29.24	40.00	10.76	Complied
400.0	Vertical	36.96	46.00	9.04	Complied

**Result: Pass**


**Transmitter Radiated Spurious Emissions (continued)**

**Plot: Transmitter Radiated Spurious Emissions (9kHz-30 MHz) @ 3m/ Antenna 1**

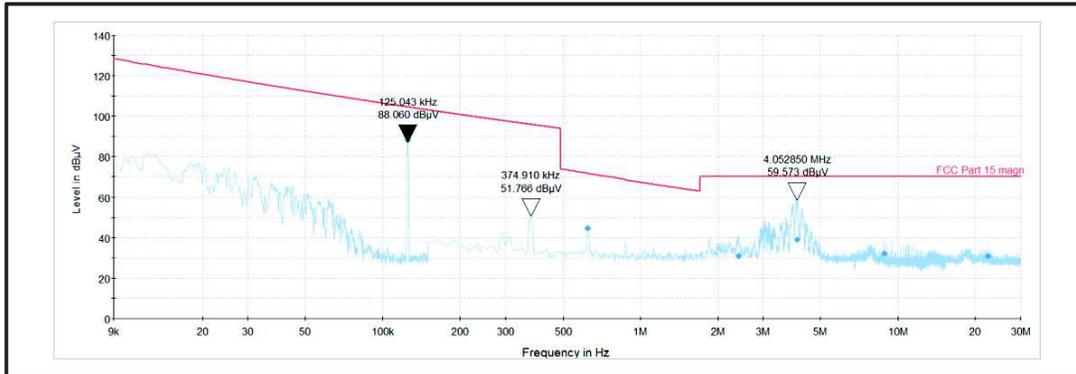

Note: These plots are pre-scans and for indication purposes only. For final measurements, see accompanying table.

**Plot: Transmitter Radiated Spurious Emissions (30 MHz-1000 MHz) @ 3m / Antenna 1**

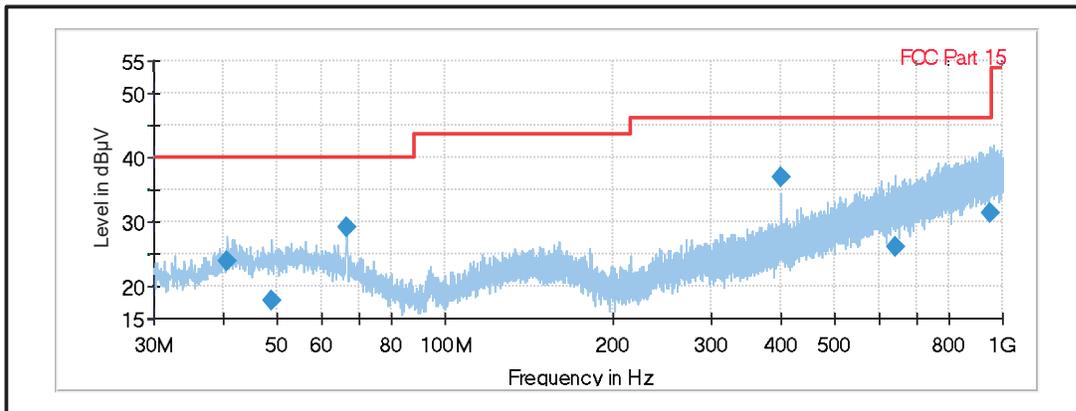

Note: These plots are pre-scans and for indication purposes only. For final measurements, see accompanying table.

**5.2.3. Transmitter 99 % Emission Bandwidth****Test Summary:**

<b>Test Engineer:</b>	Segun I. Adeniji	<b>Test Date:</b>	17 January 2019
<b>Test Sample Serial Number:</b>	38569228		
<b>Test Site Identification</b>	SR 9		

<b>ISED Canada Reference:</b>	RSS-Gen 6.7
<b>Test Method Used:</b>	ANSI C63.10 Sections 6.9.3


**Environmental Conditions:**

<b>Temperature (°C):</b>	23
<b>Relative Humidity (%):</b>	31

**Note(s):**

1. The spectrum analyser resolution bandwidth was set to 200 Hz and video bandwidth 1 kHz. A peak detector was used, sweep time was set to auto and the trace mode was Max Hold. The span was set to 10 kHz. The 99 % bandwidth was obtained by measuring the emission width using the spectrum analyser integrated function. The result is given in the table below.


**Transmitter Band Edge Radiated Emissions test setup**

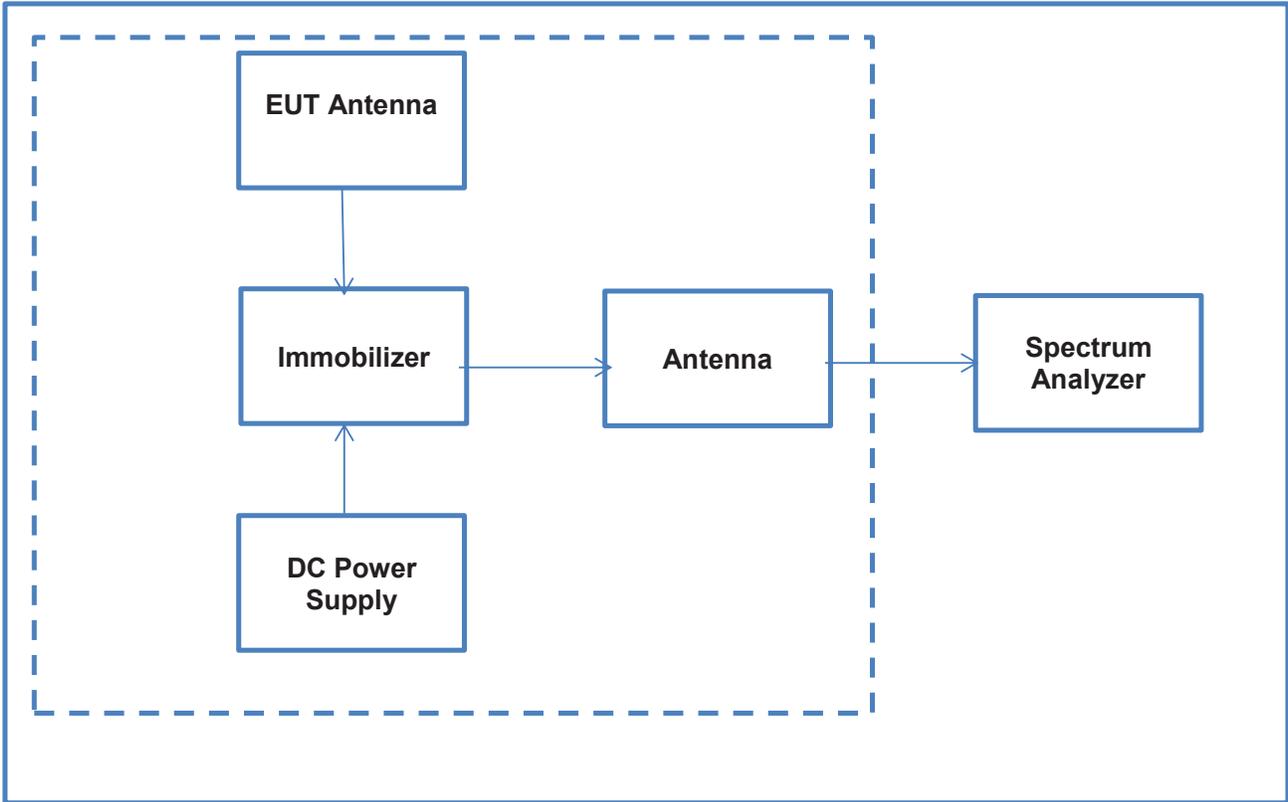

**Results:**

<b>99% Emission Bandwidth (kHz)</b>
0.492

**Result: Pass**

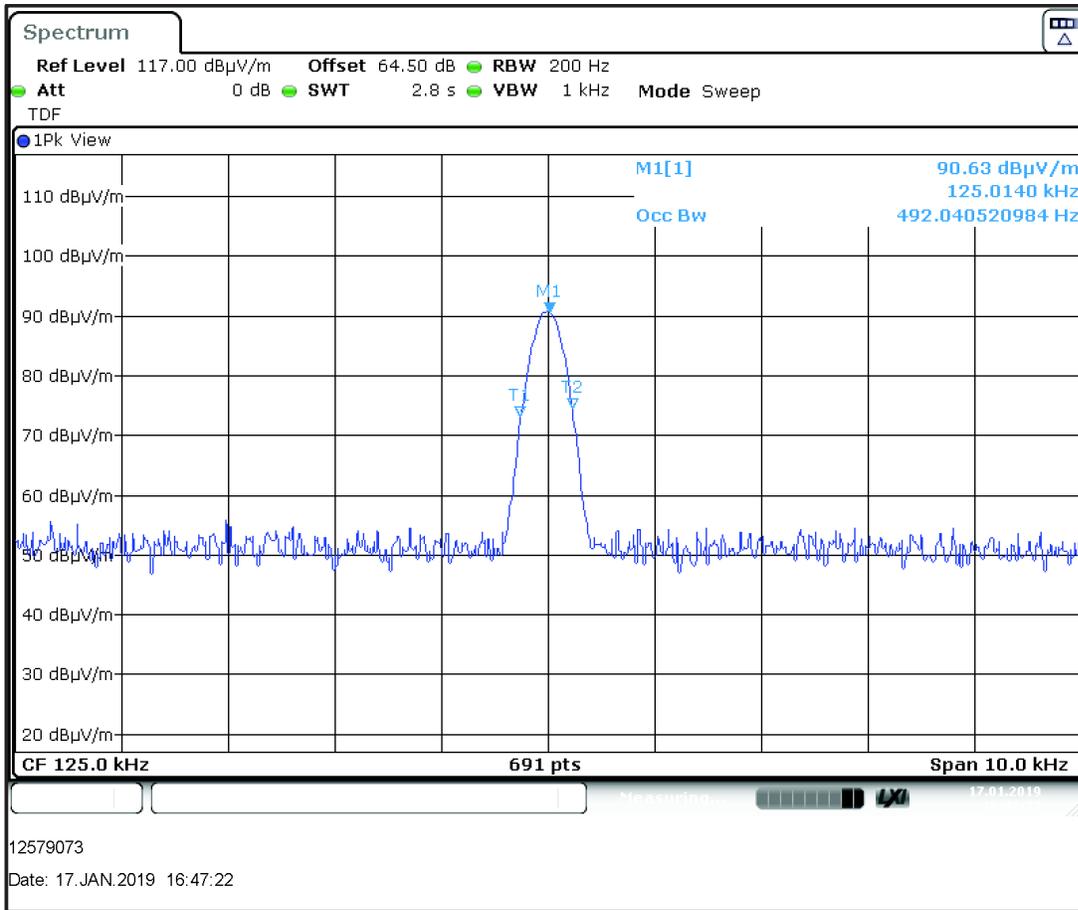

## **6. Measurement Uncertainty**

The expression of uncertainty of a measurement result allows realistic comparison of results with reference values and limits given in specifications and standards.

The uncertainty of the result may need to be taken into account when interpreting the measurement results.

The reported expanded uncertainties below are based on a standard uncertainty multiplied by an appropriate coverage factor such that a confidence level of approximately 95% is maintained. For the purposes of this document “approximately” is interpreted as meaning “effectively” or “for most practical purposes”.

<b>Measurement Type</b>	<b>Range</b>	<b>Confidence Level (%)</b>	<b>Calculated Uncertainty</b>
Radiated Spurious Emissions	9 kHz to 30 MHz	95%	±3.10 dB
Radiated Spurious Emissions	30 MHz to 1000 MHz	95%	±3.10 dB
99% Occupied Bandwidth	9 kHz to 30 MHz	95%	±0.87 %

The methods used to calculate the above uncertainties are in line with those recommended within the various measurement specifications. Where measurement specifications do not include guidelines for the evaluation of measurement uncertainty the published guidance of the appropriate accreditation body is followed.

## 7. Used equipment

### Test site: SR 1/2

ID	Manufacturer	Type	Model	Serial No.	Calibration Date	Cal. Cycle
1	Rohde & Schwarz	Antenna, Loop	HFH2-Z2	831247/012	8/5/2016	36
383	Rohde & Schwarz	Antenna, Rod	HFH2-Z1	890151/11	7/14/2017	24
424	EMCO	Antenna, Horn	EMCO 3116	00046537	7/28/2016	24
460	Deisl	Turntable	DT 4250 S		n/a	n/a
465	Schwarzbeck	Antenna, Trilog Broadband	VULB 9168	9168-240	8/8/2016	36
496	Rohde & Schwarz	Antenna, log. - periodical	HL050	100297	7/20/2016	36
587	Maturo	antenna mast, tilting	TAM 4.0-E	011/7180311	n/a	n/a
588	Maturo	Controller	NCD	029/7180311	n/a	n/a
591	Rohde & Schwarz	Receiver	ESU 40	100244/040	7/12/2018	12
608	Rohde & Schwarz	Switch Matrix	OSP 120	101227	4/8/2014	60
628	Maturo	Antenna mast	CAM 4.0-P	224/19590716	n/a	n/a
629	Maturo	Kippeinrichtung	KE 2.5-R-M	MAT002	n/a	n/a


**Test site: SR 9**

ID	Manufacturer	Type	Model	Serial No.	Calibration Date	Cal. Cycle
625	Schwarzbeck	Antenna, H-field	HFSL 7101	109	Verification - only relative measurements	n/a
637	Rohde & Schwarz	Spectrum Analyzer	FSV40	101587	7/11/2018	12
195	SPS	Power Supply	TOE8842-24	51455	Verified by Multimeter	12
216	Agilent	Multimeter	34401A	US36017458	7/11/2017	24
378	ESPEC/ Thermotec	Climatic Chamber	PL-1FT	5100869	8/9/2016	36

## 8. Open-Area-Test Site comparison

GPS coordinates

48.765746, 9.250684

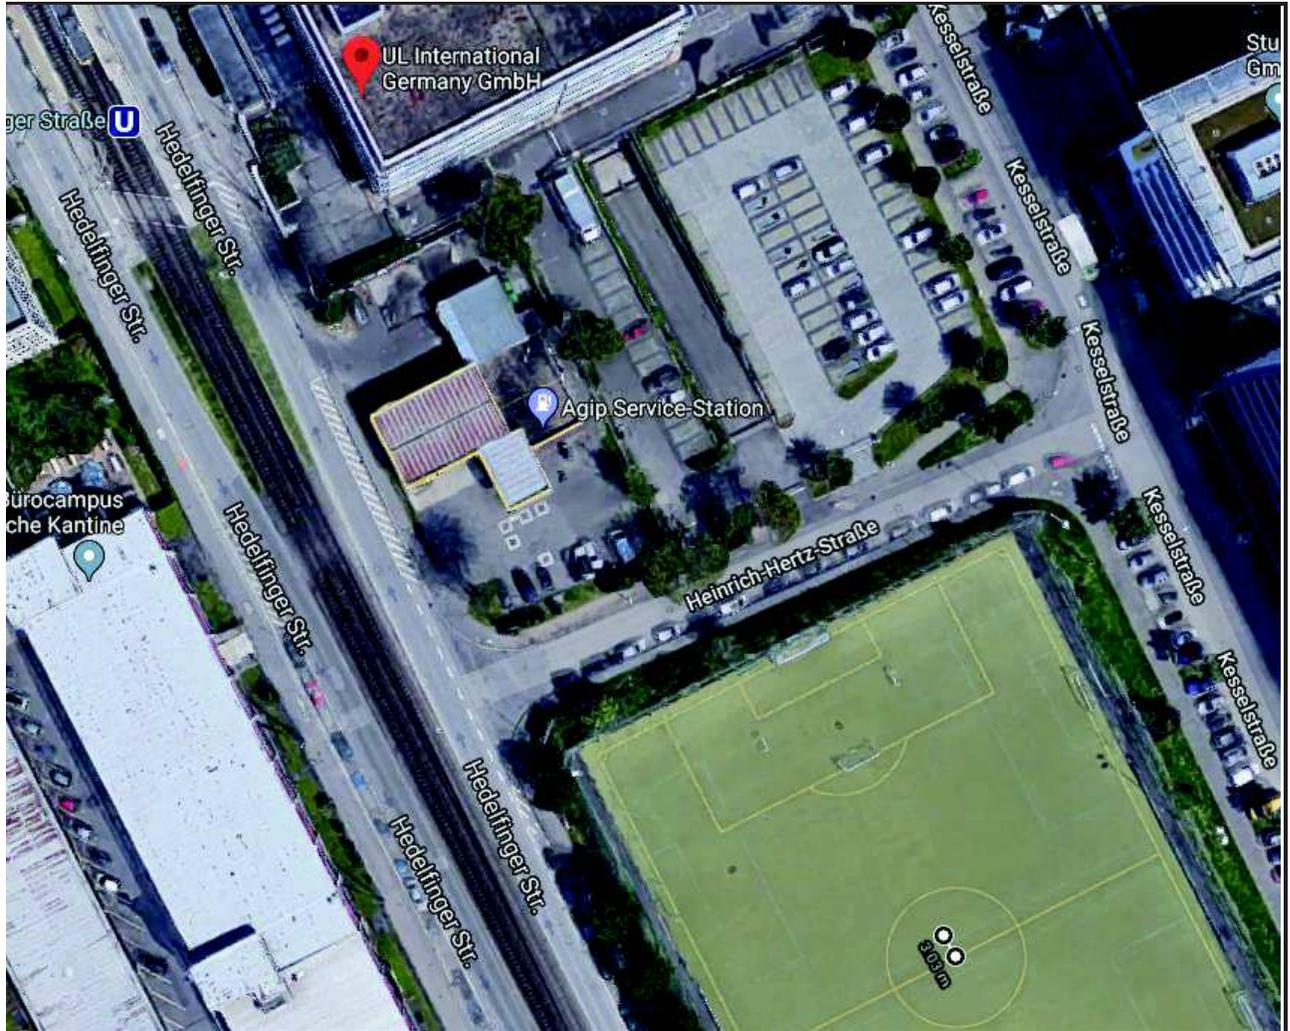

## Test Setup

The following listed equipment was used for the measurement:

Manufacturer	Type	Model	Frequency Range
Rohde & Schwarz	Receiver, EMI Test	SML03	9 kHz – 30 MHz
Rohde & Schwarz	Receiver, EMI Test	ESIB7	20 Hz – 7 GHz
Rohde & Schwarz	Antenna, Loop	HFH2-Z2	1 kHz – 30 MHz
ETS LINDGREN	Antenna, Loop	6512	1 kHz – 30 MHz
Huber and Suhner	RF Cable	-	-
Elspec	BNC Cable	-	-


The transmit signal to the ETS Lindgren loop antenna is supplied by the SML signal generator.

The distance of the transmit and receive Antenna was 3m. No other distances can be achieved in SR1 so 10m and 30m distances are not possible. Due to this no comparison is possible.

The Results are valid for equipment which is not larger as the loop antenna which represents in the comparison the EUT.

If an EUT is bigger measurements on an OATS are needed.

The measurement was performed on the lowest frequency 9 kHz and was increased by 10 kHz Steps up to 100 kHz. Then the step size was 100 kHz up to 1000 kHz. From 1 MHz up to the last frequency of 30 MHz the step size was 1 MHz. The HFH2-Z2 loop antenna placed at 80 cm height was used as the receive antenna. The intercepted RF signal from this antenna was measured with the ESIB7 Test Receiver and the values were recorded accordingly.

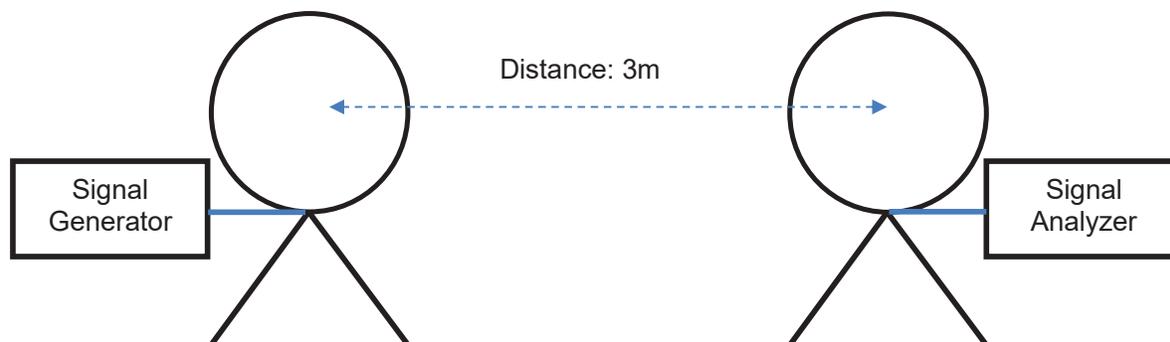

**Numeric values**


Frequency (MHz)	0.01	0.02	0.03	0.04	0.05	0.06	0.07	0.08	0.09	0.10	0.125	0.20
SR1 Measured power (dB $\mu$ V)	87.91	87.22	87.01	86.98	86.40	86.32	85.98	85.20	84.30	83.80	82.96	82.55
OATS Measured power (dB $\mu$ V)	86.22	87.42	87.50	86.49	86.01	85.39	84.32	84.29	84.20	83.10	83.60	82.32
Delta (dB)	-1.69	0.20	0.49	-0.49	-0.39	-0.93	-1.66	-0.91	-0.10	-0.70	0.64	-0.23

Frequency (MHz)	0.30	0.40	0.50	0.60	0.70	0.80	0.90	1.00	2.00	3.00	4.00	5.00
SR1 Measured power (dB $\mu$ V)	81.98	81.23	80.39	80.00	79.53	79.10	78.87	78.20	77.60	77.01	76.32	76.04
OATS Measured power (dB $\mu$ V)	80.84	80.49	79.58	79.58	78.85	78.59	77.69	77.50	77.91	76.90	75.45	74.90
Delta (dB)	-1.14	-0.74	-0.81	-0.42	-0.68	-0.51	-1.18	-0.70	0.31	-0.11	-0.87	-1.14

Frequency (MHz)	6.00	7.00	8.00	9.00	10.00	11.00	12.00	13.00	13.56	14.00	15.00	16.00
SR1 Measured power (dB $\mu$ V)	75.98	75.43	75.20	74.97	74.59	74.32	74.05	73.83	73.50	73.22	73.20	73.05
OATS Measured power (dB $\mu$ V)	74.94	74.09	74.11	73.58	73.87	74.38	74.84	74.31	74.88	74.29	73.90	73.93
Delta (dB)	-1.04	-1.34	-1.09	-1.39	-0.72	0.06	0.79	0.48	1.38	1.07	0.70	0.88

Frequency (MHz)	17.00	18.00	19.00	20.00	21.00	22.00	23.00	24.00	25.00	26.00	27.00	28.00	29.00	30.00
SR1 Measured power (dB $\mu$ V)	73.00	72.86	72.74	72.64	72.50	72.52	72.39	72.20	72.04	71.97	71.86	71.64	71.41	71.27
OATS Measured power (dB $\mu$ V)	73.70	73.98	72.90	72.60	72.45	72.34	72.59	72.59	71.97	71.59	71.58	71.88	71.98	72.49
Delta (dB)	0.70	1.12	0.16	-0.04	-0.05	-0.18	0.20	0.39	-0.07	-0.38	-0.28	0.24	0.57	1.22

**Graph**

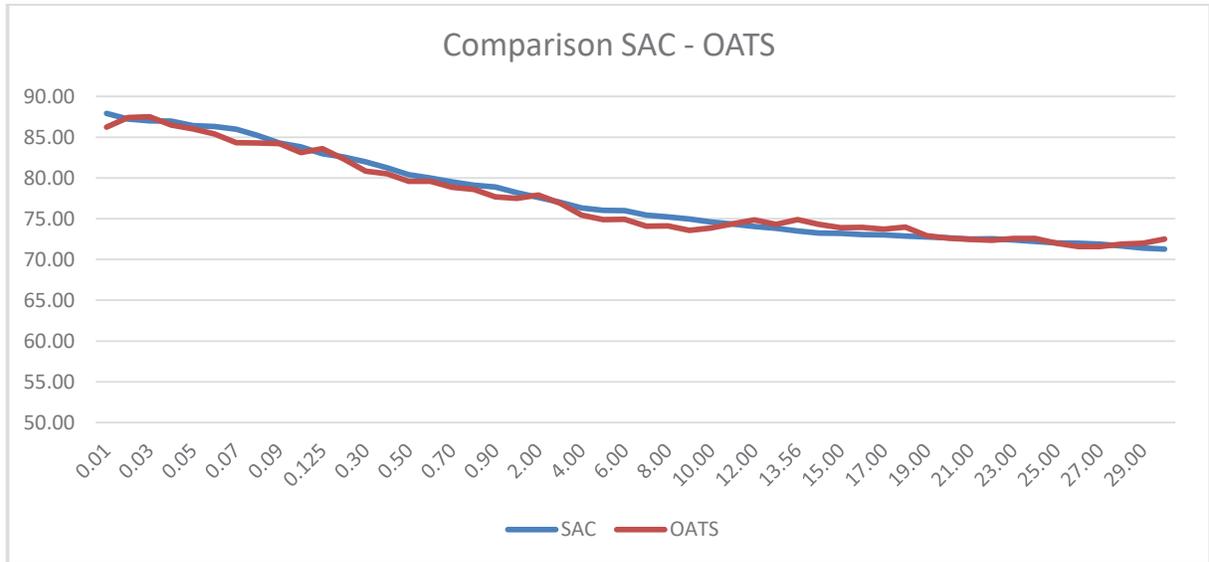

Conclusion: Maximum difference is 1.69 dB @ 9 kHz

## 9. Report Revision History

Version Number	Revision Details		
	Page No(s)	Clause	Details
1.0	-	-	Initial Version

END OF REPORT