



Certificate #4338.01

# RADIO TEST REPORT

Report No.: STS2104174W01

Issued for

Fibar Group S.A.

ul. Serdeczna 3 Wysogotowo 62-081 Poland

<b>Product Name:</b>	Yubii Home
<b>Brand Name:</b>	FIBARO
<b>Model Name:</b>	YH-001(X)
<b>Series Model:</b>	N/A
<b>FCC ID:</b>	2AA9MYH001
<b>Test Standard:</b>	FCC Part 15.247

Any reproduction of this document must be done in full. No single part of this document may be reproduced without permission from STS, all test data presented in this report is only applicable to presented test sample.





### TEST RESULT CERTIFICATION

**Applicant's Name** ..... : Fibar Group S.A.  
 Address ..... : ul. Serdeczna 3 Wysogotowo 62-081 Poland  
**Manufacturer's Name** ..... : Fibar Group S.A.  
 Address ..... : ul. Serdeczna 3 Wysogotowo 62-081 Poland

**Product Description**

Product Name ..... : Yubii Home  
 Brand Name ..... : FIBARO  
 Model Name ..... : YH-001(X)  
 Series Model ..... : N/A  
**Test Standards** ..... : FCC Part 15.247  
 Test Procedure ..... : ANSI C63.10-2013

This device described above has been tested by STS, the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.  
 This report shall not be reproduced except in full, without the written approval of STS, this document only be altered or revised by STS, personal only, and shall be noted in the revision of the document.

**Date of Test** ..... :  
 Date of receipt of test item ..... : 30 Apr. 2021  
 Date (s) of performance of tests ..... : 30 Apr. 2021 ~ 08 June 2021  
 Date of Issue ..... : 08 June 2021  
 Test Result ..... : **Pass**

Testing Engineer : Chris Chen  
 (Chris Chen)  
 Technical Manager : Sean She  
 (Sean she)  
 Authorized Signatory : Vita Li  
 (Vita Li)





## Table of Contents

	Page
<b>1. SUMMARY OF TEST RESULTS</b>	<b>6</b>
1.1 TEST FACTORY	7
1.2 MEASUREMENT UNCERTAINTY	7
<b>2. GENERAL INFORMATION</b>	<b>8</b>
2.1 GENERAL DESCRIPTION OF THE EUT	8
2.2 DESCRIPTION OF THE TEST MODES	10
2.3 TEST SOFTWARE AND POWER LEVEL	10
2.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	11
2.5 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS	12
2.6 EQUIPMENTS LISTS	13
<b>3. EMC EMISSION TEST</b>	<b>15</b>
3.1 CONDUCTED EMISSION MEASUREMENT	15
3.2 RADIATED EMISSION MEASUREMENT	19
<b>4. CONDUCTED SPURIOUS &amp; BAND EDGE EMISSION</b>	<b>41</b>
4.1 LIMIT	41
4.2 TEST PROCEDURE	41
4.3 DEVIATION FROM STANDARD	41
4.4 TEST SETUP	41
4.5 EUT OPERATION CONDITIONS	41
4.6 TEST RESULTS	42
<b>5. POWER SPECTRAL DENSITY TEST</b>	<b>60</b>
5.1 LIMIT	60
5.2 TEST PROCEDURE	60
5.3 DEVIATION FROM STANDARD	60
5.4 TEST SETUP	60
5.5 EUT OPERATION CONDITIONS	60
5.6 TEST RESULTS	61
<b>6. BANDWIDTH TEST</b>	<b>70</b>
6.1 LIMIT	70
6.2 TEST PROCEDURE	70
6.3 DEVIATION FROM STANDARD	70
6.4 TEST SETUP	70
6.5 EUT OPERATION CONDITIONS	70

**Table of Contents**

	<b>Page</b>
6.6 TEST RESULTS	71
<b>7. PEAK OUTPUT POWER TEST</b>	<b>80</b>
7.1 LIMIT	80
7.2 TEST PROCEDURE	80
7.3 DEVIATION FROM STANDARD	80
7.4 TEST SETUP	81
7.5 EUT OPERATION CONDITIONS	81
7.6 TEST RESULTS	82
<b>8. ANTENNA REQUIREMENT</b>	<b>83</b>
8.1 STANDARD REQUIREMENT	83
8.2 EUT ANTENNA	83
<b>APPENDIX-PHOTOS OF TEST SETUP</b>	<b>84</b>



**Revision History**

Rev.	Issue Date	Report No.	Effect Page	Contents
00	08 June 2021	STS2104174W01	ALL	Initial Issue





## 1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:  
KDB 558074 D01 15.247 Meas Guidance v05r02.

FCC Part 15.247, Subpart C			
Standard Section	Test Item	Judgment	Remark
15.207	Conducted Emission	PASS	--
15.247 (a)(2)	6dB Bandwidth	PASS	--
15.247 (b)(3)	Output Power	PASS	--
15.209	Radiated Spurious Emission	PASS	--
15.247 (d)	Conducted Spurious & Band Edge Emission	PASS	--
15.247 (e)	Power Spectral Density	PASS	--
15.205	Restricted Band Edge Emission	PASS	--
Part 15.247(d)/ part 15.209(a)	Band Edge Emission	PASS	--
15.203	Antenna Requirement	PASS	--

### NOTE:

- (1) "N/A" denotes test is not applicable in this Test Report.
- (2) All tests are according to ANSI C63.10-2013.



## 1.1 TEST FACTORY

SHENZHEN STS TEST SERVICES CO., LTD

Add. : A 1/F, Building B, Zhuoke Science Park, No.190 Chongqing Road, HepingShequ, Fuyong Sub-District, Bao'an District, Shenzhen, Guang Dong, China

FCC test Firm Registration Number: 625569

IC test Firm Registration Number: 12108A

A2LA Certificate No.: 4338.01

## 1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement  $y \pm U$ , where expanded uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	RF output power, conducted	$\pm 0.68\text{dB}$
2	Unwanted Emissions, conducted	$\pm 2.988\text{dB}$
3	All emissions, radiated 9K-30MHz	$\pm 2.68\text{dB}$
4	All emissions, radiated 30M-1GHz	$\pm 4.39\text{dB}$
5	All emissions, radiated 1G-6GHz	$\pm 5.10\text{dB}$
6	All emissions, radiated >6G	$\pm 5.48\text{dB}$
7	Conducted Emission (9KHz-150KHz)	$\pm 2.79\text{dB}$
8	Conducted Emission (150KHz-30MHz)	$\pm 2.80\text{dB}$



## 2. GENERAL INFORMATION

### 2.1 GENERAL DESCRIPTION OF THE EUT

Product Name	Yubii Home	
Trade Name	FIBARO	
Model Name	YH-001(X)	
Series Model	N/A	
Model Difference	Where (X) is optional used for the Home Center models with no EMC and radio relevant changes (i.e. different colour of the enclosure).	
Product Description	The EUT is a Yubii Home	
	Operation Frequency:	802.11b/g/n 20: 2412~2472 MHz
	Modulation Type:	802.11b(DSSS):CCK,DQPSK,DBPSK 802.11g(OFDM):BPSK,QPSK,16-QAM,64-QAM 802.11n(OFDM):BPSK,QPSK,16-QAM,64-QAM
	Bit Rate of Transmitter:	802.11b:11/5.5/2/1 Mbps 802.11g:54/48/36/24/18/12/9/6Mbps 802.11n(20MHz): 65/58.5/52/39/26/19.5/13/6.5Mbps
	Number of Channel:	802.11b/g/n20: 11CH
	Antenna Designation:	Please refer to see Note 3.
	AntennaGain (dBi):	4.8dBi
	Duty Cycle:	>98%
	Channel List	Please refer to the Note 2.
Adapter	Input: AC 220 V- 240V / 50-60Hz Output: 5V DC 1A	
Hardware version number	001	
Software version number	5	
Connecting I/O Port(s)	Please refer to the Note 1.	

Note:

1. For a more detailed features description, please refer to the manufacturer’s specifications or the User Manual.





2.

Operation Frequency of channel	
802.11b/g/n(20MHz)	
Channel	Frequency
01	2412
02	2417
03	2422
04	2427
05	2432
06	2437
07	2442
08	2447
09	2452
10	2457
11	2462
12	2467
13	2472

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Carrier Frequency Channel

2.4GHz Test Frequency:

For 802.11b/g/n (HT20)	
Channel	Freq.(MHz)
01	2412
06	2437
11	2462
12	2467
13	2472

3.

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	NOTE
1	FIBARO	YH-001(X)	PCB	N/A	4.8dBi	WLAN Antenna

Note: The antenna information refer the manufacturer provide report, applicable only to the tested sample identified in the report.



2.2 DESCRIPTION OF THE TEST MODES

Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Worst Mode	Description	Data Rate
Mode 1	TX IEEE 802.11b CH1	1 Mbps
Mode 2	TX IEEE 802.11b CH6	1 Mbps
Mode 3	TX IEEE 802.11 b CH11	1 Mbps
Mode 4	TX IEEE 802.11 b CH12	1 Mbps
Mode 5	TX IEEE 802.11 b CH13	1 Mbps
Mode 6	TX IEEE 802.11g CH1	6 Mbps
Mode 7	TX IEEE 802.11g CH6	6 Mbps
Mode 8	TX IEEE 802.11g CH11	6 Mbps
Mode 9	TX IEEE 802.11g CH12	6 Mbps
Mode 10	TX IEEE 802.11g CH13	6 Mbps
Mode 11	TX IEEE 802.11n HT20 CH1	MCS 0
Mode 12	TX IEEE 802.11n HT20 CH6	MCS 0
Mode 13	TX IEEE 802.11n HT20 CH11	MCS 0
Mode 14	TX IEEE 802.11n HT20 CH12	MCS 0
Mode 15	TX IEEE 802.11n HT20 CH13	MCS 0

Note:

- (1) The measurements are performed at all Bit Rate of Transmitter, the worst data was reported.
- (2) We tested for all available U.S. voltage and frequencies (For 120V, 50/60Hz and 240V, 50/60Hz) for which the device is capable of operation, and the worst case of 120V/ 60Hz is shown in the report.
- (3) The battery is fully-charged during the radiated and RF conducted test.

AC Conducted Emission

Test Case	
AC Conducted Emission	Mode16: Keeping WIFI TX


2.3 TEST SOFTWARE AND POWER LEVEL

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level.


RF Function	Type	Mode Or Modulation type	ANT Gain(dBi)	Power Class	Software For Testing
WIFI(2.4G)	2.4G WIFI	802.11b	4.8	Default	PUTTY
		802.11g		Default	
		802.11n(HT20)		Default	

## 2.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

### Radiation Test Set

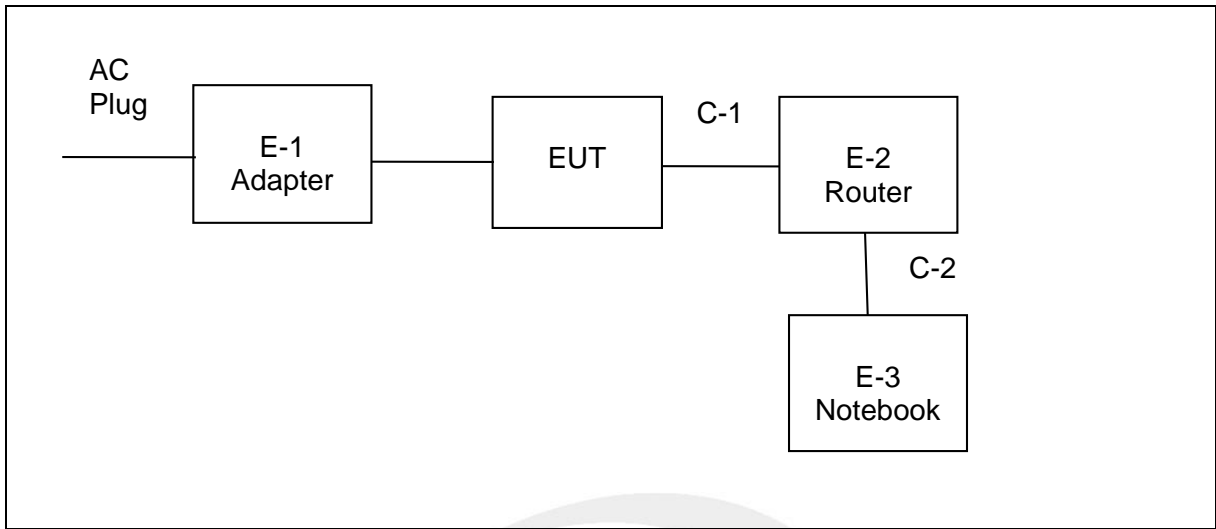

### Conduction Test Set

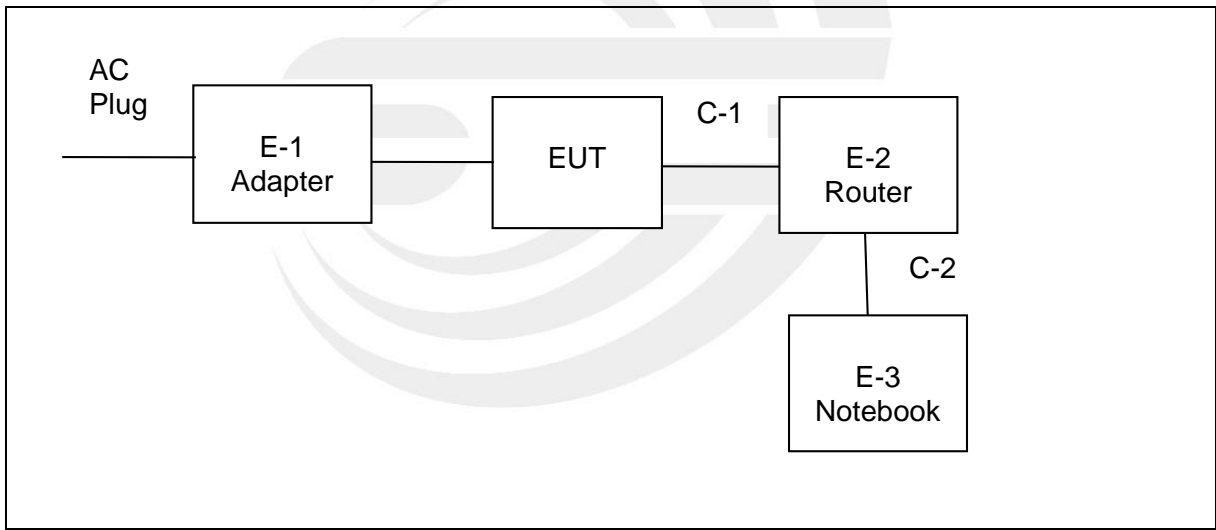



## 2.5 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

### Necessary accessories

Item	Equipment	Mfr/Brand	Model/Type No.	Length	Note
E-1	Adapter	Ktec	KSAS0050500100D5U	N/A	N/A

### Support units

Item	Equipment	Mfr/Brand	Model/Type No.	Length	Note
E-2	Router	ASUS	RT-AC66U B1	N/A	N/A
E-3	Notebook	LENOVO	ThinkPad E470	N/A	N/A
C-1	USB Cable	N/A	N/A	100cm	NO
C-2	LAN Cable	N/A	N/A	120cm	N/A

#### Note:

- (1) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (2) “YES” is means “with core”; “NO” is means “without core”.



## 2.6 EQUIPMENTS LISTS

## Radiation Test equipment

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
Test Receiver	R&S	ESCI	101427	2020.10.12	2021.10.11
Signal Analyzer	R&S	FSV 40-N	101823	2020.10.10	2021.10.09
Active loop Antenna	ZHINAN	ZN30900C	16035	2019.07.11	2021.07.10
Bilog Antenna	TESEQ	CBL6111D	34678	2020.10.12	2022.10.11
Horn Antenna	SCHWARZBECK	BBHA 9120D	02014	2019.10.15	2021.10.14
SHF-EHF Horn Antenna (18G-40GHz)	A-INFO	LB-180400-KF	J211020657	2020.10.12	2022.10.11
Pre-Amplifier (0.1M-3GHz)	EM	EM330	060665	2020.10.12	2021.10.11
Pre-Amplifier (1G-18GHz)	SKET	LNPA-01018G-45	SK2018080901	2020.10.12	2021.10.11
Pre-Amplifier (18G-40GHz)	SKET	LNPA-1840-50	SK2018101801	2020.10.10	2021.10.09
Temperature & Humidity	HH660	Mieo	N/A	2020.10.13	2021.10.12
Turn table	EM	SC100_1	60531	N/A	N/A
Antenna mast	EM	SC100	N/A	N/A	N/A
Test SW	FARAD	EZ-EMC(Ver.STSLAB-03A1 RE)			

## Conduction Test equipment

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
Test Receiver	R&S	ESCI	101427	2020.10.12	2021.10.11
LISN	R&S	ENV216	101242	2020.10.12	2021.10.11
LISN	EMCO	3810/2NM	23625	2020.10.12	2021.10.11
Temperature & Humidity	HH660	Mieo	N/A	2020.10.13	2021.10.12
Test SW	FARAD	EZ-EMC(Ver.STSLAB-03A1 RE)			



## RF Connected Test

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
Power Sensor	Keysight	U2021XA	MY55520005	2020.10.10	2021.10.09
			MY55520006	2020.10.10	2021.10.09
			MY56120038	2020.10.10	2021.10.09
			MY56280002	2020.10.10	2021.10.09
Signal Analyzer	Agilent	N9020A	MY51110105	2021.03.04	2022.03.03
Temperature & Humidity	HH660	Mieo	N/A	2020.10.13	2021.10.12
Test SW	FARAD	EZ-EMC(Ver.STSLAB-03A1 RE)			





### 3. EMC EMISSION TEST

#### 3.1 CONDUCTED EMISSION MEASUREMENT

##### 3.1.1 POWER LINE CONDUCTED EMISSION LIMITS

The radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table.

FREQUENCY (MHz)	Conducted Emission limit (dBuV)	
	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of “ \* ” marked band means the limitation decreases linearly with the logarithm of the frequency in the range.


The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

### 3.1.2 TEST PROCEDURE

- The EUT is 0.8 m from the horizontal ground plane and 0.4 m from the vertical ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments are powered from additional LISN(s). The LISN provides 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN is at least 80 cm from the nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

### 3.1.3 TEST SETUP

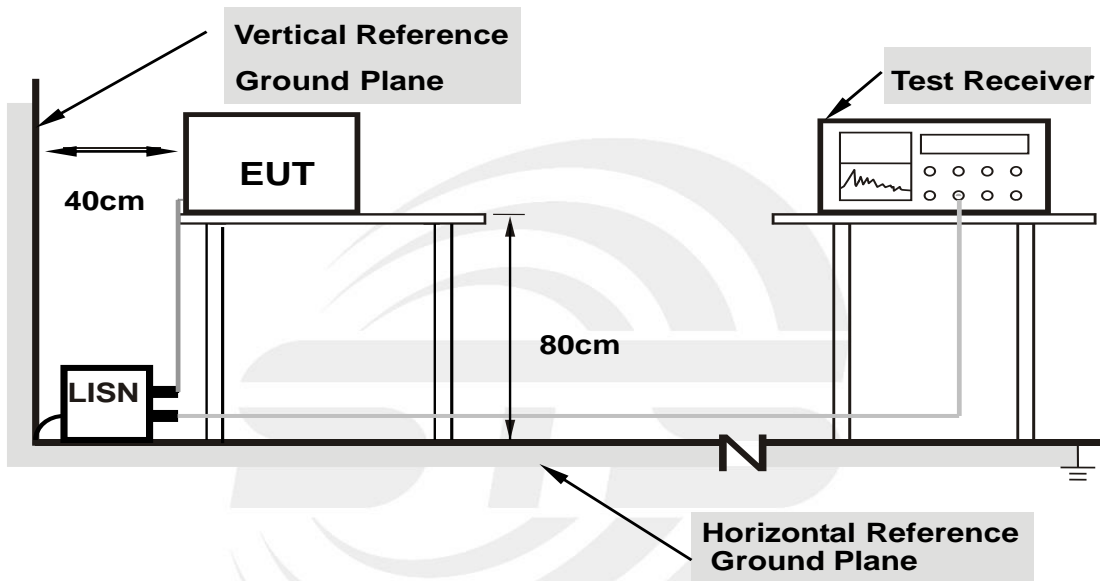

**Note: 1. Support units were connected to second LISN.**

**2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes support units.**

### 3.1.4 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.






3.1.5 TEST RESULT

Temperature:	23.5(C)	Relative Humidity:	59%RH
Test Voltage:	AC 120V/60Hz	Phase:	L
Test Mode:	Mode 16		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.3780	27.86	20.58	48.44	58.32	-9.88	QP
2	0.3780	17.07	20.58	37.65	48.32	-10.67	AVG
3	0.7500	20.12	20.26	40.38	56.00	-15.62	QP
4	0.7500	7.53	20.26	27.79	46.00	-18.21	AVG
5	1.3660	19.74	20.16	39.90	56.00	-16.10	QP
6	1.3660	4.56	20.16	24.72	46.00	-21.28	AVG
7	2.6100	19.80	20.11	39.91	56.00	-16.09	QP
8	2.6100	7.14	20.11	27.25	46.00	-18.75	AVG
9	4.1020	30.68	20.06	50.74	56.00	-5.26	QP
10	4.1020	18.71	20.06	38.77	46.00	-7.23	AVG
11	10.9180	18.42	19.85	38.27	60.00	-21.73	QP
12	10.9180	5.79	19.85	25.64	50.00	-24.36	AVG

Remark:

1. All readings are Quasi-Peak and Average values
2. Margin = Result (Result = Reading + Factor) – Limit
3. Factor=LISN factor+Cable loss+Limiter (10dB)

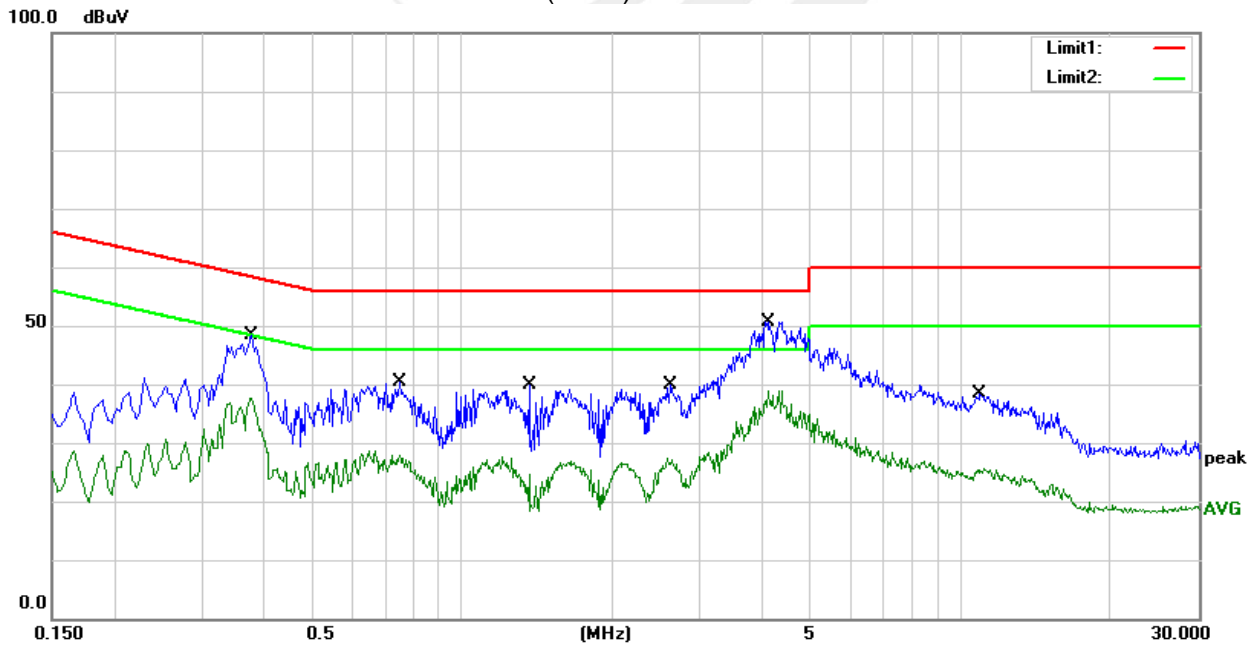




Temperature:	23.5(C)	Relative Humidity:	59%RH
Test Voltage:	AC 120V/60Hz	Phase:	N
Test Mode:	Mode 16		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.3420	21.85	20.66	42.51	59.15	-16.64	QP
2	0.3420	12.32	20.66	32.98	49.15	-16.17	AVG
3	0.7220	15.20	20.26	35.46	56.00	-20.54	QP
4	0.7220	2.09	20.26	22.35	46.00	-23.65	AVG
5	1.4900	14.59	20.15	34.74	56.00	-21.26	QP
6	1.4900	1.23	20.15	21.38	46.00	-24.62	AVG
7	4.3180	25.44	20.05	45.49	56.00	-10.51	QP
8	4.3180	12.91	20.05	32.96	46.00	-13.04	AVG
9	11.0780	14.71	19.84	34.55	60.00	-25.45	QP
10	11.0780	1.09	19.84	20.93	50.00	-29.07	AVG
11	24.5380	11.00	19.52	30.52	60.00	-29.48	QP
12	24.5380	-0.65	19.52	18.87	50.00	-31.13	AVG

Remark:

1. All readings are Quasi-Peak and Average values
2. Margin = Result (Result =Reading + Factor) –Limit
3. Factor=LISN factor+Cable loss+Limiter (10dB)

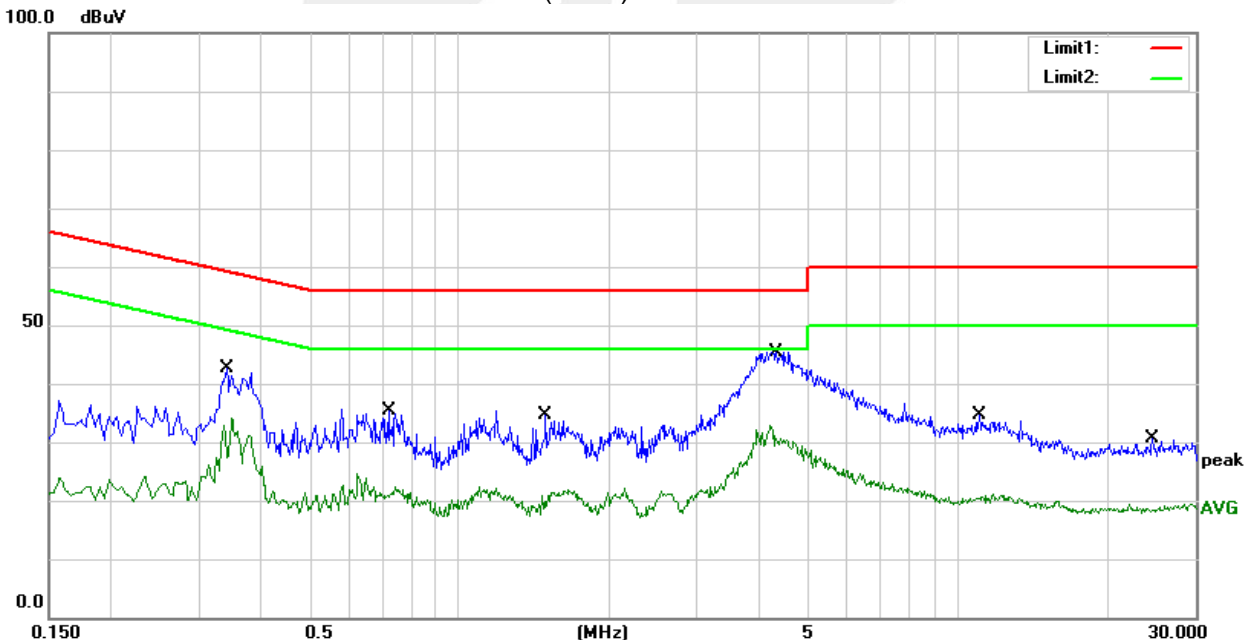



### 3.2 RADIATED EMISSION MEASUREMENT

#### 3.2.1 RADIATED EMISSION LIMITS

In any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the Restricted band specified on Part15.205(a)&209(a) limit in the table and according to ANSI C63.10-2013 below has to be followed.

LIMITS OF RADIATED EMISSION MEASUREMENT (0.009MHz - 1000MHz)

Frequencies (MHz)	Field Strength (microrvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (1000MHz-25GHz)

FREQUENCY (MHz)	(dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

#### LIMITS OF RESTRICTED FREQUENCY BANDS

FREQUENCY (MHz)	FREQUENCY (MHz)	FREQUENCY (MHz)	FREQUENCY (GHz)
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	Above 38.6
13.36-13.41			



For Radiated Emission

Spectrum Parameter	Setting
Attenuation	Auto
Detector	Peak/QP/AV
Start Frequency	9 KHz/150KHz(Peak/QP/AV)
Stop Frequency	150KHz/30MHz(Peak/QP/AV)
RB / VB (emission in restricted band)	200Hz (From 9kHz to 0.15MHz)/ 9KHz (From 0.15MHz to 30MHz); 200Hz (From 9kHz to 0.15MHz)/ 9KHz (From 0.15MHz to 30MHz)

Spectrum Parameter	Setting
Attenuation	Auto
Detector	Peak/QP
Start Frequency	30 MHz(Peak/QP)
Stop Frequency	1000 MHz (Peak/QP)
RB / VB (emission in restricted band)	120 KHz / 300 KHz

Spectrum Parameter	Setting
Attenuation	Auto
Detector	Peak/AV
Start Frequency	1000 MHz(Peak/AV)
Stop Frequency	10th carrier hamonic(Peak/AV)
RB / VB (emission in restricted band)	1 MHz / 3 MHz(Peak) 1 MHz/1/T MHz(AVG)

For Restricted band

Spectrum Parameter	Setting
Detector	Peak/AV
Start/Stop Frequency	Lower Band Edge: 2300 to 2403 MHz Upper Band Edge: 2479 to 2500 MHz
RB / VB	1 MHz / 3 MHz(Peak) 1 MHz/1/T MHz(AVG)



Receiver Parameter	Setting
Start ~ Stop Frequency	9kHz~90kHz / RB 200Hz for PK & AV
Start ~ Stop Frequency	90kHz~110kHz / RB 200Hz for QP
Start ~ Stop Frequency	110kHz~490kHz / RB 200Hz for PK & AV
Start ~ Stop Frequency	490kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

### 3.2.2 TEST PROCEDURE


- a. The measuring distance at 3 m shall be used for measurements at frequency 0.009MHz up to 1GHz, and above 1GHz.
- b. The EUT was placed on the top of a rotating table 0.8 m (above 1GHz is 1.5 m) above the ground at a 3 m anechoic chamber test site. The table was rotated 360 degree to determine the position of the highest radiation.
- c. The height of the equipment shall be 0.8 m (above 1GHz is 1.5 m); the height of the test antenna shall vary between 1 m to 4 m. Horizontal and vertical polarization of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and QuasiPeak detector mode will be re-measured.
- e. If the Peak Mode measured value is compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and no additional QP Mode measurement was performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported.

### 3.2.3 TEST SETUP


#### (A) Radiated Emission Test-Up Frequency Below 30MHz

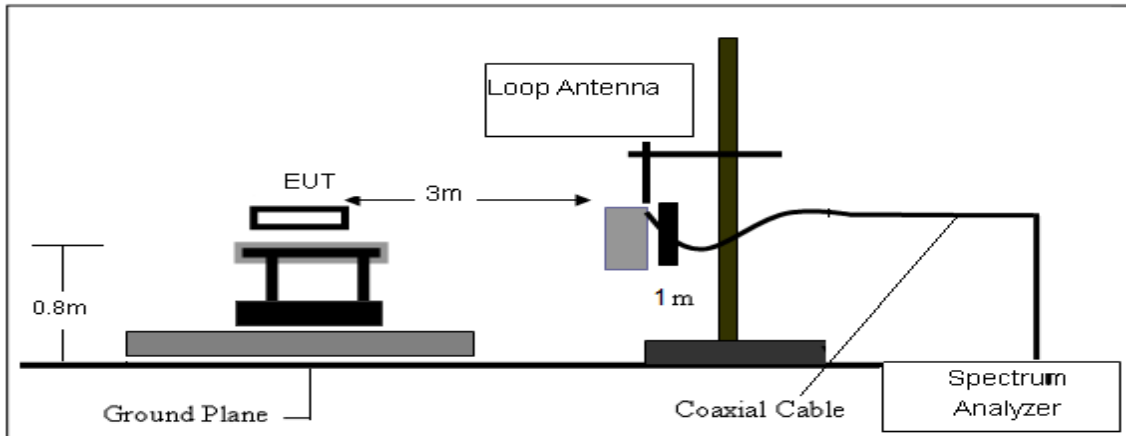

#### (B) Radiated Emission Test-Up Frequency 30MHz~1GHz

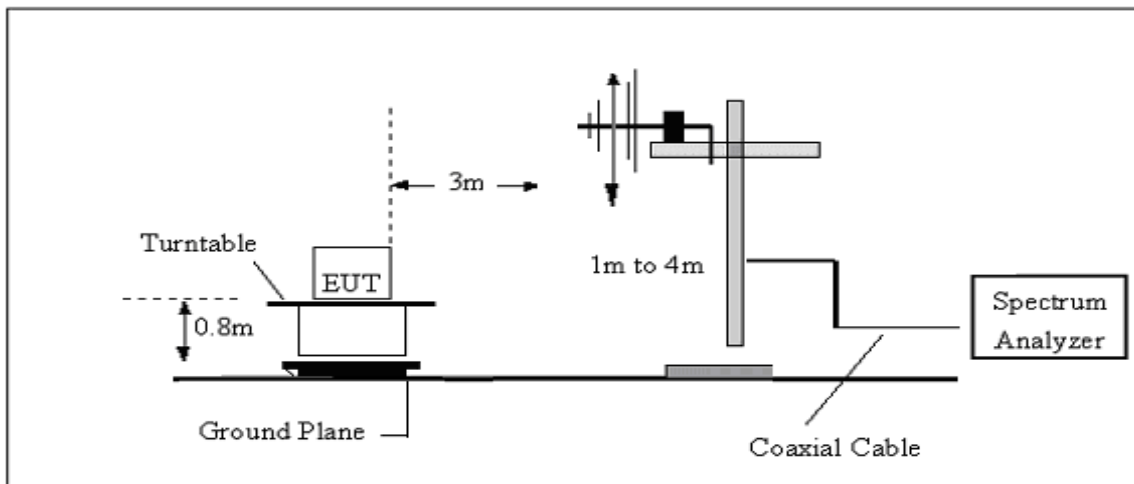

#### (C) Radiated Emission Test-Up Frequency Above 1GHz

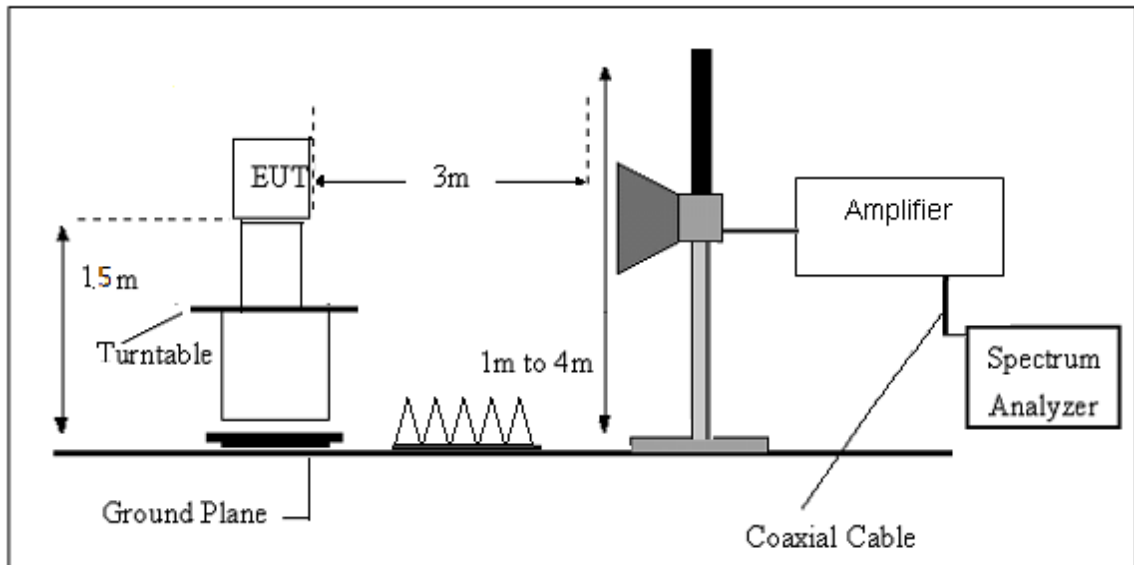

### 3.2.4 EUT OPERATING CONDITIONS

Please refer to section 3.1.4 of this report.



### 3.2.5 FIELD STRENGTH CALCULATION

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where

FS = Field Strength

CL = Cable Attenuation Factor (Cable Loss)

RA = Reading Amplitude

AG = Amplifier Gain

AF = Antenna Factor

For example

Frequency (MHz)	FS (dB $\mu$ V/m)	RA (dB $\mu$ V/m)	AF (dB)	CL (dB)	AG (dB)	Factor (dB)
300	40	58.1	12.2	1.6	31.9	-18.1

$$\text{Factor} = \text{AF} + \text{CL} - \text{AG}$$





## 3.2.6 TEST RESULT

9KHz-30MHz

Temperature:	23.1(C)	Relative Humidity:	60%RH
Test Voltage:	AC 120V/60Hz	Polarization:	--
Test Mode:	TX Mode		

Freq. (MHz)	Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	State P/F	Test Result
--	--	--	--	--	PASS
--	--	--	--	--	PASS

## Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor =  $40 \log (\text{specific distance}/\text{test distance})$ (dB);

Limit line = specific limits(dBuV) + distance extrapolation factor.






(30MHz - 1000MHz)

Temperature:	23.1(C)	Relative Humidity:	60%RH
Test Voltage:	AC 120V/60Hz	Phase:	Horizontal
Test Mode:	Mode 1/2/3/4/5/6/7/8/9/10/11/12/13/14/15 (Mode 12 worst mode)		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	125.0600	57.54	-18.22	39.32	43.50	-4.18	QP
2	250.1900	58.21	-16.10	42.11	46.00	-3.89	QP
3	504.3300	47.94	-7.98	39.96	46.00	-6.04	QP
4	647.8900	39.94	-4.88	35.06	46.00	-10.94	QP
5	792.4200	32.27	-1.99	30.28	46.00	-15.72	QP
6	960.2300	32.76	1.76	34.52	54.00	-19.48	QP

Remark:

- Margin = Result (Result =Reading + Factor )–Limit
- Factor= Antenna factor+Cable attenuation factor(cable loss)-Amplifier gain

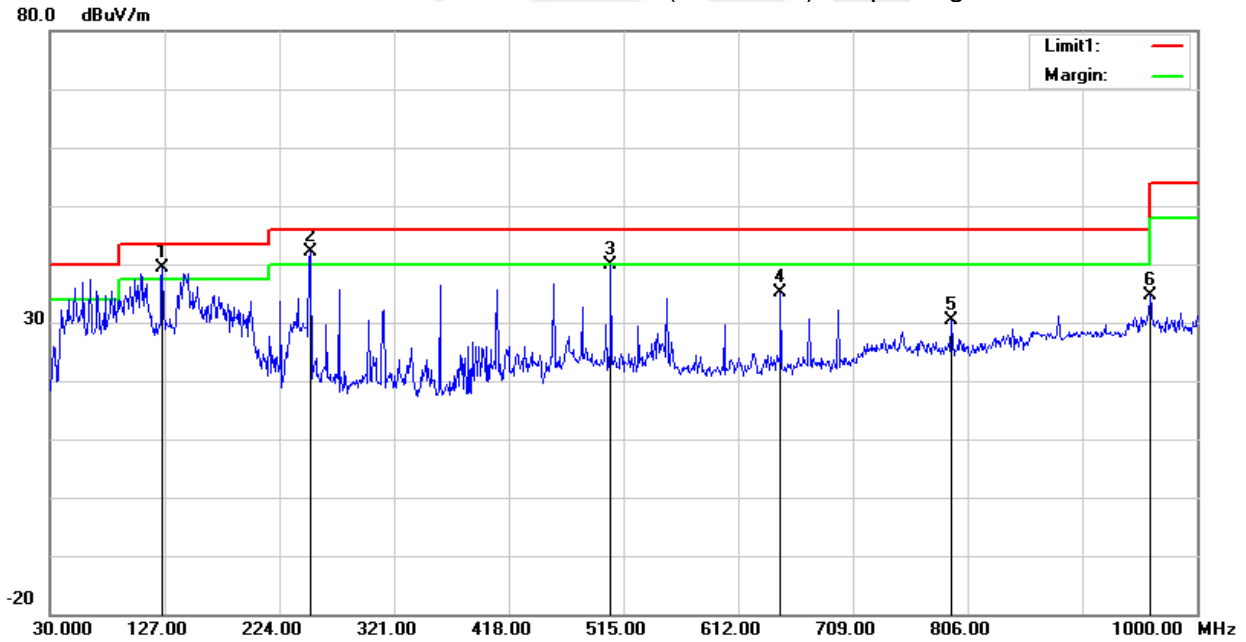




Temperature:	23.1(C)	Relative Humidity:	60%RH
Test Voltage:	AC 120V/60Hz	Phase:	Vertical
Test Mode:	Mode 1/2/3/4/5/6/7/8/9/10/11/12/13/14/15 (Mode 12 worst mode)		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	108.5700	54.34	-19.22	35.12	43.50	-8.38	QP
2	250.1900	50.45	-16.10	34.35	46.00	-11.65	QP
3	359.8000	46.43	-12.87	33.56	46.00	-12.44	QP
4	504.3300	39.89	-7.98	31.91	46.00	-14.09	QP
5	647.8900	37.65	-4.88	32.77	46.00	-13.23	QP
6	960.2300	32.39	1.76	34.15	54.00	-19.85	QP

Remark:.

- Margin = Result (Result =Reading + Factor )–Limit
- Factor= Antenna factor+Cable attenuation factor(cable loss)-Amplifier gain

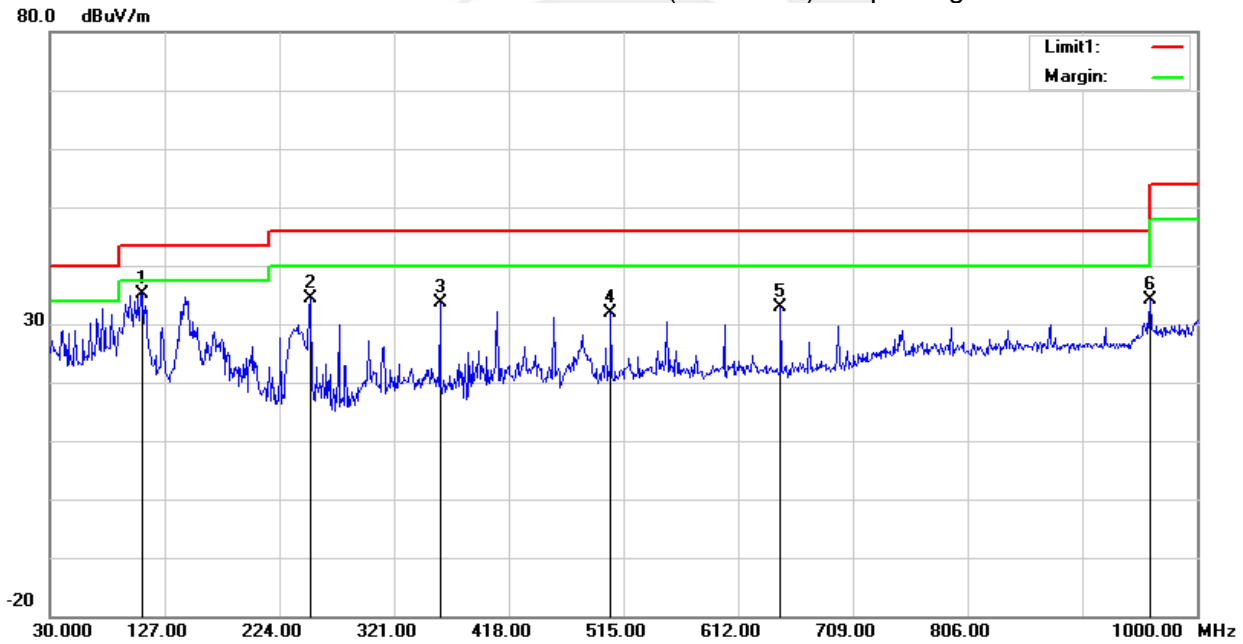



(1000MHz-25GHz) Restricted band and Spurious emission Requirements

802.11 n(HT20)

Frequency (MHz)	Meter Reading (dBμV)	Amplifier (dB)	Loss (dB)	Antenna Factor (dB/m)	Corrected Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type	Comment
Low Channel (802.11n(HT20)/2412 MHz)										
3264.89	61.31	44.70	6.70	28.20	-9.80	51.51	74.00	-22.49	PK	Vertical
3264.89	49.99	44.70	6.70	28.20	-9.80	40.19	54.00	-13.81	AV	Vertical
3264.79	61.42	44.70	6.70	28.20	-9.80	51.62	74.00	-22.38	PK	Horizontal
3264.79	50.03	44.70	6.70	28.20	-9.80	40.23	54.00	-13.77	AV	Horizontal
4824.56	59.20	44.20	9.04	31.60	-3.56	55.64	74.00	-18.36	PK	Vertical
4824.56	49.11	44.20	9.04	31.60	-3.56	45.55	54.00	-8.45	AV	Vertical
4824.43	59.01	44.20	9.04	31.60	-3.56	55.45	74.00	-18.55	PK	Horizontal
4824.43	50.33	44.20	9.04	31.60	-3.56	46.77	54.00	-7.23	AV	Horizontal
5359.61	48.53	44.20	9.86	32.00	-2.34	46.19	74.00	-27.81	PK	Vertical
5359.61	39.77	44.20	9.86	32.00	-2.34	37.43	54.00	-16.57	AV	Vertical
5359.59	48.39	44.20	9.86	32.00	-2.34	46.05	74.00	-27.95	PK	Horizontal
5359.59	38.62	44.20	9.86	32.00	-2.34	36.28	54.00	-17.72	AV	Horizontal
7235.96	54.88	43.50	11.40	35.50	3.40	58.28	74.00	-15.72	PK	Vertical
7235.96	44.36	43.50	11.40	35.50	3.40	47.76	54.00	-6.24	AV	Vertical
7235.67	53.66	43.50	11.40	35.50	3.40	57.06	74.00	-16.94	PK	Horizontal
7235.67	44.55	43.50	11.40	35.50	3.40	47.95	54.00	-6.05	AV	Horizontal
Middle Channel (802.11n(HT20)/2437 MHz)										
3264.85	61.69	44.70	6.70	28.20	-9.80	51.89	74.00	-22.11	PK	Vertical
3264.85	50.73	44.70	6.70	28.20	-9.80	40.93	54.00	-13.07	AV	Vertical
3264.66	60.87	44.70	6.70	28.20	-9.80	51.07	74.00	-22.93	PK	Horizontal
3264.66	51.09	44.70	6.70	28.20	-9.80	41.29	54.00	-12.71	AV	Horizontal
4874.44	59.33	44.20	9.04	31.60	-3.56	55.77	74.00	-18.23	PK	Vertical
4874.44	49.77	44.20	9.04	31.60	-3.56	46.21	54.00	-7.79	AV	Vertical
4874.55	59.59	44.20	9.04	31.60	-3.56	56.03	74.00	-17.97	PK	Horizontal
4874.55	49.86	44.20	9.04	31.60	-3.56	46.30	54.00	-7.70	AV	Horizontal
5359.70	49.05	44.20	9.86	32.00	-2.34	46.71	74.00	-27.29	PK	Vertical
5359.70	39.74	44.20	9.86	32.00	-2.34	37.40	54.00	-16.60	AV	Vertical
5359.74	47.66	44.20	9.86	32.00	-2.34	45.32	74.00	-28.68	PK	Horizontal
5359.74	39.33	44.20	9.86	32.00	-2.34	36.99	54.00	-17.01	AV	Horizontal
7310.90	54.77	43.50	11.40	35.50	3.40	58.17	74.00	-15.83	PK	Vertical
7310.90	44.58	43.50	11.40	35.50	3.40	47.98	54.00	-6.02	AV	Vertical
7310.78	53.49	43.50	11.40	35.50	3.40	56.89	74.00	-17.11	PK	Horizontal
7310.78	44.30	43.50	11.40	35.50	3.40	47.70	54.00	-6.30	AV	Horizontal



High Channel (802.11n(HT20)/2462 MHz)										
3264.76	61.24	44.70	6.70	28.20	-9.80	51.44	74.00	-22.56	PK	Vertical
3264.76	50.36	44.70	6.70	28.20	-9.80	40.56	54.00	-13.44	AV	Vertical
3264.65	62.25	44.70	6.70	28.20	-9.80	52.45	74.00	-21.55	PK	Horizontal
3264.65	49.97	44.70	6.70	28.20	-9.80	40.17	54.00	-13.83	AV	Horizontal
4924.50	59.03	44.20	9.04	31.60	-3.56	55.47	74.00	-18.53	PK	Vertical
4924.50	49.91	44.20	9.04	31.60	-3.56	46.35	54.00	-7.65	AV	Vertical
4924.38	59.15	44.20	9.04	31.60	-3.56	55.59	74.00	-18.41	PK	Horizontal
4924.38	50.58	44.20	9.04	31.60	-3.56	47.02	54.00	-6.98	AV	Horizontal
5359.75	49.09	44.20	9.86	32.00	-2.34	46.75	74.00	-27.25	PK	Vertical
5359.75	39.89	44.20	9.86	32.00	-2.34	37.55	54.00	-16.45	AV	Vertical
5359.61	48.03	44.20	9.86	32.00	-2.34	45.69	74.00	-28.31	PK	Horizontal
5359.61	39.41	44.20	9.86	32.00	-2.34	37.07	54.00	-16.93	AV	Horizontal
7385.91	53.93	43.50	11.40	35.50	3.40	57.33	74.00	-16.67	PK	Vertical
7385.91	44.46	43.50	11.40	35.50	3.40	47.86	54.00	-6.14	AV	Vertical
7385.67	54.94	43.50	11.40	35.50	3.40	58.34	74.00	-15.66	PK	Horizontal
7385.67	43.80	43.50	11.40	35.50	3.40	47.20	54.00	-6.80	AV	Horizontal
High Channel (802.11n(HT20)/2467 MHz)										
3271.43	61.50	44.70	6.70	28.20	-9.80	51.70	74.00	-22.30	PK	Vertical
3271.43	49.93	44.70	6.70	28.20	-9.80	40.13	54.00	-13.87	AV	Vertical
3271.42	61.34	44.70	6.70	28.20	-9.80	51.54	74.00	-22.46	PK	Horizontal
3271.42	51.17	44.70	6.70	28.20	-9.80	41.37	54.00	-12.63	AV	Horizontal
4934.36	58.74	44.20	9.04	31.60	-3.56	55.18	74.00	-18.82	PK	Vertical
4934.36	50.36	44.20	9.04	31.60	-3.56	46.80	54.00	-7.20	AV	Vertical
4934.32	58.97	44.20	9.04	31.60	-3.56	55.41	74.00	-18.59	PK	Horizontal
4934.32	49.43	44.20	9.04	31.60	-3.56	45.87	54.00	-8.13	AV	Horizontal
5370.69	48.40	44.20	9.86	32.00	-2.34	46.06	74.00	-27.94	PK	Vertical
5370.69	38.99	44.20	9.86	32.00	-2.34	36.65	54.00	-17.35	AV	Vertical
5370.74	47.65	44.20	9.86	32.00	-2.34	45.31	74.00	-28.69	PK	Horizontal
5370.74	38.96	44.20	9.86	32.00	-2.34	36.62	54.00	-17.38	AV	Horizontal
7400.77	54.77	43.50	11.40	35.50	3.40	58.17	74.00	-15.83	PK	Vertical
7400.77	43.82	43.50	11.40	35.50	3.40	47.22	54.00	-6.78	AV	Vertical
7400.89	54.93	43.50	11.40	35.50	3.40	58.33	74.00	-15.67	PK	Horizontal
7400.89	43.68	43.50	11.40	35.50	3.40	47.08	54.00	-6.92	AV	Horizontal
High Channel (802.11n(HT20)/2472 MHz)										
3277.88	61.34	44.70	6.70	28.20	-9.80	51.54	74.00	-22.46	PK	Vertical
3277.88	50.12	44.70	6.70	28.20	-9.80	40.32	54.00	-13.68	AV	Vertical
3278.06	62.00	44.70	6.70	28.20	-9.80	52.20	74.00	-21.80	PK	Horizontal
3278.06	50.81	44.70	6.70	28.20	-9.80	41.01	54.00	-12.99	AV	Horizontal
4944.45	59.41	44.20	9.04	31.60	-3.56	55.85	74.00	-18.15	PK	Vertical
4944.45	50.25	44.20	9.04	31.60	-3.56	46.69	54.00	-7.31	AV	Vertical
4944.55	58.63	44.20	9.04	31.60	-3.56	55.07	74.00	-18.93	PK	Horizontal
4944.55	50.49	44.20	9.04	31.60	-3.56	46.93	54.00	-7.07	AV	Horizontal
5381.46	48.31	44.20	9.86	32.00	-2.34	45.97	74.00	-28.03	PK	Vertical
5381.46	39.28	44.20	9.86	32.00	-2.34	36.94	54.00	-17.06	AV	Vertical
5381.38	47.28	44.20	9.86	32.00	-2.34	44.94	74.00	-29.06	PK	Horizontal
5381.38	38.21	44.20	9.86	32.00	-2.34	35.87	54.00	-18.13	AV	Horizontal
7415.69	53.89	43.50	11.40	35.50	3.40	57.29	74.00	-16.71	PK	Vertical
7415.69	43.51	43.50	11.40	35.50	3.40	46.91	54.00	-7.09	AV	Vertical
7415.72	53.50	43.50	11.40	35.50	3.40	56.90	74.00	-17.10	PK	Horizontal
7415.72	43.86	43.50	11.40	35.50	3.40	47.26	54.00	-6.74	AV	Horizontal

Remark:


- Factor = Antenna Factor + Cable Loss – Pre-amplifier.
- Scan with 802.11b, 802.11g, 802.11n (HT-20), the worst case is 802.11 n(HT20).  
Emission Level = Reading + Factor  
Margin = Limit - Emission Level
- The frequency emission of peak points that did not show above the forms are at least 20dB below the limit, the frequency emission is mainly from the environment noise.



3.2.6 TEST RESULTS(Band edge Requirements)


802.11 b-CH 1

Horizontal

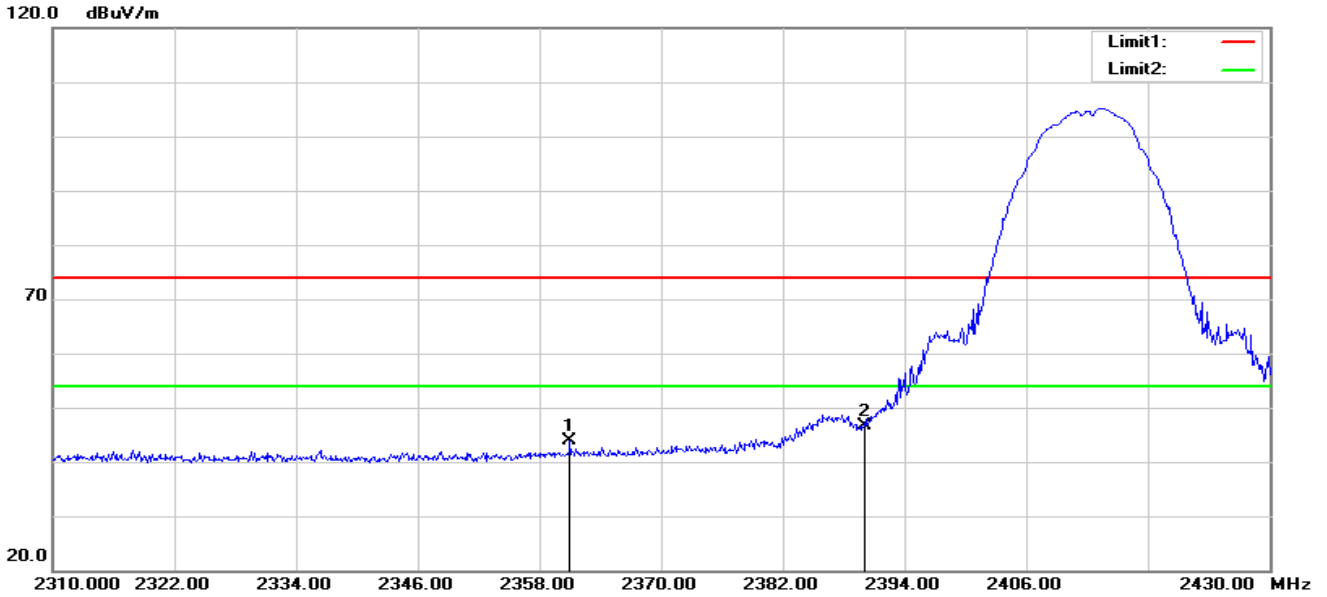

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2361.000	39.89	3.91	43.80	74.00	-30.20	peak
2	2390.000	42.30	4.34	46.64	74.00	-27.36	peak


Vertical

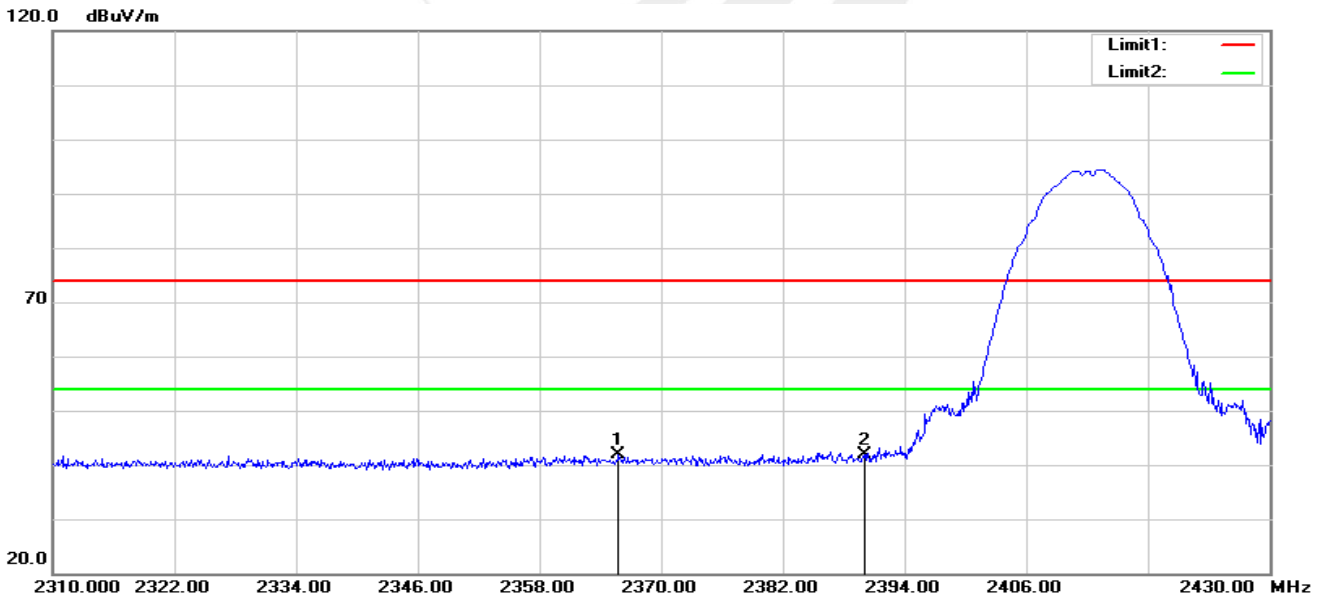

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2365.800	37.93	3.97	41.90	74.00	-32.10	peak
2	2390.000	37.54	4.34	41.88	74.00	-32.12	peak




802.11 b-CH 11  
Horizontal

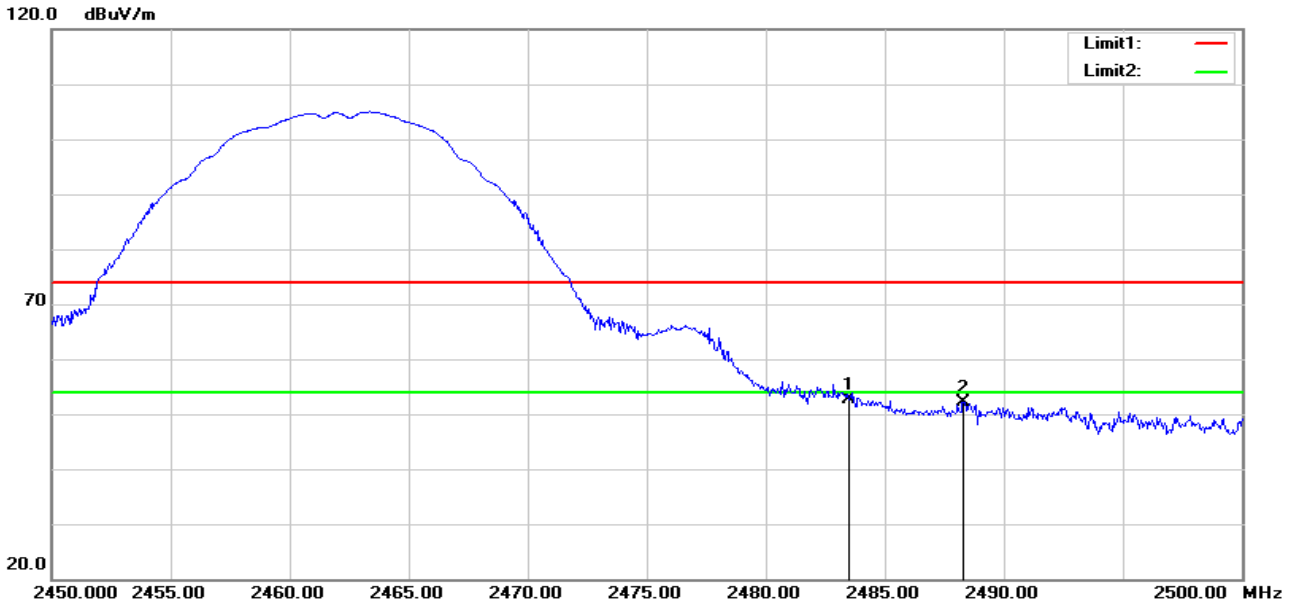

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	48.06	4.60	52.66	74.00	-21.34	peak
2	2488.300	47.50	4.62	52.12	74.00	-21.88	peak


Vertical

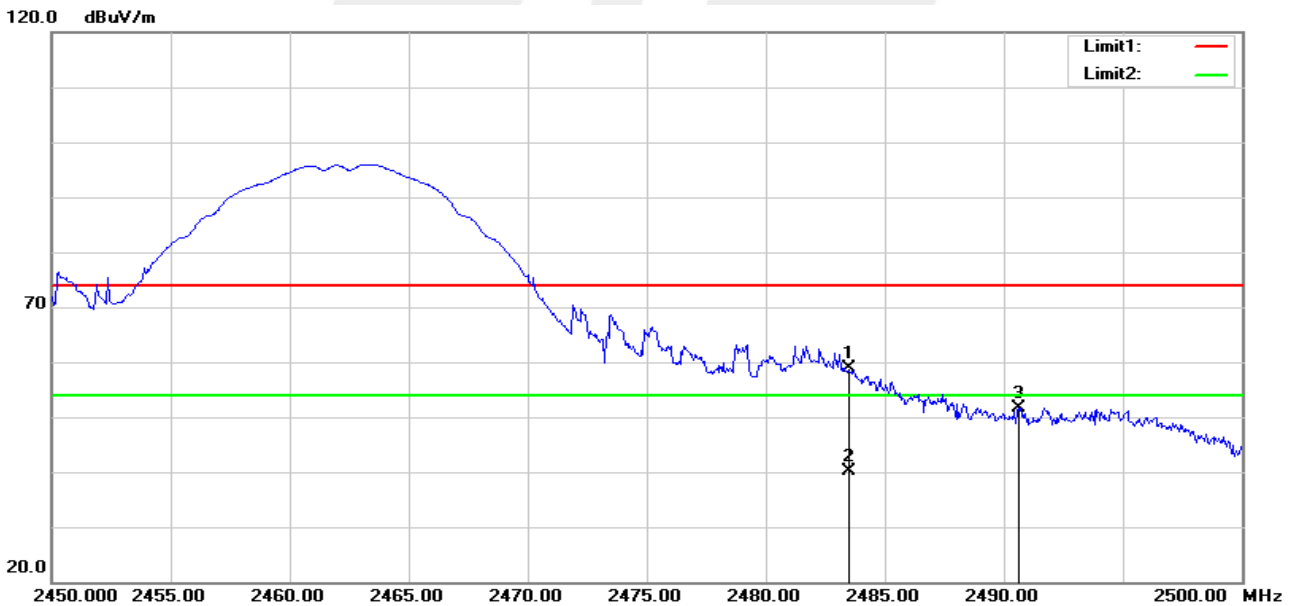

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	54.27	4.60	58.87	74.00	-15.13	peak
2	2483.500	35.64	4.60	40.24	54.00	-13.76	AVG
3	2490.600	47.00	4.63	51.63	74.00	-22.37	peak




802.11 b-CH 12  
Horizontal

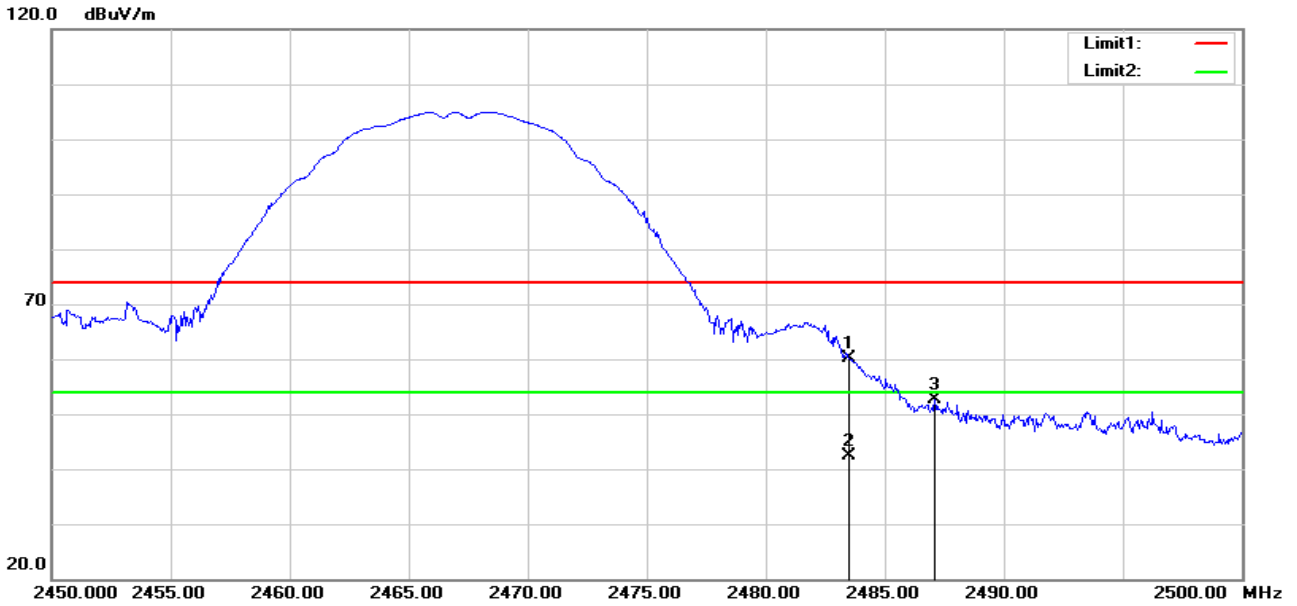

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	55.49	4.60	60.09	74.00	-13.91	peak
2	2483.500	37.75	4.60	42.35	54.00	-11.65	AVG
3	2487.100	47.92	4.62	52.54	74.00	-21.46	peak


Vertical

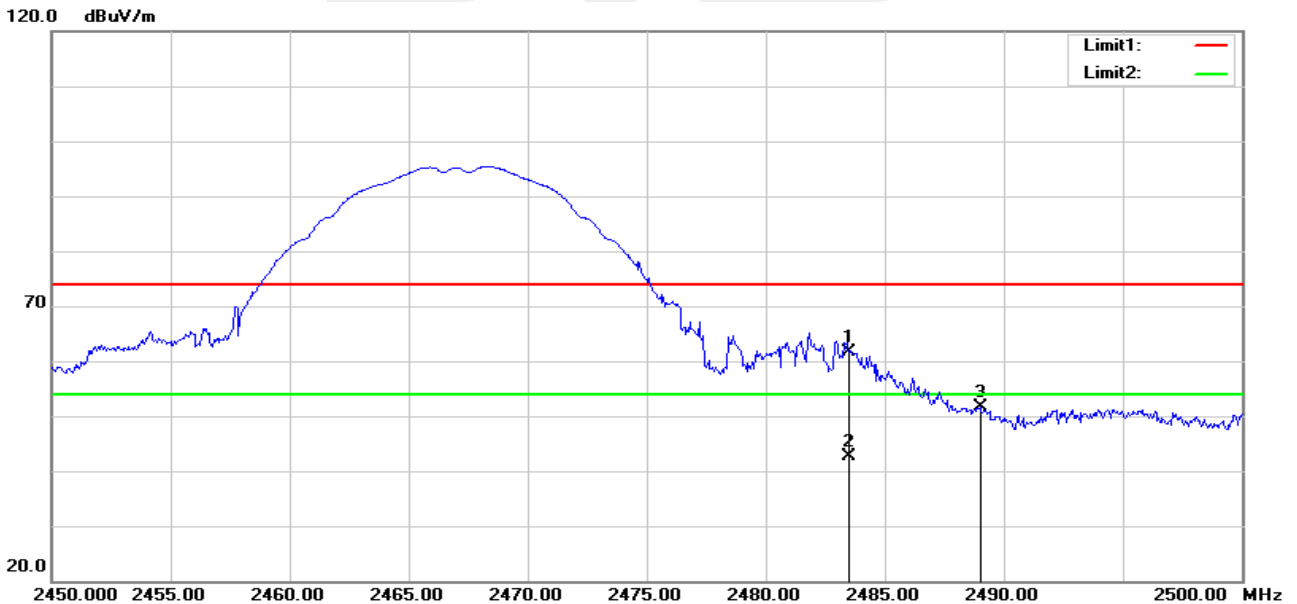

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	57.15	4.60	61.75	74.00	-12.25	peak
2	2483.500	38.07	4.60	42.67	54.00	-11.33	AVG
3	2489.000	46.94	4.62	51.56	74.00	-22.44	peak




802.11 b-CH 13  
Horizontal

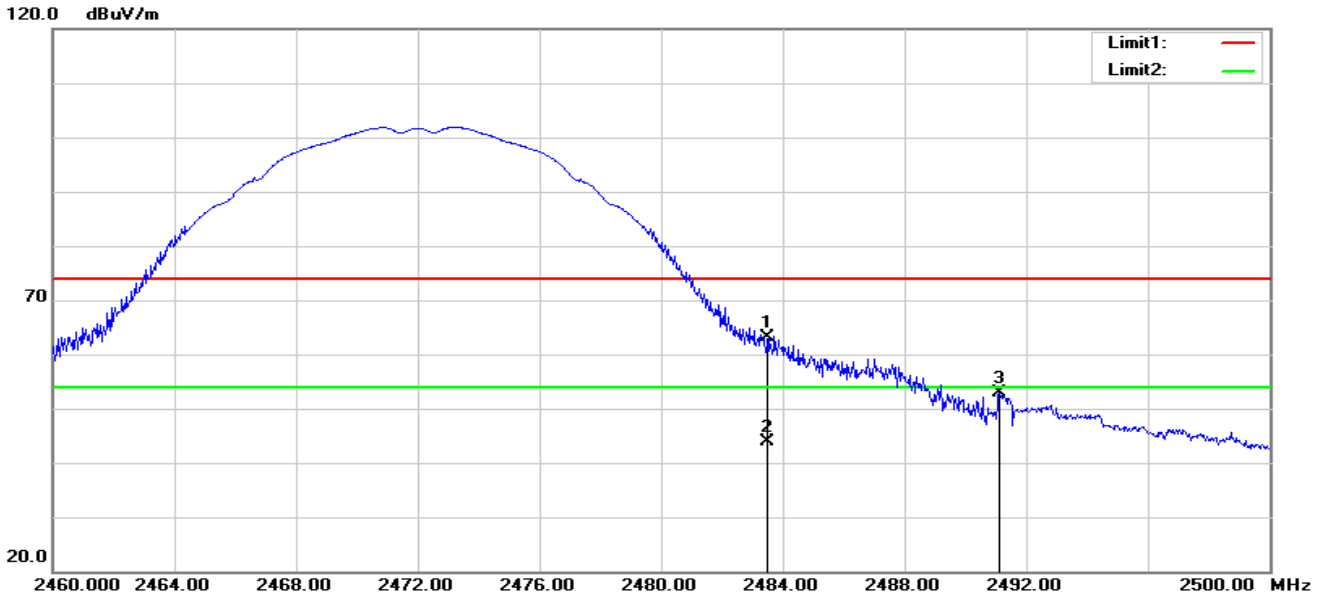

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	58.52	4.60	63.12	74.00	-10.88	peak
2	2483.500	39.21	4.60	43.81	54.00	-10.19	AVG
3	2491.120	48.35	4.63	52.98	74.00	-21.02	peak

Vertical

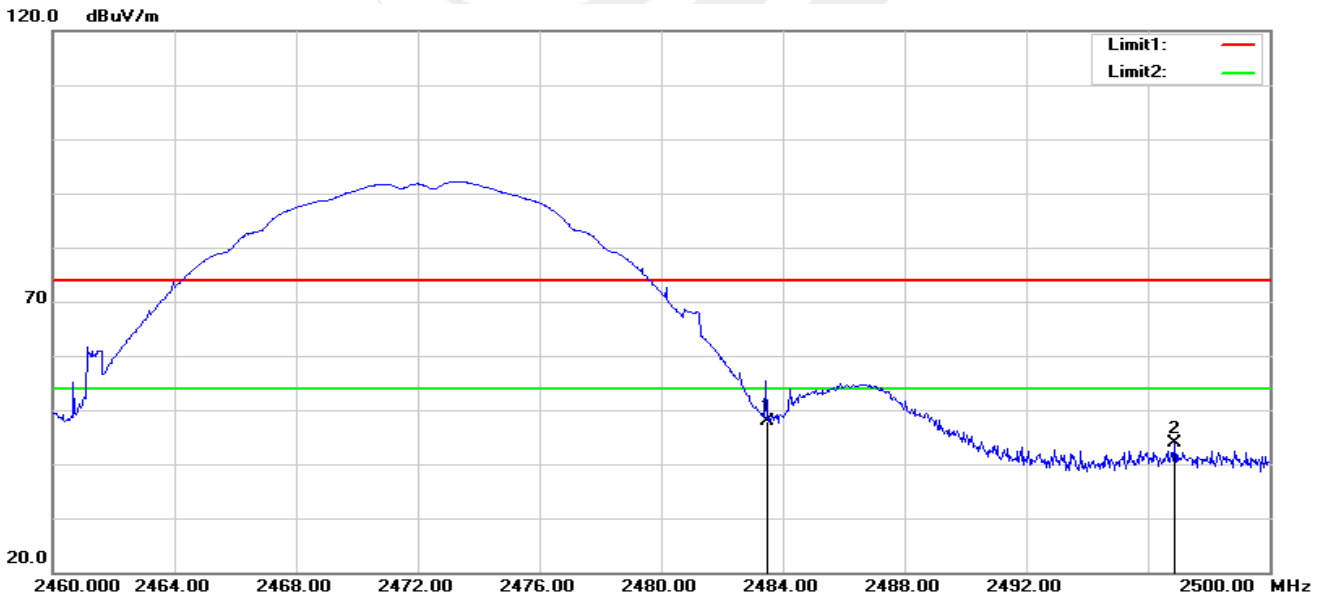


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	43.36	4.60	47.96	74.00	-26.04	peak
2	2496.880	39.14	4.64	43.78	74.00	-30.22	peak






802.11 g-CH 1  
Horizontal

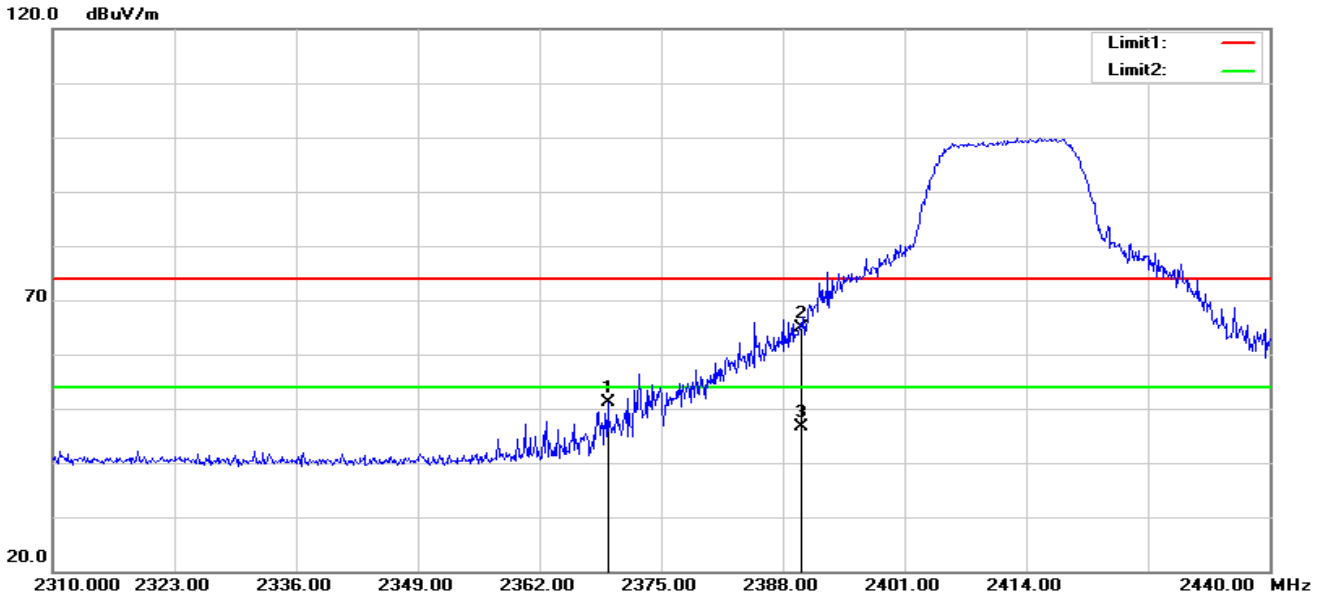

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2369.280	47.16	4.03	51.19	74.00	-22.81	peak
2	2390.000	60.58	4.34	64.92	74.00	-9.08	peak
3	2390.000	42.30	4.34	46.64	54.00	-7.36	AVG


Vertical

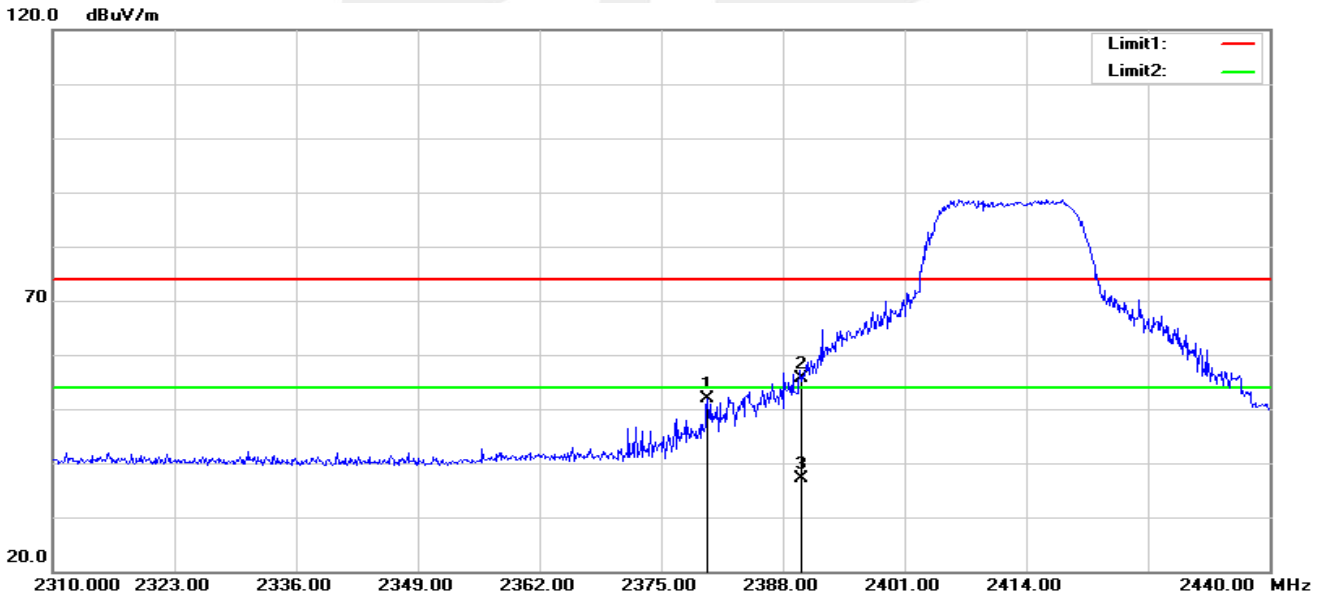

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2379.940	47.70	4.19	51.89	74.00	-22.11	peak
2	2390.000	51.37	4.34	55.71	74.00	-18.29	peak
3	2390.000	32.91	4.34	37.25	54.00	-16.75	AVG




802.11 g-CH 11  
Horizontal

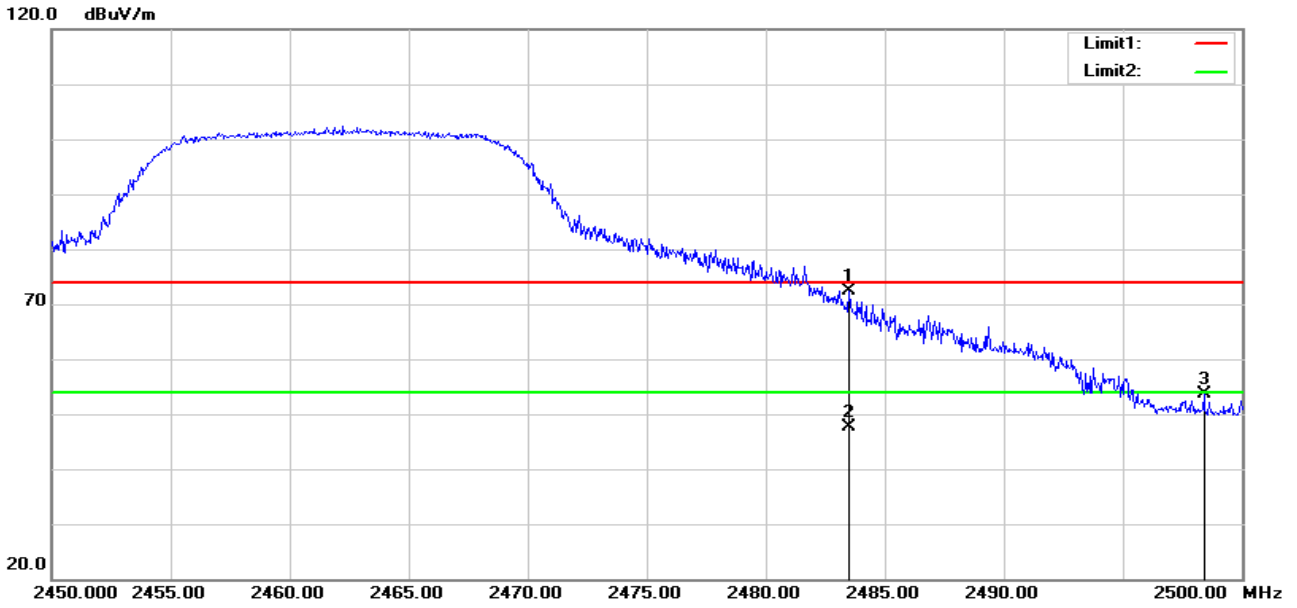

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	67.70	4.60	72.30	74.00	-1.70	peak
2	2483.500	43.05	4.60	47.65	54.00	-6.35	AVG
3	2498.400	49.04	4.64	53.68	74.00	-20.32	peak


Vertical

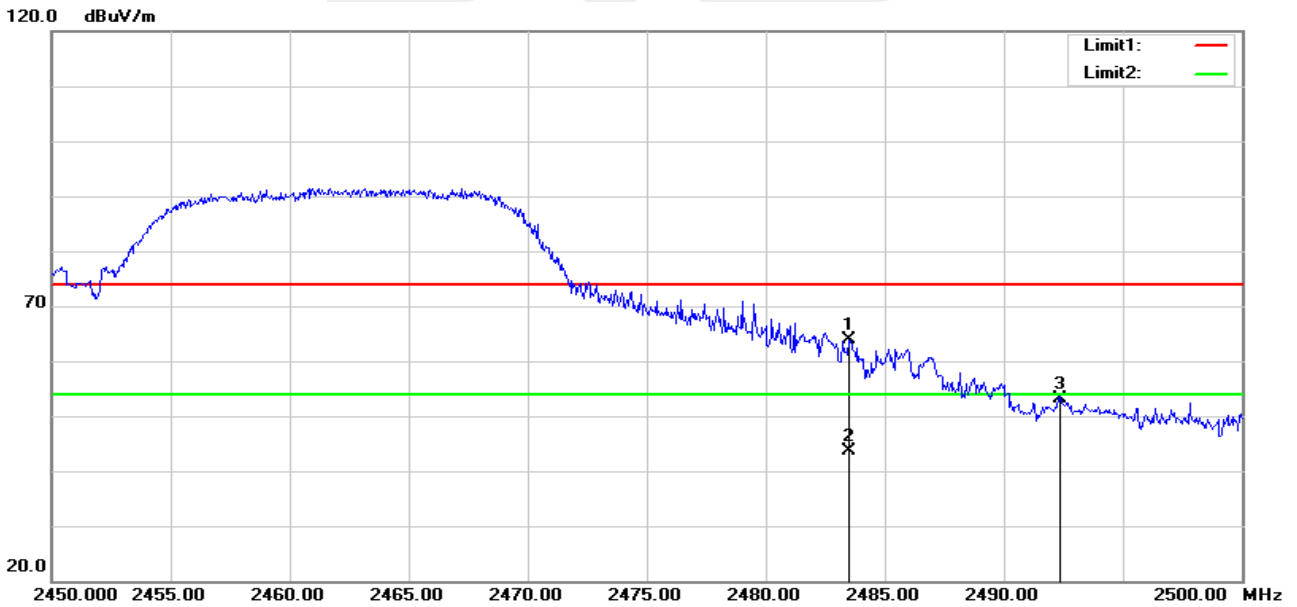

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	59.30	4.60	63.90	74.00	-10.10	peak
2	2483.500	38.94	4.60	43.54	54.00	-10.46	AVG
3	2492.350	48.42	4.63	53.05	74.00	-20.95	peak




802.11 g-CH 12  
Horizontal

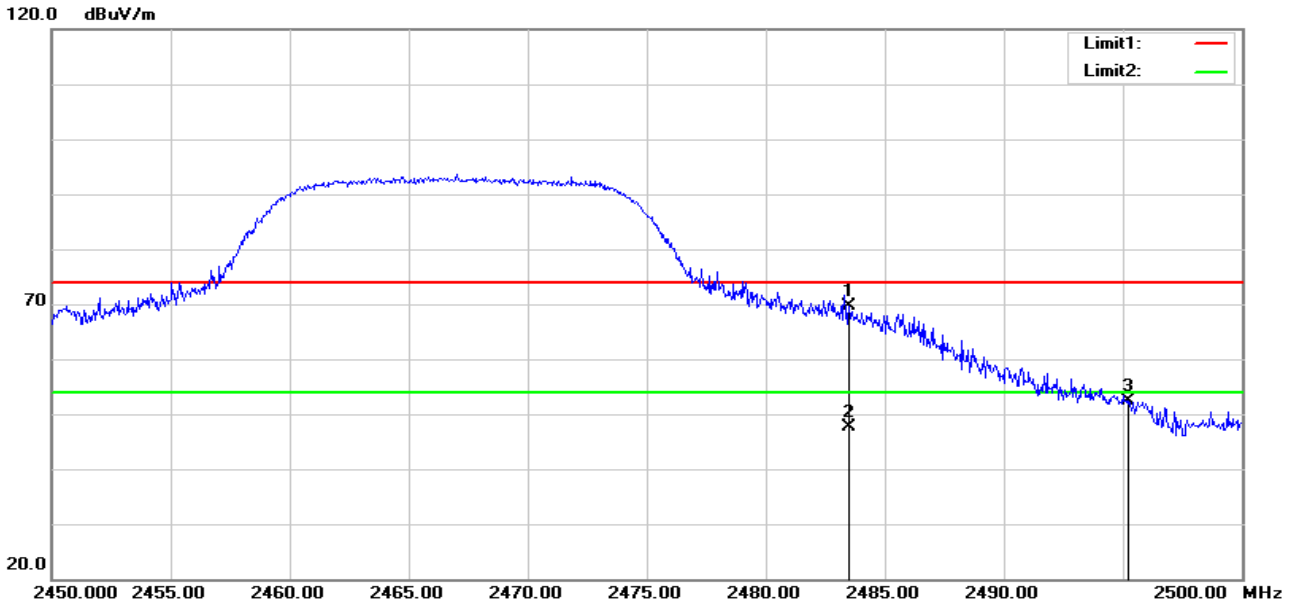

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	64.99	4.60	69.59	74.00	-4.41	peak
2	2483.500	43.05	4.60	47.65	54.00	-6.35	AVG
3	2495.250	47.82	4.63	52.45	74.00	-21.55	peak


Vertical

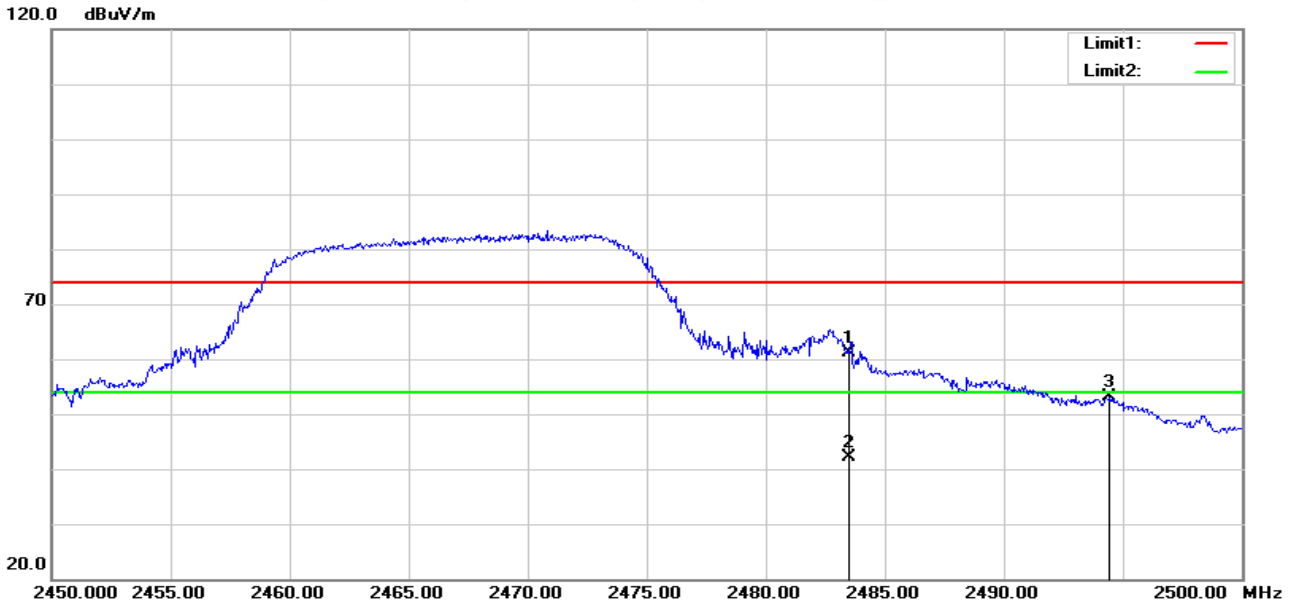

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	56.54	4.60	61.14	74.00	-12.86	peak
2	2483.500	37.58	4.60	42.18	54.00	-11.82	AVG
3	2494.450	48.59	4.63	53.22	74.00	-20.78	peak




802.11 g-CH 13  
Horizontal

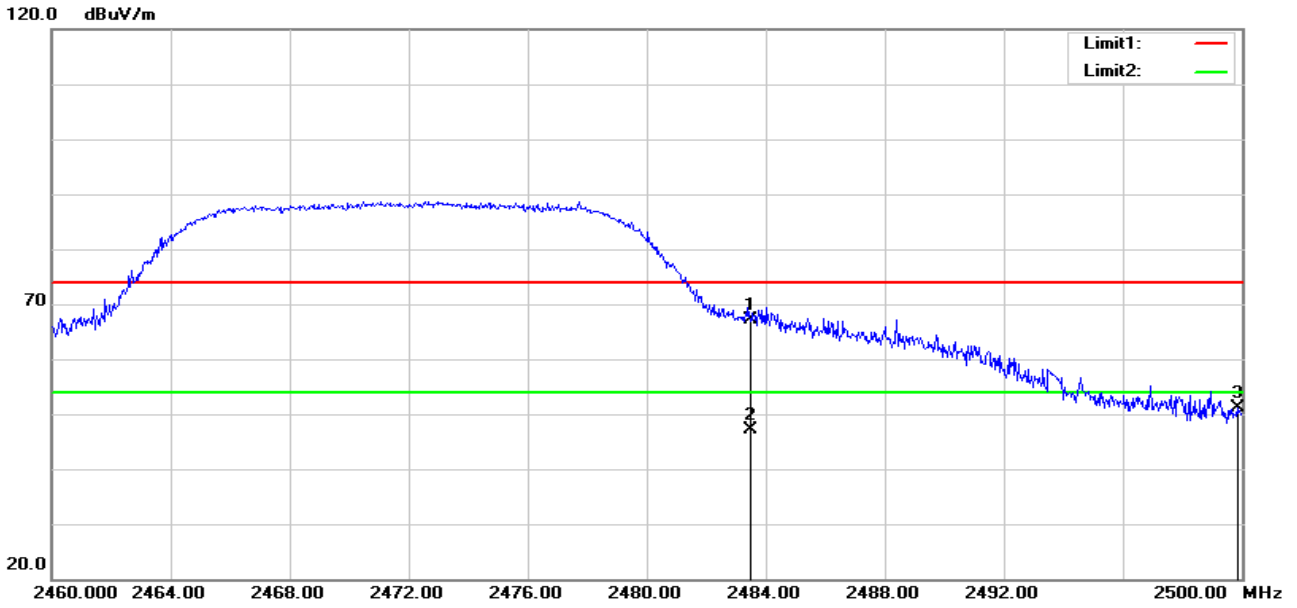

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	62.46	4.60	67.06	74.00	-6.94	peak
2	2483.500	42.59	4.60	47.19	54.00	-6.81	AVG
3	2499.840	46.54	4.65	51.19	74.00	-22.81	peak


Vertical

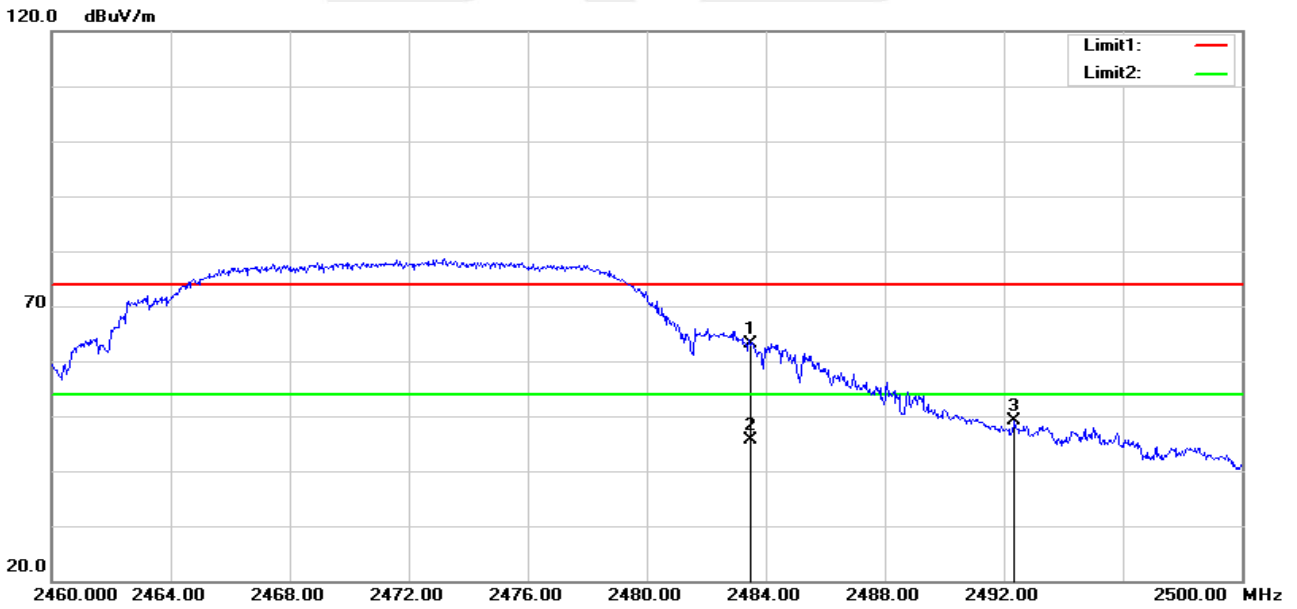

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	58.42	4.60	63.02	74.00	-10.98	peak
2	2483.500	41.09	4.60	45.69	54.00	-8.31	AVG
3	2492.360	44.43	4.63	49.06	74.00	-24.94	peak




802.11 n(HT20)-CH 1  
Horizontal

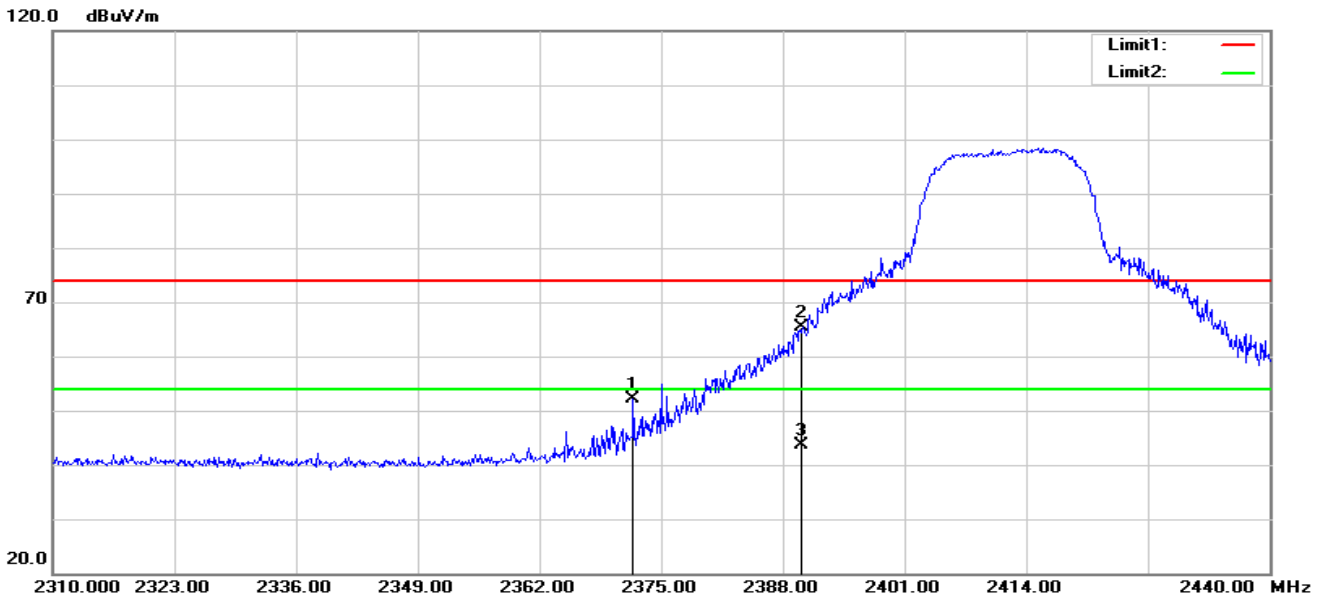

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2372.010	47.99	4.07	52.06	74.00	-21.94	peak
2	2390.000	61.06	4.34	65.40	74.00	-8.60	peak
3	2390.000	39.32	4.34	43.66	54.00	-10.34	AVG


Vertical

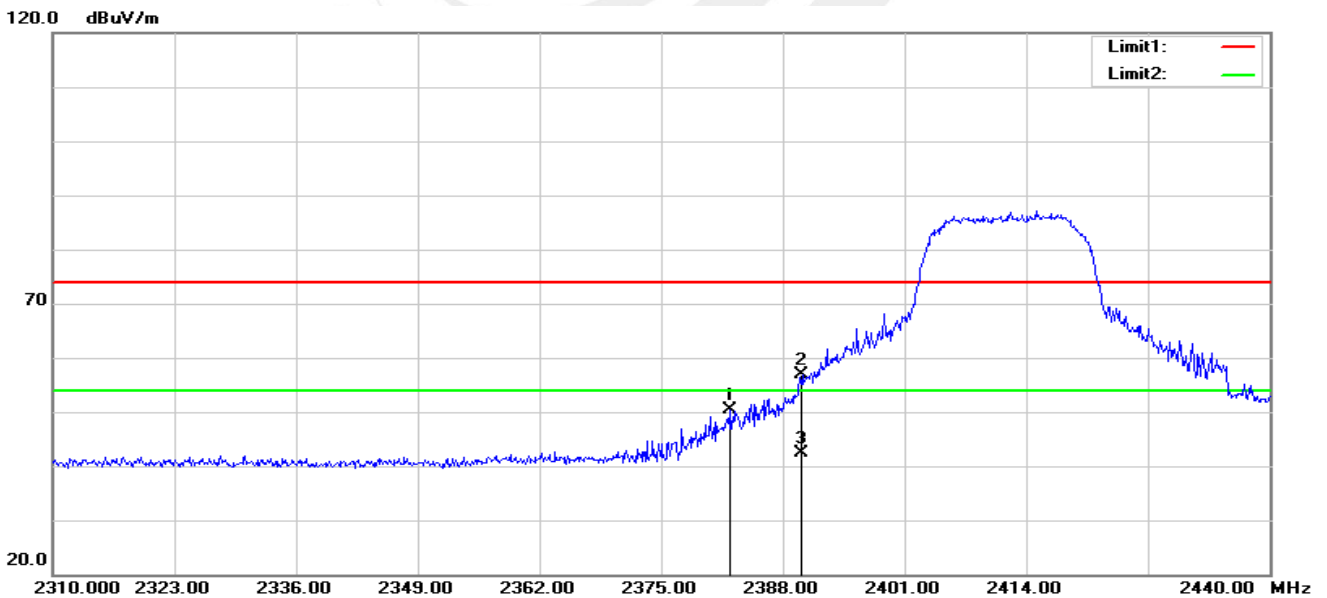

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2382.410	46.18	4.23	50.41	74.00	-23.59	peak
2	2390.000	52.61	4.34	56.95	74.00	-17.05	peak
3	2390.000	37.99	4.34	42.33	54.00	-11.67	AVG




802.11 n(HT20)-CH 11  
Horizontal

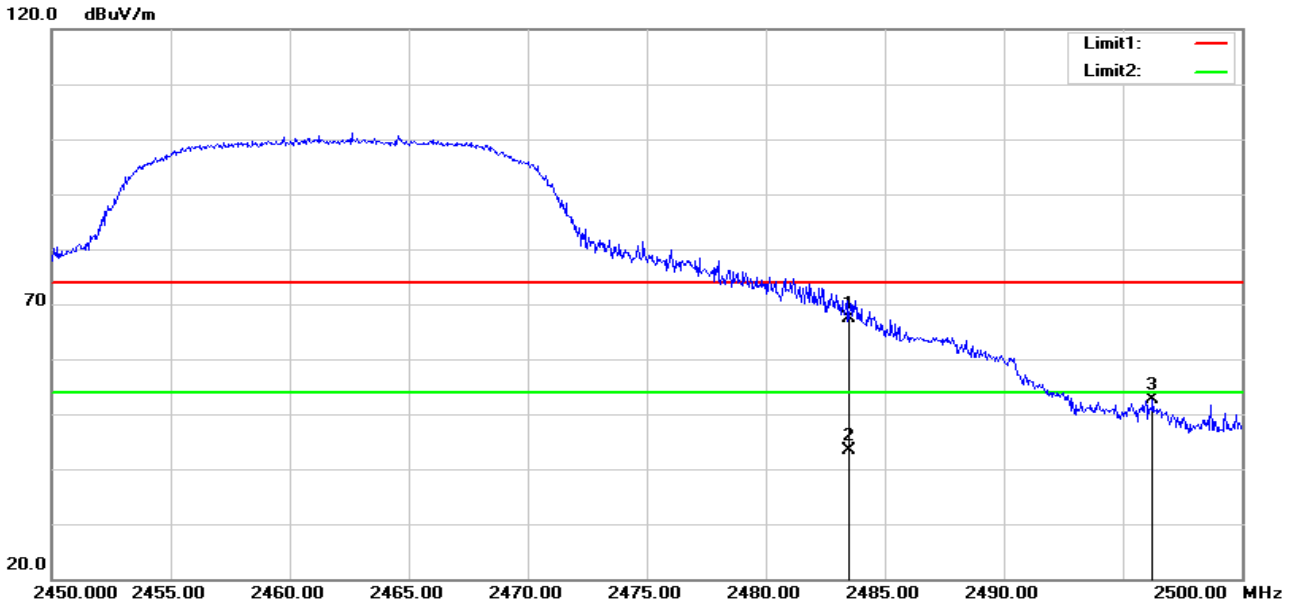

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	62.70	4.60	67.30	74.00	-6.70	peak
2	2483.500	38.90	4.60	43.50	54.00	-10.50	AVG
3	2496.250	48.05	4.64	52.69	74.00	-21.31	peak


Vertical

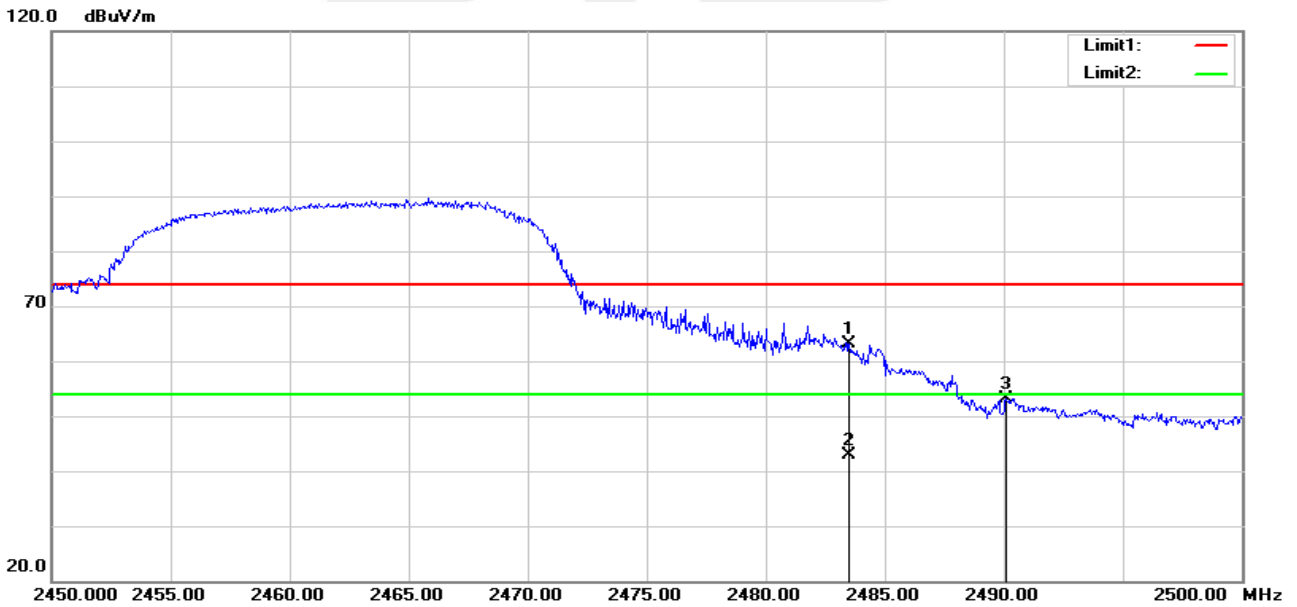

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	58.41	4.60	63.01	74.00	-10.99	peak
2	2483.500	38.21	4.60	42.81	54.00	-11.19	AVG
3	2490.100	48.58	4.63	53.21	74.00	-20.79	peak




802.11 n(HT20)-CH 12  
Horizontal

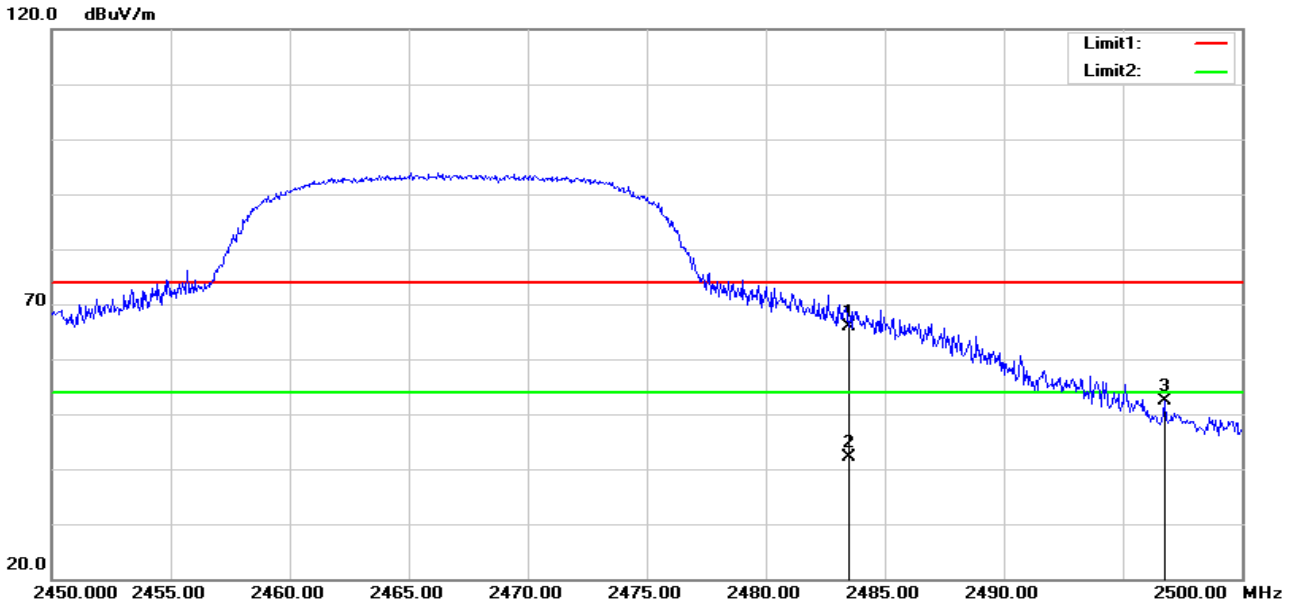

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	61.30	4.60	65.90	74.00	-8.10	peak
2	2483.500	37.42	4.60	42.02	54.00	-11.98	AVG
3	2496.750	47.79	4.64	52.43	74.00	-21.57	peak


Vertical

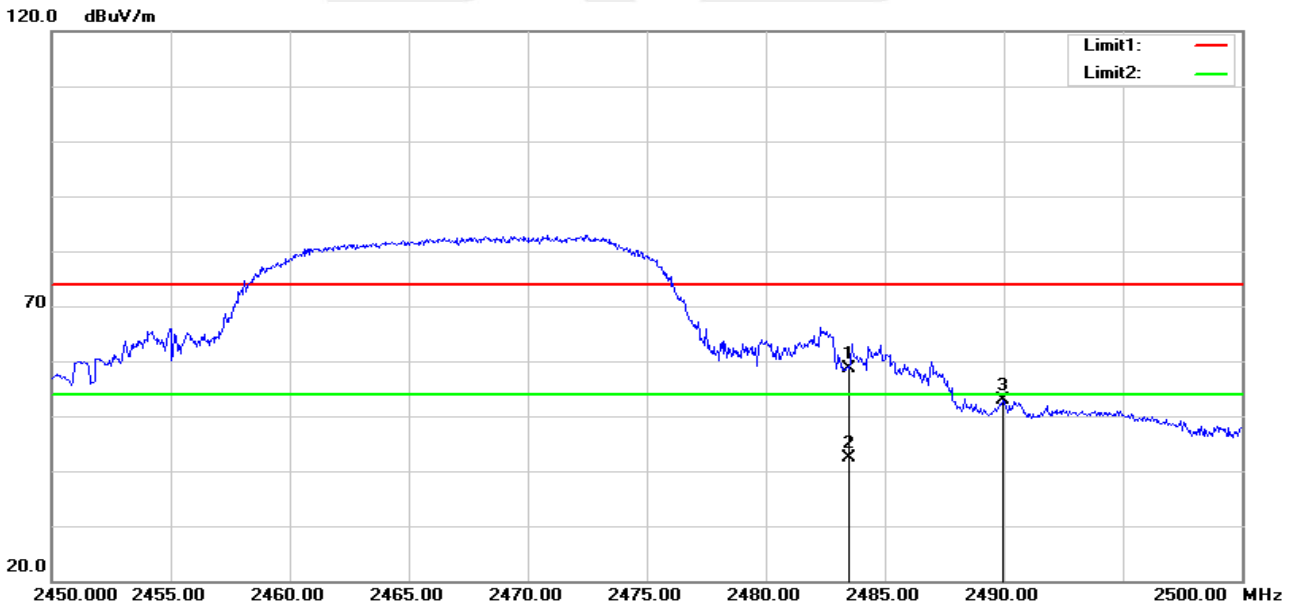

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	54.13	4.60	58.73	74.00	-15.27	peak
2	2483.500	37.81	4.60	42.41	54.00	-11.59	AVG
3	2489.950	48.31	4.63	52.94	74.00	-21.06	peak




802.11 n(HT20)-CH 13  
Horizontal

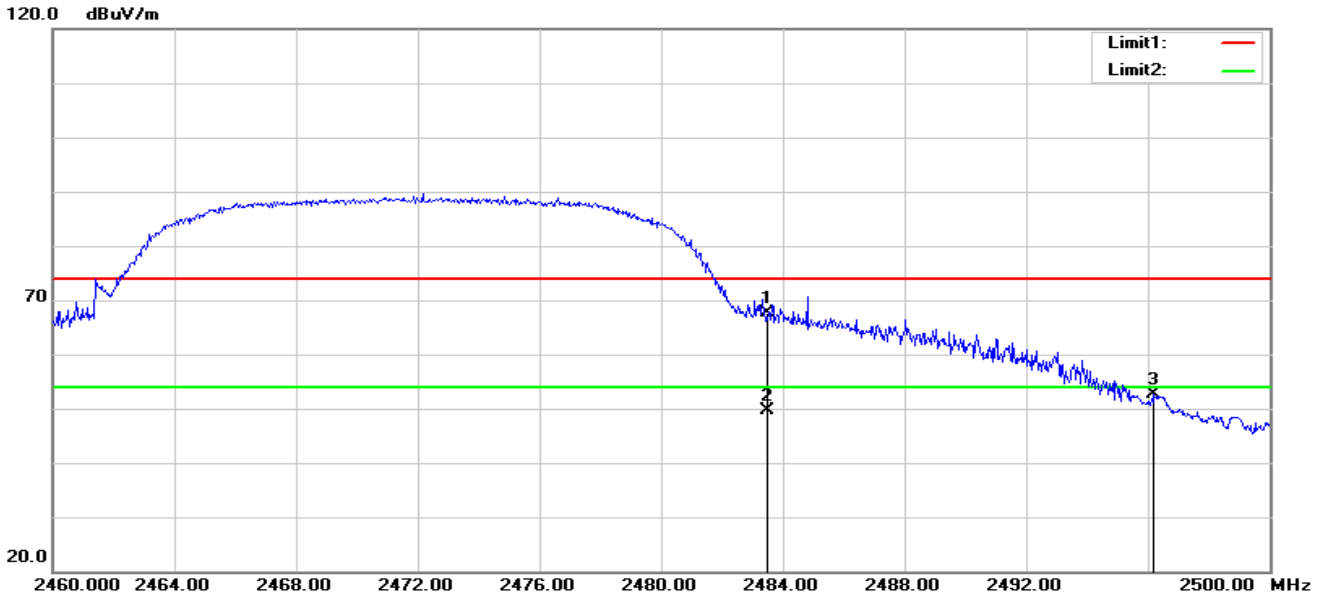

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	63.04	4.60	67.64	74.00	-6.36	peak
2	2483.500	44.91	4.60	49.51	54.00	-4.49	AVG
3	2496.200	47.96	4.64	52.60	74.00	-21.40	peak

Vertical

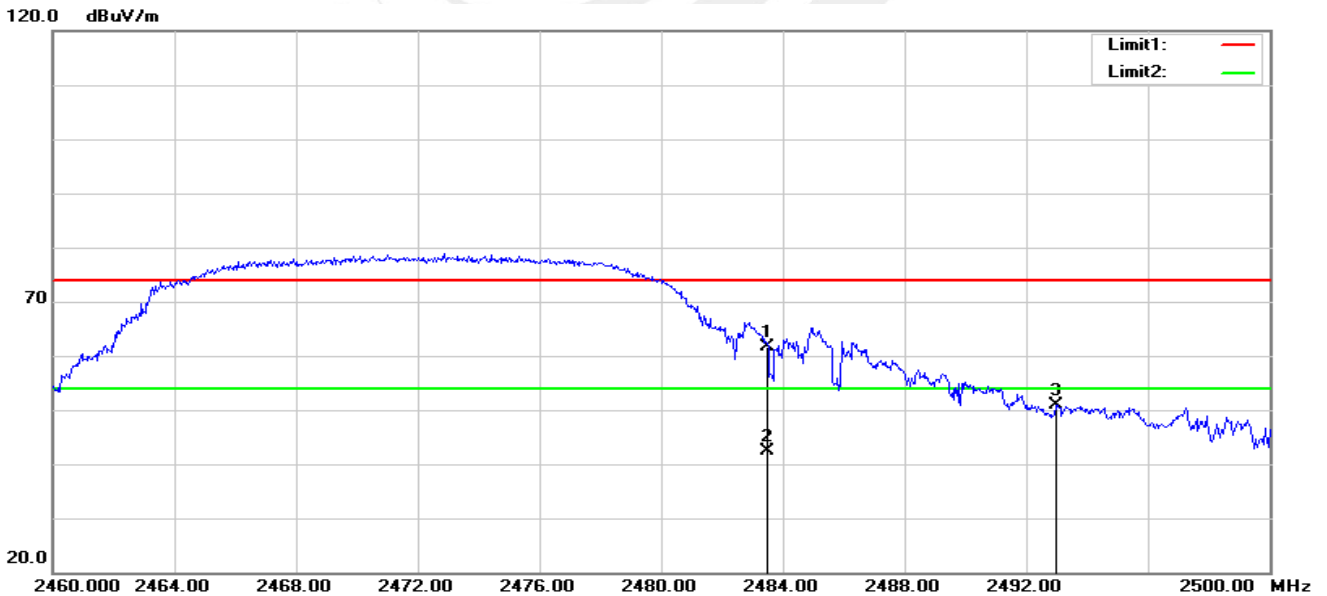

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	56.92	4.60	61.52	74.00	-12.48	peak
2	2483.500	37.76	4.60	42.36	54.00	-11.64	AVG
3	2493.000	46.35	4.64	50.99	74.00	-23.01	peak



#### 4.CONDUCTED SPURIOUS & BAND EDGE EMISSION

##### 4.1 LIMIT

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

##### 4.2 TEST PROCEDURE

Spectrum Parameter	Setting
Detector	Peak
Start/Stop Frequency	30 MHz to 10th carrier harmonic
RB / VB (emission in restricted band)	100 KHz/300 KHz
Trace-Mode:	Max hold

For Band edge

Spectrum Parameter	Setting
Detector	Peak
Start/Stop Frequency	Lower Band Edge: 2300 to 2412 MHz Upper Band Edge: 2462 to 2500 MHz
RB / VB (emission in restricted band)	100 KHz/300 KHz
Trace-Mode:	Max hold

##### 4.3 DEVIATION FROM STANDARD

No deviation.

##### 4.4 TEST SETUP



The EUT which is powered by the Battery, is connected to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW.

##### 4.5 EUT OPERATION CONDITIONS


Please refer to section 3.1.4 of this report.




4.6 TEST RESULTS

Temperature:	25°C	Relative Humidity:	60%
Test Voltage:	AC 120V/60Hz	Test Mode:	TX b Mode /CH01, CH06, CH11, CH12, CH13

CH 01

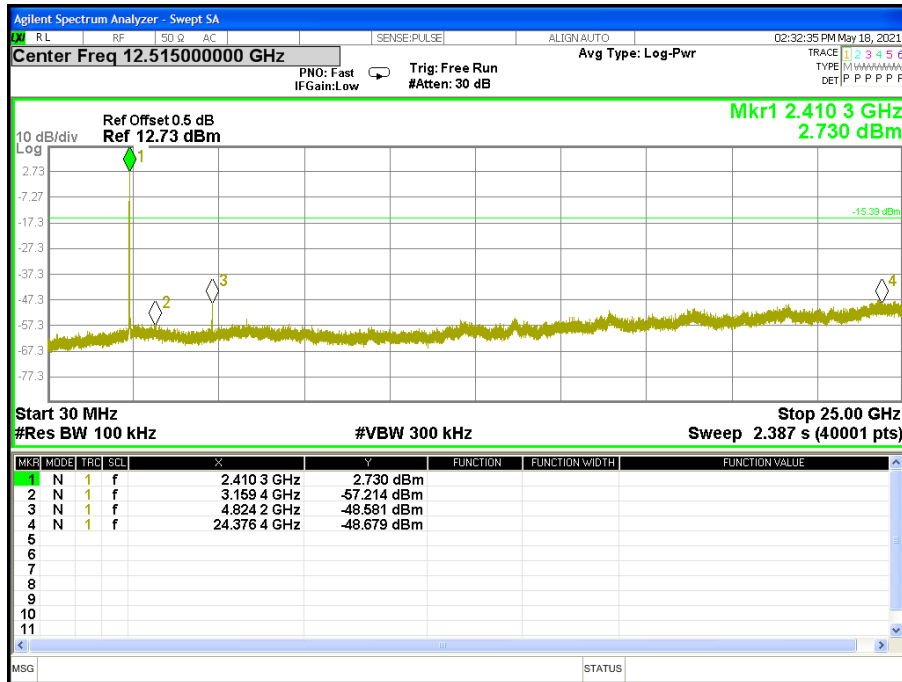


CH 06

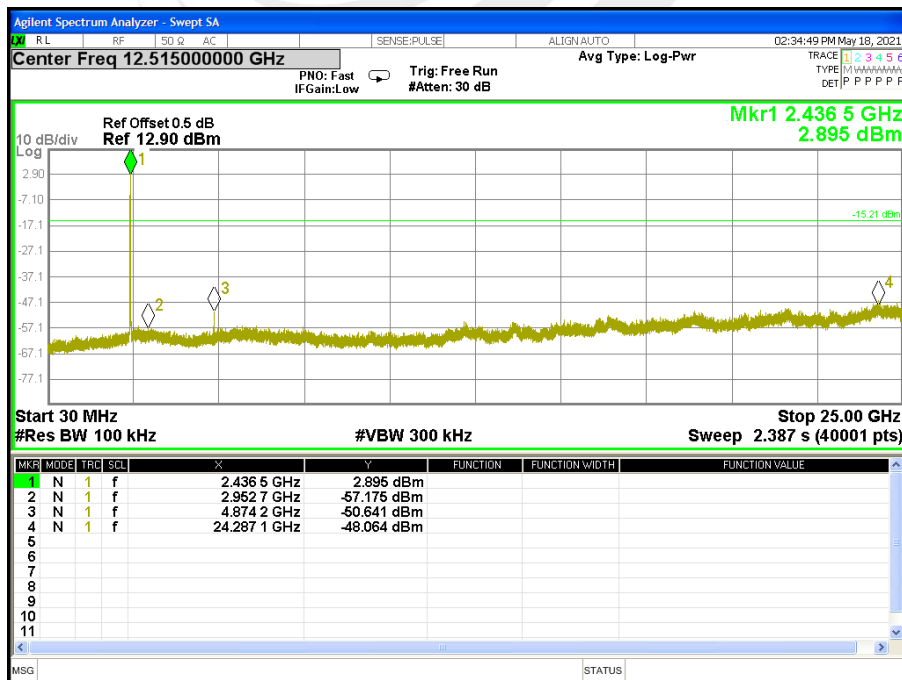




CH 11

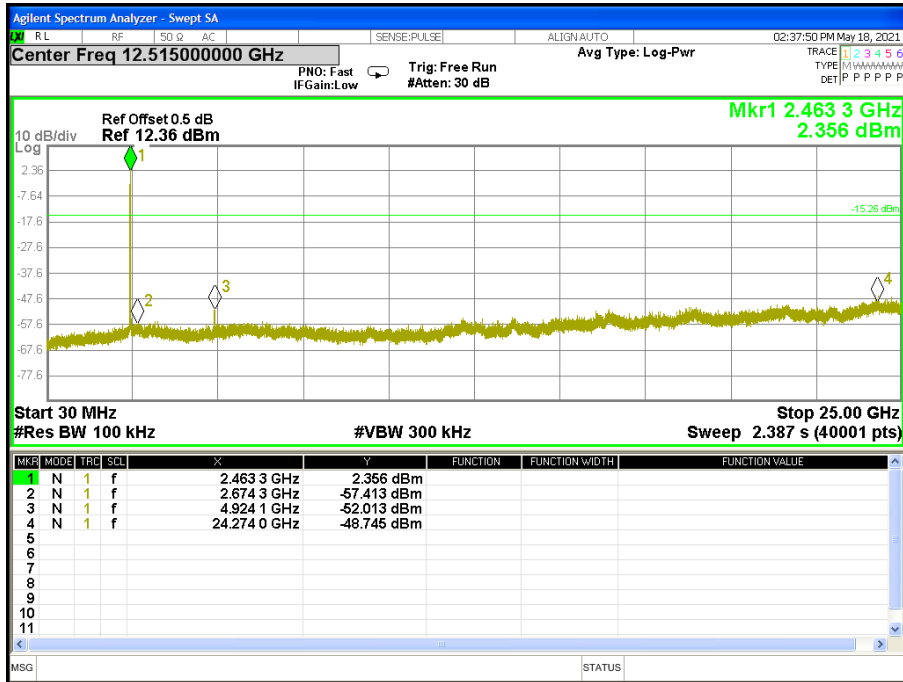


CH 12

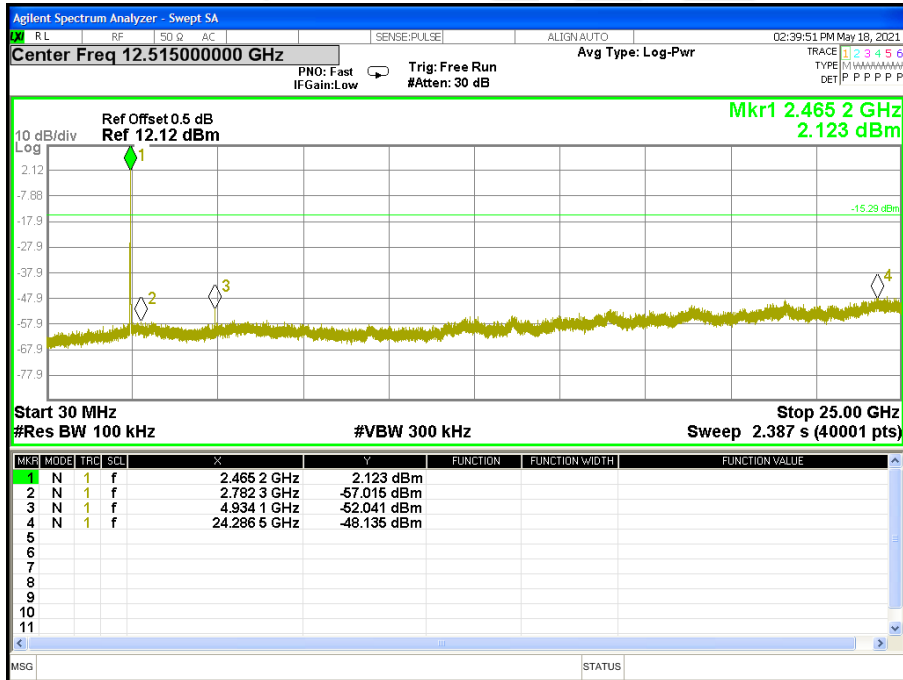




CH 13

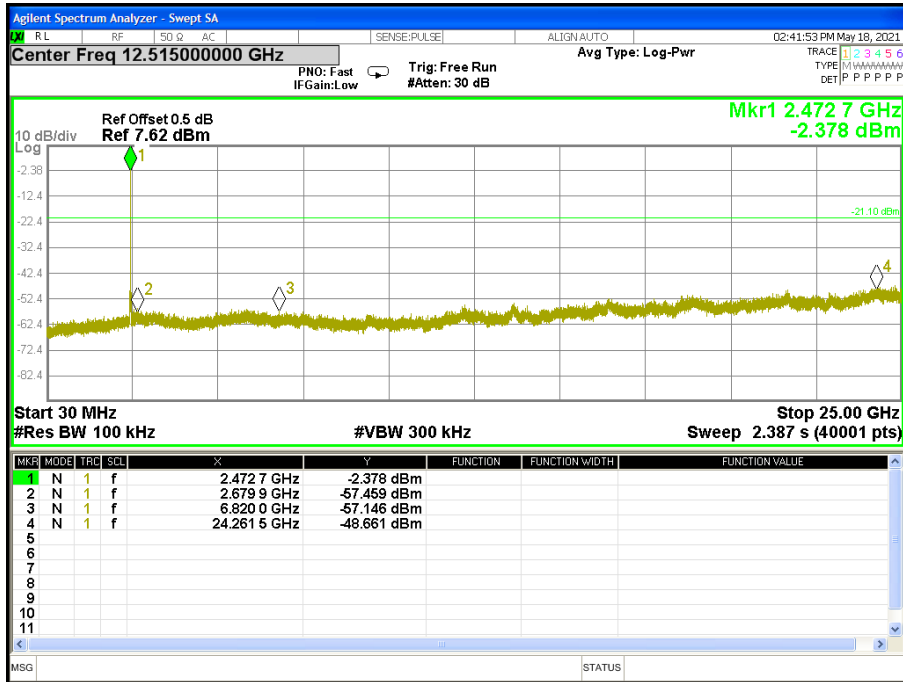




Band edge(it's also the reference level for conducted spurious emission)

CH 01

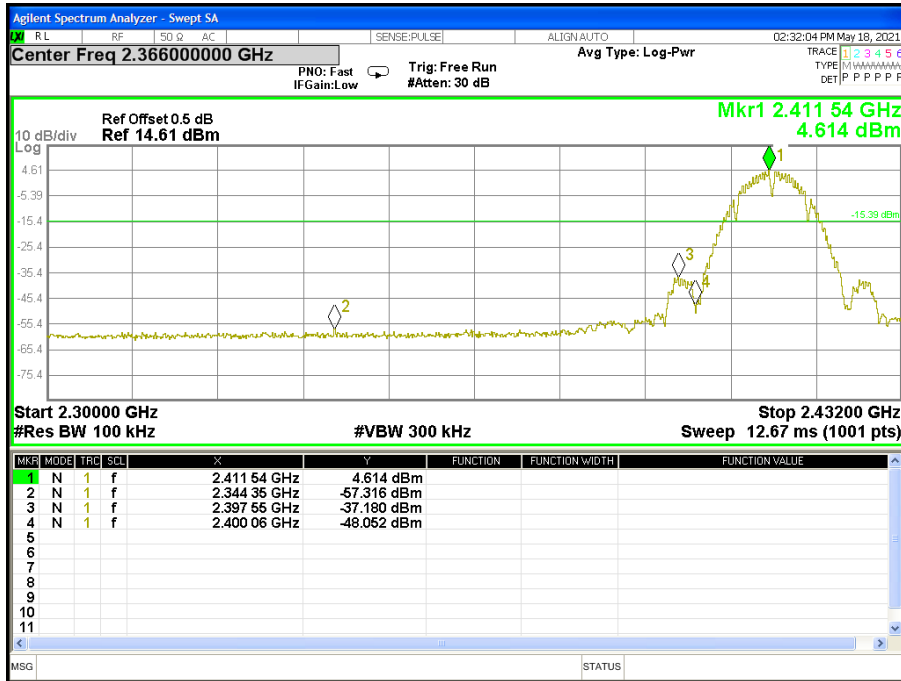


CH 06

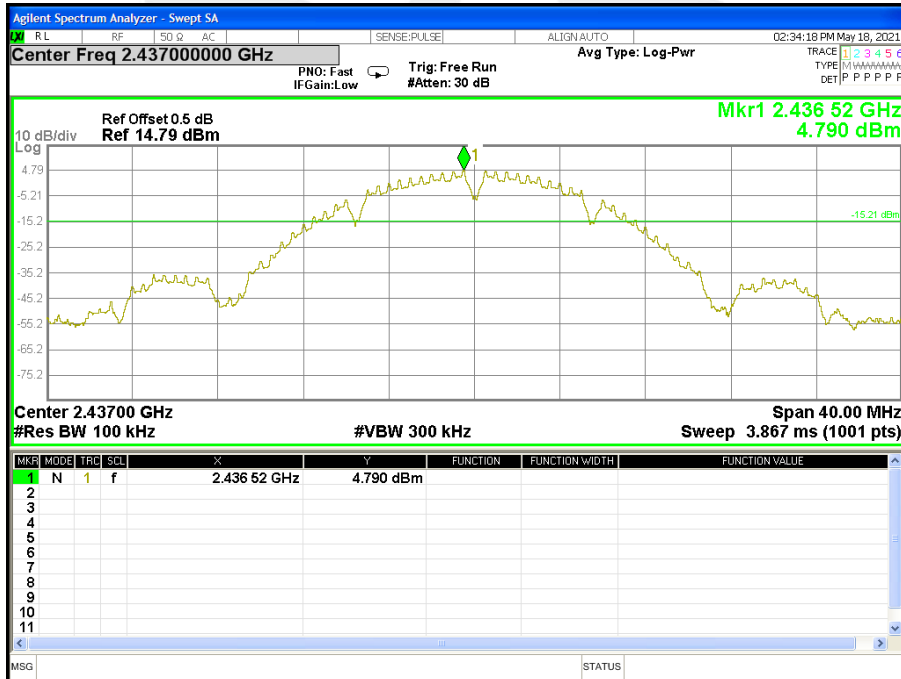




CH 11

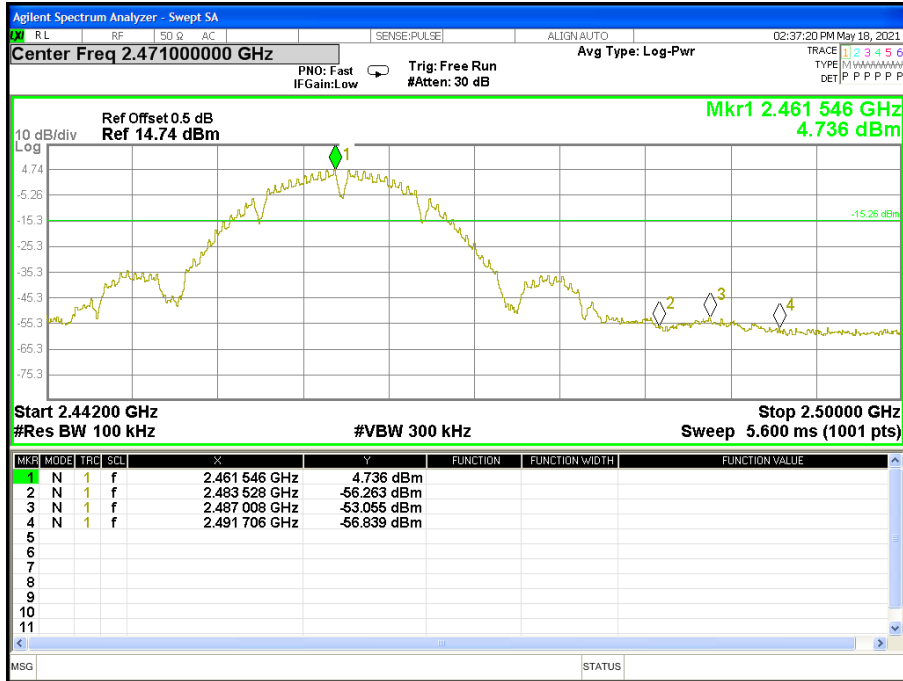


CH 12

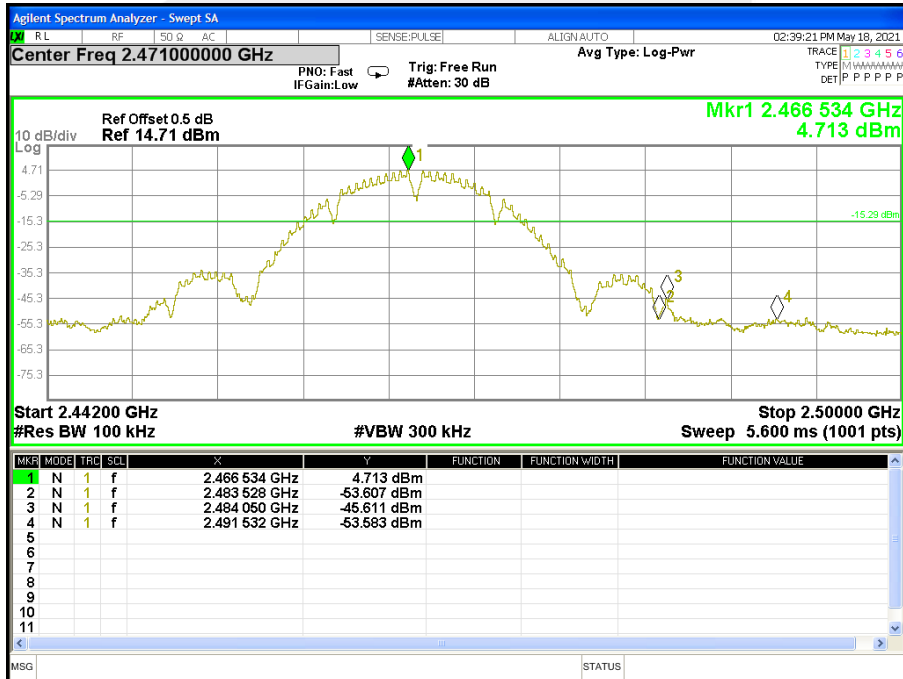




CH 13

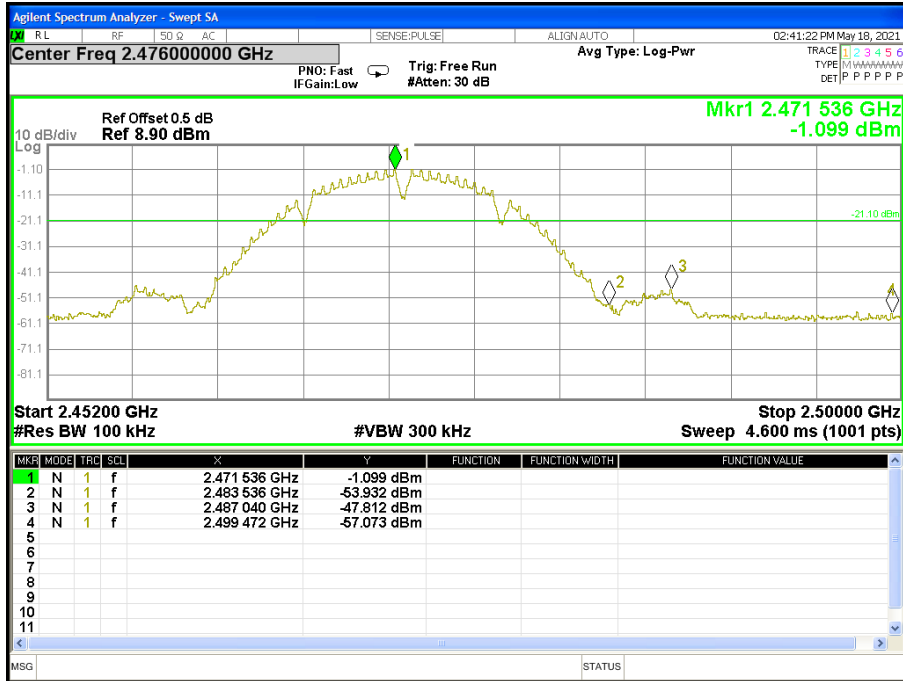




Temperature:	25°C	Relative Humidity:	60%
Test Voltage:	AC 120V/60Hz	Test Mode:	TX g Mode /CH01, CH06, CH11, CH12, CH13

CH 01

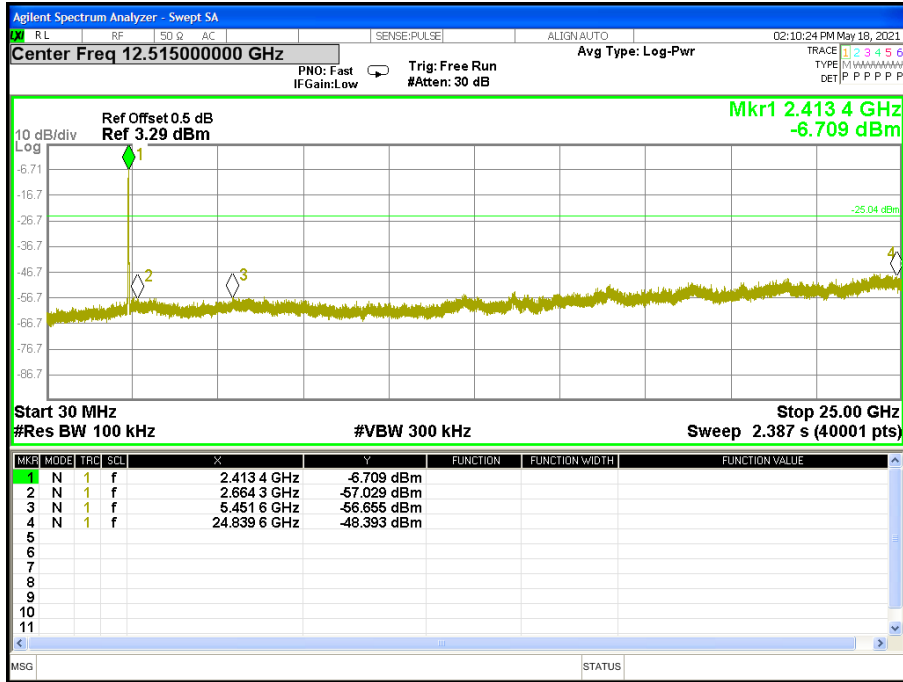


CH06

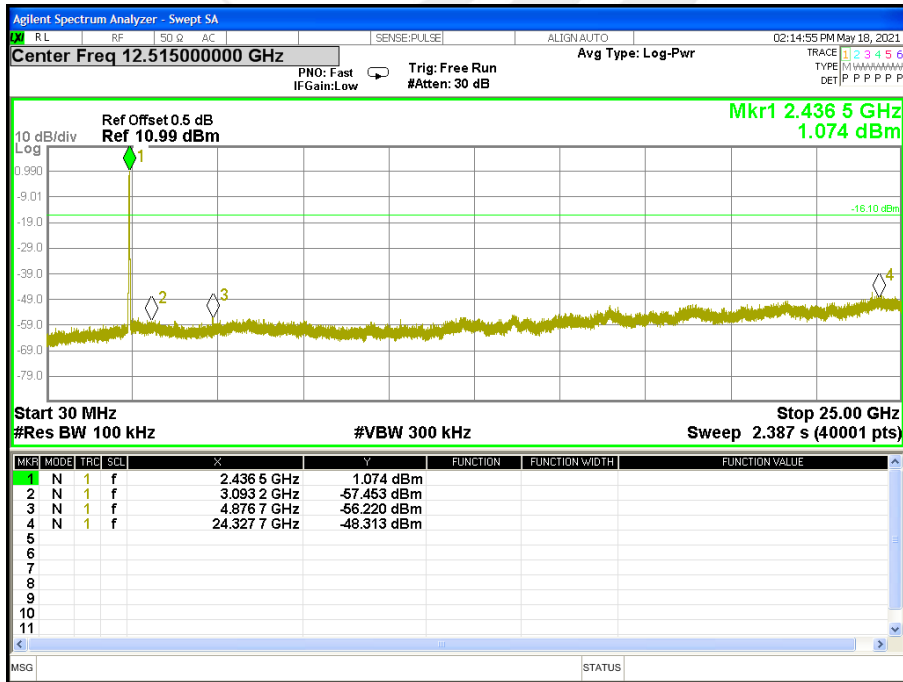






CH 11

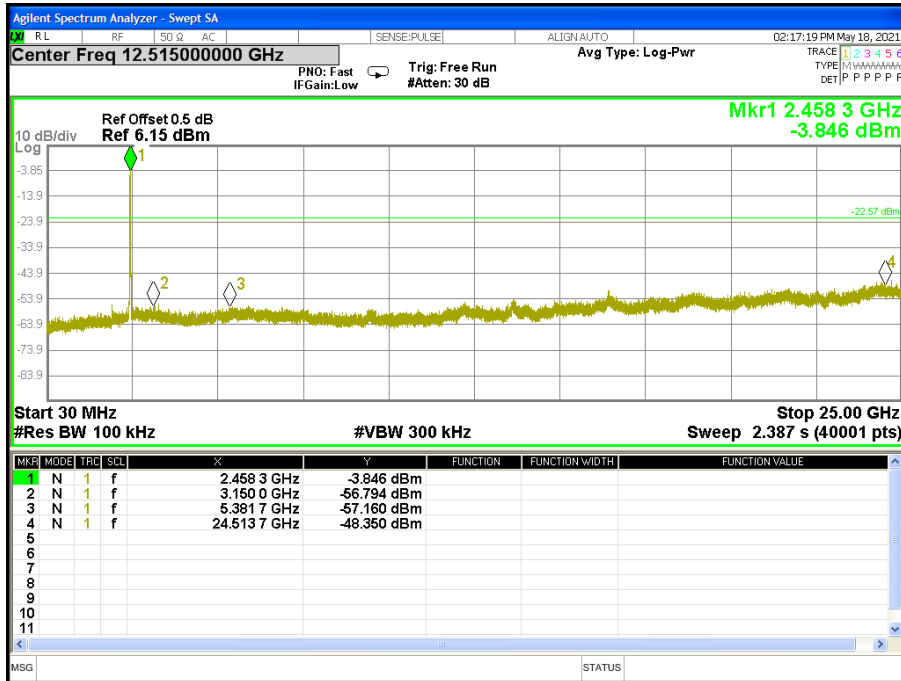


CH12

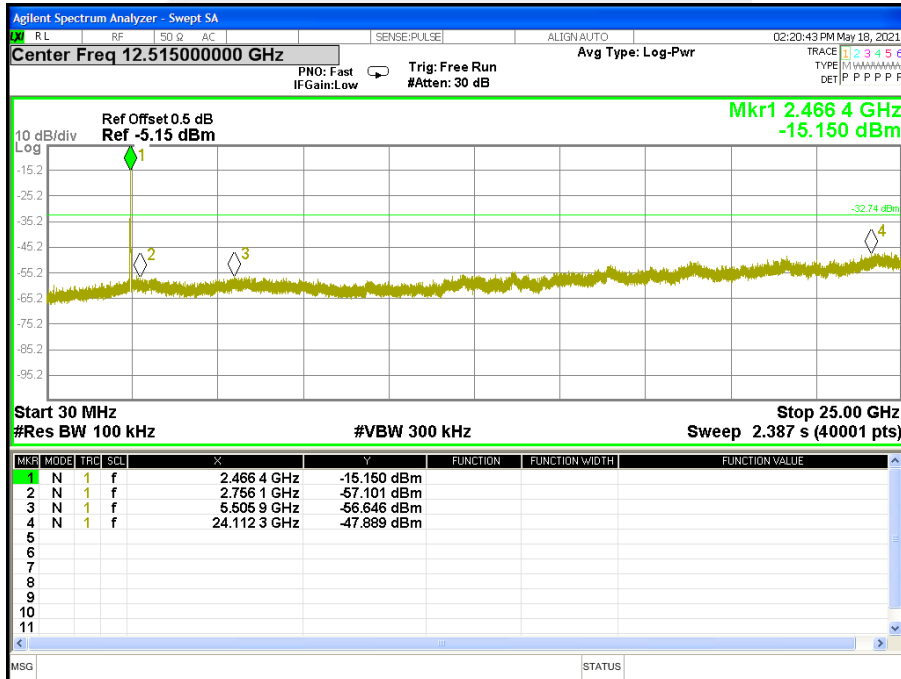




CH 13

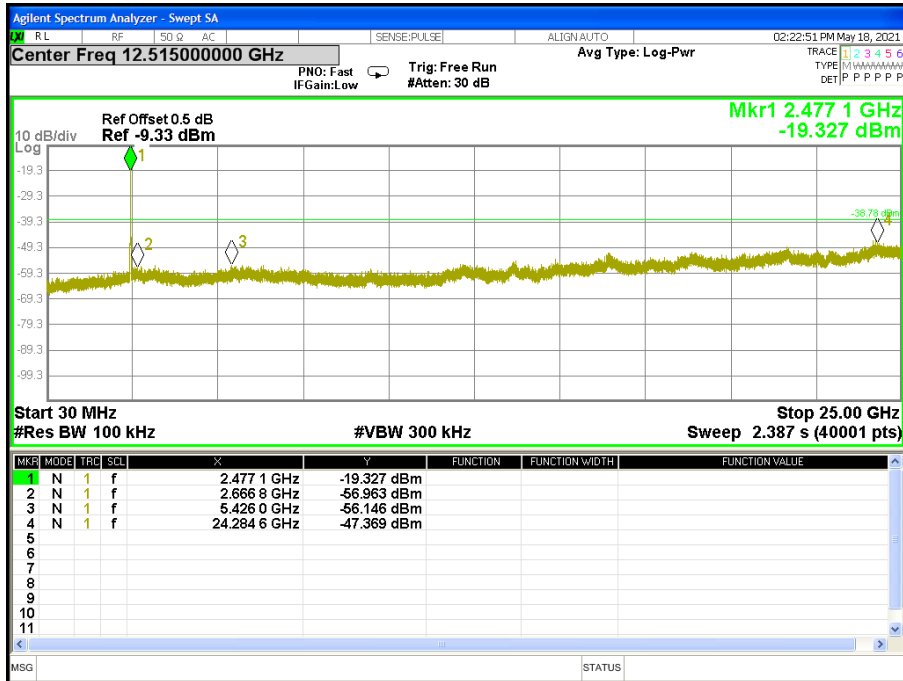




Band edge(it's also the reference level for conducted spurious emission)

CH 01

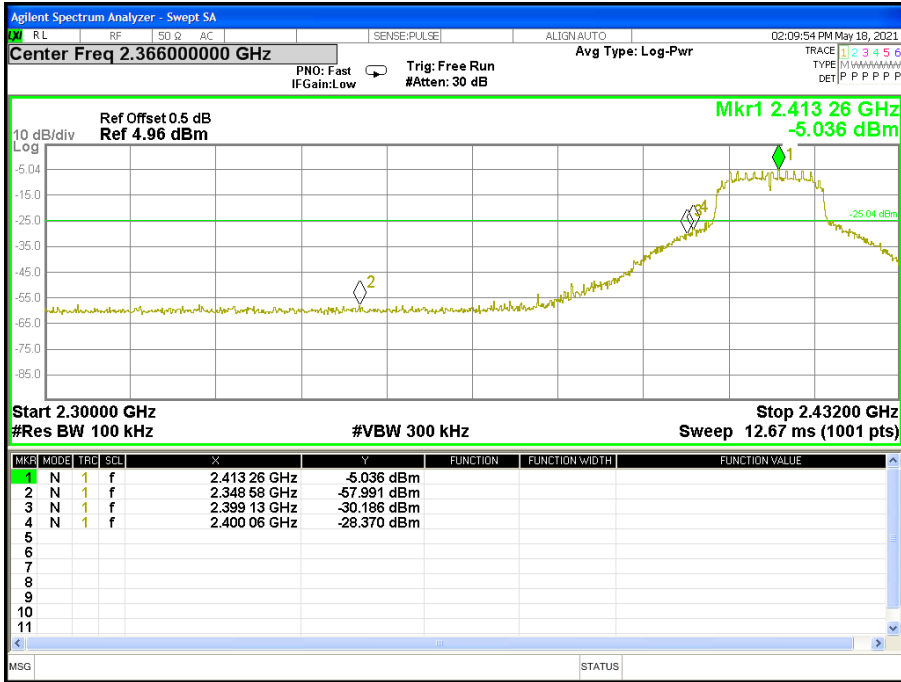


CH06

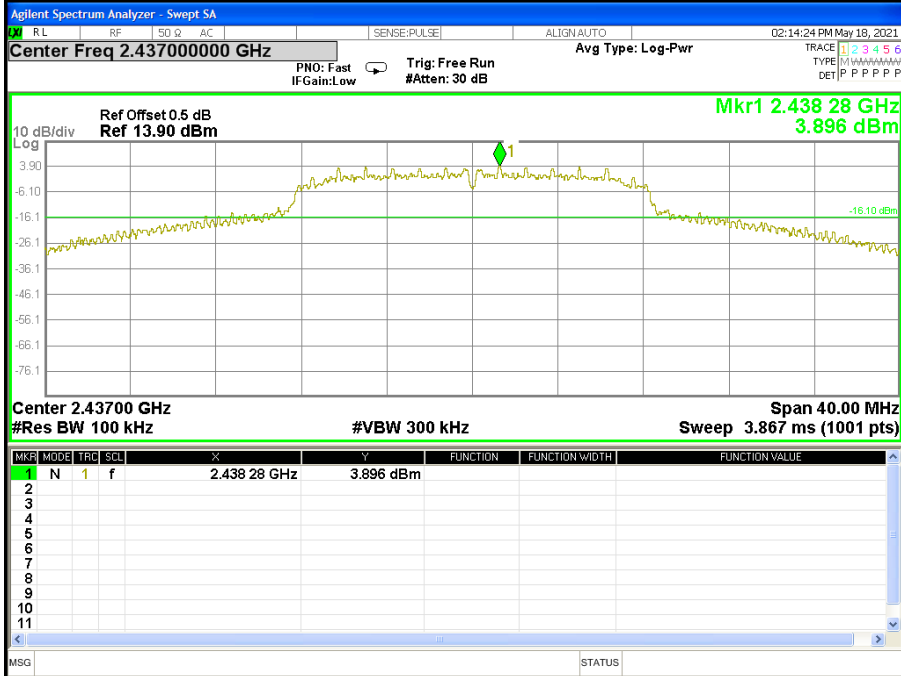




CH11

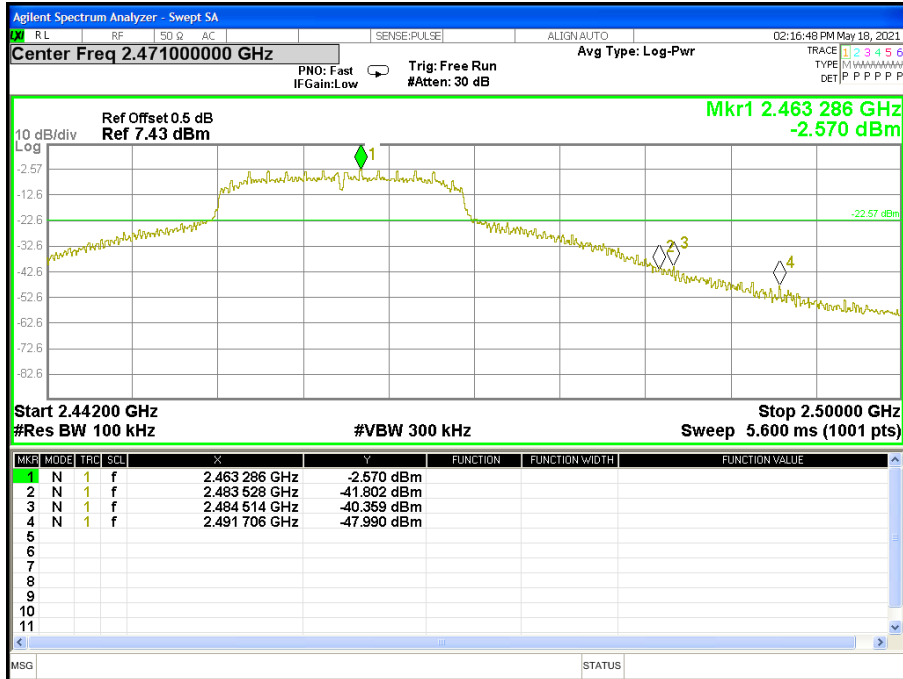


CH12

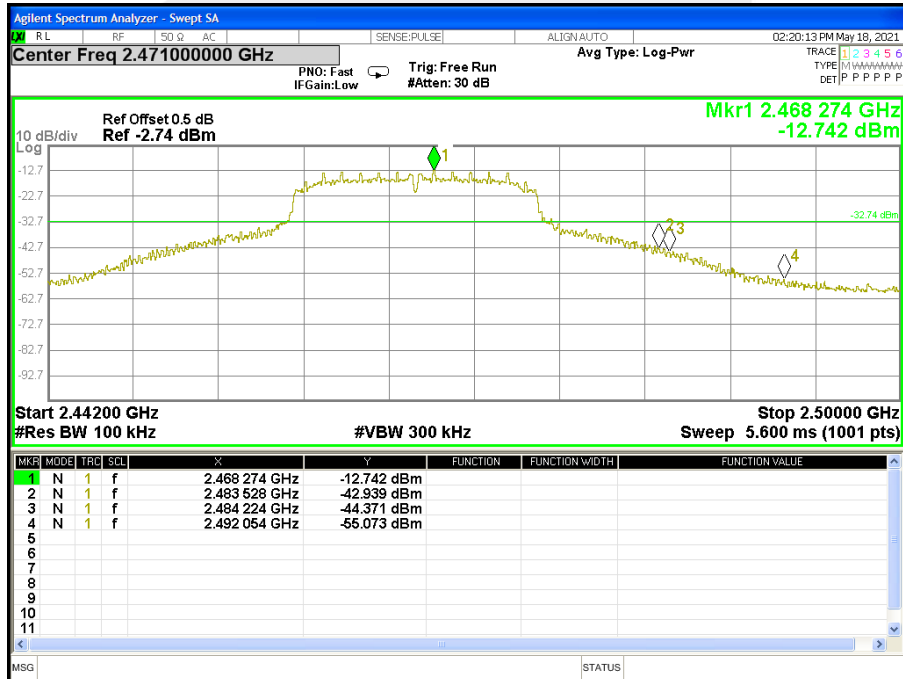




CH 13

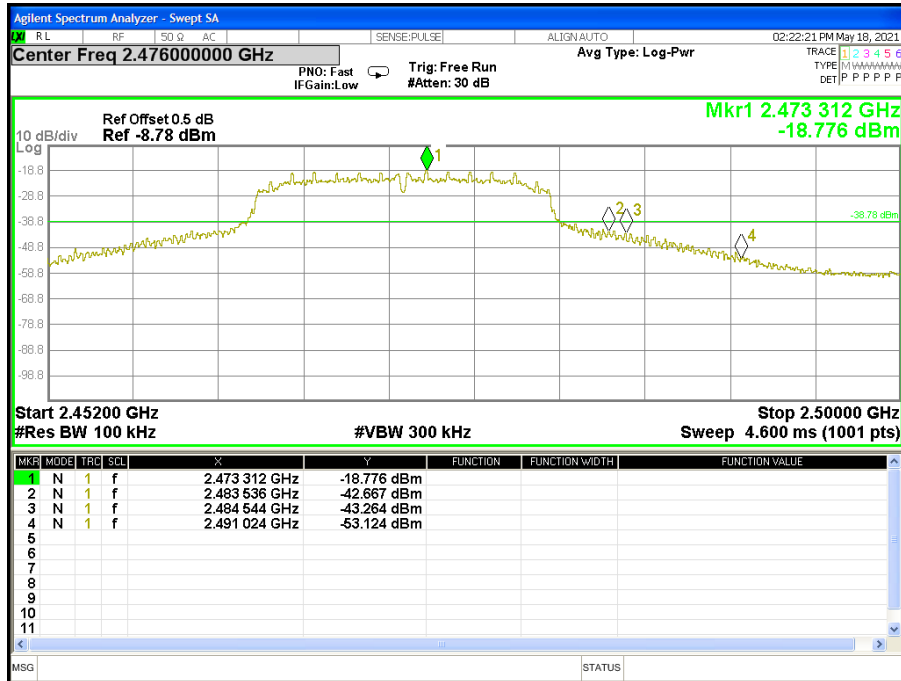




Temperature:	25°C	Relative Humidity:	60%
Test Voltage:	AC 120V/60Hz	Test Mode:	TX n Mode(20M) /CH01, CH06, CH11, CH12, CH13

CH 01

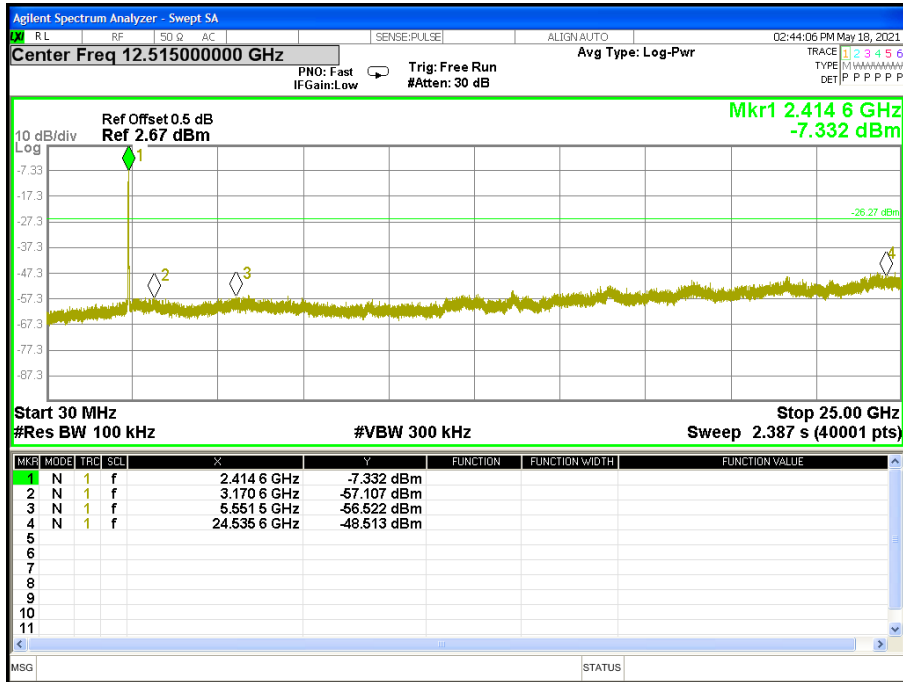


CH 06

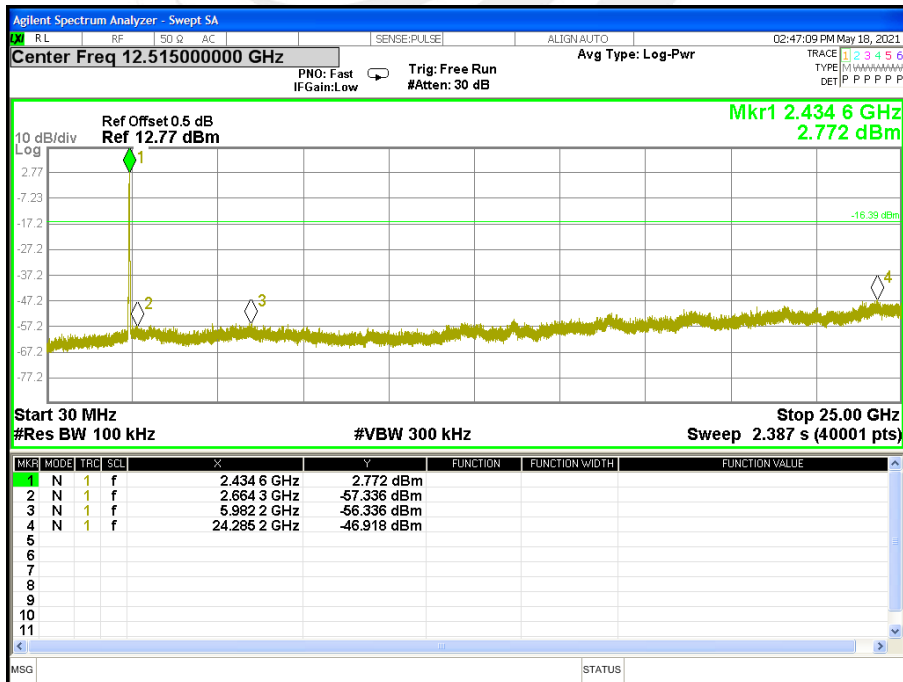




CH 11

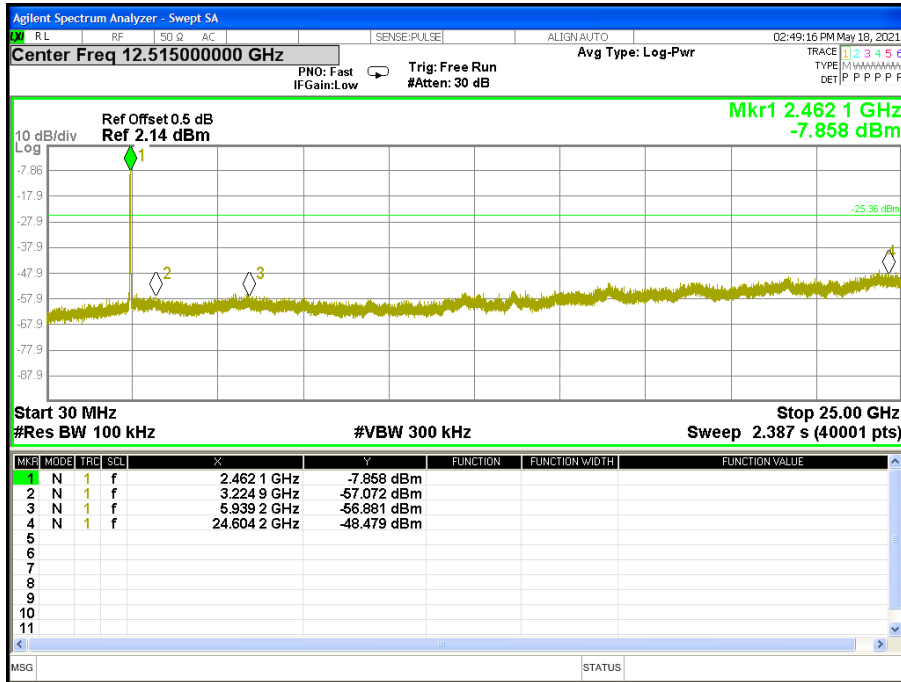


CH 12

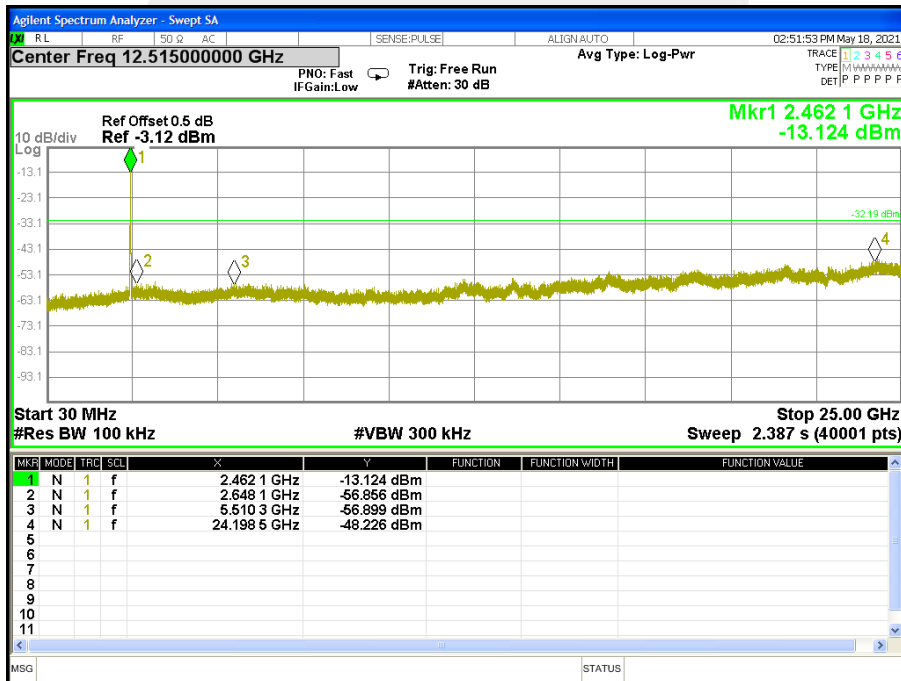



CH 13

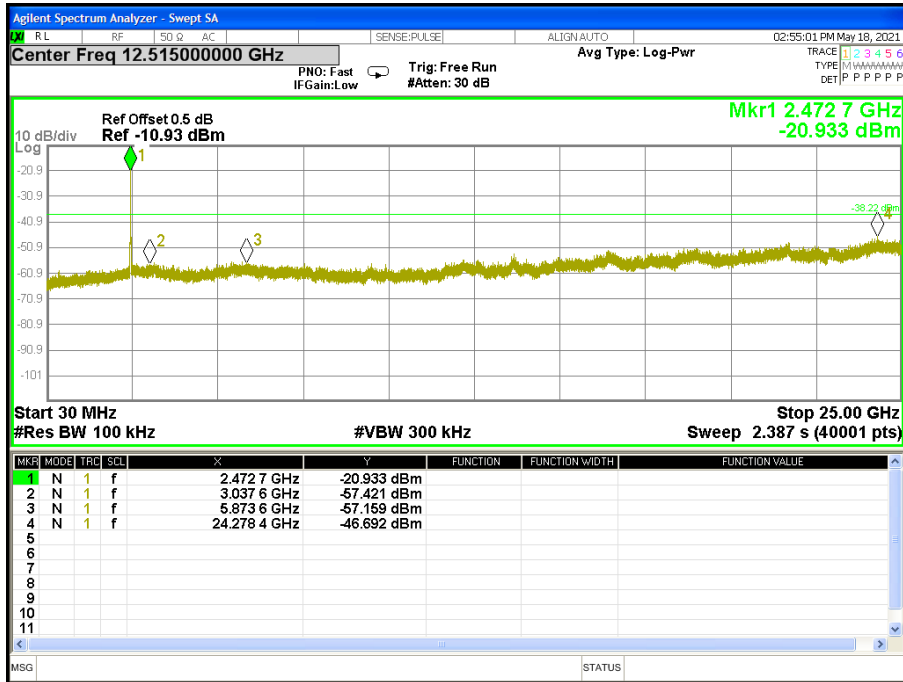







Band edge(it's also the reference level for conducted spurious emission)

CH 01

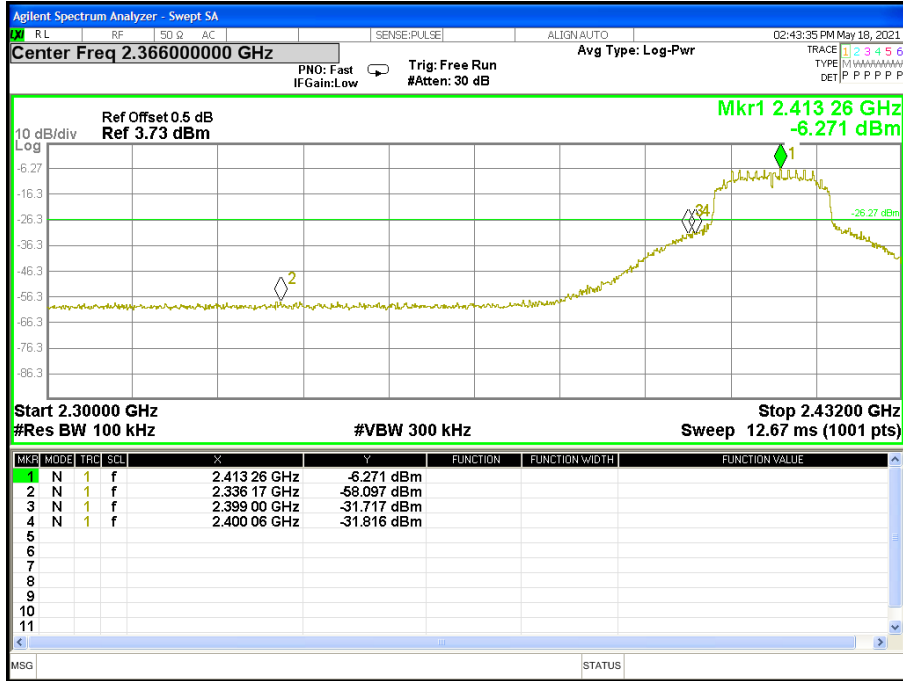


CH 06

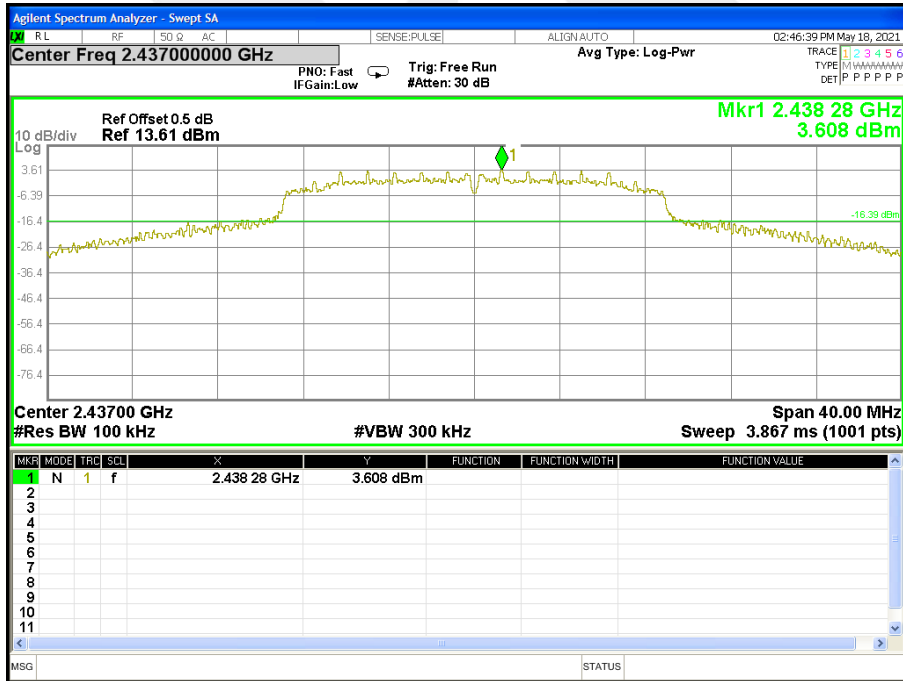




CH 11

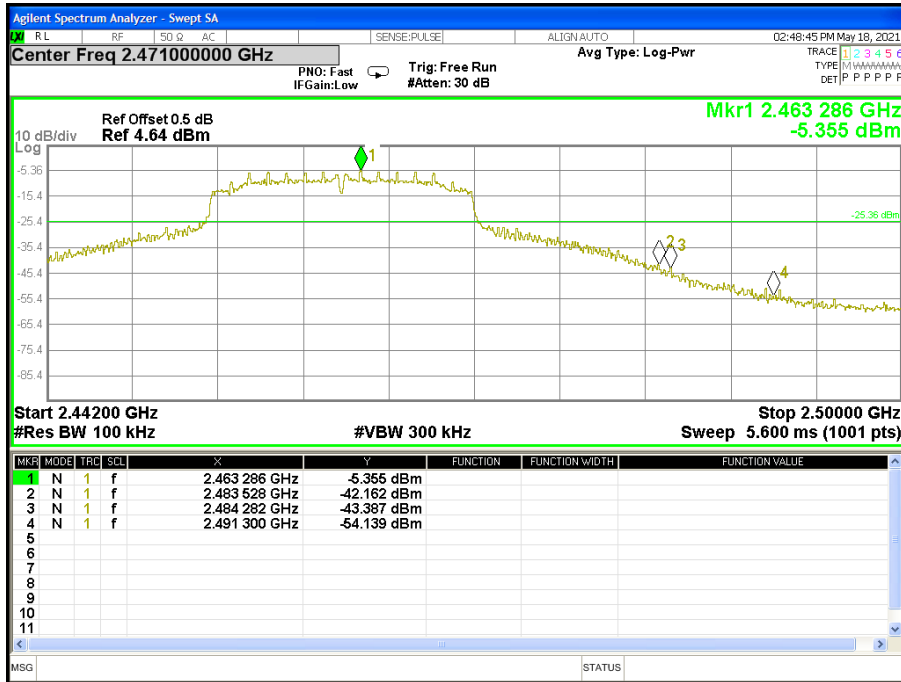


CH 12

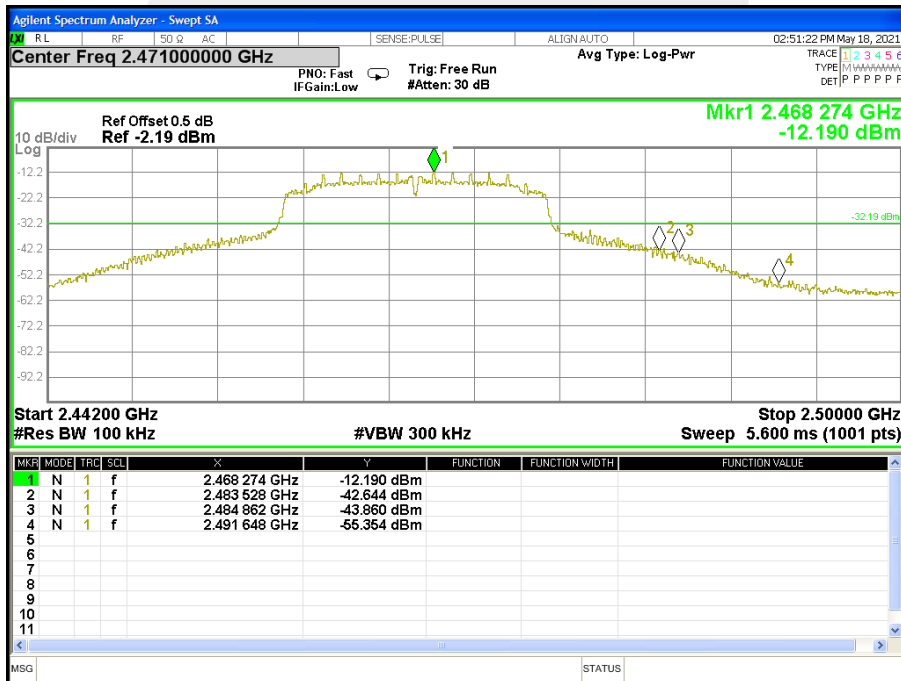



CH 13

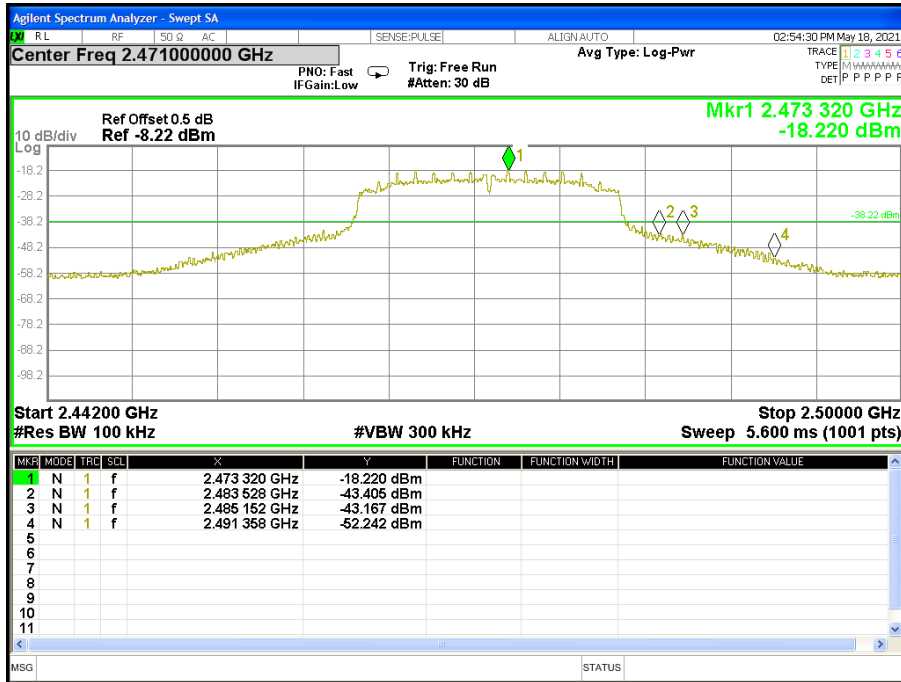

5. POWER SPECTRAL DENSITY TEST

5.1 LIMIT

FCC Part15.247 , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(e)	Power Spectral Density	≤8 dBm (RBW ≥3KHz)	2400-2483.5	PASS

5.2 TEST PROCEDURE

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS channel bandwidth.
3. Set the 100 kHz ≥ RBW ≥ 3 kHz.
4. Set the VBW ≥ 3 x RBW.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

5.3 DEVIATION FROM STANDARD

No deviation.

5.4 TEST SETUP



5.5 EUT OPERATION CONDITIONS

Please refer to section 3.1.4 of this report.




5.6 TEST RESULTS

Temperature:	25°C	Relative Humidity:	60%
Test Voltage:	AC 120V/60Hz	Test Mode:	TX b Mode /CH01, CH06, CH11, CH12, CH13


Frequency	Power Density	Limit (dBm/3KHz)	Result
	(dBm/3kHz)		
2412 MHz	-9.645	≤8	PASS
2437 MHz	-9.797	≤8	PASS
2462 MHz	-10.096	≤8	PASS
2467 MHz	-10.082	≤8	PASS
2472 MHz	-15.693	≤8	PASS

TX CH01

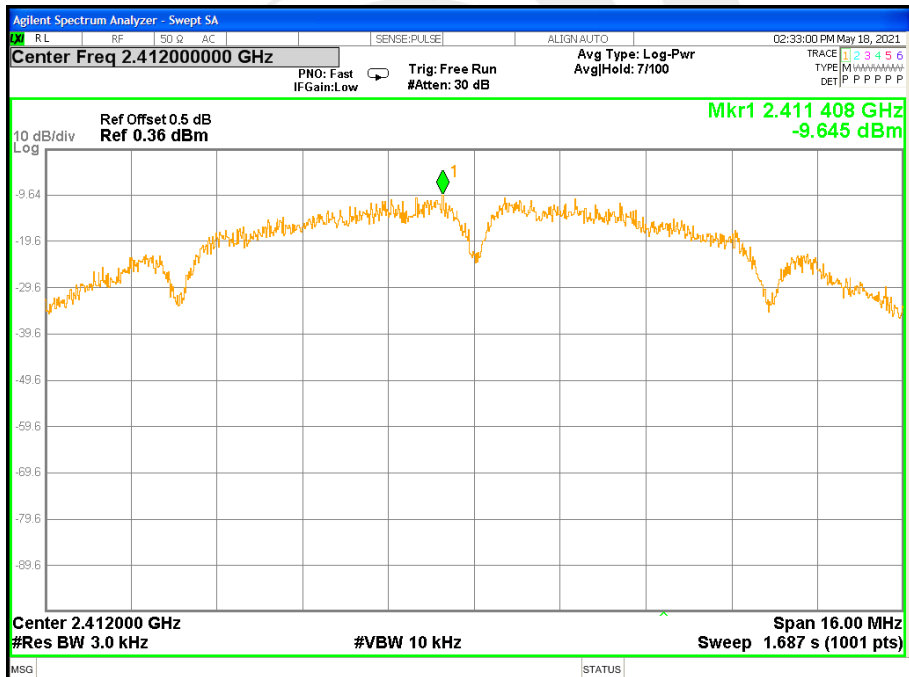




### TX CH06

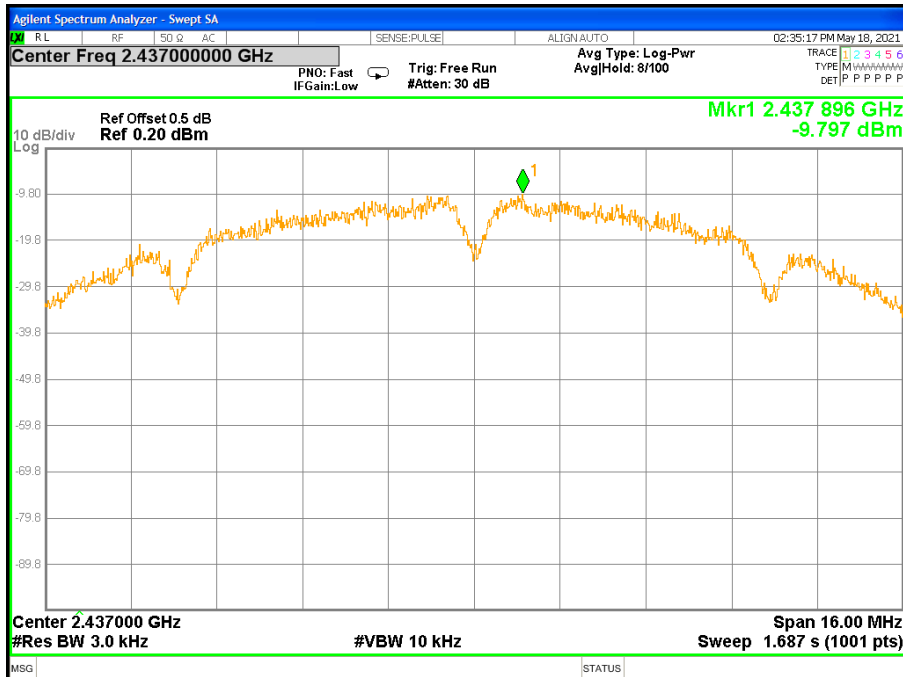


### TX CH11

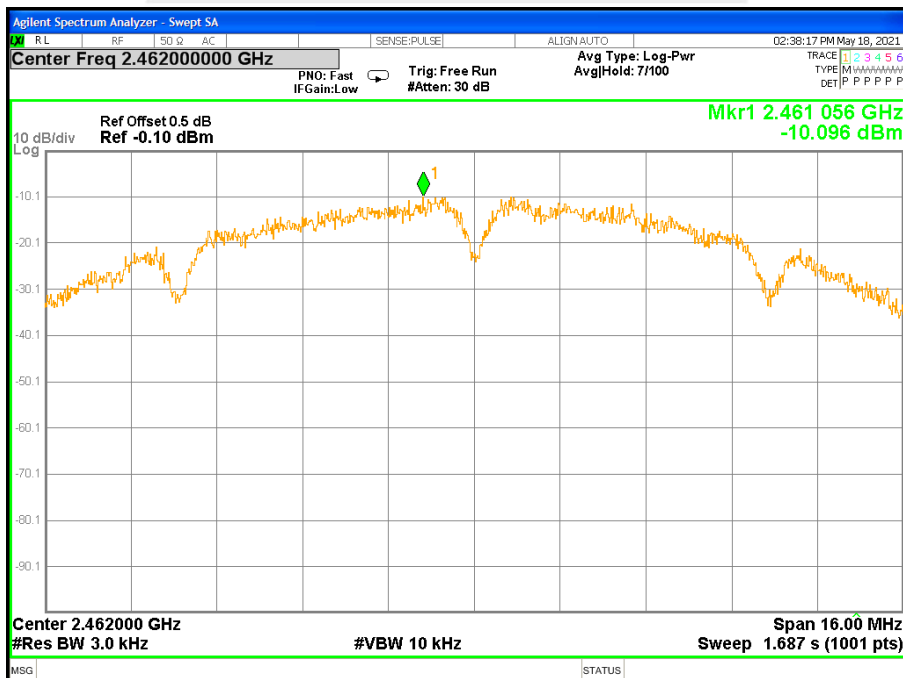




### TX CH12

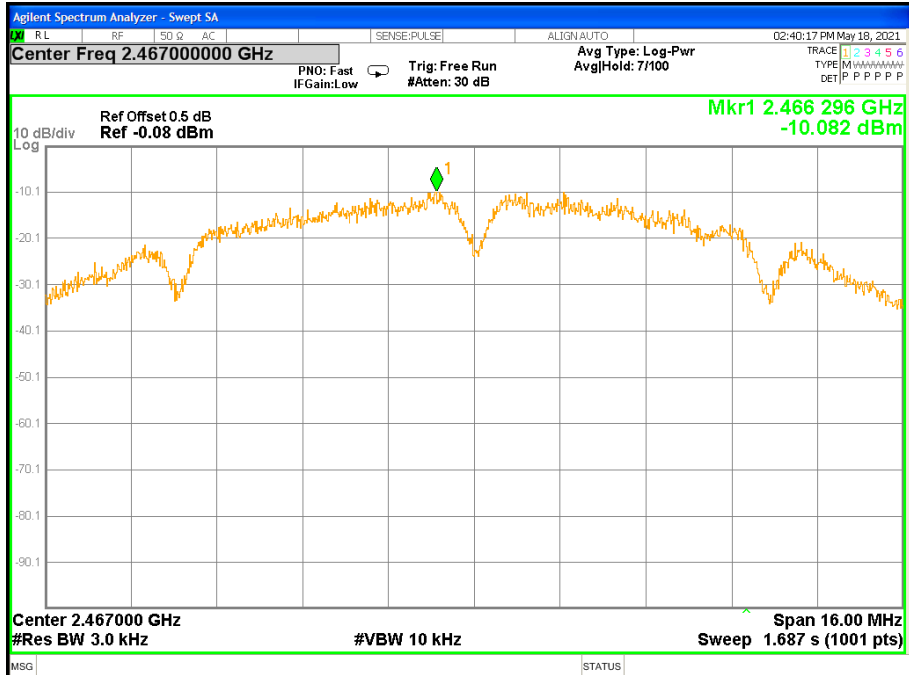

### TX CH13

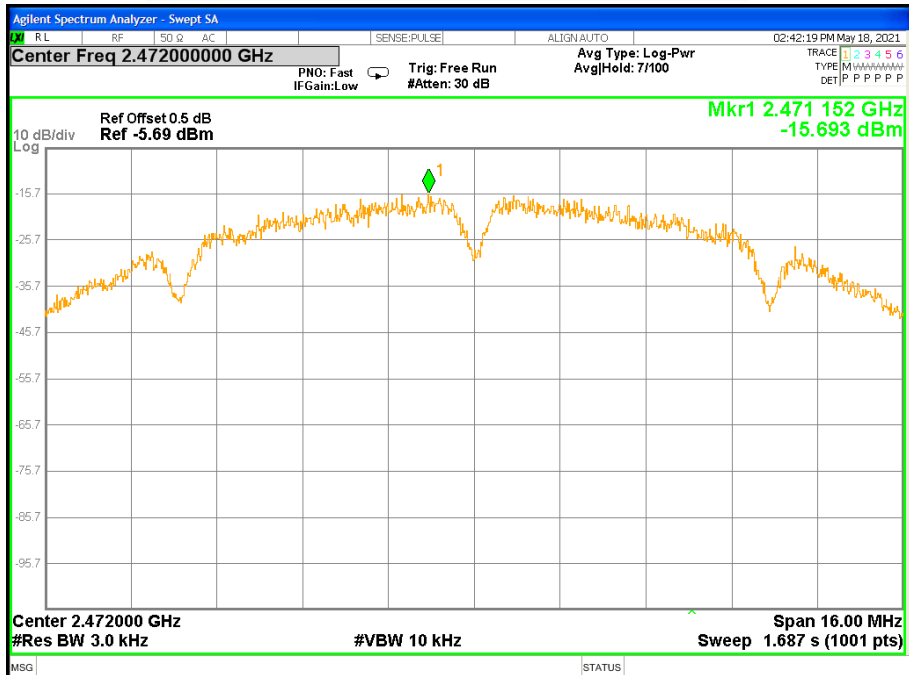




Temperature:	25°C	Relative Humidity:	60%
Test Voltage:	AC 120V/60Hz	Test Mode:	TX g Mode/CH01, CH06, CH11, CH12, CH13

Frequency	Power Density	Limit (dBm/3KHz)	Result
	(dBm/3kHz)		
2412 MHz	-16.513	≤8	PASS
2437 MHz	-7.554	≤8	PASS
2462 MHz	-15.218	≤8	PASS
2467 MHz	-24.035	≤8	PASS
2472 MHz	-30.671	≤8	PASS


TX CH01

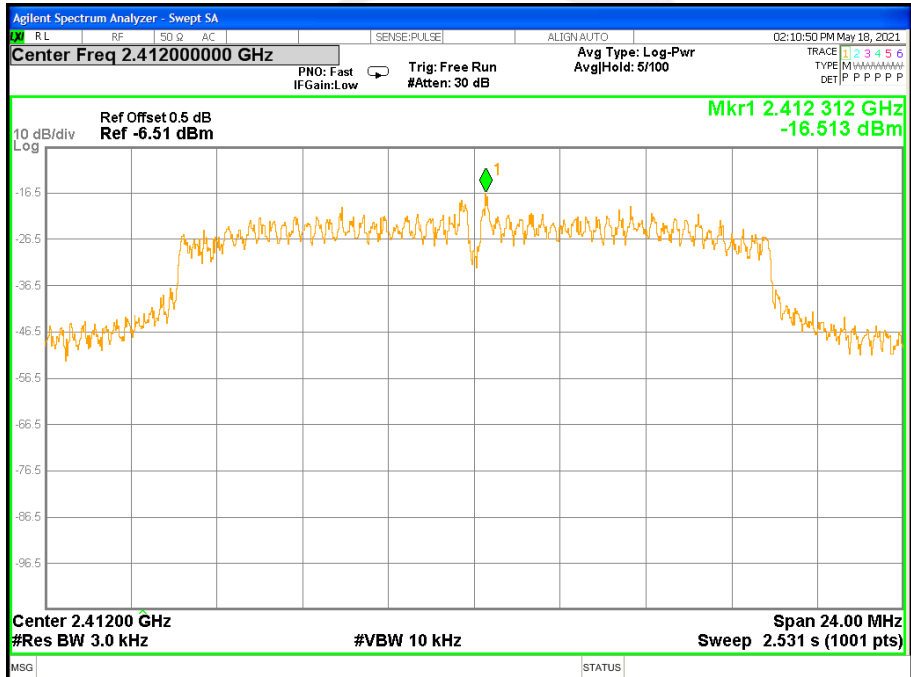






### TX CH06

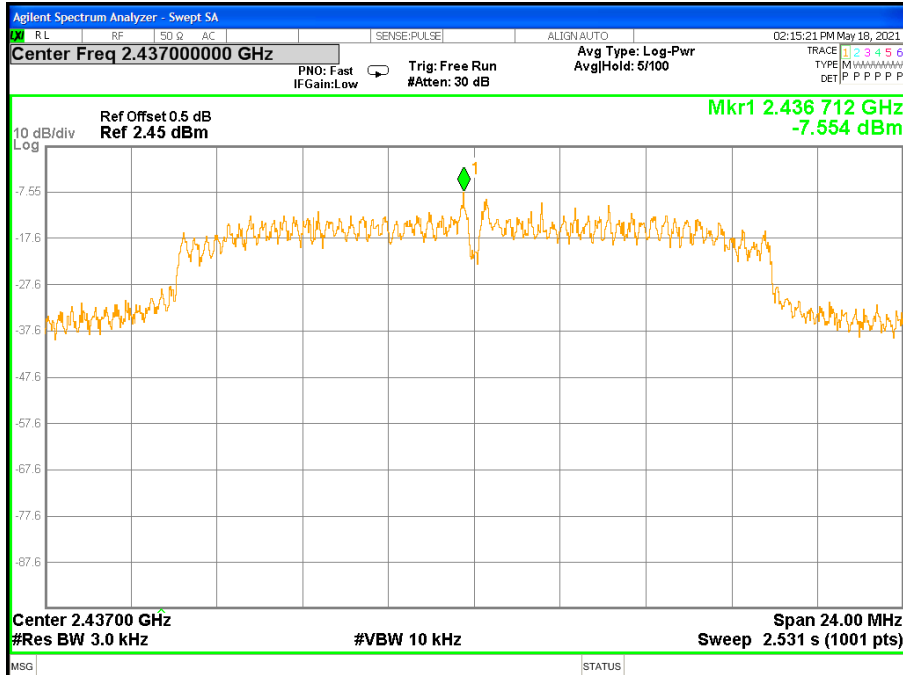


### TX CH11

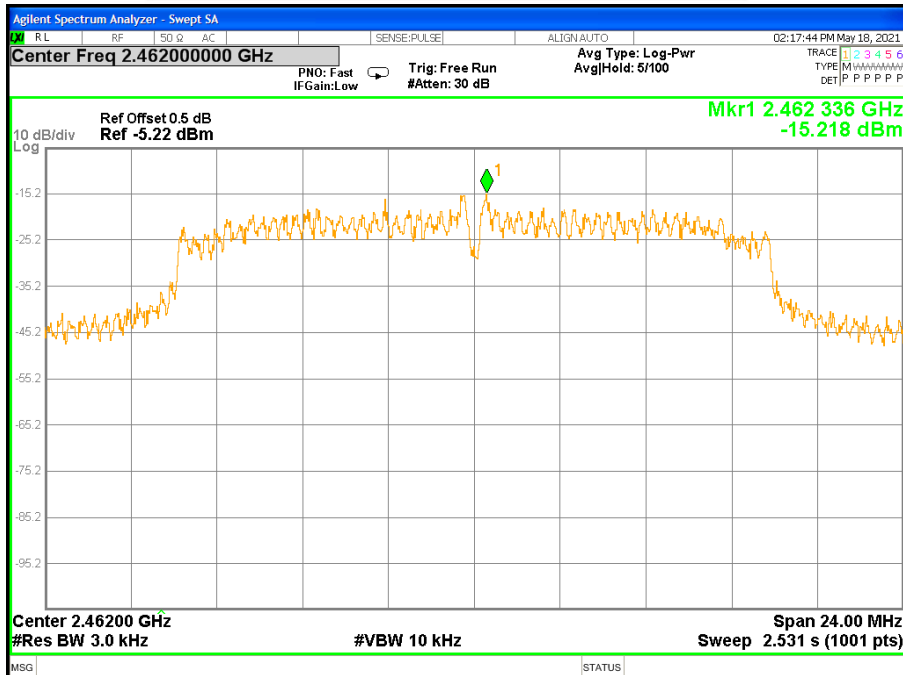




### TX CH12

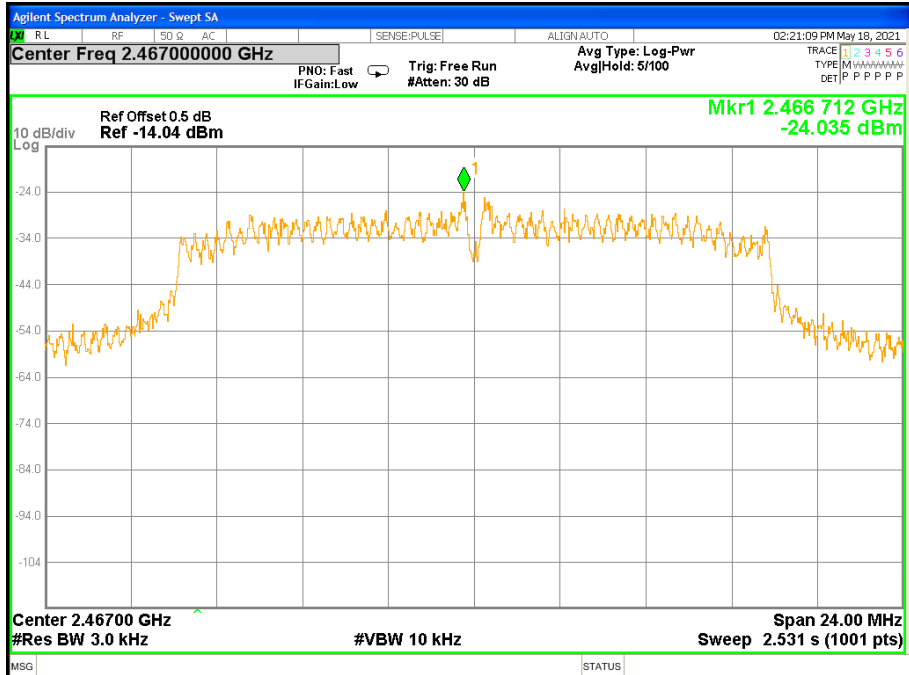

### TX CH13

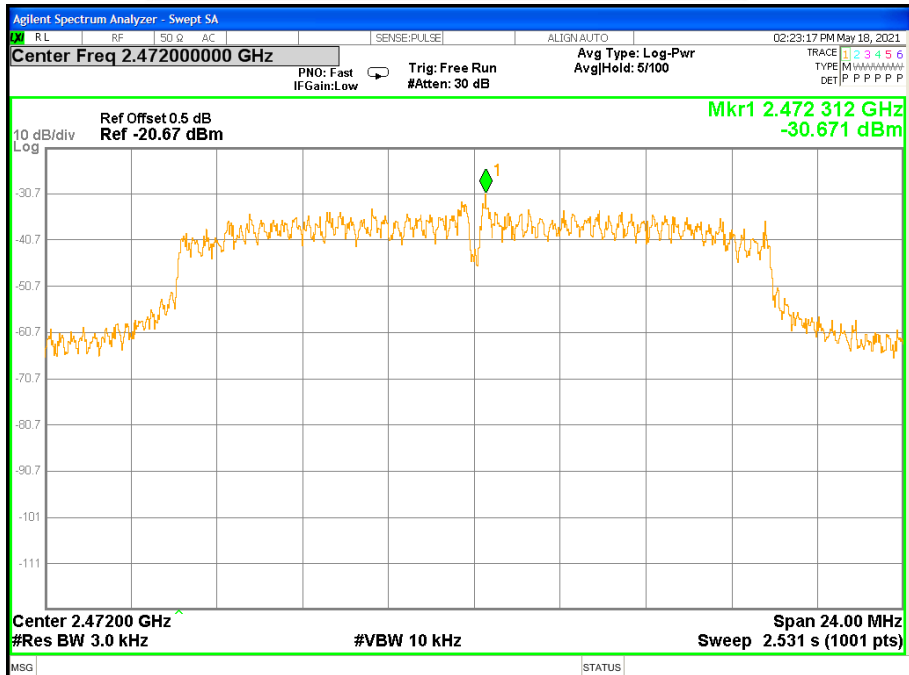




Temperature:	25°C	Relative Humidity:	60%
Test Voltage:	AC 120V/60Hz	Test Mode:	TX n Mode(20M) /CH01, CH06, CH11, CH12, CH13


Frequency	Power Density	Limit (dBm/3KHz)	Result
	(dBm/3kHz)		
2412 MHz	-19.057	≤8	PASS
2437 MHz	-10.447	≤8	PASS
2462 MHz	-19.754	≤8	PASS
2467 MHz	-25.418	≤8	PASS
2472 MHz	-30.507	≤8	PASS

TX CH01

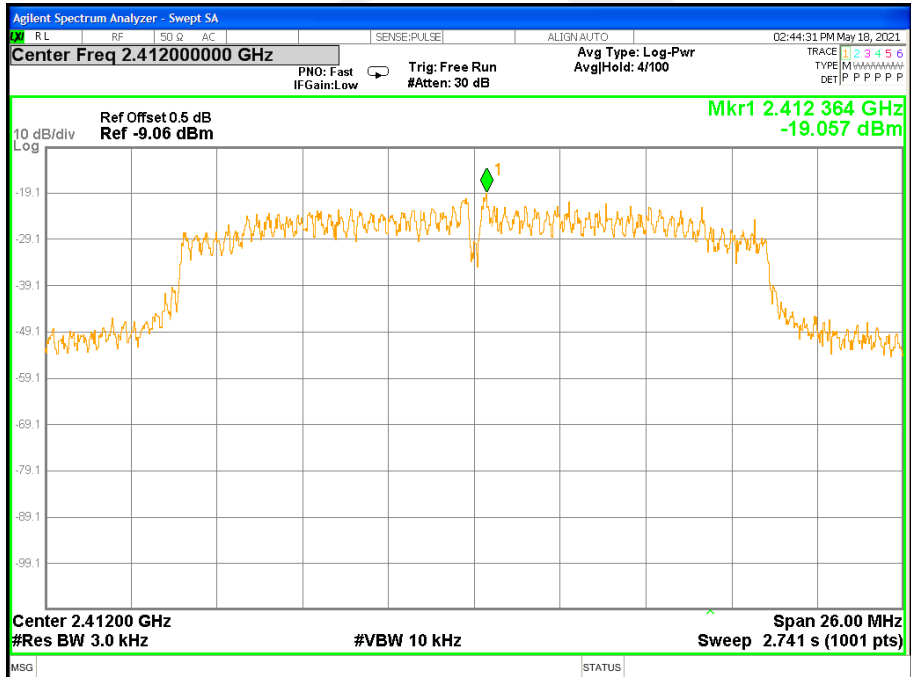




### TX CH06

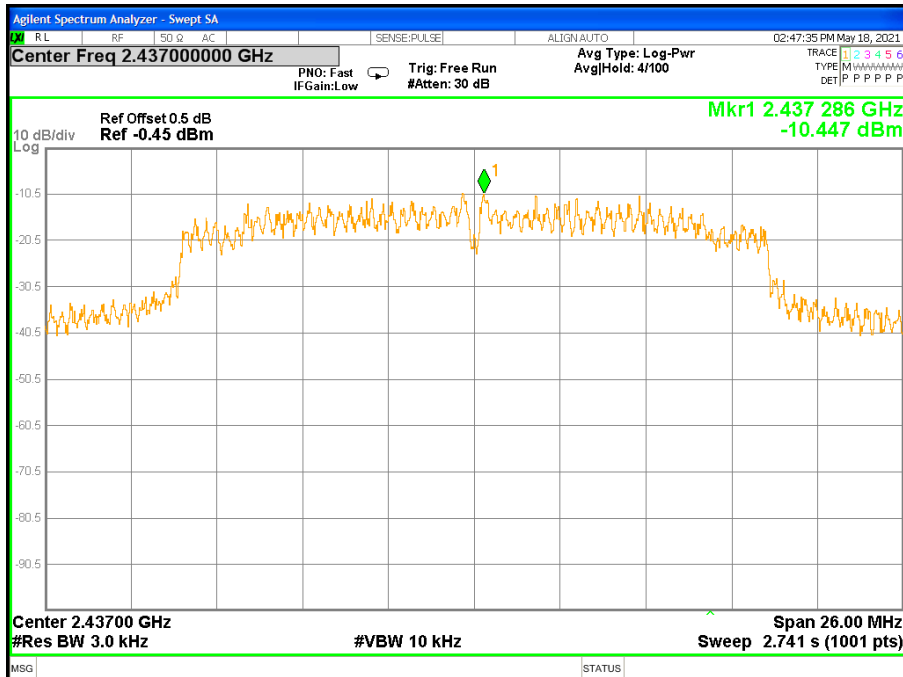


### TX CH11

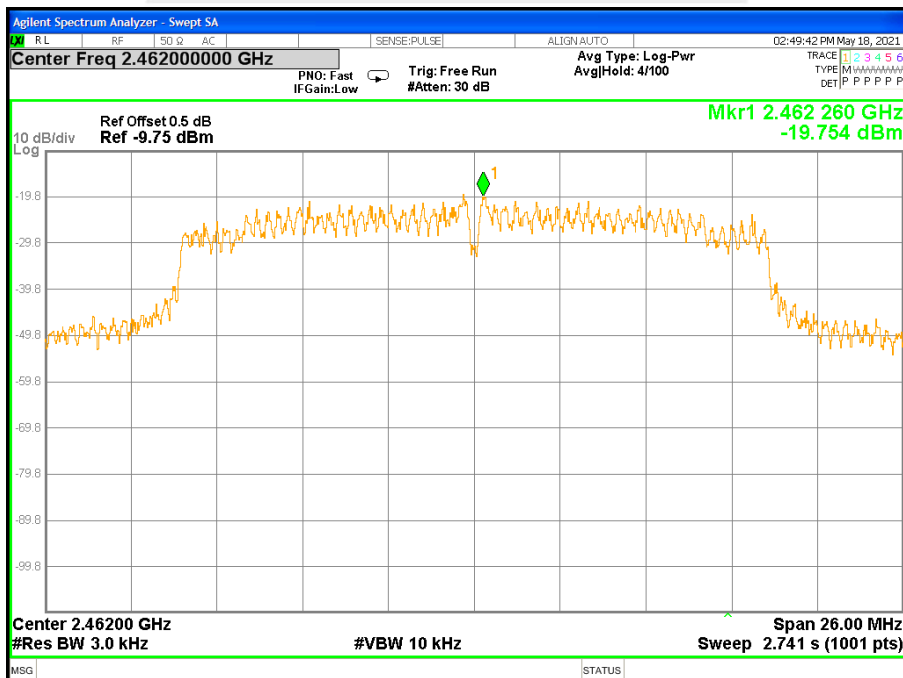




### TX CH12

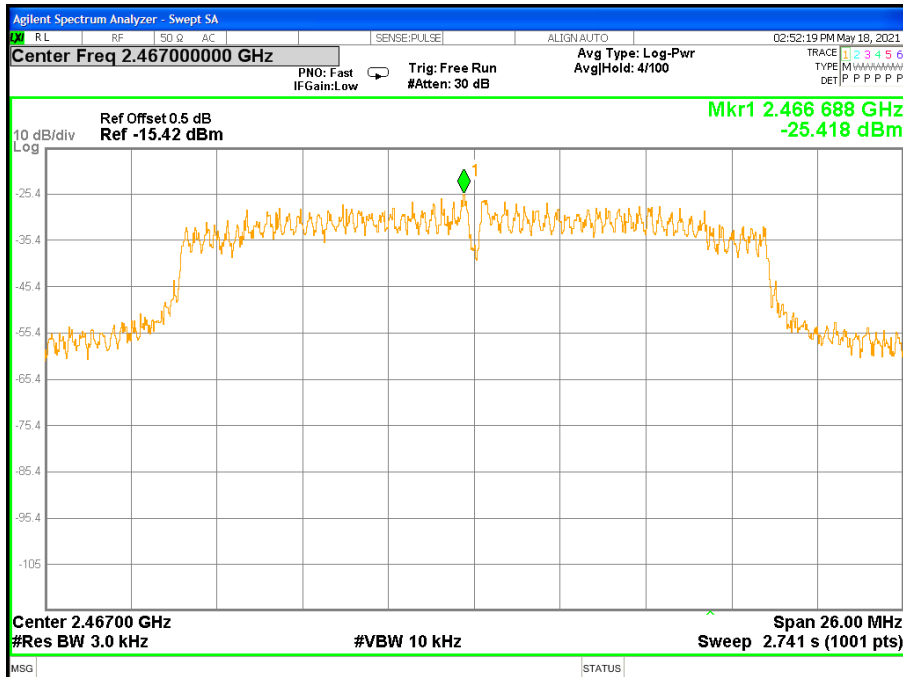

### TX CH13

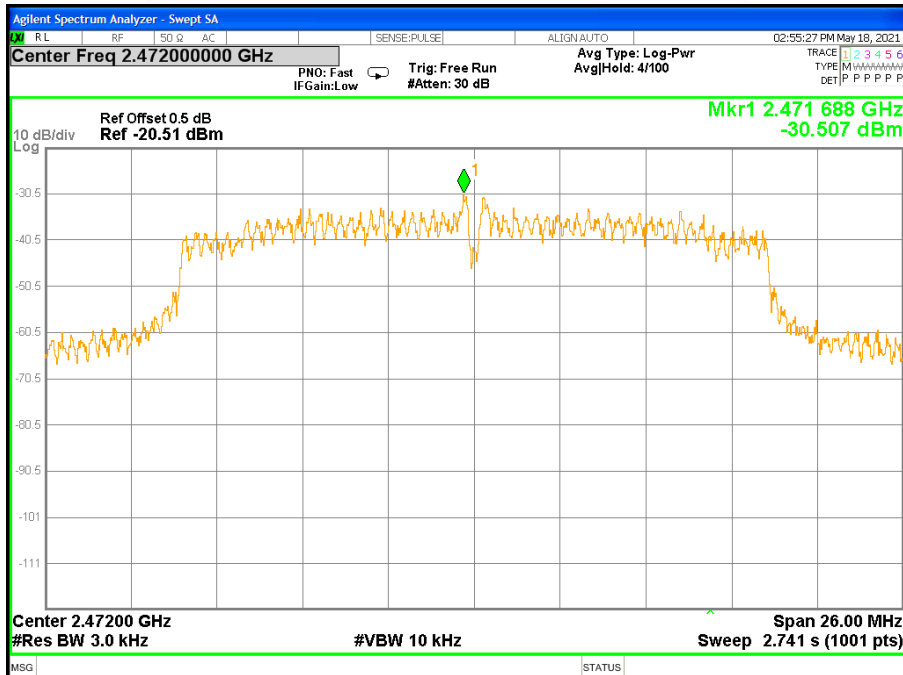

## 6. BANDWIDTH TEST

### 6.1 LIMIT

FCC Part15.247,Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{KHz}$ (6dB bandwidth)	2400-2483.5	PASS

### 6.2 TEST PROCEDURE

The automatic bandwidth measurement capability of an instrument may be employed using the X dB bandwidth mode with X set to 6 dB, if the functionality described above (i.e., RBW = 100 kHz, VBW $\geq$ 3RBW, peak detector with maximum hold) is implemented by the instrumentation function. When using this capability, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be  $\geq 6$  dB.

### 6.3 DEVIATION FROM STANDARD

No deviation.

### 6.4 TEST SETUP



### 6.5 EUT OPERATION CONDITIONS

Please refer to section 3.1.4 of this report.




6.6 TEST RESULTS

Temperature:	25°C	Relative Humidity:	60%
Test Voltage:	AC 120V/60Hz	Test Mode:	TX b Mode/CH01, CH06, CH11, CH12, CH13

Remark: PEAK DETECTOR IS USED


Frequency	6dB Bandwidth	Limit	Result
	(MHz)	(KHz)	
2412 MHz	8.537	≥500KHz	PASS
2437 MHz	8.537	≥500KHz	PASS
2462 MHz	8.080	≥500KHz	PASS
2467 MHz	8.555	≥500KHz	PASS
2472 MHz	8.071	≥500KHz	PASS

TX CH 01

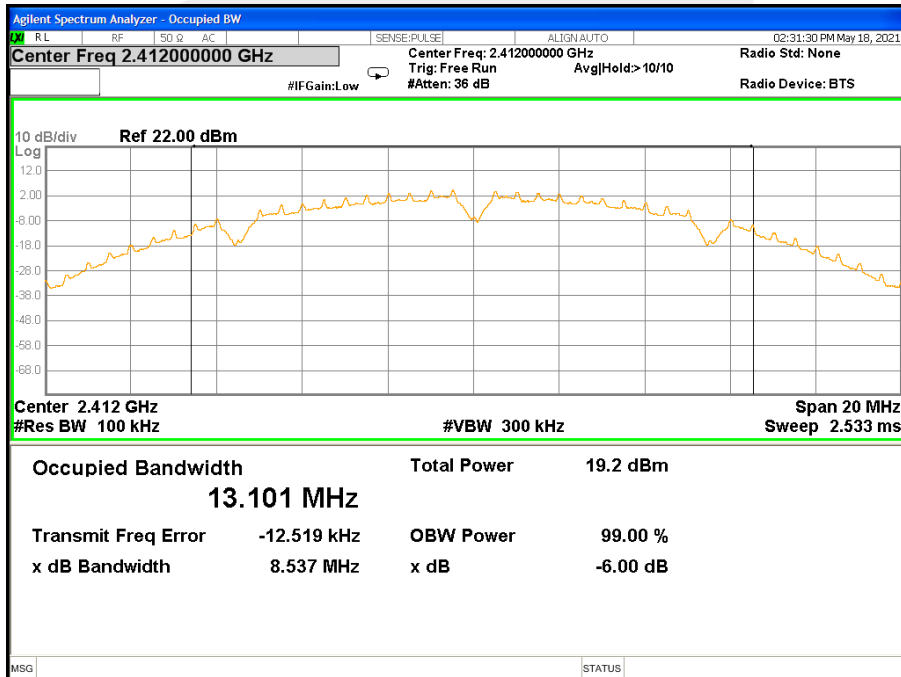




### TX CH 06

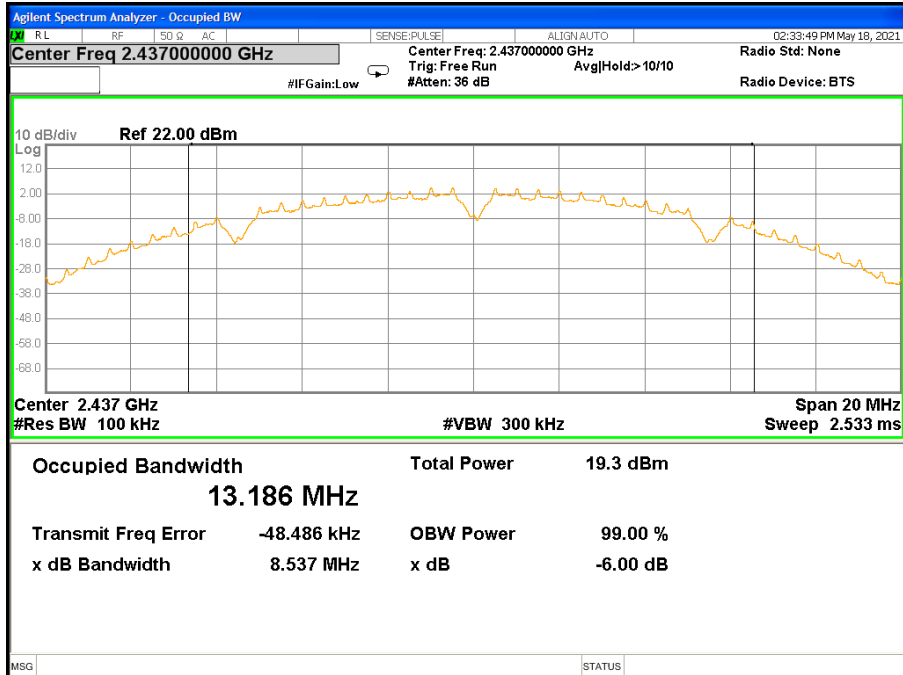


### TX CH 11

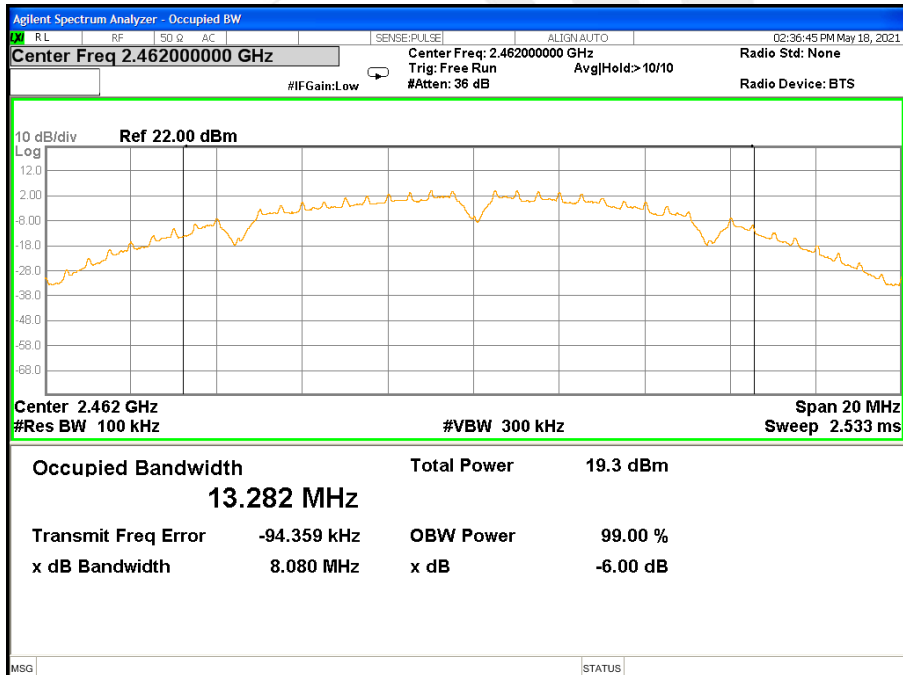






TX CH 12

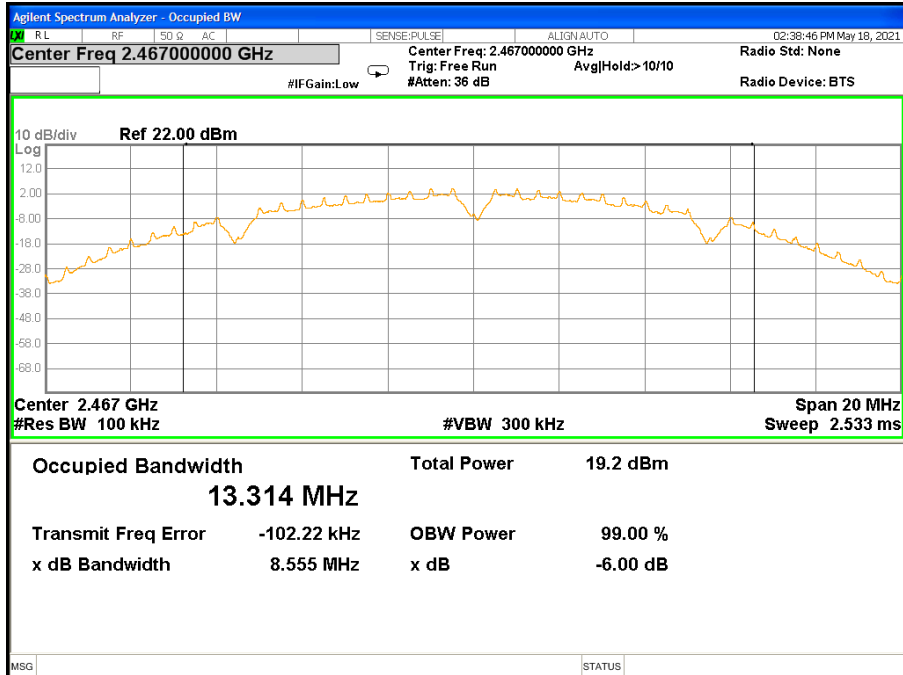

TX CH 13

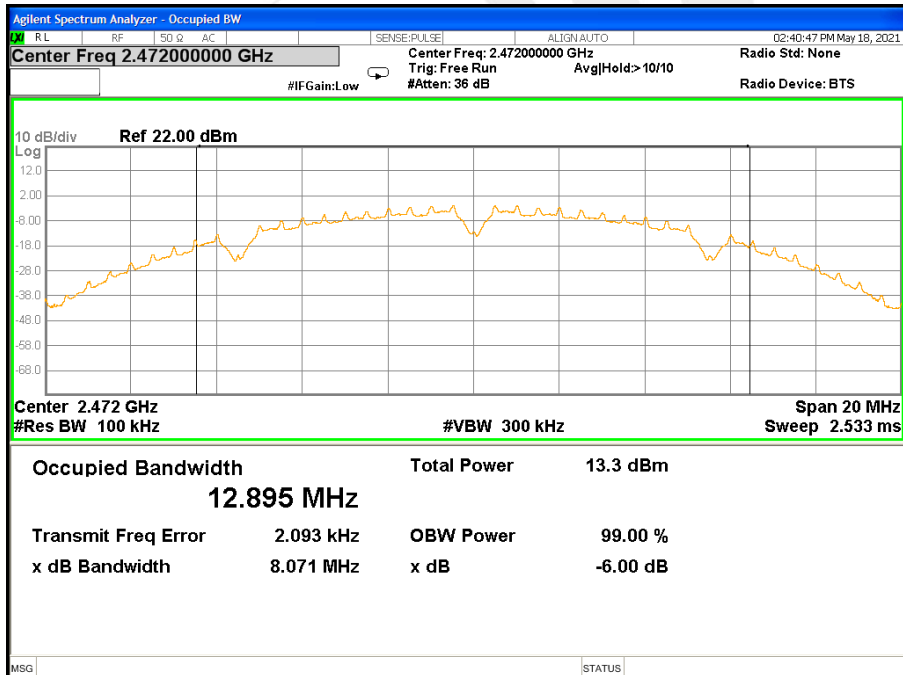




Temperature:	25°C	Relative Humidity:	60%
Test Voltage:	AC 120V/60Hz	Test Mode:	TX g Mode/CH01, CH06, CH11, CH12, CH13


Frequency	6dB Bandwidth	Limit	Result
	(MHz)	(KHz)	
2412 MHz	15.090	≥500KHz	PASS
2437 MHz	15.090	≥500KHz	PASS
2462 MHz	15.090	≥500KHz	PASS
2467 MHz	15.090	≥500KHz	PASS
2472 MHz	15.090	≥500KHz	PASS

TX CH 01

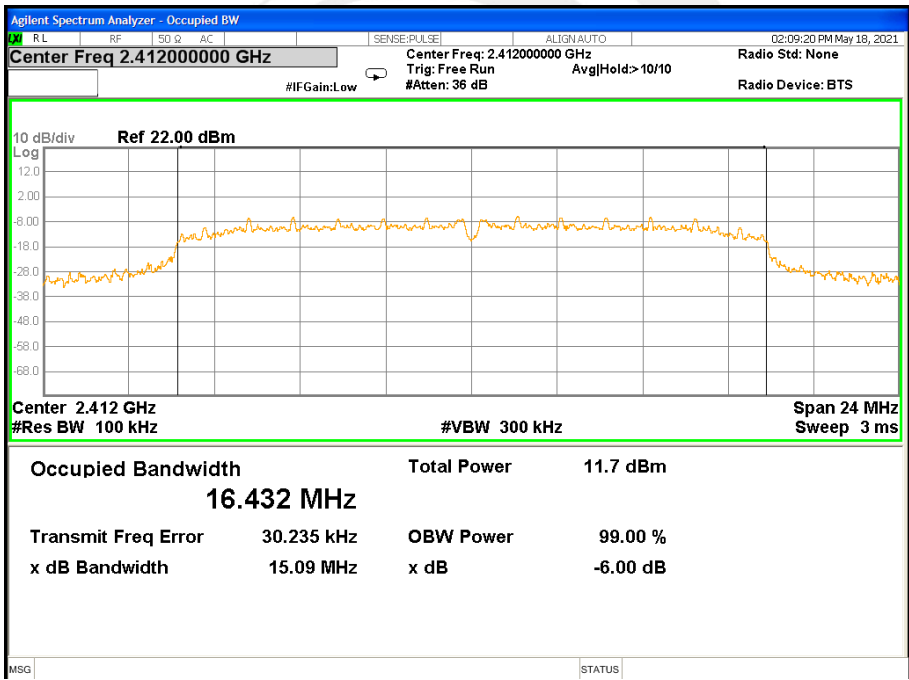




### TX CH 06

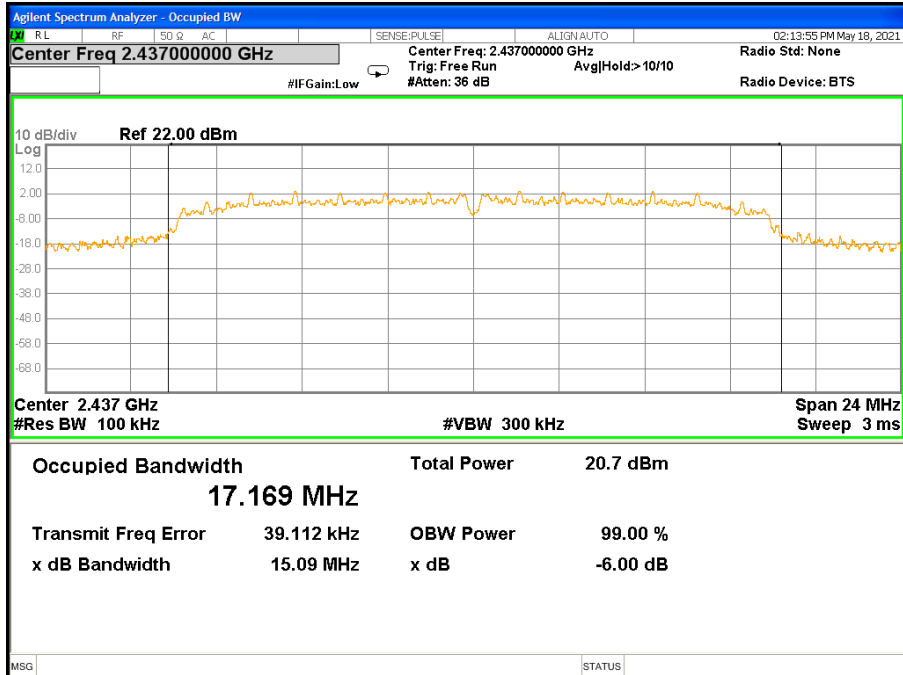


### TX CH 11

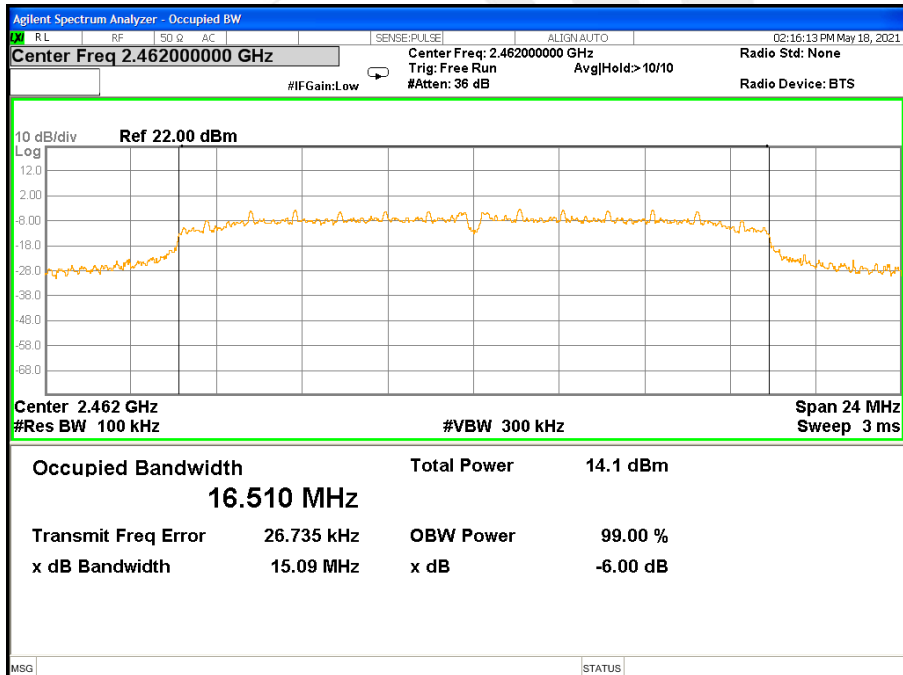




### TX CH 12

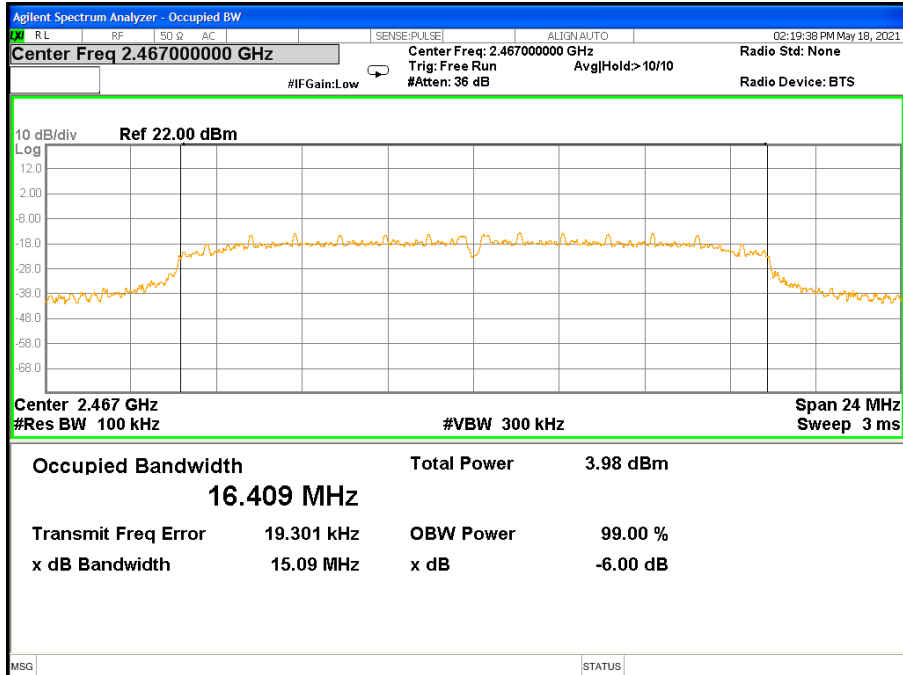

### TX CH 13

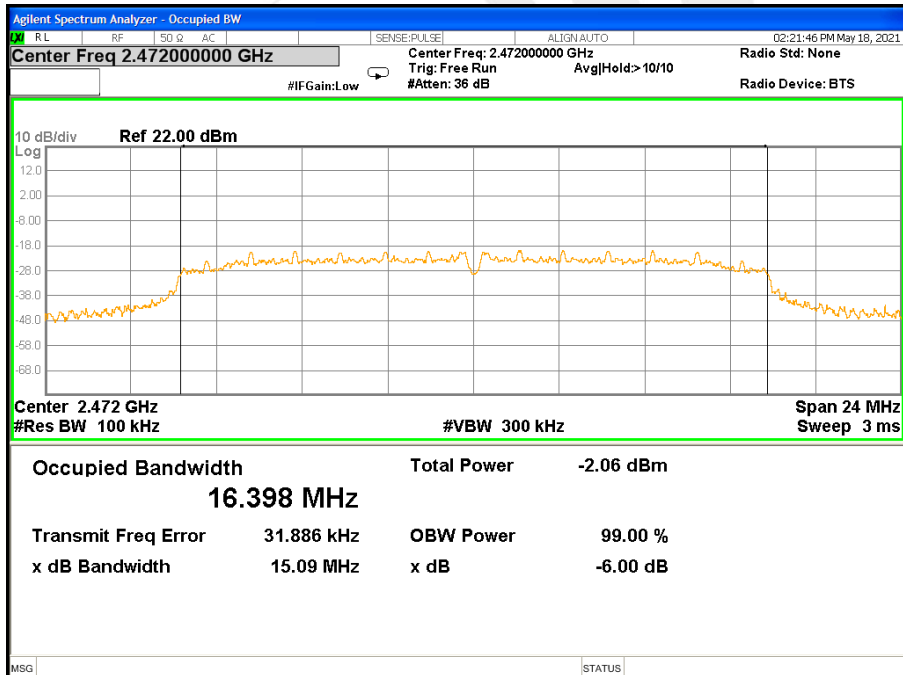




Temperature:	25°C	Relative Humidity:	60%
Test Voltage:	AC 120V/60Hz	Test Mode:	TX n Mode(20M) /CH01, CH06, CH11, CH12, CH13


Frequency	6dB Bandwidth	Limit	Result
	(MHz)	(KHz)	
2412 MHz	15.090	≥500KHz	PASS
2437 MHz	15.090	≥500KHz	PASS
2462 MHz	15.090	≥500KHz	PASS
2467 MHz	15.090	≥500KHz	PASS
2472 MHz	15.090	≥500KHz	PASS

TX CH 01

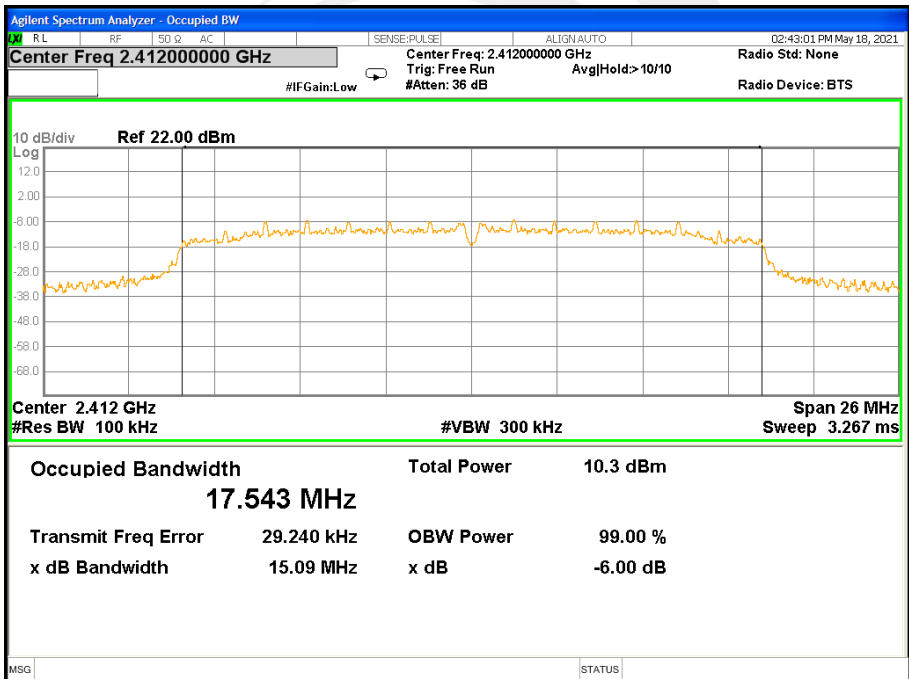




TX CH 06

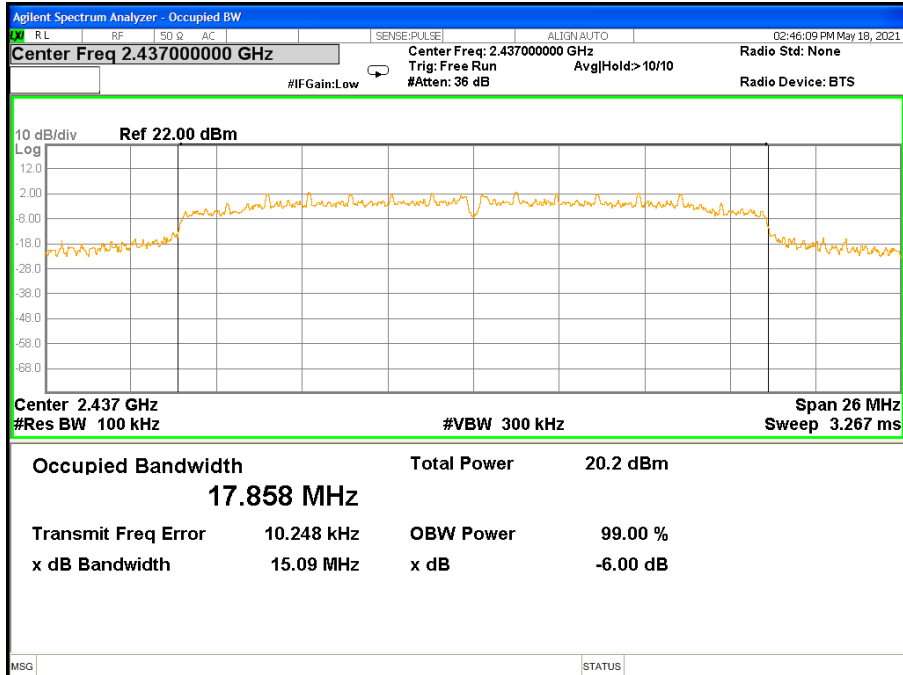


TX CH 11

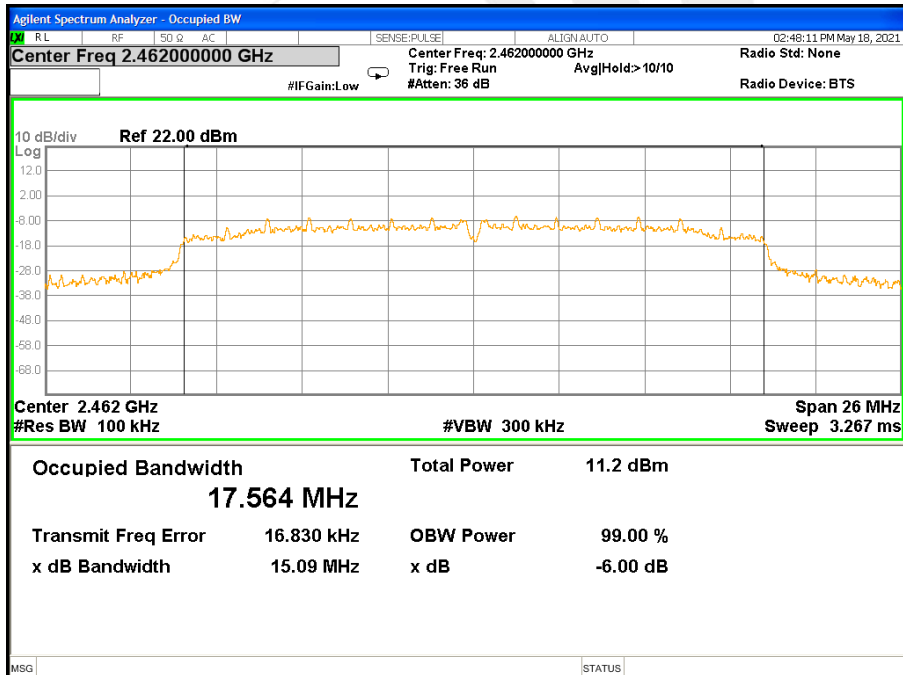




TX CH 12

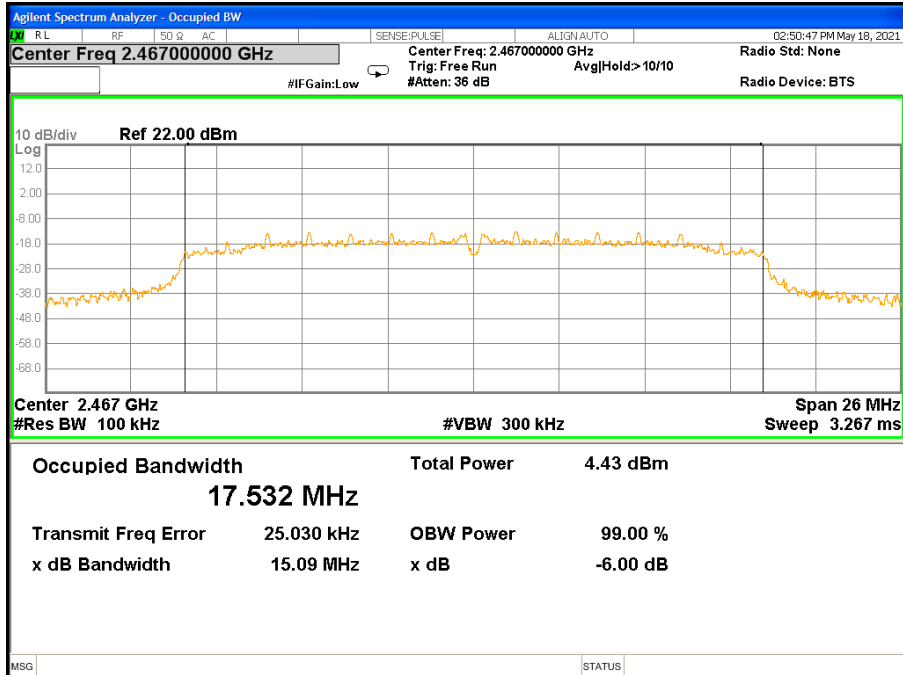

TX CH 13

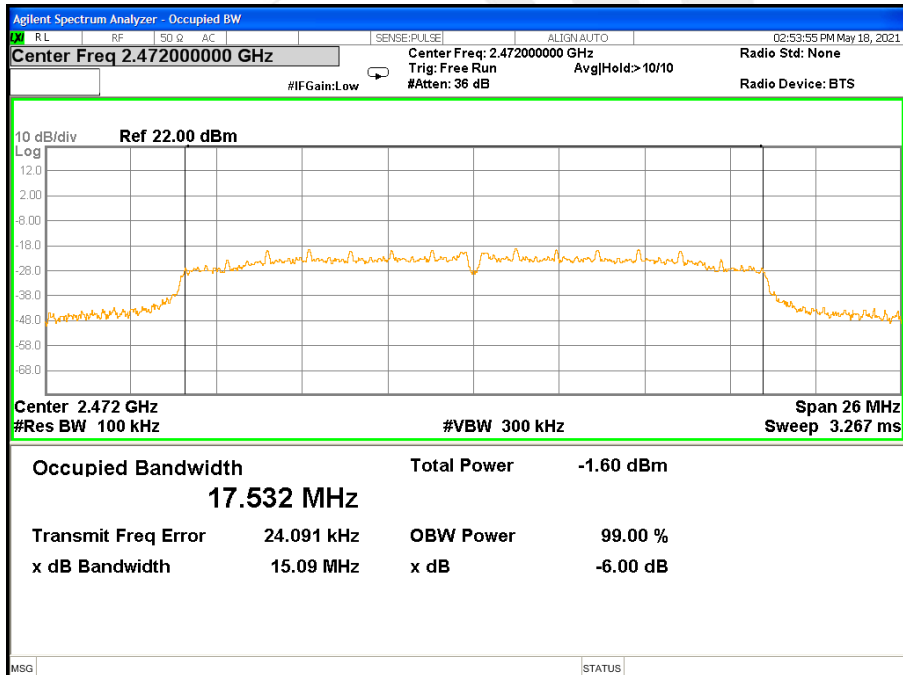



## 7. PEAK OUTPUT POWER TEST

### 7.1 LIMIT

FCC Part15.247,Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Output Power	1 watt or 30dBm	2400-2483.5	PASS

### 7.2 TEST PROCEDURE

One of the following procedures may be used to determine the maximum peak conducted output power of a DTS EUT.

RBW  $\geq$  DTS bandwidth

The following procedure shall be used when an instrument with a resolution bandwidth that is greater than the DTS bandwidth is available to perform the measurement:

- Set the RBW  $\geq$  DTS bandwidth.
- Set VBW  $\geq$  [3  $\times$  RBW].
- Set span  $\geq$  [3  $\times$  RBW].
- Sweep time = auto couple.
- Detector = peak.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use peak marker function to determine the peak amplitude level.

Integrated band power method:

The following procedure can be used when the maximum available RBW of the instrument is less than the

DTS bandwidth:

- Set the RBW = 1 MHz.
- Set the VBW  $\geq$  [3  $\times$  RBW].
- Set the span  $\geq$  [1.5  $\times$  DTS bandwidth].
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the instrument's band/channel power measurement function with the band limits set equal to the DTS bandwidth edges (for some instruments, this may require a manual override to select the peak detector). If the instrument does not have a band power function, then sum the spectrum levels (in linear power units) at intervals equal to the RBW extending across the DTS channel bandwidth.

PKPM1 Peak power meter method:


The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall use a fast-responding diode detector.

### 7.3 DEVIATION FROM STANDARD

No deviation.



## 7.4 TEST SETUP

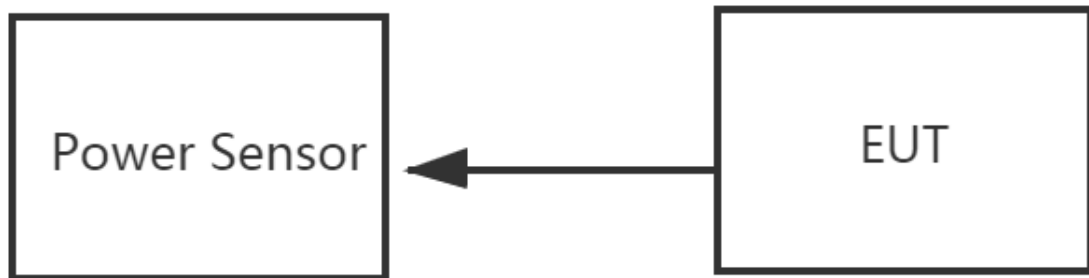

## 7.5 EUT OPERATION CONDITIONS

Please refer to section 3.1.4 of this report.





## 7.6 TEST RESULTS

Temperature:	25°C	Relative Humidity:	60%
Test Voltage:	AC 120V/60Hz		

Mode	Test Channel	Frequency	Peak Conducted Output Power	Average Conducted Output Power	LIMIT
		(MHz)	(dBm)	(dBm)	dBm
TX 802.11b	CH01	2412	15.68	13.24	30
	CH06	2437	15.75	13.44	30
	CH11	2462	15.82	13.48	30
	CH12	2467	15.83	13.58	30
	CH13	2472	15.83	7.87	30
TX 802.11g	CH01	2412	12.05	6.02	30
	CH06	2437	18.87	14.76	30
	CH11	2462	18.85	8.62	30
	CH12	2467	14.00	-1.33	30
	CH13	2472	-0.43	-7.27	30
TX 802.11n20	CH01	2412	11.26	4.67	30
	CH06	2437	18.90	14.40	30
	CH11	2462	11.98	5.78	30
	CH12	2467	6.08	-0.87	30
	CH13	2472	0.37	-6.82	30



## 8. ANTENNA REQUIREMENT

### 8.1 STANDARD REQUIREMENT

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

### 8.2 EUT ANTENNA

The EUT antenna is PCB Antenna. It comply with the standard requirement.





## APPENDIX-PHOTOS OF TEST SETUP

Note: See test photos in setup photo document for the actual connections between Product and support equipment.

\*\*\*\*\*END OF THE REPORT\*\*\*\*\*

