



WCDMA Band IV-Right Head Cheek Low CH1312 2
WCDMA Band IV-Right Head Tilted Low CH1312..... 3
WCDMA Band IV-Left Head Cheek Low CH1312 4
WCDMA Band IV-Left Head Tilted Low CH1312..... 5
WCDMA Band IV-Body Front Low CH1312 6
WCDMA Band IV-Body Rear Low CH1312..... 7
WCDMA Band IV-Body Rear Middle CH1413 9
WCDMA Band IV-Body Rear High CH1513..... 10
WCDMA Band IV-Body Right Low CH1312 11
WCDMA Band IV-Body Left Low CH1312 12
WCDMA Band IV-Body Bottom Low CH1312 13
WCDMA Band IV-Body Rear Low CH1312 repeat..... 14

Test Laboratory: Compliance Certification Services Inc.

Date: 8/12/2015

WCDMA Band IV-Right Head Cheek Low CH1312

DUT: WCDMA Digital Mobile Phone; Type: V.45s; Serial: 867091021972550

Communication System: UID 0, FDD WCDMA (0); Communication System Band: Band IV; Frequency: 1712.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1712.4$ MHz; $\sigma = 1.352$ S/m; $\epsilon_r = 38.911$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Right Section

Measurement Standard: DAS5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3661; ConvF(8.43, 8.43, 8.43); Calibrated: 4/24/2015;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn918; Calibrated: 12/29/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WCDMA Band IV/Cheek Low CH1312/Area Scan (8x11x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.783 W/kg

WCDMA Band IV/Cheek Low CH1312/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 8.730 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.994 W/kg

SAR(1 g) = 0.577 W/kg; SAR(10 g) = 0.322 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.775 W/kg

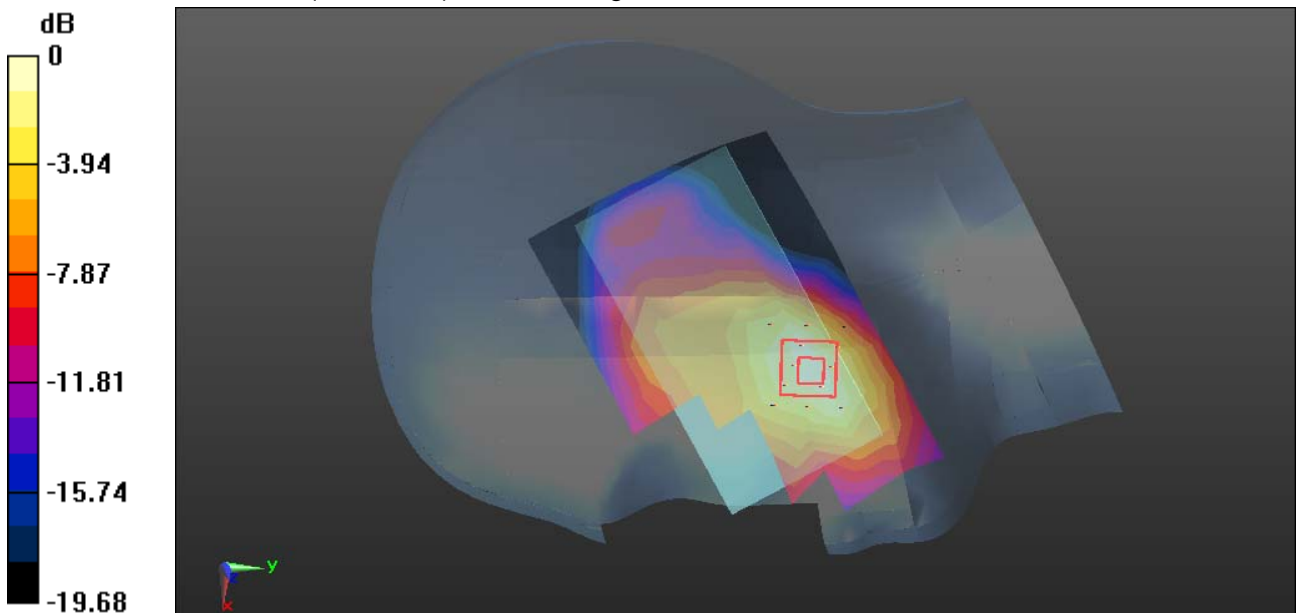

0 dB = 0.775 W/kg = -1.11 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

Date: 8/12/2015

WCDMA Band IV-Right Head Tilted Low CH1312

DUT: WCDMA Digital Mobile Phone; Type: V.45s; Serial: 867091021972550

Communication System: UID 0, FDD WCDMA (0); Communication System Band: Band IV; Frequency: 1712.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1712.4$ MHz; $\sigma = 1.352$ S/m; $\epsilon_r = 38.911$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Right Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3661; ConvF(8.43, 8.43, 8.43); Calibrated: 4/24/2015;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn918; Calibrated: 12/29/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WCDMA Band IV/Tilted Low CH1312/Area Scan (8x12x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.177 W/kg

WCDMA Band IV/Tilted Low CH1312/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 12.47 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.277 W/kg

SAR(1 g) = 0.144 W/kg; SAR(10 g) = 0.074 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.214 W/kg

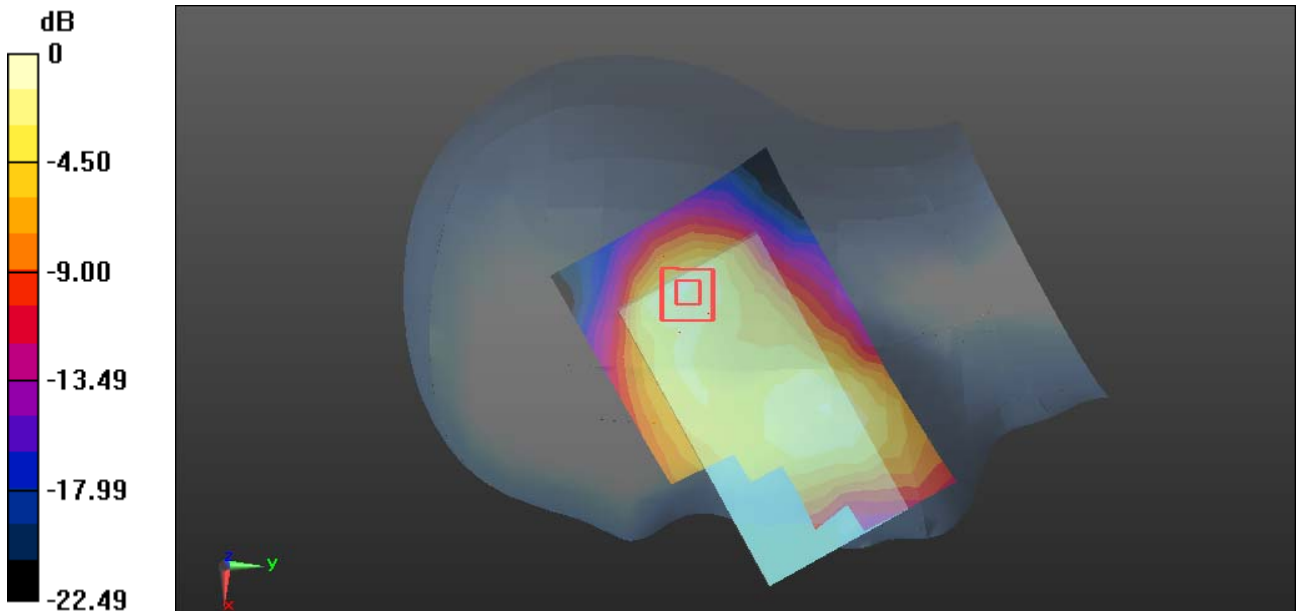

0 dB = 0.214 W/kg = -6.70 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

Date: 8/12/2015

WCDMA Band IV-Left Head Cheek Low CH1312

DUT: WCDMA Digital Mobile Phone; Type: V.45s; Serial: 867091021972550

Communication System: UID 0, FDD WCDMA (0); Communication System Band: Band IV; Frequency: 1712.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1712.4$ MHz; $\sigma = 1.352$ S/m; $\epsilon_r = 38.911$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Left Section

Measurement Standard: DAS5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3661; ConvF(8.43, 8.43, 8.43); Calibrated: 4/24/2015;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn918; Calibrated: 12/29/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WCDMA Band IV/Cheek Low CH1312/Area Scan (8x11x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.515 W/kg

WCDMA Band IV/Cheek Low CH1312/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 9.141 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.681 W/kg

SAR(1 g) = 0.393 W/kg; SAR(10 g) = 0.225 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.521 W/kg

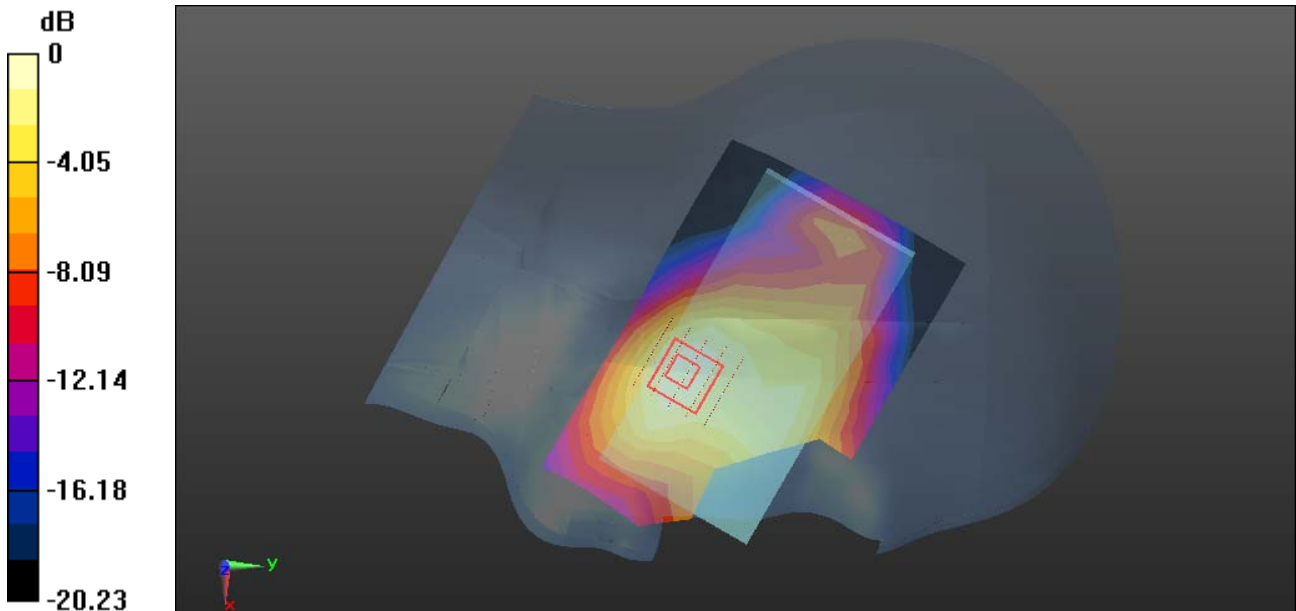

0 dB = 0.521 W/kg = -2.83 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

Date: 8/12/2015

WCDMA Band IV-Left Head Tilted Low CH1312

DUT: WCDMA Digital Mobile Phone; Type: V.45s; Serial: 867091021972550

Communication System: UID 0, FDD WCDMA (0); Communication System Band: Band IV; Frequency: 1712.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1712.4$ MHz; $\sigma = 1.352$ S/m; $\epsilon_r = 38.911$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Left Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3661; ConvF(8.43, 8.43, 8.43); Calibrated: 4/24/2015;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn918; Calibrated: 12/29/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WCDMA Band IV/Tilted Low CH1312/Area Scan (8x12x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.231 W/kg

WCDMA Band IV/Tilted Low CH1312/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 12.14 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.317 W/kg

SAR(1 g) = 0.170 W/kg; SAR(10 g) = 0.087 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.241 W/kg

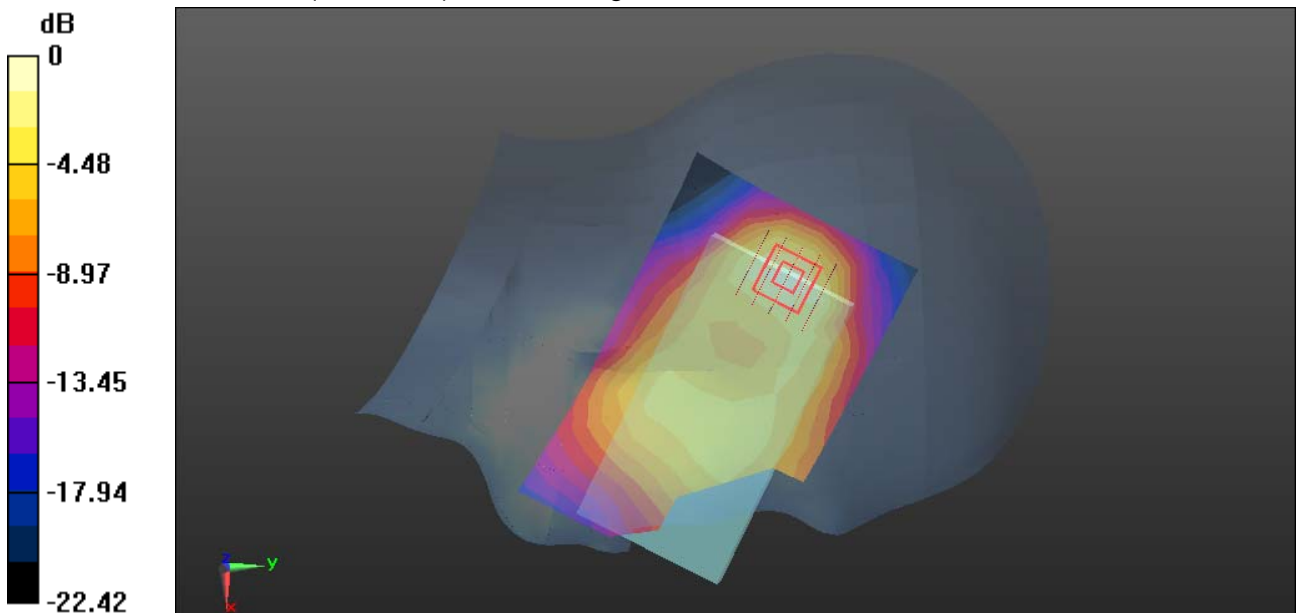

0 dB = 0.241 W/kg = -6.18 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

Date: 8/12/2015

WCDMA Band IV-Body Front Low CH1312

DUT: WCDMA Digital Mobile Phone; Type: V.45s; Serial: 867091021972550

Communication System: UID 0, FDD WCDMA (0); Communication System Band: Band IV; Frequency: 1712.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1712.4$ MHz; $\sigma = 1.494$ S/m; $\epsilon_r = 52.364$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DAS5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3661; ConvF(7.92, 7.92, 7.92); Calibrated: 4/24/2015;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn918; Calibrated: 12/29/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WCDMA Band IV/Front Low CH1312/Area Scan (12x8x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.04 W/kg

WCDMA Band IV/Front Low CH1312/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 10.38 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 1.49 W/kg

SAR(1 g) = 0.711 W/kg; SAR(10 g) = 0.362 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.12 W/kg

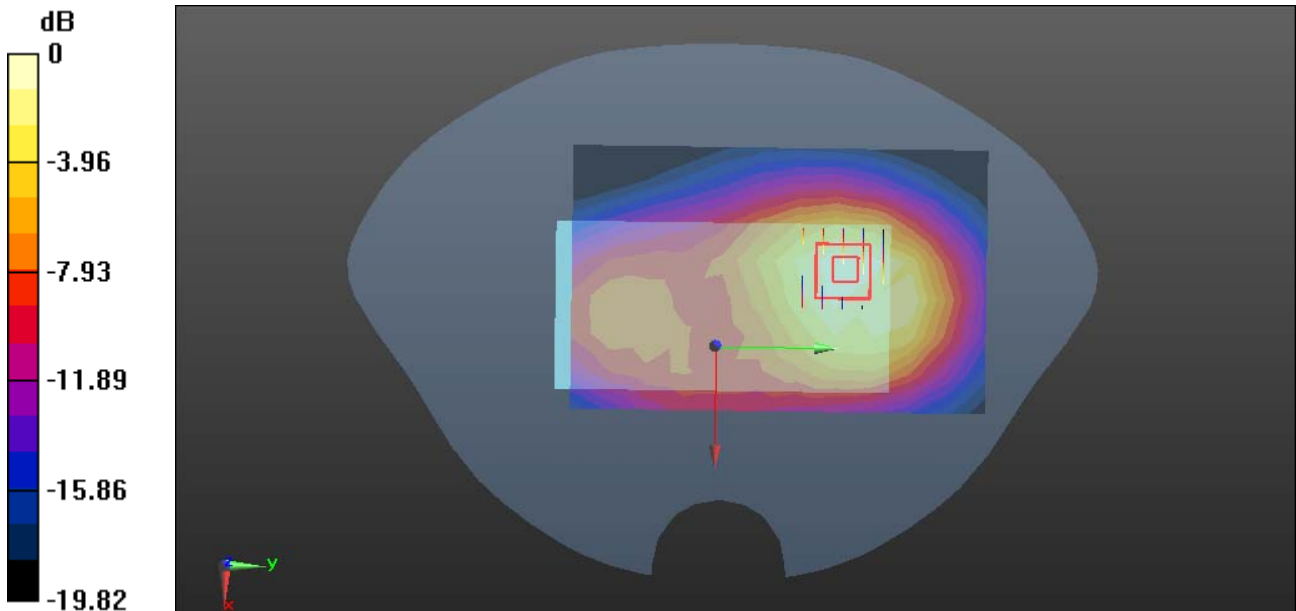

0 dB = 1.12 W/kg = 0.49 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

Date: 8/12/2015

WCDMA Band IV-Body Rear Low CH1312

DUT: WCDMA Digital Mobile Phone; Type: V.45s; Serial: 867091021972550

Communication System: UID 0, FDD WCDMA (0); Communication System Band: Band IV; Frequency: 1712.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1712.4$ MHz; $\sigma = 1.494$ S/m; $\epsilon_r = 52.364$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DAS5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3661; ConvF(7.92, 7.92, 7.92); Calibrated: 4/24/2015;
- Sensor-Surface: 2mm (Mechanical Surface Detection), Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn918; Calibrated: 12/29/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WCDMA Band IV/Rear Low CH1312 /Area Scan (11x8x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.16 W/kg

WCDMA Band IV/Rear Low CH1312 /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.99 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.82 W/kg


SAR(1 g) = 0.963 W/kg; SAR(10 g) = 0.515 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)


Maximum value of SAR (measured) = 1.36 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.43 W/kg

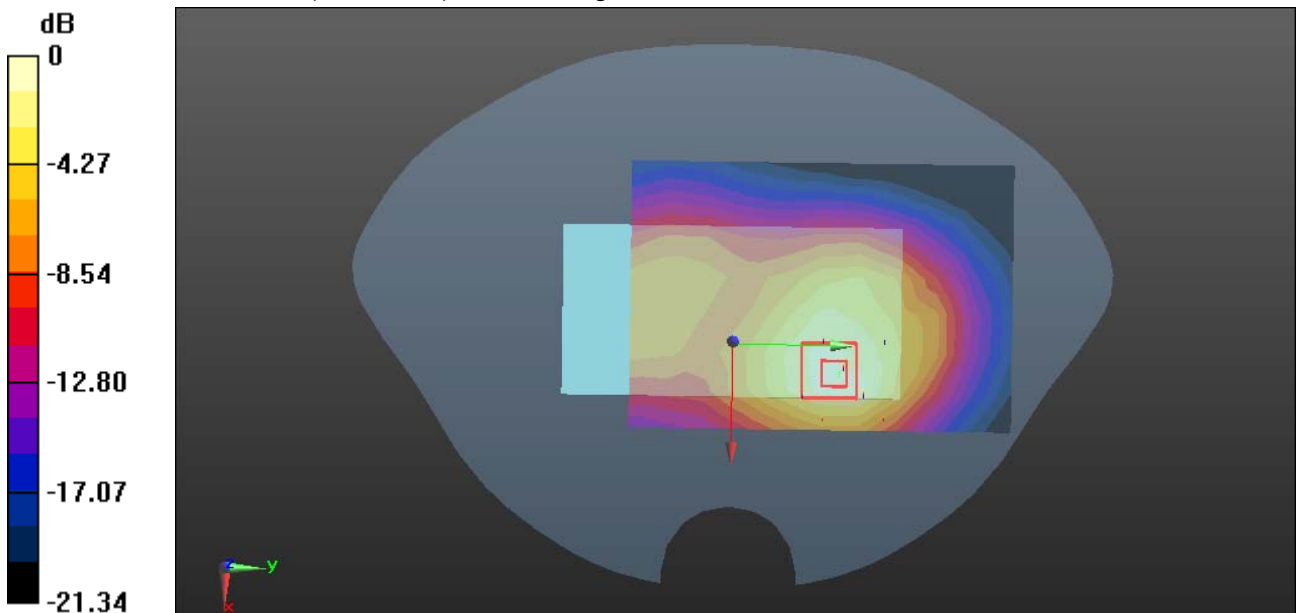

0 dB = 1.36 W/kg = 1.34 dBW/kg

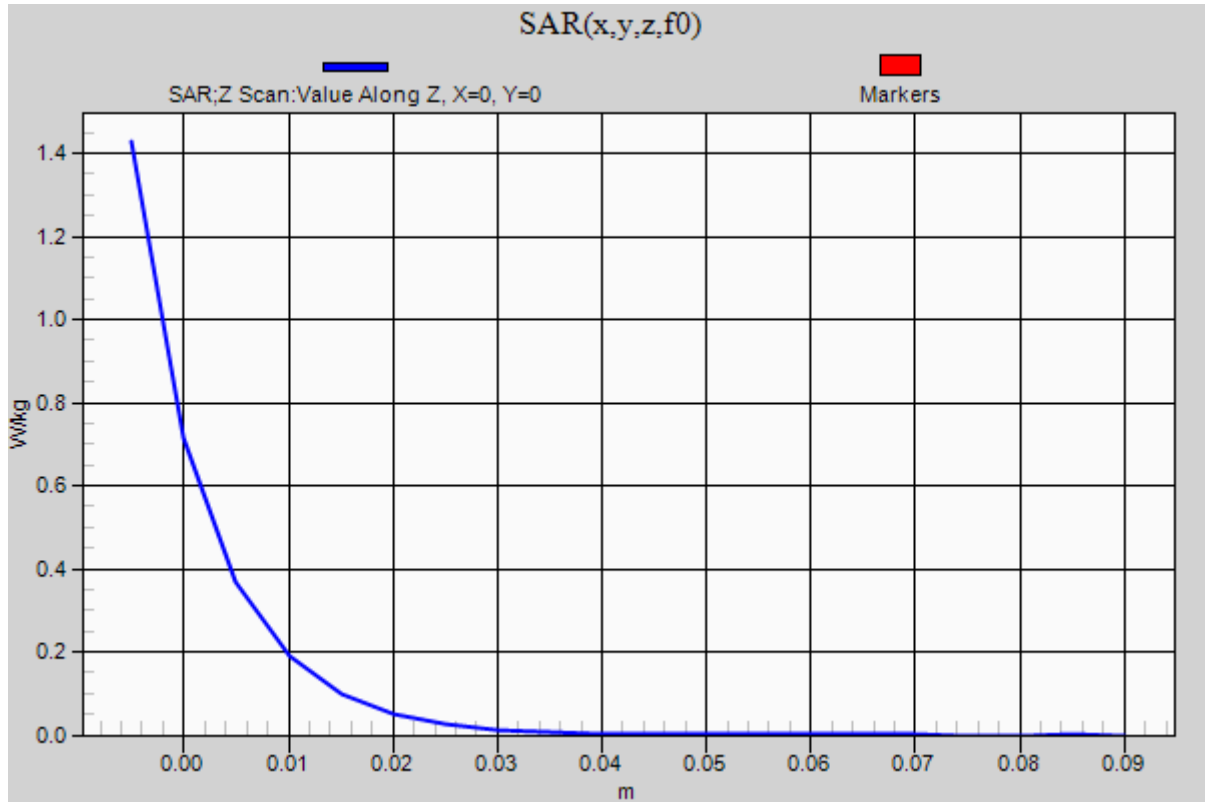

Test Laboratory: Compliance Certification Services Inc.

Date: 8/12/2015

WCDMA Band IV-Body Rear Middle CH1413

DUT: WCDMA Digital Mobile Phone; Type: V.45s; Serial: 867091021972550

Communication System: UID 0, FDD WCDMA (0); Communication System Band: Band IV; Frequency: 1732.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1733$ MHz; $\sigma = 1.514$ S/m; $\epsilon_r = 52.32$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3661; ConvF(7.92, 7.92, 7.92); Calibrated: 4/24/2015;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn918; Calibrated: 12/29/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WCDMA Band IV/Rear Middle CH1413/Area Scan (11x8x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 1.28 W/kg


WCDMA Band IV/Rear Middle CH1413/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.62 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.72 W/kg

SAR(1 g) = 0.910 W/kg; SAR(10 g) = 0.486 W/kg

Maximum value of SAR (measured) = 1.30 W/kg

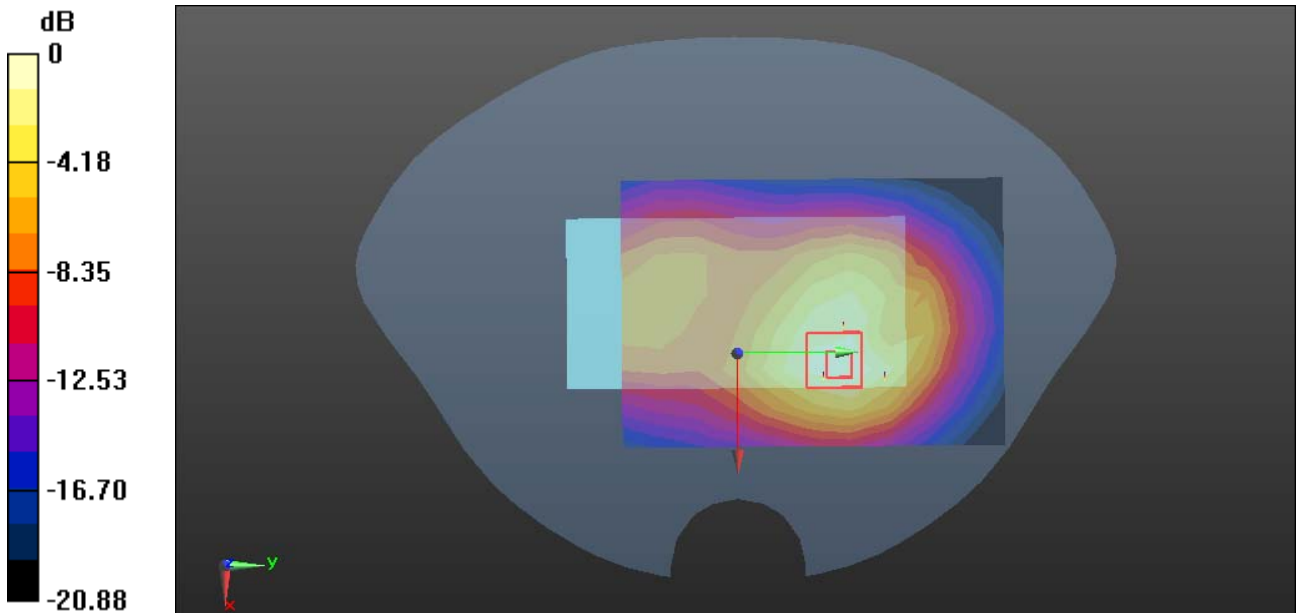

0 dB = 1.30 W/kg = 1.14 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

Date: 8/12/2015

WCDMA Band IV-Body Rear High CH1513

DUT: WCDMA Digital Mobile Phone; Type: V.45s; Serial: 867091021972550

Communication System: UID 0, FDD WCDMA (0); Communication System Band: Band IV; Frequency: 1752.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1753 \text{ MHz}$; $\sigma = 1.535 \text{ S/m}$; $\epsilon_r = 52.258$; $\rho = 1000 \text{ kg/m}^3$

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3661; ConvF(7.92, 7.92, 7.92); Calibrated: 4/24/2015;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn918; Calibrated: 12/29/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WCDMA Band IV/Rear High CH1513/Area Scan (11x8x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 1.26 W/kg


WCDMA Band IV/Rear High CH1513/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.25 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 1.68 W/kg

SAR(1 g) = 0.891 W/kg; SAR(10 g) = 0.476 W/kg

Maximum value of SAR (measured) = 1.27 W/kg

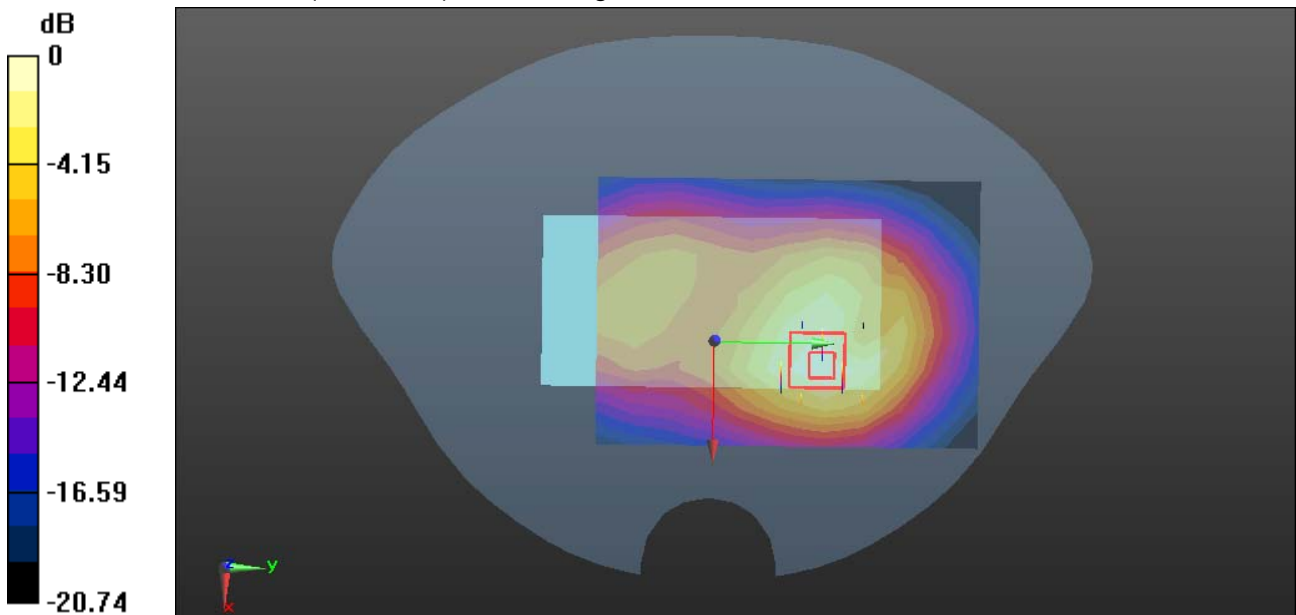

0 dB = 1.27 W/kg = 1.04 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

Date: 8/12/2015

WCDMA Band IV-Body Right Low CH1312

DUT: WCDMA Digital Mobile Phone; Type: V.45s; Serial: 867091021972550

Communication System: UID 0, FDD WCDMA (0); Communication System Band: Band IV; Frequency: 1712.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1712.4$ MHz; $\sigma = 1.494$ S/m; $\epsilon_r = 52.364$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3661; ConvF(7.92, 7.92, 7.92); Calibrated: 4/24/2015;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn918; Calibrated: 12/29/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WCDMA Band IV/Low CH1312/Area Scan (12x7x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.545 W/kg

WCDMA Band IV/Low CH1312/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 15.01 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.753 W/kg

SAR(1 g) = 0.397 W/kg; SAR(10 g) = 0.207 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.575 W/kg

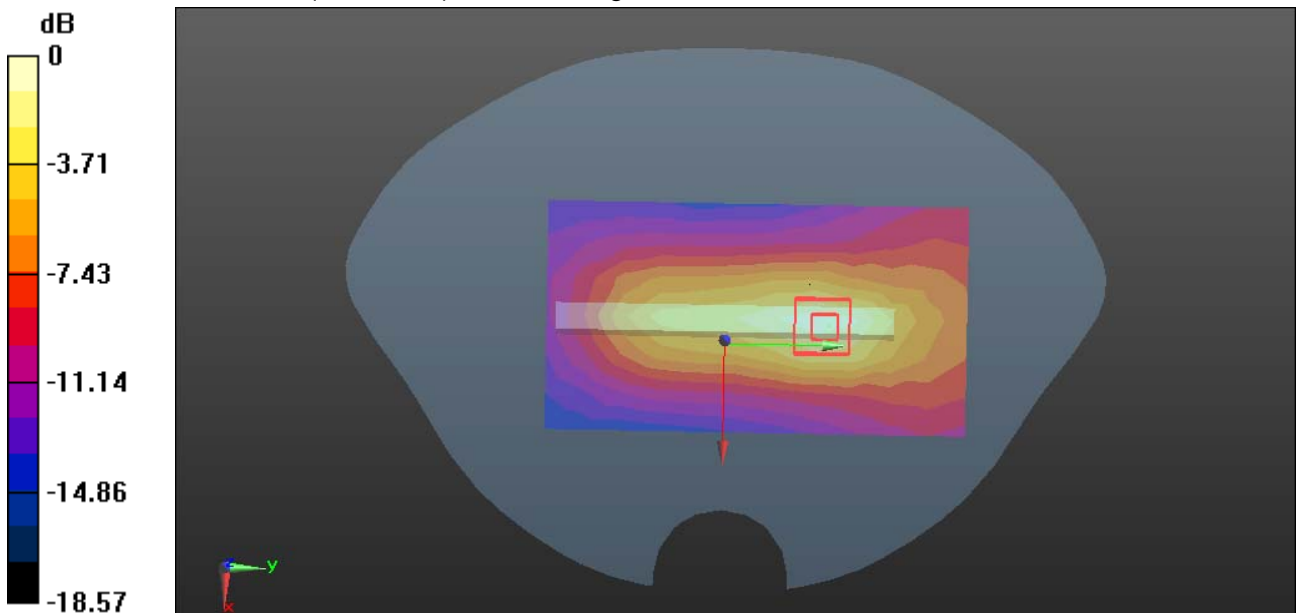

0 dB = 0.575 W/kg = -2.40 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

Date: 8/12/2015

WCDMA Band IV-Body Left Low CH1312

DUT: WCDMA Digital Mobile Phone; Type: V.45s; Serial: 867091021972550

Communication System: UID 0, FDD WCDMA (0); Communication System Band: Band IV; Frequency: 1712.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1712.4$ MHz; $\sigma = 1.494$ S/m; $\epsilon_r = 52.364$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3661; ConvF(7.92, 7.92, 7.92); Calibrated: 4/24/2015;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn918; Calibrated: 12/29/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WCDMA Band IV/Low CH1312/Area Scan (12x7x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.147 W/kg

WCDMA Band IV/Low CH1312/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 10.13 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.191 W/kg

SAR(1 g) = 0.107 W/kg; SAR(10 g) = 0.060 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.149 W/kg

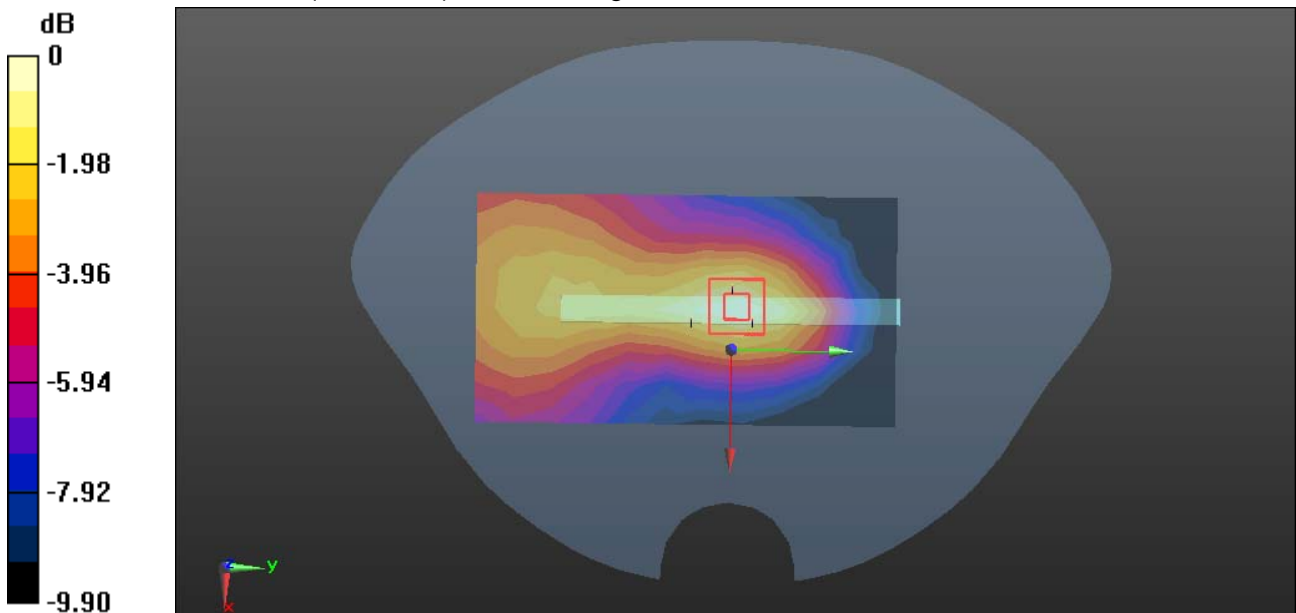

0 dB = 0.149 W/kg = -8.27 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

Date: 8/12/2015

WCDMA Band IV-Body Bottom Low CH1312

DUT: WCDMA Digital Mobile Phone; Type: V.45s; Serial: 867091021972550

Communication System: UID 0, FDD WCDMA (0); Communication System Band: Band IV; Frequency: 1712.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1712.4$ MHz; $\sigma = 1.494$ S/m; $\epsilon_r = 52.364$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DAS5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3661; ConvF(7.92, 7.92, 7.92); Calibrated: 4/24/2015;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn918; Calibrated: 12/29/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WCDMA Band IV/Low CH1312/Area Scan (9x8x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.871 W/kg

WCDMA Band IV/Low CH1312/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 23.54 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 1.18 W/kg

SAR(1 g) = 0.619 W/kg; SAR(10 g) = 0.307 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.914 W/kg

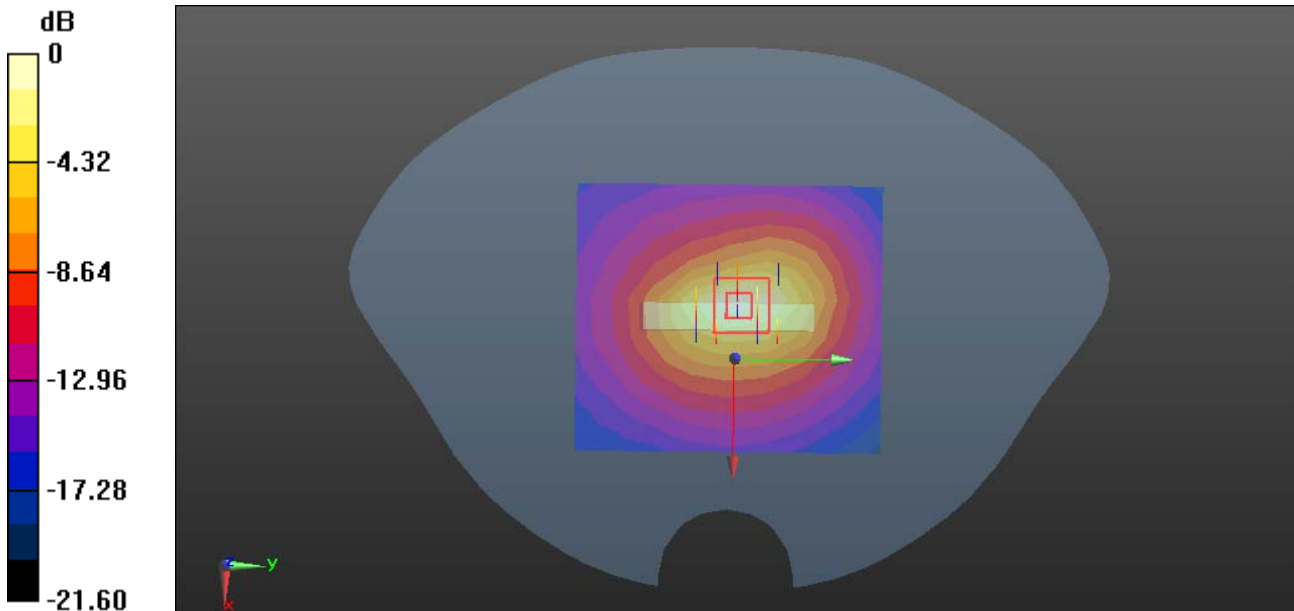

0 dB = 0.914 W/kg = -0.39 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

Date: 8/12/2015

WCDMA Band IV-Body Rear Low CH1312 repeat

DUT: WCDMA Digital Mobile Phone; Type: V.45s; Serial: 867091021972550

Communication System: UID 0, FDD WCDMA (0); Communication System Band: Band IV; Frequency: 1712.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1712.4$ MHz; $\sigma = 1.494$ S/m; $\epsilon_r = 52.364$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DAS5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3661; ConvF(7.92, 7.92, 7.92); Calibrated: 4/24/2015;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn918; Calibrated: 12/29/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WCDMA Band IV/Rear Low CH1312 repeat /Area Scan (11x8x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.16 W/kg

WCDMA Band IV/Rear Low CH1312 repeat /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 13.12 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 1.81 W/kg

SAR(1 g) = 0.956 W/kg; SAR(10 g) = 0.512 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.35 W/kg

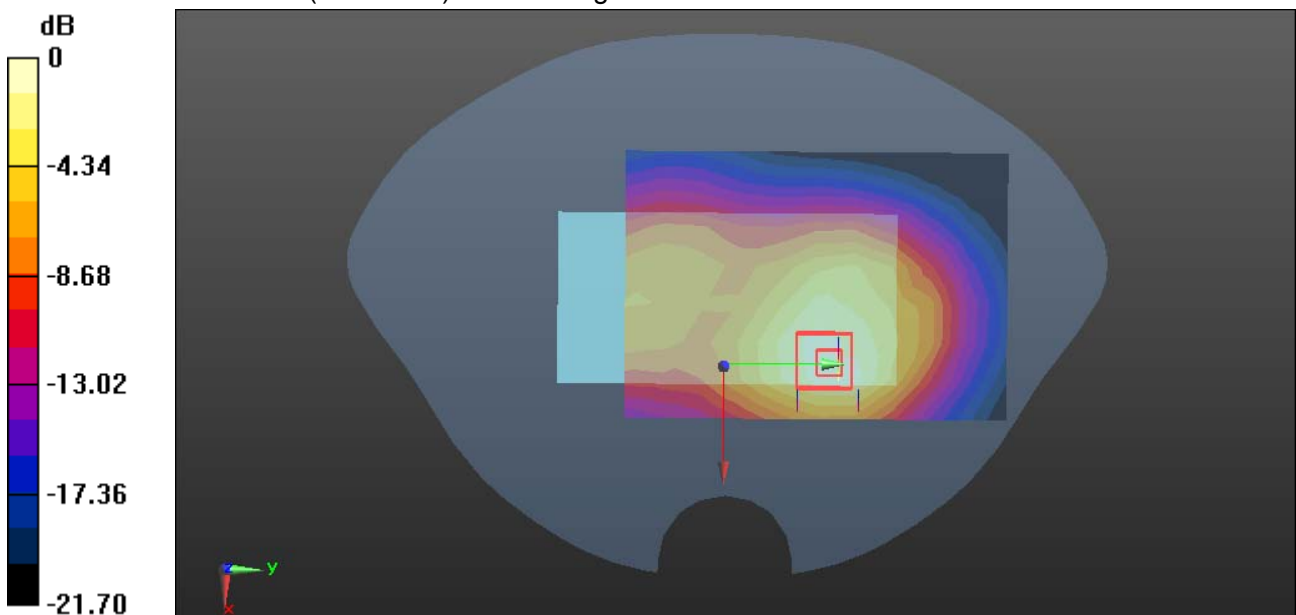

0 dB = 1.35 W/kg = 1.30 dBW/kg