






Report No: TRE1611010502 Page: 132 of 185 Issued: 2016-11-30

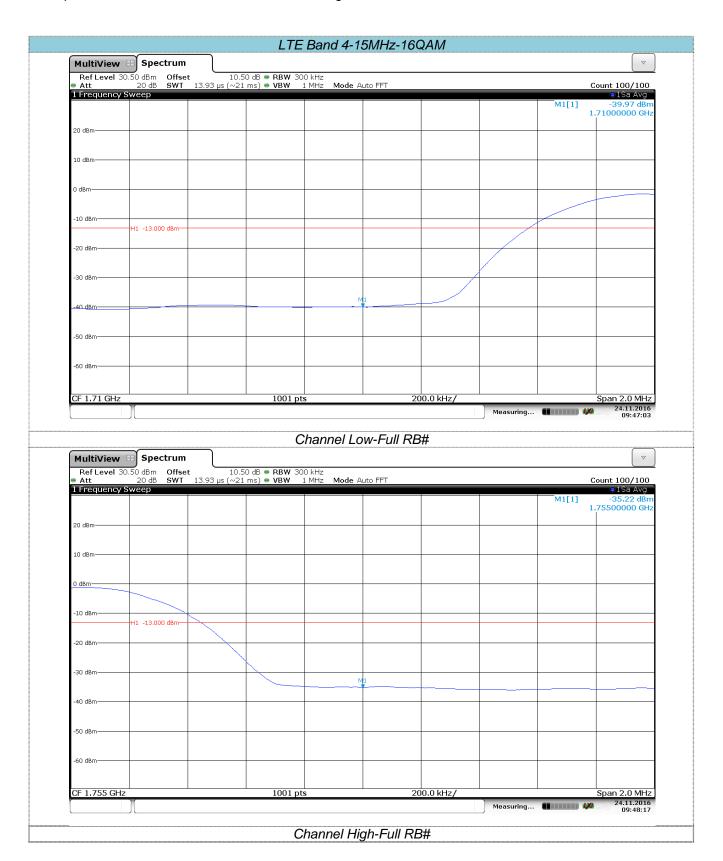

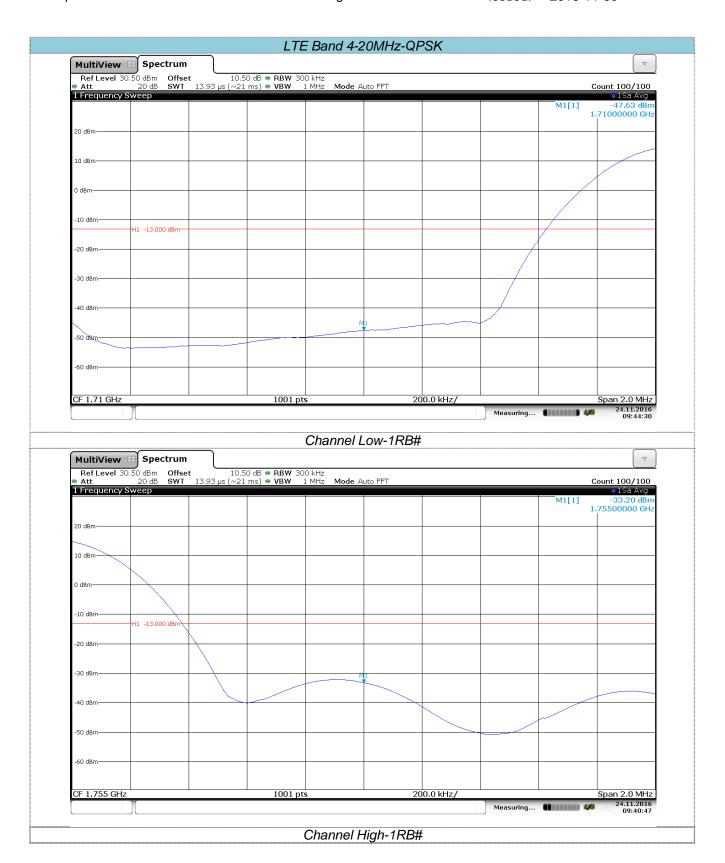


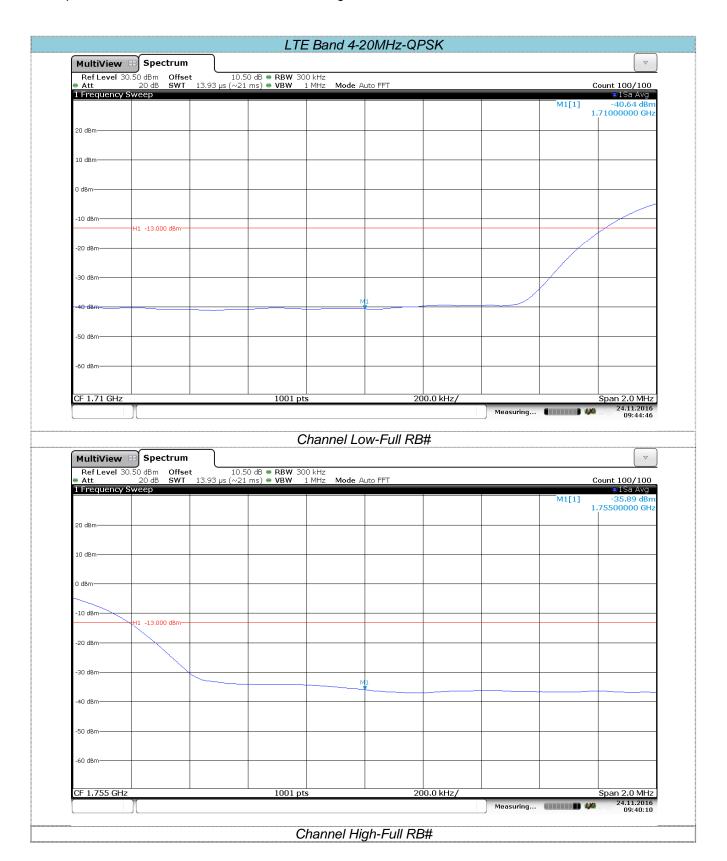

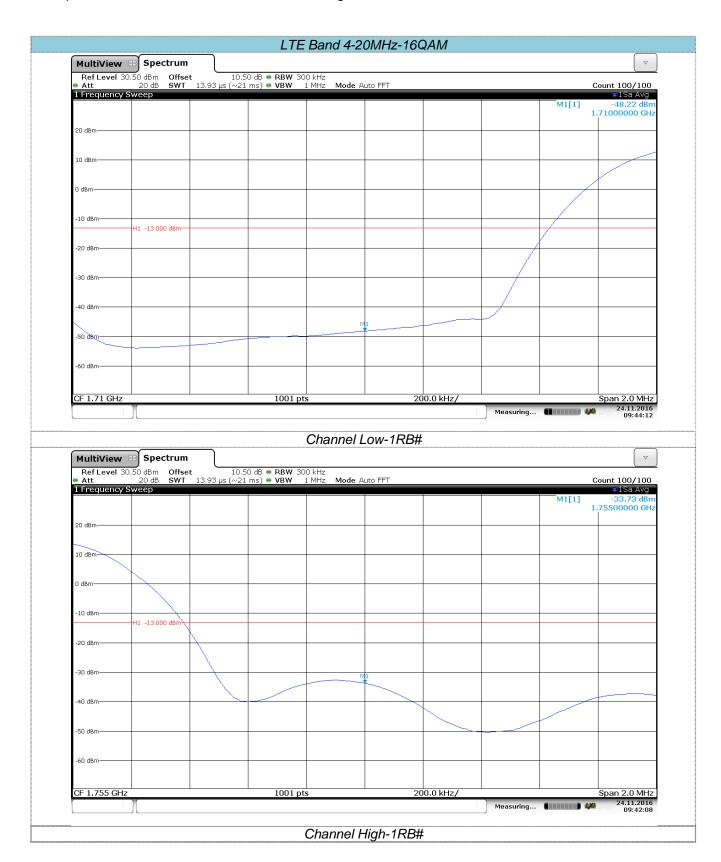


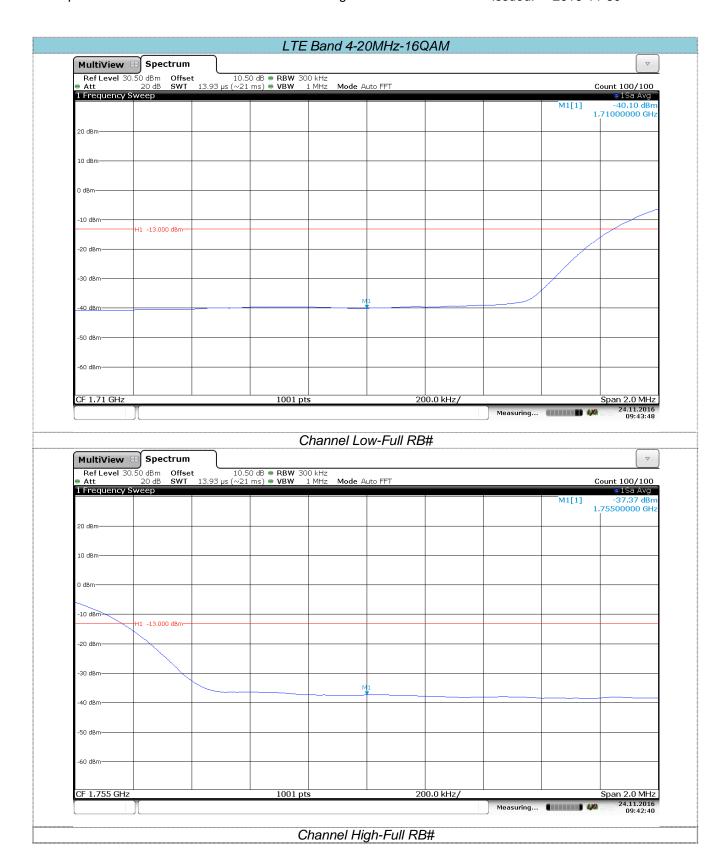


Report No: TRE1611010502 Page: 137 of 185 Issued: 2016-11-30

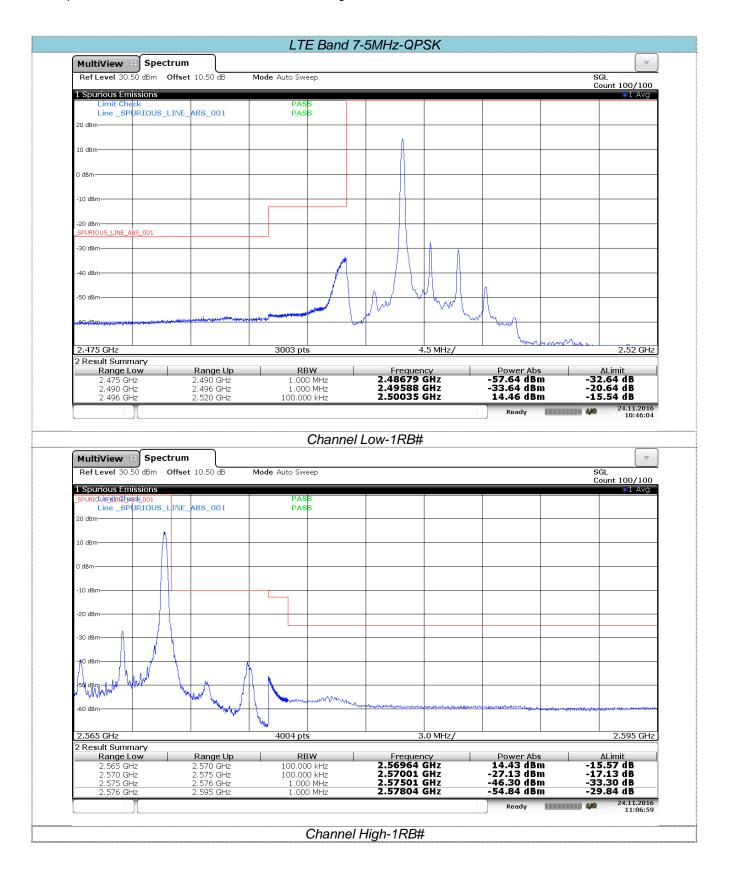


Report No: TRE1611010502 Page: 138 of 185 Issued: 2016-11-30

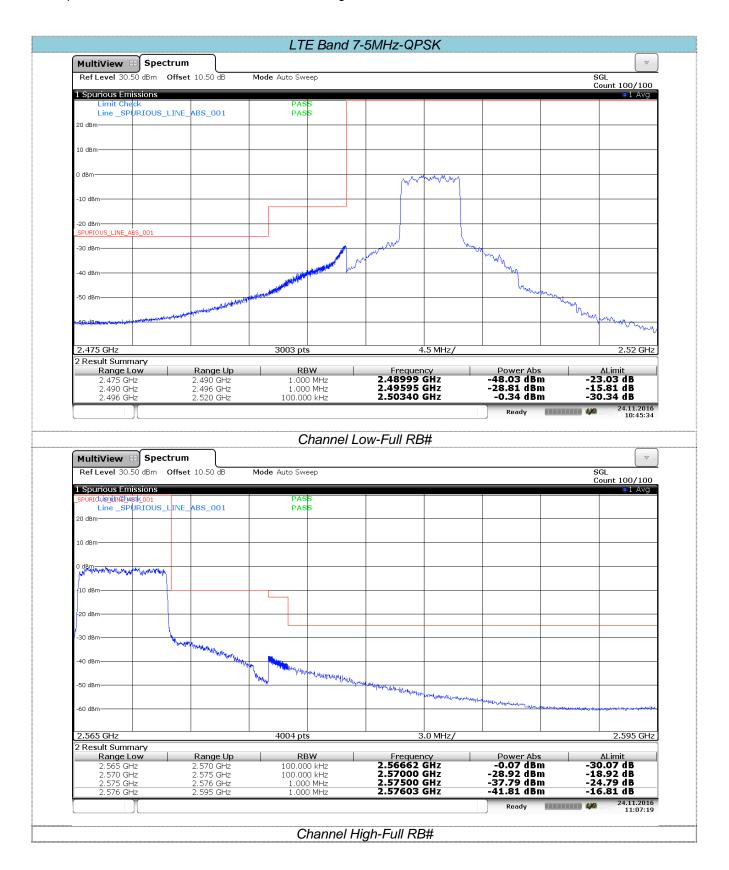


Report No: TRE1611010502 Page: 139 of 185 Issued: 2016-11-30

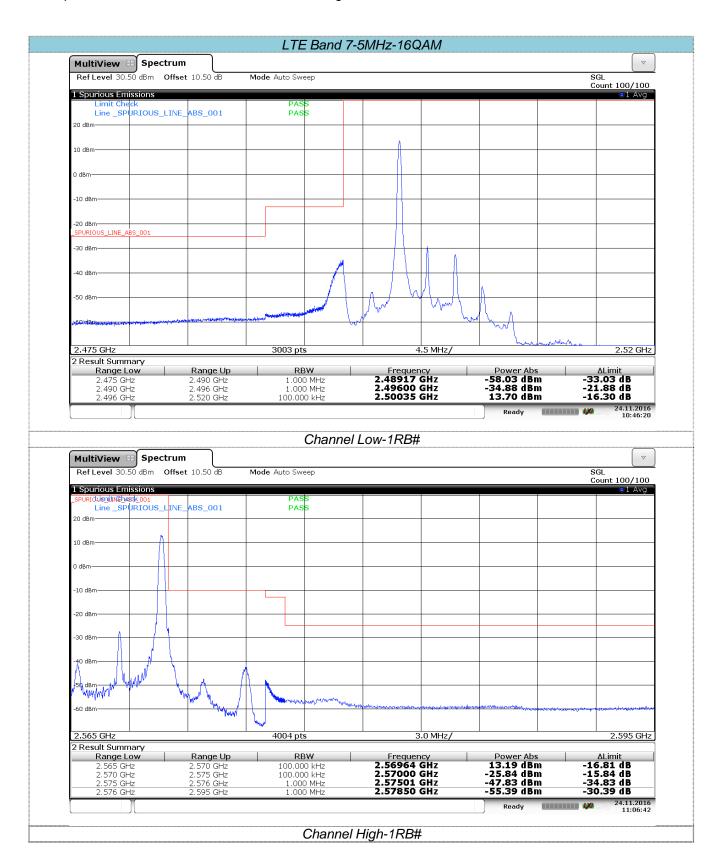


Report No: TRE1611010502 Page: 140 of 185 Issued: 2016-11-30

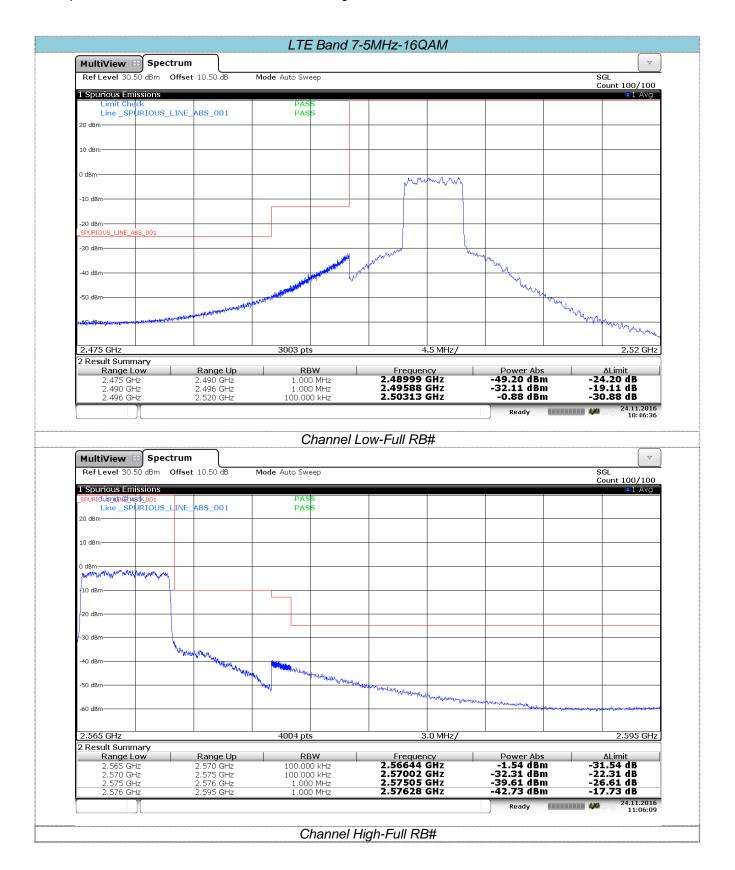


Report No: TRE1611010502 Page: 141 of 185 Issued: 2016-11-30

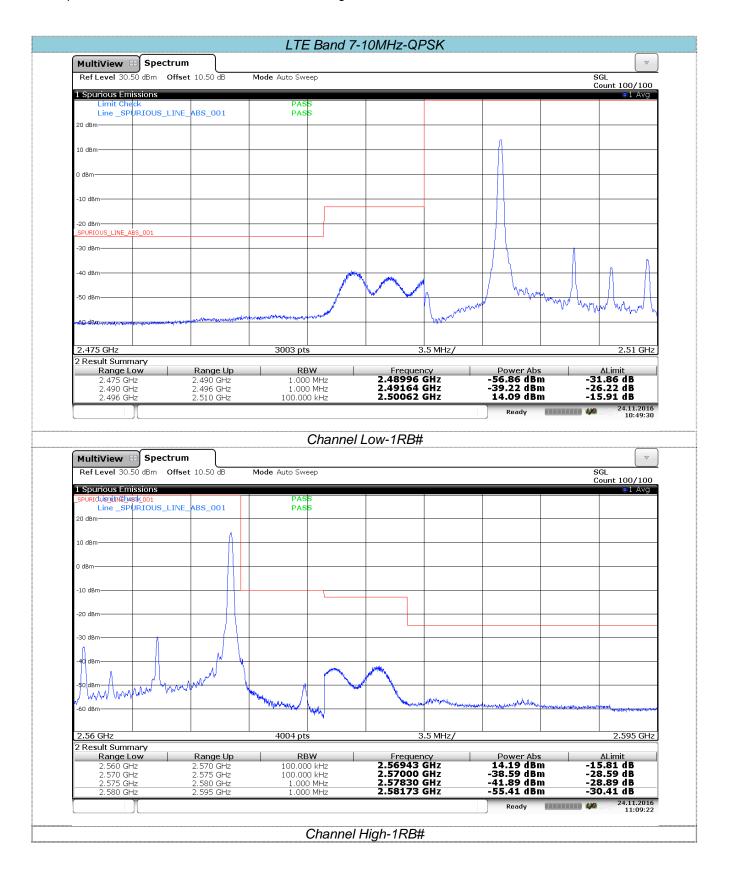


Report No: TRE1611010502 Page: 142 of 185 Issued: 2016-11-30

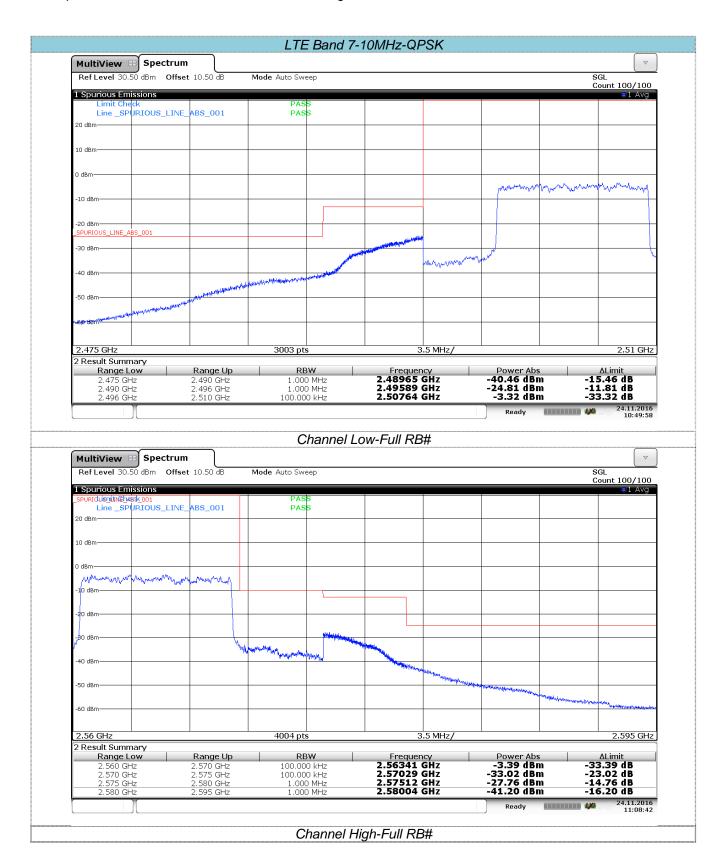


Report No: TRE1611010502 Page: 143 of 185 Issued: 2016-11-30

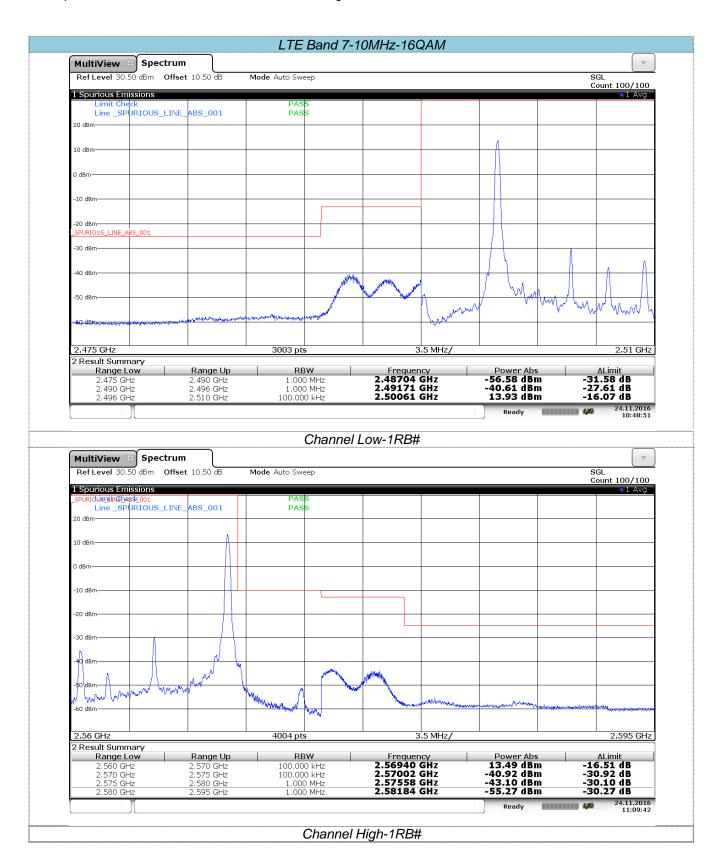

Report No: TRE1611010502 Page: 144 of 185 Issued: 2016-11-30

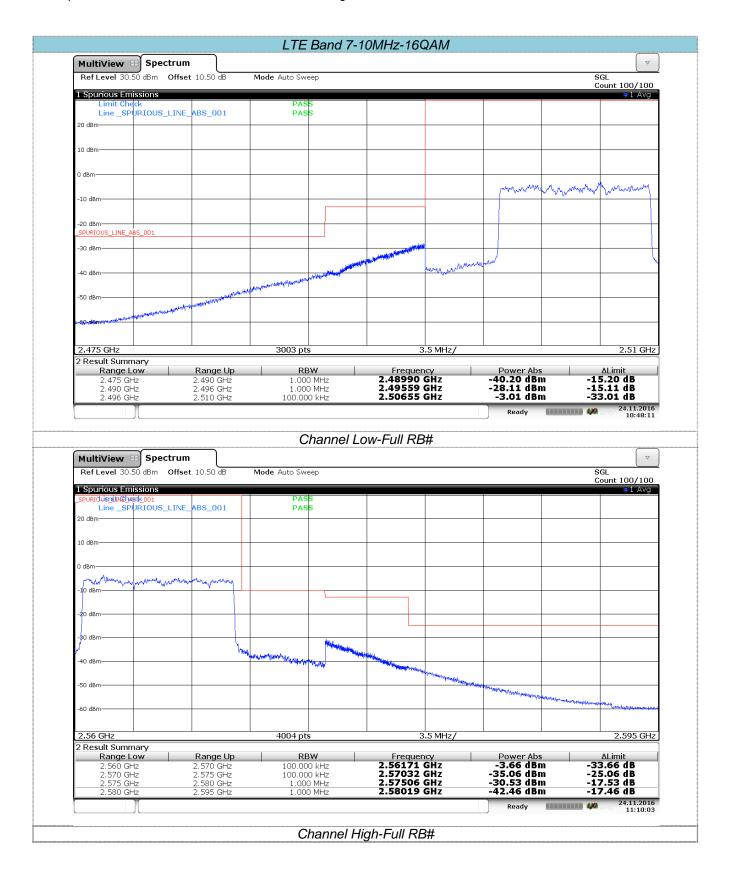


Report No: TRE1611010502 Page: 145 of 185 Issued: 2016-11-30

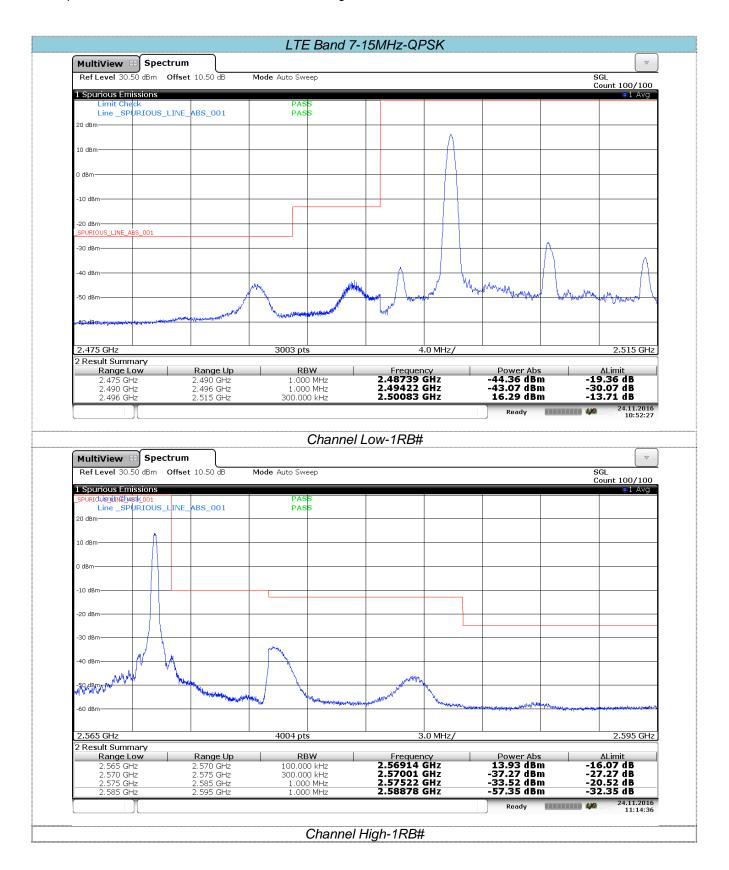


Report No: TRE1611010502 Page: 146 of 185 Issued: 2016-11-30




Report No: TRE1611010502 Page: 147 of 185 Issued: 2016-11-30

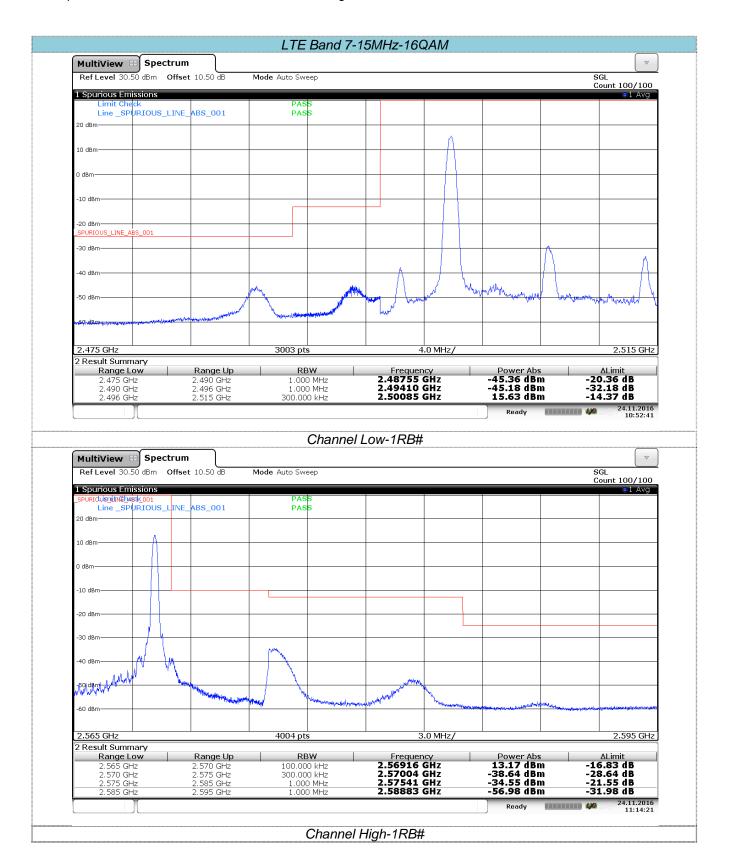


Report No: TRE1611010502 Page: 148 of 185 Issued: 2016-11-30

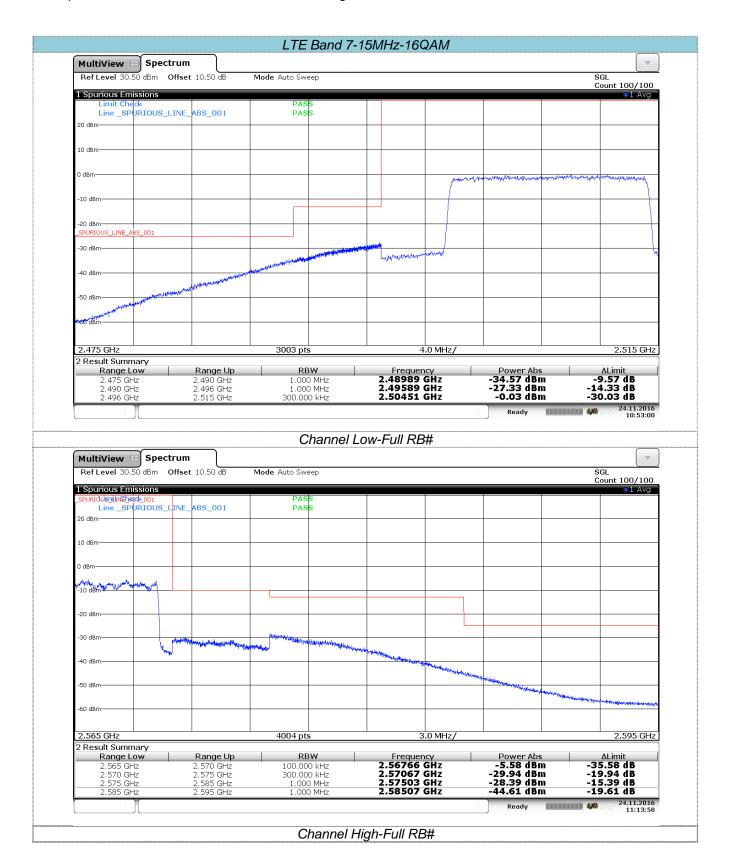


Report No: TRE1611010502 Page: 149 of 185 Issued: 2016-11-30

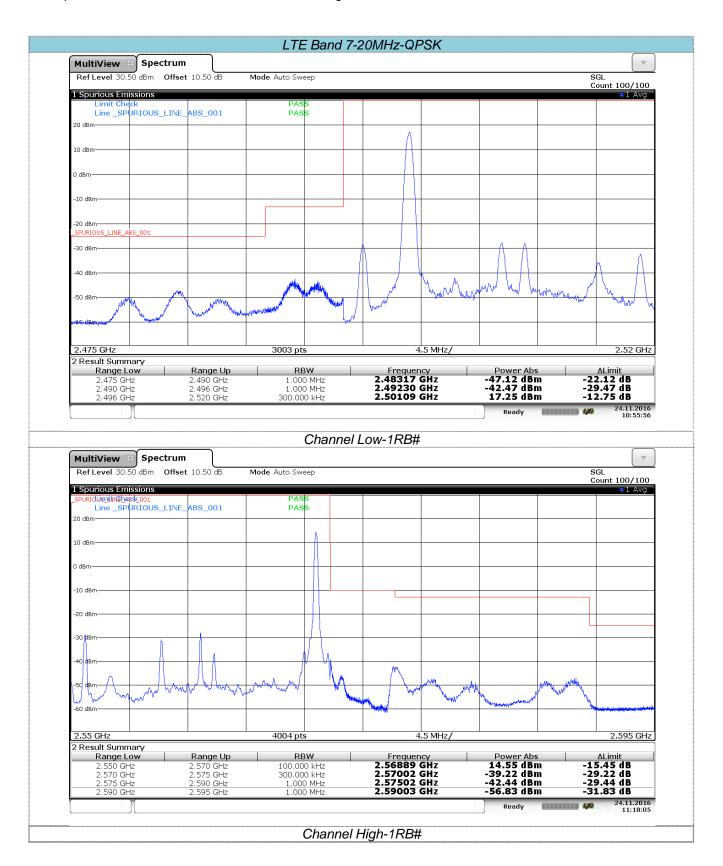



Report No: TRE1611010502 Page: 150 of 185 Issued: 2016-11-30

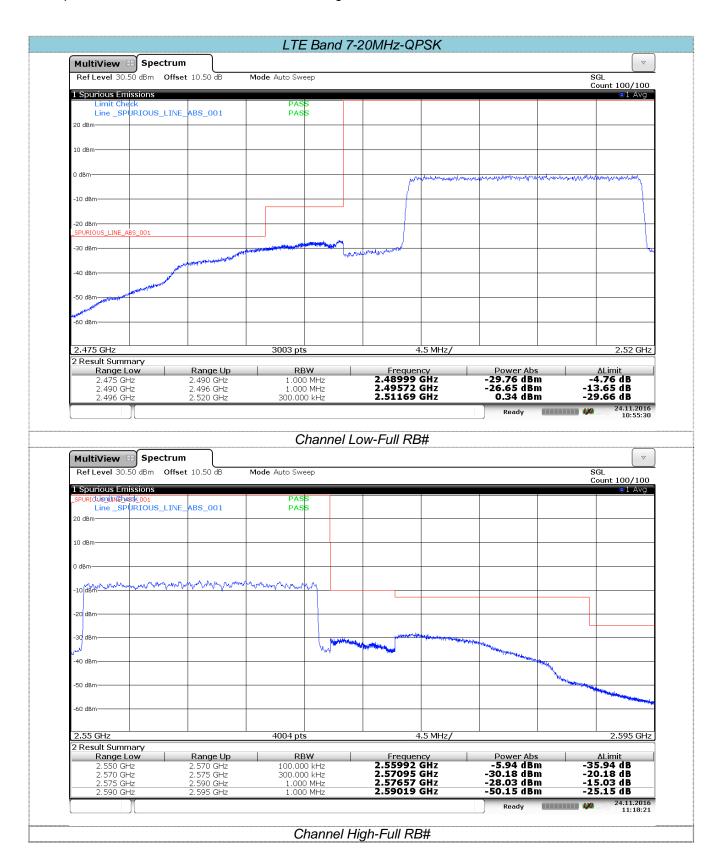


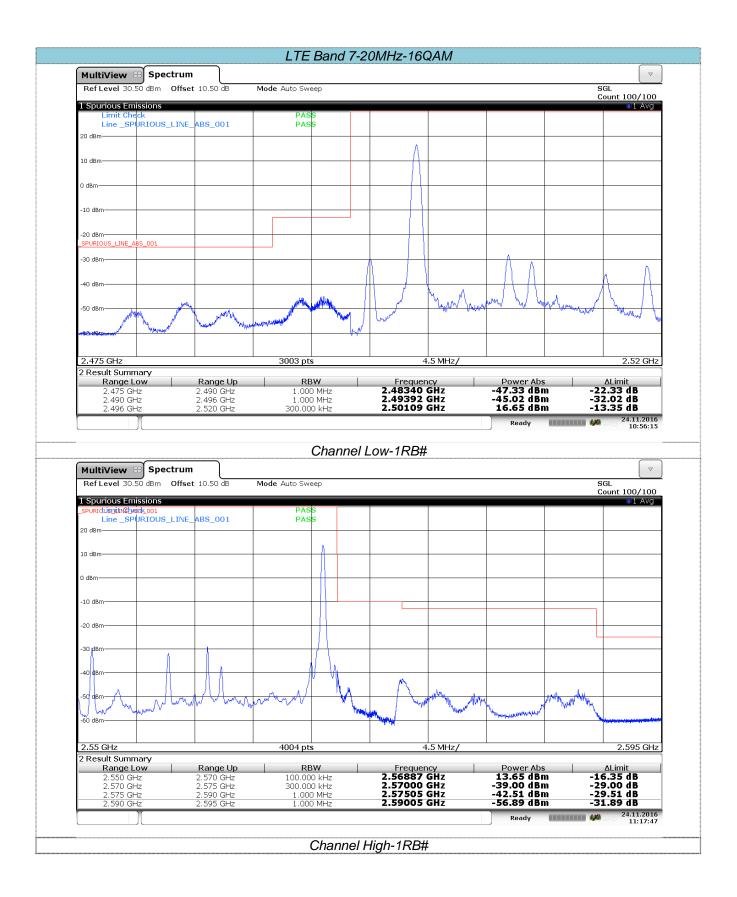


Report No: TRE1611010502 Page: 152 of 185 Issued: 2016-11-30

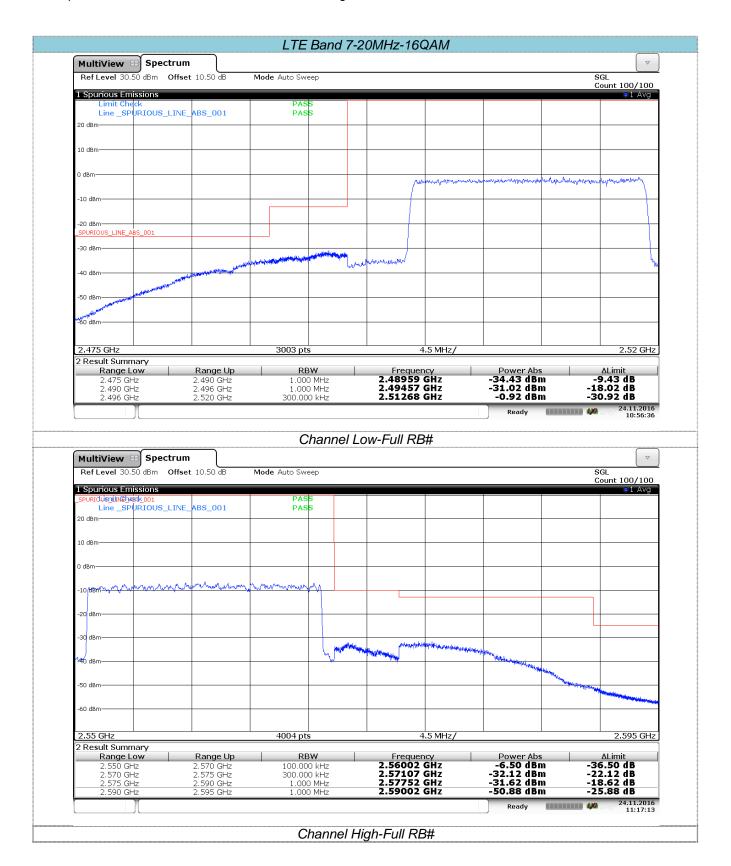


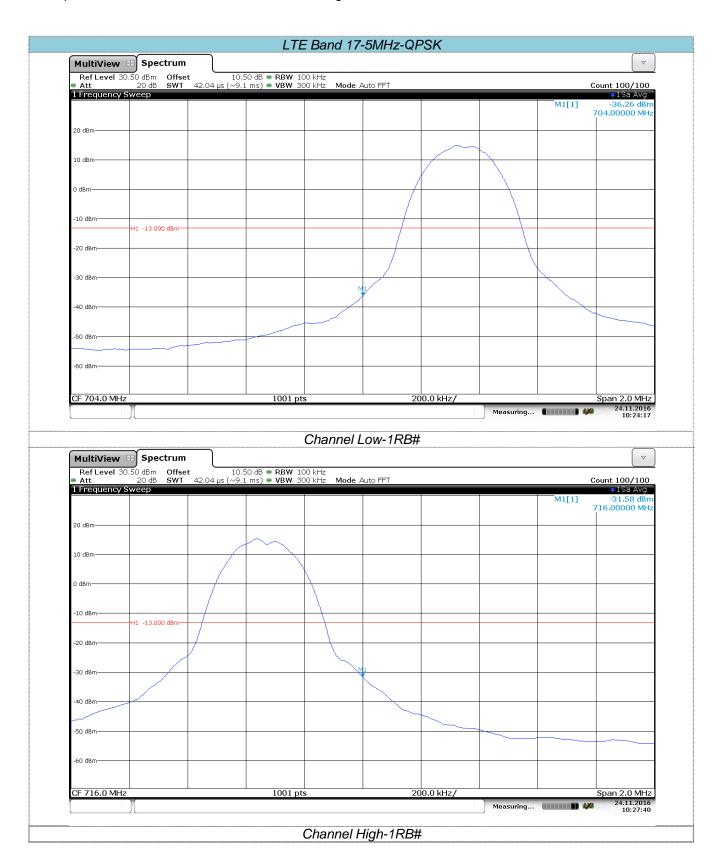


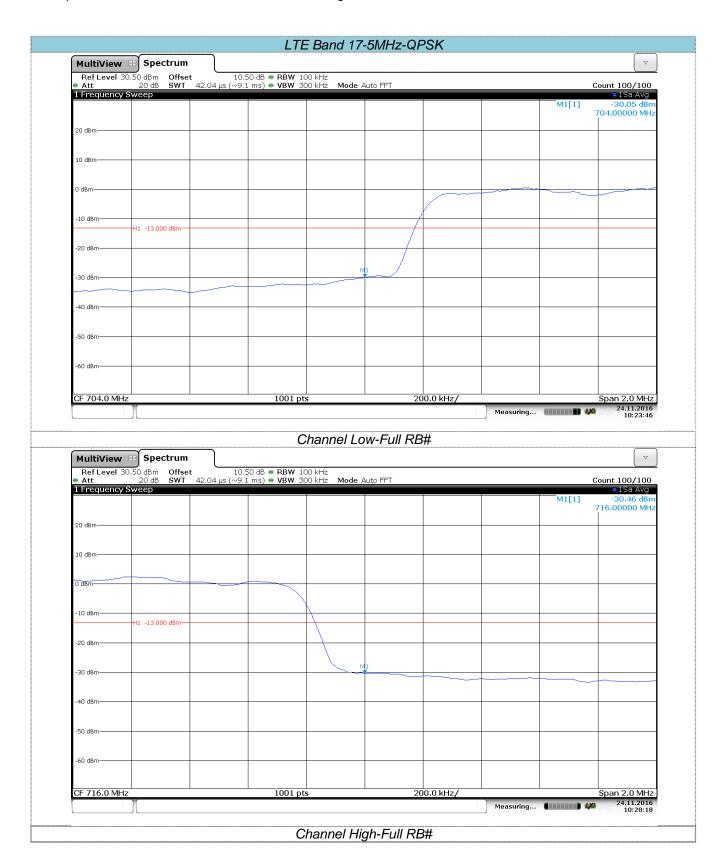


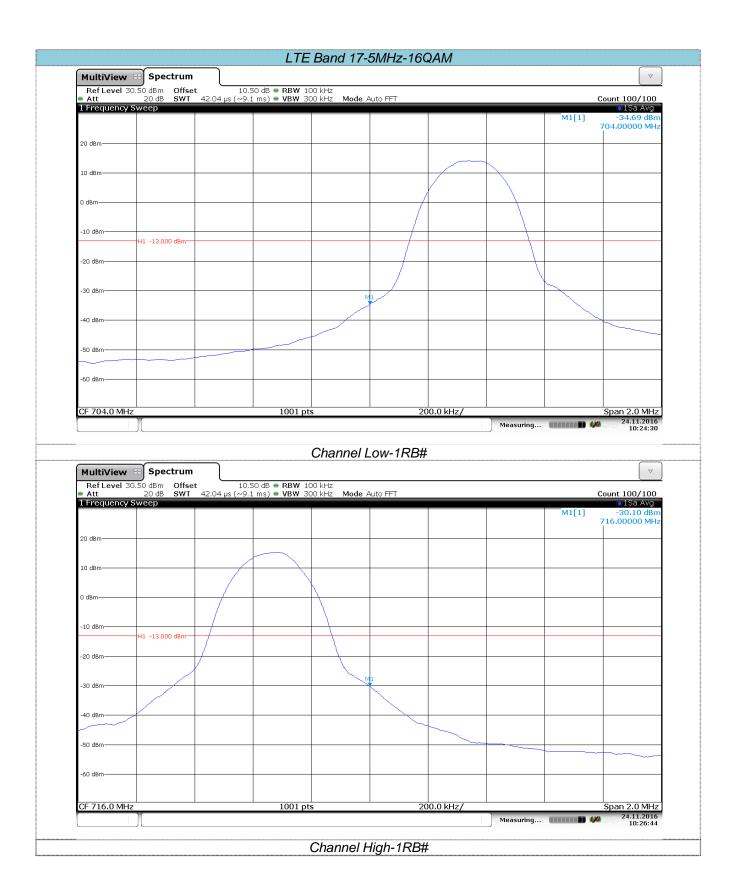



Report No: TRE1611010502 Page: 156 of 185 Issued: 2016-11-30

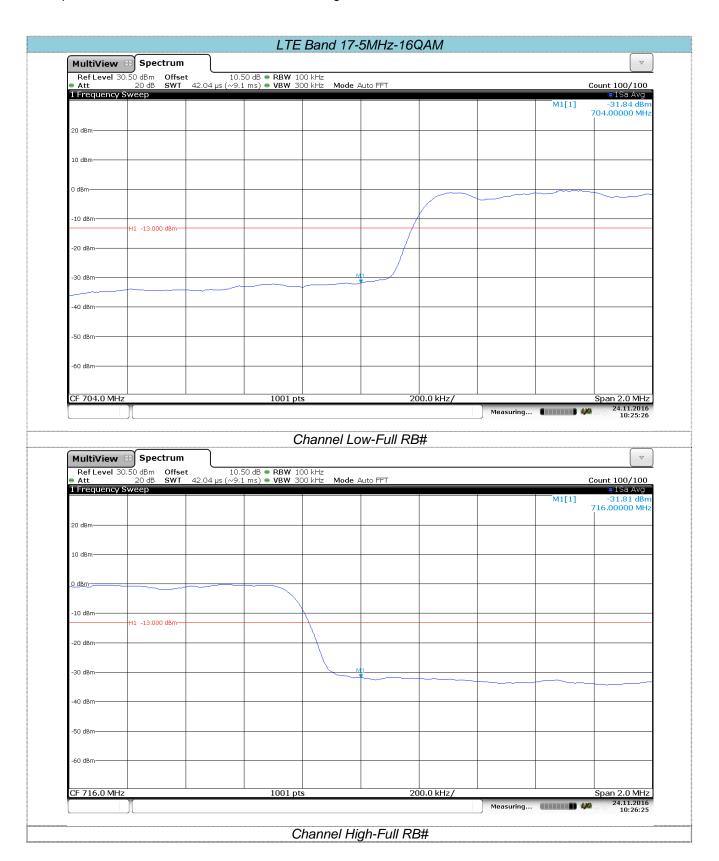

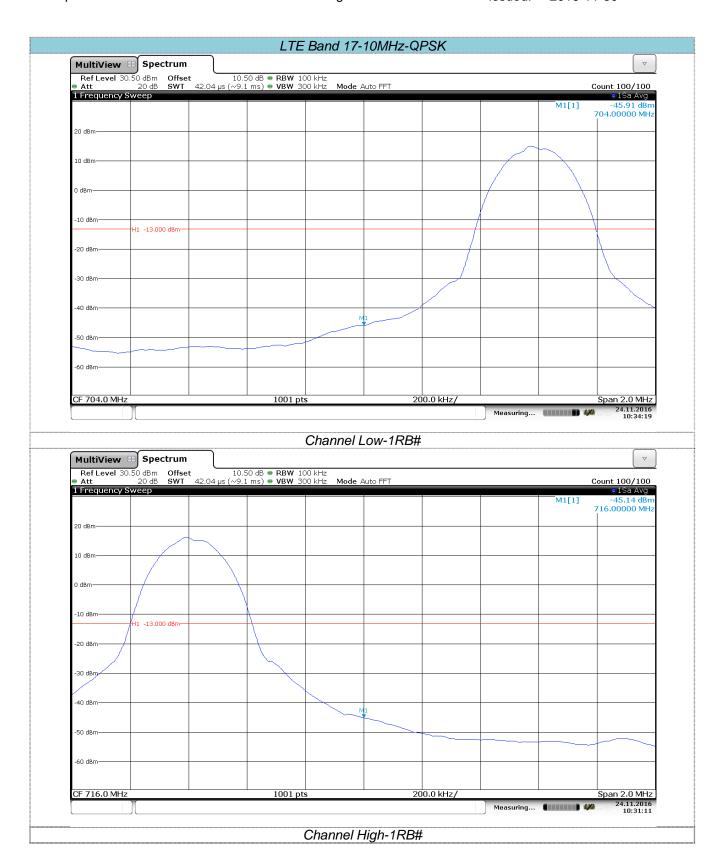

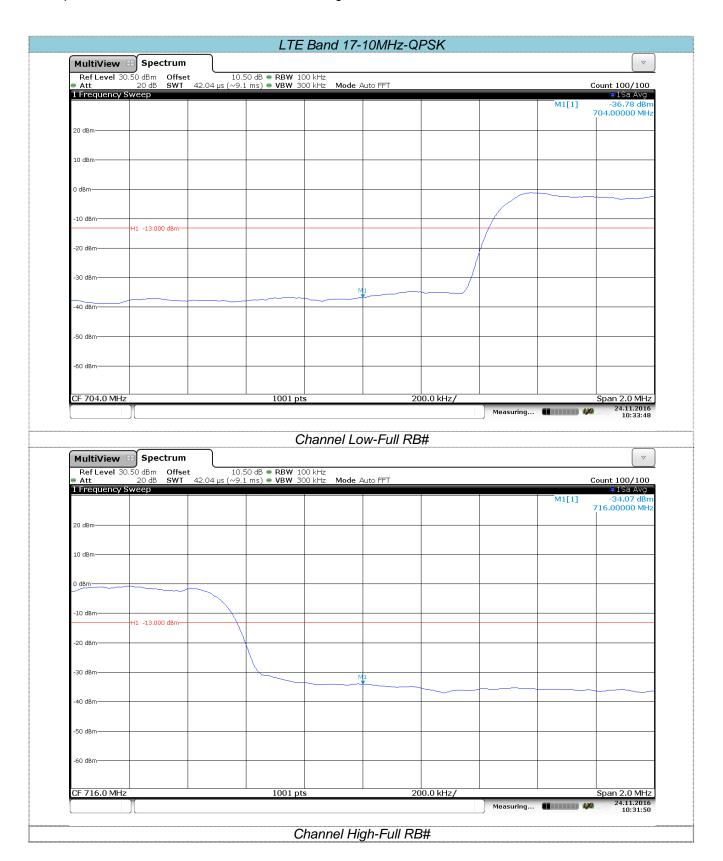

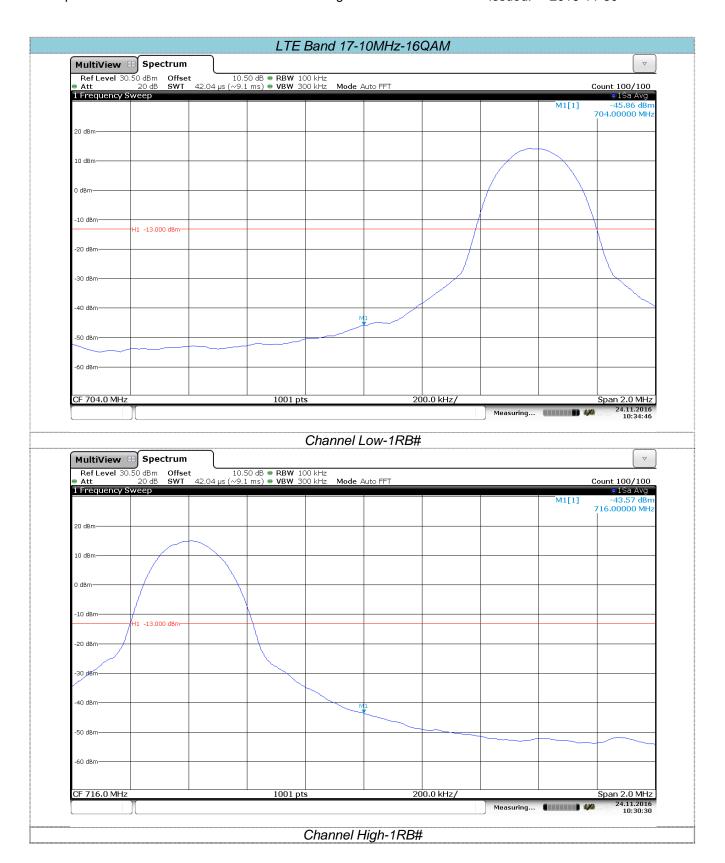

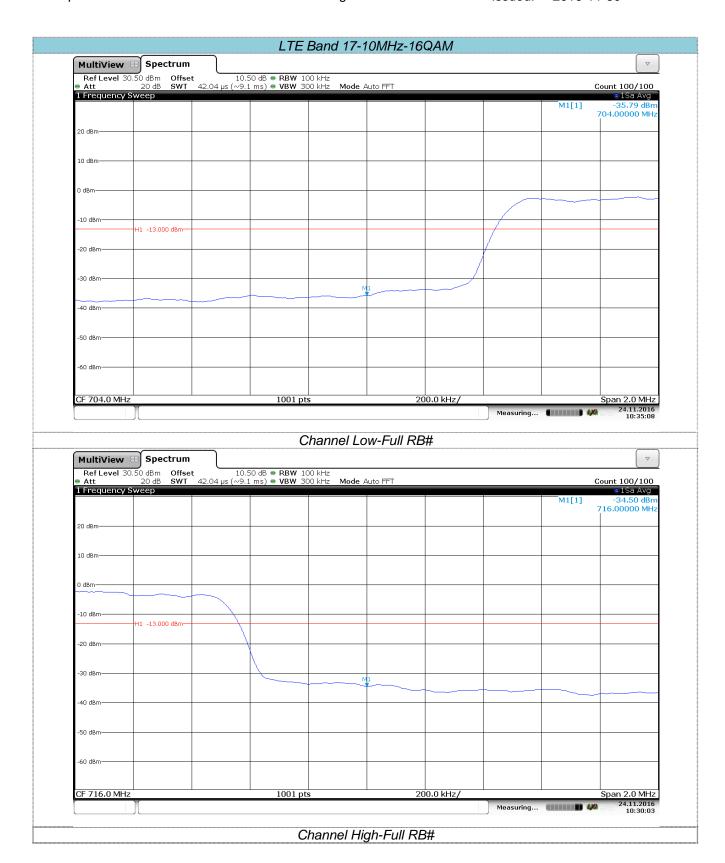


Report No: TRE1611010502 Page: 161 of 185 Issued: 2016-11-30

4.5. Radiated Power Measurement

LIMIT

LTE Band 2: EIRP<2W ,LTE Band 4:EIRP<1W,LTE Band 7:EIRP<2W,LTE Band 17:EPR<3W

TEST CONFIGURATION

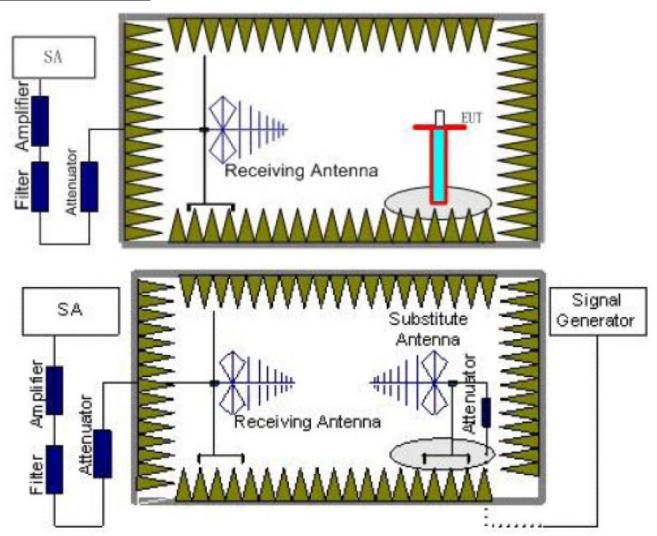

TEST PROCEDURE

- 1. EUT was placed on a 0.8 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna shall be moved from 1m to 4m. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.
- 2. A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
- 3. The EUT is then put into continuously transmitting mode at its maximum power level during the test.Set Test Receiver or Spectrum RBW=1MHz,VBW=3MHz for above 1GHz and RBW=100kHz,VBW=300kHz for 30MHz to 1GHz,, And the maximum value of the receiver should be recorded as (Pr).
- 4. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (PMea) is applied to the input of the

Report No: TRE1611010502 Page: 162 of 185 Issued: 2016-11-30

substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (Pr). The power of signal source (PMea) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

- 5. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (Pcl) ,the Substitution Antenna Gain (Ga) and the Amplifier Gain (PAg) should be recorded after test.
- 6. The measurement results are obtained as described below: Power(EIRP)=PMea- PAg - Pcl + Ga We used SMF100A micowave signal generator which signal level can up to 33dBm,so we not used power Amplifier for substituation test; The measurement results are amend as described below: Power(EIRP)=PMea- Pcl + Ga
- 7. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.

 ERP can be calculated from EIRP by subtracting the gain of the dipole, ERP = EIRP-2.15dBi.

Report No: TRE1611010502 Page: 163 of 185 Issued: 2016-11-30

LTE Band 2-1.4MHz									
Madulatian	Channel	EIRP	(dBm)	Limit (dBm)	Result				
Modulation	Channel	Vertical	Horizontal	LIIIII (UDIII)	Result				
	Low	20.16	18.45						
QPSK	Mid	20.32	18.63		PASS				
	High	20.58	18.44	20					
	Low	21.42	18.21	30					
16QAM	Mid	21.35	18.86		PASS				
	High	20.39	18.67						

	LTE Band 2-3MHz								
Modulation	Channel	EIRP	(dBm)	Limit (dRm)	Result				
Modulation	Channel	Vertical	Horizontal	Limit (dBm)	Result				
	Low	20.43	18.32						
QPSK	Mid	20.25	18.43		PASS				
	High	20.63	18.61	20					
	Low	21.45	18.53	30					
16QAM	Mid	21.77	18.82		PASS				
	High	20.95	18.68						

LTE Band 2-5MHz								
Modulation	Channal	EIRP (dBm)		Limit (dDm)	Dooult			
Modulation	Channel	Vertical	Horizontal	Limit (dBm)	Result			
	Low	20.25	18.33					
QPSK	Mid	20.64	18.52	30	PASS			
	High	20.35	18.36					
	Low	21.13	18.33					
16QAM	Mid	21.52	18.52		PASS			
	High	19.64	18.20					

LTE Band 2-10MHz									
Modulation	Channel	EIRP	(dBm)	Limit (dBm)	Result				
Wodulation	Channel	Vertical	Horizontal	LIIIII (UDIII)	Result				
	Low	20.61	18.47						
QPSK	Mid	20.00	18.05		PASS				
	High	20.32	18.33	20					
	Low	20.45	19.17	30					
16QAM	Mid	20.48	18.37		PASS				
	High	20.55	18.60						

Report No: TRE1611010502 Page: 164 of 185 Issued: 2016-11-30

LTE Band 2-15MHz								
	Ob a made	EIRP	EIRP (dBm)		Danult			
Modulation	Channel	Vertical	Horizontal	Limit (dBm)	Result			
	Low	15.42	19.52					
QPSK	Mid	15.38	19.86		PASS			
	High	15.71	19.47					
	Low	15.02	19.52	30				
16QAM	Mid	15.38	19.86		PASS			
	High	15.61	19.47					

LTE Band 2-20MHz									
		EIRP (dBm)		Ling (JD a)	D 11				
Modulation	Channel	Vertical	Horizontal	Limit (dBm)	Result				
	Low	15.85	19.84						
QPSK	Mid	16.08	19.25		PASS				
	High	15.74	19.78	20					
	Low	15.48	19.76	30					
16QAM	Mid	15.53	19.11		PASS				
	High	15.78	19.79						

LTE Band 4-1.4MHz									
Modulation	Channel	EIRP	(dBm)	Limit (dPm)	Result				
Modulation	Channel	Vertical	Horizontal	Limit (dBm)	Resuit				
	Low	21.52	19.36						
QPSK	Mid	21.43	19.88		PASS				
	High	21.43	19.64	20					
	Low	20.75	19.51	30					
16QAM	Mid	20.79	19.74		PASS				
	High	21.39	19.50						

	LTE Band 4-3MHz								
Modulation	Channel	EIRP	(dBm)	Limit (dDm)	Popult				
Modulation	Channel	Vertical	Horizontal	Limit (dBm)	Result				
	Low	21.43	19.25						
QPSK	Mid	21.68	19.36		PASS				
	High	21.52	19.32						
	Low	20.80	19.12	30					
16QAM	Mid	20.73	19.12		PASS				
	High	21.65	19.35						

Report No: TRE1611010502 Page: 165 of 185 Issued: 2016-11-30

	LTE Band 4-5MHz								
Modulation	Channel	EIRP	EIRP (dBm)		Dooult				
Modulation	Channel	Vertical	Horizontal	Limit (dBm)	Result				
	Low	21.34	19.32						
QPSK	Mid	21.52	19.43		PASS				
	High	21.66	19.49	20					
	Low	20.96	19.24	30					
16QAM	Mid	21.90	19.50		PASS				
	High	21.36	19.42						

LTE Band 4-10MHz									
Madulatian	Channel	EIRP	(dBm)	Limit (dRm)	Result				
Modulation	Channel	Vertical	Horizontal	Limit (dBm)	Result				
	Low	20.47	18.46						
QPSK	Mid	20.52	18.52		PASS				
	High	20.60	18.58	20					
	Low	20.49	18.47	30					
16QAM	Mid	20.51	18.51		PASS				
	High	20.52	18.57						

LTE Band 4-15MHz								
Maril Jacks	Channal	EIRP	(dBm)	Limit (dDm)	Dogult			
Modulation	Channel	Vertical	Horizontal	Limit (dBm)	Result			
	Low	20.22	18.28					
QPSK	Mid	20.43	18.64		PASS			
	High	20.69	18.69	20				
	Low	20.75	18.28	30				
16QAM	Mid	20.43	18.64		PASS			
	High	20.83	18.69					

LTE Band 4-20MHz								
Modulation	Channel	EIRP	(dBm)	Limit (dDm)	Dogult			
iviodulation	Channel	Vertical	Horizontal	Limit (dBm)	Result			
	Low	20.22	18.16					
QPSK	Mid	20.45	18.32		PASS			
	High	20.64	18.49	20				
	Low	20.71	18.26	30				
16QAM	Mid	21.18	18.51		PASS			
	High	19.95	18.34					

Report No: TRE1611010502 Page: 166 of 185 Issued: 2016-11-30

LTE Band 7-5MHz									
Madulatian	Channel	EIRP (dBm)		Limit (dPm)	Result				
Modulation	Channel	Vertical	Horizontal	Limit (dBm)	Result				
	Low	20.64	18.42						
QPSK	Mid	20.58	18.25		PASS				
	High	20.48	18.36						
	Low	20.73	18.35	33.0					
16QAM	Mid	20.51	18.32		PASS				
	High	20.80	18.29						

LTE Band 7-10MHz								
Madulation	Channel	EIRP (dBm)		Limit (dRm)	Result			
Modulation	Chamer	Vertical	Horizontal	Limit (dBm)	Nesuit			
	Low	20.25	18.45					
QPSK	Mid	19.76	17.66	00.0	PASS			
	High	19.87	17.78					
	Low	20.56	18.52	33.0				
16QAM	Mid	20.23	17.78		PASS			
	High	19.90	17.79					

	LTE Band 7-15MHz								
Modulation	Channel	EIRP (dBm)		Limit (dDm)	Dogult				
Modulation	Channel	Vertical	Horizontal	Limit (dBm)	Result				
	Low	19.78	17.52						
QPSK	Mid	19.65	17.63		PASS				
	High	19.88	17.84						
	Low	20.60	17.34	33.0					
16QAM	Mid	19.01	17.77		PASS				
	High	19.27	17.71						

LTE Band 7-20MHz								
Madulatian	Channel	EIRP	(dBm)	Limit (dBm)	Result			
Modulation	Channel	Vertical	Horizontal	LIIIII (UDIII)	Resuit			
	Low	20.08	18.45	-				
QPSK	Mid	20.15	18.63		PASS			
	High	19.63	17.52					
	Low	19.18	17.13	33.0				
16QAM	Mid	19.51	17.91		PASS			
	High	18.68	17.57					

Report No: TRE1611010502 Page: 167 of 185 Issued: 2016-11-30

LTE Band 17-5MHz								
NA 1.1.6	01 1	ERP (dBm)		1: :: (15)	- ·			
Modulation	Channel	Vertical	Horizontal	Limit (dBm)	Result			
	Low	17.25	15.46	-				
QPSK	Mid	17.66	15.25		PASS			
	High	17.58	15.38					
	Low	17.14	15.55	34.8				
16QAM	Mid	17.74	15.17		PASS			
	High	17.21	15.46					

LTE Band 17-10MHz							
Modulation	Channel	ERP (Limit (dPm)	Docult		
iviodulation	Chamei	Vertical	Horizontal	Limit (dBm)	Result		
	Low	17.84	15.26				
QPSK	Mid	17.69	15.84	24.0	PASS		
	High	17.88	18.89				
	Low	17.47	15.18	34.8			
16QAM	Mid	17.14	15.70		PASS		
	High	17.92	18.90				


Report No: TRE1611010502 Page: 168 of 185 Issued: 2016-11-30

4.6. Radiated Spurious Emssion

LIMIT

LTE Band 2/4/17:<-13dBm;LTE Band 7<-25dBm

TEST CONFIGURATION

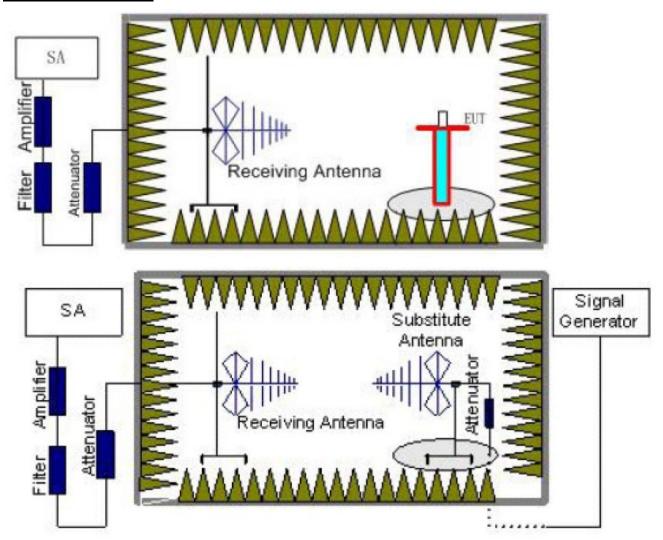

- 1. EUT was placed on a 0.8 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna shall be moved from 1m to 4m. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.
- 2. A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
- 3. The EUT is then put into continuously transmitting mode at its maximum power level during the test.Set Test Receiver or Spectrum RBW=1MHz,VBW=3MHz for above 1GHz and RBW=100kHz,VBW=300kHz for 30MHz to 1GHz, And the maximum value of the receiver should be recorded as (Pr).
- 4. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest isconnected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (PMea) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver

Report No: TRE1611010502 Page: 169 of 185 Issued: 2016-11-30

reach the previously recorded (Pr). The power of signal source (PMea) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

- 5. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (Pcl) ,the Substitution Antenna Gain (Ga) and the Amplifier Gain (PAg) should be recorded after test.
- 6. The measurement results are obtained as described below:

Power(EIRP)=PMea- PAg - Pcl + Ga

We used SMF100A micowave signal generator which signal level can up to 33dBm,so we not used power Amplifier for substituation test; The measurement results are amend as described below:

Power(EIRP)=PMea- Pcl + Ga

7. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.

ERP can be calculated from EIRP by subtracting the gain of the dipole, ERP = EIRP-2.15dBi.

Report No: TRE1611010502 Page: 170 of 185 Issued: 2016-11-30

LTE Band 2-1.4MHz								
Channel	Frequency	Spurious I	Emission	Limit (dDm)	Dogult			
Channel	(MHz)	Polarization	Level (dBm)	Limit (dBm)	Result			
	3701.4	Vertical	-45.65					
	5552.1	V	-38.86	-13.00	Pass			
Low	7402.8	V						
LOW	3701.4	Horizontal	-47.52					
	5552.1	Н	-40.38	-13.00	Pass			
	7402.8	Н						
	3760	Vertical	-45.30	-13.00	Pass			
	5640	V	-38.93					
Mid	7520	V						
iviid	3760	Horizontal	-47.44		Pass			
	5640	Н	-40.30	-13.00				
	7520	Н						
	3818.6	Vertical	-45.43					
	5727.9	V	-39.05	-13.00	Pass			
Lliah	7637.2	V						
High	3818.6	Horizontal	-47.45					
	5727.9	Н	-40.29	-13.00	Pass			
	7637.2	Н						

Remark:

- 1. Remark"---" means that the emission level is too low to be measured
- 2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

	LTE Band 2-3MHz								
Channel	Frequency	Spurious	Emission	Limit (dDm)	Dooult				
Channel	(MHz)	Polarization	Level (dBm)	Limit (dBm)	Result				
	3703	Vertical	-45.98						
	5554.5	V	-38.74	-13.00	Pass				
Low	7406	V							
LOW	3703	Horizontal	-46.54						
	5554.5	Н	-38.62	-13.00	Pass				
	7406	Н							
	3760	Vertical	-46.45	-13.00	Pass				
	5640	V	-38.25						
Mid	7520	V							
IVIIC	3760	Horizontal	-46.24						
	5640	Н	-37.48	-13.00	Pass				
	7520	Н							
	3817	Vertical	-47.57						
	5725.5	V	-37.73	-13.00	Pass				
∐iah	7634	V							
High	3817	Horizontal	-46.95						
	5725.5	Н	-37.60	-13.00	Pass				
	7634	Н		1					

- 1. Remark"---" means that the emission level is too low to be measured
- 2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

Report No: TRE1611010502 Page: 171 of 185 Issued: 2016-11-30

	LTE Band 2-5MHz								
Channel	Frequency	Spurious	Emission	Limit (dDm)	Dooult				
Channel	(MHz)	Polarization	Level (dBm)	Limit (dBm)	Result				
	3705	Vertical	-46.38						
	5557.5	V	-38.91	-13.00	Pass				
Low	7410	V							
LOW	3705	Horizontal	-45.59						
	5557.5	Н	-39.07	-13.00	Pass				
	7410	Н							
	3760	Vertical	-45.72	-13.00	Pass				
	5640	V	-39.60						
Mid	7520	V							
IVIIG	3760	Horizontal	-45.20		Pass				
	5640	Н	-39.97	-13.00					
	7520	Н							
	3815	Vertical	-44.56						
	5722.5	V	-39.85	-13.00	Pass				
High	7630	V							
High	3815	Horizontal	-45.11						
	5722.5	Н	-39.96	-13.00	Pass				
	7630	Н							

Remark:

- 1. Remark"---" means that the emission level is too low to be measured
- 2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

LTE Band 2-10MHz							
Channel	Frequency	Spurious Emission		Limit (dDm)	Dooult		
Channel	(MHz)	Polarization	Level (dBm)	Limit (dBm)	Result		
	3710	Vertical	-45.82				
	5565	V	-39.21	-13.00	Pass		
Low	7420	V					
Low	3710	Horizontal	-44.47				
	5565	Н	-39.49	-13.00	Pass		
	7420	Н					
	3760	Vertical	-44.69		Pass		
	5640	V	-40.38	-13.00			
Mid	7520	V					
IVIIU	3760	Horizontal	-43.80				
	5640	Н	-41.05	-13.00	Pass		
	7520	Н					
	3810	Vertical	-42.64				
	5715	V	-40.83	-13.00	Pass		
High	7620	V					
High	3810	Horizontal	-41.88				
	5715	Н	-40.68	-13.00	Pass		
	7620	Н					

- 1. Remark"---" means that the emission level is too low to be measured
- 2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

Report No: TRE1611010502 Page: 172 of 185 Issued: 2016-11-30

	LTE Band 2-15MHz							
Channel	Frequency	Spurious	Emission	Limit (dDm)	Result			
Channel	(MHz)	Polarization	Level (dBm)	Limit (dBm)	Result			
	3705	Vertical	-44.87					
	5557.5	V	-39.60	-13.00	Pass			
Low	7410	V						
LOW	3705	Horizontal	-43.09					
	5557.5	Н	-39.97	-13.00	Pass			
	7410	Н						
	3760	Vertical	-43.38	-13.00	Pass			
	5640	V	-41.15					
Mid	7520	V						
IVIIG	3760	Horizontal	-42.20		Pass			
	5640	Н	-41.90	-13.00				
	7520	Н						
	3815	Vertical	-40.90					
	5722.5	V	-41.66	-13.00	Pass			
Lliah	7630	V						
High	3815	Horizontal	-41.15					
	5722.5	Н	-41.71	-13.00	Pass			
	7630	Н		1				

Remark:

- 1. Remark"---" means that the emission level is too low to be measured
- 2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

	LTE Band 2-20MHz							
Channel	Frequency	Spurious	Emission	Limit (dDm)	Daguit			
Channel	(MHz)	Polarization	Level (dBm)	Limit (dBm)	Result			
	3720	Vertical	-43.61					
	5580	V	-40.04	-13.00	Pass			
Low	7440	V						
LOW	3720	Horizontal	-41.60					
	5580	Н	-40.46	-13.00	Pass			
	7440	Н						
	3760	Vertical	-41.93		Pass			
	5640	V	-41.79	-13.00				
Mid	7520	V						
iviid	3760	Horizontal	-40.60		Pass			
	5640	Н	-42.03	-13.00				
	7520	Н						
	3800	Vertical	-40.19					
	5700	V	-41.95	-13.00	Pass			
∐iah	7600	V						
High	3800	Horizontal	-41.61					
	5700	Н	-42.24	-13.00	Pass			
	7600	Н		1				

- 1. Remark"---" means that the emission level is too low to be measured
- 2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

Report No: TRE1611010502 Page: 173 of 185 Issued: 2016-11-30

LTE Band 4-1.4MHz							
Channel	Frequency	Spurious Emission		Limit (dPm)	Decult		
Channel	(MHz)	Polarization	Level (dBm)	Limit (dBm)	Result		
	3421.4	Vertical	-28.45				
	5132.1	V	-34.52	-13.00	Pass		
Low	6842.8	V					
LOW	3421.4	Horizontal	-33.75				
	5132.1	Н	-38.63	-13.00	Pass		
	6842.8	Н					
	3465	Vertical	-28.55	-13.00	Pass		
	5197.5	V	-34.42				
Mid	6930	V					
IVIIU	3465	Horizontal	-33.63		Pass		
	5197.5	Н	-38.53	-13.00			
	6930	Н					
	3508.6	Vertical	-28.71				
	5262.9	V	-34.58	-13.00	Pass		
Lligh	7017.2	V					
High	3508.6	Horizontal	-33.64				
	5262.9	Н	-38.54	-13.00	Pass		
	7017.2	Н					

Remark:

- 1. Remark"---" means that the emission level is too low to be measured
- 2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

		LTE Bar	nd 4-3MHz		
Channel	Frequency	Spurious Emission		Limit (dDm)	Danult
Channel	(MHz)	Polarization	Level (dBm)	Limit (dBm)	Result
	3423	Vertical	-28.88		
	5134.5	V	-34.36	-13.00	Pass
Low	6846	V			
LOW	3423	Horizontal	-33.46		
	5134.5	Н	-38.48	-13.00	Pass
	6846	Н			
	3465	Vertical	-29.01	-13.00	Pass
	5197.5	V	-34.47		
Mid	6930	V			
IVIIG	3465	Horizontal	-33.26		Pass
	5197.5	Н	-38.65	-13.00	
	6930	Н			
	3507	Vertical	-29.30		
	5260.5	V	-34.21	-13.00	Pass
Lligh	7014	V			
High	3423	Horizontal	-33.09		
	5134.5	Н	-38.80	-13.00	Pass
	6846	Н			

- 1. Remark"---" means that the emission level is too low to be measured
- 2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

Report No: TRE1611010502 Page: 174 of 185 Issued: 2016-11-30

LTE Band 4-5MHz							
Channel	Frequency	Spurious	Emission	Limit (dDm)	Doorte		
Channel	(MHz)	Polarization	Level (dBm)	Limit (dBm)	Result		
	3425	Vertical	-29.40				
	5137.5	V	-34.53	-13.00	Pass		
Low	6850	V					
Low	3425	Horizontal	-33.27				
	5137.5	Н	-38.96	-13.00	Pass		
	6850	Н					
	3465	Vertical	-29.27	-13.00	Pass		
	5197.5	V	-34.41				
Mid	6930	V	-				
IVIIG	3465	Horizontal	-33.13		Pass		
	5197.5	Н	-38.86	-13.00			
	6930	Н					
	3505	Vertical	-29.46				
	5257.5	V	-34.58	-13.00	Pass		
∐iah	7010	V	-				
High	3505	Horizontal	-33.26				
	5257.5	Н	-38.97	-13.00	Pass		
	7010	Н					

Remark:

- 1. Remark"---" means that the emission level is too low to be measured
- 2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

LTE Band 4-10MHz						
Channel	Frequency	Spurious	Emission	Limit (dDm)	Danult	
Channel	(MHz)	Polarization	Level (dBm)	Limit (dBm)	Result	
	3430	Vertical	-28.84			
	5145	V	-34.83	-13.00	Pass	
Low	6860	V				
Low	3430	Horizontal	-32.84			
	5145	Н	-38.62	-13.00	Pass	
	6860	Н				
	3465	Vertical	-29.07	-13.00	Pass Pass	
	5197.5	V	-35.04			
Mid	6930	V				
iviid	3465	Horizontal	-32.69			
	5197.5	Н	-38.50	-13.00		
	6930	Н	-			
	3500	Vertical	-29.27			
	5250	V	-35.23	-13.00	Pass	
∐iah	7000	V	-			
High	3500	Horizontal	-32.52			
	5250	Н	-38.34	-13.00	Pass	
Damanik :	7000	Н				

- 1. Remark"---" means that the emission level is too low to be measured
- 2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

Report No: TRE1611010502 Page: 175 of 185 Issued: 2016-11-30

		LTE Ban	d 4-15MHz		
Channel	Frequency	Spurious	Emission	Limit (dDm)	Result
Channel	(MHz)	Polarization	Level (dBm)	Limit (dBm)	Result
	3435	Vertical	-27.89		
	5152.5	V	-35.22	-13.00	Pass
Law	6870	V			
Low	3435	Horizontal	-32.91		
	5152.5	Н	-37.97	-13.00	Pass
	6870	Н			
	3465	Vertical	-28.19		Pass
	5197.5	V	-35.50	-13.00	
Mid	6930	V			
iviid	3465	Horizontal	-33.07		Pass
	5197.5	Н	-38.10	-13.00	
	6930	Н			
	3490	Vertical	-27.96		
	5235	V	-35.30	-13.00	Pass
∐iah	6980	V			
High	3490	Horizontal	-33.02		
	5235	Н	-38.05	-13.00	Pass
	6980	Н		1	

Remark:

- 1. Remark"---" means that the emission level is too low to be measured
- 2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

LTE Band 4-20MHz							
Channel	Frequency	Frequency Spurious Emiss		Limit (dDm)	D !!		
Channel	(MHz)	Polarization	Level (dBm)	Limit (dBm)	Result		
	3440	Vertical	-26.64				
	5160	V	-35.74	-13.00	Pass		
Law	6880	V					
Low	3440	Horizontal	-32.60				
	5160	Н	-38.40	-13.00	Pass		
	6880	Н					
	3465	Vertical	-26.32	-13.00	Pass Pass		
	5197.5	V	-35.86				
Mid	6930	V					
IVIIG	3465	Horizontal	-32.72				
	5197.5	Н	-38.31	-13.00			
	6930	Н					
	3490	Vertical	-26.15				
	5235	V	-38.25	-13.00	Pass		
Lliah	6980	V					
High	3490	Horizontal	-32.29				
	5235	Н	-38.11	-13.00	Pass		
	6980	Н					

- 1. Remark"---" means that the emission level is too low to be measured
- 2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

Report No: TRE1611010502 Page: 176 of 185 Issued: 2016-11-30

LTE Band 7-5MHz							
Channel	Frequency	Spurious I	Emission	Limit (dDm)	D 11		
Channel	(MHz)	Polarization	Level (dBm)	Limit (dBm)	Result		
	5005	Vertical	-40.64				
	7507.5	V	-48.52	-25.00	Pass		
Law	10010	V					
Low	5005	Horizontal	-43.47				
	7507.5	Н	-50.65	-25.00	Pass		
	10010	Н					
	5070	Vertical	-41.19	-25.00	Pass		
	7605	V	-49.00				
Mid	10140	V					
IVIIG	5070	Horizontal	-44.03		Pass		
	7605	Н	-48.57	-25.00			
	10140	Н					
	5135	Vertical	-40.75				
	7702.5	V	-48.29	-25.00	Pass		
Ціаь	10270	V					
High	5135	Horizontal	-43.92				
	7702.5	Н	-48.31	-25.00	Pass		
	10270	Н					

Remark:

- 1. Remark"---" means that the emission level is too low to be measured
- 2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

LTE Band 7-10MHz							
Channal	Frequency	Spurious	Emission	Lineit (dDne)	D 11		
Channel	(MHz)	Polarization	Level (dBm)	Limit (dBm)	Result		
	5010	Vertical	-40.66				
	7515	V	-48.50	-25.00	Pass		
Low	10020	V					
LOW	5010	Horizontal	-43.54				
	7515	Н	-50.67	-25.00	Pass		
	10020	Н					
	5070	Vertical	-40.71	-25.00	Pass		
	7605	V	-48.55				
Mid	10140	V					
IVIIG	5070	Horizontal	-42.85		Pass		
	7605	Н	-49.08	-25.00			
	10140	Н					
	5130	Vertical	-41.24				
	7695	V	-49.43	-25.00	Pass		
High	10260	V					
High	5130	Horizontal	-42.68				
	7695	Н	-49.46	-25.00	Pass		
	10260	Н					

- 1. Remark"---" means that the emission level is too low to be measured
- 2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

Report No: TRE1611010502 Page: 177 of 185 Issued: 2016-11-30

LTE Band 7-15MHz							
Channel	Frequency	Spurious	Emission	Limit (dDm)	Daniel		
Channel	(MHz)	Polarization	Level (dBm)	Limit (dBm)	Result		
	5015	Vertical	-40.63				
	7522.5	V	-48.53	-25.00	Pass		
Law	10030	V					
Low	5015	Horizontal	-43.43				
	7522.5	Н	-50.64	-25.00	Pass		
	10030	Н					
	5070	Vertical	-40.54	-25.00	Pass		
	7605	V	-48.45				
Mid	10140	V					
iviid	5070	Horizontal	-44.15		Pass		
	7605	Н	-47.90	-25.00			
	10140	Н					
	5125	Vertical	-39.99				
	7687.5	V	-47.54	-25.00	Pass		
Lligh	10250	V					
High	5125	Horizontal	-43.96				
	7687.5	Н	-47.58	-25.00	Pass		
	10250	Н					

Remark:

- 1. Remark"---" means that the emission level is too low to be measured
- 2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

		LTE Ban	d 7-20MHz		
Channal	Frequency	Spurious	Emission	Limeit (dDms)	D 14
Channel	(MHz)	Polarization	Level (dBm)	Limit (dBm)	Result
	5015	Vertical	-40.66		
	7522.5	V	-48.50	-25.00	Pass
1	10030	V			
Low	5015	Horizontal	-43.57		
	7522.5	Н	-50.67	-25.00	Pass
	10030	Н			
	5070	Vertical	-40.78	-25.00	Pass Pass
	7605	V	-48.59		
Mid	10140	V			
iviid	5070	Horizontal	-42.73		
	7605	Н	-49.24	-25.00	
	10140	Н			
	5125	Vertical	-41.43		
	7687.5	V	-49.67	-25.00	Pass
Lligh	10250	V			
High	5125	Horizontal	-42.46		
	7687.5	Н	-49.72	-25.00	Pass
	10250	Н			

- 1. Remark"---" means that the emission level is too low to be measured
- 2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

Report No: TRE1611010502 Page: 178 of 185 Issued: 2016-11-30

LTE Band 17-5MHz							
Channal	Frequency	Spurious	Emission	Limit (dDm)	Dooult		
Channel	(MHz)	Polarization	Level (dBm)	Limit (dBm)	Result		
	1413	Vertical	-42.36				
	2119.5	V	-44.75	-13.00	Pass		
Low	2826	V					
Low	1413	Horizontal	-46.84				
	2119.5	Н	-46.89	-13.00	Pass		
	2826	Н					
	1420	Vertical	-42.59	-13.00	Pass		
	2130	V	-44.97				
Mid	2840	V					
IVIIG	1420	Horizontal	-47.08		Pass		
	2130	Н	-47.09	-13.00			
	2840	Н					
	1427	Vertical	-42.26				
	2140.5	V	-44.66	-13.00	Pass		
High	2854	V	-				
High	1427	Horizontal	-47.18				
	2140.5	Н	-47.18	-13.00	Pass		
	2854	Н					

Remark:

- 1. Remark"---" means that the emission level is too low to be measured
- 2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

		LTE Band	17-10MHz		
Channal	Frequency	Spurious	Emission	Limeit (dDms)	D It
Channel	(MHz)	Polarization	Level (dBm)	Limit (dBm)	Result
	1418	Vertical	-42.43		
	2127	V	-44.68	-13.00	Pass
Low	2836	V			
LOW	1418	Horizontal	-47.13		
	2127	Н	-46.95	-13.00	Pass
	2836	Н			
	1420	Vertical	-42.66		Pass
	2130	V	-44.89	-13.00	
Mid	2840	V			
iviid	1420	Horizontal	-46.96		Pass
	2130	Н	-47.09	-13.00	
	2840	Н			
	1422	Vertical	-43.24		
	2133	V	-45.85	-13.00	Pass
Lliab	2844	V			
High	1422	Horizontal	-47.93		
	2133	Н	-48.00	-13.00	Pass
	2844	Н			

- 1. Remark"---" means that the emission level is too low to be measured
- 2. The emission levels of below 1 GHz are very lower than the limit and not show in test report


Report No: TRE1611010502 Page: 179 of 185 Issued: 2016-11-30

4.7. Frequency stability V.S. Temperature measurement

LIMIT

2.5ppm

TEST CONFIGURATION

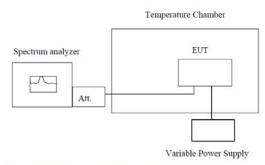

Note: Measurement setup for testing on Antenna connector

TEST PROCEDURE

- 1. The equipment under test was connected to an external DC power supply and input rated voltage.
- 2. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators.
- 3. The EUT was placed inside the temperature chamber.
- 4. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 25℃ operating frequency as reference frequency.
- 5. Turn EUT off and set the chamber temperature to −30°C. After the temperature stabilized for approximately 30 minutes recorded the frequency.
- 6. Repeat step measure with 10°C increased per stage until the highest temperature of +50°C reached.

Report No: TRE1611010502 Page: 180 of 185 Issued: 2016-11-30

Re	ference Frequency	y: LTE Band	l 2 Middle ch	nannel=188	0MHz,20MHz	Bandwidth	
Dower gunnlied	Tomporatura		Freque	Limit			
Power supplied (Vdc)	Temperature (℃)	QPSK		16QAM		Limit (ppm)	Result
(145)	(0)	Hz	ppm	Hz	ppm	(PP)	
	-30	26	0.0138	25	0.0133	_	
	-20	22	0.0117	26	0.0138		
	-10	17	0.0090	19	0.0101		
	0	18	0.0096	15	0.0080		
3.70	10	14	0.0074	13	0.0069	2.5	Pass
	20	13	0.0069	12	0.0064		
	30	15	0.0080	16	0.0085		
	40	16	0.0085	18	0.0096		
	50	19	0.0101	19	0.0101		
Ref	erence Frequency	LTE Band	4 Middle cha	annel=1732	2.5MHz,20MHz	Bandwidth	
5 "			Freque	ncy error			
Power supplied (Vdc)	Temperature (\mathbb{C})	QF	SK	16	6QAM	Limit (ppm)	Result
	(C)	Hz	ppm	Hz	ppm	(ррііі)	
	-30	29	0.0167	25	0.0144		
	-20	27	0.0156	29	0.0167		
	-10	24	0.0139	23	0.0133		
	0	25	0.0144	26	0.0150		Pass
3.70	10	22	0.0127	18	0.0104	2.5	
	20	21	0.0121	22	0.0127		
	30	23	0.0133	19	0.0110		
	40	25	0.0144	23	0.0133	1	
	50	28	0.0162	26	0.0150		
Re	ference Frequency	y: LTE Band	7 Middle ch	annel=253	5MHz,20MHz	Bandwidth	
	_		Freque	ncy error			
Power supplied (Vdc)	Temperature	QPSK		16QAM		Limit	Result
(vuc)	(℃)	Hz	ppm	Hz	ppm	(ppm)	
	-30	31	0.0122	30	0.0118		
	-20	26	0.0103	24	0.0095		
	-10	23	0.0091	15	0.0059		
	0	24	0.0095	28	0.0110		
3.70	10	21	0.0083	30	0.0118	2.5	Pass
	20	20	0.0079	24	0.0095		
	30	21	0.0083	19	0.0075		
	40	23	0.0091	22	0.0087	1	
	50	25	0.0099	19	0.0075		

Report No: TRE1611010502 Page: 181 of 185 Issued: 2016-11-30

Reference Frequency: LTE Band 17 Middle channel=710MHz,10MHz Bandwidth								
	Tanananatana		Frequ	1				
Power supplied (Vdc)	Temperature (℃)	QP	SK	16	QAM	Limit (ppm)	Result	
(v d o)	(0)	Hz	ppm	Hz	ppm	(рріп)		
	-30	18	0.0254	16	0.0225	2.5	Pass	
	-20	15	0.0211	15	0.0211			
	-10	12	0.0169	17	0.0239			
	0	11	0.0155	14	0.0197			
3.70	10	8	0.0113	13	0.0183			
	20	7	0.0099	9	0.0127			
	30	9	0.0127	14	0.0197			
	40	10	0.0141	8	0.0113			
	50	13	0.0183	12	0.0169			


Report No: TRE1611010502 Page: 182 of 185 Issued: 2016-11-30

4.8. Frequency stability V.S. Voltagemeasurement

LIMIT

2.5ppm

TEST CONFIGURATION

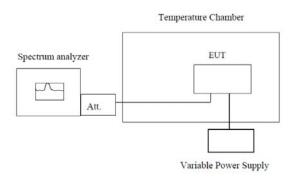

Note: Measurement setup for testing on Antenna connector

TEST PROCEDURE

- 1. Set chamber temperature to 25℃. Use a variable DC power source topower the EUT and set the voltage to rated voltage.
- 2. Set the spectrum analyzer RBW lowenough to obtain the desired frequency resolution and recorded the frequency.
- 3. Reduce the input voltage to specified extreme voltage variation (+/- 15%) and endpoint, recordthe maximum frequency change.

Report No: TRE1611010502 Page: 183 of 185 Issued: 2016-11-30

Refe	erence Frequenc	y: LTE Band	d 2 Middle c	hannel=1880	OMHz,20MHz I	Bandwidth	
	Power		Frequ	l inait			
Temperature (°C)	supplied	QPSK		16QAM		Limit (ppm)	Result
	(Vdc)	Hz	ppm	Hz	ppm	(PPIII)	
	4.35	15	0.0080	19	0.0101		
25	3.70	13	0.0069	14	0.0074	2.5	Pass
	3.50	18	0.0096	22	0.0117		
Refer	rence Frequency	: LTE Band	4 Middle ch	annel=1732.	.5MHz,20MHz	Bandwidth	
	Power			ency error		Limit	
Temperature (°C)	supplied	QF	PSK	160	QAM Limit (ppm)		Result
	(Vdc)	Hz	ppm	Hz	ppm	(PP)	
	4.35	23	0.0133	24	0.0139		
25	3.70	21	0.0121	15	0.0087	2.5	Pass
	3.50	26	0.0150	16	0.0092		
Refe	erence Frequenc	y: LTE Band	d 7 Middle c	hannel=2535	5MHz,20MHz I	Bandwidth	
	Power		Frequ	Limit			
Temperature (°C)	supplied	QPSK		16QAM		(ppm)	Result
	(Vdc)	Hz	ppm	Hz	ppm	(PP)	
	4.35	22	0.0087	18	0.0071		
25	3.70	20	0.0079	23	0.0091	2.5	Pass
	3.50	25	0.0099	26	0.0102		
Refe	erence Frequenc	y: LTE Band	d 17 Middle	channel=710	OMHz,10MHz I	Bandwidth	
	Power	Frequency error			Linait		
Temperature (°C)	supplied	QF	PSK	160	QAM	Limit (ppm)	Result
	(Vdc)	Hz	ppm	Hz	ppm	(PP)	
	4.35	9	0.0127	10	0.0141		
25	3.70	7	0.0099	6	0.0085	2.5	Pass
	3.50	12	0.0169	13	0.0183		


Report No: TRE1611010502 Page: 184 of 185 Issued: 2016-11-30

4.9. Peak-Average Ratio

LIMIT

13dB

TEST CONFIGURATION

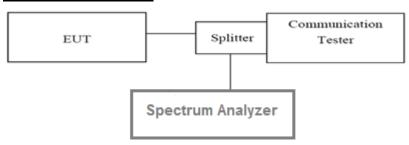

TEST PROCEDURE

According with KDB 971168

- 1. The signal analyzer's CCDF measurement profile is enabled
- 2. Frequency = carrier center frequency
- 3. Measurement BW > Emission bandwidth of signal
- 4. The signal analyzer was set to collect one million samples to generate the CCDF curve
- 5. The measurement interval was set depending on the type of signal analyzed. Forcontinuoussignals(>98% duty cycle), the measurement interval was set to 1ms. For bursttransmissions, the spectrum analyzer is set to use an internal "RF Burst" trigger that issynced with an incoming pulse and the measurement interval is set to less than the duration of the "on time" of one burst to ensure that energy is only captured during a time in whichthetransmitter is operating at maximum power

LTE Band 2-20MHz							
Modulation	QP:	SK	16Q	AM	Limit/dD)	Dogult	
Channel	1RB#	Full RB#	1RB#	Full RB#	Limit(dB)	Result	
Low	5.02	5.44	4.92	6.1	13	Pass	
Mid	4.12	5.2	4.06	5.96	13	Pass	
High	4.8	5.18	4.92	5.88	13	Pass	

LTE Band 4-20MHz								
Modulation	QPS	SK	16QAM		Limit/dD\	Dogult		
Channel	1RB#	Full RB#	1RB#	Full RB#	Limit(dB)	Result		
Low	5.16	5.34	5.26	6.10	13	Pass		
Mid	5.00	5.46	4.98	6.26	13	Pass		
High	5.40	5.22	5.58	5.98	13	Pass		


LTE Band 7-20MHz								
Modulation	QPSK		16QAM		16Q.		Limit/dD)	Result
Channel	1RB#	Full RB#	1RB#	Full RB#	Limit(dB)	Result		
Low	2.54	4.60	3.02	5.46	13	Pass		
Mid	2.68	4.64	3.10	5.38	13	Pass		
High	3.22	4.48	3.84	5.24	13	Pass		


LTE Band 17-10MHz							
Modulation	QPS	SK	16QAM		Limit/dD\	Daguit	
Channel	1RB#	Full RB#	1RB#	Full RB#	Limit(dB)	Result	
Low	5.06	5.60	5.06	6.32	13	Pass	
Mid	5.36	5.52	5.50	6.28	13	Pass	
High	5.62	5.30	5.74	6.08	13	Pass	

Report No: TRE1611010502 Page: 185 of 185 Issued: 2016-11-30

5. Test Setup Photos of the EUT

Radiated emission:

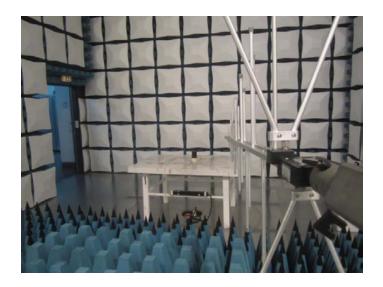

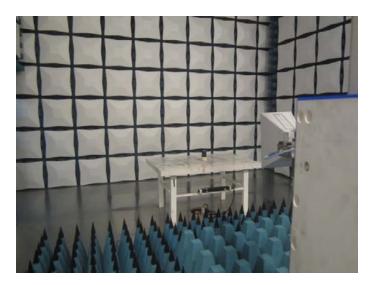

6. External and Internal Photos of the EUT

Reference to the test report No.: TRE1611010501.	
--	--

.....End of Report.....