




Report No.: TRE1705022402 Page: 138 of 187 Issued: 2017-06-20

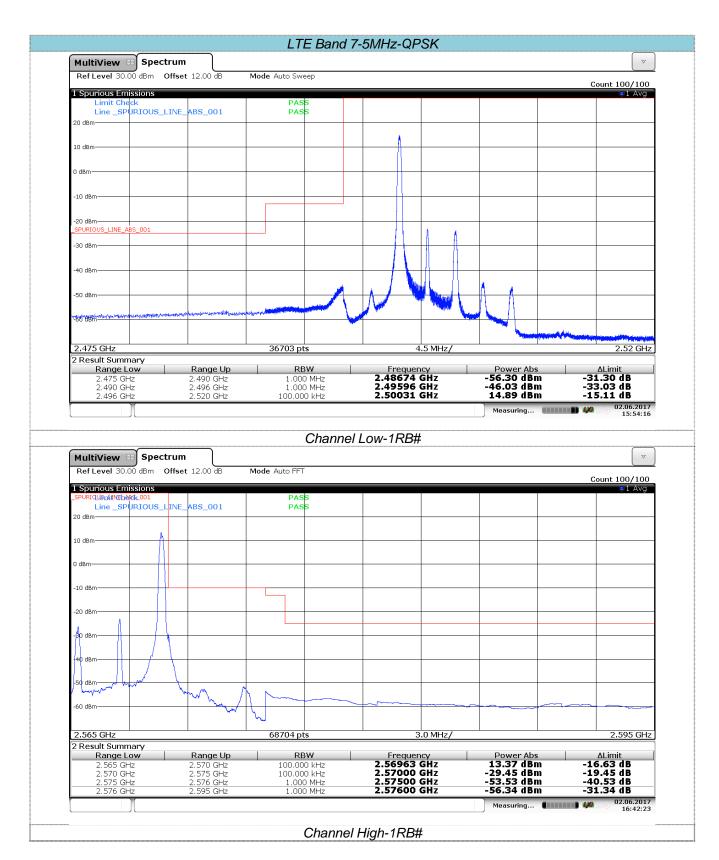


Report No.: TRE1705022402 Page: 139 of 187 Issued: 2017-06-20

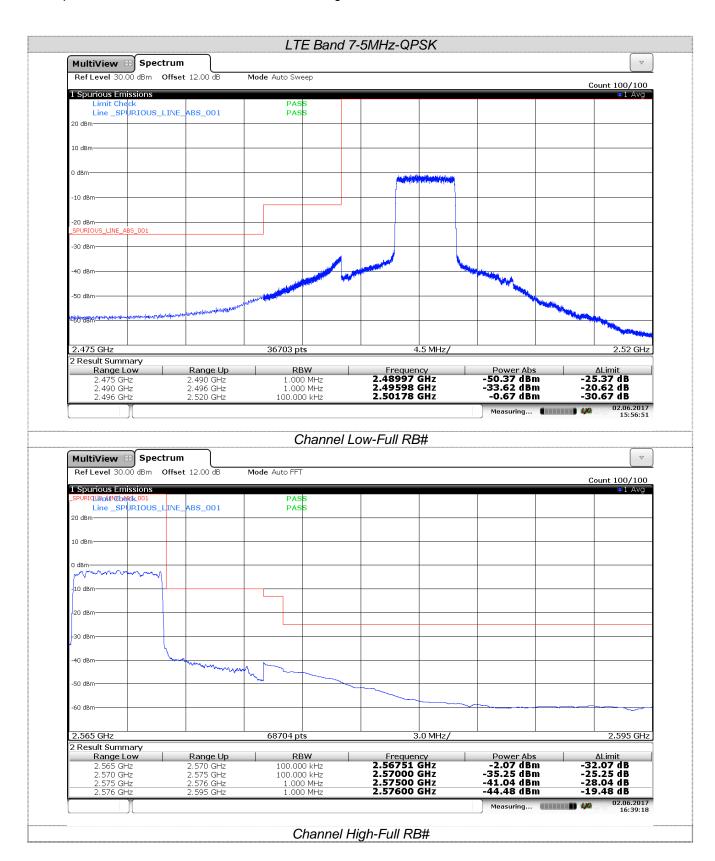


Report No.: TRE1705022402 Page: 140 of 187 Issued: 2017-06-20

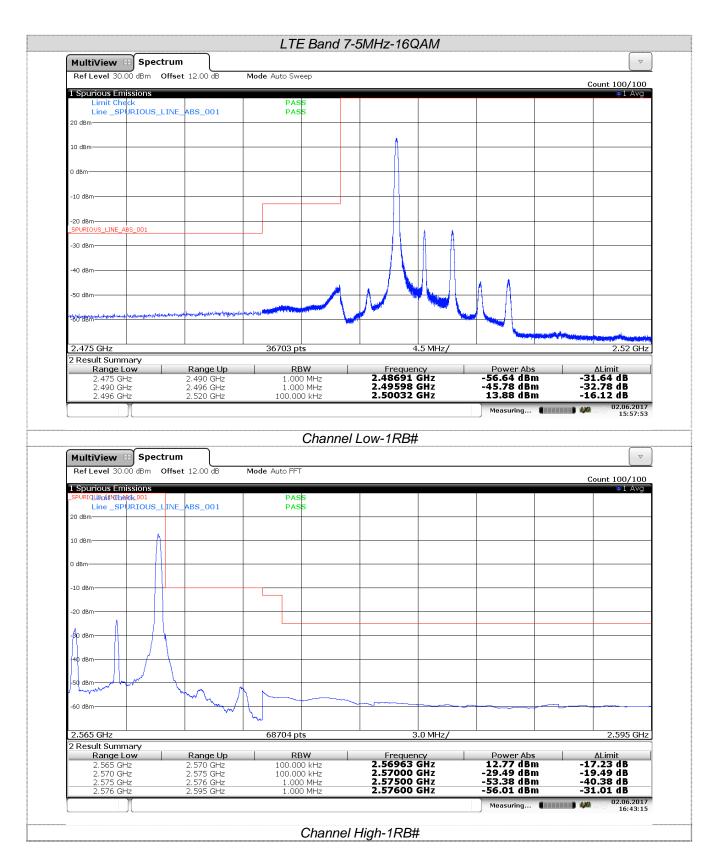


Report No.: TRE1705022402 Page: 141 of 187 Issued: 2017-06-20

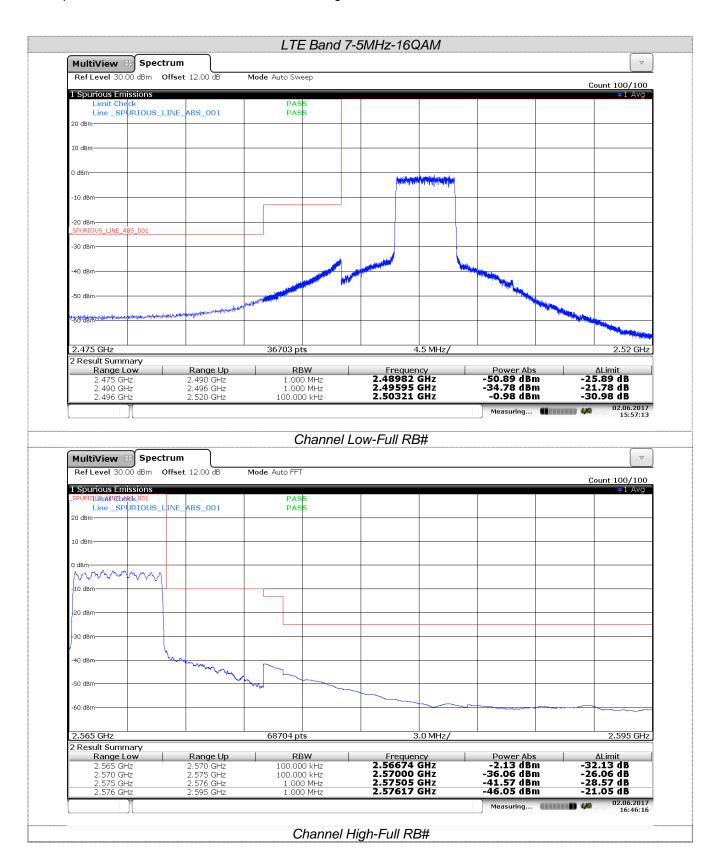


Report No.: TRE1705022402 Page: 142 of 187 Issued: 2017-06-20

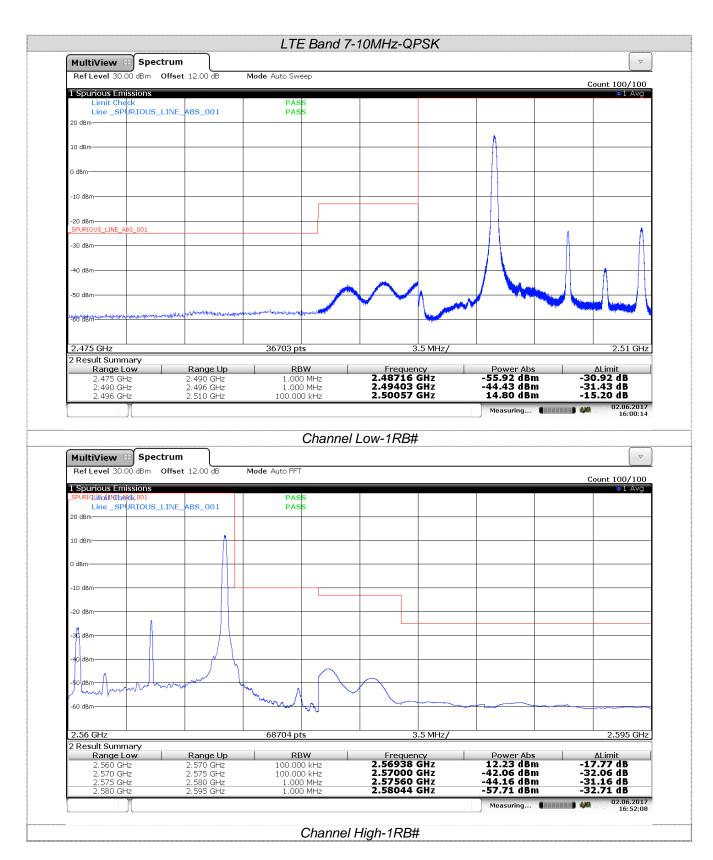


Report No.: TRE1705022402 Page: 143 of 187 Issued: 2017-06-20

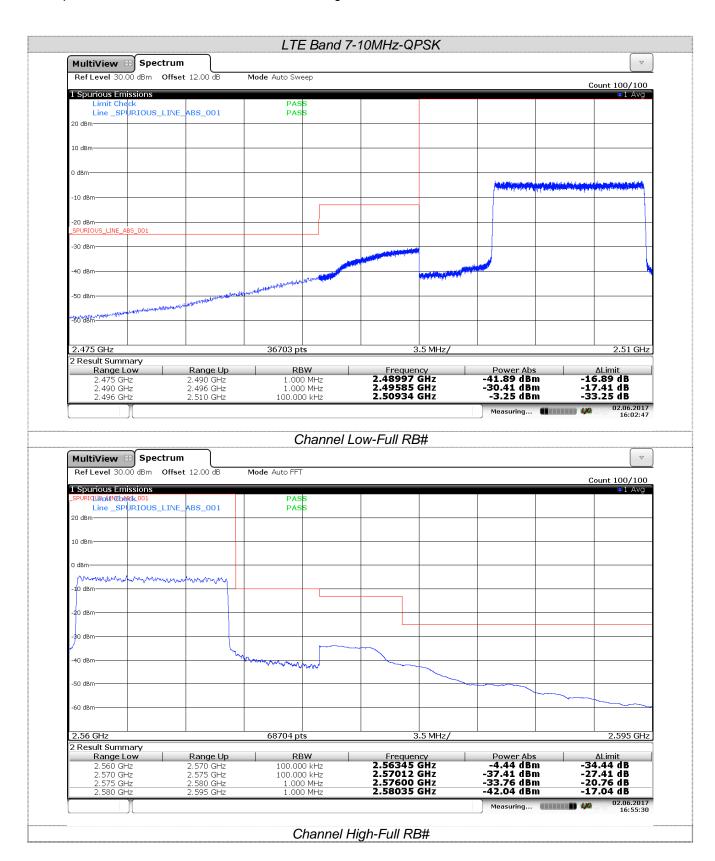


Report No.: TRE1705022402 Page: 144 of 187 Issued: 2017-06-20

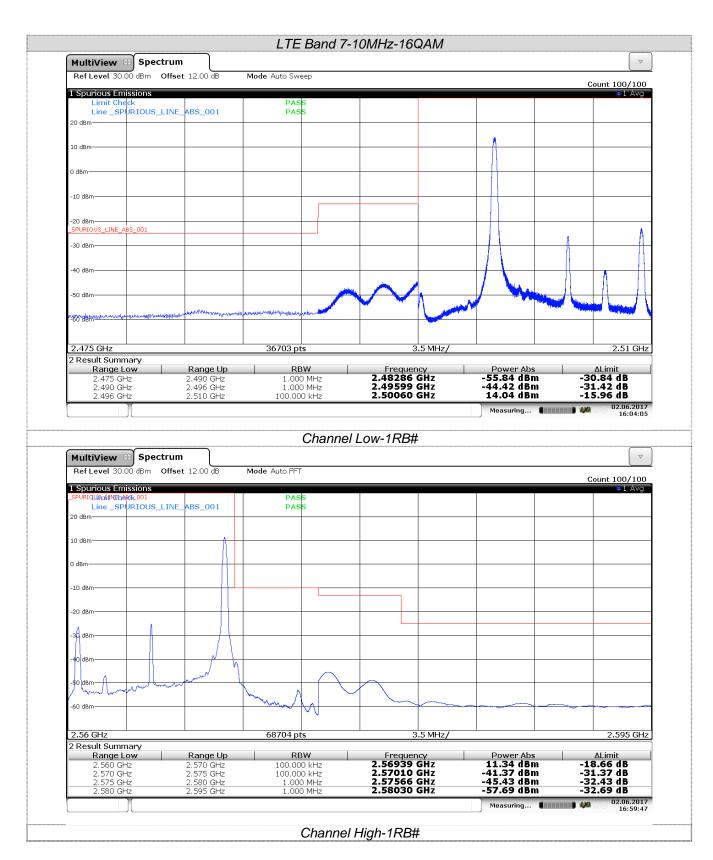


Report No.: TRE1705022402 Page: 145 of 187 Issued: 2017-06-20

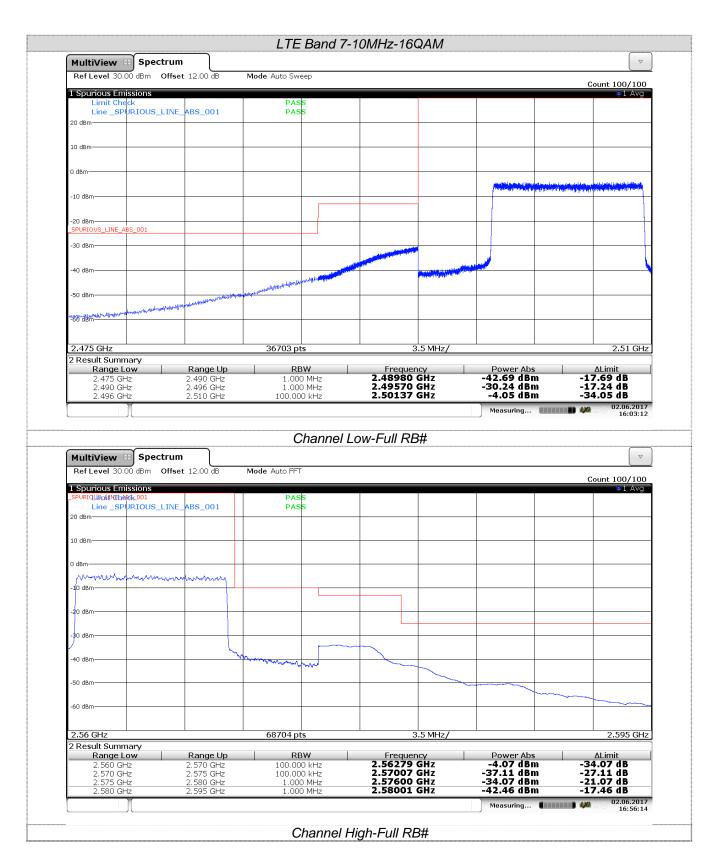


Report No.: TRE1705022402 Page: 146 of 187 Issued: 2017-06-20

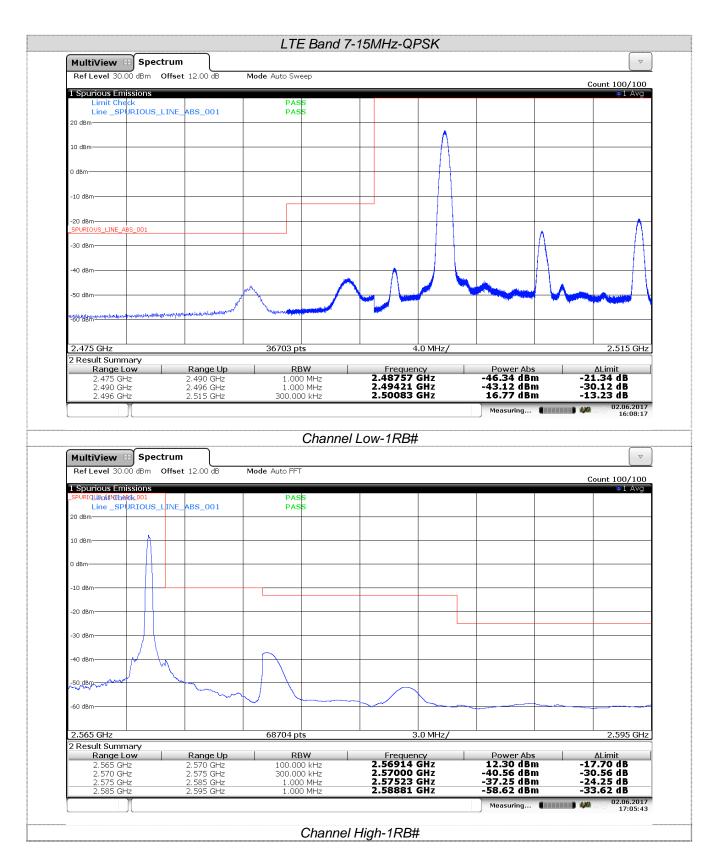


Report No.: TRE1705022402 Page: 147 of 187 Issued: 2017-06-20

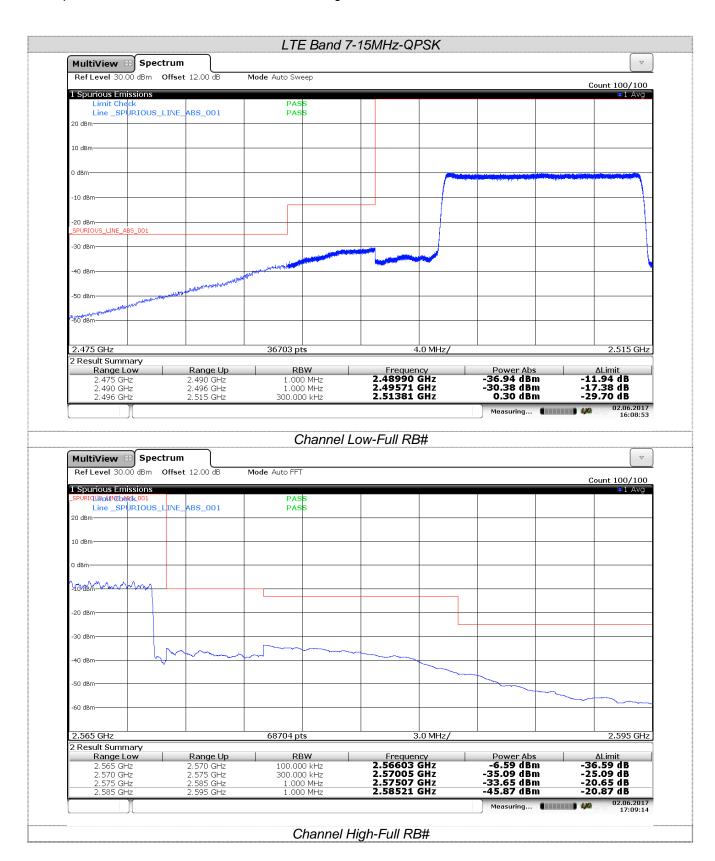


Report No.: TRE1705022402 Page: 148 of 187 Issued: 2017-06-20

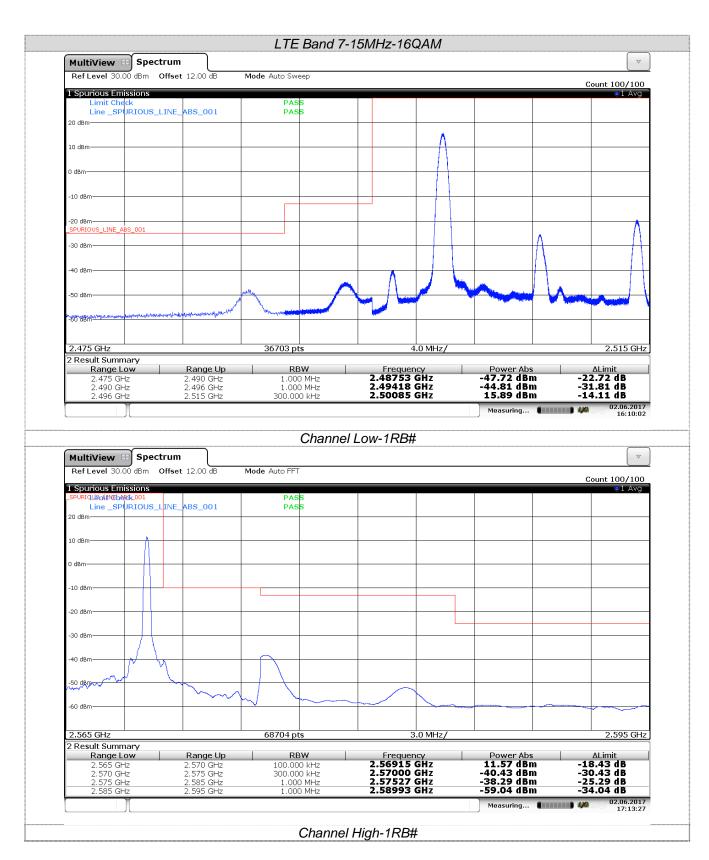


Report No.: TRE1705022402 Page: 149 of 187 Issued: 2017-06-20

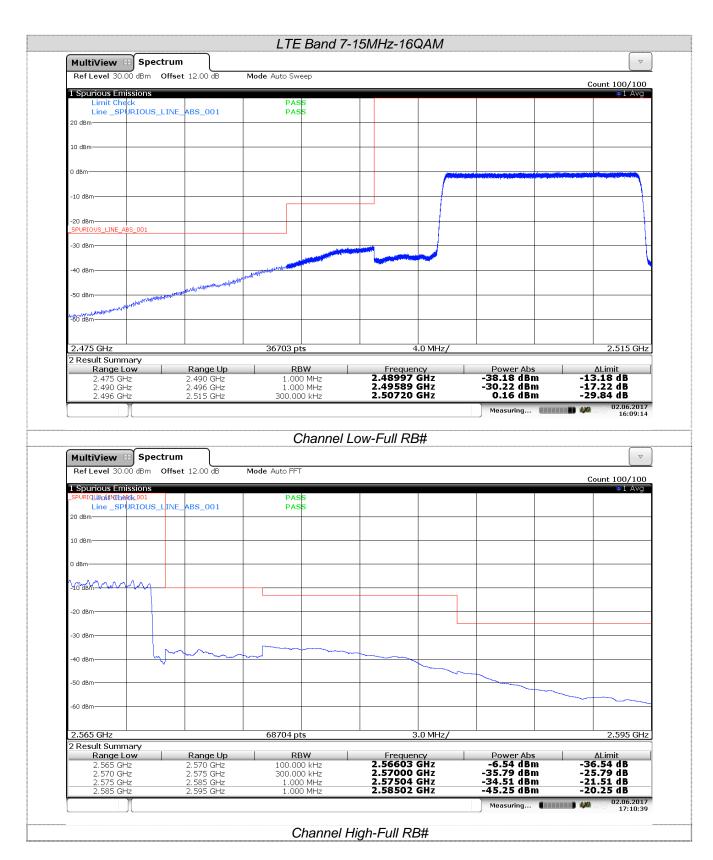


Report No.: TRE1705022402 Page: 150 of 187 Issued: 2017-06-20

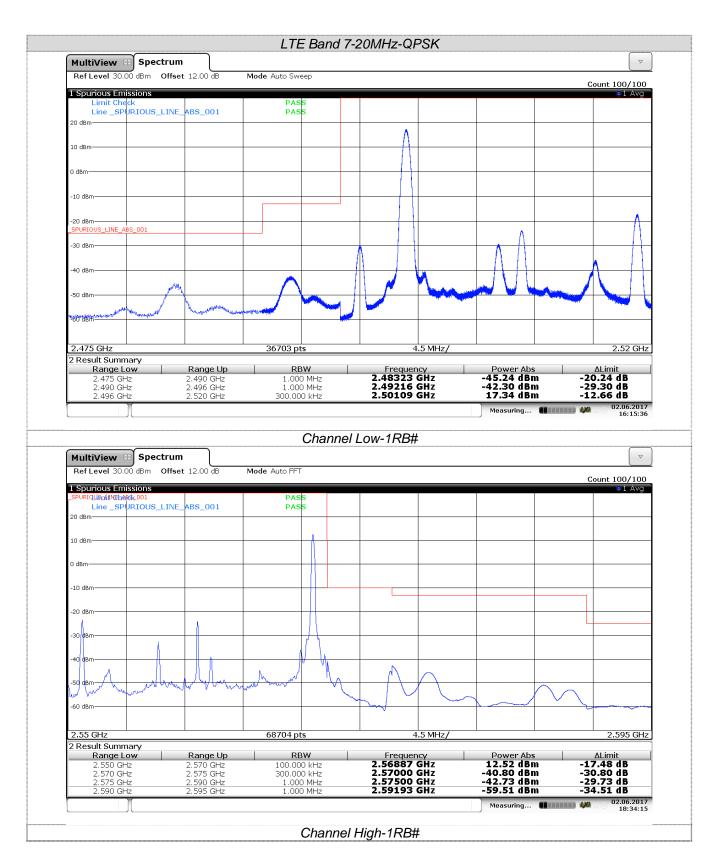



Report No.: TRE1705022402 Page: 151 of 187 Issued: 2017-06-20

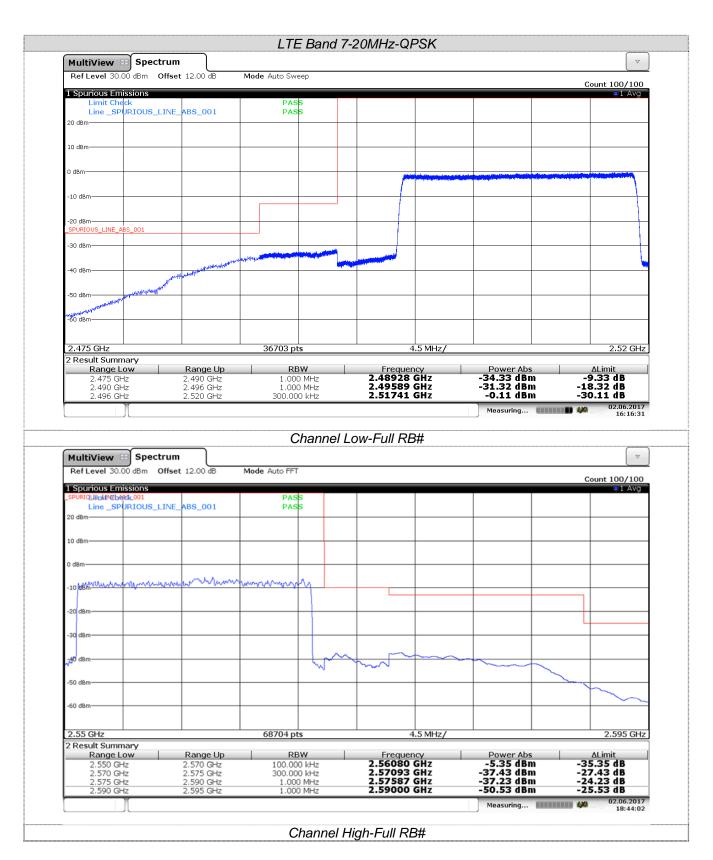


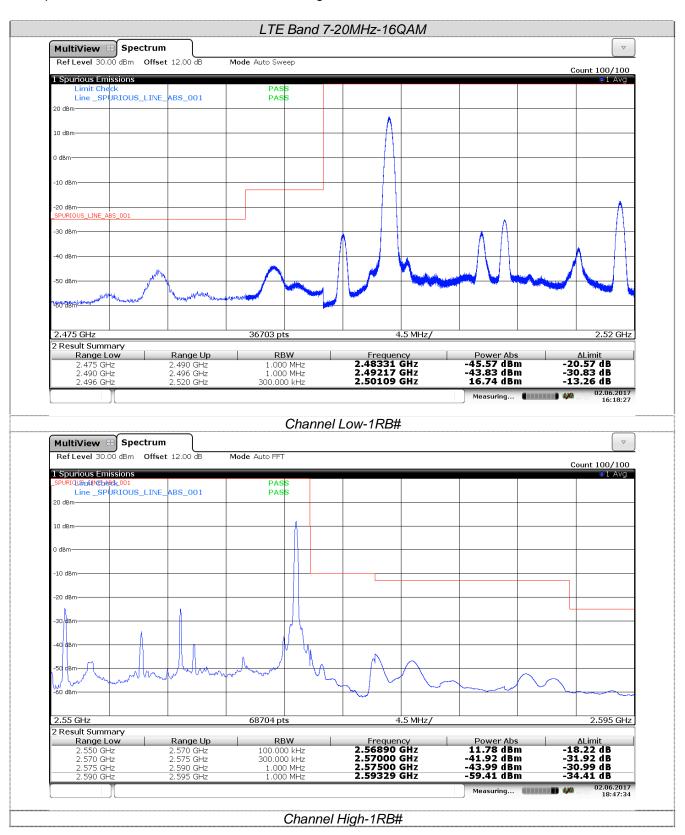



Report No.: TRE1705022402 Page: 153 of 187 Issued: 2017-06-20

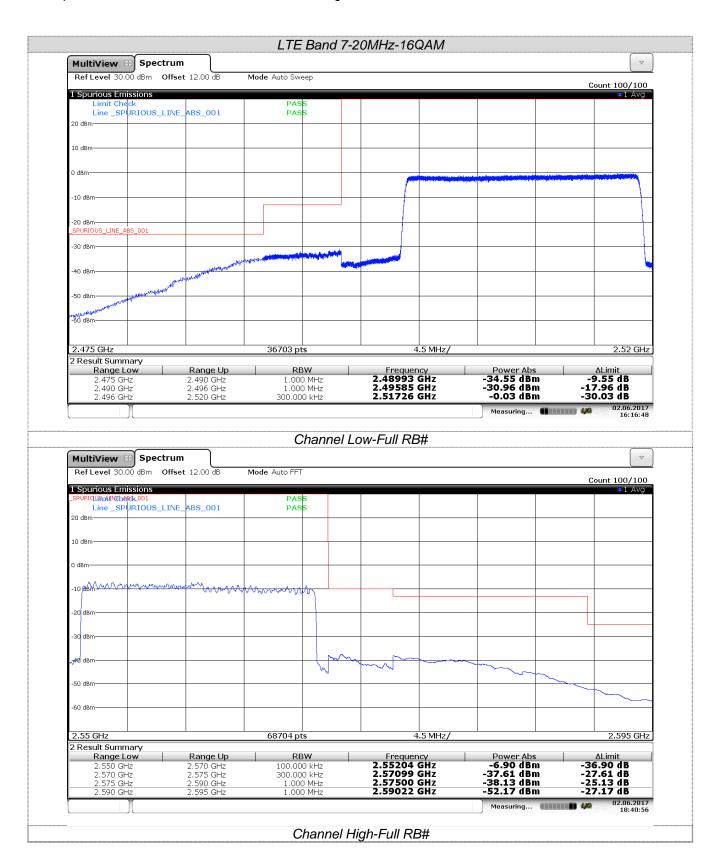


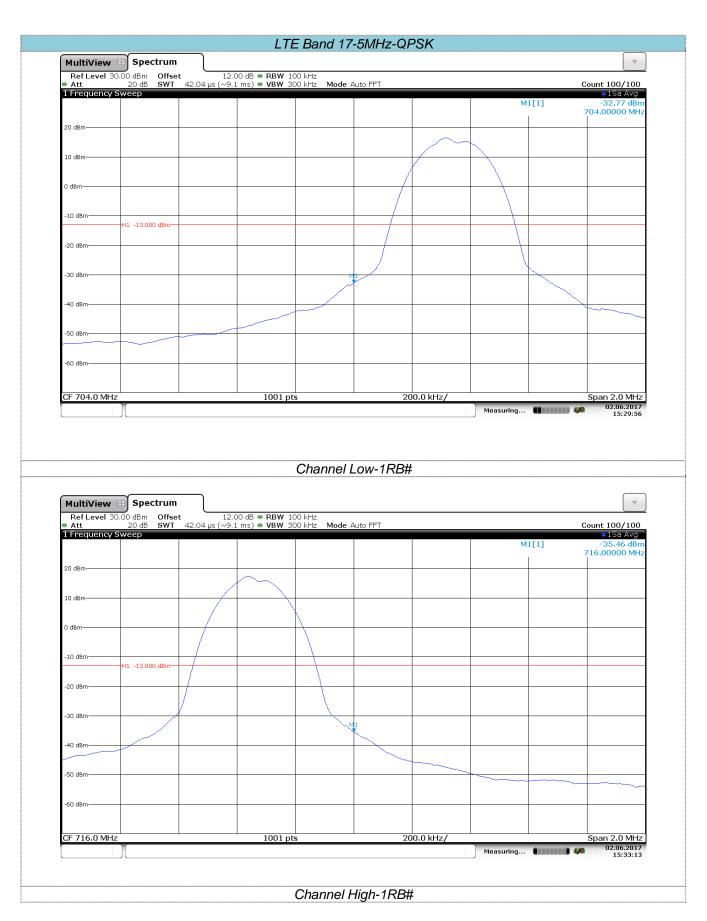


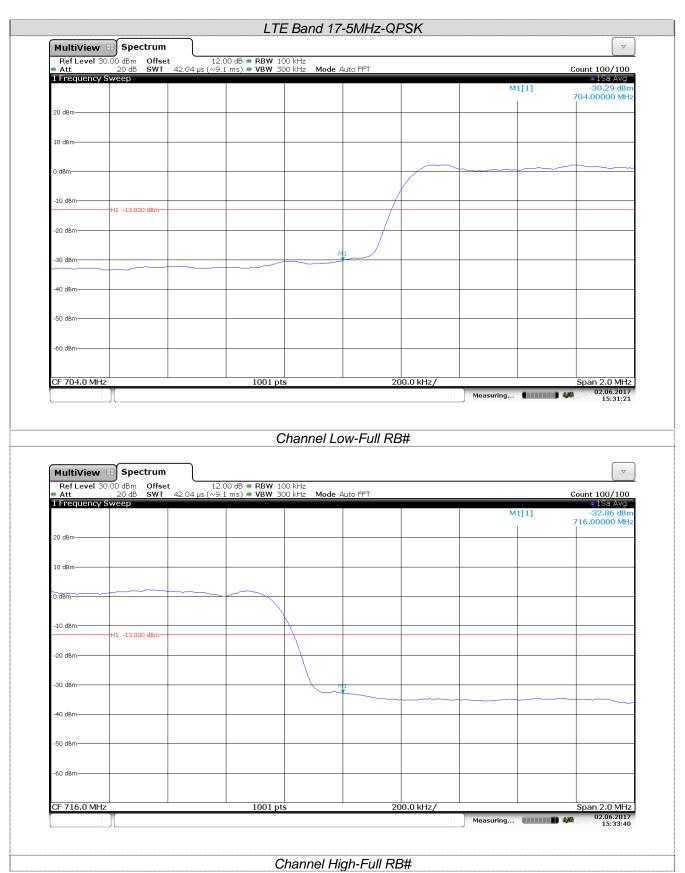


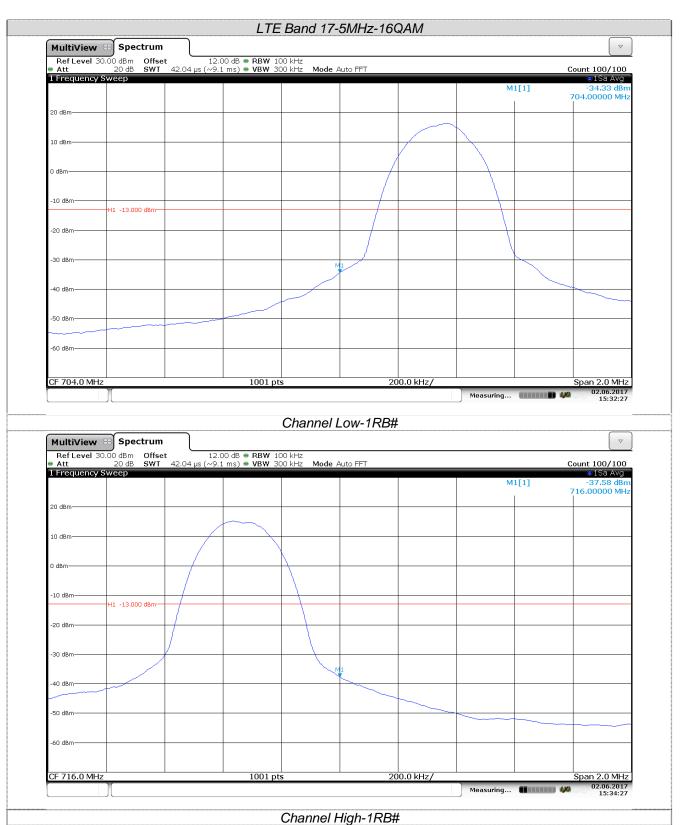

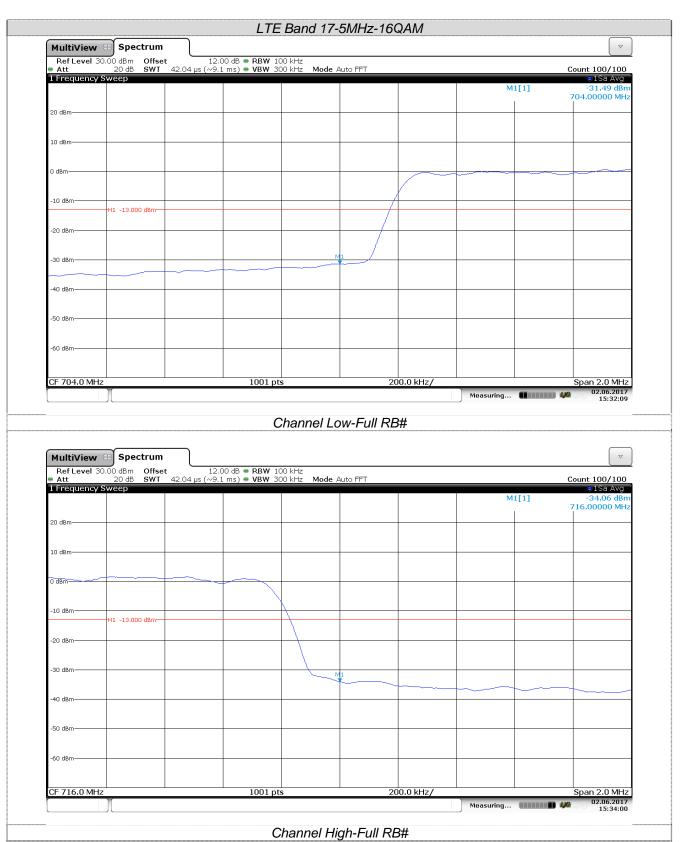

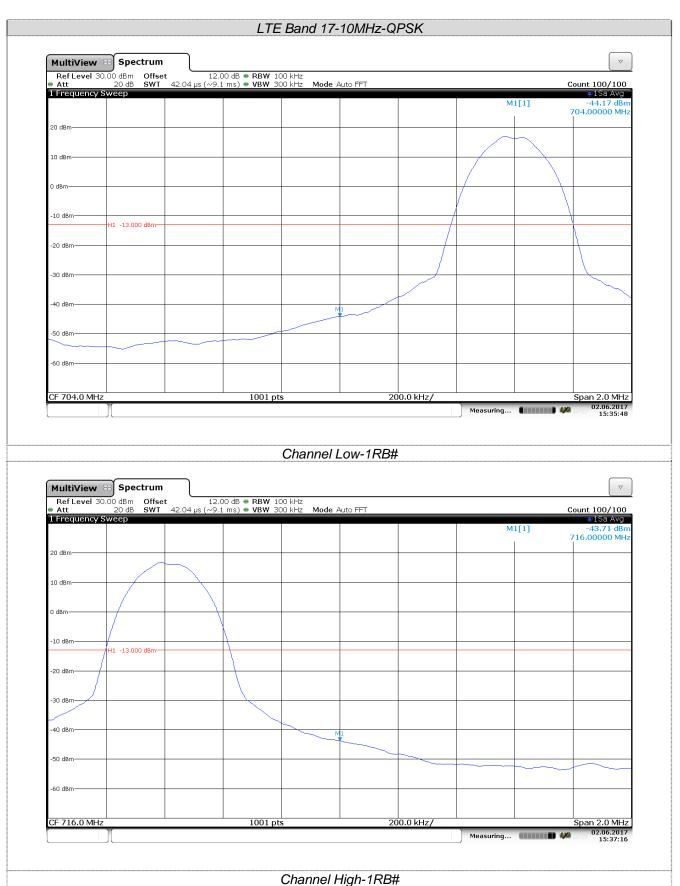

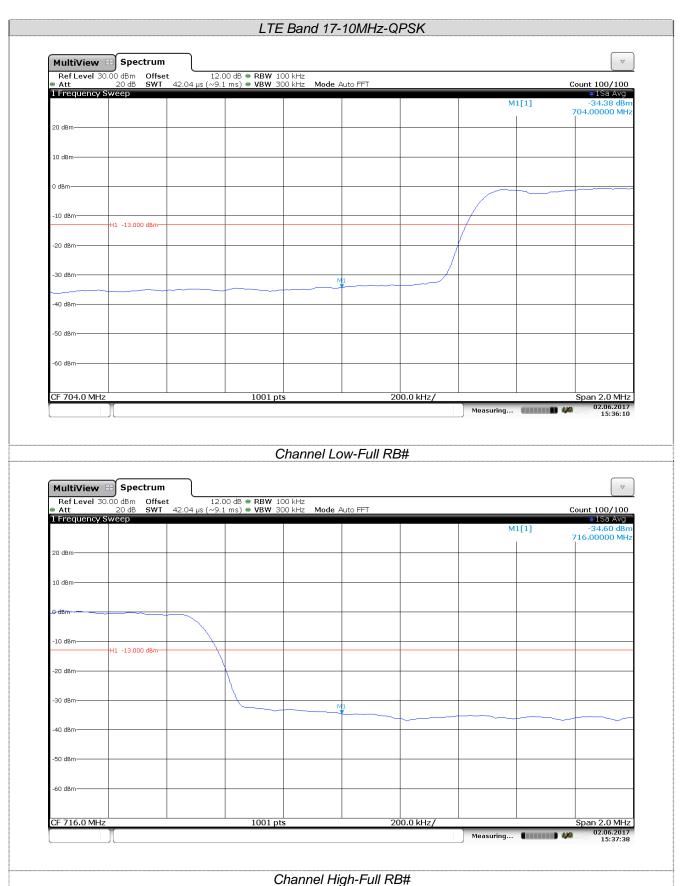

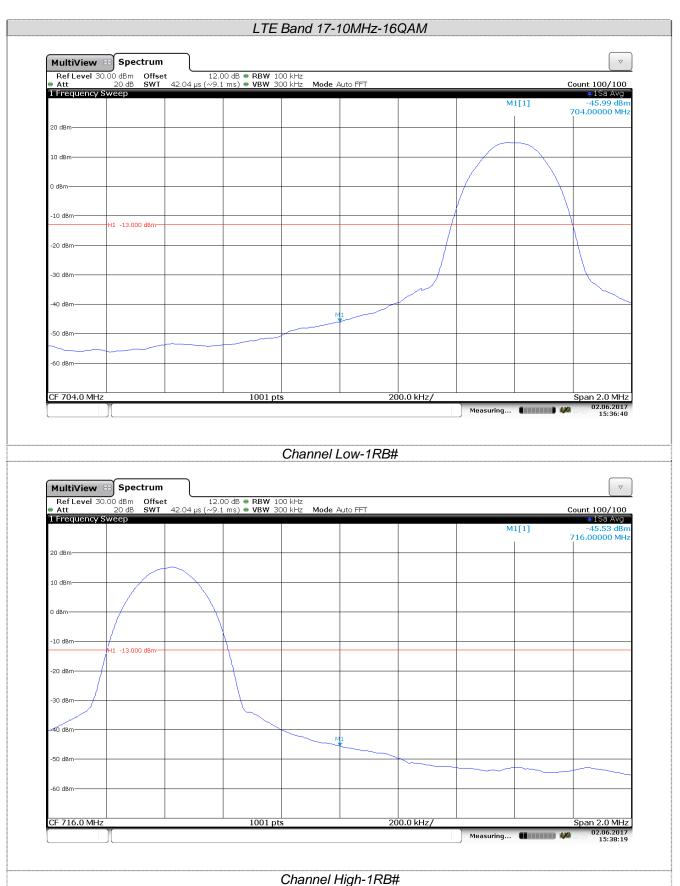




Report No.: TRE1705022402 Page: 162 of 187 Issued: 2017-06-20

# 5.5. ERP AND EIRP

### LIMIT

LTE Band 2: EIRP<2W ,LTE Band 4:EIRP<1W, LTE Band 7:EIPR<2W, LTE Band 17:ERP<3W,

### **TEST CONFIGURATION**

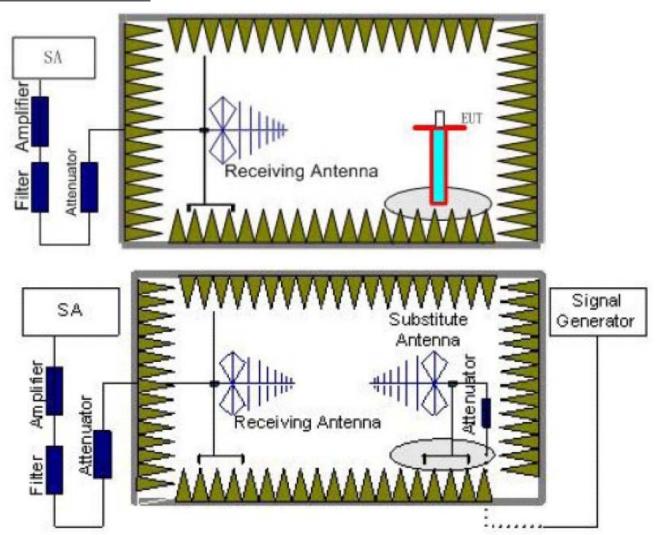

## **TEST PROCEDURE**

- 1. EUT was placed on a 0.8 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna shall be moved from 1m to 4m. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.
- 2. A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
- 3. The EUT is then put into continuously transmitting mode at its maximum power level during the test.Set Test Receiver or Spectrum RBW=1MHz,VBW=3MHz for above 1GHz and RBW=100kHz,VBW=300kHz for 30MHz to 1GHz,, And the maximum value of the receiver should be recorded as (Pr).
- 4. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest isconnected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (PMea) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver

Report No.: TRE1705022402 Page: 163 of 187 Issued: 2017-06-20

reach the previously recorded (Pr). The power of signal source (PMea) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

- 5. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (PcI) ,the Substitution Antenna Gain (Ga) and the Amplifier Gain (PAg) should be recorded after test.
- 6. The measurement results are obtained as described below:

Power(EIRP)=PMea- PAg - Pcl + Ga

We used SMF100A micowave signal generator which signal level can up to 33dBm,so we not used power Amplifier for substituation test; The measurement results are amend as described below:

Power(EIRP)=PMea- Pcl + Ga

7. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.

ERP can be calculated from EIRP by subtracting the gain of the dipole, ERP = EIRP-2.15dBi.

### **TEST MODE:**

Please refer to the clause 3.3

### **TEST RESULTS**

 Report No.: TRE1705022402 Page: 164 of 187 Issued: 2017-06-20

LTE Band 2-1.4MHz									
Modulation	Channel	EIRP	(dBm)	Limit (dBm)	Result				
iviodulation	Channel	Vertical	Horizontal	LIIIII (UDIII)	Result				
	Low	20.45	18.43						
QPSK	Mid	20.35	18.25		PASS				
	High	20.11	17.69	22.00					
	Low	20.61	18.37	33.00					
16QAM	Mid	20.60	18.30		PASS				
	High	20.37	17.74	1					

LTE Band 2-3MHz									
Madulation	Channel	EIRP (dBm)		Limit (dBm)	Result				
Modulation	Channel	Vertical	Horizontal	LIIIII (UDIII)	Result				
	Low	20.08	18.36						
QPSK	Mid	19.43	17.94		PASS				
	High	19.65	17.85						
	Low	20.32	18.41	33.00					
16QAM	Mid	19.79	18.03		PASS				
	High	19.67	17.85						

LTE Band 2-5MHz									
Modulation	Channel	EIRP (dBm)		Limit (dPm)	Dogult				
Modulation	Channel	Vertical	Horizontal	Limit (dBm)	Result				
	Low	20.15	17.48						
QPSK	Mid	20.22	17.52	00.00	PASS				
	High	20.34	17.33						
	Low	19.56	17.48	33.00					
16QAM	Mid	19.63	17.52		PASS				
	High	20.81	17.43						

LTE Band 2-10MHz									
Modulation	Channel	EIRP	EIRP (dBm)		Result				
iviodulation	Chamer	Vertical	Horizontal	Limit (dBm)	Result				
	Low	19.85	17.52						
QPSK	Mid	19.74	17.43	00.00	PASS				
	High	19.63	17.88						
	Low	19.78	17.06	33.00					
16QAM	Mid	19.92	17.53		PASS				
	High	19.48	17.70						

Report No.: TRE1705022402 Page: 165 of 187 Issued: 2017-06-20

LTE Band 2-15MHz									
Modulation	Channel	EIRP	EIRP (dBm)		Result				
Modulation	Channel	Vertical	Horizontal	Limit (dBm)	Result				
	Low	19.58	16.85						
QPSK	Mid	19.63	17.23	00.00	PASS				
	High	19.88	17.36						
	Low	18.98	16.85	33.00					
16QAM	Mid	19.63	17.23		PASS				
	High	19.73	17.36						

LTE Band 2-20MHz									
Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result				
iviodulation	Channel	Vertical		LIIIII (UDIII)	Result				
	Low	19.43	17.58						
QPSK	Mid	19.52	17.43		PASS				
	High	19.66	17.85						
	Low	18.87	17.46	33.00					
16QAM	Mid	18.69	17.22		PASS				
	High	19.76	17.87						

LTE Band 4-1.4MHz									
Modulation	Channel	EIRP (dBm)		Limit (dDm)	Dooult				
Modulation		Vertical	Horizontal	Limit (dBm)	Result				
	Low	21.43	19.63						
QPSK	Mid	21.52	19.52		PASS				
	High	21.65	19.84	20.00					
	Low	20.92	19.76	30.00					
16QAM	Mid	20.96	19.40		PASS				
	High	21.48	19.72						

LTE Band 4-3MHz								
Modulation	Channel	EIRP	(dBm)	Limit (dPm)	Danish			
Modulation	Channel	Vertical	Horizontal	Limit (dBm)	Result			
	Low	21.06	19.33					
QPSK	Mid	21.36	19.08	20.00	PASS			
	High	21.33	19.45					
	Low	20.50	19.21	30.00				
16QAM	Mid	20.53	18.87		PASS			
	High	21.43	19.47					

Report No.: TRE1705022402 Page: 166 of 187 Issued: 2017-06-20

LTE Band 4-5MHz									
Modulation	Channel	EIRP (dBm)		Limit (dPm)	Result				
iviodulation	Channel	Vertical	Horizontal	Limit (dBm)	Nesuit				
	Low	20.85	18.52						
QPSK	Mid	20.47	18.64	00.00	PASS				
	High	20.76	18.52						
	Low	20.53	18.45	30.00					
16QAM	Mid	20.79	18.70		PASS				
	High	20.50	18.46						

LTE Band 4-10MHz									
Modulation	Channel	EIRP (dBm)		Limit (dRm)	Pocult				
Modulation	Channel	Vertical	Horizontal	Limit (dBm)	Result				
	Low	20.32	18.46						
QPSK	Mid	20.52	18.52		PASS				
	High	20.43	18.74	20.00					
	Low	20.50	18.46	30.00					
16QAM	Mid	20.52	18.52		PASS				
	High	20.52	18.74						

	LTE Band 4-15MHz								
Modulation	Channel	EIRP (dBm)		Limit (dDm)	Dogult				
Modulation	Channel	Vertical	Horizontal	Limit (dBm)	Result				
	Low	20.62	18.47						
QPSK	Mid	20.43	18.52		PASS				
	High	20.52	18.36						
	Low	20.22	18.47	30.00					
16QAM	Mid	20.43	18.52		PASS				
	High	20.42	18.36						

	LTE Band 4-20MHz									
Modulation	Channel	EIRP (dBm)		Limit (dPm)	Result					
Modulation	Channel	Vertical	Horizontal	Limit (dBm)	Result					
	Low	20.43	18.52							
QPSK	Mid	20.52	17.63		PASS					
	High	19.87	17.58							
	Low	20.06	18.44	30.00						
16QAM	Mid	19.97	17.49		PASS					
	High	20.39	17.70							

Report No.: TRE1705022402 Page: 167 of 187 Issued: 2017-06-20

LTE Band 7-5MHz						
Modulation	Channel	EIRP (dBm)		Limit (dDm)	Decult	
		Vertical	Horizontal	Limit (dBm)	Result	
QPSK	Low	20.52	18.74	33.00	PASS	
	Mid	20.43	17.52			
	High	20.66	17.43			
16QAM	Low	20.44	18.80		PASS	
	Mid	20.49	17.46			
	High	20.39	17.49			

LTE Band 7-10MHz							
Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result		
	Onamici	Vertical	Horizontal	Lillit (dDIII)	Result		
QPSK	Low	20.32	17.65	33.00	PASS		
	Mid	20.43	17.94				
	High	20.55	17.55				
16QAM	Low	20.05	17.59		PASS		
	Mid	20.03	17.84				
	High	20.57	17.56				

LTE Band 7-15MHz					
Modulation	Channel	EIRP (dBm)		Limit (dDm)	Daguit
		Vertical	Horizontal	Limit (dBm)	Result
QPSK	Low	19.84	17.43	33.00	PASS
	Mid	19.52	17.25		
	High	19.35	17.36		
16QAM	Low	19.42	17.52		PASS
	Mid	19.85	17.18		
	High	19.67	17.43		

LTE Band 7-20MHz						
Modulation	Channel	EIRP (dBm)		Limit (dDm)	Decult	
Modulation	Channel	Vertical	Horizontal	Limit (dBm)	Result	
QPSK	Low	19.55	17.22	22.00	PASS	
	Mid	19.38	17.17			
	High	19.65	17.33			
16QAM	Low	20.02	17.63	33.00	PASS	
	Mid	19.71	17.10			
	High	20.14	17.50			

Report No.: TRE1705022402 Page: 168 of 187 Issued: 2017-06-20

	LTE Band 17-5MHz								
Madulatian	Channel	ERP	ERP (dBm)		Result				
Modulation	Channel	Vertical	Horizontal	Limit (dBm)	Result				
	Low	21.45	18.45						
QPSK	Mid	21.52	18.52		PASS				
	High	21.36	18.43	24.0					
	Low	21.54	18.38	34.8					
16QAM	Mid	21.45	18.59		PASS				
	High	21.68	18.36						

LTE Band 17-10MHz								
Modulation	Channel	ERP (dBm)		Limit (dBm)	Result			
Modulation	Chamer	Vertical	Horizontal	Lilliit (UBIII)	Kesuit			
	Low	21.33	18.52	-				
QPSK	Mid	20.58	18.35		PASS			
	High	20.74	18.43					
	Low	21.64	18.59	34.8				
16QAM	Mid	21.05	18.47		PASS			
	High	20.77	18.44					


Report No.: TRE1705022402 Page: 169 of 187 Issued: 2017-06-20

## 5.6. Radiated Spurious Emssion

### **LIMIT**

LTE Band 2/4/17:<-13dBm;LTE Band 7<-25dBm

#### **TEST CONFIGURATION**

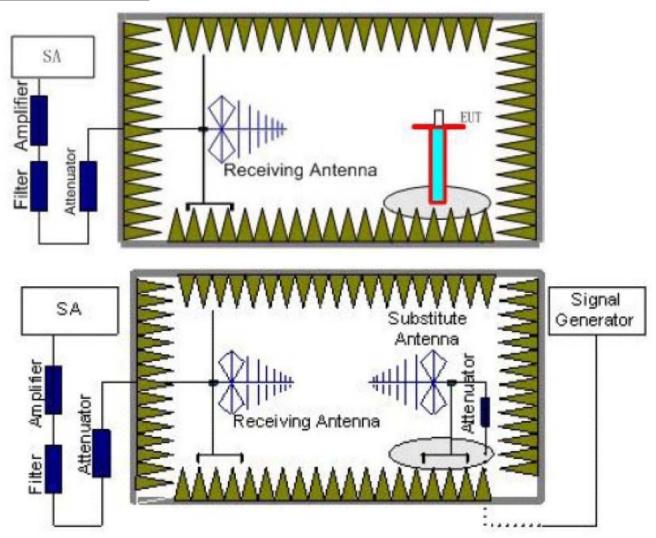

### **TEST RESULTS**

- 1. EUT was placed on a 0.8 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna shall be moved from 1m to 4m. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.
- 2. A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
- 3. The EUT is then put into continuously transmitting mode at its maximum power level during the test.Set Test Receiver or Spectrum RBW=1MHz,VBW=3MHz for above 1GHz and RBW=100kHz,VBW=300kHz for 30MHz to 1GHz, And the maximum value of the receiver should be recorded as (Pr).
- 4. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest isconnected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (PMea) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver

Report No.: TRE1705022402 Page: 170 of 187 Issued: 2017-06-20

reach the previously recorded (Pr). The power of signal source (PMea) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

- 5. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (PcI) ,the Substitution Antenna Gain (Ga) and the Amplifier Gain (PAg) should be recorded after test.
- 6. The measurement results are obtained as described below:

Power(EIRP)=PMea- PAg - Pcl + Ga

We used SMF100A micowave signal generator which signal level can up to 33dBm,so we not used power Amplifier for substituation test; The measurement results are amend as described below:

Power(EIRP)=PMea- Pcl + Ga

7. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.

ERP can be calculated from EIRP by subtracting the gain of the dipole, ERP = EIRP-2.15dBi.

#### **TEST MODE:**

Please refer to the clause 3.3

#### **TEST RESULTS**

Report No.: TRE1705022402 Page: 171 of 187 Issued: 2017-06-20

LTE Band 2-1.4MHz							
Channel	Frequency	Spurious I	Emission	Limit (dDm)	Dec. II		
Chamer	(MHz)	Polarization	Level (dBm)	Limit (dBm)	Result		
	3701.4	Vertical	-45.36				
	5552.1	V	-43.44	-13.00	Pass		
Low	7402.8	V					
LOW	3701.4	Horizontal	-46.43				
	5552.1	Н	-44.52	-13.00	Pass		
	7402.8	Н					
	3760	Vertical	-45.90	-13.00	Pass		
	5640	V	-43.33				
Mid	7520	V					
IVIIU	3760	Horizontal	-46.55				
	5640	Н	-44.64	-13.00	Pass		
	7520	Н					
	3818.6	Vertical	-45.70				
	5727.9	V	-43.14	-13.00	Pass		
High	7637.2	V					
riigii	3818.6	Horizontal	-46.57				
	5727.9	Н	-44.62	-13.00	Pass		
	7637.2	Н					

#### Remark:

- 1. Remark"---" means that the emission level is too low to be measured
- 2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

LTE Band 2-3MHz							
Channel	Frequency	Spurious	Emission	Limit (dDm)	Result		
Channel	(MHz)	Polarization	Level (dBm)	Limit (dBm)	Result		
	3703	Vertical	-44.85				
	5554.5	V	-43.59	-13.00	Pass		
Low	7406	V					
LOW	3703	Horizontal	-44.17				
	5554.5	Н	-43.73	-13.00	Pass		
	7406	Н					
	3760	Vertical	-44.29	-13.00	Pass		
	5640	V	-44.18				
Mid	7520	V					
IVIIU	3760	Horizontal	-44.12		Pass		
	5640	Н	-43.57	-13.00			
	7520	Н					
	3817	Vertical	-45.17				
	5725.5	V	-43.77	-13.00	Pass		
High	7634	V					
High	3817	Horizontal	-45.42				
	5725.5	Н	-43.82	-13.00	Pass		
	7634	Н					

- 1. Remark"---" means that the emission level is too low to be measured
- 2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

TRE1705022402 Report No.: Page: 172 of 187 Issued: 2017-06-20

LTE Band 2-5MHz								
Channal	Frequency	Spurious	Emission	Limit (dDm)	Dooult			
Channel	(MHz)	Polarization	Level (dBm)	Limit (dBm)	Result			
	3705	Vertical	-44.37					
	5557.5	V	-43.76	-13.00	Pass			
Low	7410	V						
LOW	3705	Horizontal	-43.58					
	5557.5	Н	-43.93	-13.00	Pass			
	7410	Н						
	3760	Vertical	-43.71	-13.00	Pass			
	5640	V	-44.45					
Mid	7520	V						
IVIIU	3760	Horizontal	-43.19					
	5640	Н	-45.40	-13.00	Pass			
	7520	Н						
	3815	Vertical	-41.55					
	5722.5	V	-45.09	-13.00	Pass			
High	7630	V						
riigii	3815	Horizontal	-42.11					
	5722.5	Н	-45.20	-13.00	Pass			
	7630	Н						

#### Remark:

- Remark"---" means that the emission level is too low to be measured
- The emission levels of below 1 GHz are very lower than the limit and not show in test report.

	LTE Band 2-10MHz							
Channal	Frequency	Spurious	Emission	Limit (dDm)	Dooult			
Channel	(MHz)	Polarization	Level (dBm)	Limit (dBm)	Result			
	3710	Vertical	-43.82					
	5565	V	-44.06	-13.00	Pass			
Low	7420	V						
Low	3710	Horizontal	-42.47					
	5565	Н	-44.34	-13.00	Pass			
	7420	Н						
	3760	Vertical	-42.69	-13.00	Pass			
	5640	V	-45.24					
Mid	7520	V						
iviiu	3760	Horizontal	-41.79					
	5640	Н	-46.32	-13.00	Pass			
	7520	Н						
	3810	Vertical	-39.92					
	5715	V	-45.96	-13.00	Pass			
High	7620	V						
High	3810	Horizontal	-39.16					
	5715	Н	-45.81	-13.00	Pass			
	7620	Н						

- Remark"---" means that the emission level is too low to be measured
  The emission levels of below 1 GHz are very lower than the limit and not show in test report.

Report No.: TRE1705022402 Page: 173 of 187 Issued: 2017-06-20

LTE Band 2-15MHz							
Channal	Frequency	Spurious	Emission	Limit (dDm)	Dooult		
Channel	(MHz)	Polarization	Level (dBm)	Limit (dBm)	Result		
	3705	Vertical	-42.86				
	5557.5	V	-44.45	-13.00	Pass		
Low	7410	<b>V</b>					
LOW	3705	Horizontal	-41.08				
	5557.5	Н	-44.82	-13.00	Pass		
	7410	Н					
	3760	Vertical	-41.38	-13.00	Pass		
	5640	<b>V</b>	-46.00				
Mid	7520	V					
iviid	3760	Horizontal	-40.20				
	5640	Н	-45.74	-13.00	Pass		
	7520	Н					
	3815	Vertical	-40.64				
	5722.5	V	-45.83	-13.00	Pass		
∐iah	7630	V					
High	3815	Horizontal	-40.89				
	5722.5	Н	-45.88	-13.00	Pass		
	7630	Н					

#### Remark:

- 1. Remark"---" means that the emission level is too low to be measured
- 2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

LTE Band 2-20MHz							
Channal	Frequency	Spurious	Emission	Limeit (dDms)	Doordt		
Channel	(MHz)	Polarization	Level (dBm)	Limit (dBm)	Result		
	3720	Vertical	-41.61				
	5580	V	-44.89	-13.00	Pass		
Low	7440	V					
LOW	3720	Horizontal	-39.60				
	5580	Н	-45.31	-13.00	Pass		
	7440	Н					
	3760	Vertical	-39.93	-13.00	Pass		
	5640	V	-46.64				
Mid	7520	V					
iviiu	3760	Horizontal	-38.59				
	5640	Н	-47.53	-13.00	Pass		
	7520	Н					
	3800	Vertical	-37.06				
	5700	V	-47.24	-13.00	Pass		
High	7600	V					
riigii	3800	Horizontal	-38.48				
	5700	Н	-47.54	-13.00	Pass		
	7600	Н					

- 1. Remark"---" means that the emission level is too low to be measured
- 2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

Report No.: TRE1705022402 Page: 174 of 187 Issued: 2017-06-20

LTE Band 4-1.4MHz							
Channel	Frequency	Spurious	Emission	Limit (dDm)	Result		
Chamilei	(MHz)	Polarization	Level (dBm)	Limit (dBm)	Result		
	3421.4	Vertical	-42.34				
	5132.1	V	-40.52	-13.00	Pass		
Low	6842.8	V					
LOW	3421.4	Horizontal	-45.36				
	5132.1	Н	-44.58	-13.00	Pass		
	6842.8	Н					
	3465	Vertical	-42.48	-13.00	Pass		
	5197.5	<b>V</b>	-40.39				
Mid	6930	V					
iviid	3465	Horizontal	-45.19				
	5197.5	Н	-44.44	-13.00	Pass		
	6930	Н					
	3508.6	Vertical	-42.70				
	5262.9	V	-40.61	-13.00	Pass		
Lliah	7017.2	V					
High	3508.6	Horizontal	-45.22				
	5262.9	Н	-44.47	-13.00	Pass		
	7017.2	Н					

### Remark:

- 1. Remark"---" means that the emission level is too low to be measured
- 2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

LTE Band 4-3MHz							
Channal	Frequency	Spurious Emission		Lineit (dDne)	Danult		
Channel	(MHz)	Polarization	Level (dBm)	Limit (dBm)	Result		
	3423	Vertical	-42.94				
	5134.5	V	-40.32	-13.00	Pass		
Low	6846	V					
LOW	3423	Horizontal	-44.99				
	5134.5	Н	-44.40	-13.00	Pass		
	6846	Н					
	3465	Vertical	-43.08	-13.00	Pass		
	5197.5	V	-40.46				
Mid	6930	V					
IVIIU	3465	Horizontal	-44.81				
	5197.5	Н	-44.55	-13.00	Pass		
	6930	Н					
	3507	Vertical	-43.34				
	5260.5	V	-40.23	-13.00	Pass		
High	7014	V					
High	3423	Horizontal	-44.63				
	5134.5	Н	-44.71	-13.00	Pass		
	6846	Н					

- 1. Remark"---" means that the emission level is too low to be measured
- 2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

Report No.: TRE1705022402 Page: 175 of 187 Issued: 2017-06-20

LTE Band 4-5MHz								
Channel	Frequency	Frequency Spurious Emis		Limit (dDm)	D 1			
Channel	(MHz)	Polarization	Level (dBm)	Limit (dBm)	Result			
	3425	Vertical	-43.56					
	5137.5	V	-40.50	-13.00	Pass			
Low	6850	V						
Low	3425	Horizontal	-44.81					
	5137.5	Н	-44.88	-13.00	Pass			
	6850	Н						
	3465	Vertical	-43.43	-13.00	Pass			
	5197.5	V	-40.38					
Mid	6930	V	-					
iviiu	3465	Horizontal	-44.63					
	5197.5	Н	-44.74	-13.00	Pass			
	6930	Н						
	3505	Vertical	-43.67					
	5257.5	V	-40.59	-13.00	Pass			
High	7010	V	-					
riigii	3505	Horizontal	-44.76		_			
	5257.5	Н	-44.85	-13.00	Pass			
	7010	Н						

## Remark:

- 1. Remark"---" means that the emission level is too low to be measured
- 2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

LTE Band 4-10MHz							
Oh a maal	Frequency	Spurious Emission		Lineit (dDne)	Danilt		
Channel	(MHz)	Polarization	Level (dBm)	Limit (dBm)	Result		
	3430	Vertical	-43.01				
	5145	V	-40.80	-13.00	Pass		
Low	6860	V					
LOW	3430	Horizontal	-44.34				
	5145	Н	-44.50	-13.00	Pass		
	6860	Н					
	3465	Vertical	-43.23	-13.00	Pass		
	5197.5	V	-41.00				
Mid	6930	V					
iviid	3465	Horizontal	-44.44				
	5197.5	Н	-44.58	-13.00	Pass		
	6930	Н	-				
	3500	Vertical	-43.09				
	5250	V	-40.88	-13.00	Pass		
Lliah	7000	V	-				
High	3500	Horizontal	-44.27				
	5250	Н	-44.43	-13.00	Pass		
	7000	Н			. 330		

- 1. Remark"---" means that the emission level is too low to be measured
- 2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

Report No.: TRE1705022402 Page: 176 of 187 Issued: 2017-06-20

	LTE Band 4-15MHz								
Channal	Frequency	Spurious	Emission	Limit (dDm)	Dooult				
Channel	(MHz)	Polarization	Level (dBm)	Limit (dBm)	Result				
	3435	Vertical	-42.05						
	5152.5	V	-41.19	-13.00	Pass				
Low	6870	V							
LOW	3435	Horizontal	-44.66		Pass				
	5152.5	Н	-44.06	-13.00					
	6870	Н							
	3465	Vertical	-42.35		Pass				
	5197.5	<b>V</b>	-41.46	-13.00					
Mid	6930	<b>V</b>							
IVIIU	3465	Horizontal	-44.56						
	5197.5	Н	-43.98	-13.00	Pass				
	6930	Н							
	3490	Vertical	-42.49						
	5235	<b>V</b>	-41.59	-13.00	Pass				
High	6980	V							
riigii	3490	Horizontal	-44.51						
	5235	Н	-43.92	-13.00	Pass				
	6980	Н							

#### Remark:

- 1. Remark"---" means that the emission level is too low to be measured
- 2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

	LTE Band 4-20MHz								
Channel	Frequency	Spurious	Emission	Limit (dDm)	Limit (IDm)				
Channel	(MHz)	Polarization	Level (dBm)	Limit (dBm)	Result				
	3440	Vertical	-40.80						
	5160	V	-42.03	-13.00	Pass				
Low	6880	V							
Low	3440	Horizontal	-44.09		Pass				
	5160	Н	-44.28	-13.00					
	6880	Н							
	3465	Vertical	-40.48		Pass				
	5197.5	V	-42.20	-13.00					
Mid	6930	V							
iviiu	3465	Horizontal	-44.26						
	5197.5	Η	-44.14	-13.00	Pass				
	6930	Η							
	3490	Vertical	-40.25						
	5235	<b>V</b>	-44.07	-13.00	Pass				
<b>⊔</b> iah	6980	V							
High	3490	Horizontal	-43.78						
	5235	Н	-43.98	-13.00	Pass				
	6980	Η		1					

- 1. Remark"---" means that the emission level is too low to be measured
- 2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

Report No.: TRE1705022402 Page: 177 of 187 Issued: 2017-06-20

LTE Band 7-5MHz								
Channel	Frequency	Spurious I	Emission	Limit (dDm)	Result			
Chamilei	(MHz)	Polarization	Level (dBm)	Limit (dBm)	Result			
	5005	Vertical	-42.55					
	7507.5	V	-43.47	-25.00	Pass			
Low	10010	V						
LOW	5005	Horizontal	-45.85					
	7507.5	Н	-50.16	-25.00	Pass			
	10010	Н						
	5070	Vertical	-43.47					
	7605	V	-44.28	-25.00	Pass			
Mid	10140	V						
IVIIU	5070	Horizontal	-46.80					
	7605	Н	-43.55	-25.00	Pass			
	10140	Н						
	5135	Vertical	-42.74					
	7702.5	V	-43.07	-25.00	Pass			
High	10270	V						
riigii	5135	Horizontal	-46.46					
	7702.5	Н	-43.14	-25.00	Pass			
	10270	Н						

#### Remark:

- Remark"---" means that the emission level is too low to be measured
- 1. 2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

	LTE Band 7-10MHz								
Channel	Frequency	Spurious	Emission	Limit (dDm)	Dooult				
Channel	(MHz)	Polarization	Level (dBm)	Limit (dBm)	Result				
	5010	Vertical	-42.61						
	7515	V	-43.41	-25.00	Pass				
Low	10020	V							
LOW	5010	Horizontal	-46.10						
	7515	Н	-50.21	-25.00	Pass				
	10020	Н							
	5070	Vertical	-42.81		Pass				
	7605	V	-43.59	-25.00					
Mid	10140	V							
IVIIU	5070	Horizontal	-45.23						
	7605	Н	-44.25	-25.00	Pass				
	10140	Н							
	5130	Vertical	-43.47						
	7695	V	-44.68	-25.00	Pass				
High	10260	V							
riigii	5130	Horizontal	-44.96						
	7695	Н	-44.74	-25.00	Pass				
	10260	Н							

- 1. Remark"---" means that the emission level is too low to be measured
- The emission levels of below 1 GHz are very lower than the limit and not show in test report.

Report No.: TRE1705022402 Page: 178 of 187 Issued: 2017-06-20

	LTE Band 7-15MHz								
Channel	Frequency	Spurious	Emission	Limit (dDm)	Dooult				
Channel	(MHz)	Polarization	Level (dBm)	Limit (dBm)	Result				
	5015	Vertical	-42.55						
	7522.5	V	-43.47	-25.00	Pass				
Low	10030	V							
LOW	5015	Horizontal	-45.84						
	7522.5	Н	-50.16	-25.00	Pass				
	10030	Н							
	5070	Vertical	-42.34						
	7605	V	-43.29	-25.00	Pass				
Mid	10140	V							
iviiu	5070	Horizontal	-46.94						
	7605	Н	-42.44	-25.00	Pass				
	10140	Н							
	5125	Vertical	-41.49						
	7687.5	V	-41.89	-25.00	Pass				
∐iah	10250	V							
High	5125	Horizontal	-46.49		_				
	7687.5	Н	-41.98	-25.00	Pass				
	10250	Н							

## Remark:

- 1. Remark"---" means that the emission level is too low to be measured
- 2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

	LTE Band 7-20MHz								
Channel	Frequency	Spurious	Emission	Limit (dDm)	Result				
Channel	(MHz)	Polarization	Level (dBm)	Limit (dBm)	Result				
	5015	Vertical	-42.48						
	7522.5	V	-43.54	-25.00	Pass				
Low	10030	V							
LOW	5015	Horizontal	-45.55						
	7522.5	Н	-50.09	-25.00	Pass				
	10030	Н							
	5070	Vertical	-42.25		Pass				
	7605	V	-43.34	-25.00					
Mid	10140	V							
IVIIU	5070	Horizontal	-46.30						
	7605	Н	-42.76	-25.00	Pass				
	10140	Н							
	5125	Vertical	-41.68						
	7687.5	V	-42.39	-25.00	Pass				
High	10250	V							
підіі	5125	Horizontal	-46.09						
	7687.5	Н	-42.43	-25.00	Pass				
	10250	Н							

- 1. Remark"---" means that the emission level is too low to be measured
- 2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

Report No.: TRE1705022402 Page: 179 of 187 Issued: 2017-06-20

	LTE Band 17-5MHz								
Channel	Frequency	Spurious	Emission	Limit (dBm)	Result				
Chamilei	(MHz)	Polarization	Level (dBm)	Lilliit (ubili)	Result				
	1413	Vertical	-37.43						
	2119.5	V	-40.58	-13.00	Pass				
Low	2826	V							
LOW	1413	Horizontal	-41.36						
	2119.5	Н	-44.55	-13.00	Pass				
	2826	Н							
	1420	Vertical	-37.58		Pass				
	2130	V	-40.72	-13.00					
Mid	2840	V							
IVIIU	1420	Horizontal	-41.51						
	2130	Н	-44.67	-13.00	Pass				
	2840	Н							
	1427	Vertical	-37.37						
	2140.5	V	-40.53	-13.00	Pass				
Lliah	2854	V	-		_				
High	1427	Horizontal	-41.55						
	2140.5	Н	-44.71	-13.00	Pass				
	2854	Н							

#### Remark:

- 1. 2. Remark"---" means that the emission level is too low to be measured
- The emission levels of below 1 GHz are very lower than the limit and not show in test report.

	LTE Band 17-10MHz								
Channal	Frequency	Spurious	Emission	Lineit (dDne)	Danult				
Channel	(MHz)	Polarization	Level (dBm)	Limit (dBm)	Result				
	1418	Vertical	-37.47						
	2127	V	-40.54	-13.00	Pass				
Low	2836	V							
LOW	1418	Horizontal	-41.53						
	2127	H	-44.59	-13.00	Pass				
	2836	Н							
	1420	Vertical	-37.61		Pass				
	2130	V	-40.66	-13.00					
Mid	2840	V							
IVIIG	1420	Horizontal	-41.28						
	2130	Н	-44.80	-13.00	Pass				
	2840	Н							
	1422	Vertical	-38.50						
	2133	V	-42.14	-13.00	Pass				
High	2844	V							
riigii	1422	Horizontal	-42.76						
	2133	Н	-46.20	-13.00	Pass				
	2844	Н							

- 1. Remark"---" means that the emission level is too low to be measured
- The emission levels of below 1 GHz are very lower than the limit and not show in test report.


Report No.: TRE1705022402 Page: 180 of 187 Issued: 2017-06-20

# 5.7. Frequency stability V.S. Temperature measurement

#### LIMIT

2.5ppm

#### **TEST CONFIGURATION**

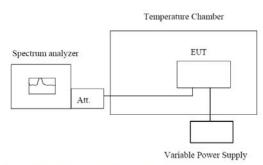

Note: Measurement setup for testing on Antenna connector

#### **TEST PROCEDURE**

- 1. The equipment under test was connected to an external DC power supply and input rated voltage.
- 2. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators.
- 3. The EUT was placed inside the temperature chamber.
- 4. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 25°C operating frequency as reference frequency.
- 5. Turn EUT off and set the chamber temperature to -30°C. After the temperature stabilized for approximately 30 minutes recorded the frequency.
- Repeat step measure with 10°C increased per stage until the highest temperature of +50°C reached.

#### **TEST MODE:**

Please refer to the clause 3.3

#### **TEST RESULTS**

Report No.: TRE1705022402 Page: 181 of 187 Issued: 2017-06-20

Re	ference Frequency	y: LTE Band	l 2 Middle ch	nannel=188	0MHz,20MHz	Bandwidth	
Dawar averella I	Tamamarativas		Freque	ncy error		l inst	
Power supplied (Vdc)	Temperature (°C)	QP	SK	16	6QAM	Limit (ppm)	Result
(140)	( 0)	Hz	ppm	Hz	ppm	(PPIII)	
	-30	14	0.0074	22	0.0117		
	-20	16	0.0085	21	0.0112	_	
	-10	15	0.0080	20	0.0106		
	0	17	0.0090	23	0.0122		
3.80	10	18	0.0096	21	0.0112	2.50	Pass
	20	19	0.0101	19	0.0101		
	30	16	0.0085	24	0.0128		
	40	17	0.0090	21	0.0112	1	
	50	15	0.0080	23	0.0122		
Ref	erence Frequency	: LTE Band	4 Middle cha	annel=1732	2.5MHz,20MHz	Bandwidth	
D	T		Freque	ncy error		1.1	
Power supplied (Vdc)	Temperature (°C)	QP	SK	16	6QAM	Limit (ppm)	Result
(vuc)	( 0)	Hz	ppm	Hz	ppm	(ррііі)	
	-30	16	0.0092	19	0.0110		
	-20	17	0.0098	18	0.0104		
	-10	18	0.0104	16	0.0092		
	0	17	0.0098	15	0.0087	2.50	Pass
3.80	10	14	0.0081	16	0.0092		
	20	15	0.0087	18	0.0104		
	30	17	0.0098	16	0.0092		
	40	16	0.0092	15	0.0087		
	50	18	0.0104	17	0.0098		
Re	ference Frequency	y: LTE Band	7 Middle ch	annel=253	5MHz,20MHz	Bandwidth	
Dames and line	T		Freque	ncy error		Linet	
Power supplied (Vdc)	Temperature (°C)	QP	SK	16	6QAM	Limit (ppm)	Result
(vao)	( 0)	Hz	ppm	Hz	ppm	(ррііі)	
	-30	21	0.0083	20	0.0079		
	-20	20	0.0079	18	0.0071		
	-10	19	0.0075	19	0.0075		
3.80	0	17	0.0067	18	0.0071		
	10	17	0.0067	16	0.0063	2.50	Pass
	20	16	0.0063	17	0.0067		
	30	18	0.0071	16	0.0063		
	40	19	0.0075	18	0.0071		
	50	17	0.0067	19	0.0075		

Report No.: TRE1705022402 Page: 182 of 187 Issued: 2017-06-20

Re	Reference Frequency: LTE Band 17 Middle channel=710MHz,10MHz Bandwidth								
Damananaliad	T		Frequ	ency error		l imais			
Power supplied (Vdc)	Temperature (°C)	QF	PSK	16	QAM	Limit (ppm)	Result		
(٧٥٥)	( 0)	Hz	ppm	Hz	ppm	(рріп)			
	-30	16	0.0225	19	0.0268				
	-20	17	0.0239	17	0.0239				
	-10	18	0.0254	16	0.0225				
	0	16	0.0225	18	0.0254				
3.80	10	19	0.0268	19	0.0268	2.50	Pass		
	20	15	0.0211	16	0.0225				
	30	16	0.0225	15	0.0211				
	40	17	0.0239	18	0.0254				
	50	16	0.0225	16	0.0225				


Report No.: TRE1705022402 Page: 183 of 187 Issued: 2017-06-20

# 5.8. Frequency stability V.S. Voltagemeasurement

## LIMIT

2.5ppm

#### **TEST CONFIGURATION**

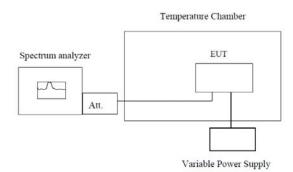

Note: Measurement setup for testing on Antenna connector

#### **TEST PROCEDURE**

- 1. Set chamber temperature to 25°C. Use a variable DC power source topower the EUT and set the voltage to rated voltage.
- 2. Set the spectrum analyzer RBW lowenough to obtain the desired frequency resolution and recorded the frequency.
- 3. Reduce the input voltage to specified extreme voltage variation (+/- 15%) and endpoint, recordthe maximum frequency change.

#### **TEST MODE:**

Please refer to the clause 3.3

#### **TEST RESULTS**

Report No.: TRE1705022402 Page: 184 of 187 Issued: 2017-06-20

Refe	erence Frequenc	y: LTE Ban	d 2 Middle c	hannel=1880	OMHz,20MHz	Bandwidth	
	Power		Frequ	ency error		Limit	Result
Temperature (°C)	supplied	QF	PSK	16QAM		(ppm)	
	(Vdc)	Hz	ppm	Hz	ppm	(PP111)	
	4.35	16	0.0085	17	0.0090		
25	3.80	18	0.0096	18	0.0096	2.50	Pass
	3.60	17	0.0090	15	0.0080		
Refer	ence Frequency	: LTE Band	4 Middle ch	annel=1732	.5MHz,20MHz	Bandwidth	
	Power		Frequ	ency error		1.1	
Temperature (°C)	supplied	QF	PSK	16	QAM	Limit (ppm)	Result
	(Vdc)	Hz	ppm	Hz	ppm	(ррііі)	
	4.35	15	0.0087	14	0.0081		
25	3.80	17	0.0098	16	0.0092	2.50	Pass
	3.60	18	0.0104	18	0.0104		
Refe	erence Frequenc	y: LTE Ban	d 7 Middle c	hannel=253	5MHz,20MHz	Bandwidth	
	Power	Freque		ency error		1	
Temperature (°C)	supplied	QPSK 16QAM		QAM	Limit (ppm)	Result	
	(Vdc)	Hz	ppm	Hz	ppm	(ppiii)	
	4.35	16	0.0063	17	0.0067		
25	3.80	14	0.0055	19	0.0075	2.50	Pass
	3.60	15	0.0059	15	0.0059		
Refe	erence Frequenc	y: LTE Ban	d 17 Middle	channel=710	OMHz,10MHz	Bandwidth	
	Power		Frequ	ency error			
Temperature (°C)	supplied	QF	PSK	16	QAM	Limit (ppm)	Result
	(Vdc)	Hz	ppm	Hz	ppm	(PPIII)	
	4.35	16	0.0225	17	0.0239		
25	3.80	14	0.0197	14	0.0197	2.50	Pass
	3.60	18	0.0254	15	0.0211		


Report No.: TRE1705022402 Page: 185 of 187 Issued: 2017-06-20

## 5.9. Peak-Average Ratio

**LIMIT** 

13dB

#### **TEST CONFIGURATION**

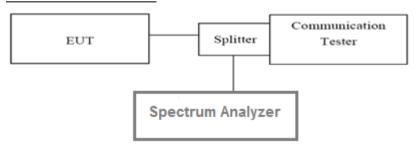

#### **TEST PROCEDURE**

According with KDB 971168

- 1. The signal analyzer's CCDF measurement profile is enabled
- 2. Frequency = carrier center frequency
- 3. Measurement BW > Emission bandwidth of signal
- 4. The signal analyzer was set to collect one million samples to generate the CCDF curve
- 5. The measurement interval was set depending on the type of signal analyzed. Forcontinuoussignals(>98% duty cycle), the measurement interval was set to 1ms. For bursttransmissions, the spectrum analyzer is set to use an internal "RF Burst" trigger that issynced with an incoming pulse and the measurement interval is set to less than the duration of the "on time" of one burst to ensure that energy is only captured during a time in whichthetransmitter is operating at maximum power

#### **TEST MODE:**

Please refer to the clause 3.3

#### **TEST RESULTS**

Report No.: TRE1705022402 Page: 186 of 187 Issued: 2017-06-20

LTE Band 2-20MHz									
Modulation	QP:	SK	16QAM		Limit/dD)	11 x 21/10)			
Channel	1RB#	Full RB#	1RB#	Full RB#	Limit(dB)	Result			
Low	4.68	5.40	4.86	6.02	13.00	Pass			
Mid	4.68	5.66	5.04	6.34	13.00	Pass			
High	High 4.80 5.34 5.12 5.98 13.00 Pas								

LTE Band 4-20MHz						
Modulation	QPSK		16QAM		Limit(dB)	Result
Channel	1RB#	Full RB#	1RB#	Full RB#	LIIIII(UD)	Result
Low	4.50	5.62	4.96	6.24	13.00	Pass
Mid	4.76	5.32	4.86	5.96	13.00	Pass
High	4.88	5.68	5.00	6.28	13.00	Pass


LTE Band 7-20MHz						
Modulation	QPSK		16QAM		Limit/dD\	Result
Channel	1RB#	Full RB#	1RB#	Full RB#	Limit(dB)	Result
Low	4.28	5.66	4.66	6.40	13.00	Pass
Mid	4.94	5.52	5.26	6.16	13.00	Pass
High	4.32	5.26	4.64	6.10	13.00	Pass


LTE Band 17-10MHz						
Modulation	QPSK		16QAM		Lineit/alD\	Doordt
Channel	1RB#	Full RB#	1RB#	Full RB#	Limit(dB)	Result
Low	3.26	5.32	3.52	5.78	13.00	Pass
Mid	2.84	5.26	3.44	5.74	13.00	Pass
High	2.30	5.18	2.98	5.66	13.00	Pass

Report No.: TRE1705022402 Page: 187 of 187 Issued: 2017-06-20

# 6. Test Setup Photos of the EUT

Radiated emission:

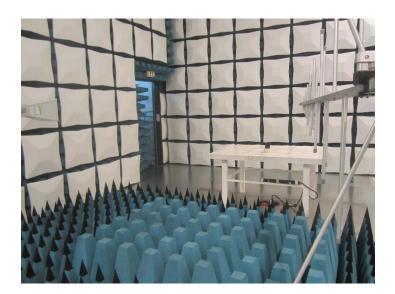

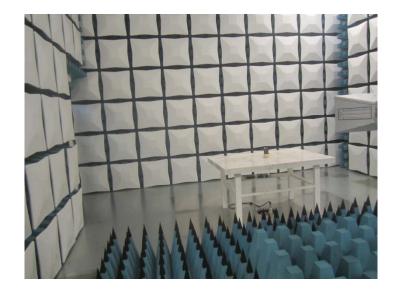

# 7. External and Internal Photos of the EUT

	End of Report
Reference to the test report No.: TRE1705	022401.