



## FCC - TEST REPORT

Report Number : **68.950.22.0962.01** Date of Issue: **2023-04-06**

Model : **DXR-8**

Product Type : **Wireless Digital Video Monitoring System**

Applicant : **STANDARD MERIT INDUSTRIAL LIMITED**

Address : **604 Kalok Building, 720 Nathan Road, Kowloon, Hong Kong**

Manufacturer : **STANDARD MERIT INDUSTRIAL LIMITED**

Address : **604 Kalok Building, 720 Nathan Road, Kowloon, Hong Kong**

Test Result :  **Positive**     **Negative**

Total pages including Appendices : **49**

*Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4.*

# 1 Table of Contents

1	Table of Contents .....	2
2	Details about the Test Laboratory .....	3
3	Description of the Equipment Under Test .....	4
4	Summary of Test Standards .....	5
5	Summary of Test Results.....	6
6	General Remarks .....	7
7	Test Setups .....	8
8	Systems Test Configuration .....	10
9	Technical Requirement .....	11
9.1	Conducted Emission .....	11
9.2	Conducted Peak Output Power .....	16
9.3	20 dB Bandwidth and 99% Occupied Bandwidth .....	19
9.4	Carrier Frequency Separation .....	24
9.5	Number of Hopping Frequencies.....	26
9.6	Dwell Time.....	28
9.7	Spurious RF Conducted Emissions .....	30
9.8	Band Edge Testing.....	36
9.9	Spurious Radiated Emissions for Transmitter .....	41
10	Test Equipment List.....	48
11	System Measurement Uncertainty .....	49

## 2 Details about the Test Laboratory

### Details about the Test Laboratory

Company name: TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch  
Building 12 & 13, Ziheng Wisdomland Business Park, Guankou Erlu, Nantou,  
Nanshan District, Shenzhen, Guangdong, China

Telephone: 86 755 8828 6998  
Fax: 86 755 828 5299

FCC Registration No.: 514049

FCC Designation Number: CN5009

### 3 Description of the Equipment Under Test

Product: Wireless Digital Video Monitoring System

Model no.: DXR-8

FCC ID: 2AAAM-DXR-8PU-3

Rating: 3.7VDC, 1200mAh (Supplied by Rechargeable Li-ion Battery)  
or 5VDC, 550mA (Supplied by external adapter for Charging rechargeable battery)

Adapter Adapter 1 Model: BLJ06W050055P1-U  
Input: 100-240VAC 50/60Hz, 0.2A,  
Output: 5VDC, 550mA  
Manufacturer: Zhongshan Baolijin Electronic Co., Ltd.  
Adapter 2 Model: HP07Z-0500550-CU  
Input: 100-240VAC 50/60Hz, 0.3A,  
Output: 5VDC, 550mA  
Manufacturer: DONGGUAN HP-POWER TECHNOLOGY., LIMITED

RF Transmission Frequency: 2410.875MHz-2471.625MHz

No. of Operated Channel: 19

Modulation: GFSK

Antenna Type: Integrated antenna

Antenna Gain: 0 dBi

Operation Frequency each of channel

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2410.875	6	2427.750	11	2444.625	16	2461.500
2	2414.250	7	2431.125	12	2448.000	17	2464.875
3	2417.625	8	2434.500	13	2451.375	18	2468.250
4	2421.000	9	2437.875	14	2454.750	19	2471.625
5	2424.375	10	2441.250	15	2458.125		

NOTE 1: The above EUT's information is declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

## 4 Summary of Test Standards

Test Standards	
FCC Part 15 Subpart C 10-1-2021 Edition	PART 15 - RADIO FREQUENCY DEVICES Subpart C - Intentional Radiators

All the test methods were according to KDB 558074 D01 15.247 Meas Guidance v05r02 Measurement Guidance and ANSI C63.10 (2013).

## 5 Summary of Test Results

Technical Requirements		
FCC Part 15 Subpart C		
Test Condition		Test Result
§15.207	Conducted emission AC power port	Pass
§15.247(b)(1)	Conducted peak output power	Pass
§15.247(e)	Power spectral density	N/A
§15.247(a)(2)	6dB bandwidth and 99% Occupied Bandwidth	N/A
§15.247(a)(1)	20dB bandwidth and 99% Occupied Bandwidth	Pass
§15.247(a)(1)	Min. of Hopping Channel Carrier Frequency Separation	Pass
§15.247(a)(1)(iii)	Min number of hopping frequencies	Pass
§15.247(a)(1)(iii)	Dwell Time - Average Time of Occupancy	Pass
§15.247(d)	Spurious RF conducted emissions	Pass
§15.247(d)	Band edge	Pass
§15.247(d) & §15.209 &	Spurious radiated emissions for transmitter	Pass
§15.203	Antenna requirement	See note 2

Note 1: N/A=Not Applicable.

Note 2: The EUT uses an integrated antenna, which gain is 0 dBi. In accordance to §15.203, it is considered sufficiently to comply with the provisions of this section.

## 6 General Remarks

### Remarks

This submittal(s) (test report) is intended for FCC ID: 2AAAM-DXR-8PU-3, complies with Section 15.207, 15.209, 15.247 of the FCC Part 15, Subpart C rules

### SUMMARY:

All tests according to the regulations cited on page 5 were

■ - Performed

□ - **Not** Performed

The Equipment Under Test

■ - **Fulfills** the general approval requirements.

□ - **Does not** fulfill the general approval requirements.

Sample Received Date: 2022-10-20

Testing Start Date: 2022-10-20


Testing End Date: 2023-03-28

- TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch -

Reviewed by:


  
John Zhi  
Section Manager

Prepared by:

  
Joe Gu  
Project Engineer


Tested by:




  
Carry Cai  
Test Engineer

## 7 Test Setups


### 7.1 AC Power Line Conducted Emission test setups

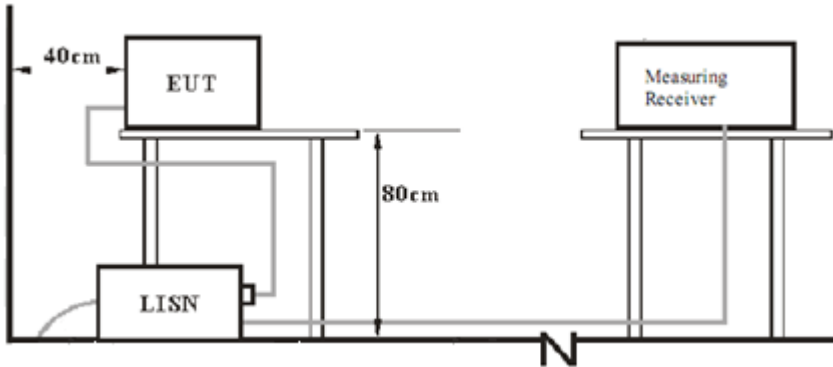

### 7.2 Radiated test setups 9KHz - 30MHz

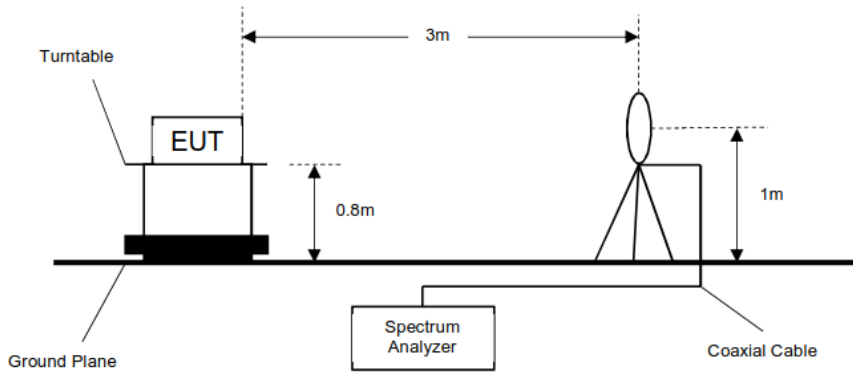


### Below 1GHz

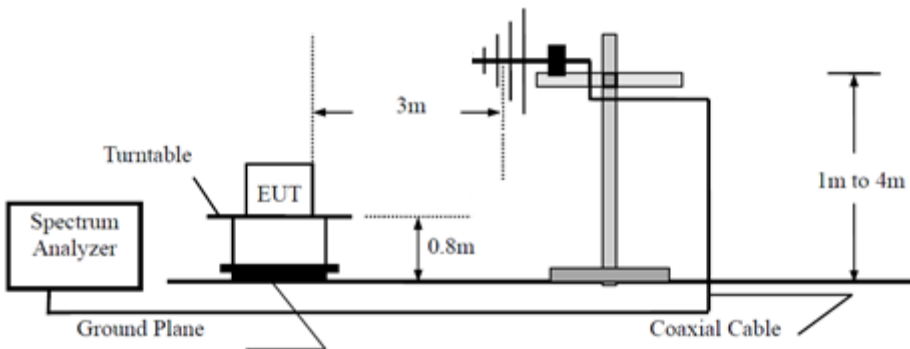




Above 1GHz

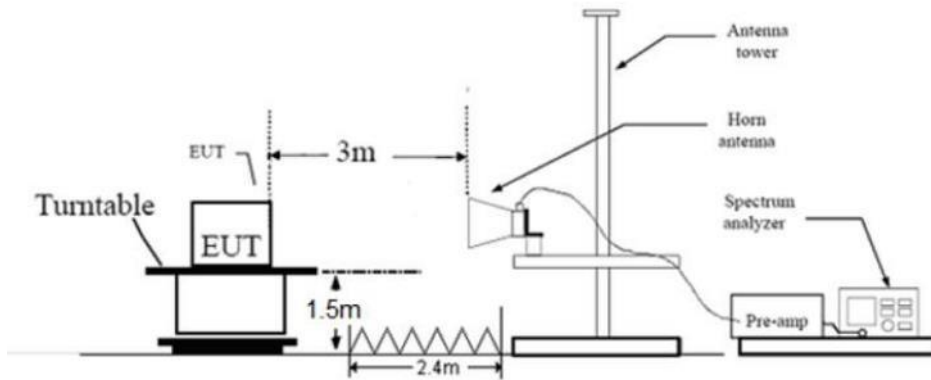

7.3 Conducted RF test setups



## 8 Systems Test Configuration

The system was configured to hopping mode and non-hopping mode.

Hopping mode: typical working mode (normal hopping status)

Non-hopping mode: The system was configured to operate at a signal channel transmitting. The test software allows the configuration and operation at the worst-case duty and the highest transmit power

## 9 Technical Requirement

### 9.1 Conducted Emission

#### Test Method

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. Both sides of AC line were checked for maximum conducted interference.
6. The frequency range from 150 kHz to 30 MHz was searched.
7. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.


#### Limit

Frequency MHz	QP Limit dB $\mu$ V	AV Limit dB $\mu$ V
0.150-0.500	66-56*	56-46*
0.500-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.

## Conducted Emission

Product Type : Wireless Digital Video Monitoring System  
M/N : DXR-8  
Operating Condition : Transmit  
Test Specification : Line  
Comment : AC 120V/60Hz (External adapter)  
Adapter : BLJ06W050055P1-U

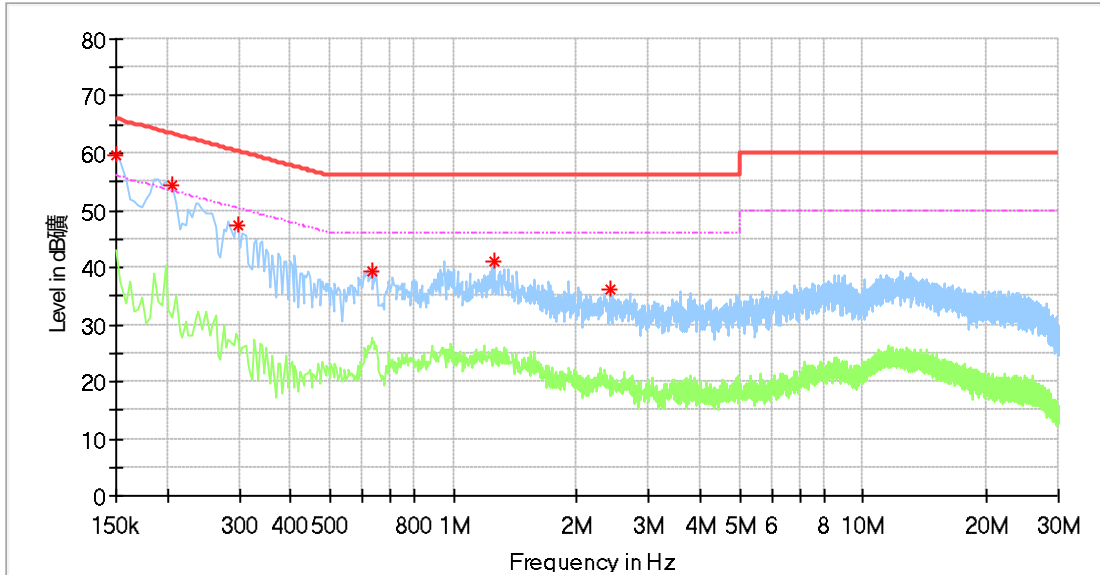

Frequency (MHz)	MaxPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Line	Corr. (dB)
0.150000	59.52	---	66.00	6.48	L1	10.3
0.206000	54.46	---	63.37	8.91	L1	10.3
0.298000	47.38	---	60.30	12.92	L1	10.3
0.630000	39.36	---	56.00	16.64	L1	10.3
1.258000	40.95	---	56.00	15.05	L1	10.3
2.422000	36.10	---	56.00	19.90	L1	10.4

Remark :


Level=Reading Level + Correction Factor

Correction Factor=Cable Loss + LISN Factor

(The Reading Level is recorded by software which is not shown in the sheet)

## Conducted Emission

Product Type : Wireless Digital Video Monitoring System  
M/N : DXR-8  
Operating Condition : Transmit  
Test Specification : Neutral  
Comment : AC 120V/60Hz (External adapter)  
Adapter : BLJ06W050055P1-U

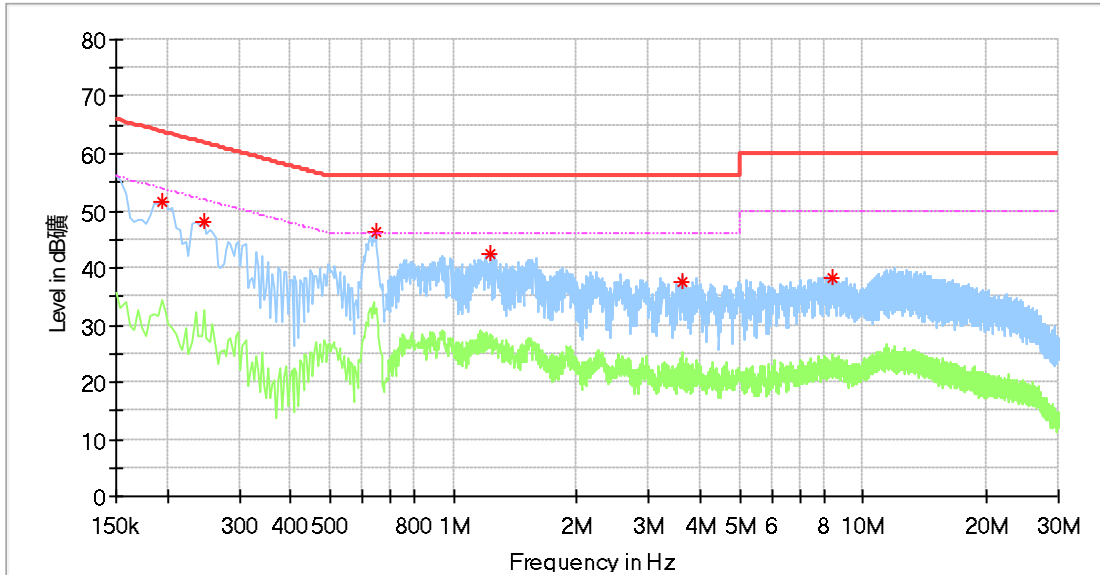

Frequency (MHz)	MaxPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Line	Corr. (dB)
0.194000	51.60	---	63.86	12.27	N	10.3
0.246000	48.06	---	61.89	13.84	N	10.4
0.646000	46.31	---	56.00	9.69	N	10.4
1.234000	42.53	---	56.00	13.47	N	10.5
3.638000	37.57	---	56.00	18.43	N	10.6
8.442000	38.18	---	60.00	21.82	N	10.9

Remark :


Level=Reading Level + Correction Factor

Correction Factor=Cable Loss + LISN Factor

(The Reading Level is recorded by software which is not shown in the sheet)

## Conducted Emission

Product Type : Wireless Digital Video Monitoring System  
M/N : DXR-8  
Operating Condition : Transmit  
Test Specification : Line  
Comment : AC 120V/60Hz (External adapter)  
Adapter : HP07Z-0500550-CU

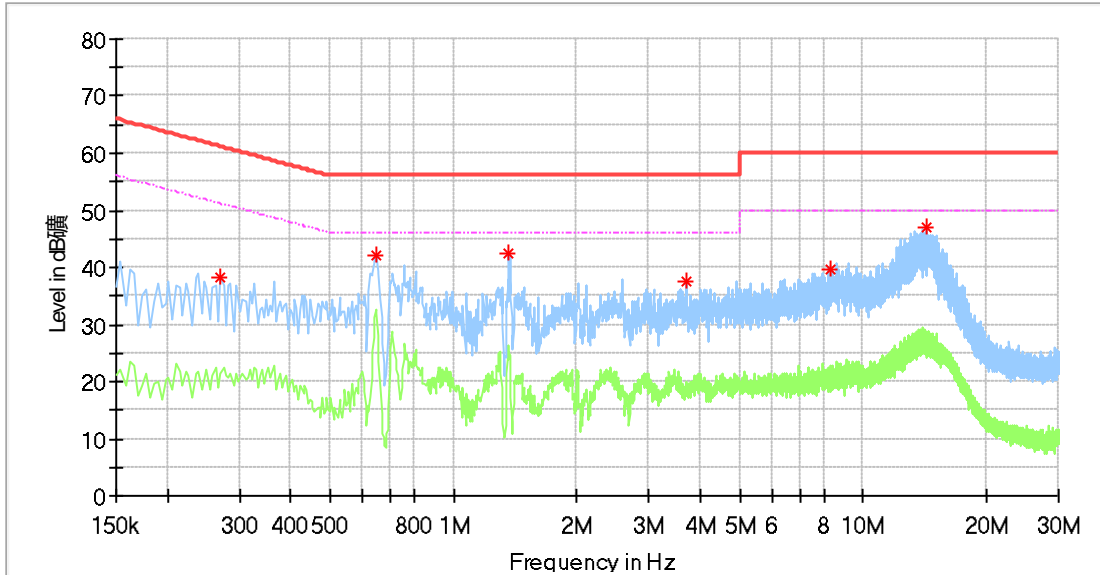

Frequency (MHz)	MaxPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Line	Corr. (dB)
0.270000	38.28	---	61.12	22.84	L1	10.3
0.650000	41.99	---	56.00	14.01	L1	10.3
1.366000	42.33	---	56.00	13.67	L1	10.3
3.690000	37.57	---	56.00	18.43	L1	10.5
8.314000	39.76	---	60.00	20.24	L1	10.7
14.322000	47.06	---	60.00	12.94	L1	10.9

Remark :


Level=Reading Level + Correction Factor

Correction Factor=Cable Loss + LISN Factor

(The Reading Level is recorded by software which is not shown in the sheet)

## Conducted Emission

Product Type : Wireless Digital Video Monitoring System  
 M/N : DXR-8  
 Operating Condition : Transmit  
 Test Specification : Neutral  
 Comment : AC 120V/60Hz (External adapter)  
 Adapter : HP07Z-0500550-CU

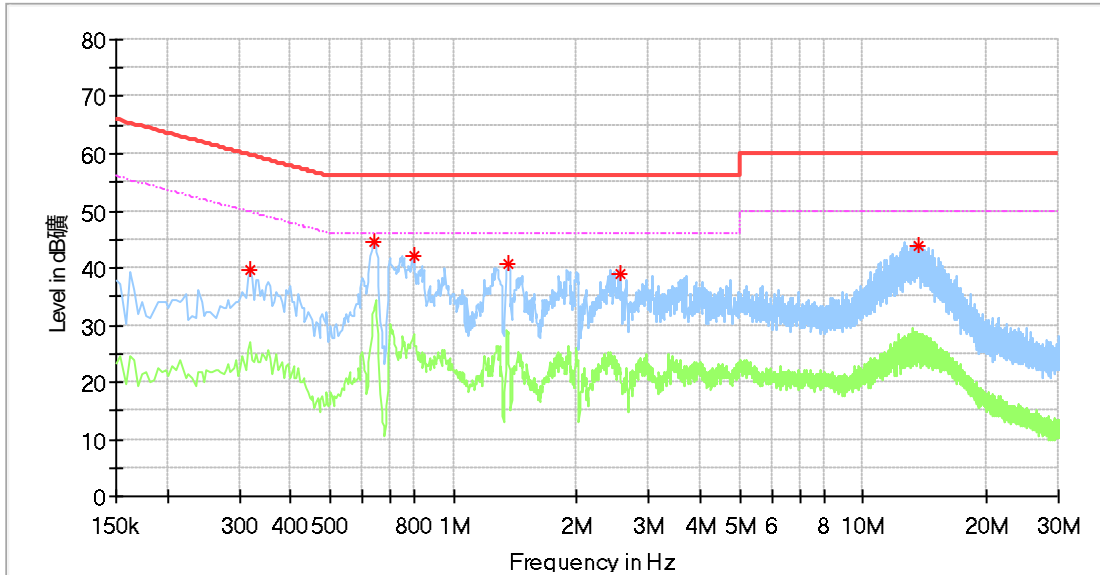

Frequency (MHz)	MaxPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Line	Corr. (dB)
0.318000	39.81	---	59.76	19.94	N	10.4
0.638000	44.45	---	56.00	11.55	N	10.4
0.802000	41.94	---	56.00	14.06	N	10.5
1.358000	40.57	---	56.00	15.43	N	10.5
2.550000	38.78	---	56.00	17.22	N	10.5
13.626000	44.02	---	60.00	15.98	N	11.1

Remark :  
 Level=Reading Level + Correction Factor  
 Correction Factor=Cable Loss + LISN Factor  
 (The Reading Level is recorded by software which is not shown in the sheet)

## 9.2 Conducted Peak Output Power

### Test Method

1. The RF output of EUT was connected to the test receiver by RF cable. The path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously
3. Use the following test receiver settings:  
Span = approximately 5 times the 20dB bandwidth, centered on a hopping channel  
RBW > the 20dB bandwidth of the emission being measured, VBW ≥ RBW,  
Sweep = auto, Detector function = peak, Trace = max hold
4. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power and record the results in the test report.
5. Repeat above procedures until all frequencies measured were complete.

### Limits

According to §15.247 (b) (1), conducted peak output power limit as below:



Frequency Range MHz	Limit W	Limit dBm
2400-2483.5	≤1	≤30




## Conducted Peak Output Power

### Test Result

Frequency MHz	Conducted Peak Output Power dBm	Result
Low channel 2410.875MHz	11.45	Pass
Middle channel 2441.250MHz	11.64	Pass
High channel 2471.625MHz	11.22	Pass

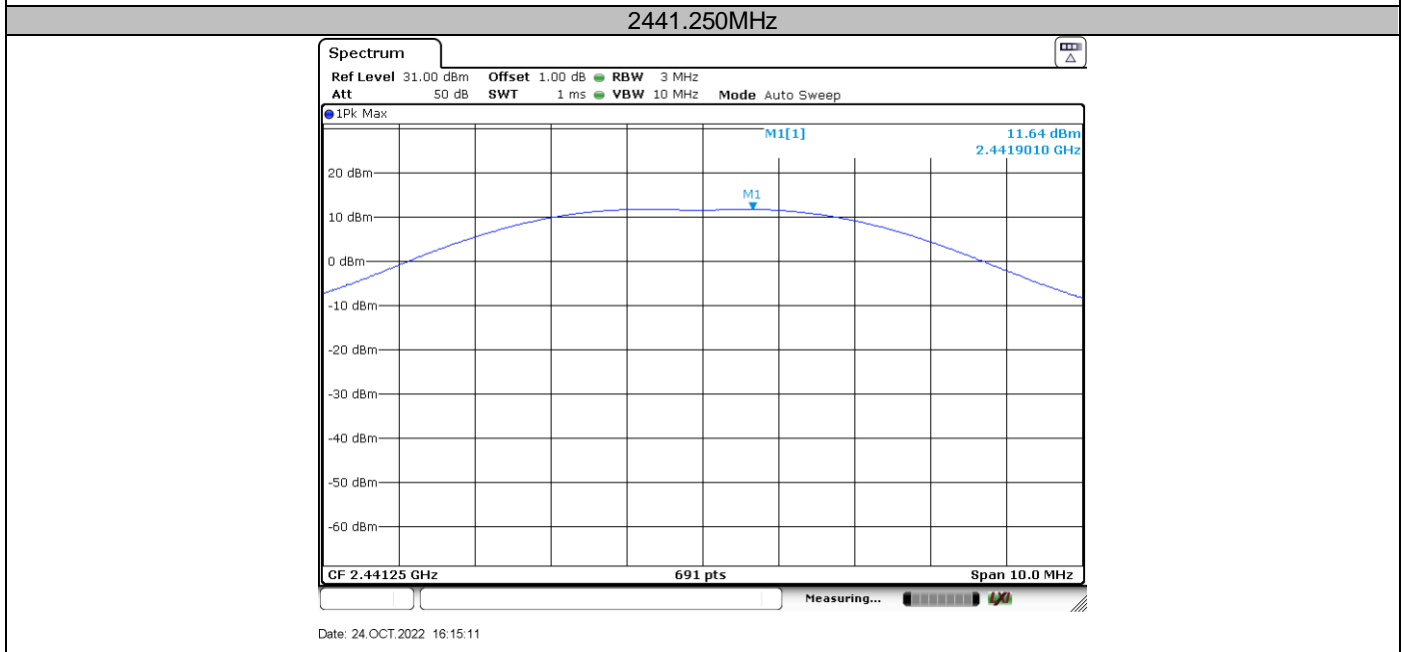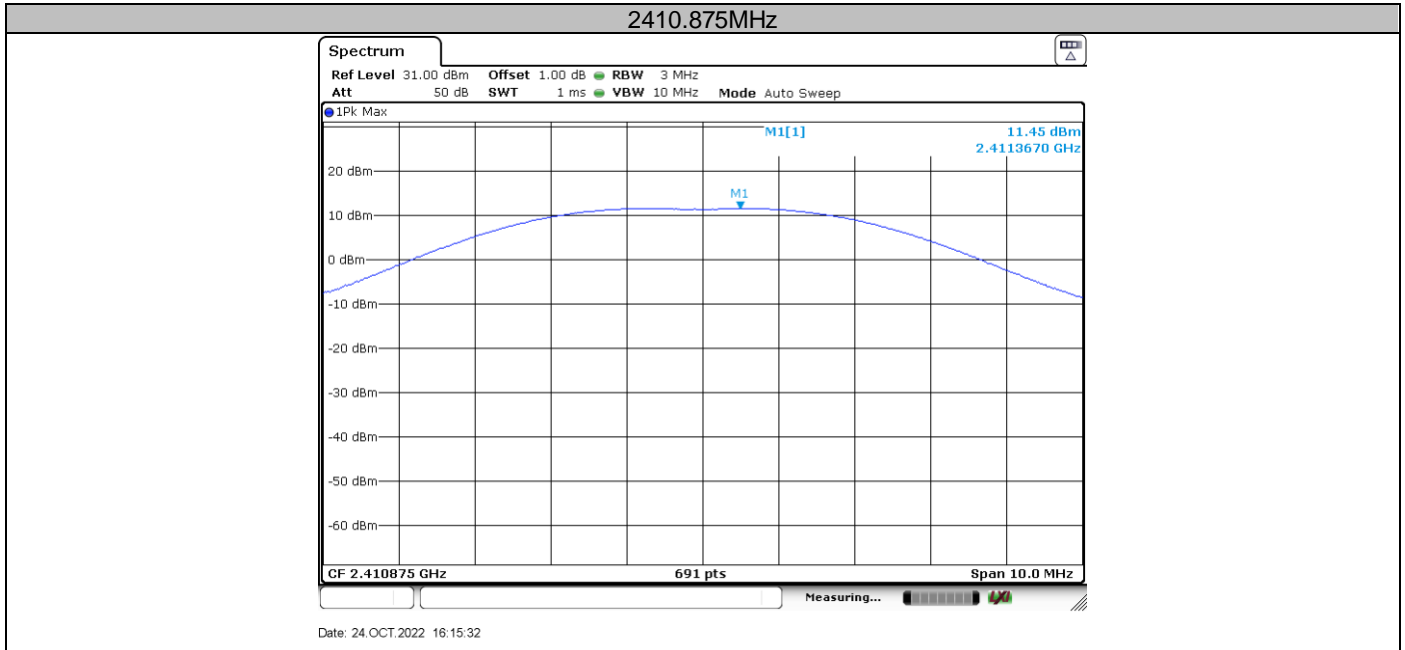

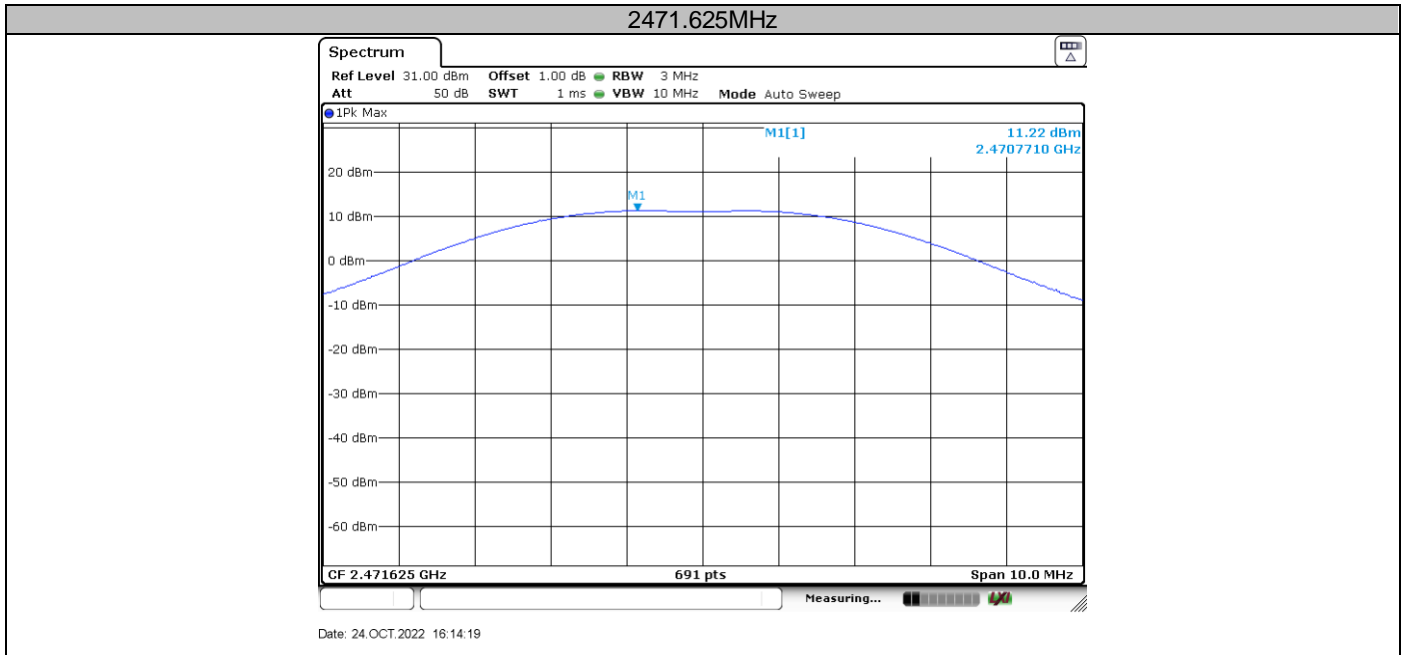

### 9.3 20 dB Bandwidth and 99% Occupied Bandwidth

#### Test Method

20dB bandwidth test:

1. The RF output of EUT was connected to the test receiver by RF cable. The path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously.
3. Use the following test receiver settings:  
Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel  
RBW  $\geq$  1% of the 20 dB bandwidth, VBW  $\geq$  3RBW,  
Sweep = auto, Detector function = peak, Trace = max hold
4. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth. Record the results.
5. Repeat above procedures until all frequencies measured were complete.

Occupied Bandwidth test:

1. Connect EUT test port to test receiver.
2. Use the following spectrum analyzer settings:  
RBW=1% to 5% of the actual occupied, VBW  $\geq$  3RBW, Sweep = auto,  
Detector function = peak, Trace = max hold
3. Use the occupied bandwidth measurement capability of test receiver.
4. Allow the trace to stabilize, record the occupied bandwidth value.

#### Limit

Limit [kHz]

---



N/A


**20 dB bandwidth and 99% Occupied Bandwidth**

## Test result


<b>Frequency MHz</b>	<b>20 dB Bandwidth MHz</b>	<b>99% Bandwidth MHz</b>	<b>Limit MHz</b>	<b>Result</b>
2410.875MHz	3.566	3.485	--	Pass
2441.250MHz	3.577	3.485	--	Pass
2471.625MHz	3.589	3.508	--	Pass

**20 dB Bandwidth**

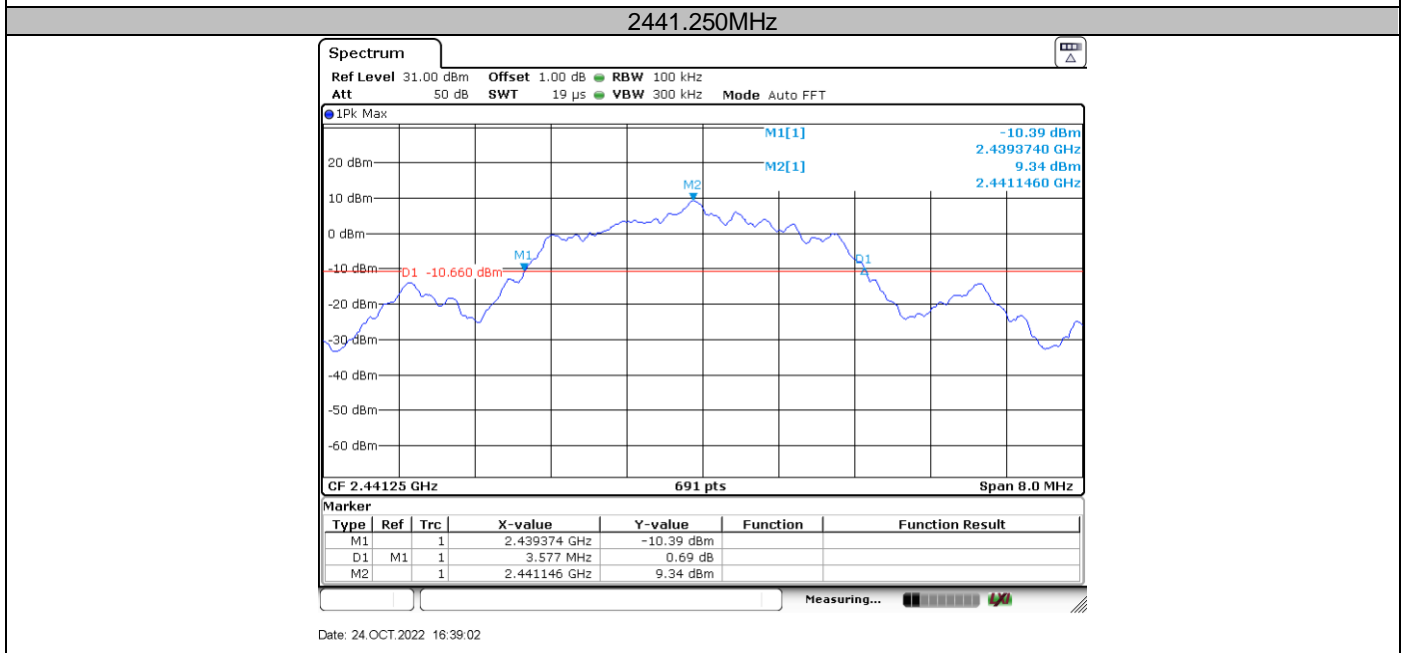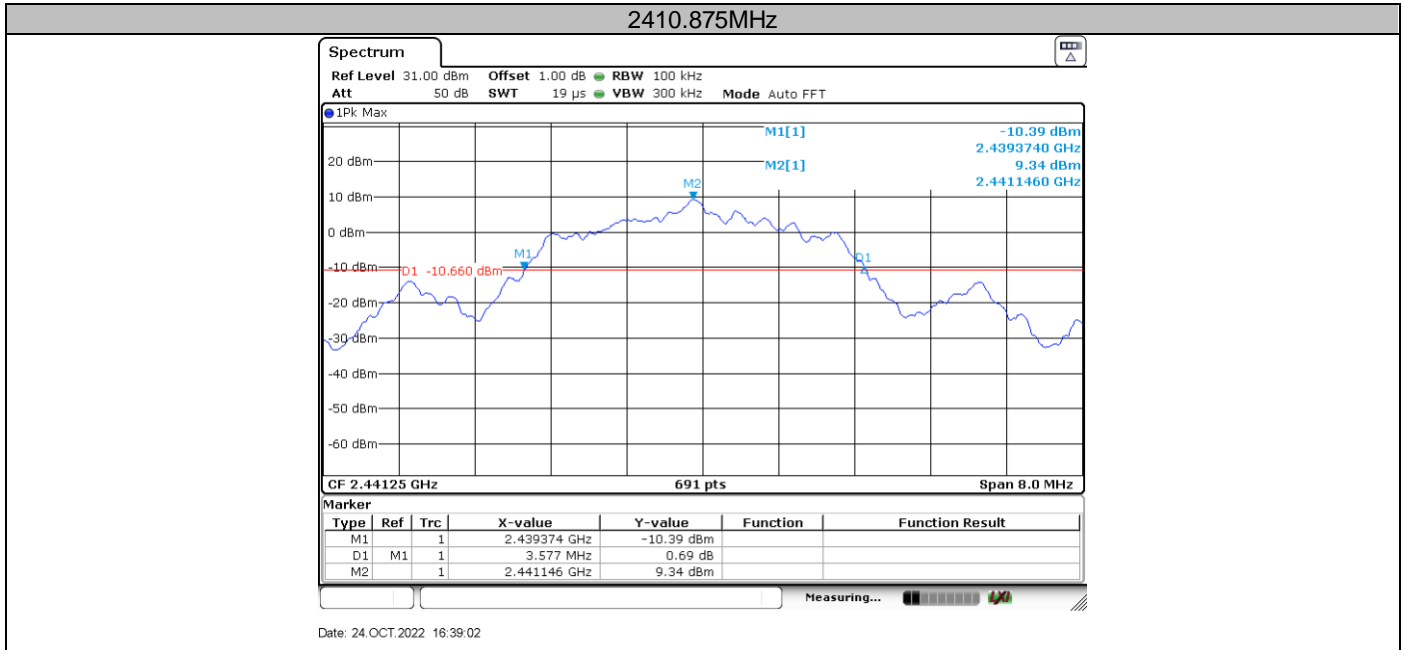


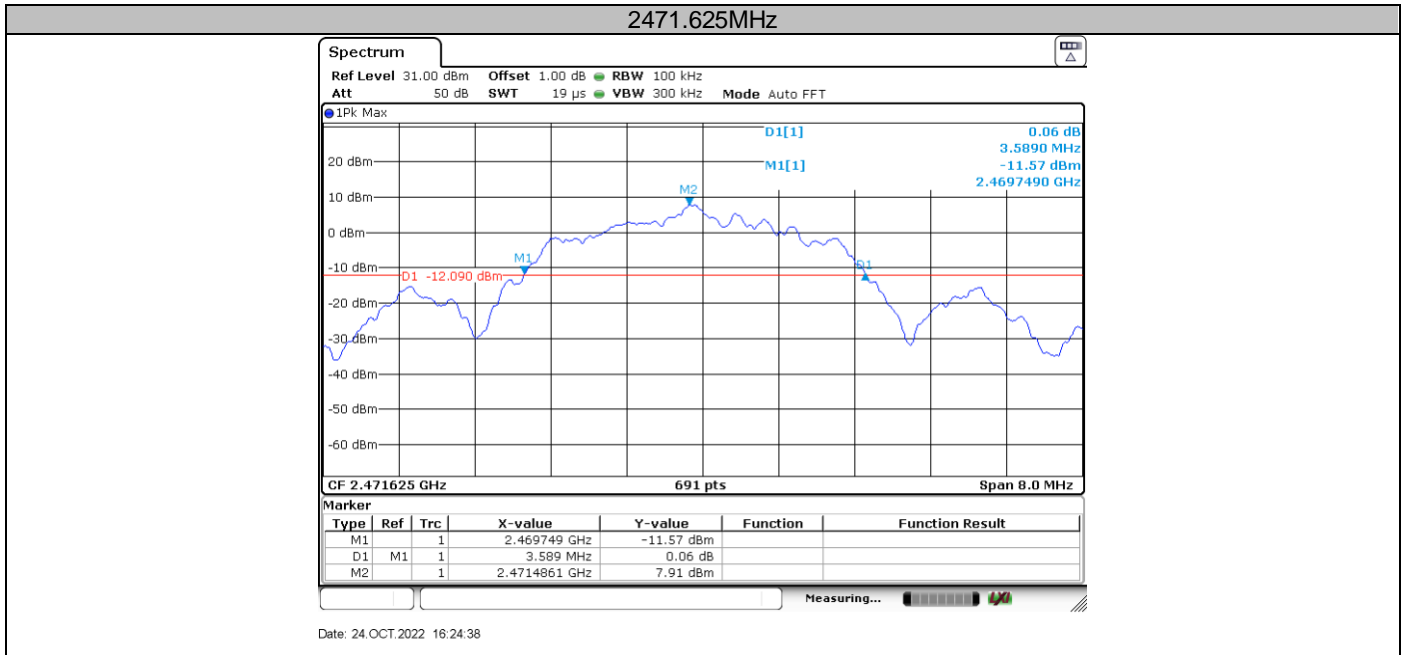

**99% Occupied Bandwidth**

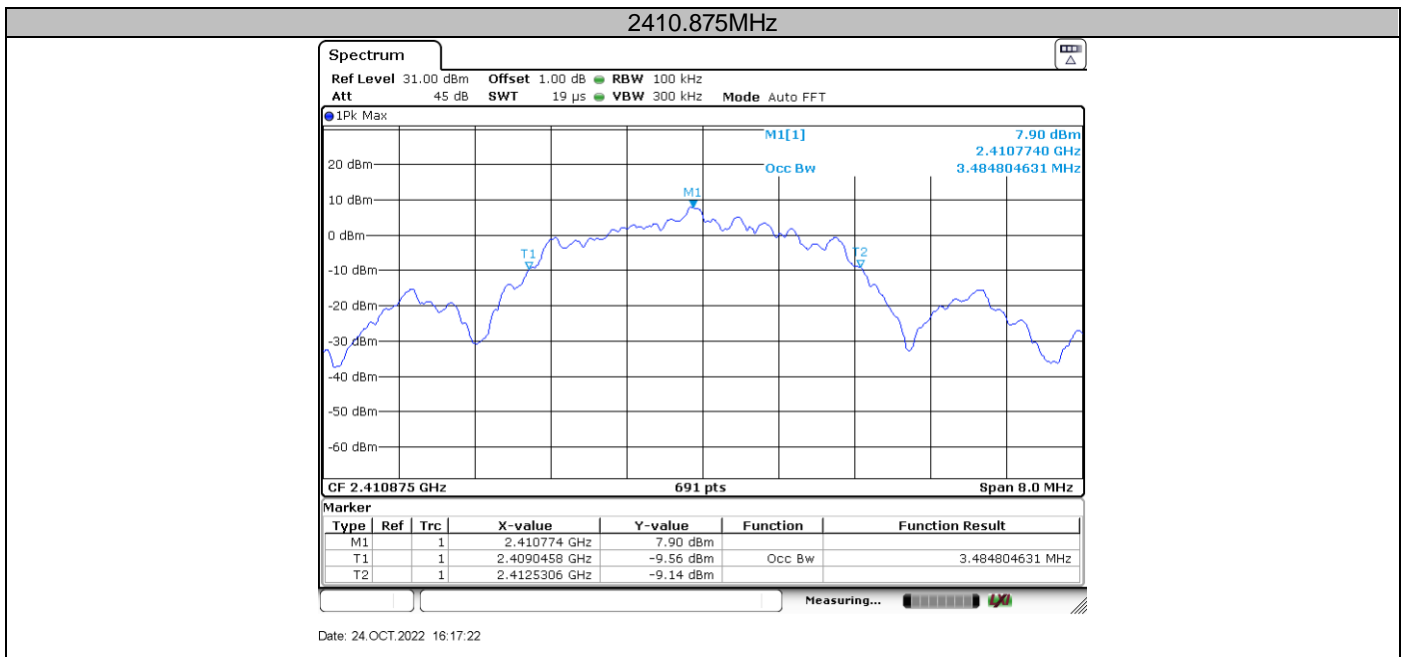


2441.250MHz

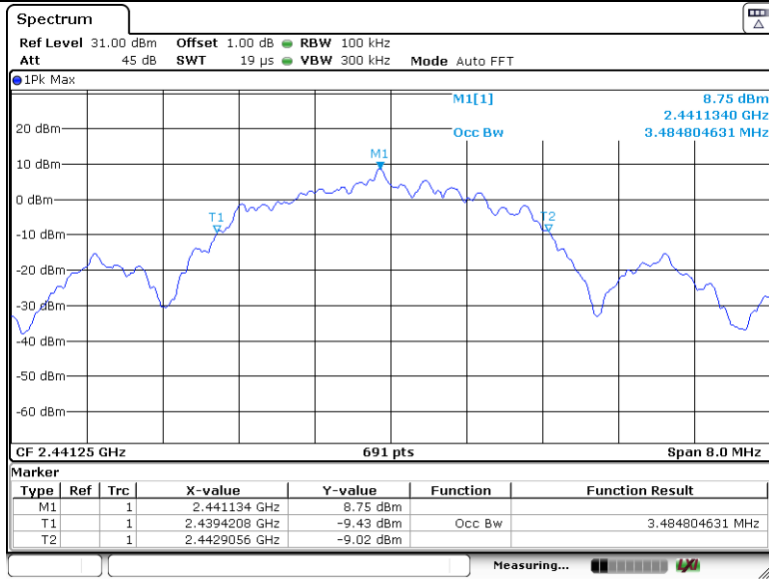

Date: 24.OCT.2022 16:17:38

2471.625MHz

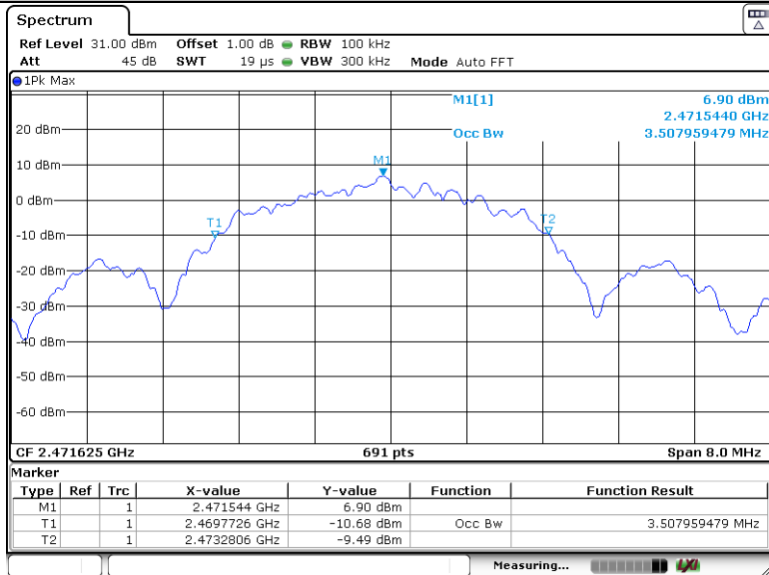

Date: 24.OCT.2022 16:17:55

## 9.4 Carrier Frequency Separation

### Test Method

1. The RF output of EUT was connected to the test receiver by RF cable The path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit to hopping mode.
3. Use the following spectrum analyzer settings:  
Span = wide enough to capture the peaks of two adjacent channels,  $RBW \geq 1\%$  of the span,  $VBW \geq RBW$ , Sweep = auto, Detector function = peak
4. By using the Max-Hold function record the separation of two adjacent channels.
5. Measure the frequency difference of these two adjacent channels by spectrum analyzer marker function. Record the results.
6. Repeat above procedures until all frequencies measured were complete.

### Limit

Limit kHz
$\geq 25\text{kHz}$ or $2/3$ of the 20 dB bandwidth which is greater

### Limit


Frequency MHz	2/3 of 20 dB Bandwidth kHz
2410.875MHz	2377



### Carrier Frequency Separation

Test result: The measurement was performed with the typical configuration (normal hopping status).

Frequency MHz	Carrier Frequency Separation MHz	Result
2410.875MHz	3.381	Pass

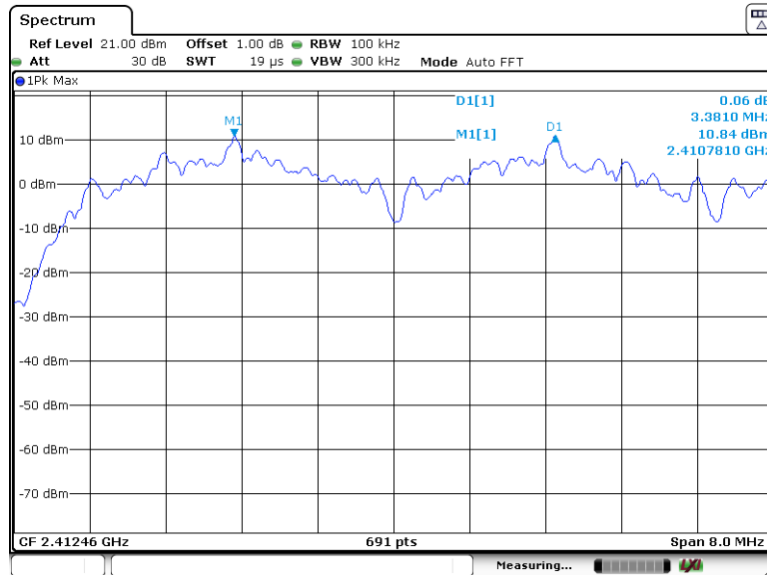

Date: 21.OCT.2022 18:56:14

## 9.5 Number of Hopping Frequencies

### Test Method

1. The RF output of EUT was connected to the test receiver by RF cable. The path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit to hopping mode.
3. Use the following spectrum analyzer settings:  
Span = the frequency band of operation, RBW  $\geq$  1% of the span, VBW  $\geq$  RBW,  
Sweep = auto, Detector function = peak
4. Set the spectrum analyzer on Trace = max hold
5. Allow the trace to stabilize. It may prove necessary to break the span up to sections, in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).


### Limit

Limit  
number  
—————  
 $\geq 15$

### Number of Hopping Frequencies

Test result: The measurement was performed with the typical configuration (normal hopping status).

Number of hopping frequencies	Result
19	Pass

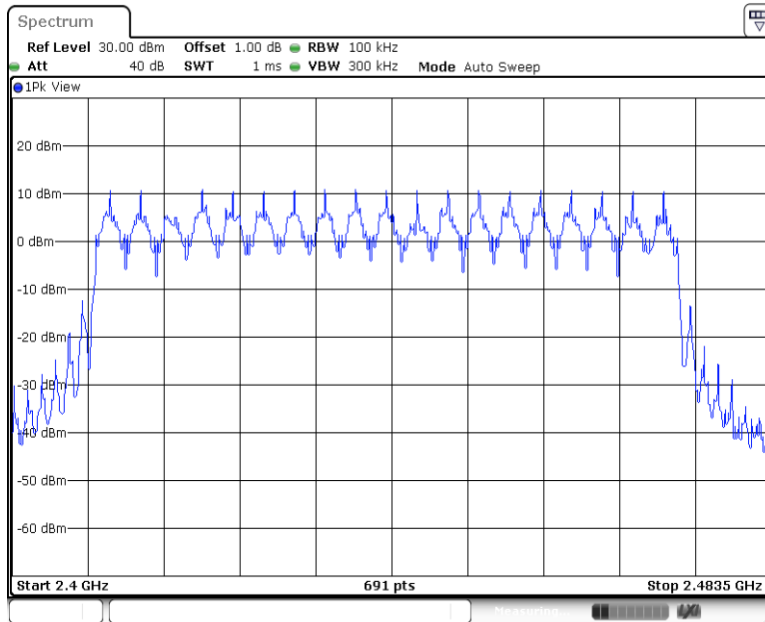

## 9.6 Dwell Time

### Test Method

1. The RF output of EUT was connected to the test receiver by RF cable. The path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit to hopping mode.
3. Span: Zero span, centered on a hopping channel.
4. RBW shall be \ channel spacing and where possible RBW should be set  $\gg 1 / T$ , where T is the expected dwell time per channel.
5. Sweep: As necessary to capture the entire dwell time per hopping channel; where possible use a video trigger and trigger delay so that the transmitted signal starts a little to the right of the start of the plot. The trigger level might need slight adjustment to prevent triggering when the system hops on an adjacent channel; a second plot might be needed with a longer sweep time to show two successive hops on a channel.
6. Detector function: Peak.
7. Trace: Max hold. Use the marker-delta function to determine the transmit time per hop. If this value varies with different modes of operation (data rate, modulation format, number of hopping channels, etc.), then repeat this test for each variation in transmit time.

### Limit


The average time of occupancy on any frequency shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

## Dwell Time

The maximum dwell time shall be 0.4 s.

The Dwell Time = Burst Width \* Total Hops.

Channel	Burst Width (ms)	Total Hops	Result (s)	Limit (s)	Verdict
Hop	0.11	374	0.041	<=0.4	PASS

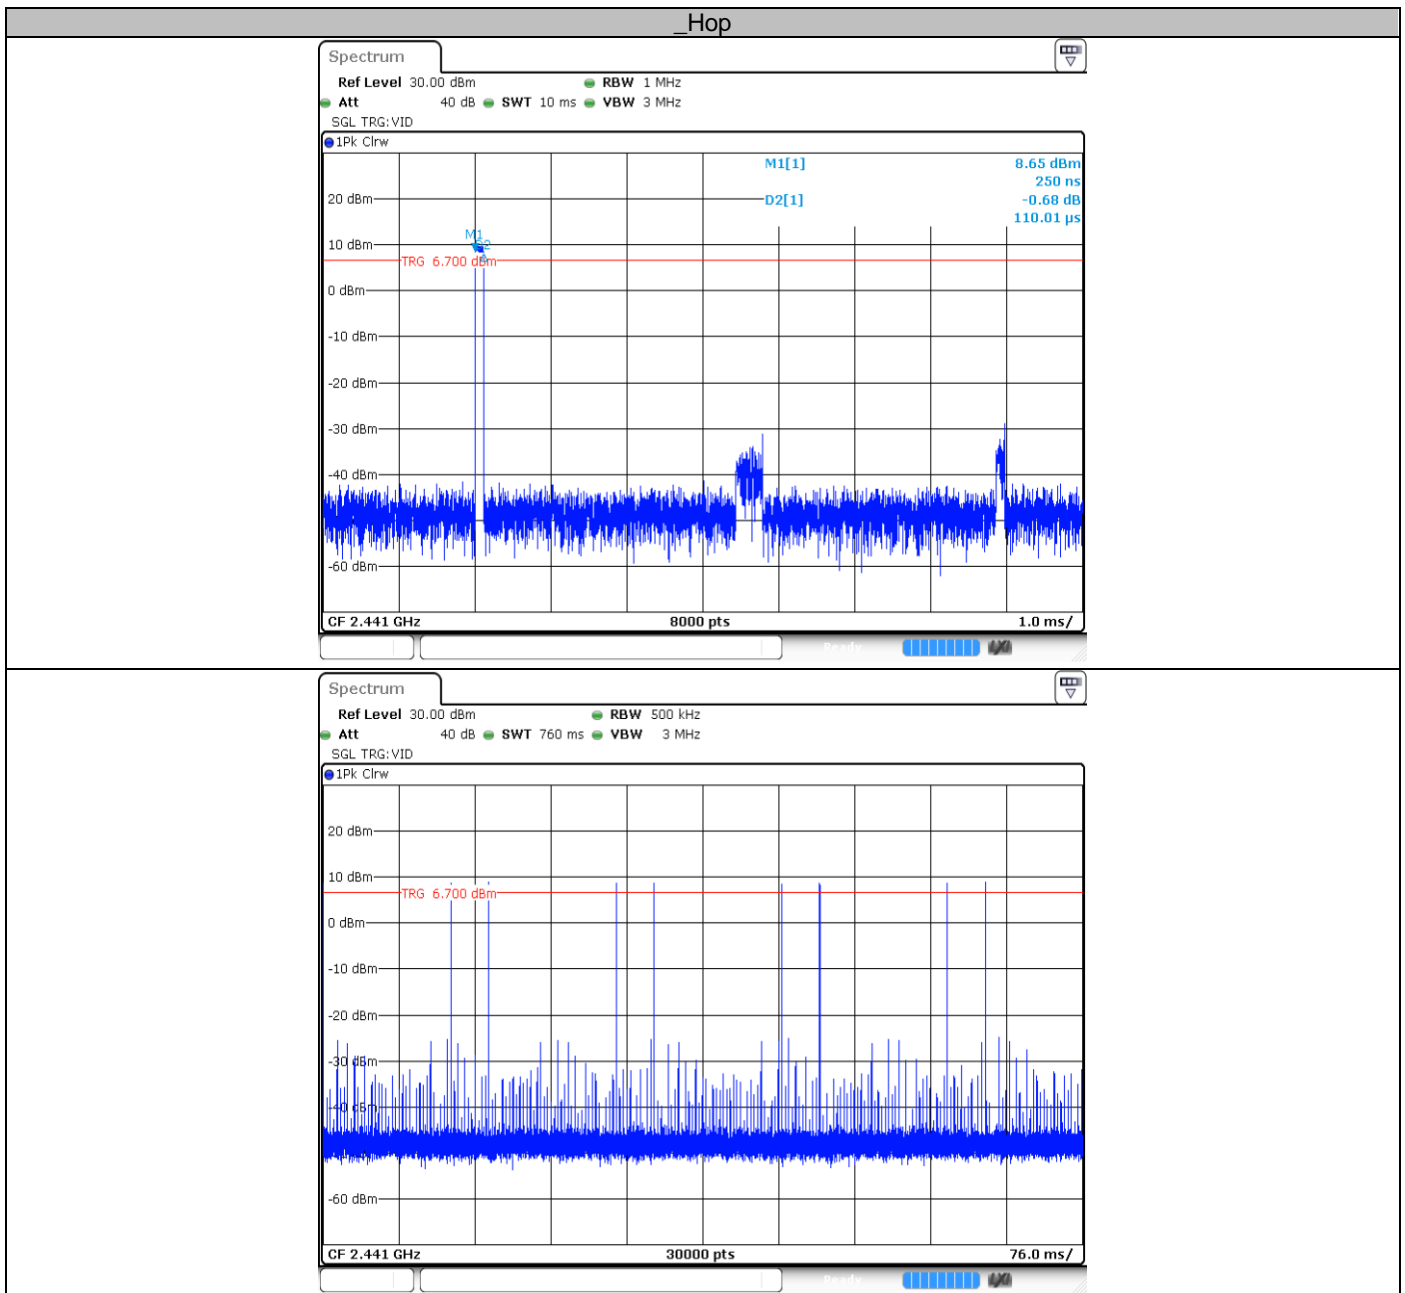

## 9.7 Spurious RF Conducted Emissions


### Test Method



1. The RF output of EUT was connected to the spectrum analyzer by RF cable. The path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously.
3. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
4. Measure and record the results in the test report.
5. The RF fundamental frequency should be excluded against the limit line in the operating frequency

### Limit



Frequency Range MHz	Limit (dBc)
30-25000	-20



## Spurious RF Conducted Emissions

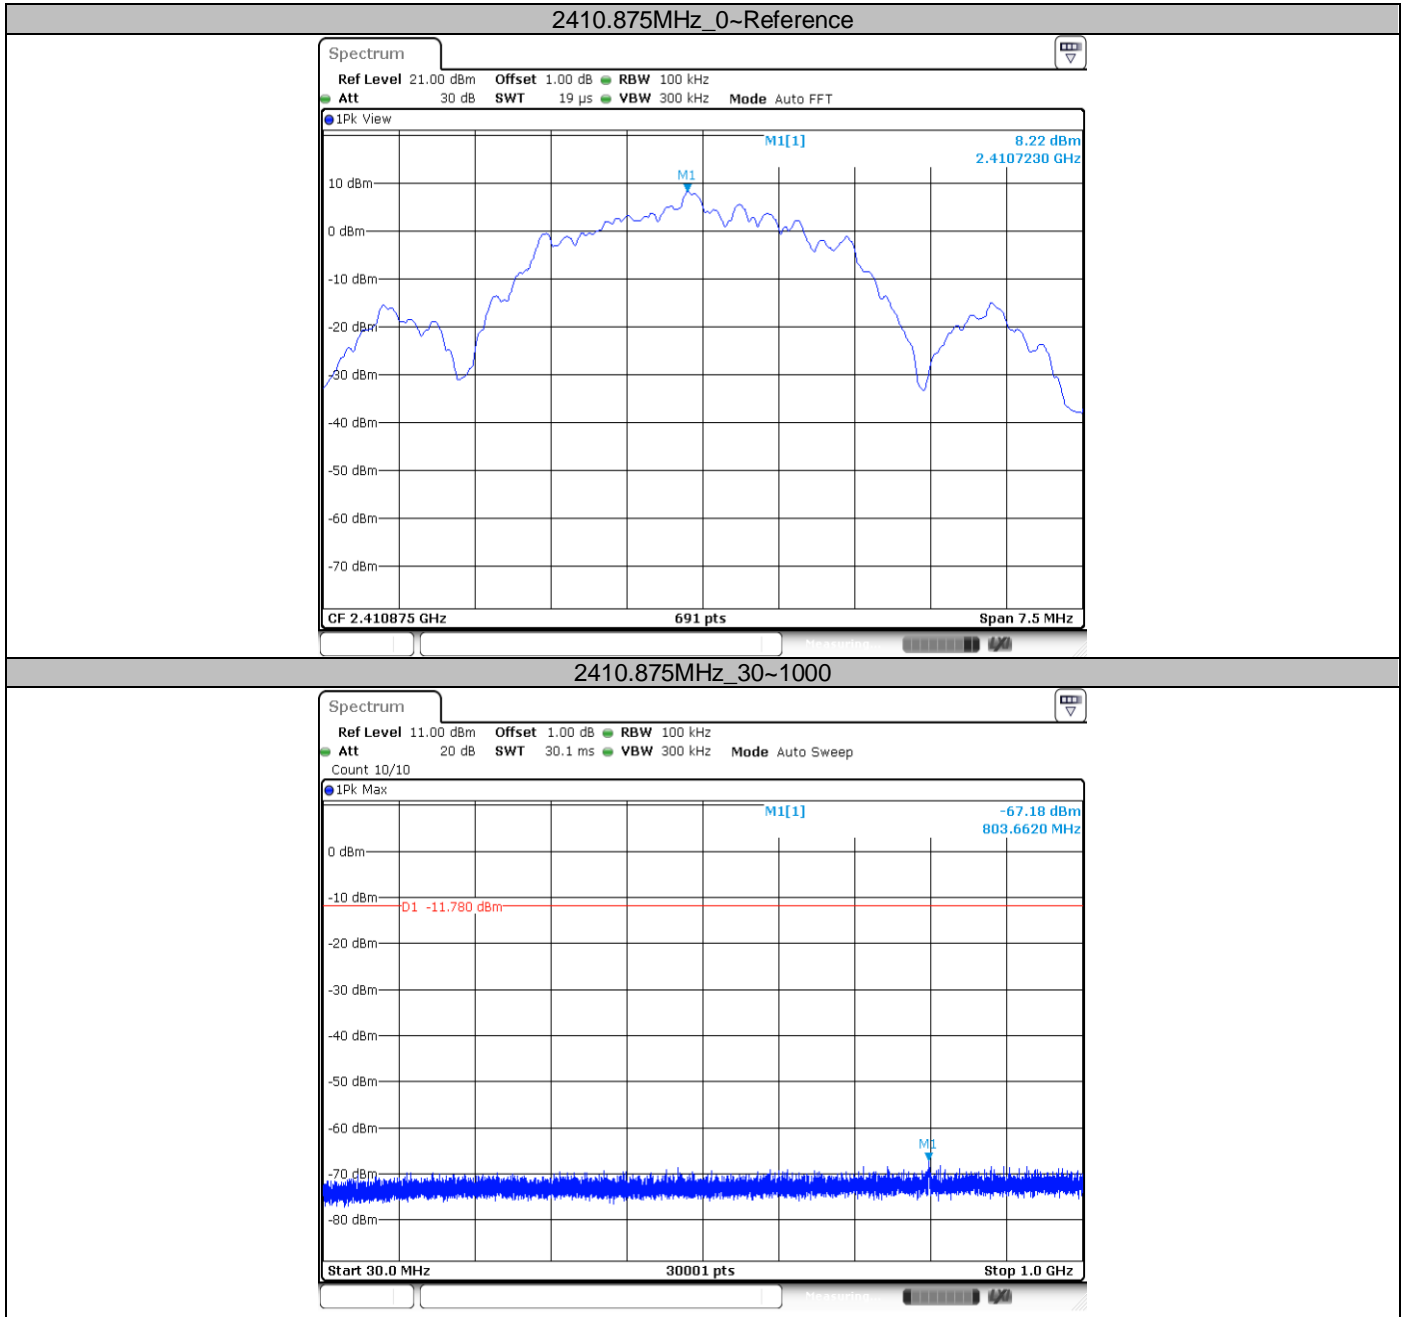


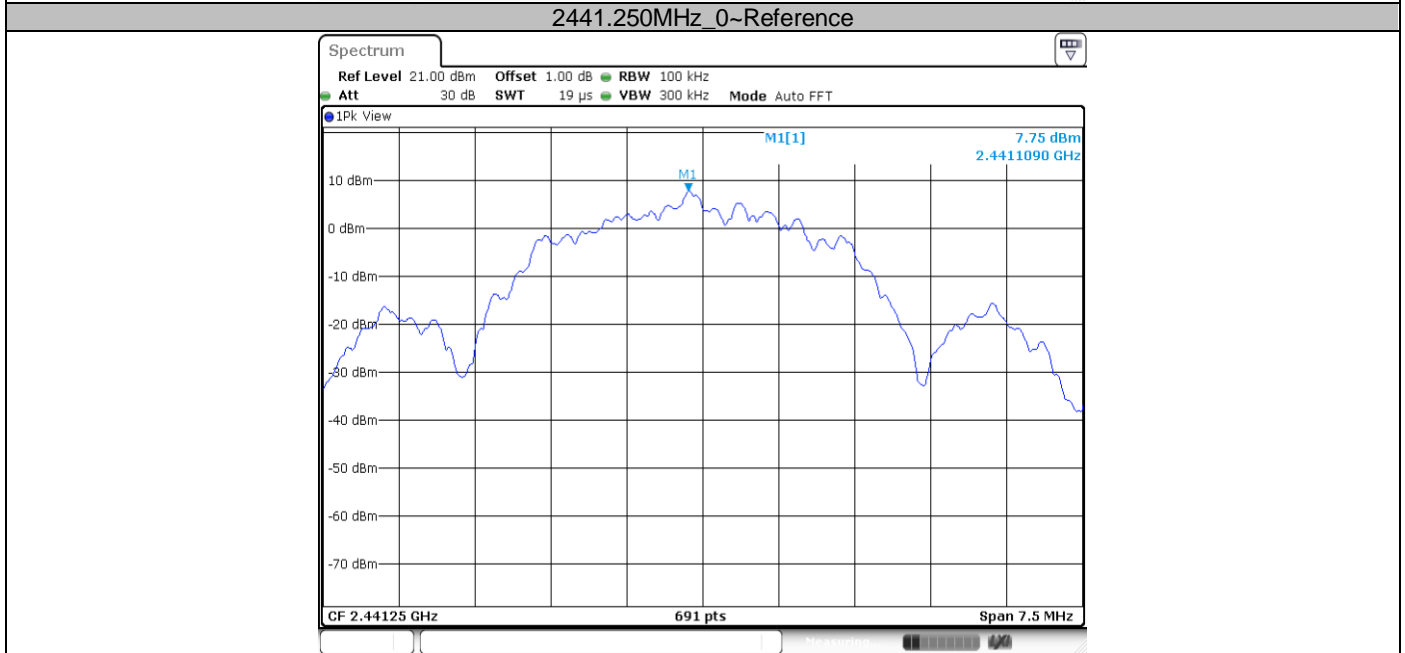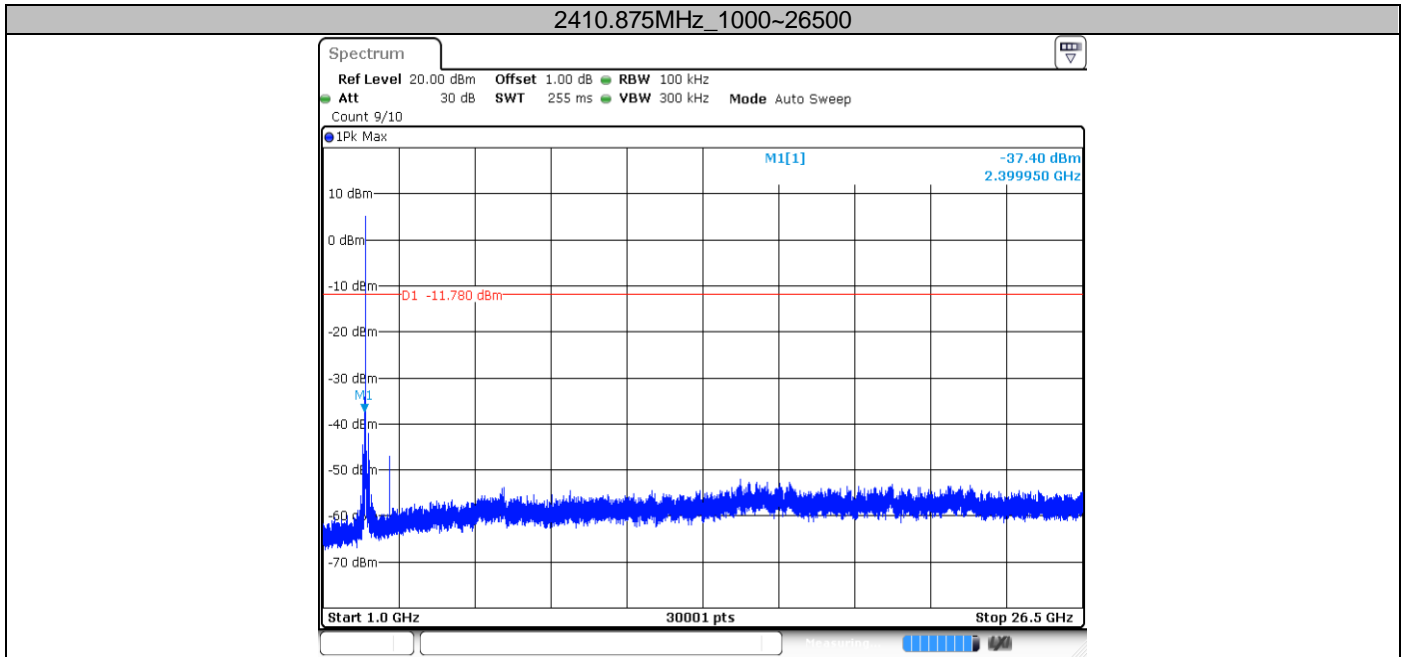



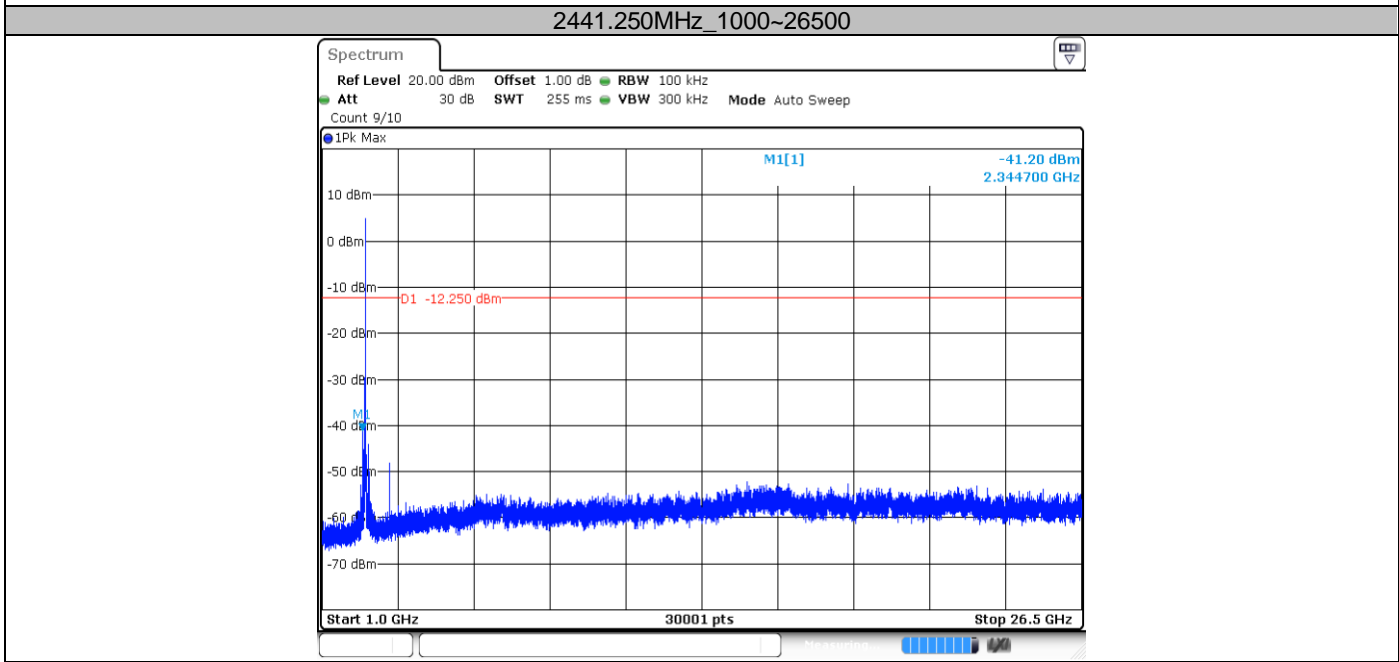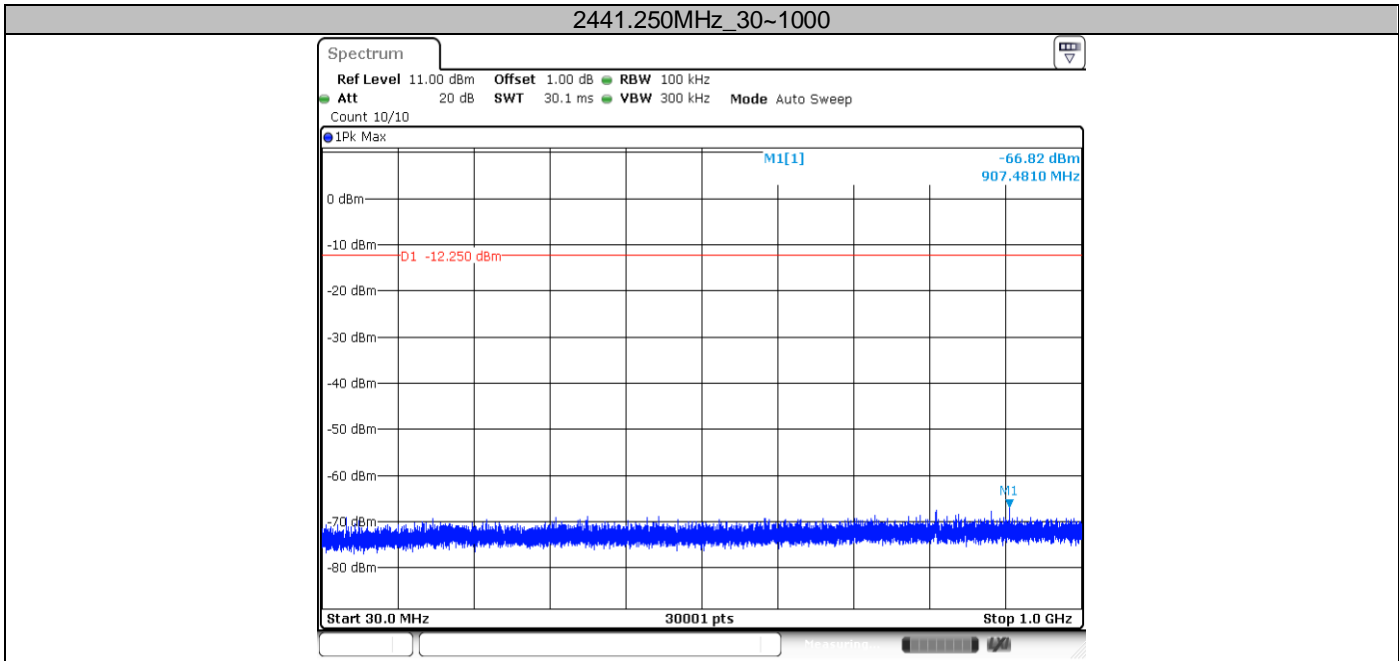

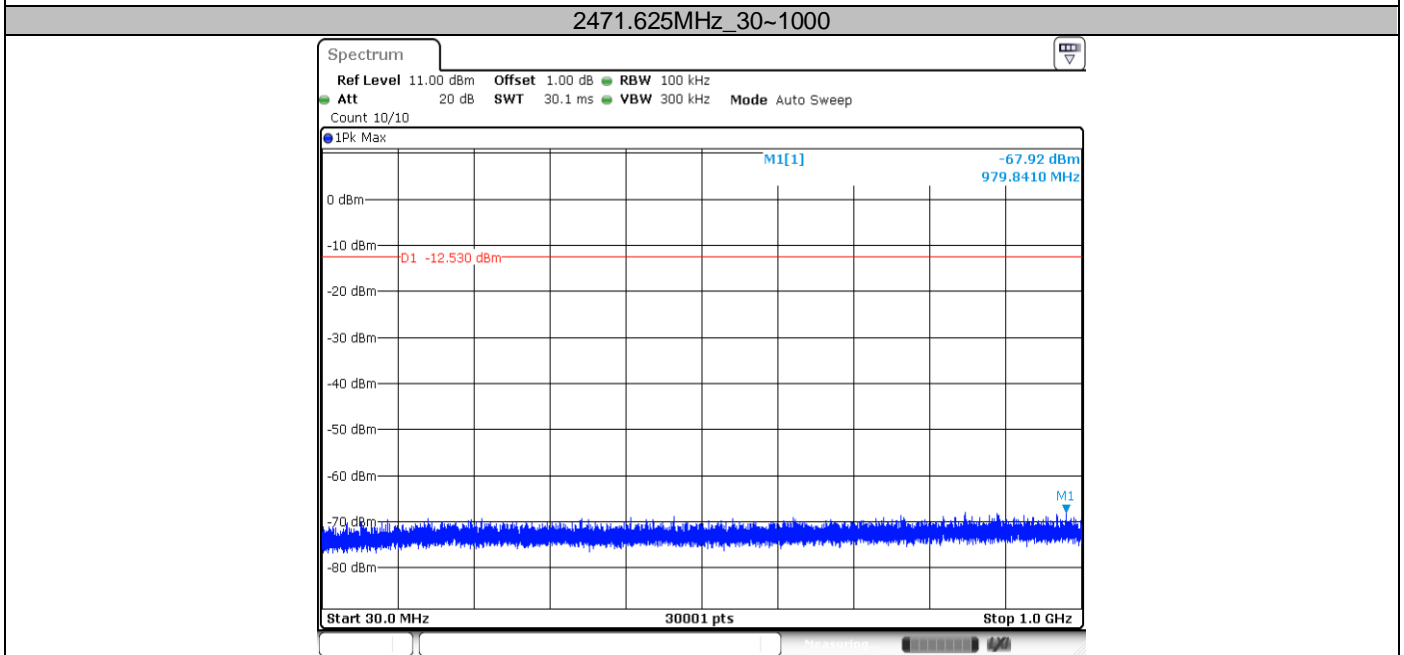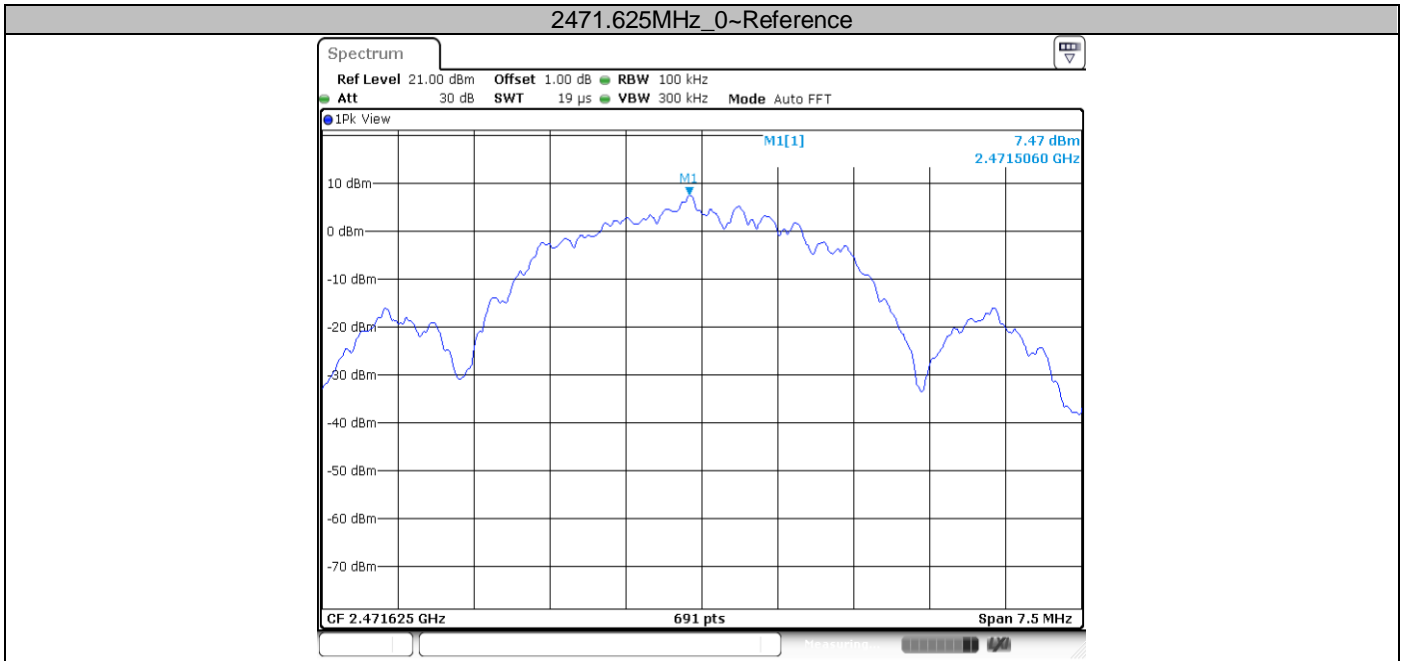

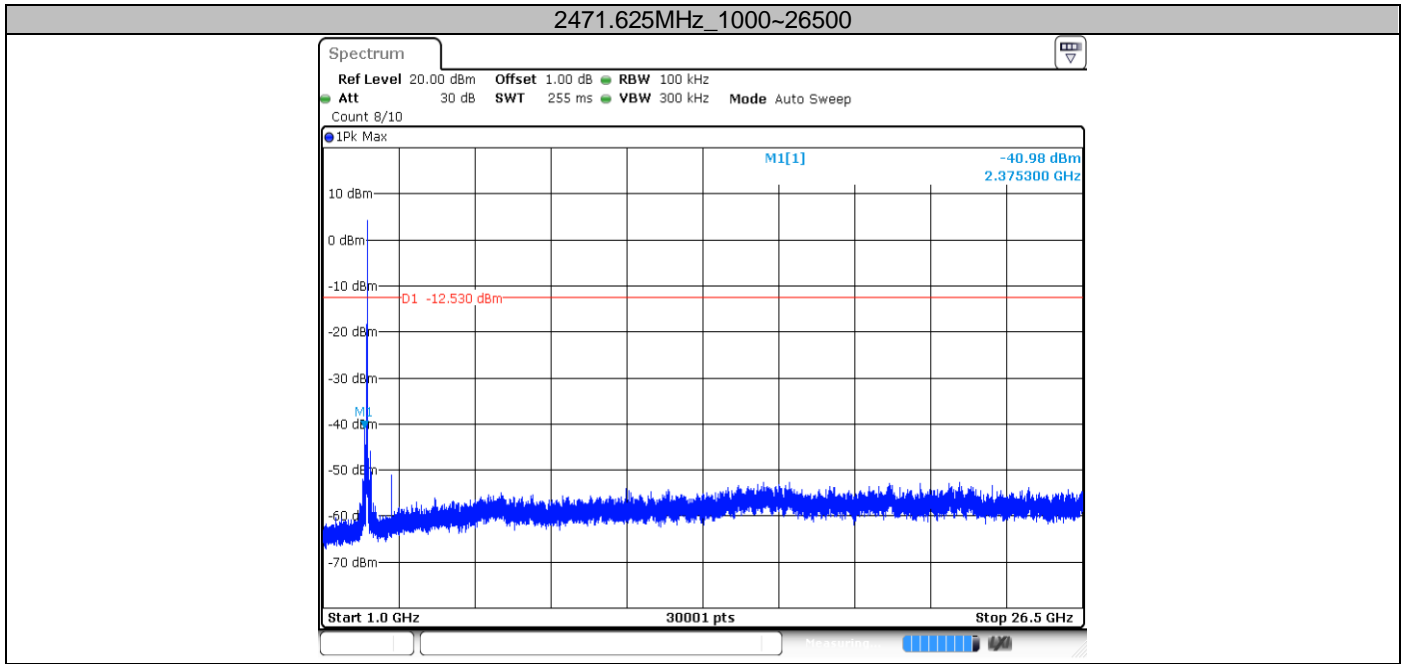

## 9.8 Band Edge Testing



### Test Method



1. The RF output of EUT was connected to the spectrum analyzer by RF cable. The path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously.
3. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
4. Measure and record the results in the test report.
5. The RF fundamental frequency should be excluded against the limit line in the operating frequency
6. Set to the maximum power setting and enable the EUT hopping mode, repeat the test.

### Limit:


In any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits.

### Band Edge

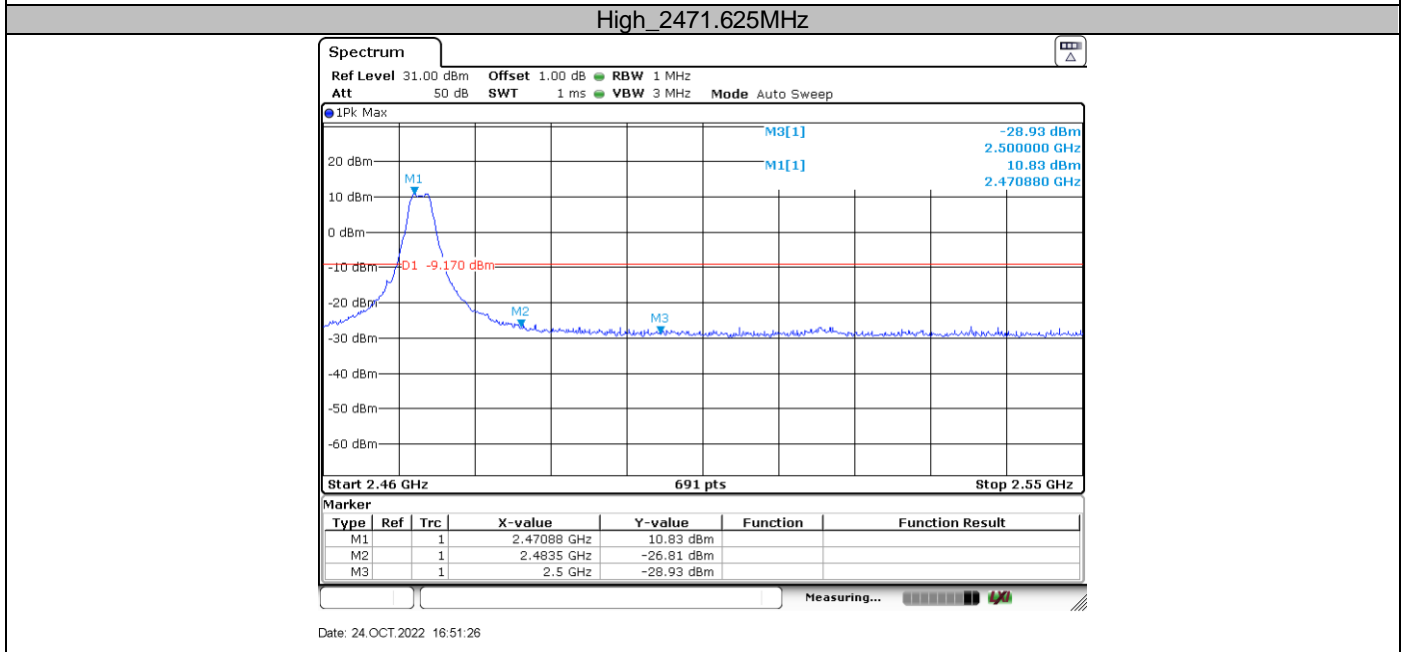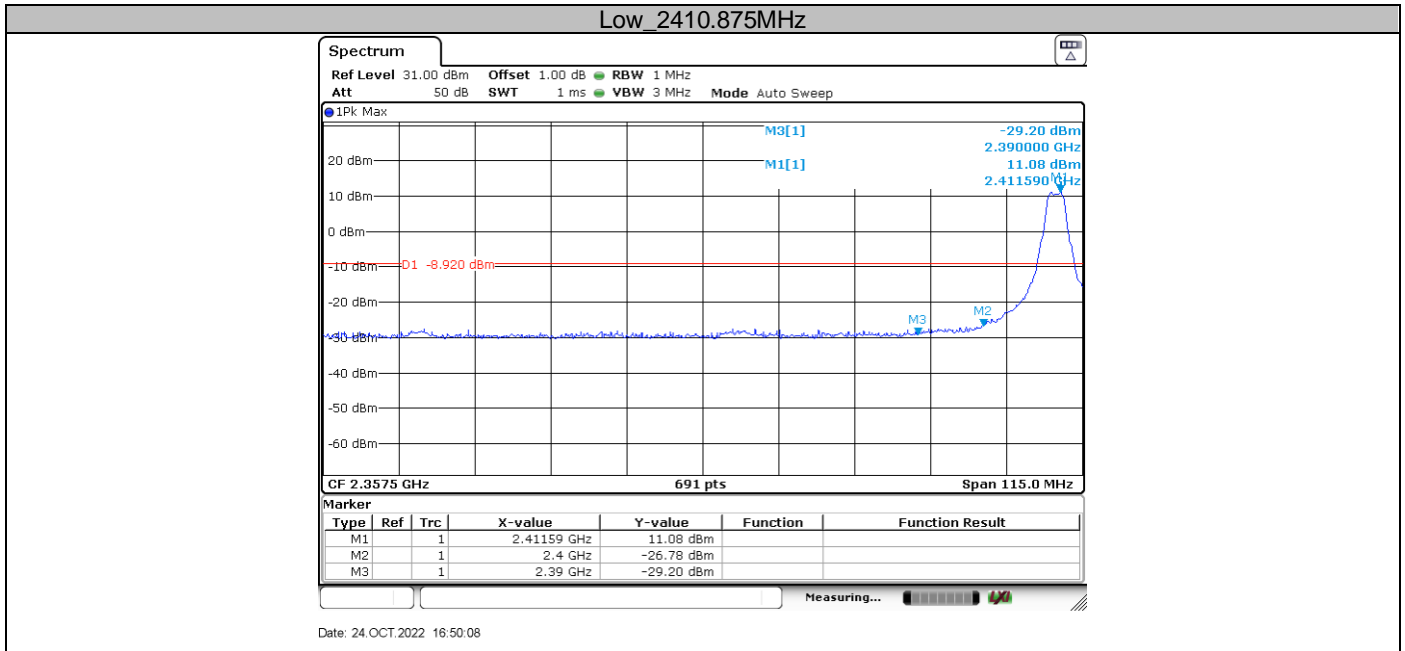


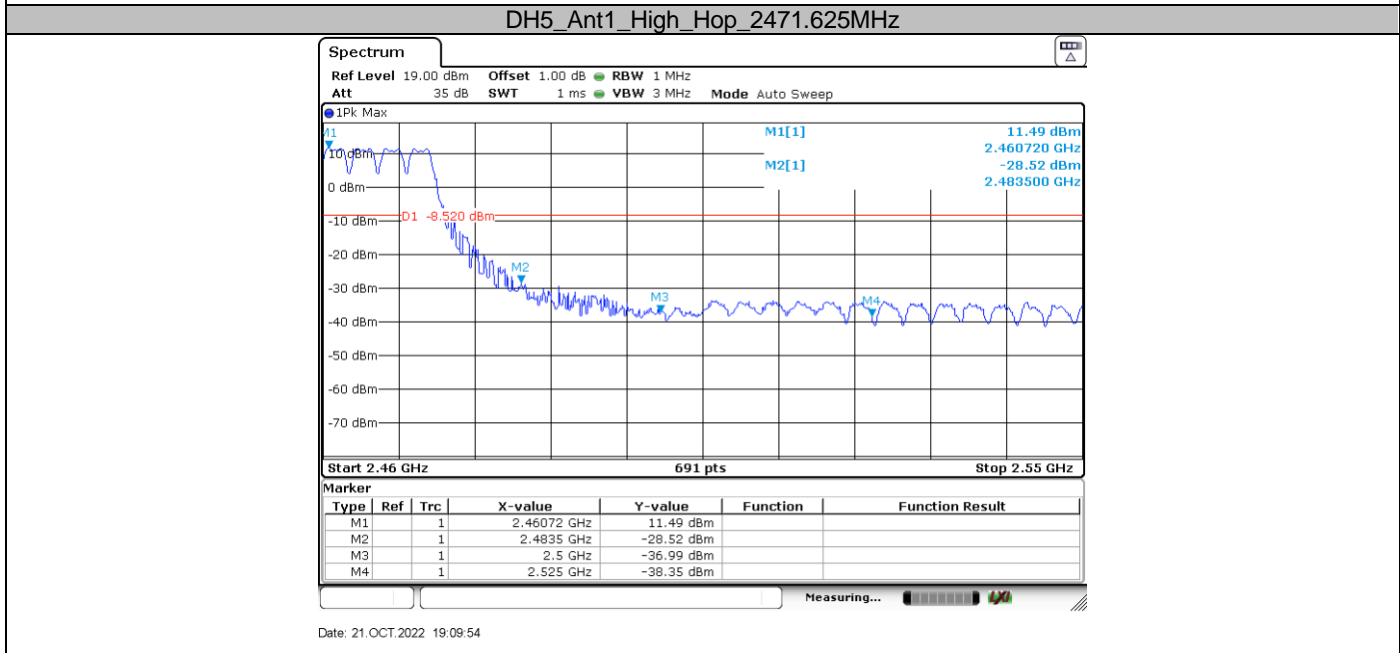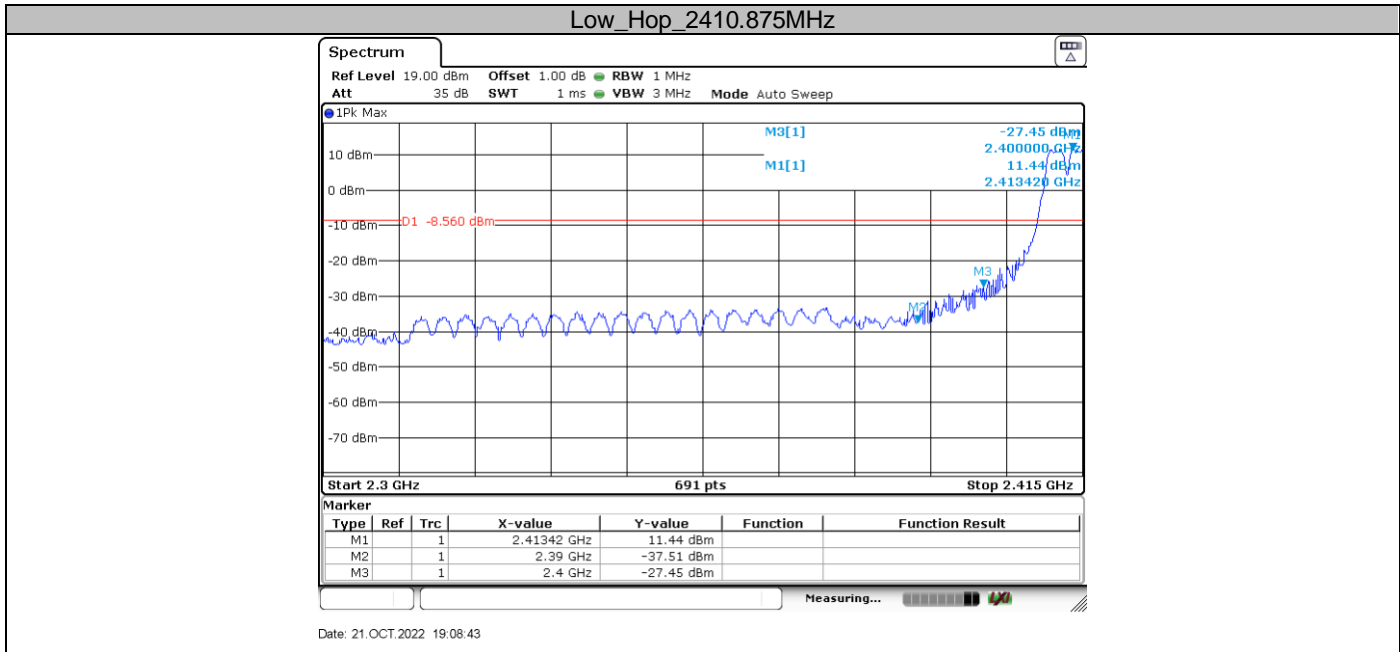

**Radiated Emissions Band Edge:  
2410.875MHzMHz:**

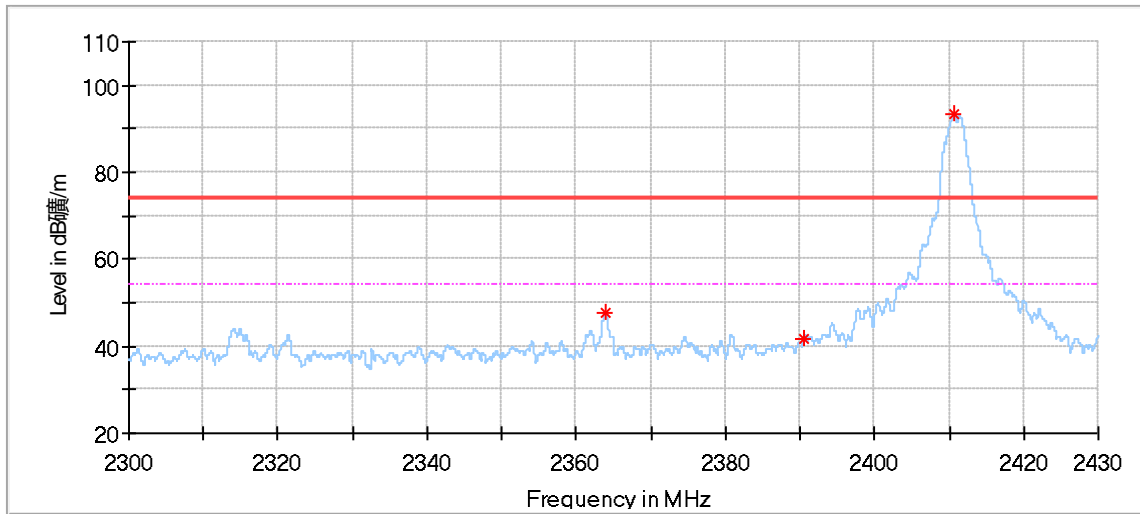


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2363.856000	47.82	74.00	26.18	150.0	H	316.0	-3.08
2390.493000	41.71	74.00	32.29	150.0	H	338.0	-2.94
2410.721000	93.38	74.00	-19.38	150.0	H	286.0	-2.73

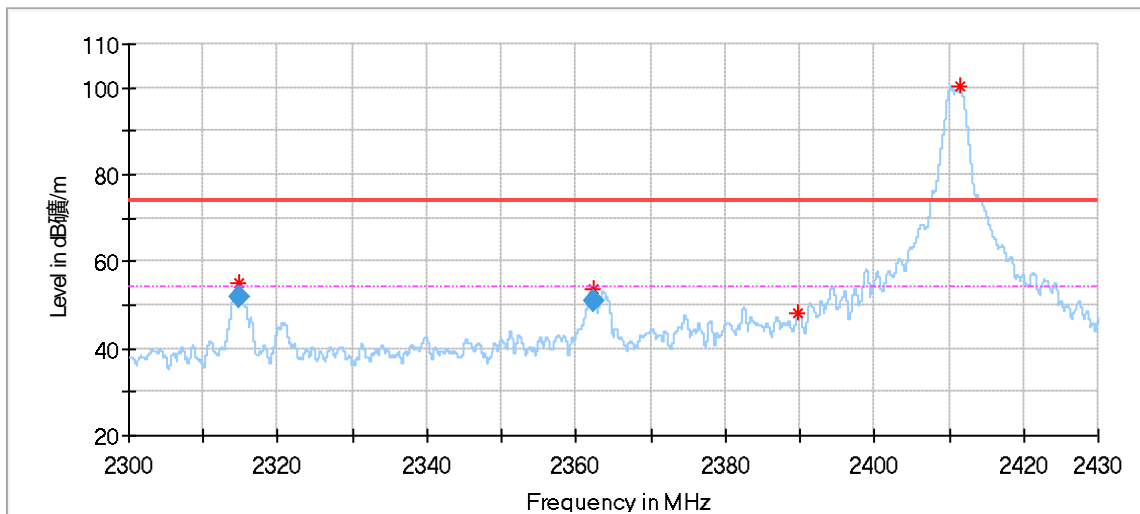


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2314.820000	55.00	74.00	19.00	150.0	V	181.0	-3.62
2362.231000	53.91	74.00	20.09	150.0	V	22.0	-3.09
2389.713000	48.36	74.00	25.64	150.0	V	8.0	-2.95
2411.397000	100.34	74.00	-26.34	150.0	V	206.0	-2.73
Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2314.820000	52.00	54.00	2.00	150.0	V	181.0	-3.62
2362.231000	50.91	54.00	3.09	150.0	V	22.0	-3.09

**2471.625MHzMHz:**

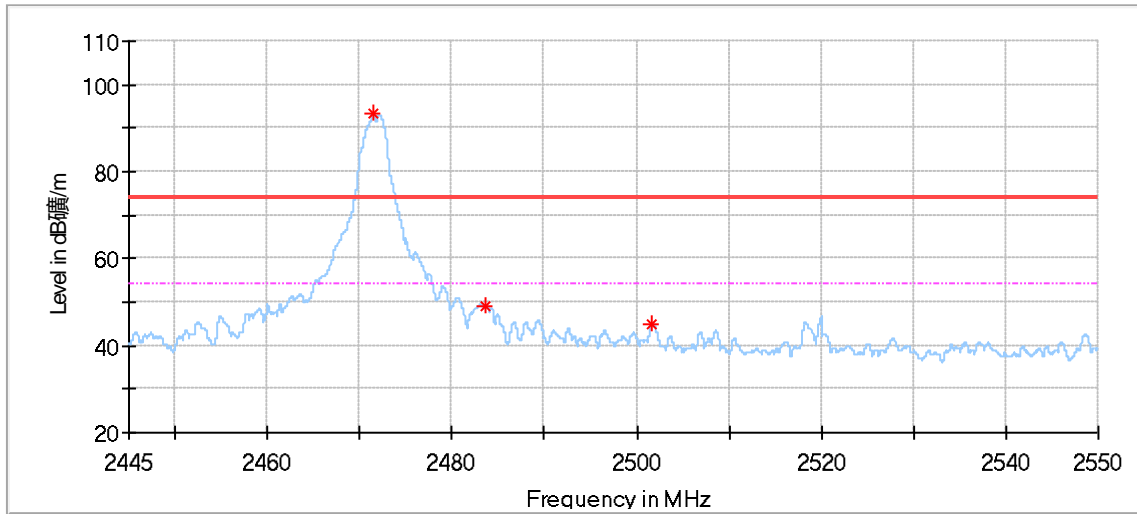

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2471.397000	93.24	74.00	-19.24	150.0	H	322.0	-2.24
2483.703000	49.11	74.00	24.89	150.0	H	32.0	-2.20
2501.647500	44.90	74.00	29.10	150.0	H	254.0	-2.14

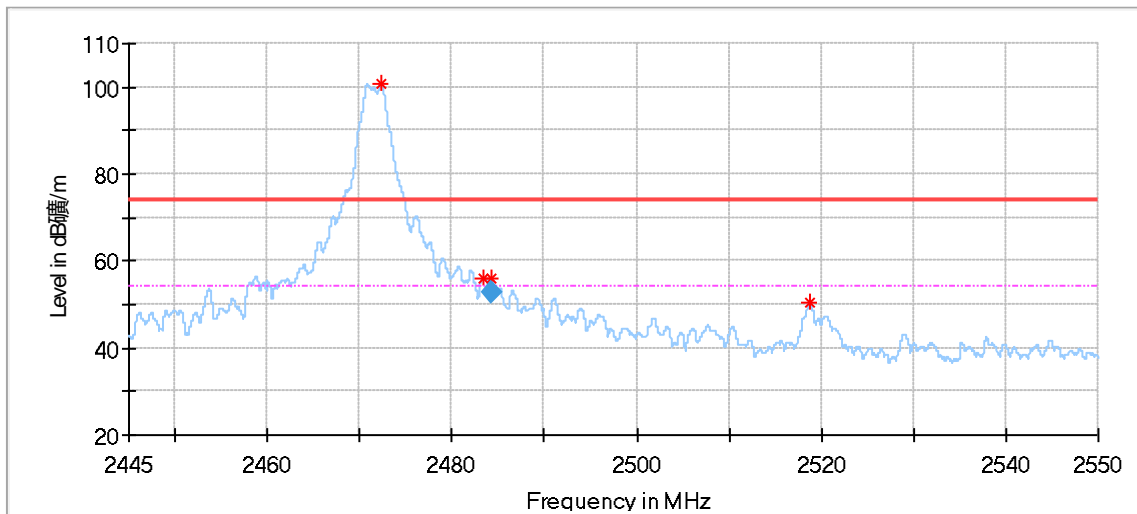

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2472.300000	100.70	74.00	-26.70	150.0	V	1.0	-2.24
2483.493000	55.80	74.00	18.20	150.0	V	9.0	-2.20
2484.196500	55.87	74.00	18.13	150.0	V	17.0	-2.20
2518.720500	50.39	74.00	23.61	150.0	V	178.0	-2.17
Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2483.493000	52.80	54.00	1.20	150.0	V	9.0	-2.20
2484.196500	52.87	54.00	1.13	150.0	V	17.0	-2.20



## 9.9 Spurious Radiated Emissions for Transmitter

### Test Method

1. The EUT was placed on a turn table which is 1.5m above ground plane for above 1GHz and 0.8m above ground for below 1GHz at 3 meters chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
2. Set to the maximum power setting and enable the EUT transmit continuously
3. The EUT was set 3 meters away from the interference – receiving antenna, which was mounted on the top of a variable – height antenna tower.
4. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
5. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
6. Use the following spectrum analyzer settings According to C63.10:
  - (1) Span shall wide enough to fully capture the emission being measured;
  - (2) Set RBW=100 kHz for  $f < 1$  GHz; VBW RBW; Sweep = auto; Detector function = peak; Trace = max hold;
  - (3) Set RBW = 1 MHz, VBW= 3MHz for  $f \geq 1$  GHz for peak measurement.For average measurement:  
VBW = 10 Hz, when duty cycle is no less than 98 percent.  
VBW  $\geq 1/T$ , when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
7. Repeat above procedures until all frequencies measured were complete.

## Spurious Radiated Emissions for Transmitter

### Limit

The radio emission outside the operating frequency band shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power. Radiated emissions which fall in the restricted bands, as defined in section 15.205, must comply with the radiated emission limits specified in section 15.209.


Frequency MHz	Field Strength dB $\mu$ V/m	Field Strength dB $\mu$ V/m	Detector
30-88	100	40	QP
88-216	150	43.5	QP
216-960	200	46	QP
960-1000	500	54	QP
Above 1000	500	54	AV
Above 1000	5000	74	PK

### Spurious radiated emissions for transmitter


According to C63.10, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement, so AV emission value did not show in below table if the peak value complies with average limit.

#### Transmitting spurious emission test result as below:

Test data\_30MHz to 1000MHz

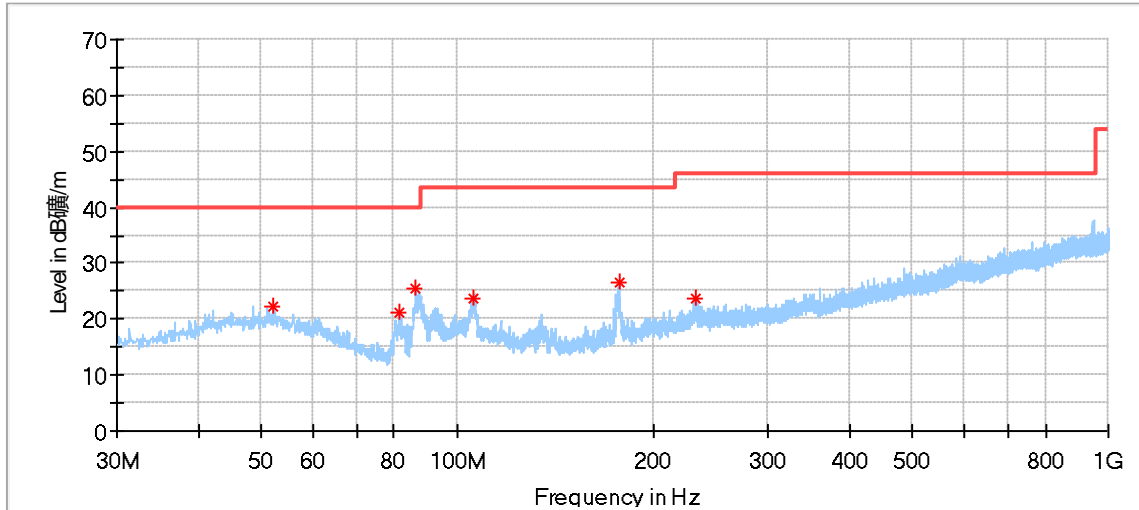


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
52.310000	22.14	40.00	17.86	200.0	H	96.0	20.83
81.410000	21.33	40.00	18.67	200.0	H	7.0	13.74
86.421667	25.35	40.00	14.65	200.0	H	7.0	15.16
105.606111	23.66	43.50	19.84	200.0	H	222.0	18.38
177.008889	26.44	43.50	17.06	200.0	H	47.0	16.36
231.652222	23.86	46.00	22.14	100.0	H	267.0	19.18

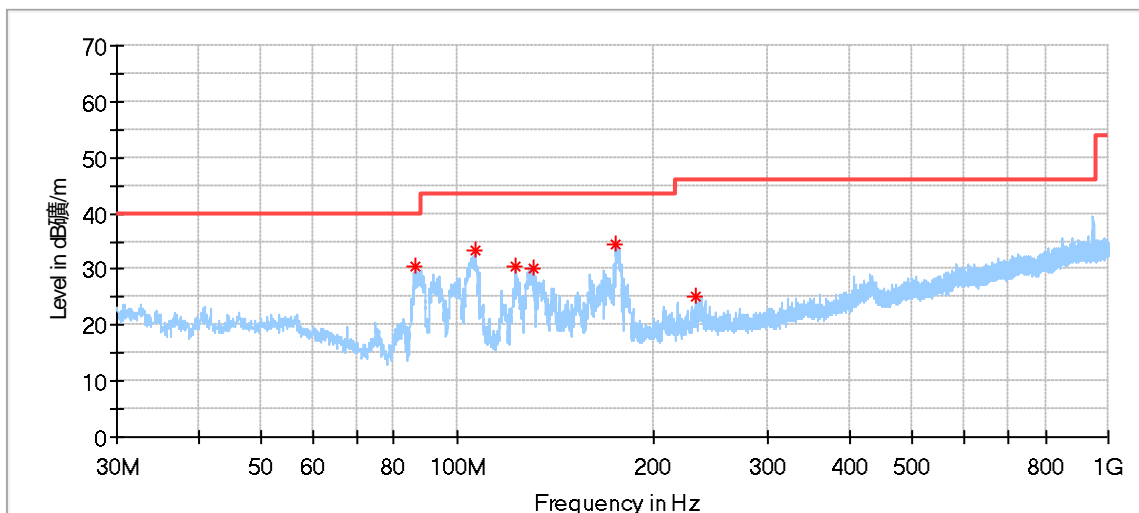


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
86.206111	30.43	40.00	9.57	100.0	V	289.0	15.09
106.845556	33.33	43.50	10.17	100.0	V	111.0	18.35
123.173889	30.44	43.50	13.06	100.0	V	183.0	16.31
131.149444	30.15	43.50	13.35	100.0	V	157.0	15.65
175.392222	34.57	43.50	8.93	100.0	V	74.0	16.26
231.652222	25.04	46.00	20.96	100.0	V	317.0	19.18

Test data 1GHz to 18GHz:  
Low Channel:

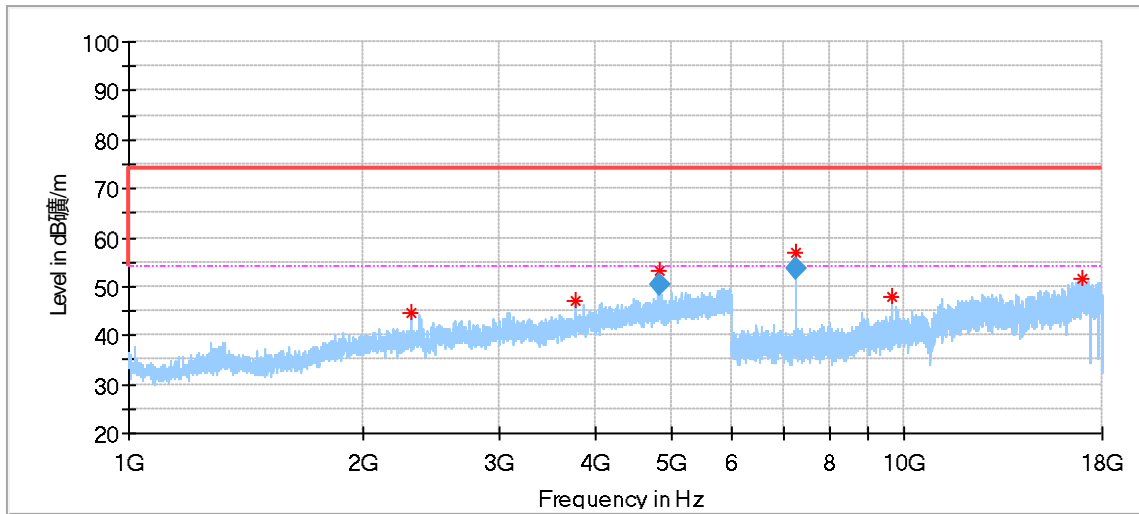


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2315.000000*	44.77	74.00	29.23	150.0	H	35.0	-3.39
3766.000000	46.93	74.00	27.07	150.0	H	298.0	0.82
4823.500000*	53.32	74.00	20.68	150.0	H	229.0	3.80
7234.500000	56.77	74.00	17.23	150.0	H	269.0	9.53
9640.500000	47.74	74.00	26.26	150.0	H	248.0	13.28
16956.000000	51.75	74.00	22.25	150.0	H	186.0	24.15
Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4823.500000*	50.32	54.00	3.68	150.0	H	229.0	3.80
7234.500000	53.77	54.00	0.23	150.0	H	269.0	9.53

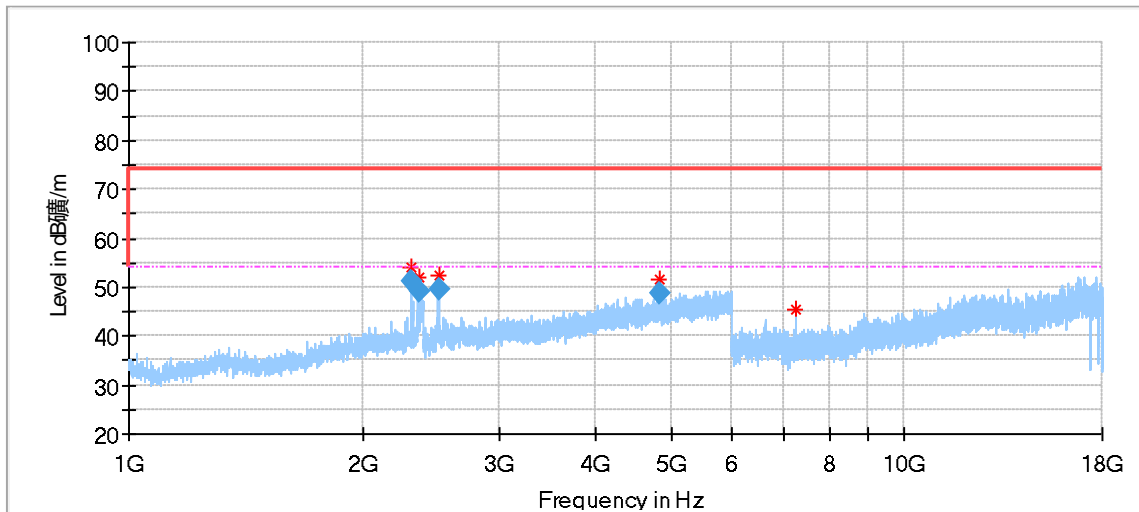


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2315.000000*	54.06	74.00	19.94	150.0	V	210.0	-3.39
2362.500000*	52.06	74.00	21.94	150.0	V	204.0	-3.25
2506.500000	52.50	74.00	21.50	150.0	V	62.0	-2.19
4823.500000*	51.56	74.00	22.44	150.0	V	9.0	3.80
7230.000000	45.59	74.00	28.41	150.0	V	311.0	9.48
Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2315.000000*	51.06	54.00	2.94	150.0	V	210.0	-3.39
2362.500000*	49.06	54.00	4.94	150.0	V	204.0	-3.25
2506.500000	49.50	54.00	4.50	150.0	V	62.0	-2.19
4823.500000*	48.56	54.00	5.44	150.0	V	9.0	3.80

Middle Channel:

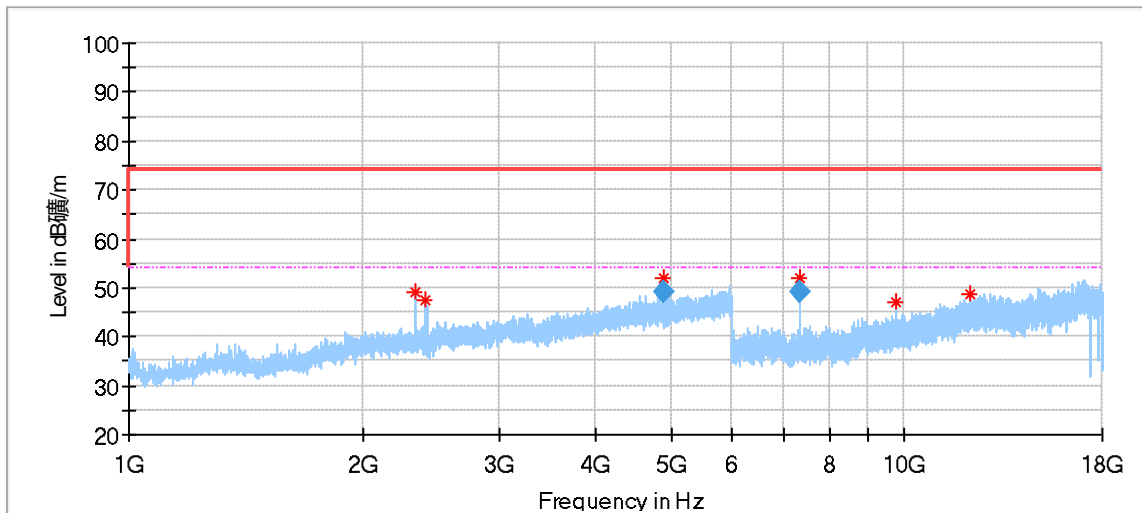


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2345.000000*	49.20	74.00	24.80	150.0	H	305.0	-3.32
2413.500000	47.42	74.00	26.58	150.0	H	75.0	-2.64
4881.000000*	52.14	74.00	21.86	150.0	H	332.0	3.89
7325.500000*	52.17	74.00	21.83	150.0	H	356.0	9.65
9762.000000	47.16	74.00	26.84	150.0	H	311.0	13.59
12136.500000*	48.82	74.00	25.18	150.0	H	86.0	17.08
Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4881.000000*	49.14	54.00	4.86	150.0	H	332.0	3.89
7325.500000*	49.17	54.00	4.83	150.0	H	356.0	9.65

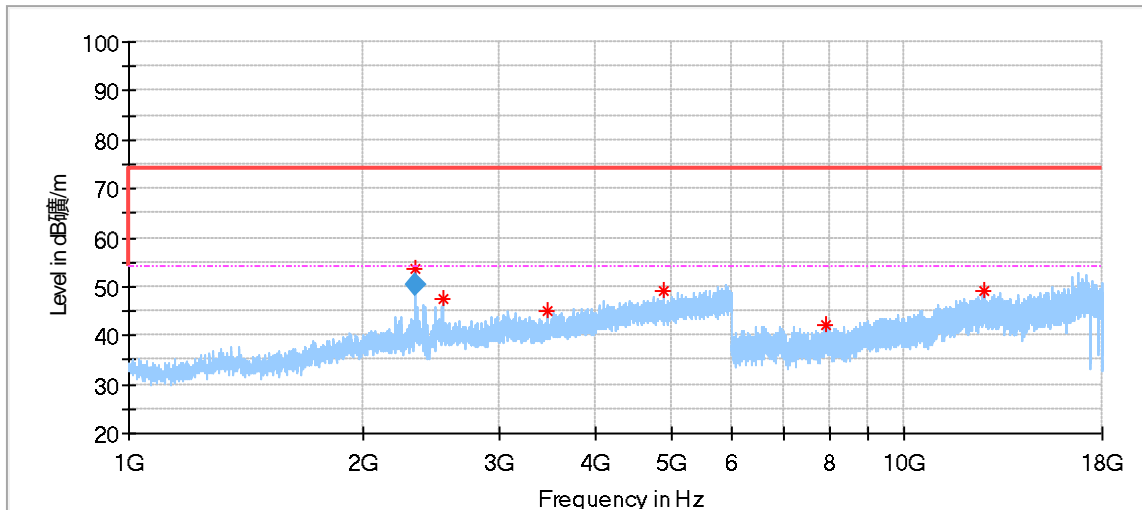


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2345.500000*	53.47	74.00	20.53	150.0	V	354.0	-3.32
2537.000000	47.56	74.00	26.44	150.0	V	189.0	-2.21
3470.500000	44.85	74.00	29.15	150.0	V	0.0	-0.44
4881.500000*	49.21	74.00	24.79	150.0	V	303.0	3.89
7917.500000	42.06	74.00	31.94	150.0	V	0.0	10.25
12684.000000*	49.05	74.00	24.95	150.0	V	86.0	18.15
Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2345.500000*	50.47	54.00	3.53	150.0	V	354.0	-3.32

Highest Channel:

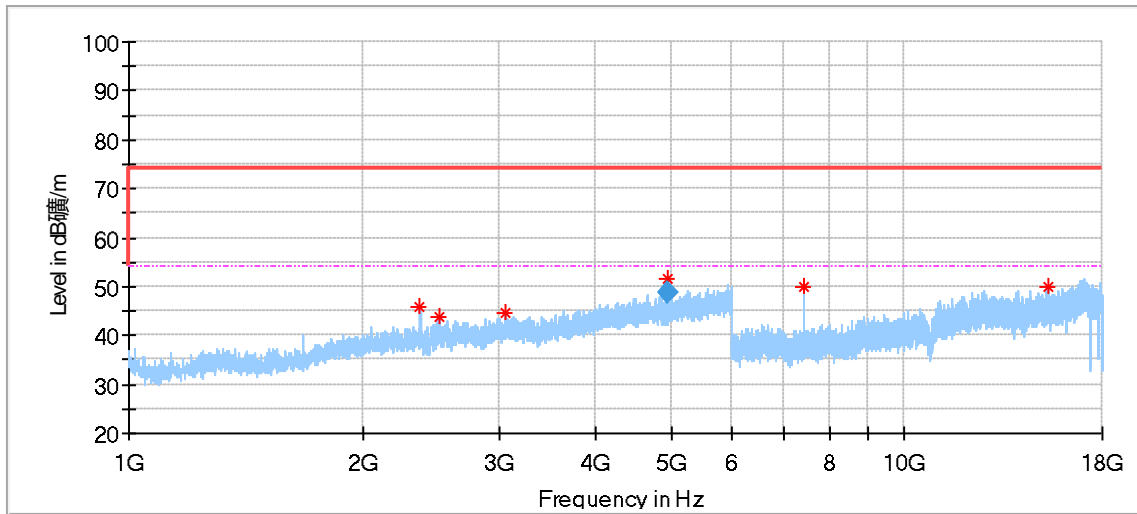

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2375.500000*	45.85	74.00	28.15	150.0	H	129.0	-3.15
2520.500000	43.83	74.00	30.17	150.0	H	149.0	-2.20
3061.000000	44.55	74.00	29.45	150.0	H	62.0	-0.48
4942.000000*	51.79	74.00	22.21	150.0	H	317.0	4.10
7412.500000*	49.78	74.00	24.22	150.0	H	269.0	9.59
15325.000000	50.04	74.00	23.96	150.0	H	227.0	20.13
Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4942.000000*	48.79	54.00	5.21	150.0	H	317.0	4.10

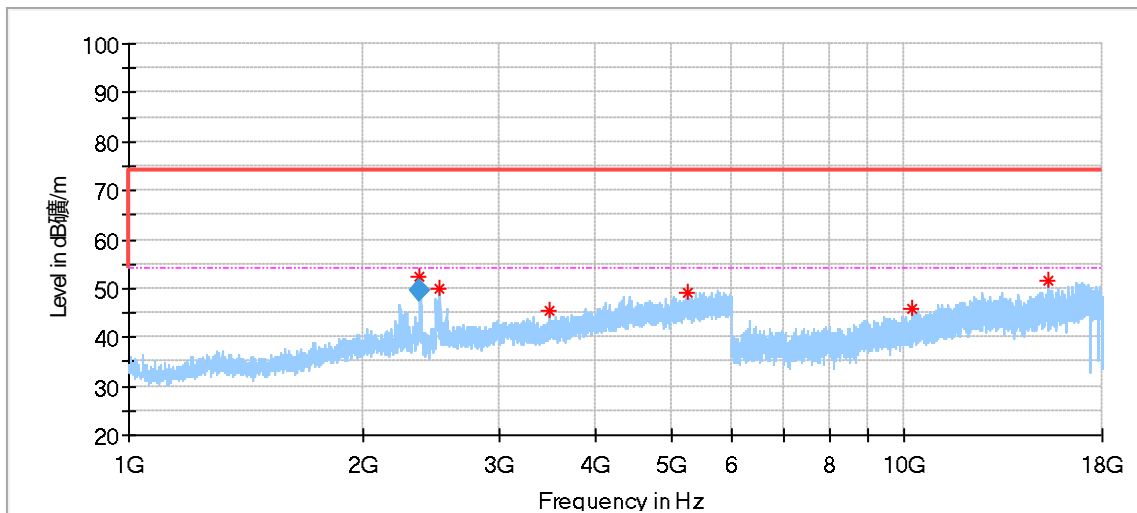

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2375.000000*	52.49	74.00	21.51	150.0	V	189.0	-3.15
2519.500000	49.77	74.00	24.23	150.0	V	339.0	-2.20
3488.000000	45.64	74.00	28.36	150.0	V	236.0	-0.26
5258.000000	49.15	74.00	24.85	150.0	V	15.0	5.34
10222.000000	45.97	74.00	28.03	150.0	V	147.0	13.90
15302.000000	51.52	74.00	22.48	150.0	V	248.0	20.38
Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2375.000000*	49.49	54.00	4.51	150.0	V	189.0	-3.15

Remark:

- (1) “\*” means the emission(s) appear within the restrict bands shall follow the requirement of section 15.205.
- (2) Data of measurement within frequency range 9kHz-30MHz, 18-26GHz are the noise floor or attenuated more than 20dB below the permissible limits or the field strength is too small to be measured, so test data does not present in this report.
- (3) Data of measurement within this frequency range shown “--” in the table above means the reading of emissions are the noise floor or attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) Corrected Amplitude = Read level + Corrector factor  
Above 1GHz: Corrector factor = Antenna Factor + Cable Loss- Amplifier Gain  
Below 1GHz: Corrector factor = Antenna Factor + Cable Loss

## 10 Test Equipment List

### List of Test Instruments

#### Radiated Emission Test

DESCRIPTION	MANUFACTURER	MODEL NO.	EQUIPMENT ID	SERIAL NO.	CAL INTERVAL (YEAR)	CAL. DUE DATE
EMI Test Receiver	Rohde & Schwarz	ESR 26	68-4-74-14-002	101269	1	2023-5-28
Trilog Super Broadband Test Antenna	Schwarzbeck	VULB 9162	68-4-80-19-003	284	1	2023-7-12
Wave Guide Antenna	ETS	3117	68-4-80-19-001	00218954	1	2023-5-9
Pre-amplifier	Rohde & Schwarz	SCU 18F	68-4-29-19-001	100745	1	2023-5-28
Pre-amplifier	Rohde & Schwarz	SCU 18F	68-4-29-19-002	100746	1	2023-5-28
Sideband Horn Antenna	Q-PAR	QWH-SL-18-40-K-SG	68-4-80-14-008	12827	1	2023-7-12
Loop Antenna	Rohde & Schwarz	HFH2-Z2	68-4-80-14-006	100398	1	2023-8-17
Pre-amplifier	Rohde & Schwarz	SCU 40A	68-4-29-14-002	100432	1	2023-7-27
Attenuator	Mini-circuits	UNAT-6+	68-4-81-21-002	15542	1	2023-5-27
3m Semi-anechoic chamber	TDK	SAC-3 #2	68-4-90-19-006	----	2	2023-5-28
Test software	Rohde & Schwarz	EMC32	68-4-90-19-006-A01	Version10.3 5.02	N/A	N/A

#### Conducted Emission Test

DESCRIPTION	MANUFACTURER	MODEL NO.	EQUIPMENT ID	SERIAL NO.	CAL INTERVAL (YEAR)	CAL. DUE DATE
EMI Test Receiver	Rohde & Schwarz	ESR 3	68-4-74-19-002	102590	1	2023-5-27
LISN	Rohde & Schwarz	ENV216	68-4-87-19-001	102472	1	2023-5-27
Attenuator	Shanghai Huaxiang	TS2-26-3	68-4-81-16-003	080928189	1	2023-5-27
Test software	Rohde & Schwarz	EMC32	68-4-90-19-005-A01	Version10.35. 02	N/A	N/A
Shielding Room	TDK	CSR #2	68-4-90-19-005	----	3	2025-10-15

#### Conducted RF Test System

DESCRIPTION	MANUFACTURER	MODEL NO.	EQUIPMENT ID	SERIAL NO.	CAL INTERVAL (YEAR)	CAL. DUE DATE
Signal Analyzer	Rohde & Schwarz	FSV40	68-4-74-14-004	101030	1	2023-5-27
Test software	Tonscend	System for BT/WIFI	68-4-74-14-006-A13	Version 2.6.77.0518	N/A	N/A
Shielding Room	TDK	TS8997	68-4-90-19-003	----	3	2025-10-15



## 11 System Measurement Uncertainty

For a 95% confidence level, the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 were:

System Measurement Uncertainty	
Test Items	Extended Uncertainty
Uncertainty for Conducted Emission 150kHz-30MHz (for test using AMN ENV432 or ENV4200)	3.57dB
Uncertainty for Radiated Emission in 3m chamber (68-4-90-14-001) 9kHz-30MHz	4.70dB
Uncertainty for Radiated Emission in new 3m chamber (68-4-90-19-006) 30MHz-1000MHz	Horizontal: 4.59dB; Vertical: 4.75dB
Uncertainty for Radiated Emission in new 3m chamber (68-4-90-19-006) 1000MHz-18000MHz	Horizontal: 5.08dB; Vertical: 5.09dB;
Uncertainty for Radiated Emission 18000MHz-40000MHz	Horizontal: 4.52dB; Vertical: 4.51dB
Uncertainty for Conducted RF test	RF Power Conducted: 1.31dB Frequency test involved: 0.6×10 <sup>-8</sup> or 1%

### Measurement Uncertainty Decision Rule

Determination of conformity with the specification limits is based on the decision rule according to IEC Guide 115: 2021, clause 4.4.3 and 4.5.1.

THE END