

TEST REPORT

Reference No...... : WTX20X10072823W
FCC ID : 2AABK-SKYLIGHT03
Applicant : Shenzhen Chuangwei Electronic Appliance Tech Co.,Ltd.
Address..... : 4F & 6F, Overseas plant south, Skyworth Industrial Park, Shiyan Street,
Bao'an District, Shenzhen,China
Product Name : 10 inch WIFI Digital Photo Frame
Test Model. : SKY-V3
FCC Part 2.1093,
Standards : ANSI / IEEE C95.1 :2005+A1:2010
ANSI / IEEE C95.3 :2002(R2008)
Date of Receipt sample : Oct.10, 2020
Date of Test..... : Oct.26, 2020 to Oct.28, 2020
Date of Issue : Nov.03, 2020
Test Result..... : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

Prepared By:

Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road,
Block 70 Bao'an District, Shenzhen, Guangdong, China

Tel.: +86-755-33663308

Fax.: +86-755-33663309

Tested by:

Reviewed By:

Approved & Authorized By:

Jack Sun

Lion Cai

Silin Chen

Jack Sun / Project Engineer

Lion Cai / RF Manager

Silin Chen / Manager

TABLE OF CONTENTS

1. General Information	3
1.1 Product Description for Equipment Under Test (EUT)	3
1.2 Test Standards	5
1.3 Test Methodology	5
1.4 Test Facility	5
2. Summary of Test Results	6
3. Specific Absorption Rate (SAR)	7
3.1 Introduction	7
3.2 SAR Definition	7
4. SAR Measurement System	8
4.1 The Measurement System	8
4.2 Probe	8
4.3 Probe Calibration Process	11
4.4 Phantom	12
4.5 Device Holder	12
4.6 Test Equipment List	13
5. Tissue Simulating Liquids	14
5.1 Composition of Tissue Simulating Liquid	14
5.2 Tissue Dielectric Parameters for Head and Body Phantoms	15
5.3 Tissue Calibration Result	16
6. SAR Measurement Evaluation	17
6.1 Purpose of System Performance Check	17
6.2 System Setup	17
6.3 Validation Results	19
7. EUT Testing Position	20
7.1 EUT Antenna Position	20
7.2 EUT Testing Position	20
8. SAR Measurement Procedures	22
8.1 Measurement Procedures	22
8.2 Spatial Peak SAR Evaluation	22
8.3 Area & Zoom Scan Procedures	23
8.4 Volume Scan Procedures	23
8.5 SAR Averaged Methods	23
8.6 Power Drift Monitoring	23
9. SAR Test Result	24
9.1 Conducted RF Output Power	24
9.2 Test Results for Standalone SAR Test	27
10.1 Uncertainty for EUT SAR Test	30
10.2 Uncertainty for System Performance Check	31
Annex A. Plots of System Performance Check	33
Annex B. Plots of SAR Measurement	43
Annex C. EUT Photos	56
Annex D. Test Setup Photos	58
Annex E. Calibration Certificate	60

1. General Information

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Applicant: Shenzhen Chuangwei Electronic Appliance Tech Co.,Ltd.
 Address of applicant: 4F & 6F, Overseas plant south, Skyworth Industrial Park,
 Shiyan Street, Bao'an District, Shenzhen,China

Manufacturer: Shenzhen Chuangwei Electronic Appliance Tech Co.,Ltd.
 Address of manufacturer: 4F & 6F, Overseas plant south, Skyworth Industrial Park,
 Shiyan Street, Bao'an District, Shenzhen,China

General Description of EUT:	
Product Name:	10 inch WIFI Digital Photo Frame
Trade Name:	Skylight
Model No.:	SKY-V3
Adding Model:	D106, Skylight 3
Rated Voltage:	DC5V
Power Adapter Model:	S85A02 INPUT: AC100-240V, 50/60Hz, 0.5A; Output: DC5V, 2A
<i>Note: The test data is gathered from a production sample, provided by the manufacturer. The appearance of others models listed in the report is different from main-test model SKY-V3, but the circuit and the electronic construction do not change, declared by the manufacturer.</i>	

Technical Characteristics of EUT:	
WIFI(2.4G)	
Support Standards:	802.11b, 802.11g, 802.11n-HT20
Frequency Range:	2412-2462MHz for 802.11b/g/n(HT20),
RF Output Power:	11.91dBm (Conducted)
Type of Modulation:	DBPSK,BPSK,DQPSK,QPSK,16QAM,64QAM
Data Rate:	1-11Mbps, 6-54Mbps, up to 150Mbps
Quantity of Channels:	11 for 802.11b/g/n-HT20
Channel Separation:	5MHz
Antenna Type:	Integral Antenna
Antenna Gain:	2.51dBi
Wi-Fi(5GHz)	
Support Standards:	802.11a, 802.11n-HT20/40, 802.11ac-HT80
Frequency Range:	Band 1: 5180-5240MHz,Band 2: 5260-5320MHz, Band 3: 5500-5700MHz,Band 4: 5745-5825MHz
RF Output Power:	14.64dBm (Conducted)
Type of Modulation:	BPSK,QPSK, 16QAM, 64QAM, 256-QAM
Type of Antenna:	Integral Antenna
Antenna Gain:	3.58dBi;

1.2 Test Standards

The following report is prepared on behalf of the ShenZhen Skyworth Electronic Appliance Co.,Ltd in accordance with FCC 47 CFR Part 2.1093, ANSI/IEEE C95.1-2005+A1:2010, ANSI / IEEE C95.3 :2002(R2008), IEEE 1528-2013, and KDB 865664 D01 v01r04 and KDB 865664 D02 v01r02 and KDB 616217 D04 v01r02 and 248227 D01 802 11 Wi-Fi SAR v02r02.

The objective is to determine compliance with FCC Part 2.1093 of the Federal Communication Commissions rules.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with KDB 865664 D01 v01r04 and KDB 865664 D02 v01r02. The public notice KDB 447498 D01 v06 for Mobile and Portable Devices RF Exposure Procedure also.

1.4 Test Facility

Address of the test laboratory

Laboratory: Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road, Block 70 Bao'an District, Shenzhen, Guangdong, China

FCC – Registration No.: 125990

Waltek Testing Group (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. The Designation Number is CN5010. Test Firm Registration Number is 125990.

Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Waltek Testing Group (Shenzhen) Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

2. Summary of Test Results

The maximum results of Specific Absorption Rate (SAR) have found during testing are as follows:

Frequency Band	Body (0mm Gap)	SAR _{1g} Limit (W/kg)
	Maximum SAR _{1g} (W/kg)	
WLAN 2.4GHz	1.174	1.6
WLAN 5.2GHz	1.372	1.6
WLAN 5.3GHz	1.203	1.6
WLAN 5.6GHz	1.280	1.6
WLAN 5.8GHz	1.400	1.6

The device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg) specified in FCC 47 CFR Part 2.1093 and ANSI/IEEE C95.1-2005+A1:2010, and had been tested in accordance with the measurement methods and procedure specified in KDB 865664 D01 v01r04, KDB 865664 D02 v01r02 and IEC 62209-2:2010.

3. Specific Absorption Rate (SAR)

3.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

3.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$\text{SAR} = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be either related to the temperature elevation in tissue by

$$\text{SAR} = C \left(\frac{\delta T}{\delta t} \right)$$

Where: C is the specific heat capacity, δT is the temperature rise and δt is the exposure duration, or related to the electrical field in the tissue by

$$\text{SAR} = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

However for evaluating SAR of low power transmitter, electrical field measurement is typically applied.

4. SAR Measurement System

4.1 The Measurement System

Comosar is a system that is able to determine the SAR distribution inside a phantom of human being according to different standards. The Comosar system consists of the following items:

- Main computer to control all the system
- 6 axis robot
- Data acquisition system
- Miniature E-field probe
- Phone holder
- Head simulating tissue

The following figure shows the system.



The EUT under test operating at the maximum power level is placed in the phone holder, under the phantom, which is filled with head simulating liquid. The E-Field probe measures the electric field inside the phantom. The OpenSAR software computes the results to give a SAR value in a 1g or 10g mass.

4.2 Probe


For the measurements the Specific Dosimetric E-Field Probe SSE5 SN 09/13 EP168 with following specifications is used

- Dynamic range: 0.01-100 W/kg
- Probe Length: 330 mm
- Length of Individual Dipoles: 4.5 mm
- Maximum external diameter: 8 mm
- Probe Tip External Diameter : 5 mm

Waltek Testing Group (Shenzhen) Co., Ltd.
<http://www.semtest.com.cn>

- Distance between dipoles / probe extremity: 2.7mm
 - Probe linearity: <0.25 dB
 - Axial Isotropy: <0.25 dB
 - Spherical Isotropy: <0.50 dB
 - Calibration range: 700 to 3000MHz for head & body simulating liquid.
- Angle between probe axis (evaluation axis) and surface normal line: less than 30°

Probe calibration is realized, in compliance with EN 62209-1 and IEEE 1528 STD, with CALISAR, Antenna proprietary calibration system. The calibration is performed with the EN 62209-1 annexe technique using reference guide at the five frequencies.

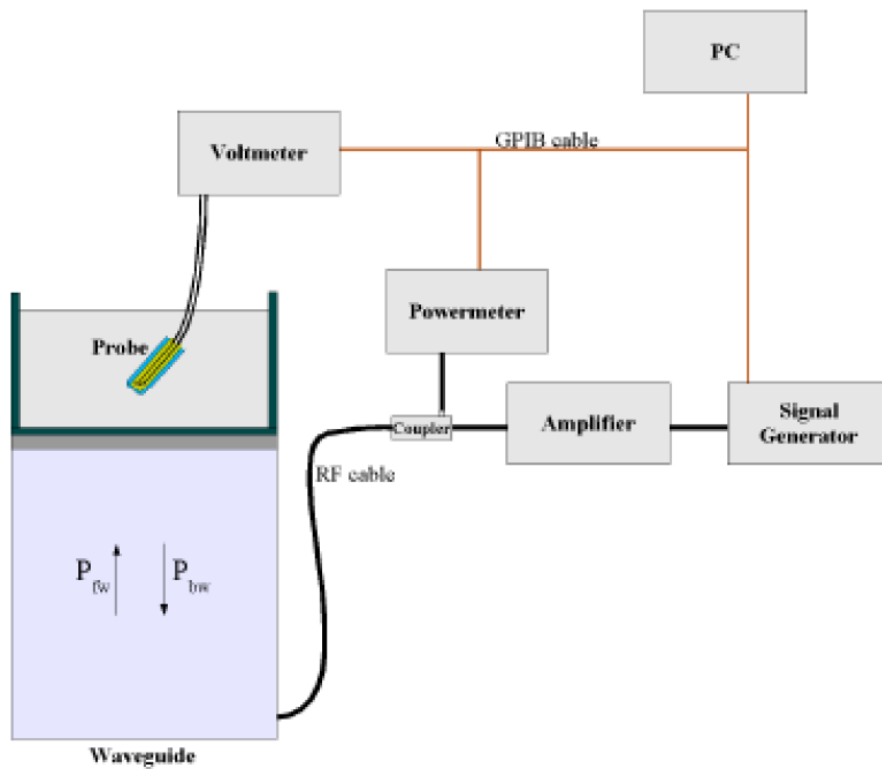

$$SAR = \frac{4(P_{fw} - P_{bw})}{ab\delta} \cos^2\left(\pi \frac{y}{a}\right) e^{-(2z/\delta)}$$

Where :

P_{fw} = Forward Power

P_{bw} = Backward Power

a and b = Waveguide dimensions

δ = Skin depth

Keithley configuration:

Rate = Medium; Filter = ON; RDGS = 10; Filter type = Moving Average; Range auto after each calibration, a SAR measurement is performed on a validation dipole and compared with a NPL calibrated probe, to verify it.

Waltek Testing Group (Shenzhen) Co., Ltd.

<http://www.semtest.com.cn>

The calibration factors, $CF(N)$, for the 3 sensors corresponding to dipole 1, dipole 2 and dipole 3 are:

$$CF(N)=SAR(N)/V_{lin}(N) \quad (N=1,2,3)$$

The linearised output voltage $V_{lin}(N)$ is obtained from the displayed output voltage $V(N)$ using

$$V_{lin}(N)=V(N)*(1+V(N)/DCP(N)) \quad (N=1,2,3)$$

where DCP is the diode compression point in mV.

4.3 Probe Calibration Process

Dosimetric Assessment Procedure

Each E-Probe/Probe Amplifier combination has unique calibration parameters. SATIMO Probe calibration procedure is conducted to determine the proper amplifier settings to enter in the probe parameters. The amplifier settings are determined for a given frequency by subjecting the probe to a known E-field density (1 mW/cm²) using an with CALISAR, Antenna proprietary calibration system.

Free Space Assessment Procedure

The free space E-field from amplified probe outputs is determined in a test chamber. This calibration can be performed in a TEM cell if the frequency is below 1 GHz and in a waveguide or other methodologies above 1 GHz for free space. For the free space calibration, the probe is placed in the volumetric center of the cavity and at the proper orientation with the field. The probe is rotated 360 degrees until the three channels show the maximum reading. The power density readings equates to 1mW/cm².

Temperature Assessment Procedure

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulated head tissue. The E-field in the medium correlates with the temperature rise in the dielectric medium. For temperature correlation calibration a RF transparent thermistor-based temperature probe is used in conjunction with the E-field probe.

$$SAR = C \frac{\Delta T}{\Delta t}$$

Where:

Δt = exposure time (30 seconds),

C = heat capacity of tissue (brain or muscle),

ΔT = temperature increase due to RF exposure.

SAR is proportional to $\Delta T / \Delta t$, the initial rate of tissue heating, before thermal diffusion takes place. The electric field in the simulated tissue can be used to estimate SAR by equating the thermally derived SAR to that with the E- field component.

$$SAR = \frac{|E|^2 \cdot \sigma}{\rho}$$

Where:

σ = simulated tissue conductivity,


ρ = Tissue density (1.25 g/cm³ for brain tissue)

4.4 Phantom

For the measurements the Specific Anthropomorphic Mannequin (SAM) defined by the IEEE SCC-34/SC2 group is used. The phantom is a polyurethane shell integrated in a wooden table. The thickness of the phantom amounts to 2mm +/- 0.2mm. It enables the dosimetric evaluation of left and right phone usage and includes an additional flat phantom part for the simplified performance check. The phantom set-up includes a cover, which prevents the evaporation of the liquid.

4.5 Device Holder

The positioning system allows obtaining cheek and tilting position with a very good accuracy. In compliance with CENELEC, the tilt angle uncertainty is lower than 1 °.

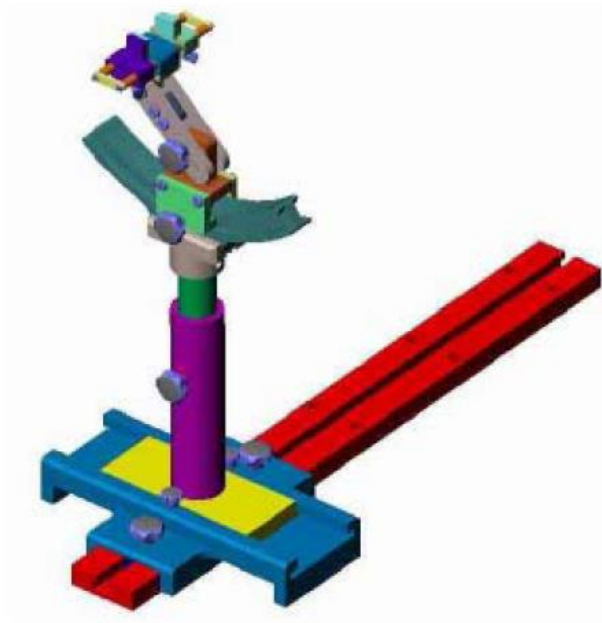

System Material	Permittivity	Loss Tangent
Delrin	3.7	0.005


4.6 Test Equipment List

Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
E-Field Probe	MVG	SSE2	SN 45/15 EPGO280	2020-07-03	2021-07-02
2450MHz Dipole	MVG	SID2450	SN 13/15 DIP 2G450-364	2020-03-11	2021-03-10
5 GHz Waveguide	MVG	SWG5500	SN 49/16 WGA45	2020-07-03	2021-07-02
Dielectric Probe Kit	SATIMO	SCLMP	SN 47/12 OCPG49	2020-03-11	2021-03-10
SAM Phantom	SATIMO	SAM	SN/ 47/12 SAM95	N/A	N/A
MULTIMETER	KEITHLEY	Keithley 2000	4006367	2020-04-28	2021-04-27
Power meter	Keithley	3500	JC-2017-09-001	2020-04-28	2021-04-27
Power meter	Keithley	3500	JC-2017-09-001	2020-04-28	2021-04-27
Power Sensor	Agilent	11636B	JC-2017-10-002	2020-04-28	2021-04-27
Signal Generator	Rohde & Schwarz	SMR20	100047	2020-04-28	2021-04-27
Spectrum Analyzer	Agilent	E4407B	MY41440400	2020-04-28	2021-04-27
Universal Tester	Rohde & Schwarz	CMU200	112012	2020-04-28	2021-04-27
Network Analyzer	HP	8753C	SEMT-1064	2020-04-28	2021-04-27
Directional Couplers	Agilent	778D	20160	2020-04-28	2021-04-27

5. Tissue Simulating Liquids

5.1 Composition of Tissue Simulating Liquid

For the measurement of the field distribution inside the SAM phantom with SMTIMO, the phantom must be filled with around 25 liters of homogeneous body tissue simulating liquid. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm. Please see the following photos for the liquid height.

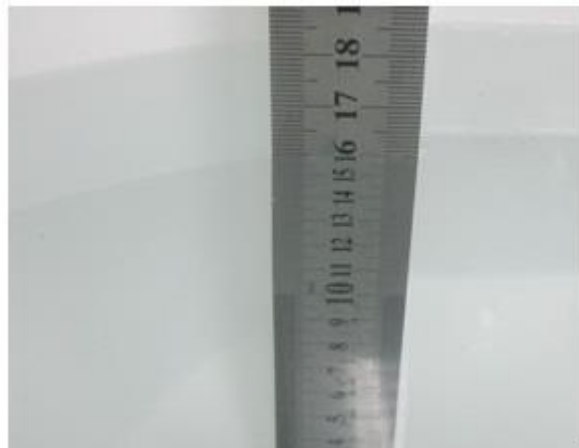

Liquid Height for Body SAR

The Composition of Tissue Simulating Liquid

Frequency (MHz)	Water (%)	Salt (%)	Sugar (%)	HEC (%)	Preventol (%)	DGBE (%)
Body						
2450	68.6	0.1	0	0	0	31.3

Frequency (MHz)	Water (%)	Hexyl Carbitol (%)	Triton X-100 (%)
Body			
5200-5800	78.6	10.7	10.7

5.2 Tissue Dielectric Parameters for Head and Body Phantoms

The IEEE Std. 1528, FCC KDBs and CEI/IEC 62209 standards state that the system validation measurements must be performed using a reference dipole meeting the fore mentioned return loss and mechanical dimension requirements. The validation measurement must be performed against a liquid filled flat phantom, with the phantom constructed as outlined in the fore mentioned standards. Per the standards, the dipole shall be positioned below the bottom of the phantom, with the dipole length centered and parallel to the longest dimension of the flat phantom, with the top surface of the dipole at the described distance from the bottom surface of the phantom.

Target Frequency (MHz)	Head		Body	
	Conductivity (σ)	Permittivity (ϵ_r)	Conductivity (σ)	Permittivity (ϵ_r)
150	0.76	52.3	0.80	61.9
300	0.87	45.3	0.92	58.2
450	0.87	43.5	0.94	56.7
750	0.89	41.9	0.96	55.5
835	0.90	41.5	0.97	55.2
900	0.97	41.5	1.05	55.0
915	0.98	41.5	1.06	55.0
1450	1.20	40.5	1.30	54.0
1610	1.29	40.3	1.40	53.8
1800-2000	1.40	40.0	1.52	53.3
2450	1.80	39.2	1.95	52.7
3000	2.40	38.5	2.73	52.0
5200	4.66	36.0	5.30	49.0
5300	35.9	4.76	5.42	48.9
5600	5.07	35.5	5.77	48.5
5800	5.27	35.3	6.00	48.2

5.3 Tissue Calibration Result

The dielectric parameters of the liquids were verified prior to the SAR evaluation using COMOSAR Dielectric Probe Kit and an Agilent Network Analyzer.

Calibration Result for Dielectric Parameters of Tissue Simulating Liquid

Body Tissue Simulating Liquid									
Freq. MHz.	Temp. (°C)	Conductivity			Permittivity			Limit (%)	Date
		Reading (σ)	Target (σ)	Delta (%)	Reading (ϵ_r)	Target (ϵ_r)	Delta (%)		
2450	22.3	1.92	1.95	-1.54	51.64	52.70	-2.01	±5	2020-10-28
5200	22.3	5.45	5.30	2.83	47.86	49.0	-2.33	±5	2020-10-26
5300	22.3	5.58	5.42	2.95	47.23	48.9	-3.42	±5	2020-10-26
5600	22.3	5.91	5.77	2.43	46.85	48.5	-3.40	±5	2020-10-26
5800	22.3	6.12	6.00	2.00	46.31	48.2	-3.92	±5	2020-10-26


6. SAR Measurement Evaluation

6.1 Purpose of System Performance Check

The system performance check verifies that the system operates within its specifications. System and operator errors can be detected and corrected. It is recommended that the system performance check be performed prior to any usage of the system in order to guarantee reproducible results. The system performance check uses normal SAR measurements in a simplified setup with a well characterized source. This setup was selected to give a high sensitivity to all parameters that might fail or vary over time. The system check does not intend to replace the calibration of the components, but indicates situations where the system uncertainty is exceeded due to drift or failure.

6.2 System Setup

In the simplified setup for system evaluation, the EUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave which comes from a signal generator at frequency 2450MHz and 5000MHz. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom.

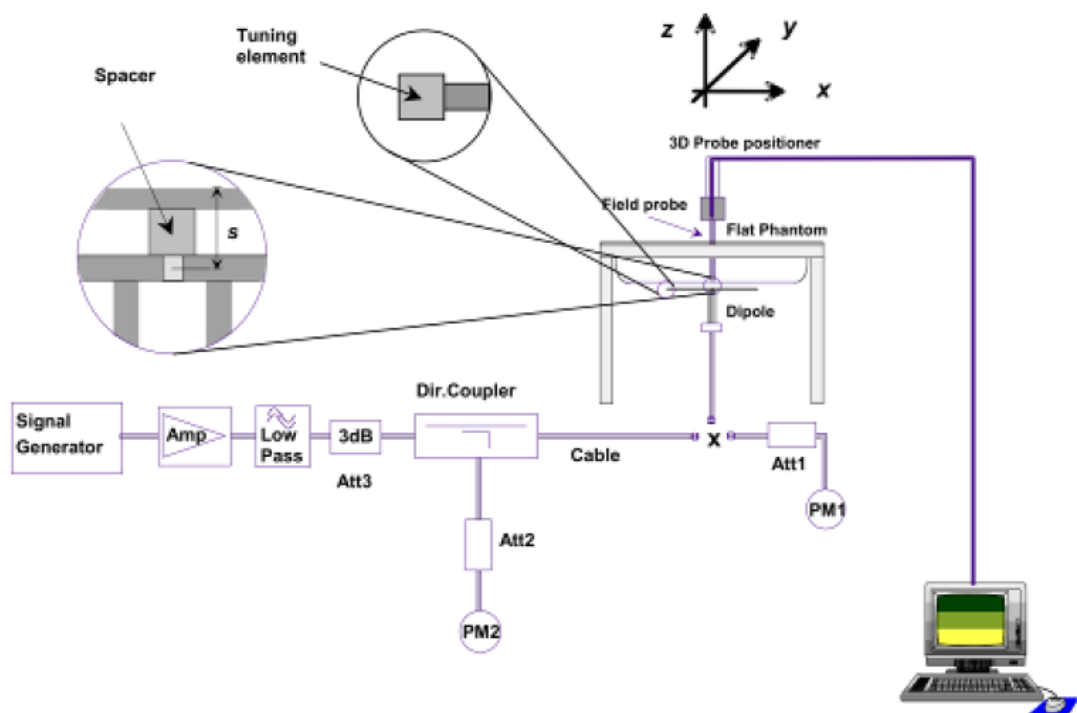

System Verification Setup Block Diagram



Setup Photo of Dipole Antenna

The output power on dipole port must be calibrated to 24 dBm(250 mW) before dipole is connected.

The output power on 5 GHz Waveguide must be calibrated to 20 dBm (100mW) before 5 GHz Waveguide is connected.

6.3 Validation Results

Comparing to the original SAR value provided by SATIMO, the validation data should be within its specification of 10 %. Table 6.1 shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion.

Frequency	Targeted SAR _{1g}	Measured SAR _{1g}	Normalized SAR _{1g}	Tolerance	Date
MHz	(W/kg)	(W/kg)	(W/kg)	(%)	
Body					
2450	50.33	12.87	51.48	2.28	2020-10-28
5200	154.45	16.546	165.46	7.13	2020-10-26
5400	163.31	17.281	172.81	5.82	2020-10-26
5600	165.72	17.604	176.04	6.23	2020-10-26
5800	170.71	18.207	182.07	6.65	2020-10-26

Targeted and Measurement SAR

Please refer to Annex A for the plots of system performance check.

7. EUT Testing Position

7.1 EUT Antenna Position

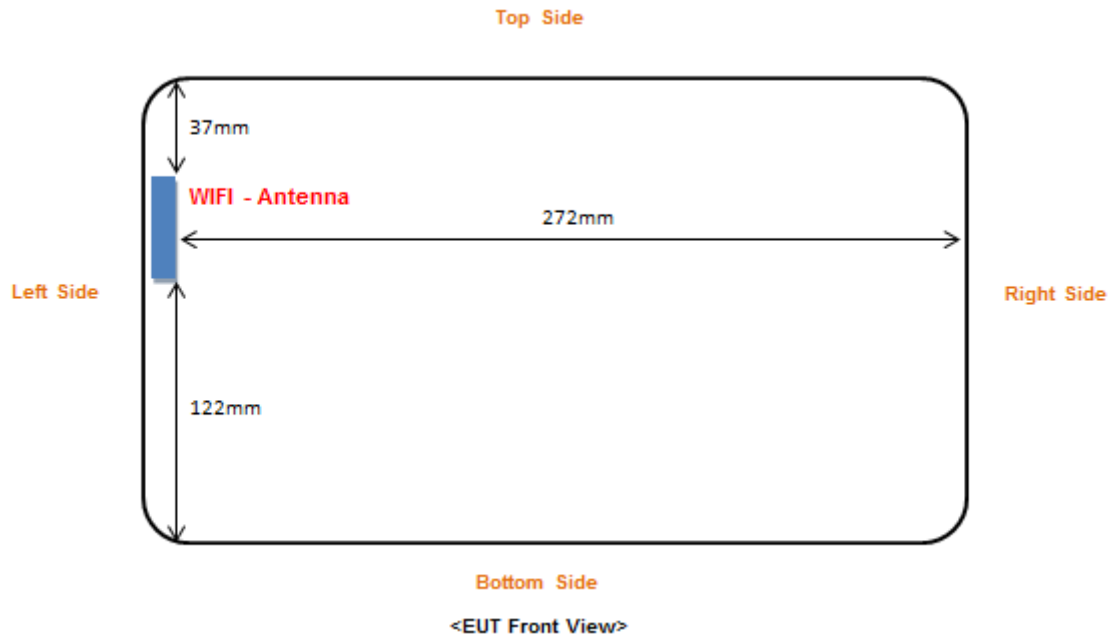


Fig 7.1 Block Diagram for EUT Antenna Position

7.2 EUT Testing Position

SAR Test Exclusion Thresholds <50mm

Frequency Bands	Tune up Power (dBm)	Tune up (mW)	Min test Separation Distance(mm)						Result						Limit
			Front	Back	Left	Right	Top	Bottom	Front	Back	Left	Right	Top	Bottom	
WLAN(2.4G)	12.0	15.85	5	5	5	/	37	/	4.97	4.97	4.97	/	0.67	/	3
WLAN(5.2G)	14.5	28.18	5	5	5	/	37	/	12.9	12.9	12.9	/	1.74	/	3
WLAN(5.3G)	15.0	31.62	5	5	5	/	37	/	14.6	14.6	14.6	/	1.97	/	3
WLAN(5.6G)	13.5	22.39	5	5	5	/	37	/	10.5	10.5	10.5	/	1.42	/	3
WLAN(5.8G)	13.5	22.39	5	5	5	/	37	/	10.8	10.8	10.8	/	1.46	/	3

Note: 1.Refer to Chapter 9.1 Conducted RF Output Power

2. Per KDB 447498 D01 V06, the 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$$

SAR Test Exclusion Thresholds <50mm

Frequency Bands	Tune up Power (dBm)	Tune up (mW)	Min test Separation Distance(mm)						Evaluation					
			Front	Back	Left	Right	Top	Bottom	Front	Back	Left	Right	Top	Bottom
WLAN(2.4G)	12.0	15.85	/	/	/	272	/	122	/	/	/	2316	/	816
WLAN(5.2G)	14.5	28.18	/	/	/	272	/	122	/	/	/	2286	/	786
WLAN(5.3G)	15.0	31.62	/	/	/	272	/	122	/	/	/	2285	/	785
WLAN(5.6G)	13.5	22.39	/	/	/	272	/	122	/	/	/	2282	/	782
WLAN(5.8G)	13.5	22.39	/	/	/	272	/	122	/	/	/	2282	/	782

Note: 1.Refer to Chapter 9.1 Conducted RF Output Power

Body mode SAR assessments are required for this device. This EUT was tested in different positions for different SAR test modes, more information as below:

Body SAR tests, Test distance: 0mm						
Antennas	Front	Back	Left Side	Right Side	Top Side	Bottom
WLAN(2.4G)	Yes	Yes	Yes	No	No	No
WLAN(5.2G)	Yes	Yes	Yes	No	No	No
WLAN(5.3G)	Yes	Yes	Yes	No	No	No
WLAN(5.6G)	Yes	Yes	Yes	No	No	No
WLAN(5.8G)	Yes	Yes	Yes	No	No	No

Remark:

- Referring to KDB 616217 D04 v01r02, KDB 248227 D01 v02r02 and KDB 447498 D01 v06, this device is overall diagonal dimension(>20cm) notebook, tested in direct contact (no gap) with flat phantom.

Please refer to Annex D for the EUT test setup photos.

8. SAR Measurement Procedures

8.1 Measurement Procedures

The measurement procedures are as follows:

- (a) Use base station simulator (if applicable) or engineering software to transmit RF power continuously (continuous Tx) in the highest power channel.
- (b) Keep EUT to radiate maximum output power or 100% factor (if applicable)
- (c) Measure output power through RF cable and power meter.
- (d) Place the EUT in the positions as Annex D demonstrates.
- (e) Set scan area, grid size and other setting on the SATIMO software.
- (f) Measure SAR results for the highest power channel on each testing position.
- (g) Find out the largest SAR result on these testing positions of each band
- (h) Measure SAR results for other channels in worst SAR testing position if the SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

8.2 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The SATIMO software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine. The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

8.3 Area & Zoom Scan Procedures

First Area Scan is used to locate the approximate location(s) of the local peak SAR value(s). The measurement grid within an Area Scan is defined by the grid extent, grid step size and grid offset. Next, in order to determine the EM field distribution in a three-dimensional spatial extension, Zoom Scan is required. The Zoom Scan measures 5x5x7 points with step size 8, 8 and 5 mm for 300 MHz to 3 GHz, and 8x8x8 points with step size 4, 4 and 2.5 mm for 3 GHz to 6 GHz. The Zoom Scan is performed around the highest E-field value to determine the averaged SAR-distribution over 10 g.

8.4 Volume Scan Procedures

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing (step-size is 4, 4 and 2.5 mm). When all volume scan were completed, the software can combine and subsequently superpose these measurement data to calculating the multiband SAR.

8.5 SAR Averaged Methods

The local SAR inside the phantom is measured using small dipole sensing elements inside a probe body. The probe tip must not be in contact with the phantom surface in order to minimize measurements errors, but the highest local SAR will occur at the surface of the phantom.

An extrapolation is using to determinate this highest local SAR values. The extrapolation is based on a fourth-order least-square polynomial fit of measured data. The local SAR value is then extrapolated from the liquid surface with a 1mm step.

The measurements have to be performed over a limited time (due to the duration of the battery) so the step of measurement is high. It could vary between 5 and 8 mm. To obtain an accurate assessment of the maximum SAR averaged over 10g and 1 g requires a very fine resolution in the three dimensional scanned data array.

8.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In SATIMO measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drift more than 5%, the SAR will be retested.

9. SAR Test Result

9.1 Conducted RF Output Power

WLAN - Maximum Average Power					
Test Mode	Data Rate	Channel	Frequency (MHz)	Average Power (dBm)	Tune-up power (dBm)
802.11b	1Mbps	CH 01	2412	10.57	11.0
		CH 06	2437	10.42	11.0
		CH 11	2462	10.16	10.5
802.11g	6Mbps	CH 01	2412	10.78	11.0
		CH 06	2437	11.16	11.5
		CH 11	2462	11.18	11.5
802.11n (20MHz)	MCS0	CH 01	2412	10.24	10.5
		CH 06	2437	11.34	11.5
		CH 11	2462	11.91	12.0

WLAN(5.2G) - Conducted Power				
Test Mode	Channel	Frequency (MHz)	Average Power (dBm)	Tune-up power (dBm)
802.11a	36	5180	13.64	14.0
	40	5200	14.05	14.5
	48	5240	13.55	14.0
802.11n (HT20)	36	5180	12.90	13.0
	40	5200	13.47	14.0
	48	5240	13.88	14.0
802.11n (HT40)	38	5190	12.71	13.0
	46	5230	12.94	13.0
802.11ac (VHT80)	42	5210	12.56	13.0

WLAN(5.3G) - Conducted Power				
Test Mode	Channel	Frequency (MHz)	Average Power (dBm)	Tune-up power (dBm)
802.11a	CH 52	5260	13.89	14.0
	CH 56	5280	14.18	14.5
	CH 64	5320	14.64	15.0
802.11n (HT20)	CH 52	5260	13.55	14.0

	CH 56	5280	13.82	14.0
	CH 64	5320	14.22	14.5
802.11n (HT40)	CH 54	5270	13.57	14.0
	CH62	5310	14.13	14.5
802.11ac (VHT80)	CH 58	5290	13.18	14.0

WLAN(5.6G) – Conducted Power				
Test Mode	Channel	Frequency (MHz)	Average Power (dBm)	Tune-up power (dBm)
802.11a	CH 100	5500	13.45	13.5
	CH 120	5600	12.77	13.0
	CH 140	5700	12.58	13.0
802.11n (HT20)	CH 100	5500	13.07	13.5
	CH 120	5600	12.17	12.5
	CH 140	5700	12.42	12.5
802.11n (HT40)	CH 102	5510	13.48	13.5
	CH 118	5590	12.72	13.0
	CH 134	5670	12.87	13.0
802.11ac (VHT80)	CH 106	5530	11.53	12.0
	CH 122	5610	11.04	11.5

WLAN(5.8G) - Conducted Power				
Test Mode	Channel	Frequency (MHz)	Average Power (dBm)	Tune-up power (dBm)
802.11a	CH 149	5745	12.95	13.5
	CH 157	5785	13.14	13.5
	CH 165	5825	13.23	13.5
802.11n (HT20)	CH 149	5745	12.65	13.0
	CH 157	5785	12.33	12.5
	CH 165	5825	13.33	13.5
802.11n (HT40)	CH 151	5755	12.14	12.5
	CH 159	5795	12.47	12.5
802.11ac (VHT80)	CH 155	5775	11.43	11.5

Remark:

1. Per KDB 248227 D01 v02r02, For 802.11b DSSS SAR measurements, DSSS SAR procedure applies to fixed exposure test position and initial test position procedure applies to multiple exposure test positions.
2. Per KDB 248227 D01 v02r02, For 802.11b DSSS SAR measurements ,when the reported SAR of the highest measured maximum output power channel (see 3.1) for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing
Waltek Testing Group (Shenzhen) Co., Ltd.
<http://www.semtest.com.cn>

is required for 802.11b DSSS in that exposure configuration. When the reported SAR is > 0.8 W/kg, SAR is required for that exposure configuration using the next highest measured output power channel. When any reported SAR is > 1.2 W/kg, SAR is required for the third channel; i.e., all channels require testing.

3 .For OFDM modes (802.11g/n), SAR is not required when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and it is ≤ 1.2 W/kg.

9.2 Test Results for Standalone SAR Test

Body SAR

WLAN 2.4GHz –Body SAR Test									
Plot No.	Mode	Test Position Body	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
1.	802.11b	Back side	01	2412	10.57	11.0	1.104	0.449	0.496
2.	802.11b	Front side	01	2412	10.57	11.0	1.104	0.614	0.678
3.	802.11b	Left side	01	2412	10.57	11.0	1.104	1.033	1.141
4.	802.11b	Left side	01	2412	10.57	11.0	1.104	1.005	1.110
5.	802.11b	Left side	06	2437	10.42	11.0	1.143	0.990	1.131
6.	802.11b	Left side	11	2462	10.16	10.5	1.081	1.054	1.140

WLAN 2.4GHz –Body SAR Test									
Plot No.	Mode	Test Position Body	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
7.	802.11n (HT20)	Back side	11	2462	11.91	12.0	1.021	0.475	0.485
8.	802.11n (HT20)	Front side	11	2462	11.91	12.0	1.021	0.714	0.729
9.	802.11n (HT20)	Left side	11	2462	11.91	12.0	1.021	1.150	1.174
10.	802.11n (HT20)	Left side	11	2462	11.91	12.0	1.021	1.086	1.109
11.	802.11n (HT20)	Left side	01	2412	10.24	11.0	1.191	0.813	0.968
12.	802.11n (HT20)	Left side	06	2437	11.34	12.0	1.164	0.959	1.116

WLAN 5.2GHz –Body SAR Test									
Plot No.	Mode	Test Position Body	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
13.	802.11a	Back side	40	5200	14.05	14.5	1.109	0.853	0.946
14.	802.11a	Back side	40	5200	14.05	14.5	1.109	0.807	0.895
15.	802.11a	Front side	40	5200	14.05	14.5	1.109	1.237	1.372
16.	802.11a	Front side	40	5200	14.05	14.5	1.271	1.209	1.341
17.	802.11a	Left side	40	5200	14.05	14.5	1.109	0.196	0.217
18.	802.11a	Back side	36	5180	13.64	14.0	1.086	0.837	0.909

19.	802.11a	Back side	48	5240	13.55	14.0	1.109	0.786	0.872
20.	802.11a	Front side	36	5180	13.64	14.0	1.086	1.163	1.264
21.	802.11a	Front side	48	5240	13.55	14.0	1.109	1.019	1.130

WLAN 5.3GHz –Body SAR Test									
Plot No.	Mode	Test Position Body	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
22.	802.11a	Back Side	64	5320	14.64	15.0	1.086	0.627	0.681
23.	802.11a	Front Side	64	5320	14.64	15.0	1.086	0.970	1.054
24.	802.11a	Left Side	64	5320	14.64	15.0	1.086	0.085	0.092
25.	802.11a	Front Side	52	5260	13.89	14.0	1.026	1.173	1.203
26.	802.11a	Front Side	52	5260	13.89	14.0	1.026	1.094	1.122
27.	802.11a	Front Side	56	5280	14.18	14.5	1.076	1.098	1.182

WLAN 5.6GHz –Body SAR Test									
Plot No.	Mode	Test Position Body	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
28.	802.11n (HT40)	Back Side	102	5510	13.48	13.5	1.005	0.610	0.613
29.	802.11n (HT40)	Front Side	102	5510	13.48	13.5	1.005	1.056	1.061
30.	802.11n (HT40)	Left Side	102	5510	13.48	13.5	1.005	0.166	0.167
31.	802.11n (HT40)	Front Side	118	5590	12.72	13.0	1.067	1.123	1.198
32.	802.11n (HT40)	Front Side	134	5670	12.87	13.0	1.030	1.242	1.280
33.	802.11n (HT40)	Front Side	134	5670	12.87	13.0	1.030	1.165	1.200

WLAN 5.8GHz –Body SAR Test									
Plot No.	Mode	Test Position Body	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
34.	802.11n (HT20)	Back Side	165	5825	13.33	13.5	1.040	0.625	0.650
35.	802.11n (HT20)	Front Side	165	5825	13.33	13.5	1.040	1.173	1.220
36.	802.11n (HT20)	Left Side	165	5825	13.33	13.5	1.040	0.178	0.185

37.	802.11n (HT20)	Front Side	149	5745	12.65	13.0	1.084	1.292	1.400
38.	802.11n (HT20)	Front Side	149	5745	12.65	13.0	1.084	1.268	1.374
39.	802.11n (HT20)	Front Side	157	5785	12.33	12.5	1.040	1.251	1.301

Repeated SAR

Mode	Test Position Body	Frequency		SAR1g (W/kg)	Repeated SAR		Ratio	
		CH.	MHz		1	2	1	2
WLAN 2.4GHz 802.11b	Left side	01	2412	1.033	1.005	/	1.028	/
WLAN 2.4GHz 802.11n (HT20)	Left side	11	2462	1.150	1.086	/	1.059	/
WLAN 5.2GHz 802.11a	Back side	40	5200	0.853	0.807	/	1.057	/
WLAN 5.2GHz 802.11a	Front side	40	5200	1.237	1.209	/	1.023	/
WLAN 5.3GHz 802.11a	Front Side	52	5260	1.173	1.094	/	1.072	/
WLAN 5.6GHz 802.11n (HT40)	Front Side	134	5670	1.242	1.165	/	1.066	/
WLAN 5.8GHz 802.11n (HT20)	Front Side	149	5745	1.292	1.268	/	1.019	/

Remark:

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg (~ 10% from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20.

10.1 Uncertainty for EUT SAR Test

a	b	c	d	e= f(d,k)	f	g	h= c*f/e	i= c*g/e	k
Uncertainty Component	Sec.	Tol (+- %)	Prob. Dist.	Div.	Ci (1g)	Ci (10g)	1g Ui (+-%)	10g Ui (+-%)	Vi
Measurement System									
Probe calibration	E.2.1	7.0	N	1	1	1	7.00	7.00	∞
Axial Isotropy	E.2.2	2.5	R	$\sqrt{3}$	$(1_{Cp})^{1/2}$	$(1_{Cp})^{1/2}$	1.02	1.02	∞
Hemispherical Isotropy	E.2.2	4.0	R	$\sqrt{3}$	$(Cp)^{1/2}$	$(Cp)^{1/2}$	1.63	1.63	∞
Boundary effect	E.2.3	1.0	R	$\sqrt{3}$	1	1	0.58	0.58	∞
Linearity	E.2.4	5.0	R	$\sqrt{3}$	1	1	2.89	2.89	∞
System detection limits	E.2.5	1.0	R	$\sqrt{3}$	1	1	0.58	0.58	∞
Readout Electronics	E.2.6	0.02	N	1	1	1	0.02	0.02	∞
Reponse Time	E.2.7	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	∞
Integration Time	E.2.8	2.0	R	$\sqrt{3}$	1	1	1.15	1.15	∞
RF ambient Conditions – Noise	E.6.1	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	∞
RF ambient Conditions - Reflections	E.6.1	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	∞
Probe positioner Mechanical Tolerance	E.6.2	2.0	R	$\sqrt{3}$	1	1	1.15	1.15	∞
Probe positioning with respect to Phantom Shell	E.6.3	0.05	R	$\sqrt{3}$	1	1	0.03	0.03	∞
Extrapolation, interpolation and integration Algorithms for Max. SAR Evaluation	E.5	5.0	R	$\sqrt{3}$	1	1	2.89	2.89	∞
Test Sample Related									
Test sample positioning	E.4.2	0.03	N	1	1	1	0.03	0.03	N-1
Device Holder Uncertainty	E.4.1	5.00	N	1	1	1	5.00	5.00	
Output power Variation - SAR drift measurement	E.2.9	12.02	R	$\sqrt{3}$	1	1	6.94	6.94	∞
SAR scaling	E6.5	0.0	R	$\sqrt{3}$	1	1	0.0	0.0	∞
Phantom and Tissue Parameters									
Phantom Uncertainty (Shape and thickness tolerances)	E.3.1	0.05	R	$\sqrt{3}$	1	1	0.03	0.03	∞
Uncertainty in SAR correction for deviations in permittivity and conductivity	E3.2	1.9	R	$\sqrt{3}$	1	0.84	1.10	0.90	∞
Liquid conductivity - deviation from target value	E.3.2	5.00	R	$\sqrt{3}$	0.64	0.43	1.85	1.24	∞

Liquid conductivity measurement uncertainty	-	E.3.3	5.00	N	1	0.64	0.43	3.20	2.15	∞
Liquid permittivity - deviation from target value		E.3.2	0.37	R	$\sqrt{3}$	0.6	0.49	0.13	0.10	∞
Liquid permittivity measurement uncertainty	-	E.3.3	10.00	N	1	0.6	0.49	6.00	4.90	∞
Combined Standard Uncertainty				RSS				12.98	12.53	
Expanded Uncertainty (95% Confidence interval)				K=2				25.32	24.43	

10.2 Uncertainty for System Performance Check

a	b	c	d	e= f(d,k)	f	g	h= c*f/e	i= c*g/e	k
Uncertainty Component	Sec.	Tol (+- %)	Prob. Dist.	Div.	Ci (1g)	Ci (10g)	1g Ui (+-%)	10g Ui (+-%)	Vi
Measurement System									
Probe calibration	E.2.1	7.0	N	1	1	1	7.00	7.00	∞
Axial Isotropy	E.2.2	2.5	R	$\sqrt{3}$	$(1_{-}Cp)^{1/2}$	$(1_{-}Cp)^{1/2}$	1.02	1.02	∞
Hemispherical Isotropy	E.2.2	4.0	R	$\sqrt{3}$	$(Cp)^{1/2}$	$(Cp)^{1/2}$	1.63	1.63	∞
Boundary effect	E.2.3	1.0	R	$\sqrt{3}$	1	1	0.58	0.58	∞
Linearity	E.2.4	5.0	R	$\sqrt{3}$	1	1	2.89	2.89	∞
System detection limits	E.2.5	1.0	R	$\sqrt{3}$	1	1	0.58	0.58	∞
Modulation response	E.2.5	0	R	$\sqrt{3}$	0	0	0.0	0.0	∞
Readout Electronics	E.2.6	0.02	N	1	1	1	0.02	0.02	∞
Reponse Time	E.2.7	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	∞
Integration Time	E.2.8	2.0	R	$\sqrt{3}$	1	1	1.15	1.15	∞
RF ambient Conditions – Noise	E.6.1	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	∞
RF ambient Conditions - Reflections	E.6.1	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	∞
Probe positioner Mechanical Tolerance	E.6.2	2.0	R	$\sqrt{3}$	1	1	1.15	1.15	∞
Probe positioning with respect to Phantom Shell	E.6.3	0.05	R	$\sqrt{3}$	1	1	0.03	0.03	∞
Extrapolation, interpolation and integration Algorithms for Max. SAR Evaluation	E.5.2	5.0	R	$\sqrt{3}$	1	1	2.89	2.89	∞

Dipole									
Dipole axis to liquid Distance	8,E.4.2	1.00	N	$\sqrt{3}$	1	1	0.58	0.58	N-1
Input power and SAR drift measurement	8,6.6.2	12.02	R	$\sqrt{3}$	1	1	6.94	6.94	∞
Deviation of experimental dipole from numerical dipole	E.6.4	5.5	R	$\sqrt{3}$	1	1	3.20	3.20	∞
Phantom and Tissue Parameters									
Phantom Uncertainty (Shape and thickness tolerances)	E.3.1	0.05	R	$\sqrt{3}$	1	1	0.03	0.03	∞
Uncertainty in SAR correction for deviations in permittivity and conductivity	E3.2	2.0	R	$\sqrt{3}$	1	0.84	1.10	1.10	∞
Liquid conductivity - deviation from target value	E.3.2	5.00	R	$\sqrt{3}$	0.64	0.43	1.85	1.24	
Liquid conductivity - measurement uncertainty	E.3.3	5.00	N	1	0.64	0.43	3.20	2.15	
Liquid permittivity - deviation from target value	E.3.2	0.37	R	$\sqrt{3}$	0.6	0.49	0.13	0.10	
Liquid permittivity - measurement uncertainty	E.3.3	10.00	N	1	0.6	0.49	6.00	4.90	M
Combined Standard Uncertainty			RSS				12.00	11.50	
Expanded Uncertainty (95% Confidence interval)			K=2				23.39	22.43	

Annex A. Plots of System Performance Check

MEASUREMENT 1

Type: Validation measurement (Fast, 75.00 %)

Measurement duration: 12 minutes 21 seconds


E-field Probe: SN 45/15 EPGO280; ConvF: 5.64; Calibrated: 2020-07-03

A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Zoom Scan	dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Dipole
Band	CW2450
Signal	CW (Crest factor: 1.0)

B. SAR Measurement Results

Frequency (MHz)	2450.000000
Relative Permittivity (real part)	51.640383
Conductivity (S/m)	1.923006
Power Variation (%)	0.963737
Ambient Temperature	22.0
Liquid Temperature	22.3


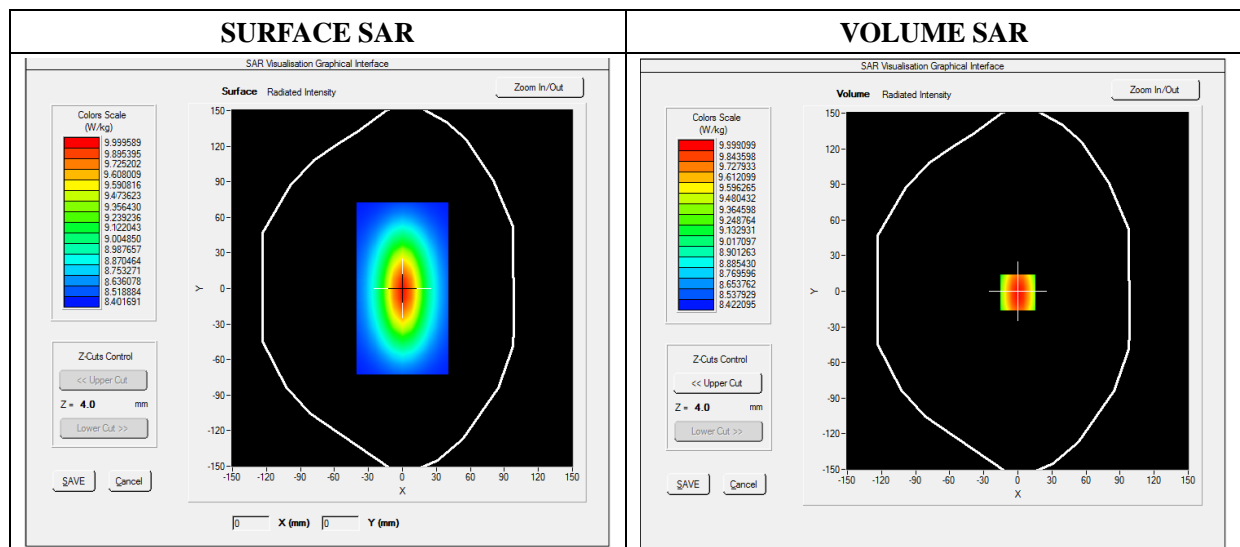


Maximum location: X=0.00, Y=0.00

SAR 10g (W/Kg)	6.124252
SAR 1g (W/Kg)	12.870381

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	12.14333	10.3644	8.4587	6.4358	5.6134	3.5723

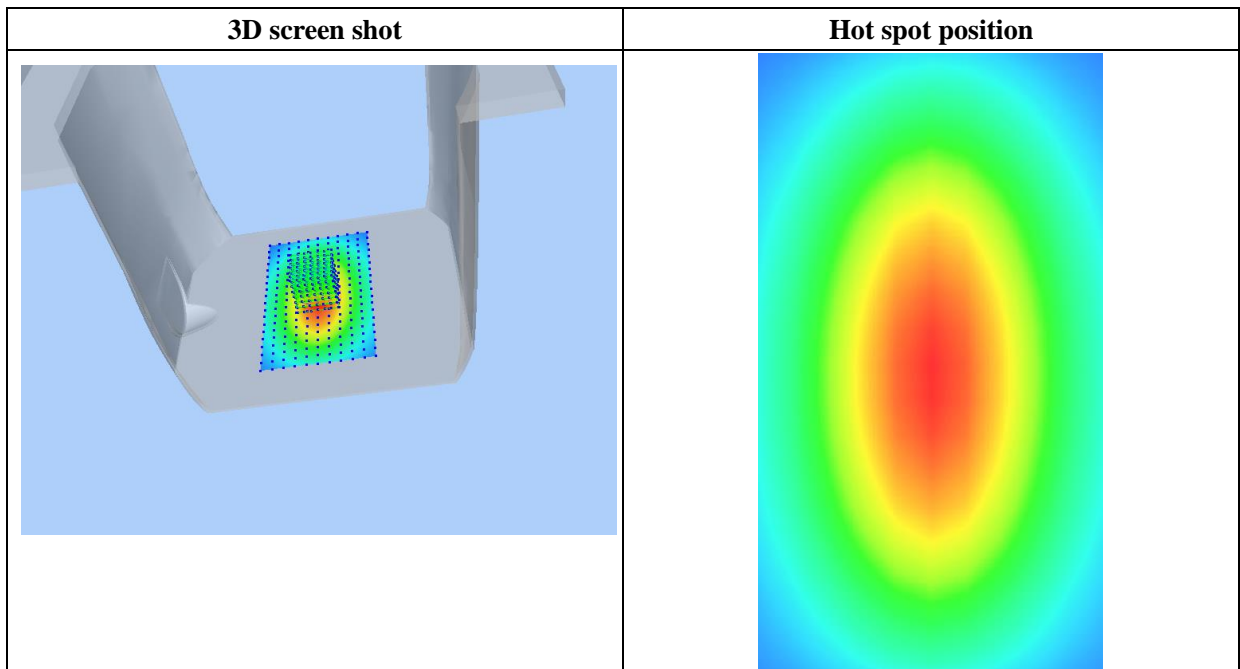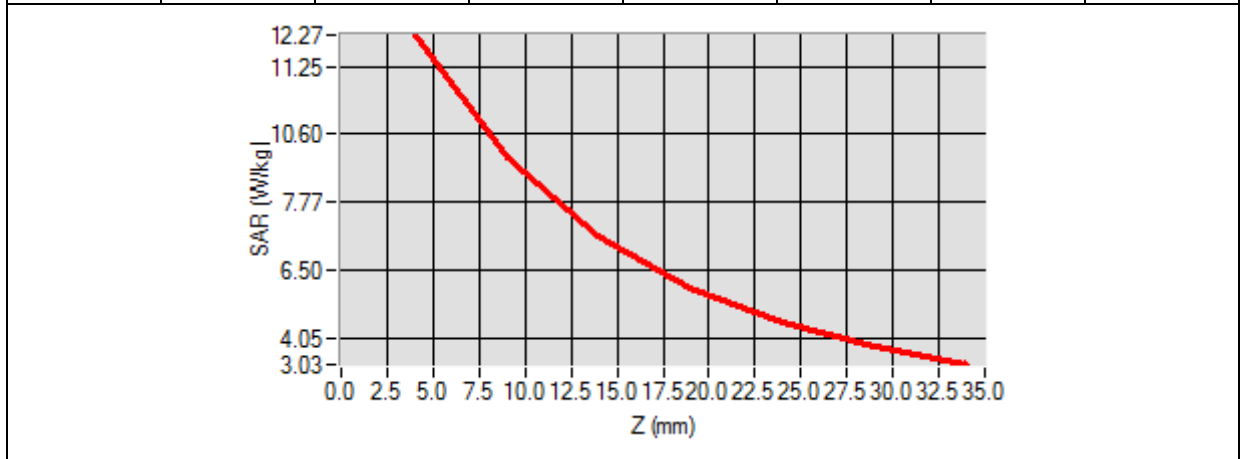

MEASUREMENT 2

Type: Validation measurement (Fast, 75.00 %)

Measurement duration: 12 minutes 21 seconds


E-field Probe: SN 45/15 EPGO280; ConvF: 5.64; Calibrated: 2020-07-03

A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Zoom Scan	dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Dipole
Band	CW5200
Signal	CW (Crest factor: 1.0)

B. SAR Measurement Results



Frequency (MHz)	5200.000000
Relative Permittivity (real part)	47.862911
Conductivity (S/m)	5.451483
Power Variation (%)	0.943782
Ambient Temperature	22.0
Liquid Temperature	22.3

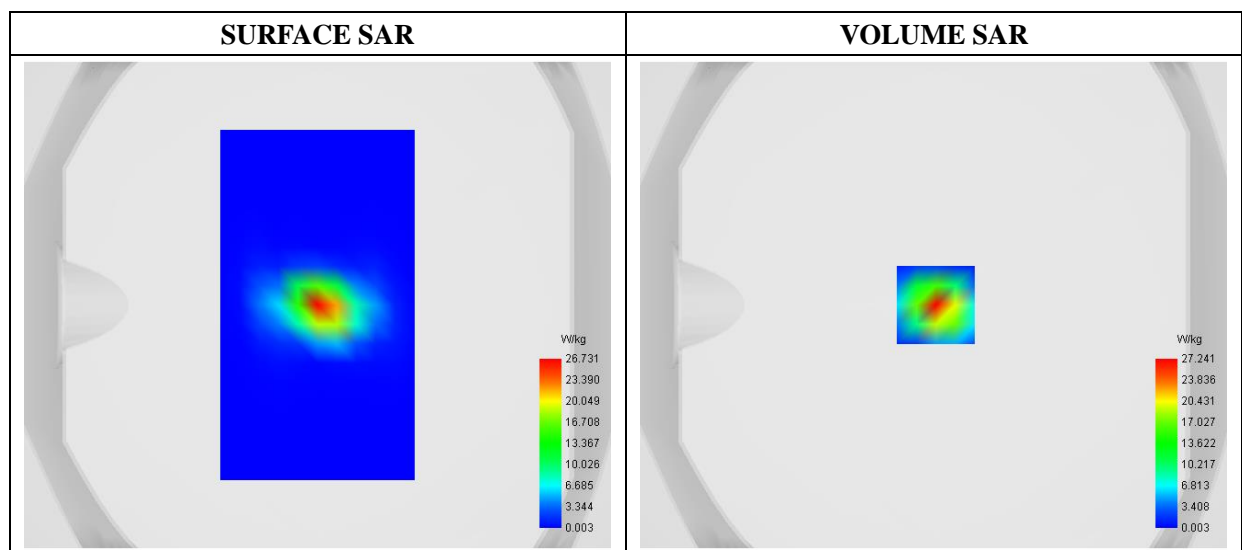

Maximum location: X=1.00, Y=0.00

SAR 10g (W/Kg)	5.810334
SAR 1g (W/Kg)	16.546226

Z (mm)	0.00	2.00	7.00	12.00	17.00	22.00	27.00
SAR (W/Kg)	41.7264	27.2408	6.5746	1.6234	0.3765	0.0793	0.0129

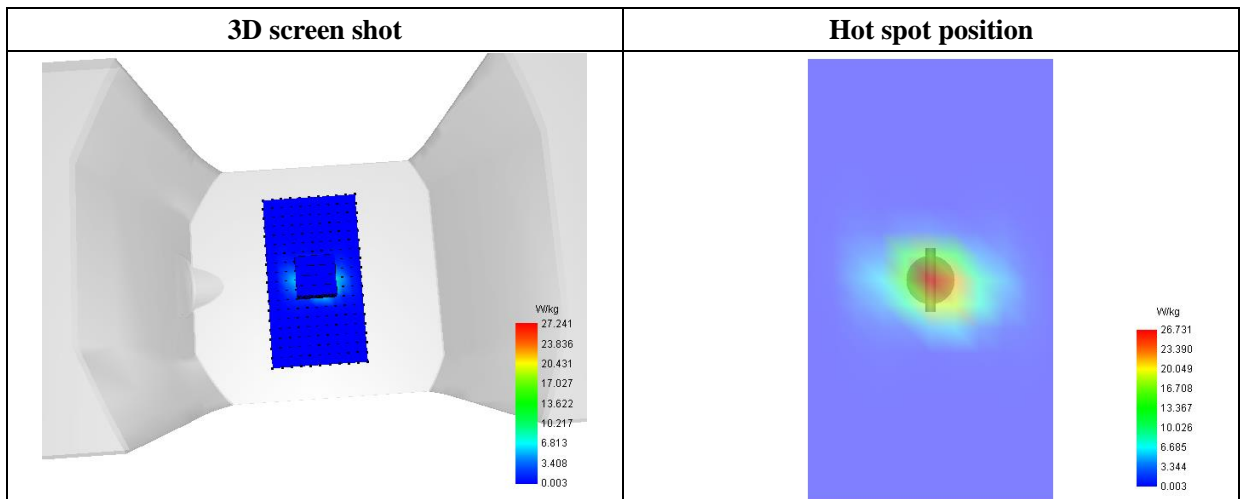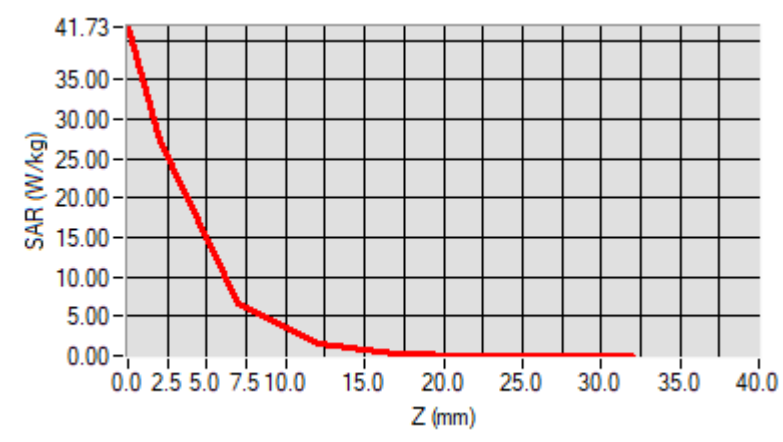

MEASUREMENT 3

Type: Validation measurement (Fast, 75.00 %)

Measurement duration: 12 minutes 21 seconds


E-field Probe: SN 45/15 EPGO280; ConvF: 5.64; Calibrated: 2020-07-03

A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Zoom Scan	dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Dipole
Band	CW5400
Signal	CW (Crest factor: 1.0)

B. SAR Measurement Results



Frequency (MHz)	5400.000000
Relative Permittivity (real part)	47.230839
Conductivity (S/m)	5.584192
Power Variation (%)	1.028731
Ambient Temperature	22.0
Liquid Temperature	22.3

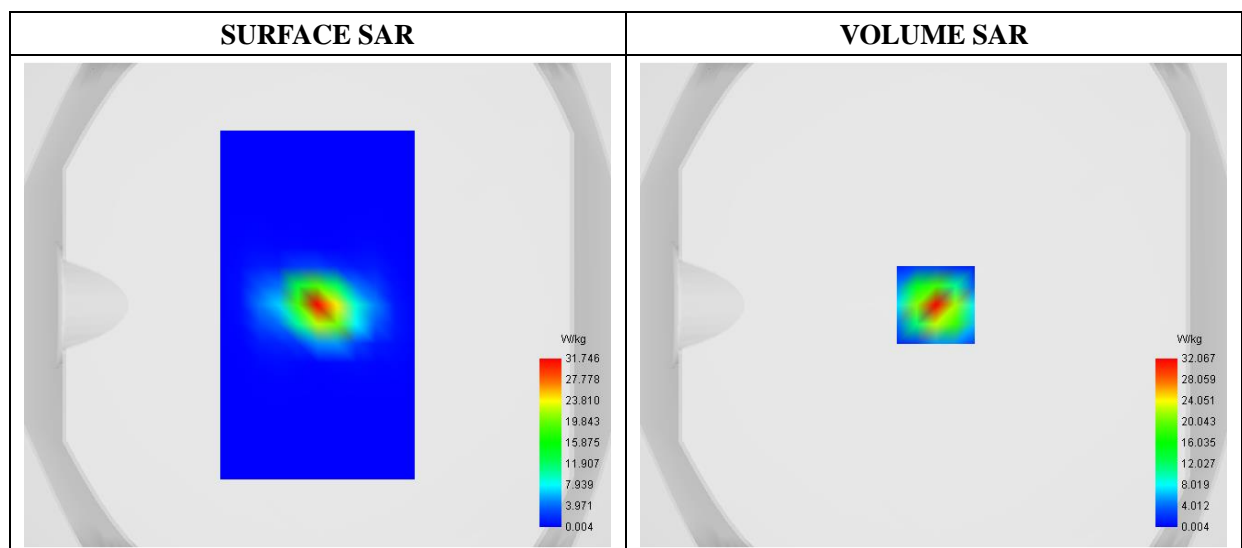

Maximum location: X=1.00, Y=0.00

SAR 10g (W/Kg)	5.947588
SAR 1g (W/Kg)	17.281175

Z (mm)	0.00	2.00	7.00	12.00	17.00	22.00	27.00
SAR (W/Kg)	49.8193	32.0669	7.0244	1.5969	0.3410	0.0635	0.0070

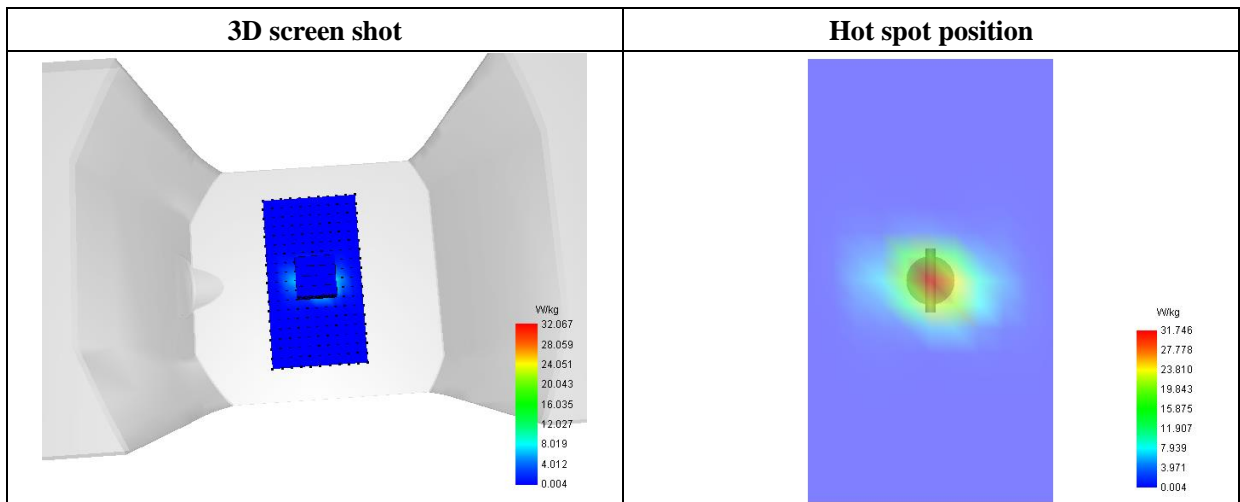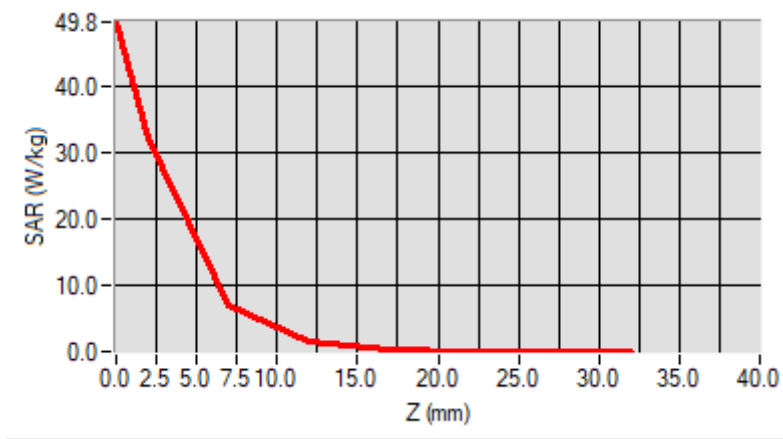

MEASUREMENT 4

Type: Validation measurement (Fast, 75.00 %)

Measurement duration: 12 minutes 21 seconds


E-field Probe: SN 45/15 EPGO280; ConvF: 5.64; Calibrated: 2020-07-03

A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Zoom Scan	dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Dipole
Band	CW5600
Signal	CW (Crest factor: 1.0)

B. SAR Measurement Results



Frequency (MHz)	5600.000000
Relative Permittivity (real part)	46.851254
Conductivity (S/m)	5.910512
Power Variation (%)	1.643281
Ambient Temperature	22.0
Liquid Temperature	22.3

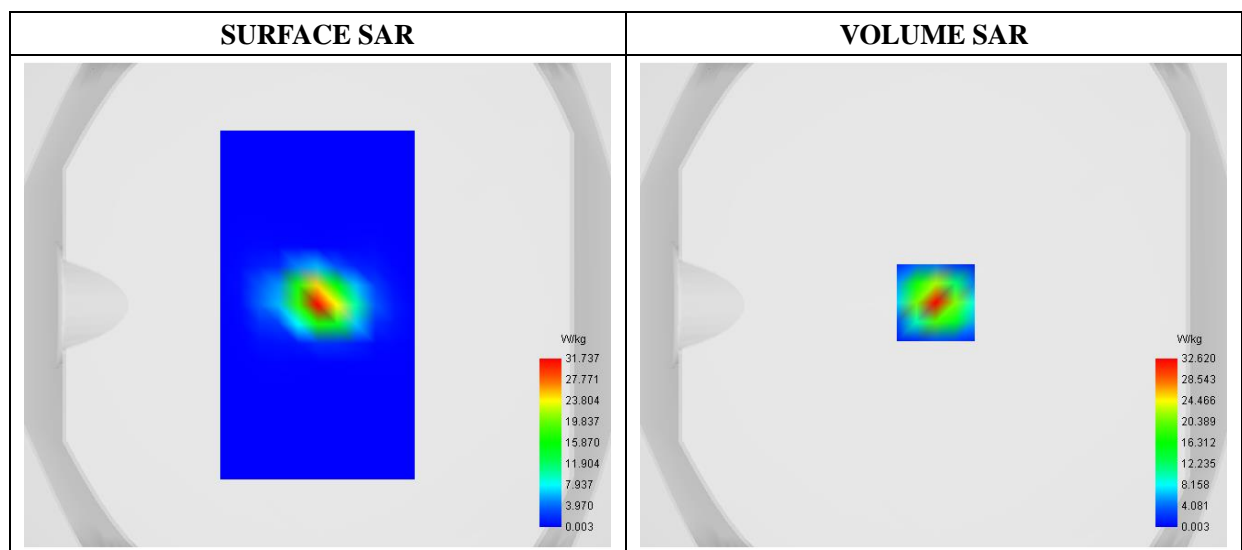

Maximum location: X=1.00, Y=1.00

SAR 10g (W/Kg)	5.922791
SAR 1g (W/Kg)	17.604052

Z (mm)	0.00	2.00	7.00	12.00	17.00	22.00	27.00
SAR (W/Kg)	51.2061	32.6198	6.6166	1.3486	0.2638	0.0509	0.0050

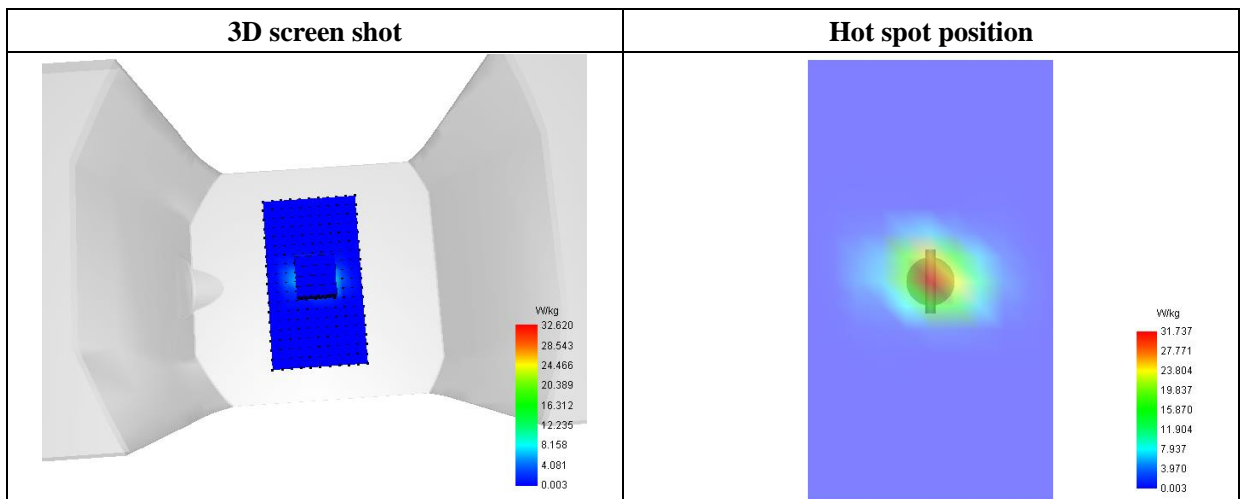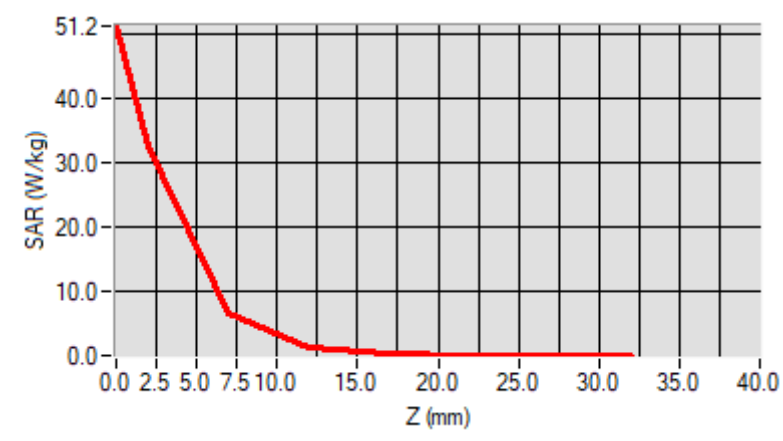

MEASUREMENT 5

Type: Validation measurement (Fast, 75.00 %)

Measurement duration: 12 minutes 21 seconds


E-field Probe: SN 45/15 EPGO280; ConvF: 5.64; Calibrated: 2020-07-03

A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Zoom Scan	dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Dipole
Band	CW5800
Signal	CW (Crest factor: 1.0)

B. SAR Measurement Results



Frequency (MHz)	5800.000000
Relative Permittivity (real part)	46.311254
Conductivity (S/m)	6.115012
Power Variation (%)	1.643281
Ambient Temperature	22.0
Liquid Temperature	22.3

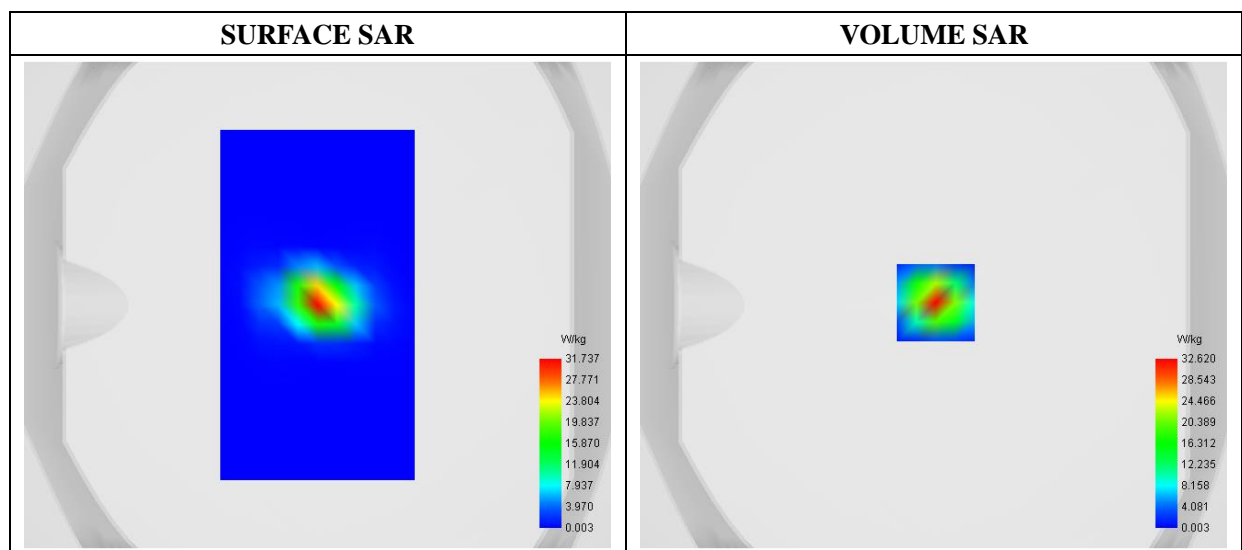

Maximum location: X=1.00, Y=1.00

SAR 10g (W/Kg)	6.221791
SAR 1g (W/Kg)	18.207052

Z (mm)	0.00	2.00	7.00	12.00	17.00	22.00	27.00
SAR (W/Kg)	51.2061	32.6198	6.6166	1.3486	0.2638	0.0509	0.0050

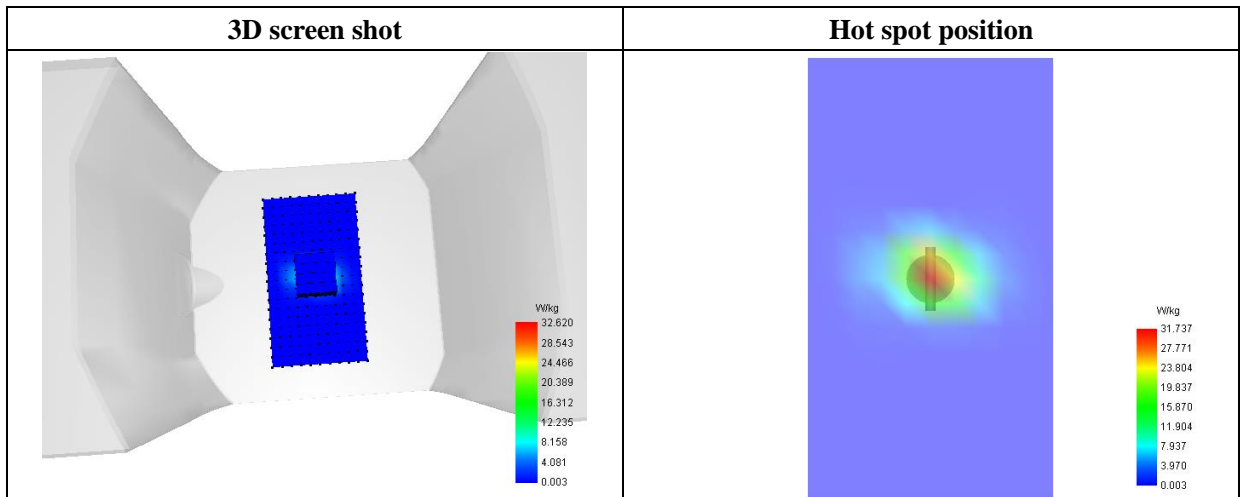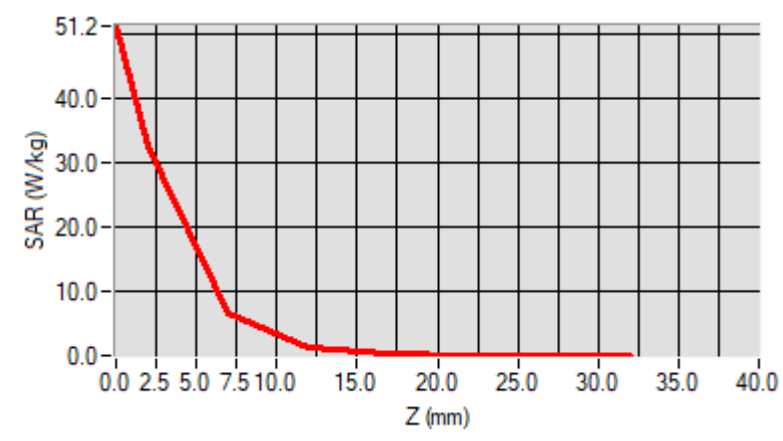

Annex B. Plots of SAR Measurement

	<u>BAND</u>	<u>PARAMETERS</u>
	WiFi(2.4G)_11b	<u>Measurement 3</u> : Flat Plane with Left side device position on Middle Channel in 802.11b mode
	WiFi(2.4G)_11 n (HT20)	<u>Measurement 9</u> : Flat Plane with Left side device position on High Channel in 802.11n mode
	WiFi(5.2G)_11 a	<u>Measurement 15</u> : Flat Plane with Front side device position on Middle Channel in 802.11a mode
	WiFi(5.3G)_11a	<u>Measurement 25</u> : Flat Plane with Front side device position on Low Channel in 802.11a mode
	WiFi(5.6G)_11 n (HT40)	<u>Measurement 32</u> : Flat Plane with Front side device position on High Channel in 802.11n mode
	WiFi(5.8G)_11 n (HT20)	<u>Measurement 37</u> : Flat Plane with Front side device position on Low Channel in 802.11n mode
<i>Remark: SAR plot is showed the highest measured SAR in each exposure configuration, wireless mode and frequency band combination.</i>		

MEASUREMENT 3

Type: Phone measurement (Complete)

Date of measurement: 2020-10-28

Measurement duration: 12 minutes 3 seconds


E-field Probe: SN 45/15 EPGO280; ConvF: 5.64; Calibrated: 2020-07-03

A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Zoom Scan	dx=8mm dy=8mm dz=5mm
Phantom	Flat Plane
Device Position	Left
Band	WiFi_802.11b
Channels	Low
Signal	Duty Cycle 1:1

B. SAR Measurement Results

Frequency (MHz)	2412.000000
Relative Permittivity (real part)	52.710667
Conductivity (S/m)	1.942536
Power Variation (%)	2.403721
Ambient Temperature	22.0
Liquid Temperature	22.3

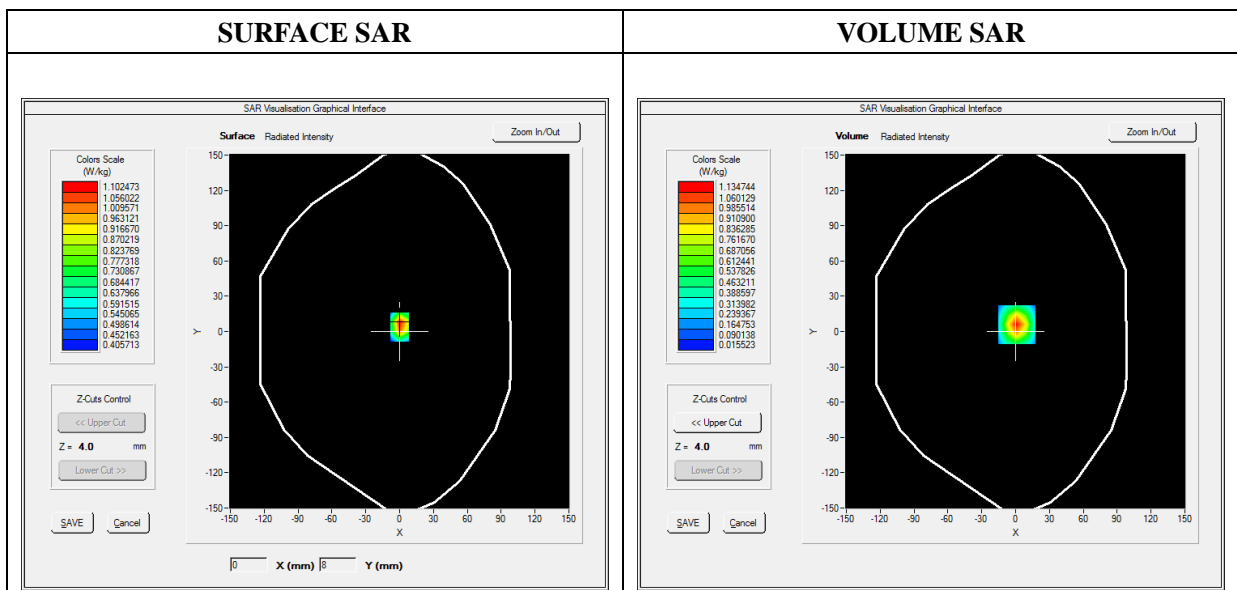


Maximum location: X=1.00, Y=6.00

SAR Peak: 2.01 W/kg

SAR 10g (W/Kg)	0.461165
SAR 1g (W/Kg)	1.032790

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	2.0112	1.1347	0.5197	0.2341	0.1147

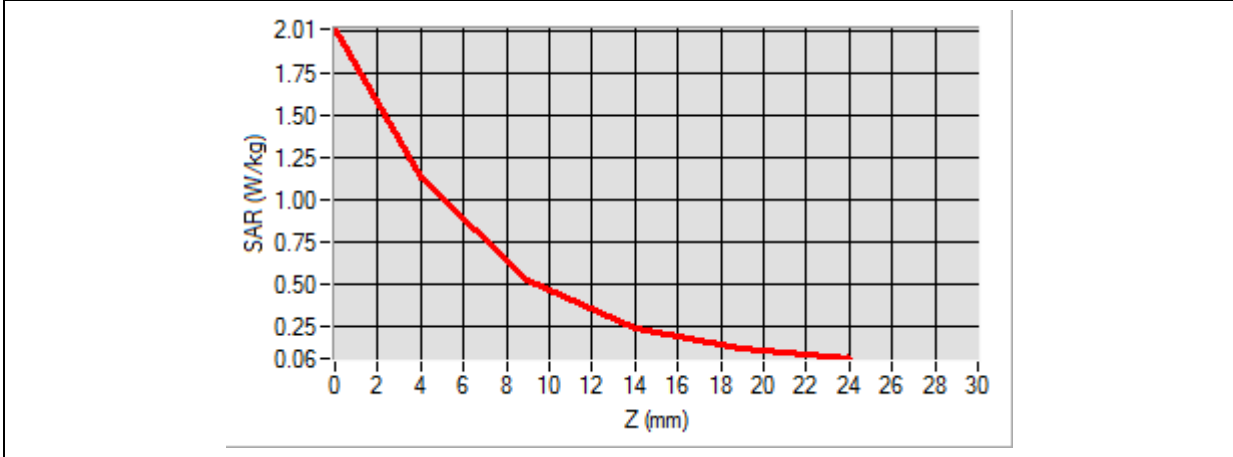

3D screen shot	Hot spot position
<p>A 3D perspective view of a grey device. A grid of green dots is overlaid on the device's surface. A small, localized area of the grid is highlighted with a color gradient from yellow to red, indicating the hot spot position.</p>	<p>A 2D heatmap showing a localized area of high intensity (red) surrounded by lower intensity (yellow and green) on a white background, representing the hot spot position.</p>

MEASUREMENT 9

Type: Phone measurement (Complete)

Date of measurement: 2020-10-28

Measurement duration: 12 minutes 3 seconds


E-field Probe: SN 45/15 EPGO280; ConvF: 5.64; Calibrated: 2020-07-03

A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Zoom Scan	dx=8mm dy=8mm dz=5mm
Phantom	Flat Plane
Device Position	Left
Band	WiFi_802.11 n (HT20)
Channels	High
Signal	Duty Cycle 1:1

B. SAR Measurement Results

Frequency (MHz)	2462.000000
Relative Permittivity (real part)	52.684727
Conductivity (S/m)	1.966143
Power Variation (%)	2.403721
Ambient Temperature	22.0
Liquid Temperature	22.3

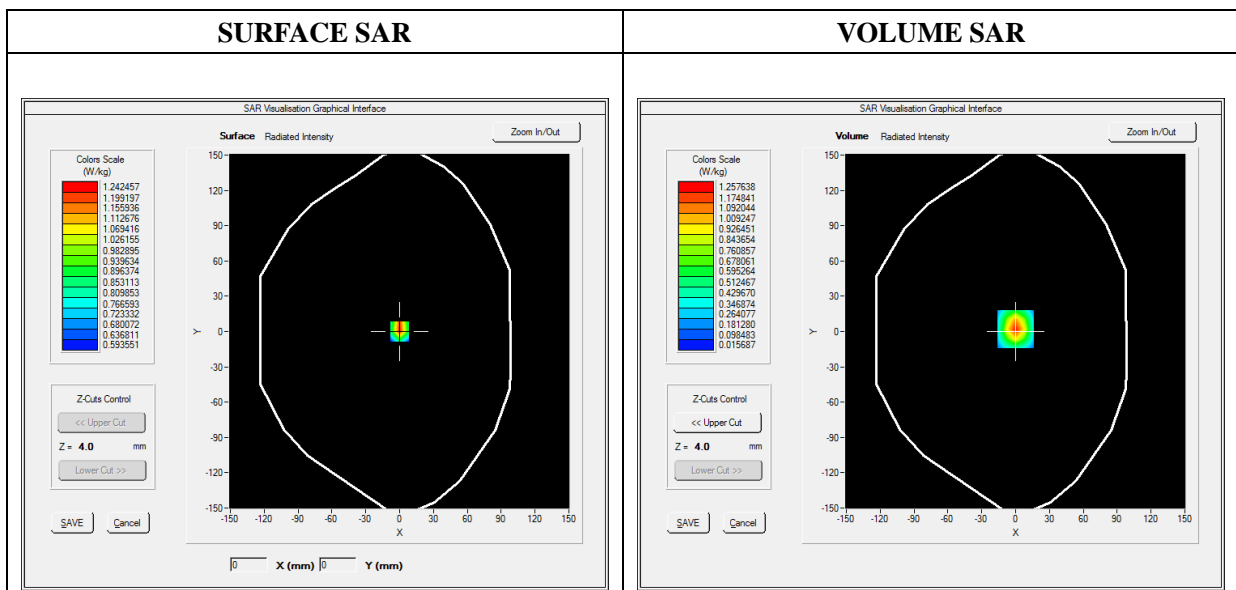


Maximum location: X=0.00, Y=2.00

SAR Peak: 2.27 W/kg

SAR 10g (W/Kg)	0.510629
SAR 1g (W/Kg)	1.149785

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	2.2653	1.2576	0.5621	0.2479	0.1217

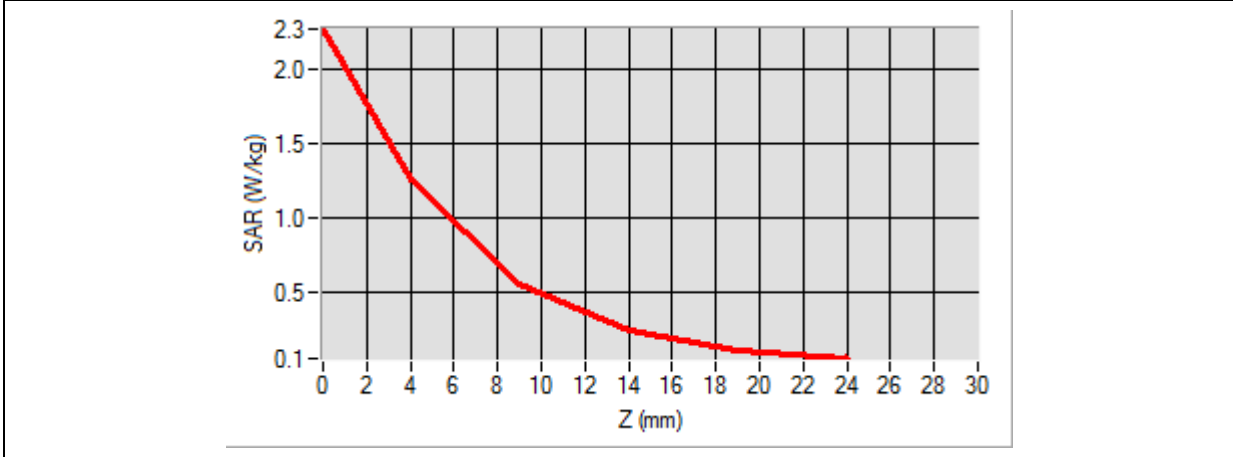

3D screen shot	Hot spot position
<p>A 3D perspective view of a grey device. A grid of green dots is overlaid on the device's surface, with a color-coded hot spot area in the center, transitioning from blue to red.</p>	<p>A 2D rectangular color-coded visualization of the hot spot, showing a gradient from red (high intensity) to yellow (lower intensity).</p>

MEASUREMENT 15

Type: Phone measurement (Complete)

Date of measurement: 2020-10-26

Measurement duration: 12 minutes 3 seconds


E-field Probe: SN 45/15 EPGO280; ConvF: 5.64; Calibrated: 2020-07-03

A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Zoom Scan	dx=4mm dy=4mm dz=2mm
Phantom	Flat Plane
Device Position	Front
Band	WiFi(5.2GHz)_802.11a
Channels	Middle
Signal	Duty Cycle: 1:1

B. SAR Measurement Results



Frequency (MHz)	5200.000000
Relative Permittivity (real part)	47.862911
Conductivity (S/m)	5.451483
Power Variation (%)	0.542660
Ambient Temperature	22.0
Liquid Temperature	22.3

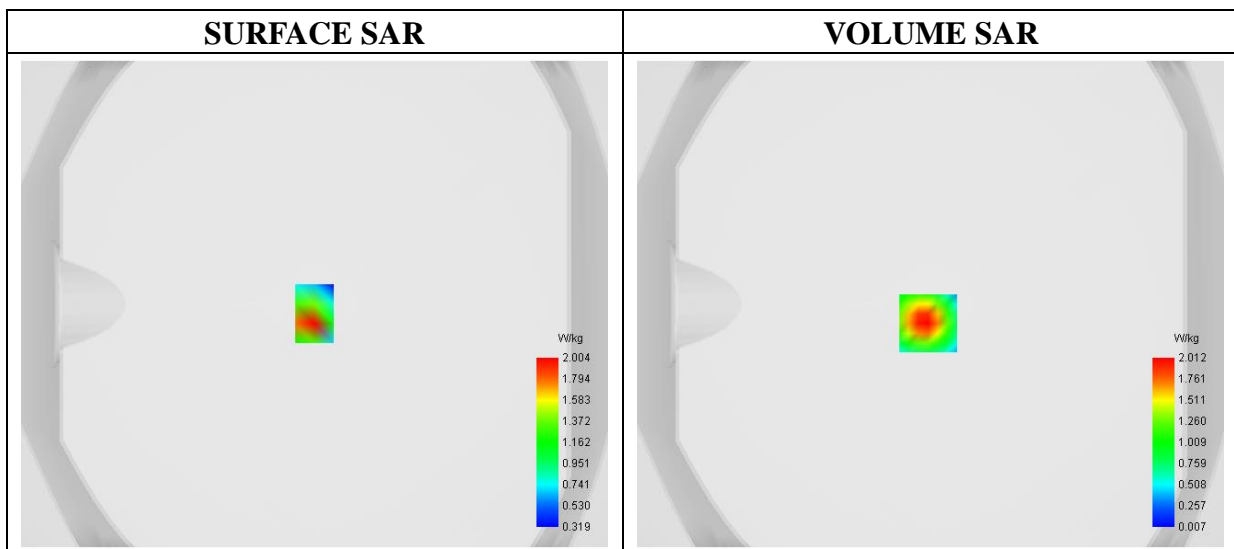

Maximum location: X=-1.00, Y=-8.00

SAR 10g (W/Kg)	0.446482
SAR 1g (W/Kg)	1.237202

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00
SAR (W/Kg)	3.3545	2.0120	1.1493	0.6342	0.3548	0.2092	0.1362	0.1012	0.0854

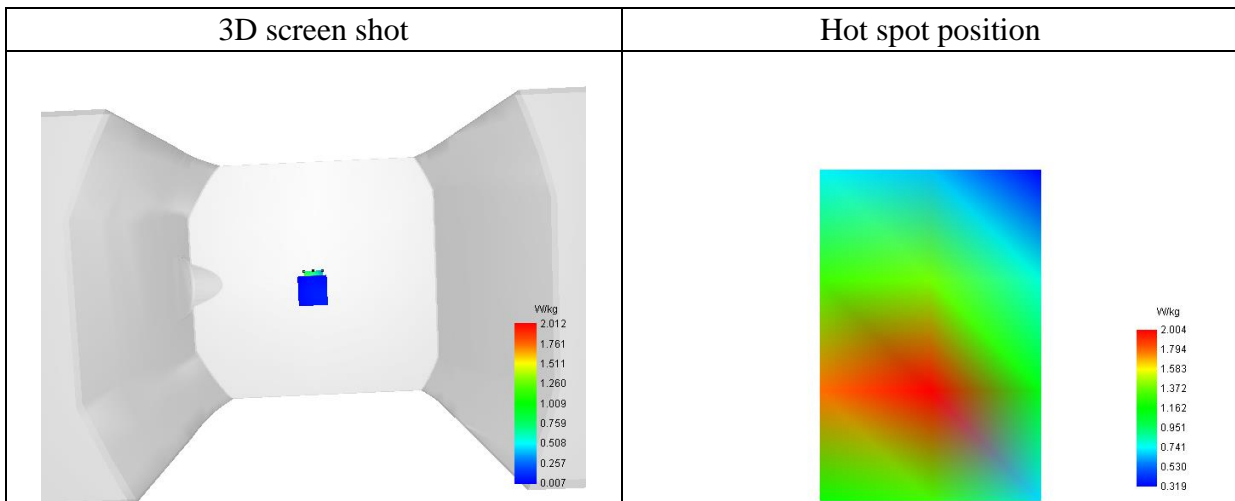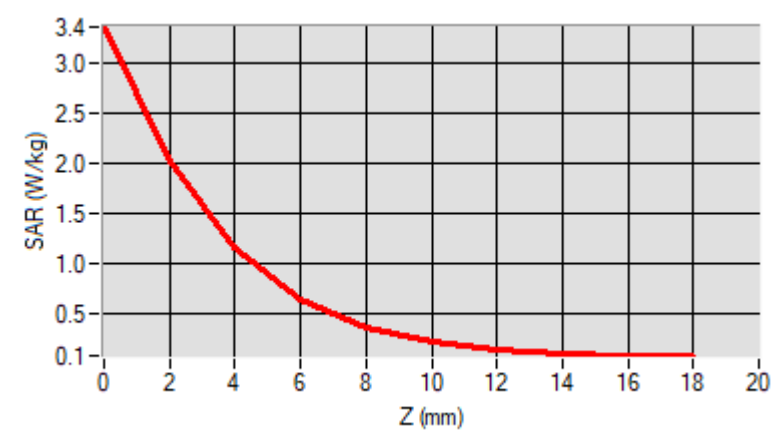

MEASUREMENT 25

Type: Phone measurement (Complete)

Date of measurement: 2020-10-26

Measurement duration: 12 minutes 3 seconds


E-field Probe: SN 45/15 EPGO280; ConvF: 5.64; Calibrated: 2020-07-03

A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Zoom Scan	dx=4mm dy=4mm dz=2mm
Phantom	Flat Plane
Device Position	Front
Band	WiFi(5.3GHz)_802.11 a
Channels	Low
Signal	Duty Cycle: 1:1

B. SAR Measurement Results



Frequency (MHz)	5260.000000
Relative Permittivity (real part)	47.520839
Conductivity (S/m)	5.490192
Power Variation (%)	0.463782
Ambient Temperature	22.0
Liquid Temperature	22.3

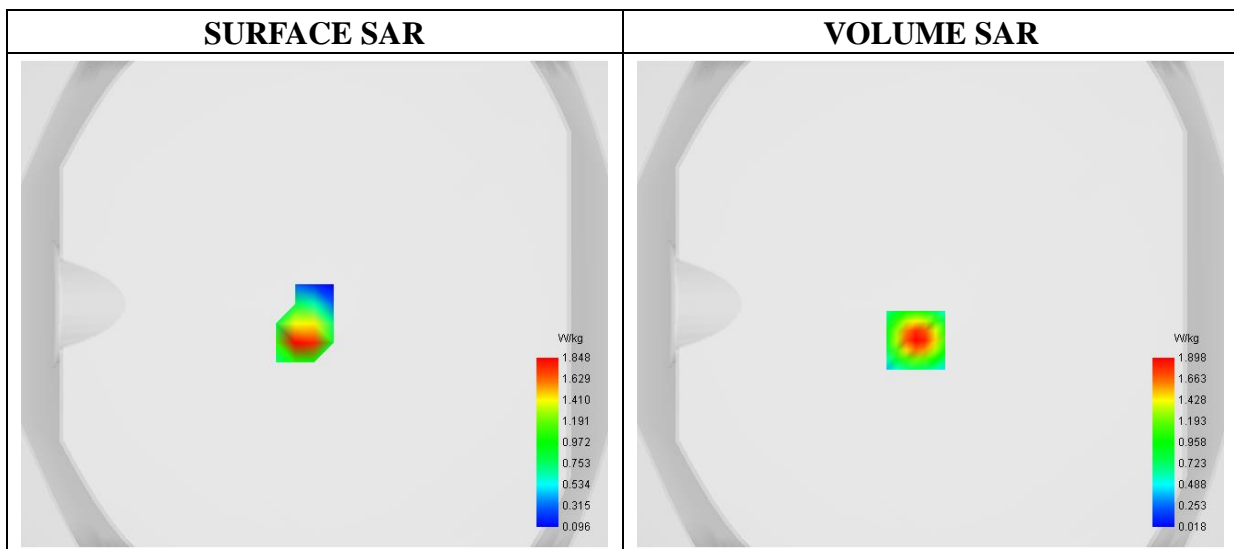

Maximum location: X=-6.00, Y=-15.00

SAR 10g (W/Kg)	0.420666
SAR 1g (W/Kg)	1.173066

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00
SAR (W/Kg)	3.1044	1.8982	1.1114	0.6289	0.3573	0.2093	0.1304	0.0887	0.0658

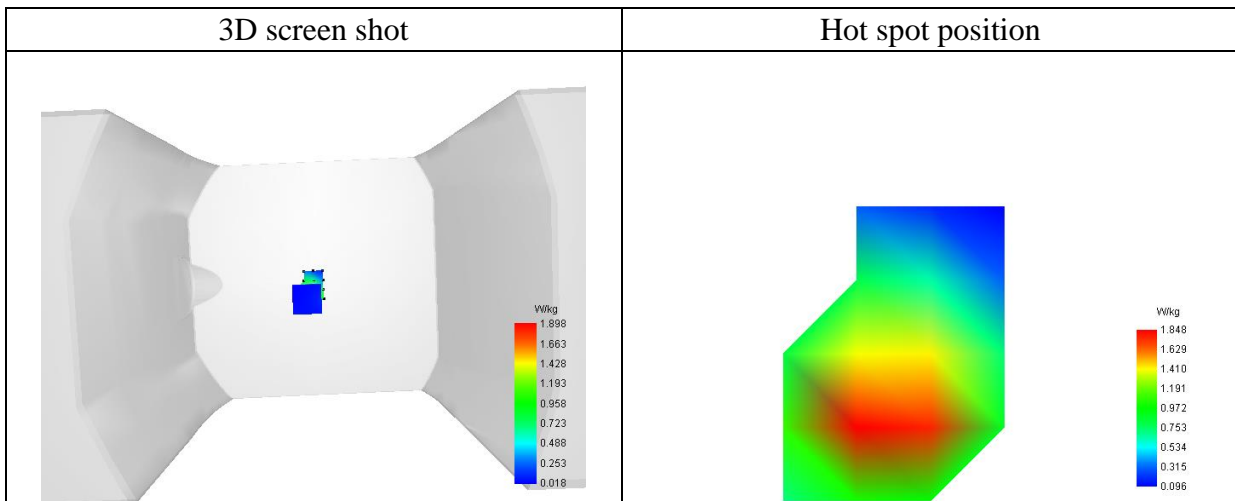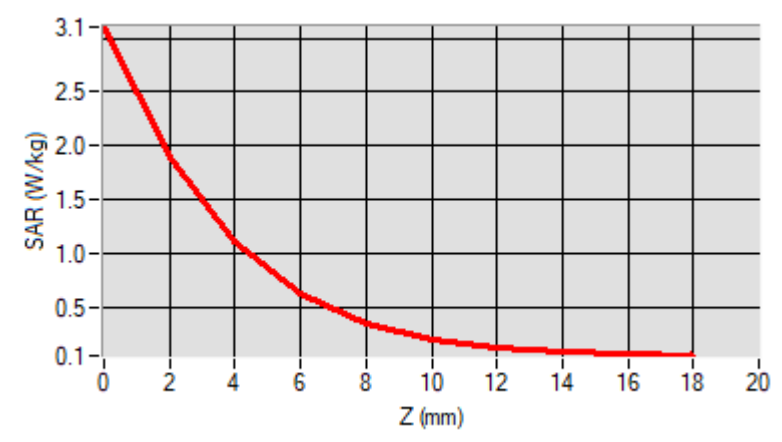

MEASUREMENT 32

Type: Phone measurement (Complete)

Date of measurement: 2020-10-26

Measurement duration: 12 minutes 3 seconds


E-field Probe: SN 45/15 EPGO280; ConvF: 5.64; Calibrated: 2020-07-03

A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Zoom Scan	dx=4mm dy=4mm dz=2mm
Phantom	Flat Plane
Device Position	Front
Band	WiFi(5.6GHz)_802.11 n (HT40)
Channels	High
Signal	Duty Cycle: 1:1

B. SAR Measurement Results



Frequency (MHz)	5670.000000
Relative Permittivity (real part)	46.7302143
Conductivity (S/m)	5.951688
Power Variation (%)	0.848732
Ambient Temperature	22.0
Liquid Temperature	22.3

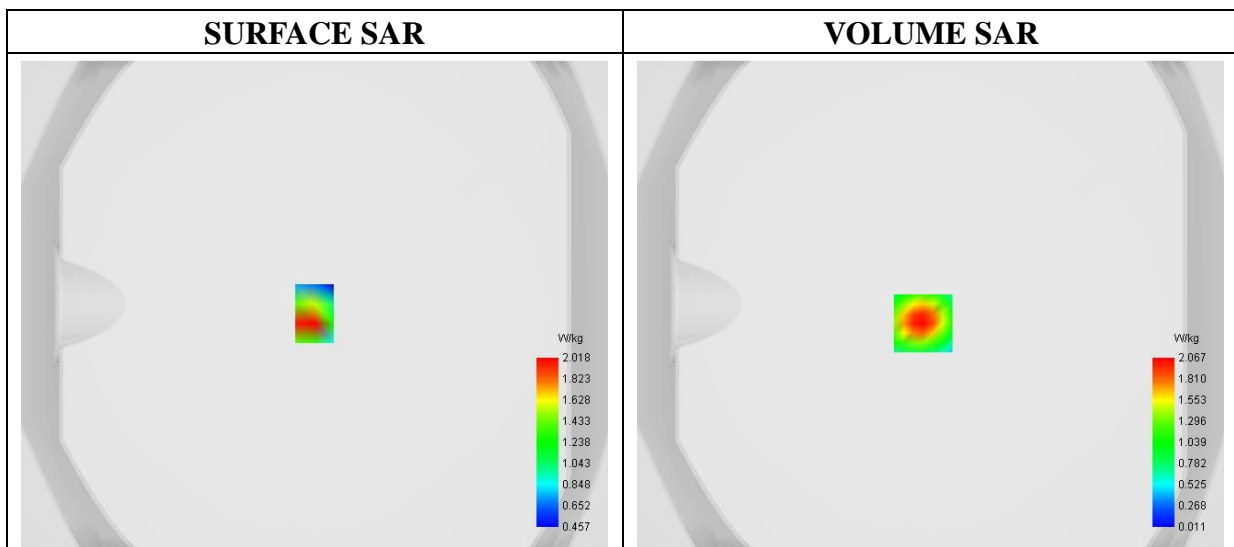

Maximum location: X=-3.00, Y=-8.00

SAR 10g (W/Kg)	0.431181
SAR 1g (W/Kg)	1.241646

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00
SAR (W/Kg)	3.6782	2.0669	1.0702	0.5157	0.2437	0.1196	0.0672	0.0478	0.0436

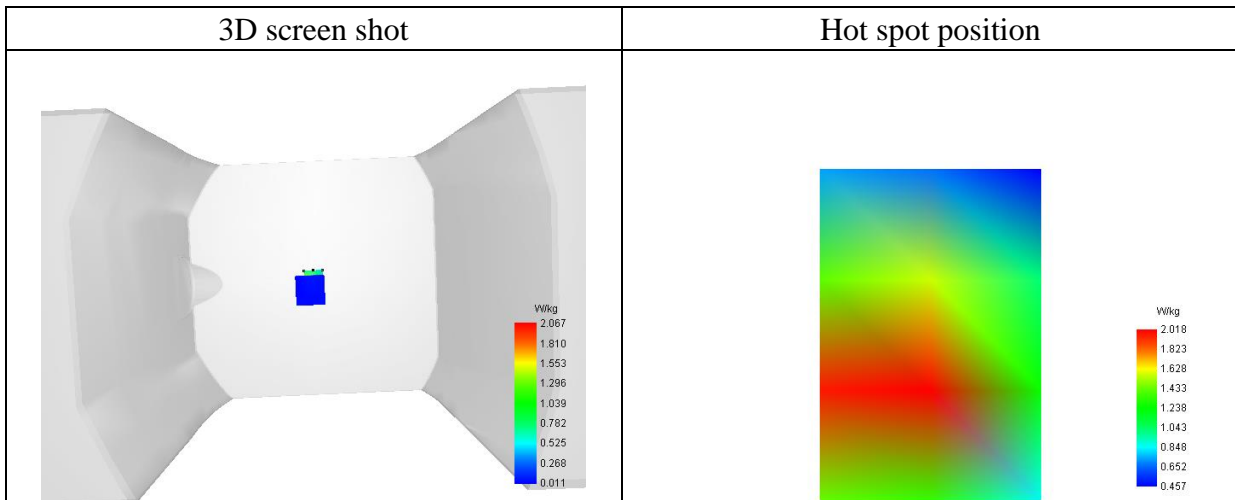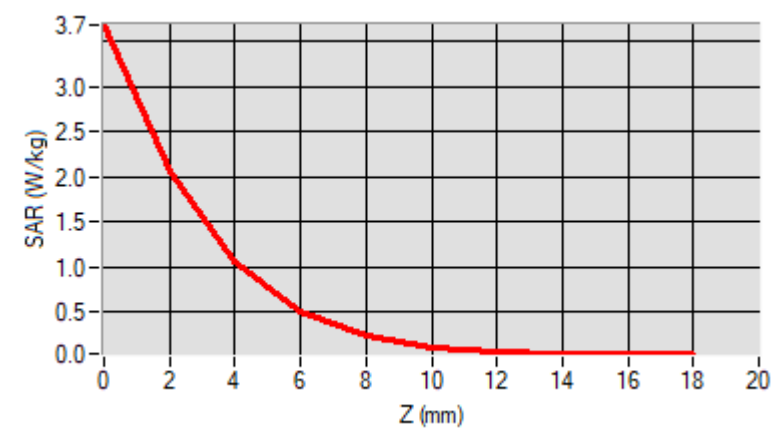

MEASUREMENT 34

Type: Phone measurement (Complete)

Date of measurement: 2020-10-26

Measurement duration: 12 minutes 3 seconds


E-field Probe: SN 45/15 EPGO280; ConvF: 5.64; Calibrated: 2020-07-03

A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Zoom Scan	dx=4mm dy=4mm dz=2mm
Phantom	Flat Plane
Device Position	Front
Band	WiFi(5.8GHz)_802.11 n (HT20)
Channels	Low
Signal	Duty Cycle: 1:1

B. SAR Measurement Results



Frequency (MHz)	5745.000000
Relative Permittivity (real part)	46.101939
Conductivity (S/m)	6.061487
Power Variation (%)	1.210512
Ambient Temperature	22.0
Liquid Temperature	22.3

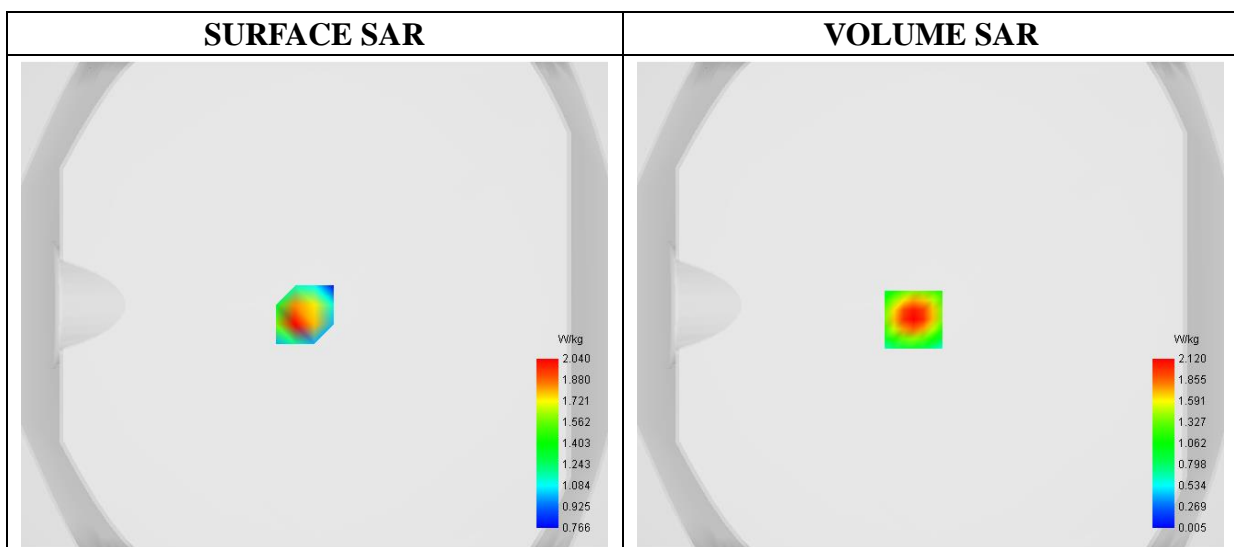

Maximum location: X=-7.00, Y=-6.00

SAR 10g (W/Kg)	0.430095
SAR 1g (W/Kg)	1.291521

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00
SAR (W/Kg)	3.8604	2.1198	1.0540	0.4716	0.1949	0.0757	0.0295	0.0134	0.0084

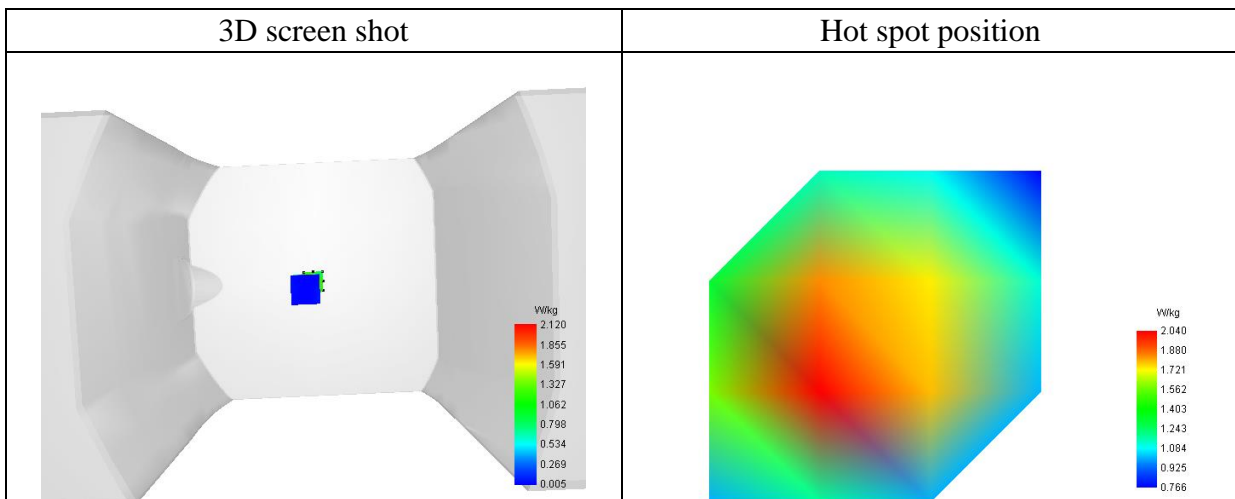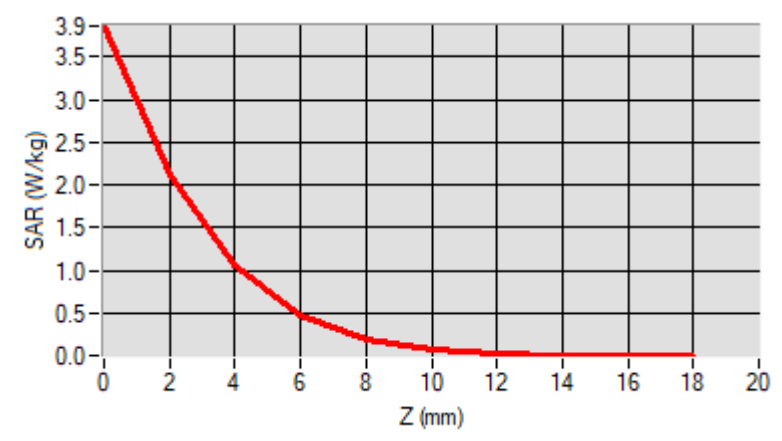

Annex C. EUT Photos


EUT View_1



EUT View_2



Antenna View

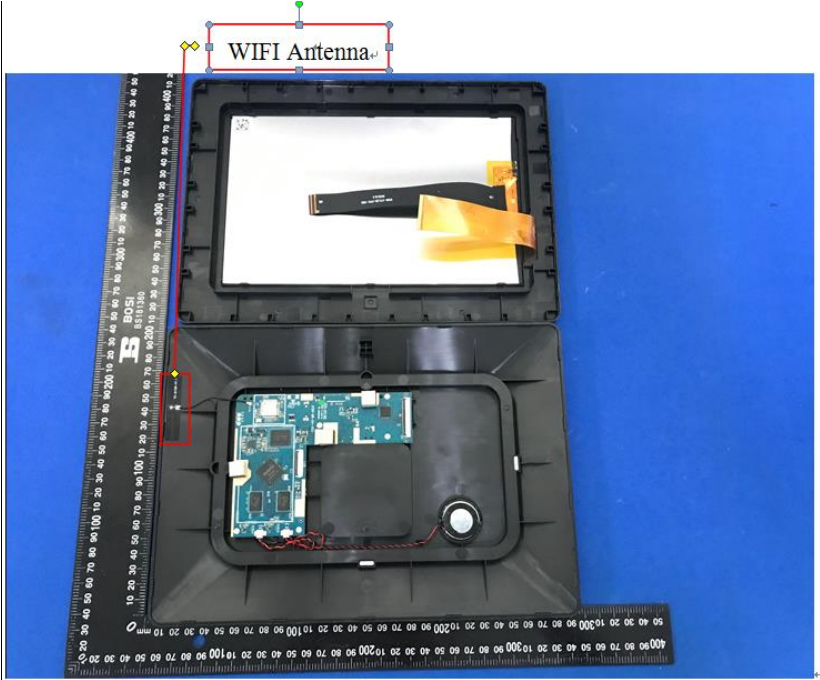


Annex D. Test Setup Photos


Body mode Exposure Conditions

Test View


Body Back

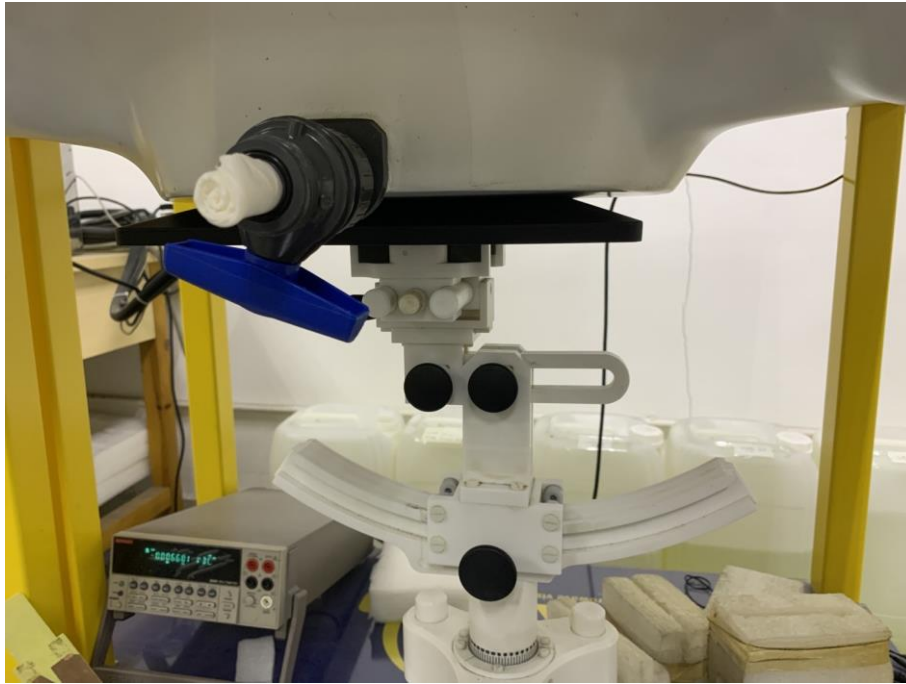

Body Front

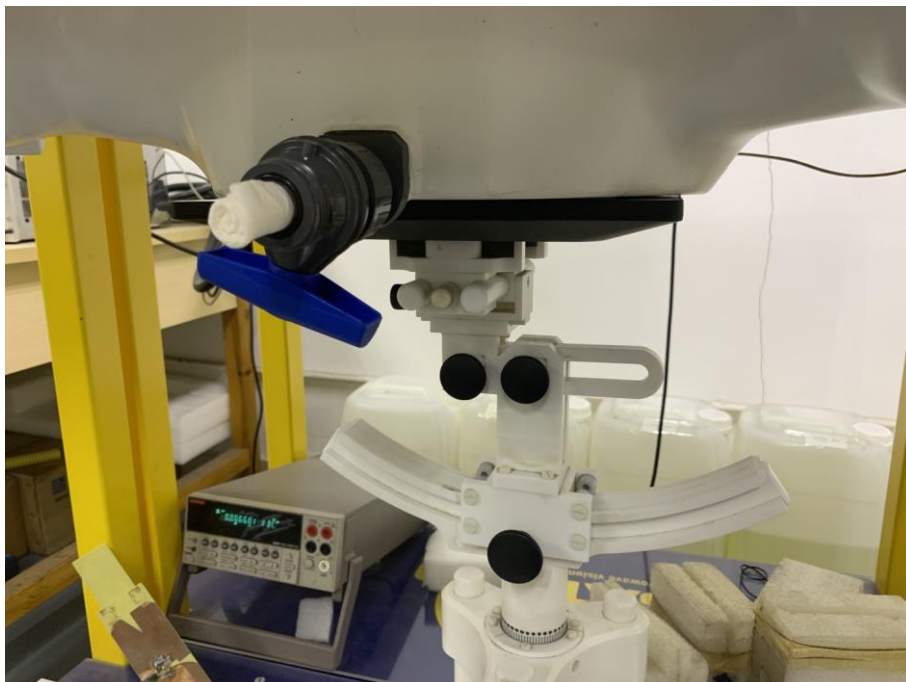

Body Left

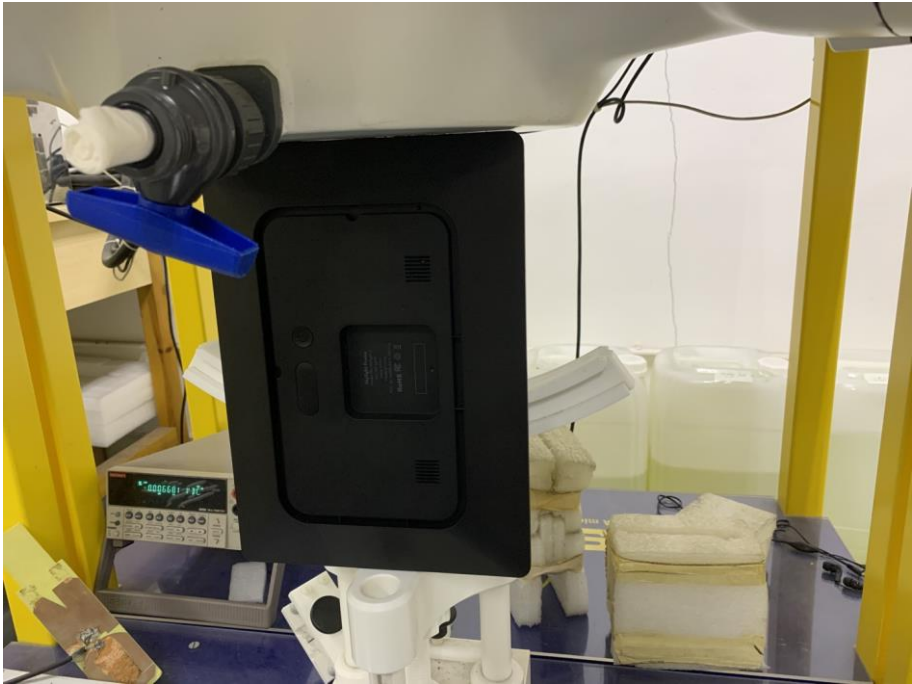

Annex E. Calibration Certificate

Please refer to the exhibit for the calibration certificate

******* END OF REPORT *******