

FCC TEST REPORT

Client Name : Aputure Imaging Industries Co., Ltd
Address : 3rd Floor, Building 21, Longjun industrial estate,
Longhua, Bao'an, Shenzhen, P.R.China
Product Name : LS 600d Pro
Date : Oct. 31, 2020



Shenzhen Anbotek Compliance Laboratory Limited

Contents

1. General Information.....	4
1.1. Client Information.....	4
1.2. Description of Device (EUT).....	4
1.3. Auxiliary Equipment Used During Test.....	5
1.4. Description of Test Modes.....	5
1.5. List of Channels.....	6
1.6. Description of Test Setup.....	7
1.7. Test Equipment List.....	8
1.8. Measurement Uncertainty.....	9
1.9. Description of Test Facility.....	9
2. Summary of Test Results.....	10
3. Conducted Emission Test.....	11
3.1. Test Standard and Limit.....	11
3.2. Test Setup.....	11
3.3. Test Procedure.....	11
3.4. Test Data.....	12
4. Radiated Emission and Band Edge.....	16
4.1. Test Standard and Limit.....	16
4.2. Test Setup.....	17
4.3. Test Procedure.....	18
4.4. Test Data.....	19
5. 20dB Bandwidth Test.....	29
5.1. Test Standard and Limit.....	29
5.2. Test Setup.....	29
5.3. Test Procedure.....	29
5.4. Test Data.....	29
6. Antenna Requirement.....	32
6.1. Test Standard and Requirement.....	32
6.2. Antenna Connected Construction.....	32



TEST REPORT

Applicant : Aputure Imaging Industries Co., Ltd
Manufacturer : Aputure Imaging Industries Co., Ltd
Product Name : LS 600d Pro
Model No. : LS 600d Pro, LS 600d, LS 600x Pro, LS 600x
Trade Mark : Aputure
Rating(s) : Input: 100-240V~, 50/60Hz, 8A
Output: 48V=== 15A (Max)

Test Standard(s) : FCC Part15 Subpart C, Paragraph 15.249

Test Method(s) : ANSI C63.10: 2013

The device described above is tested by Shenzhen Anbotek Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen Anbotek Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the FCC Part 15 Subpart C requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen Anbotek Compliance Laboratory Limited.

Date of Receipt

Sept. 10, 2020

Date of Test

Sept. 10~Oct. 19, 2020

Prepared by

Yilia Zhong

(Engineer / Yilia Zhong)

Reviewer

Bibo Zhang

(Supervisor / Bibo Zhang)

Approved & Authorized Signer

Kingkong Jin

(Manager / Kingkong Jin)

1. General Information

1.1. Client Information

Applicant	:	Aputure Imaging Industries Co., Ltd
Address	:	3rd Floor, Building 21, Longjun industrial estate, Longhua, Bao'an, Shenzhen, P.R.China
Manufacturer	:	Aputure Imaging Industries Co., Ltd
Address	:	3rd Floor, Building 21, Longjun industrial estate, Longhua, Bao'an, Shenzhen, P.R.China
Factory	:	Aputure Imaging Industries Co., Ltd
Address	:	3rd Floor, Building 21, Longjun industrial estate, Longhua, Bao'an, Shenzhen, P.R.China

1.2. Description of Device (EUT)

Product Name	:	LS 600d Pro	
Model No.	:	LS 600d Pro, LS 600d, LS 600x Pro, LS 600x (Note: All samples are the same except the model number, so we prepare "LS 600d Pro" for test only.)	
Trade Mark	:	Aputure	
Test Power Supply	:	AC 240V, 60Hz / AC 120V, 60Hz	
Test Sample No.	:	1-2-1(Normal Sample), 1-2-2(Engineering Sample)	
Product Description	:	Operation Frequency:	BT 5.0 BLE: 2402MHz~2480MHz 2.4G: 2406~2474MHz 2.4G: 2402~2480MHz
		Transfer Rate:	BT 5.0 BLE: 1 Mbits/s 2.4G: 2406~2474MHz: 1 Mbits/s 2.4G: 2402~2480MHz: 1 Mbits/s
		Number of Channel:	BT 5.0 BLE: 40 Channels 2.4G: 18 Channels(2406~2474MHz) 2.4G: 79 Channels(2402~2480MHz)
		Modulation Type:	BT 5.0 BLE: GFSK 2.4G: 2406~2474MHz: FSK 2.4G:2402~2480MHz: GFSK
		Antenna Type:	PIFA Antenna
		Antenna Gain(Peak):	BT 5.0 BLE: -0.7 dBi 2.4G: 1 dBi (2406~2474MHz) 2.4G: -0.7 dBi (2402~2480MHz)
		Remark: 1) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.2)This report is for 2.4G(2406~2474MHz) Module.	

1.3. Auxiliary Equipment Used During Test

N/A	
-----	--

1.4. Description of Test Modes

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested based on the consideration of following EUT operation mode or test configuration mode which possibly have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	CH01
Mode 2	CH10
Mode 3	CH18

For Radiated Emission	
Final Test Mode	Description
Mode 1	CH01
Mode 2	CH10
Mode 3	CH18

Note:


1. The engineering test program was provided and the EUT was programmed to be in continuously transmitting mode.

1.5. List of Channels


Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
01	2406	02	2410	03	2414	04	2418
05	2422	06	2426	07	2430	08	2434
09	2438	10	2442	11	2446	12	2450
13	2454	14	2458	15	2462	16	2466
17	2470	18	2474				

1.6. Description of Test Setup

CE

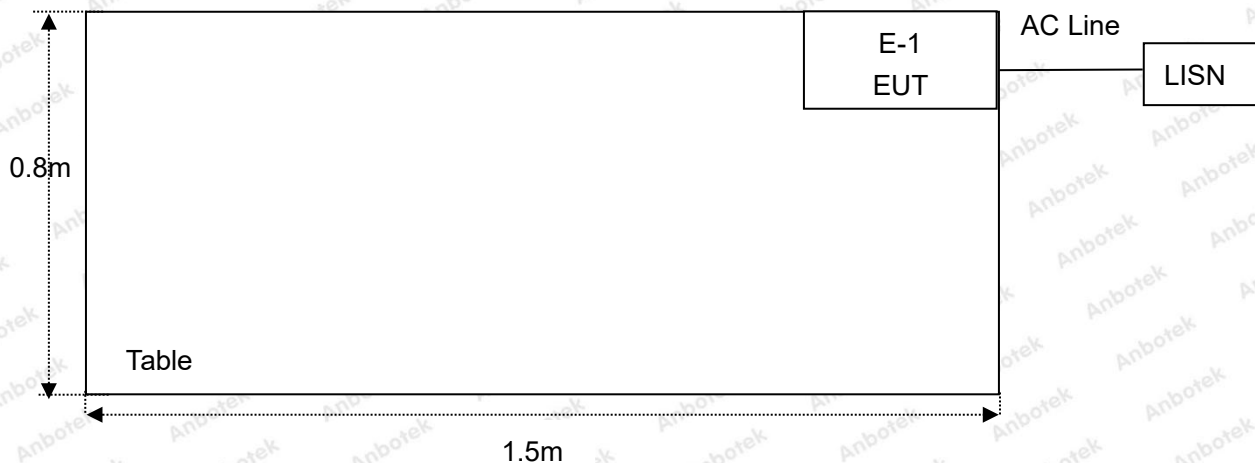

RE

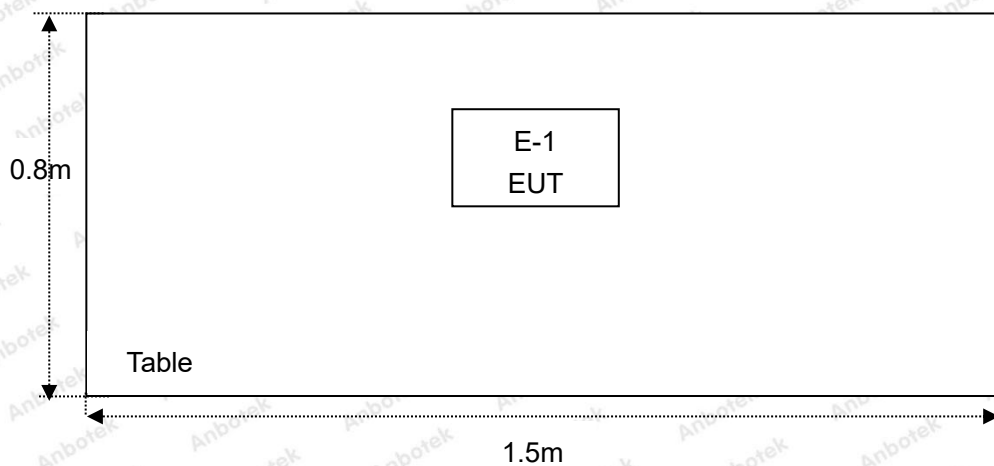

1.7. Test Equipment List

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	L.I.S.N. Artificial Mains Network	Rohde & Schwarz	ENV216	100055	Nov. 04, 2019	1 Year
2.	EMI Test Receiver	Rohde & Schwarz	ESPI3	101604	Nov. 04, 2019	1 Year
3.	RF Switching Unit	Compliance Direction	RSU-M2	38303	Nov. 04, 2019	1 Year
4.	MAX Spectrum Analysis	Agilent	N9020A	MY51170037	Nov. 04, 2019	1 Year
5.	Preamplifier	SKET Electronic	BK1G18G30 D	KD17503	Nov. 04, 2019	1 Year
6.	Double Ridged Horn Antenna	Instruments corporation	GTH-0118	351600	Nov. 01, 2019	1 Year
7.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	VULB 9163-289	Nov. 01, 2019	1 Year
8.	Loop Antenna	Schwarzbeck	FMZB1519B	00053	Nov. 01, 2019	1 Year
9.	Horn Antenna	A-INFO	LB-180400-K F	J211060628	Nov. 01, 2019	1 Year
10.	Pre-amplifier	SONOMA	310N	186860	Nov. 04, 2019	1 Year
11.	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A
12.	RF Test Control System	YIHENG	YH3000	2017430	Nov. 04, 2019	1 Year
13.	Power Sensor	DAER	RPR3006W	15I00041SN045	Nov. 04, 2019	1 Year
14.	Power Sensor	DAER	RPR3006W	15I00041SN046	Nov. 04, 2019	1 Year
15.	MXA Spectrum Analysis	Agilent	N9020A	MY51170037	Nov. 04, 2019	1 Year
16.	MXG RF Vector Signal Generator	Agilent	N5182A	MY48180656	Nov. 04, 2019	1 Year
17.	Signal Generator	Agilent	E4421B	MY41000743	Nov. 04, 2019	1 Year
18.	DC Power Supply	LW	TPR-6420D	374470	Nov. 04, 2019	1 Year
19.	Constant Temperature Humidity Chamber	ZHONGJIAN	ZJ-KHWS80 B	N/A	Nov. 04, 2019	1 Year

1.8. Measurement Uncertainty

Radiation Uncertainty	:	Ur = 3.9 dB (Horizontal)
		Ur = 3.8 dB (Vertical)
Conduction Uncertainty	:	Uc = 3.4 dB

1.9. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.: 184111

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No. 184111, September 30, 2020.

ISED-Registration No.: 8058A

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (ISED) Innovation, Science and Economic Development Canada. The acceptance letter from the ISED is maintained in our files. Registration 8058A, September 30, 2020.

Test Location

Shenzhen Anbotek Compliance Laboratory Limited.

1/F, Building D, Sogood Science and Technology Park, Sanwei community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.518102

2. Summary of Test Results

Standard Section	Test Item	Result
15.203	Antenna Requirement	PASS
15.207	Conducted Emission	PASS
15.249	Radiated Emission	PASS
15.215(c)	20dB Bandwidth	PASS
15.249(c)	Band Edge	PASS
Remark: "N/A" is an abbreviation for Not Applicable.		




3. Conducted Emission Test

3.1. Test Standard and Limit

Test Standard	FCC Part15 Section 15.207		
	Frequency	Maximum RF Line Voltage (dBuV)	
		Quasi-peak Level	Average Level
Test Limit	150kHz~500kHz	66 ~ 56 *	56 ~ 46 *
	500kHz~5MHz	56	46
	5MHz~30MHz	60	50

Remark: (1) *Decreasing linearly with logarithm of the frequency.
 (2) The lower limit shall apply at the transition frequency.

3.2. Test Setup

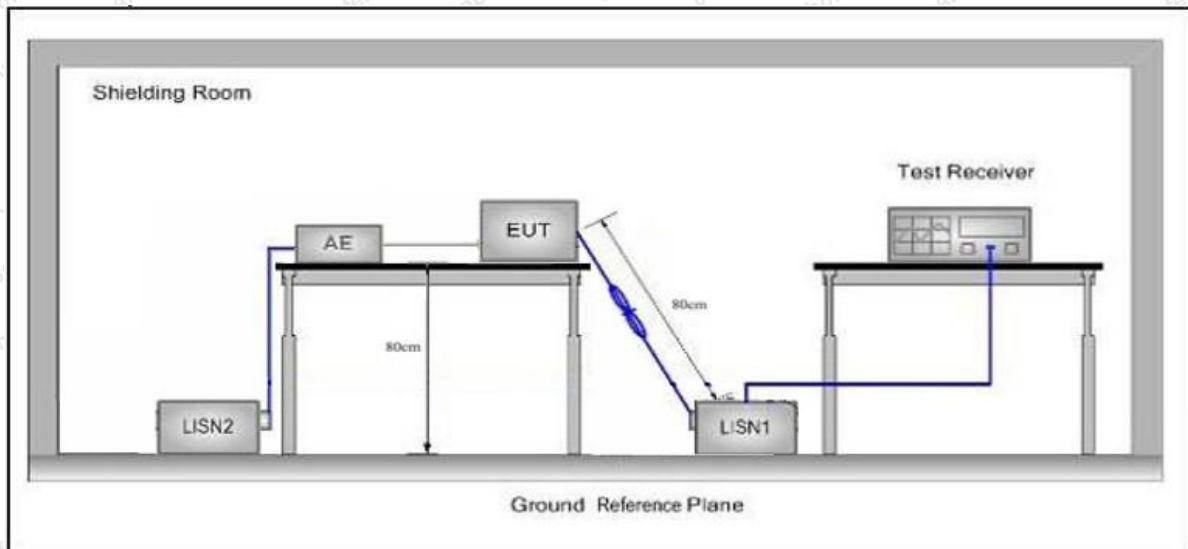

3.3. Test Procedure

The EUT system is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC ANSI C63.10-2013 on Conducted Emission Measurement.

The bandwidth of test receiver (ESCI) set at 9kHz.


The frequency range from 150kHz to 30MHz is checked.

3.4. Test Data

During the test, pre-scan all the modes, and found the Low channel which is the worst case, only the worst case is recorded in the report

Conducted Emission Test Data


Test Site: 1# Shielded Room
 Operating Condition: Mode 1
 Test Specification: AC 120V, 60Hz
 Comment: Live Line
 Tem.: 23.4°C Hum.: 56%

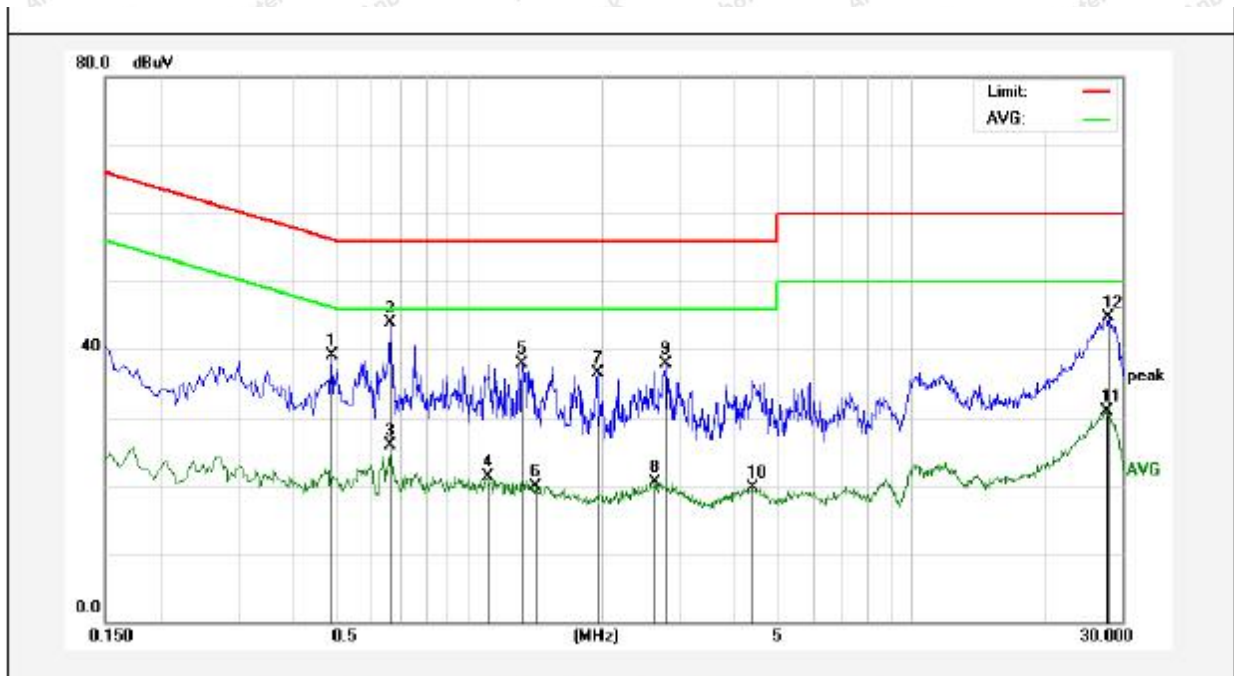

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Over Limit (dB)	Detector	Remark
1	0.4900	19.16	19.98	39.14	56.17	-17.03	peak	
2	0.6620	23.83	20.03	43.86	56.00	-12.14	peak	
3	0.6660	5.79	20.03	25.82	46.00	-20.18	AVG	
4	1.1019	1.12	20.12	21.24	46.00	-24.76	AVG	
5	1.3220	17.84	20.13	37.97	56.00	-18.03	peak	
6	1.4180	-0.18	20.13	19.95	46.00	-26.05	AVG	
7	1.9540	16.43	20.14	36.57	56.00	-19.43	peak	
8	2.6380	0.31	20.15	20.46	46.00	-25.54	AVG	
9	2.7820	17.84	20.16	38.00	56.00	-18.00	peak	
10	4.3740	-0.40	20.19	19.79	46.00	-26.21	AVG	
11	27.8500	10.68	20.27	30.95	50.00	-19.05	AVG	
12	27.8660	24.47	20.27	44.74	60.00	-15.26	peak	

Conducted Emission Test Data


Test Site: 1# Shielded Room
 Operating Condition: Mode 1
 Test Specification: AC 120V, 60Hz
 Comment: Neutral Line
 Tem.: 23.4°C Hum.: 56%

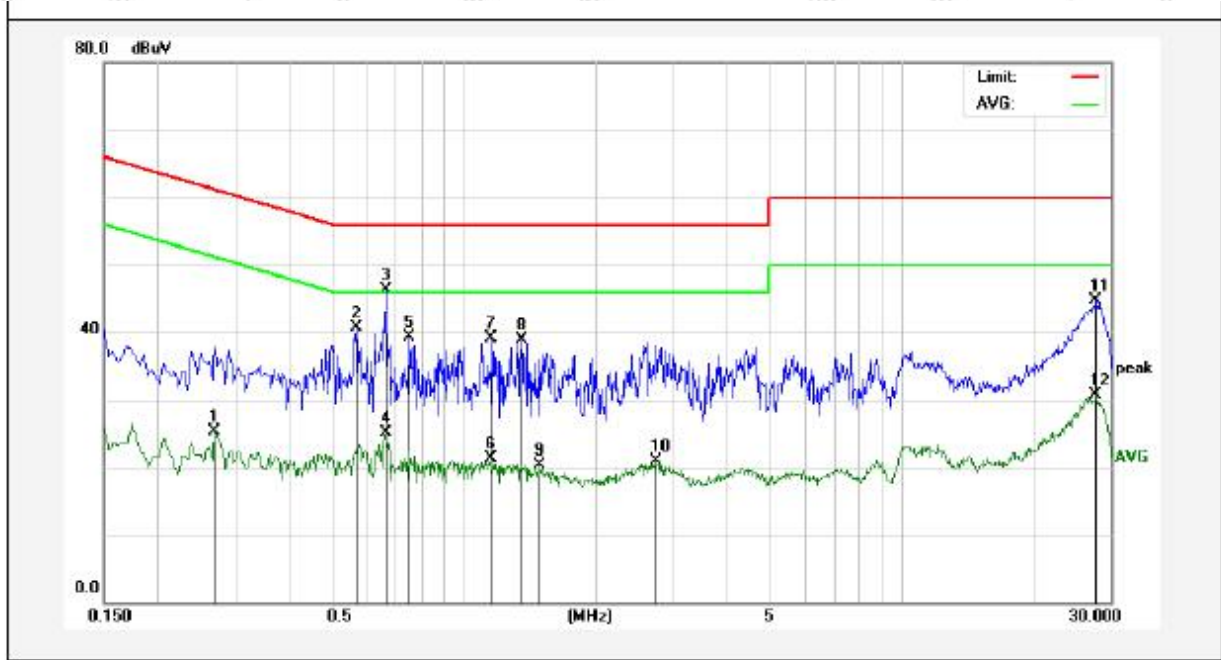

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Over Limit (dB)	Detector	Remark
1	0.2700	5.34	19.89	25.23	51.12	-25.89	AVG	
2	0.5700	20.63	20.00	40.63	56.00	-15.37	QP	
3	0.6620	26.27	20.03	46.30	56.00	-9.70	QP	
4	0.6620	5.11	20.03	25.14	46.00	-20.86	AVG	
5	0.7500	19.23	20.05	39.28	56.00	-16.72	QP	
6	1.1500	1.10	20.12	21.22	46.00	-24.78	AVG	
7	1.1580	18.95	20.12	39.07	56.00	-16.93	QP	
8	1.3580	18.81	20.13	38.94	56.00	-17.06	QP	
9	1.4940	0.09	20.13	20.22	46.00	-25.78	AVG	
10	2.7420	0.76	20.15	20.91	46.00	-25.09	AVG	
11	27.7420	24.40	20.27	44.67	60.00	-15.33	QP	
12	27.7420	10.52	20.27	30.79	50.00	-19.21	AVG	

Conducted Emission Test Data


Test Site: 1# Shielded Room
 Operating Condition: Mode 1
 Test Specification: AC 240V, 60Hz
 Comment: Live Line
 Tem.: 23.4°C Hum.: 56%

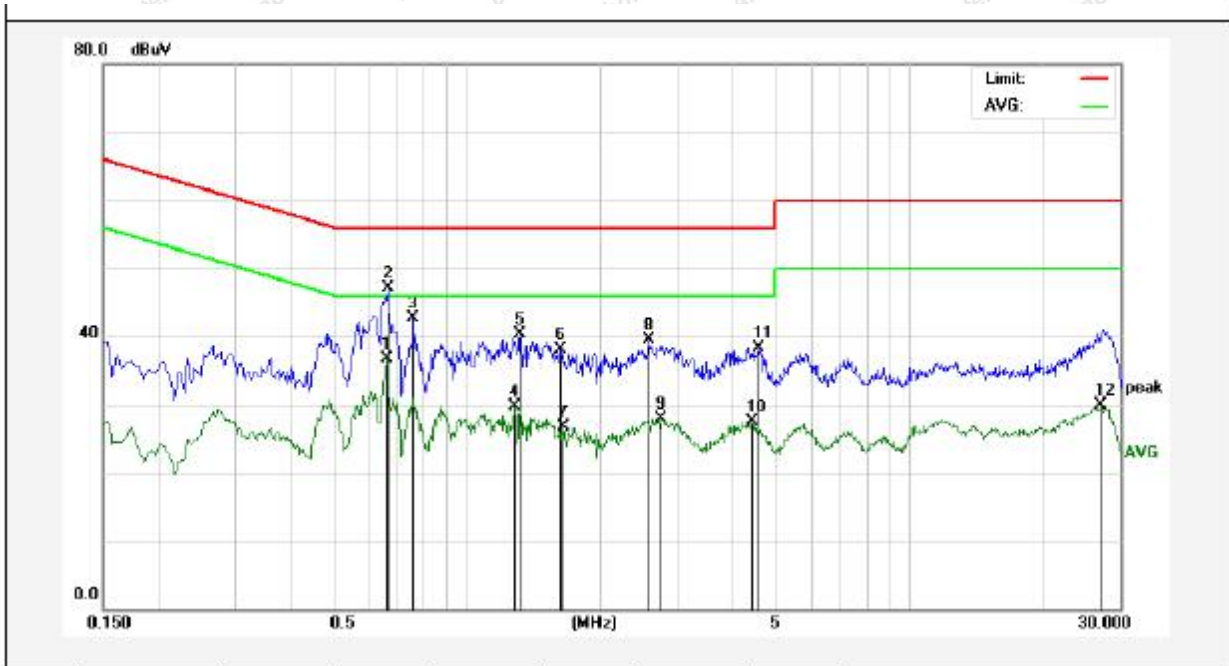

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Over Limit (dB)	Detector	Remark
1	0.6580	16.65	20.03	36.68	46.00	-9.32	AVG	
2	0.6620	26.99	20.03	47.02	56.00	-8.98	QP	
3	0.7580	22.56	20.06	42.62	56.00	-13.38	QP	
4	1.2860	9.57	20.13	29.70	46.00	-16.30	AVG	
5	1.3180	20.12	20.13	40.25	56.00	-15.75	QP	
6	1.6340	17.98	20.13	38.11	56.00	-17.89	QP	
7	1.6540	6.64	20.13	26.77	46.00	-19.23	AVG	
8	2.5700	19.33	20.15	39.48	56.00	-16.52	QP	
9	2.7540	7.72	20.15	27.87	46.00	-18.13	AVG	
10	4.4060	7.22	20.19	27.41	46.00	-18.59	AVG	
11	4.5860	18.19	20.20	38.39	56.00	-17.61	QP	
12	27.1980	9.60	20.28	29.88	50.00	-20.12	AVG	

Conducted Emission Test Data

Test Site: 1# Shielded Room
 Operating Condition: Mode 1
 Test Specification: AC 240V, 60Hz
 Comment: Neutral Line
 Tem.: 23.4°C Hum.: 56%

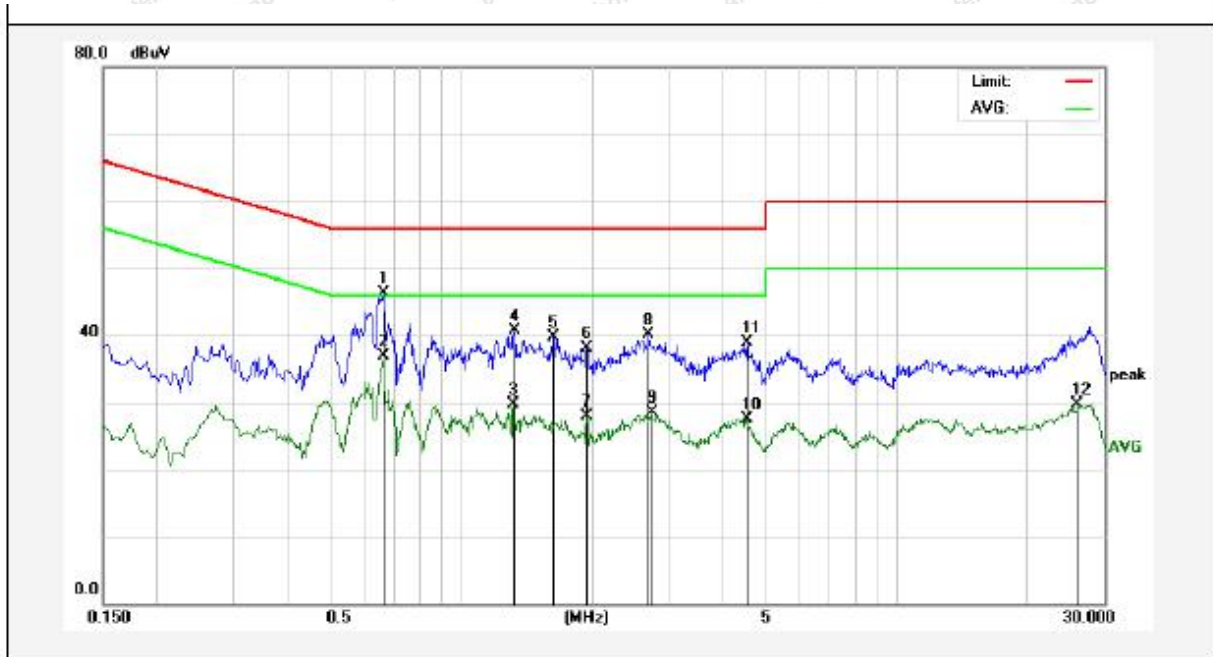

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Over Limit (dB)	Detector	Remark
1	0.6620	26.23	20.03	46.26	56.00	-9.74	QP	
2	0.6620	16.92	20.03	36.95	46.00	-9.05	AVG	
3	1.3220	9.64	20.13	29.77	46.00	-16.23	AVG	
4	1.3260	20.63	20.13	40.76	56.00	-15.24	QP	
5	1.6300	19.49	20.13	39.62	56.00	-16.38	QP	
6	1.9460	17.87	20.14	38.01	56.00	-17.99	QP	
7	1.9460	7.85	20.14	27.99	46.00	-18.01	AVG	
8	2.7060	19.96	20.15	40.11	56.00	-15.89	QP	
9	2.7380	8.33	20.15	28.48	46.00	-17.52	AVG	
10	4.5060	7.28	20.19	27.47	46.00	-18.53	AVG	
11	4.5340	18.69	20.19	38.88	56.00	-17.12	QP	
12	26.0459	9.36	20.28	29.64	50.00	-20.36	AVG	

4. Radiated Emission and Band Edge

4.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.209 and 15.205				
Test Limit	Frequency (MHz)	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz~0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz~88MHz	100	40.0	Quasi-peak	3
	88MHz~216MHz	150	43.5	Quasi-peak	3
	216MHz~960MHz	200	46.0	Quasi-peak	3
	960MHz~1000MHz	500	54.0	Quasi-peak	3
	Above 1000MHz	500	54.0	Average	3
-		74.0	Peak	3	

Remark:

- (1) The lower limit shall apply at the transition frequency.
- (2) 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

Test Standard	FCC Part15 C Section 15.249					
Test Limit	Frequency (MHz)	Field Strength of fundamental ((millivolts /meter)	Field Strength of Harmonics (microvolts/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	2400~2483.5	50	-	114.0	Peak	3
	2400~2483.5	50	-	94.0	Average	3
	2400~2483.5	-	500	74.0	Peak	3
	2400~2483.5	-	500	54.0	Average	3

Remark:

- (1) 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.



4.2. Test Setup

Figure 1. Below 30MHz

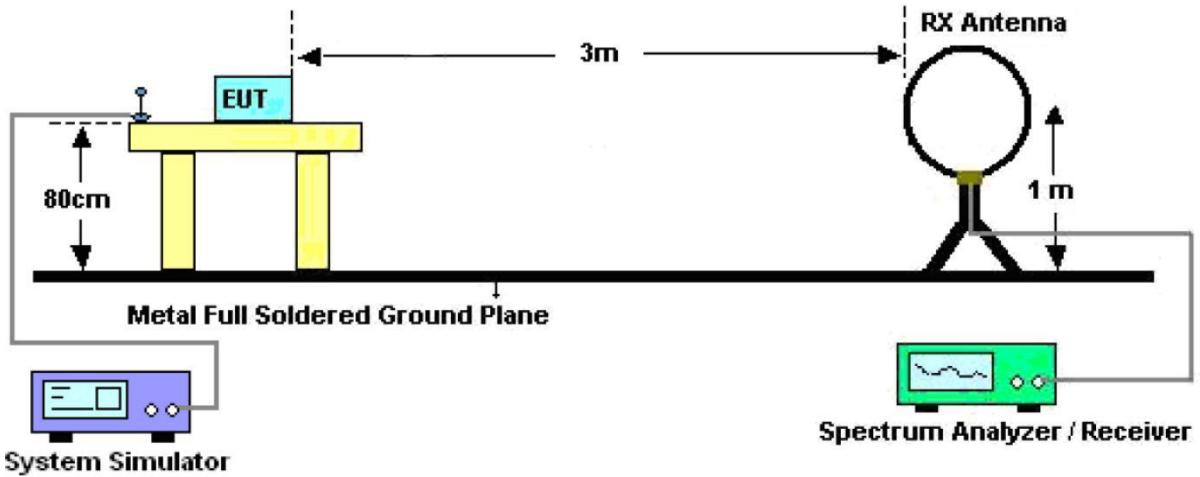


Figure 2. 30MHz to 1GHz


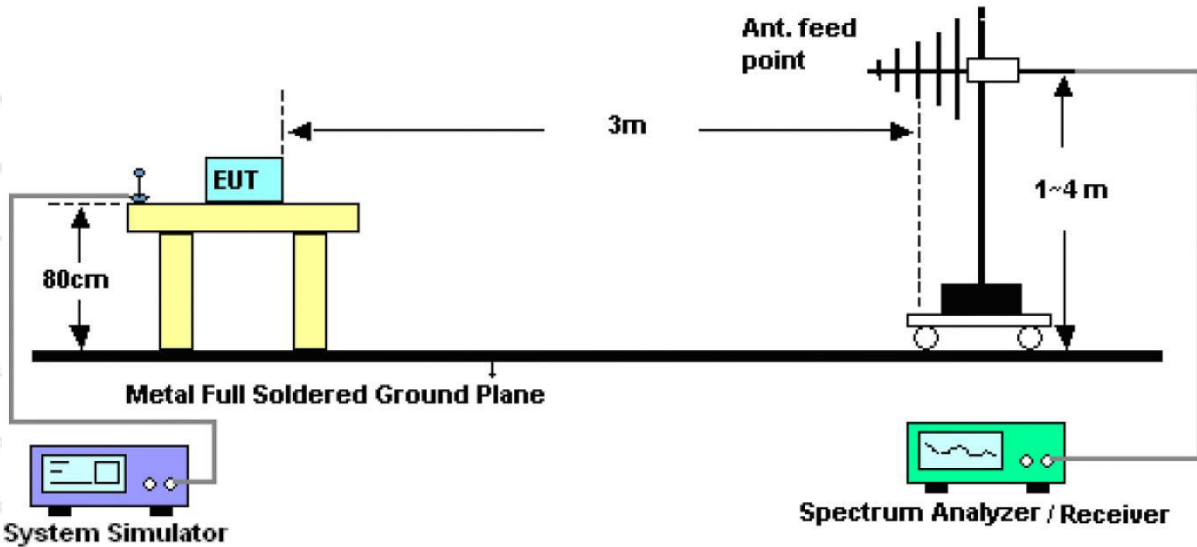


Figure 3. Above 1 GHz

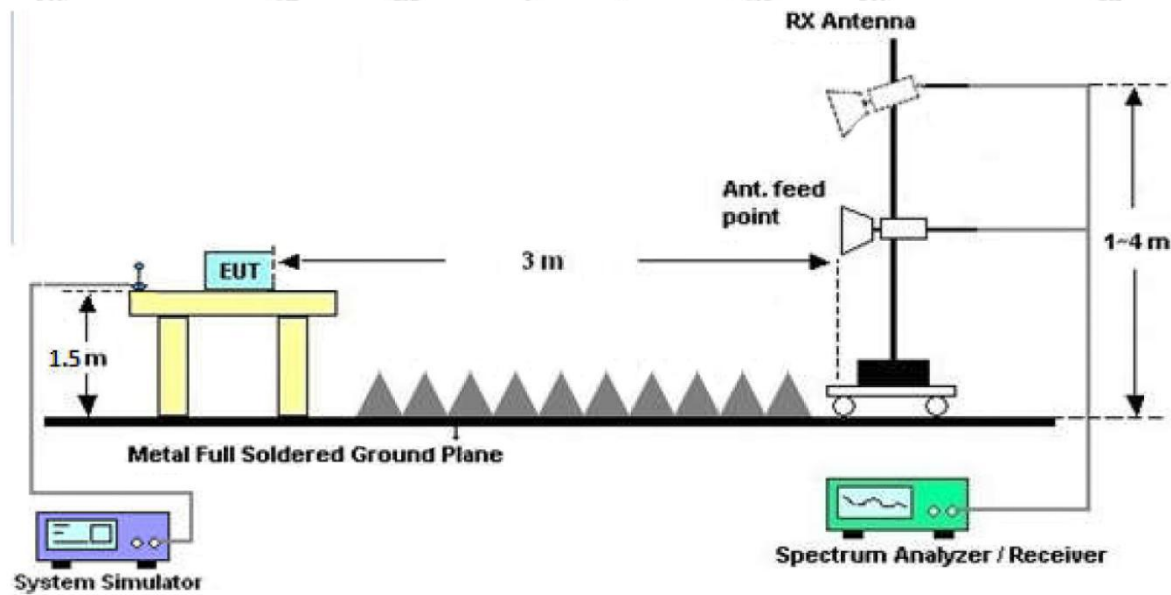

4.3. Test Procedure

For below 1GHz: The EUT is placed on a turntable, which is 0.8m above the ground plane.

For above 1GHz: The EUT is placed on a turntable, which is 1.5m above the ground plane.

The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level. Rotated the EUT through three orthogonal axes to determine the maximum emissions, both horizontal and vertical polarization of the antenna are set on test. The EUT is tested in 9*6*6 Chamber. The device is evaluated in xyz orientation.

For the radiated emission test above 1GHz:

Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.

For 9kHz to 150kHz, Set the spectrum analyzer as:

RBW = 200Hz, VBW = 1kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 150kHz to 30MHz, Set the spectrum analyzer as:

RBW = 9KHz, VBW = 30kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 30MHz to 1000MHz, Set the spectrum analyzer as:

RBW = 100kHz, VBW = 300kHz, Detector = Quasi-Peak, Trace mode = Max hold, Sweep = auto couple.

For above 1GHz, Set the spectrum analyzer as:

RBW = 1MHz, VBW = 1MHz, Detector = Peak, Trace mode = Max hold, Sweep = auto couple.

RBW = 1MHz, VBW = 10Hz, Detector = Average, Trace mode = Max hold, Sweep = auto couple.

4.4. Test Data

PASS


During the test, Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the X-axis is the worst case.

The test results of 9kHz-30MHz was attenuated more than 20dB below the permissible limits, so the results don't record in the report.

During the test, pre-scan all the modes, and found the Middle channel which is the worst case, only the worst case is recorded in the report

Test Results (30~1000MHz)

Test Mode: Mode 2
 Power Source: AC 120V, 60Hz
 Polarization: Vertical
 Temp.(°C)/Hum.(%RH): 24.2°C/54%RH

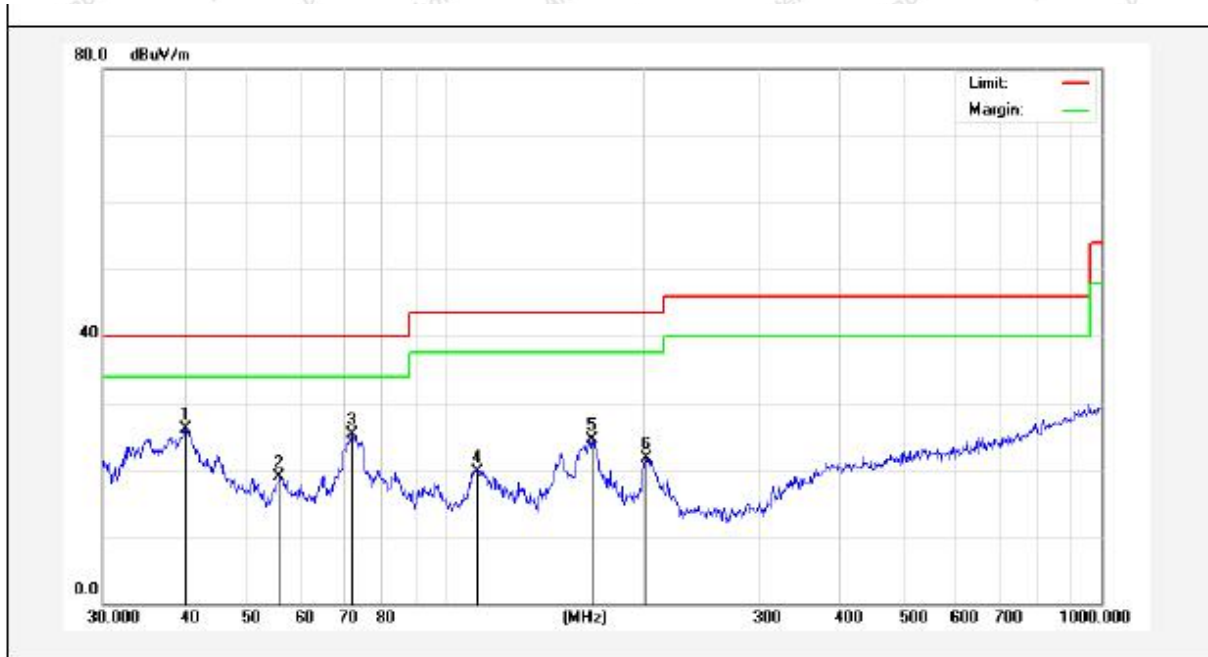

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	40.1347	40.51	-14.41	26.10	40.00	-13.90	QP	300	0	
2	55.8046	36.62	-17.77	18.85	40.00	-21.15	QP	300	69	
3	72.0841	47.38	-22.14	25.24	40.00	-14.76	QP	300	124	
4	111.7377	41.51	-21.74	19.77	43.50	-23.73	QP	300	196	
5	167.2366	45.40	-20.92	24.48	43.50	-19.02	QP	300	211	
6	202.1005	41.62	-19.92	21.70	43.50	-21.80	QP	300	360	

Test Results (30~1000MHz)

Test Mode: Mode 2
 Power Source: AC 120V, 60Hz
 Polarization: Horizontal
 Temp.(°C)/Hum.(%RH): 24.2°C/54%RH



No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	35.7490	42.68	-16.68	26.00	40.00	-14.00	QP	300	0	
2	55.4147	36.20	-17.75	18.45	40.00	-21.55	QP	300	74	
3	72.3375	45.58	-22.18	23.40	40.00	-16.60	QP	300	125	
4	169.5988	51.75	-20.62	31.13	43.50	-12.37	QP	300	196	
5	213.7632	42.83	-20.17	22.66	43.50	-20.84	QP	300	255	
6	431.0316	32.95	-12.29	20.66	46.00	-25.34	QP	300	360	

Test Results (1GHz-25GHz)

Test Mode: CH01 (Low channel)									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.	Detector
2406.0000	94.67	31.12	2.18	35.33	92.64	114.00	-21.36	V	Peak
2406.0000	84.99	31.12	2.18	35.33	82.96	94.00	-11.04	V	AVG
4812.0000	47.95	34.01	2.58	34.65	49.89	74.00	-24.11	V	Peak
4812.0000	38.77	34.01	2.58	34.65	40.71	54.00	-13.29	V	AVG
7218.0000	47.45	36.16	2.97	35.07	51.51	74.00	-22.49	V	Peak
7218.0000	35.55	36.16	2.97	35.07	39.61	54.00	-14.39	V	AVG
9624.0000	*								
12030.0000	*								
14436.0000	*								
16842.0000	*								
2406.0000	94.27	31.12	2.18	35.33	92.24	114.00	-21.76	H	Peak
2406.0000	84.61	31.12	2.18	35.33	82.58	94.00	-11.42	H	AVG
4812.0000	48.81	34.01	2.58	34.65	50.75	74.00	-23.25	H	Peak
4812.0000	41.47	34.01	2.58	34.65	43.41	54.00	-10.59	H	AVG
7218.0000	46.52	36.16	2.97	35.07	50.58	74.00	-23.42	H	Peak
7218.0000	36.70	36.16	2.97	35.07	40.76	54.00	-13.24	H	AVG
9624.0000	*								
12030.0000	*								
14436.0000	*								
16842.0000	*								

Note:

1. Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor
2. “*” means the test results were attenuated more than 20dB below the permissible limits, so the results don't record in the report.

Test Mode: CH09 (Middle channel)									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.	Detector
2442.0000	94.44	31.12	2.20	34.51	93.25	114.00	-20.75	V	Peak
2442.0000	82.34	31.22	2.20	34.51	81.25	94.00	-12.75	V	AVG
4884.0000	47.48	34.98	2.49	34.14	50.81	74.00	-23.19	V	Peak
4884.0000	40.07	34.98	2.49	34.14	43.40	54.00	-10.60	V	AVG
7326.0000	47.29	36.01	3.01	34.56	51.75	74.00	-22.25	V	Peak
7326.0000	38.13	36.01	3.01	34.56	42.59	54.00	-11.41	V	AVG
9768.0000	*								
12210.0000	*								
14652.0000	*								
17094.0000	*								
2442.0000	94.48	31.12	2.20	34.51	93.29	114.00	-20.71	H	Peak
2442.0000	83.57	31.12	2.20	34.51	82.38	94.00	-11.62	H	AVG
4884.0000	49.24	34.98	2.49	34.14	52.57	74.00	-21.43	H	Peak
4884.0000	41.46	34.98	2.49	34.14	44.79	54.00	-9.21	H	AVG
7326.0000	48.80	36.01	3.01	34.56	53.26	74.00	-20.74	H	Peak
7326.0000	37.87	36.01	3.01	34.56	42.33	54.00	-11.67	H	AVG
9768.0000	*								
12210.0000	*								
14652.0000	*								
17094.0000	*								

Note:

1. Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor
2. "*" means the test results were attenuated more than 20dB below the permissible limits, so the results don't record in the report.

Test Mode: CH18 (High channel)									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.	Detector
2474.0000	93.53	31.65	2.23	36.07	91.34	114.00	-22.66	V	Peak
2474.0000	83.24	31.65	2.23	36.07	81.05	94.00	-12.95	V	AVG
4948.0000	49.08	35.06	2.60	34.93	51.81	74.00	-22.19	V	Peak
4948.0000	39.91	35.06	2.60	34.93	42.64	54.00	-11.36	V	AVG
7422.0000	48.90	36.19	3.12	35.11	53.10	74.00	-20.90	V	Peak
7422.0000	38.55	36.19	3.12	35.11	42.75	54.00	-11.25	V	AVG
9896.0000	*								
12370.0000	*								
14844.0000	*								
17318.0000	*								
2474.0000	95.07	31.65	2.23	36.07	92.88	114.00	-21.12	H	Peak
2474.0000	82.47	31.65	2.23	36.07	80.28	94.00	-13.72	H	AVG
4948.0000	48.33	35.06	2.60	34.93	51.06	74.00	-22.94	H	Peak
4948.0000	40.59	35.06	2.60	34.93	43.32	54.00	-10.68	H	AVG
7422.0000	46.08	36.19	3.12	35.11	50.28	74.00	-23.72	H	Peak
7422.0000	36.06	36.19	3.12	35.11	40.26	54.00	-13.74	H	AVG
9896.0000	*								
12370.0000	*								
14844.0000	*								
17318.0000	*								

Note:

1. Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor
2. "*" means the test results were attenuated more than 20dB below the permissible limits, so the results don't record in the report.


Radiated Band Edge:






Remark:


1. Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor

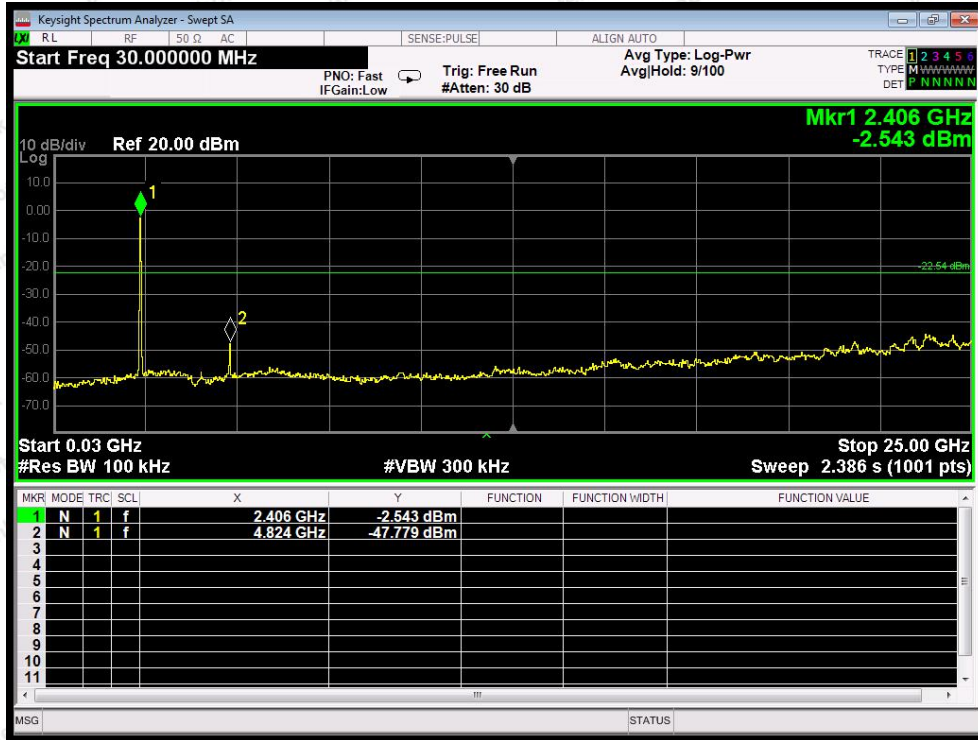

CH: Low

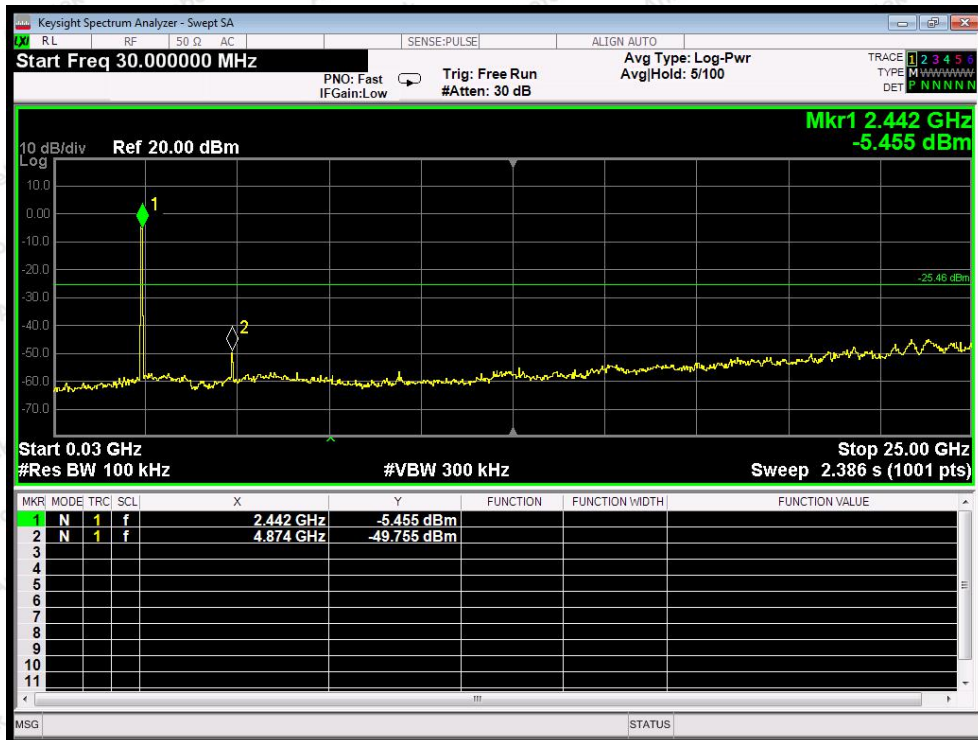

CH: Middle

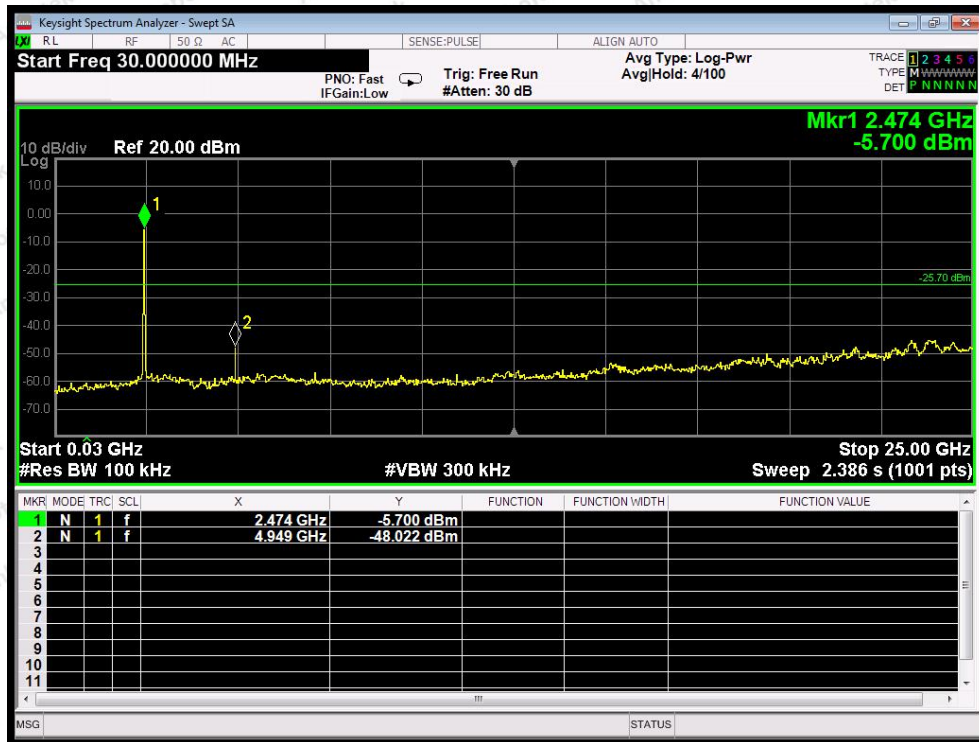


CH: High

5. 20dB Bandwidth Test

5.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.249
---------------	-----------------------------

5.2. Test Setup

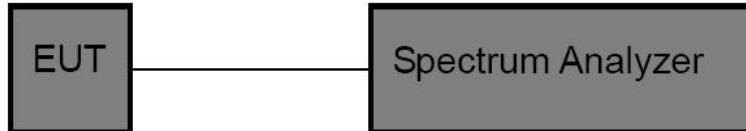


5.3. Test Procedure

1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as:
 RBW = 30kHz, VBW≥3*RBW =100kHz,
 Detector= Average
 Trace mode= Max hold.
 Sweep- auto couple.
4. Mark the peak frequency and -20dB (upper and lower) frequency.
5. Repeat until all the rest channels are investigated.


5.4. Test Data

Test Item	: 20dB Bandwidth	Test Mode	: Mode 1
Test Voltage	: AC 120V, 60Hz	Temperature	: 22.4℃
Test Result	: PASS	Humidity	: 55%RH


Frequency (MHz)	Bandwidth (kHz)	Result
2406MHZ	2070	PASS
2442MHZ	2067	PASS
2474MHZ	2073	PASS

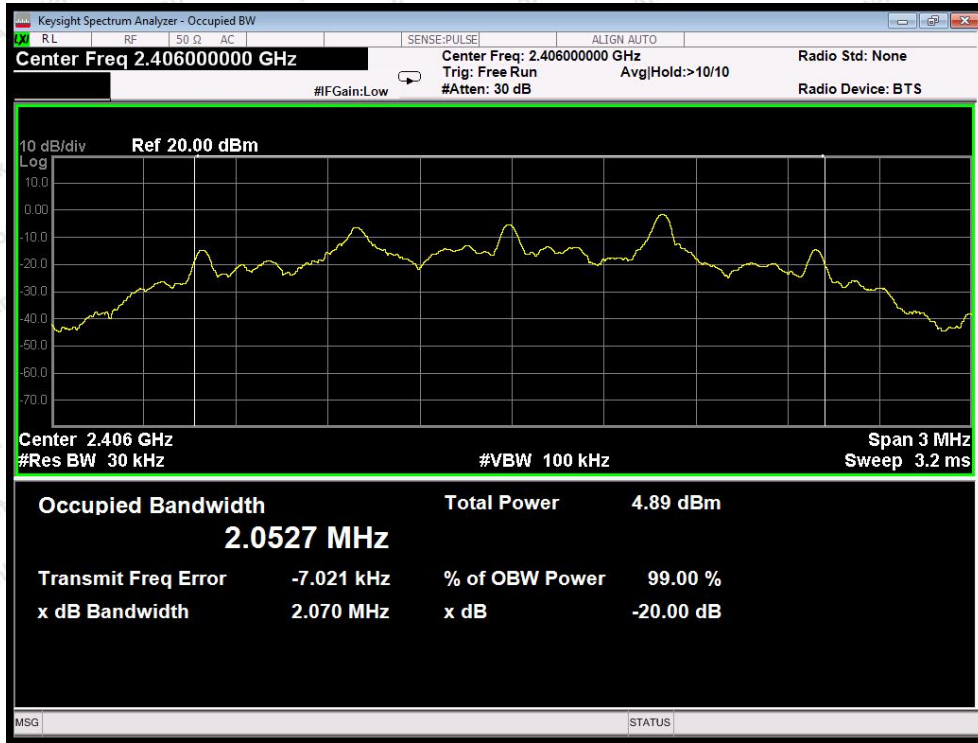

Test Mode: Low

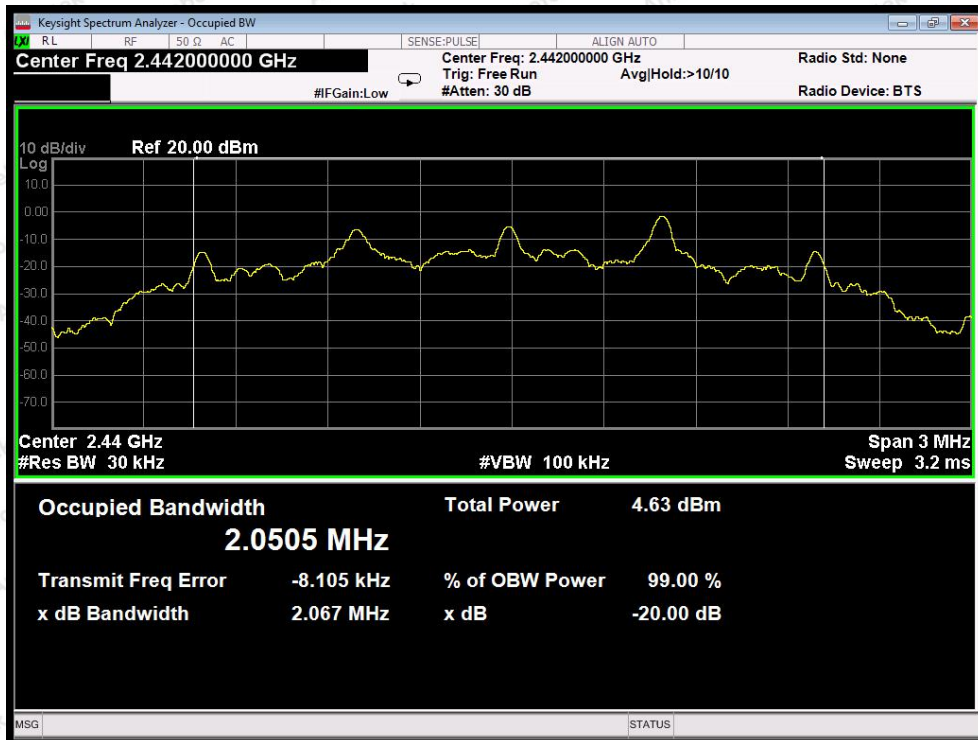

Test Mode: Middle

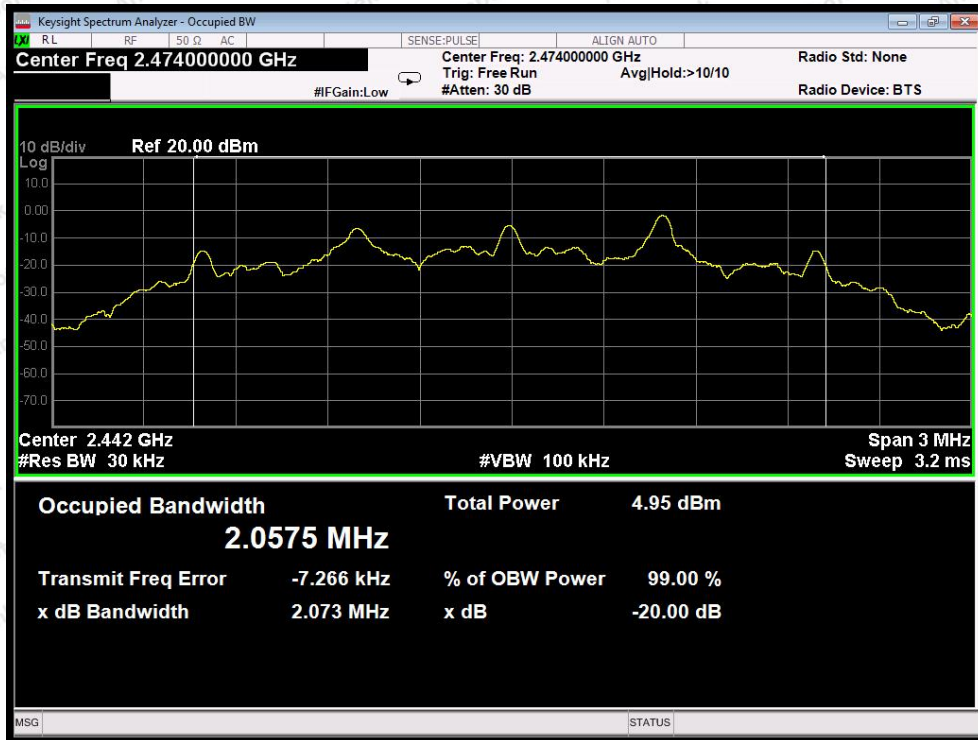

Test Mode: High

6. Antenna Requirement

6.1. Test Standard and Requirement

Test Standard	FCC Part15 Section 15.203
Requirement	1) 15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

6.2. Antenna Connected Construction

The antenna is a PIFA Antenna which permanently attached, and the best case gain of the antenna is 1 dBi. It complies with the standard requirement.

----- End of Report -----