



Report No.: FCC 1901184-01 File reference No.: 2019-02-22

Applicant: GLORY STAR TECHNICS (SHENZHEN) CO., LTD.

Product: 21.5' Advertising Displayer

Model No.: ULT215

Trademark: N/A

Test Standards: FCC Part 15.247

Test result:

It is herewith confirmed and found to comply with the

requirements set up by ANSI C63.10, FCC Part 15.247 for the

evaluation of electromagnetic compatibility

Approved By

Jack Chung

Jack Chung

Manager

Dated: February 22,2019

Results appearing herein relate only to the sample tested

The technical reports is issued errors and omissions exempt and is subject to withdrawal at

SHENZHEN TIMEWAY TESTING LABORATORIES

Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le Village, Nanshan District, Shenzhen, China

Tel (755) 83448688, Fax (755) 83442996, E-Mail:info@timeway-lab.com

Report No.: FCC1901184-01

Date: 2019-02-22



Special Statement:

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19.

Page 2 of 104

The testing quality system of our laboratory meet with ISO/IEC-17025 requirements, which is approved by CNAL. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

CNAL-LAB Code: L2292

The EMC Laboratory has been assessed and in compliance with CNAL/AC01:2002 accreditation criteria for testing Laboratories (identical to ISO/IEC 17025:2005 General Requirements) for the Competence of testing Laboratories.

FCC-Registration No.: 744189

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 744189.

Page 3 of 104

Report No.: FCC1901184-01

Date: 2019-02-22



Test Report Conclusion

Content

| 1.0 | General Details | 4 |
|------|-------------------------------------|----|
| 1.1 | Test Lab Details. | 4 |
| 1.2 | Applicant Details | 4 |
| 1.3 | Description of EUT | 4 |
| 1.4 | Submitted Sample | 5 |
| 1.5 | Test Duration. | 5 |
| 1.6 | Test Uncertainty. | 5 |
| 1.7 | Test By | 5 |
| 2.0 | List of Measurement Equipment | 6 |
| 3.0 | Technical Details | 8 |
| 3.1 | Summary of Test Results | 8 |
| 3.2 | Test Standards. | 8 |
| 4.0 | EUT Modification. | 8 |
| 5.0 | Power Line Conducted Emission Test. | 9 |
| 5.1 | Schematics of the Test. | 9 |
| 5.2 | Test Method and Test Procedure. | 9 |
| 5.3 | Configuration of the EUT | 9 |
| 5.4 | EUT Operating Condition. | 10 |
| 5.5 | Conducted Emission Limit. | 10 |
| 5.6 | Test Result. | 10 |
| 6.0 | Radiated Emission test. | 13 |
| 6.1 | Test Method and Test Procedure. | 13 |
| 6.2 | Configuration of the EUT | 13 |
| 6.3 | EUT Operation Condition. | 13 |
| 6.4 | Radiated Emission Limit. | 14 |
| 7.0 | 6dB Bandwidth Measurement. | 23 |
| 8.0 | Maximum Output Power | 43 |
| 9.0 | Power Spectral Density Measurement. | 46 |
| 10.0 | Out of Band Measurement. | 64 |
| 11.0 | Antenna Requirement. | 82 |
| 12.0 | FCC ID Label. | 83 |
| 13.0 | Photo of Test Setup and EUT View. | 84 |

Report No.: FCC1901184-01

Date: 2019-02-22



Page 4 of 104

1.0 General Details

1.1 Test Lab Details

Name: SHENZHEN TIMEWAY TESTING LABORATORIES.

Address: Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le

Village, Nanshan District, Shenzhen, China

Telephone: (755) 83448688 Fax: (755) 83442996

1.2 Applicant Details

Applicant: GLORY STAR TECHNICS (SHENZHEN) CO., LTD.

Address: 4/Floor, west block, Longzhu Road, Xin WuCun Industry Building, NanShan District, ShenZhen

Telephone: (755)-26001808-305 Fax: (755)-26002933

1.3 Description of EUT

Product: 21.5' Advertising Displayer

Manufacturer: GLORY STAR TECHNICS (SHENZHEN) CO., LTD.

Address: 4/Floor, west block, Longzhu Road, Xin WuCun Industry Building, NanShan

District, ShenZhen

Brand Name: N/A
Model Number: ULT215
Hardware Version: 1.0.0
Software Version 1.0.0

Additional Model Number: N/A

Type of Modulation IEEE 802.11b : DSSS (CCK, QPSK, DBPSK)

IEEE 802.11g/n (HT20): OFDM(64QAM, 16QAM, QPSK, BPSK)

Frequency range IEEE 802.11b/g/n (HT20): 2412-2462MHz

Channel Spacing 5MHz for IEEE 802.11b/g/n HT20 Air Data Rate IEEE 802.11b : 11, 5.5, 2, 1 Mbps

IEEE 802.11g: 54, 48,36, 24, 18, 12, 9, 6 Mbps

IEEE 802.11n HT20: mcs0-mcs9

Frequency Selection By software

Channel Number IEEE 802.11b/g/n (HT20): 11 Channels

Antenna: Dipole antenna used. The gain of the antennas is 2.0dBi.

Power Supply: Model: SUN-1200500; Rating: Input: 100-240VV~, 50/60Hz, 1.7A;

Output:DC12V,5A

1.4 Submitted Sample: 2 Samples

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No.: FCC1901184-01 Page 5 of 104

Date: 2019-02-22



1.5 Test Duration 2019-01-21 to 2019-02-22

Test Uncertainty

Conducted Emissions Uncertainty = 3.6dB Radiated Emissions below 1GHz Uncertainty =4.7dB Radiated Emissions above 1GHz Uncertainty =6.0dB Conducted Power Uncertainty =6.0dB Occupied Channel Bandwidth Uncertainty =5%

1.7 Test Engineer

Terry Tang The sample tested by

Print Name: Terry Tang

Page 6 of 104

Report No.: FCC1901184-01

Date: 2019-02-22



| 2.0 Test Equipment | | | | | |
|------------------------|--------------|----------------------|--------------|--------------|------------|
| Instrument Type | Manufacturer | Model | Serial No. | Date of Cal. | Due Date |
| ESPI Test Receiver | R&S | ESPI 3 | 100379 | 2018-06-22 | 2019-06-21 |
| TWO Line-V-NETW | R&S | EZH3-Z5 | 100294 | 2018-06-22 | 2019-06-21 |
| TWO Line-V-NETW | R&S | EZH3-Z5 | 100253 | 2018-06-22 | 2019-06-21 |
| Ultra Broadband ANT | R&S | HL562 | 100157 | 2018-06-18 | 2019-06-17 |
| Impuls-Begrenzer | R&S | ESH3-Z2 | 100281 | 2018-06-22 | 2019-06-21 |
| Loop Antenna | EMCO | 6507 | 00078608 | 2018-06-25 | 2019-06-24 |
| Spectrum | R&S | FSIQ26 | 100292 | 2018-06-22 | 2019-06-21 |
| Horn Antenna | A-INFO | LB-180400-KF | J211060660 | 2018-06-25 | 2019-06-24 |
| Horn Antenna | R&S | BBHA 9120D | 9120D-631 | 2018-08-24 | 2019-08-23 |
| Power meter | Anritsu | ML2487A | 6K00003613 | 2018-08-22 | 2019-08-21 |
| Power sensor | Anritsu | MA2491A | 32263 | 2018-08-22 | 2019-08-21 |
| Bilog Antenna | Schwarebeck | VULB9163 | 9163/340 | 2018-07-04 | 2019-07-03 |
| 9*6*6 Anechoic | | | N/A | 2018-02-07 | 2021-02-06 |
| EMI Test Receiver | RS | ESVB | 826156/011 | 2018-06-22 | 2019-06-21 |
| EMI Test Receiver | RS | ESH3 | 860904/006 | 2018-06-22 | 2019-06-21 |
| Spectrum | HP/Agilent | ESA-L1500A | US37451154 | 2018-06-22 | 2019-06-21 |
| Spectrum | HP/Agilent | E4407B | MY50441392 | 2018-03-27 | 2019-03-26 |
| Spectrum | RS | FSP | 1164.4391.38 | 2019-01-20 | 2020-01-19 |
| RF Cable | Zhengdi | ZT26-NJ-NJ-8 M/FA | | 2018-05-24 | 2019-05-23 |
| RF Cable | Zhengdi | 7m | | 2018-03-17 | 2019-03-16 |
| RF Switch | EM | EMSW18 | 060391 | 2018-06-22 | 2019-06-21 |
| Pre-Amplifier | Schwarebeck | BBV9743 | #218 | 2018-06-22 | 2019-06-21 |
| Pre-Amplifier | HP/Agilent | 8449B | 3008A00160 | 2018-08-05 | 2019-08-04 |
| LISN | SCHAFFNER | NNB42 | 00012 | 2019-01-08 | 2020-01-07 |

Report No.: FCC1901184-01 Page 7 of 104

Date: 2019-02-22



3. DESCRIPTION OF TEST MODES

IEEE 802.11b, 802.11g, 802.11n (HT20) mode

The EUT had been tested under operating condition. There are three channels have been tested as following:

| Channel | Frequency (MHz) |
|---------|-----------------|
| Low | 2412 |
| Middle | 2437 |
| High | 2462 |

IEEE 802.11b mode: 1Mbps data rate (worst case) was chosen for full testing. IEEE 802.11g mode: 6Mbps data rate (worst case) was chosen for full testing. IEEE 802.11n (HT20) mode: mcs0 (worst case) were chosen for full testing ,Dutycycle>98%.

IEEE 802.11n (HT40) mode

The EUT had been tested under operating condition. There are three channels have been tested as following:

| Channel | Frequency (MHz) |
|---------|-----------------|
| Low | 2422 |
| Middle | 2437 |
| High | 2452 |

IEEE 802.11n (HT40) mode: msc0 data rate (worst case) were chosen for full testing ,Dutycycle>98%.

Page 8 of 104

Report No.: FCC1901184-01

Date: 2019-02-22



3.0 **Technical Details**

3.1 **Summary of test results**

| The EUT has been tested ac | ccording to the following speci | meations: | |
|---|--|-----------|----------|
| Standard | Test Type | Result | Notes |
| FCC Part 15, Paragraph 15.107 & 15.207 | Conducted Emission Test | PASS | Complies |
| FCC Part 15 Subpart C | Spectrum bandwidth of a Orthogonal Frequency Division Multiplex System | PASS | Complies |
| Paragraph 15.247(a)(2) Limit | Limit: 6dB bandwidth>500kHz | 11155 | |
| FCC Part 15, Paragraph 15.247(b) | Maximum peak output power Limit: max. 30dBm | PASS | Complies |
| FCC Part 15, Paragraph 15.109,15.205 & 15.209 | Transmitter Radiated Emission Limit: Table 15.209 | PASS | Complies |
| FCC Part 15, Paragraph 15.247(e) | Power Spectral Density Limit: max. 8dBm | PASS | Complies |
| FCC Part 15, Paragraph 15.247(d) | Out of Band Emission and Restricted Band Radiation Limit: 20dB less than peak value of fundamental frequency Restricted band limit: Table 15.209 | PASS | Complies |

3.2 **Test Standards**

FCC Part 15 Subpart & Subpart C, Paragraph 15.247

EUT Modification 4.0

No modification by SHENZHEN TIMEWAY TESTING LABORATORIES.


Report No.: FCC1901184-01

Date: 2019-02-22



5.0 Power Line Conducted Emission Test

5.1 Schematics of the test




EUT: Equipment Under Test

5.2 Test Method and test Procedure

The EUT was tested according to ANSI C63.10-2013. The Frequency spectrum From 0.15MHz to 30MHz was investigated. The LISN used was 50ohm/50uH as specified by section 5.1 of ANSI C63.10-2013.

Test Voltage: 120V~, 60Hz Block diagram of Test setup

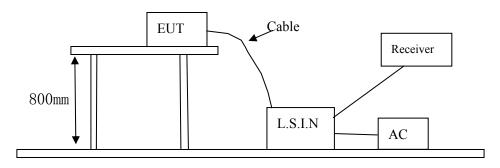

5.3 Configuration of The EUT

The EUT was configured according to ANSI C63.10-2013. All interface ports were connected to the appropriate peripherals. All peripherals and cables are listed below.

A. EUT

| Device | Manufacturer | Model | FCC ID | |
|-------------------------------|----------------------|------------|------------------|--|
| 21 51 A deserticio - Diculare | GLORY STAR TECHNICS | III TO 1.5 | 24 A CG 111 T215 | |
| 21.5' Advertising Displayer | (SHENZHEN) CO., LTD. | ULT215 | 2AACS-ULT215 | |

B. Internal Device

| Device | Manufacturer | Model | FCC ID/DOC |
|--------|--------------|-------|------------|
| N/A | | | |

C. Peripherals

| Device | Manufacturer | Model | FCC ID/DOC | Cable |
|--------|--------------|-------|------------|-------|
| | | | | |

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No.: FCC1901184-01 Page 10 of 104

Date: 2019-02-22



5.4 EUT Operating Condition

Operating condition is according to ANSI C63.10-2013.

- A Setup the EUT and simulators as shown on follow
- B Enable AF signal and confirm EUT active to normal condition

5.5 Power line conducted Emission Limit according to Paragraph 15.207 and 15.107

| Frequency | Class A Lim | its (dB µ V) | Class B Limits (dB µ V) | | |
|-------------------|------------------|---------------|-------------------------|---------------|--|
| (MHz) | Quasi-peak Level | Average Level | Quasi-peak Level | Average Level | |
| $0.15 \sim 0.50$ | 79.0 | 66.0 | 66.0~56.0* | 56.0~46.0* | |
| $0.50 \sim 5 00$ | 73.0 | 60.0 | 56.0 | 46.0 | |
| $5.00 \sim 30.00$ | 73.0 | 60.0 | 60.0 | 50.0 | |

Notes:

- 1. *Decreasing linearly with logarithm of frequency.
- 2. The tighter limit shall apply at the transition frequencies

5.6 Test Results

The frequency spectrum from 0.15MHz to 30MHz was investigated. All reading are quasi-peak values with a resolution bandwidth of 9kHz.

Page 11 of 104

Date: 2019-02-22

Report No.: FCC1901184-01



A: Conducted Emission on Live Terminal (150kHz to 30MHz)

EUT Operating Environment


Temperature: 26°C Humidity: 65%RH Atmospheric Pressure: 101 KPa

EUT set Condition: Keep WIFI Transmitting

Equipment Level: Class B

Results: PASS

Please refer to following diagram for individual

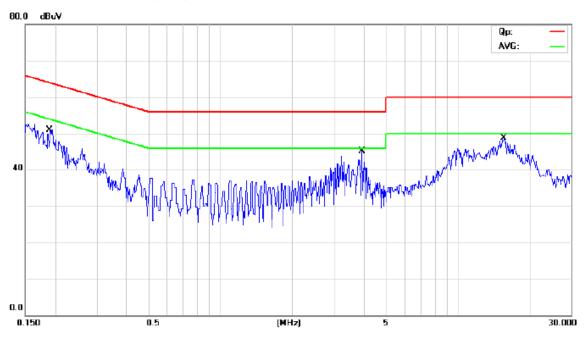

| No. Mk. | Freq. | Reading Level | Correct Factor | Measure- ment | Limit | Over | | |
|---------|---------|------------------|-------------------|------------------|-------|--------|----------|---------|
| | MHz | dBuV | dB | dBuV | dBuV | dB | Detector | Comment |
| 1 | 0.1905 | 36.00 | 9.76 | 45.76 | 64.01 | -18.25 | QP | |
| 2 | 0.1905 | -3.90 | 9.76 | 5.86 | 54.01 | -48.15 | AVG | |
| 3 * | 3.9352 | 33.00 | 9.88 | 42.88 | 56.00 | -13.12 | QP | |
| 4 | 3.9352 | -1.60 | 9.88 | 8.28 | 46.00 | -37.72 | AVG | |
| 5 | 15.6215 | 34.10 | 10.42 | 44.52 | 60.00 | -15.48 | QP | |
| 6 | 15.6215 | 10.40 | 10.42 | 20.82 | 50.00 | -29.18 | AVG | |

Page 12 of 104

Report No.: FCC1901184-01

Date: 2019-02-22



B: Conducted Emission on Neutral Terminal (150kHz to 30MHz)

EUT Operating Environment


Temperature: 26°C Humidity: 65%RH Atmospheric Pressure: 101 KPa

EUT set Condition: Keep WIFI Transmitting

Equipment Level: Class B

Results: Pass

Please refer to following diagram for individual

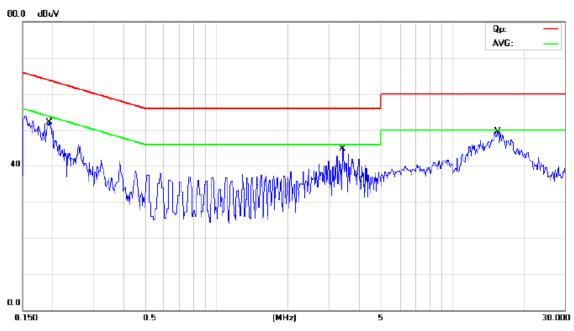

| No. Mk | . Freq. | Reading Level | Correct Factor | Measure- ment | Limit | Over | Detector | Comment |
|--------|---------|------------------|-------------------|------------------|-------|--------|----------|---------|
| | | | | 47.95 | | | | Comment |
| 1 | 0.1934 | 38.20 | 9.75 | 47.90 | 63.69 | -15.94 | QP | |
| 2 | 0.1934 | 4.80 | 9.75 | 14.55 | 53.89 | -39.34 | AVG | |
| 3 * | 3.4220 | 31.20 | 9.86 | 41.06 | 56.00 | -14.94 | QP | |
| 4 | 3.4220 | 10.30 | 9.86 | 20.16 | 46.00 | -25.84 | AVG | |
| 5 | 15.5366 | 31.30 | 10.41 | 41.71 | 60.00 | -18.29 | QP | |
| 6 | 15.5366 | 3.10 | 10.41 | 13.51 | 50.00 | -36.49 | AVG | |

Report No.: FCC1901184-01 Page 13 of 104

Date: 2019-02-22



6 Radiated Emission Test

- 6.1 Test Method and test Procedure:
- (1) The EUT was tested according to ANSI C63.10-2013. The radiated test was performed at Timeway EMC Laboratory. This site is on file with the FCC laboratory division, Registration No. 744189
- (2) The EUT, peripherals were put on the turntable which table size is 1m x 1.5 m, table high 0.8 m. All set up is according to ANSI C63.10-2013.
- (3) The frequency spectrum from 30 MHz to 25 GHz was investigated. All readings from 30 MHz to 1 GHz are Quasi-peak values with a resolution bandwidth of 120 kHz. For measurement above 1GHz, peak values with RBW=1MHz VBW=3MHz and PK detector. AV value with RBW=1MHz, VBW=3MHz and RMS detector. Measurements were made at 3 meters.
- (4) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (5) Maximizing procedure was performed on the six (6) highest emissions to ensure EUT compliance is with all installation combinations. All data was recorded in the peak detection mode. Quasi-peak readings was performed only when an emission was found to be marginal (within -4 dB of specification limit), and are distinguished with a "QP" in the data table.
- (6) The antenna polarization: Vertical polarization and Horizontal polarization.

Block diagram of Test setup Distance = 3m Computer Pre -Amplifier EUT Turn-table Receiver

- 6.2 Configuration of The EUT
 Same as section 5.3 of this report
- 6.3 EUT Operating Condition
 Same as section 5.4 of this report.

The report refers only to the sample tested and does not apply to the bulk.

Report No.: FCC1901184-01 Page 14 of 104

Date: 2019-02-22



6.4 Radiated Emission Limit

All emission from a digital device, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strength specified below:

Frequencies in restricted band are complied to limit on Paragraph 15.209 and 15.109

| Frequency Range (MHz) | Distance (m) | Field strength (dB μ V/m) |
|-----------------------|--------------|-------------------------------|
| 30-88 | 3 | 40.0 |
| 88-216 | 3 | 43.5 |
| 216-960 | 3 | 46.0 |
| Above 960 | 3 | 54.0 |

Note:

- 1. RF Voltage $(dBuV) = 20 \log RF \text{ Voltage } (uV)$
- 2. In the Above Table, the higher limit applies at the band edges.
- 3. Distance refers to the distance in meters between the measuring instrument antenna and the EUT
- 4. Worse case were recorded in the test report. 802.11g was the worst case.

Page 15 of 104

Report No.: FCC1901184-01

Date: 2019-02-22




Test result General Radiated Emission Data and Harmonics Radiated Emission Data

Radiated Emission In Horizontal (30MHz----1000MHz)

EUT set Condition: **Keep Transmitting**

Results: Pass

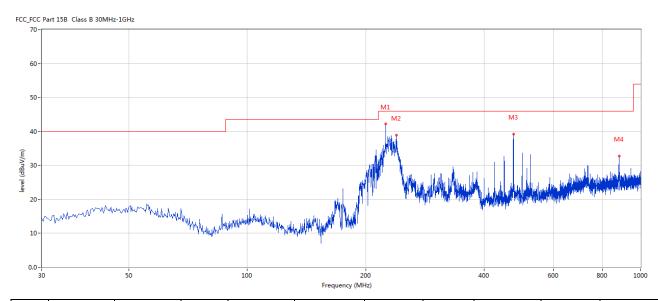

| No. | Frequency | Results | Factor | Limit | Over Limit | Detector | Table | Height | ANT | Verdict |
|-----|-----------|----------|--------|----------|------------|----------|--------|--------|-----|---------|
| | (MHz) | (dBuV/m) | (dB) | (dBuV/m) | (dB) | | (o) | (cm) | | |
| 1 | 224.921 | 42.20 | -12.93 | 46.0 | -3.80 | Peak | 360.00 | 100 | Н | Pass |
| 2 | 239.225 | 38.91 | -12.38 | 46.0 | -7.09 | Peak | 344.00 | 100 | Н | Pass |
| 3 | 475.119 | 39.19 | -7.41 | 46.0 | -6.81 | Peak | 353.00 | 100 | Н | Pass |
| 4 | 881.447 | 32.70 | -2.04 | 46.0 | -13.30 | Peak | 347.00 | 100 | Н | Pass |

Page 16 of 104

Report No.: FCC1901184-01

Date: 2019-02-22




Test result General Radiated Emission Data and Harmonics Radiated Emission Data

Radiated Emission In Vertical (30MHz----1000MHz)

EUT set Condition: **Keep Transmitting**

Results: Pass

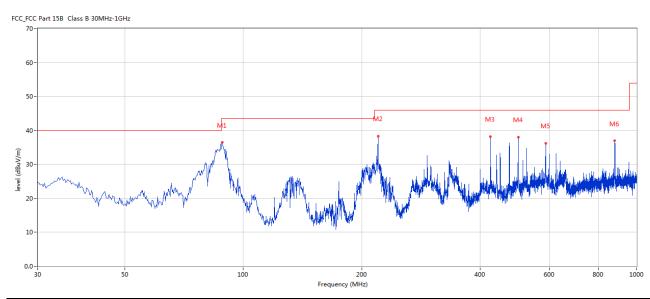

| No. | Frequency | Results | Factor | Limit | Over Limit | Detector | Table (o) | Height | ANT | Verdict |
|-----|-----------|----------|--------|----------|------------|----------|-----------|--------|-----|---------|
| | (MHz) | (dBuV/m) | (dB) | (dBuV/m) | (dB) | | | (cm) | | |
| 1 | 88.428 | 38.47 | -15.55 | 43.5 | -5.03 | Peak | 0.00 | 100 | V | Pass |
| 2 | 220.072 | 38.35 | -13.32 | 46.0 | -7.65 | Peak | 0.00 | 100 | V | Pass |
| 3 | 424.934 | 38.21 | -8.20 | 46.0 | -7.79 | Peak | 0.00 | 100 | V | Pass |
| 4 | 500.090 | 38.04 | -6.91 | 46.0 | -7.96 | Peak | 0.00 | 100 | V | Pass |
| 5 | 587.126 | 36.24 | -5.53 | 46.0 | -9.76 | Peak | 0.00 | 100 | V | Pass |
| 6 | 880.720 | 36.97 | -2.02 | 46.0 | -9.03 | Peak | 14.00 | 100 | V | Pass |


Report No.: FCC1901184-01 Page 17 of 104

Date: 2019-02-22



Please refer to the following test plots for details:

CH01 for 11g at 6Mbps: Horizontal

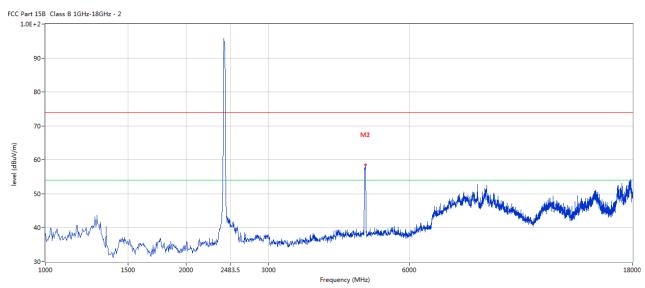

| No. | Frequency | Results | Factor | Limit | Over Limit | Detector | Table (o) | Height | ANT | Verdict |
|-----|-----------|----------|--------|----------|------------|----------|-----------|--------|-----|---------|
| | (MHz) | (dBuV/m) | (dB) | (dBuV/m) | (dB) | | | (cm) | | |
| 1 | 4824.293 | 58.35 | 3.15 | 74.0 | -15.65 | Peak | 226.00 | 100 | Н | Pass |
| 2 | 4824.293 | 46.77 | 3.15 | 54.0 | -7.23 | AV | 226.00 | 100 | Н | Pass |


Page 18 of 104 Report No.: FCC1901184-01

Date: 2019-02-22



CH01 for 11g at 6Mbps: Vertical



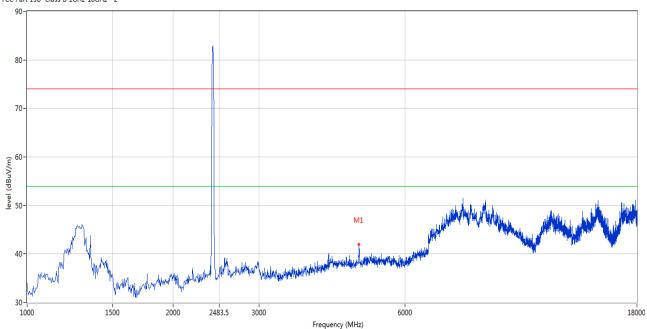


| No. | Frequency | Results | Factor (dB) | Limit | Over Limit | Detector | Table | Height | ANT | Verdict |
|-----|-----------|----------|-------------|----------|------------|----------|--------|--------|-----|---------|
| | (MHz) | (dBuV/m) | | (dBuV/m) | (dB) | | (o) | (cm) | | |
| 1 | 4824.044 | 42.00 | 3.14 | 74.0 | -32.00 | Peak | 277.00 | 100 | V | Pass |

Report No.: FCC1901184-01 Page 19 of 104

Date: 2019-02-22



CH06 for 11g at 6Mbps: Vertical

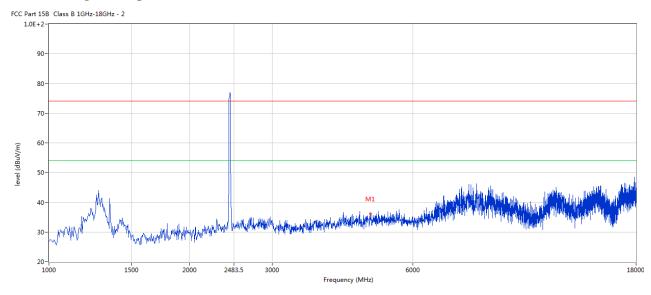


| No. | Frequency | Results | Factor | Limit | Over Limit | Detector | Table (o) | Height | ANT | Verdict |
|-----|-----------|----------|--------|----------|------------|----------|-----------|--------|-----|---------|
| | (MHz) | (dBuV/m) | (dB) | (dBuV/m) | (dB) | | | (cm) | | |
| 1 | 4874.782 | 36.14 | 3.19 | 74.0 | -37.86 | Peak | 114.00 | 100 | V | Pass |

Page 20 of 104 Report No.: FCC1901184-01

Date: 2019-02-22



CH06 for 11g at 6Mbps: Horizontal

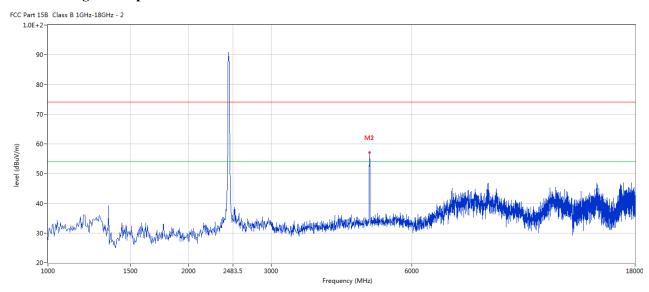


| No. | Frequency | Results | Factor | Limit | Over Limit | Detector | Table (o) | Height | ANT | Verdict |
|-----|-----------|----------|--------|----------|------------|----------|-----------|--------|-----|---------|
| | (MHz) | (dBuV/m) | (dB) | (dBuV/m) | (dB) | | | (cm) | | |
| 1 | 4874.031 | 57.07 | 3.19 | 74.0 | -16.93 | Peak | 194.00 | 100 | Н | Pass |
| 2 | 4874.031 | 45.33 | 3.19 | 54.0 | -8.67 | AV | 194.00 | 100 | Н | Pass |

Page 21 of 104 Report No.: FCC1901184-01

Date: 2019-02-22



CH11 for 11g at 6Mbps: Vertical

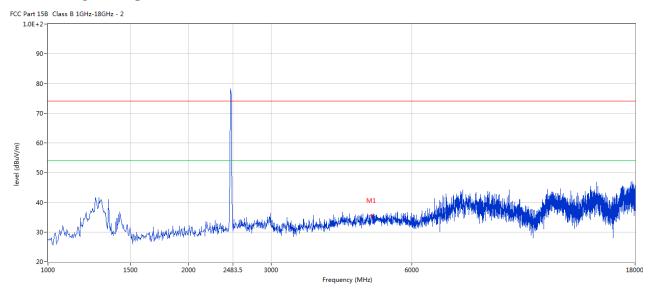


| No. | Frequency | Results | Factor | Limit | Over Limit | Detector | Table (o) | Height | ANT | Verdict |
|-----|-----------|----------|--------|----------|------------|----------|-----------|--------|-----|---------|
| | (MHz) | (dBuV/m) | (dB) | (dBuV/m) | (dB) | | | (cm) | | |
| 1 | 4924.521 | 35.68 | 3.26 | 74.0 | -38.32 | Peak | 278.00 | 100 | V | Pass |

Report No.: FCC1901184-01 Page 22 of 104

Date: 2019-02-22



CH11 for 11g at 6Mbps: Horizontal

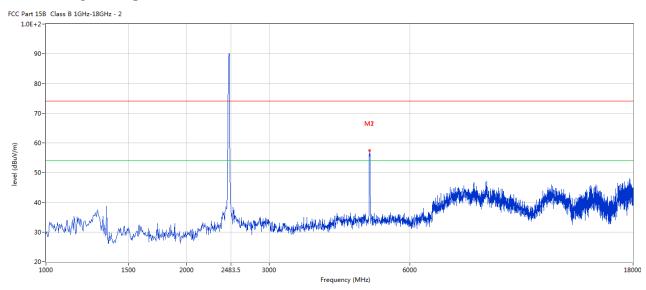

| No. | Frequency | Results | Factor | Limit | Over Limit | Detector | Table (o) | Height | ANT | Verdict |
|-----|-----------|----------|--------|----------|------------|----------|-----------|--------|-----|---------|
| | (MHz) | (dBuV/m) | (dB) | (dBuV/m) | (dB) | | | (cm) | | |
| 1 | 4917.521 | 57.56 | 3.26 | 74.0 | -16.44 | Peak | 189.00 | 100 | Н | Pass |
| 2 | 4924.521 | 46.38 | 3.26 | 54.0 | -7.62 | AV | 189.00 | 100 | Н | Pass |

Note: 1. Result Level = Reading + Factor

2. Factor= AF + Cable Loss- Preamp

3. Margin = Result– Limit

4. For radiated Emissions from 18-25GHz, it is only the floor noise.

Page 23 of 104


Report No.: FCC1901184-01

Date: 2019-02-22



7.0 6dB Bandwidth Measurement

7.1 Test Setup



7.2 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is >500 kHz

7.3 Test Procedure

- 1. Set resolution bandwidth (RBW) = 100 kHz
- 2. Set the video bandwidth (VBW) \geq 3 x RBW.
- 3. Detector = Peak.
- 4. Trace mode = \max hold.
- 5. Sweep = auto couple.
- 6. Allow the trace to stabilize.
- 7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

7.4 Test Result

Page 24 of 104 Report No.: FCC1901184-01

Date: 2019-02-22



6dB Occupied Bandwidth


| EUT | | 21.5' Adve | ertising Dis | player | Model | | UL | Γ215 |
|----------|----------------------------|------------|---------------------------|-------------------------|-----------|------------------------|-----|------------|
| Mode | | 8 | 302.11b | | Input Vol | tage | 12 | 0V~ |
| Temperat | ure | 24 | deg. C, | | Humidity | | 56% | % RH |
| Channel | Channel Frequency (MHz) | | Data Transfer Rate (Mbps) | 6 dB Bandwidth (MHz) | | Minimum Limit (MHz) | | Pass/ Fail |
| 1 | 2412 | | 1 | 10.04 | | 0.5 | | Pass |
| 6 | | 2437 | 1 | 10.04 | | | 0.5 | Pass |
| 11 | | 2462 | 1 | 10 | .04 | | 0.5 | Pass |
| 1 | | 2412 | 11 | 9. | 32 | 32 0.5 | | Pass |
| 6 | 2437 | | 11 | 9. | 32 | | 0.5 | Pass |
| 11 | 2462 | | 11 | 9. | 32 | | 0.5 | Pass |

Report No.: FCC1901184-01 Page 25 of 104

Date: 2019-02-22



1. 802.11b at 1Mbps of CH01

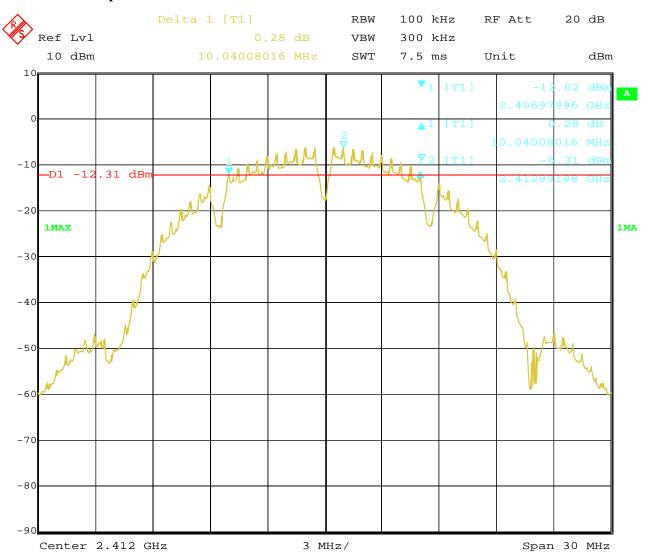


Report No.: FCC1901184-01 Page 26 of 104

Date: 2019-02-22



2. 802.11b at 1Mbps of CH06

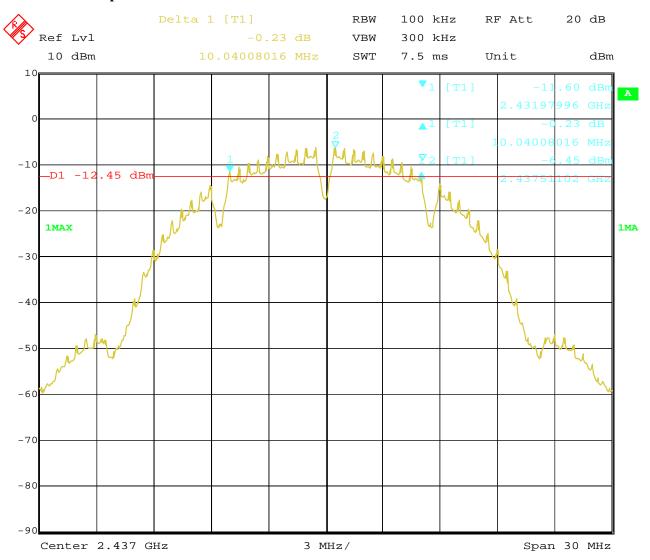


Report No.: FCC1901184-01 Page 27 of 104

Date: 2019-02-22



3. 802.11b at 1Mbps of CH11

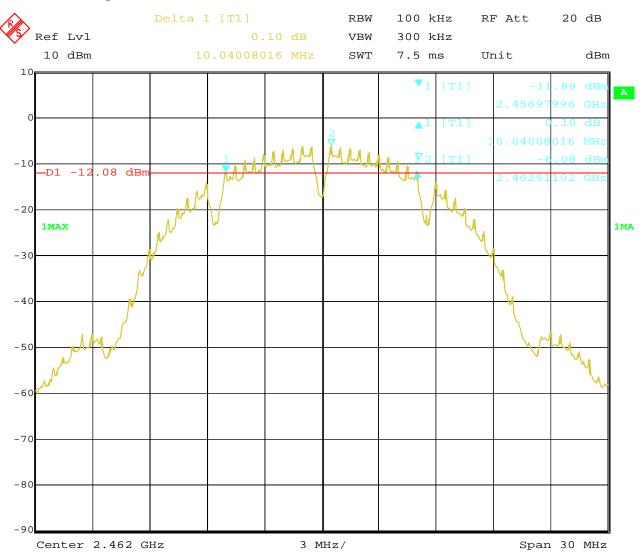


Report No.: FCC1901184-01 Page 28 of 104

Date: 2019-02-22



4. 802.11b at 11Mbps of CH01

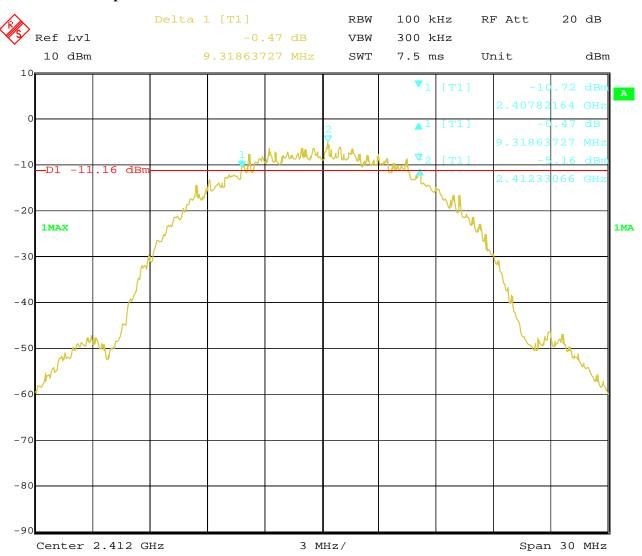


Report No.: FCC1901184-01 Page 29 of 104

Date: 2019-02-22



5. 802.11b at 11Mbps of CH06

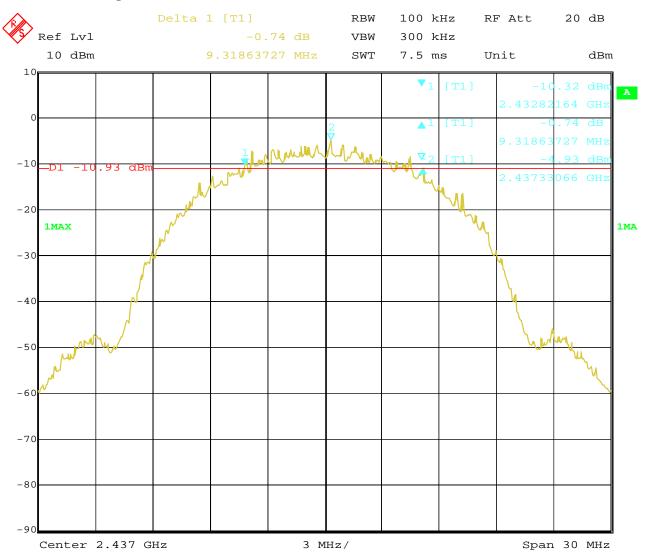


Report No.: FCC1901184-01 Page 30 of 104

Date: 2019-02-22



6. 802.11b at 11Mbps of CH11

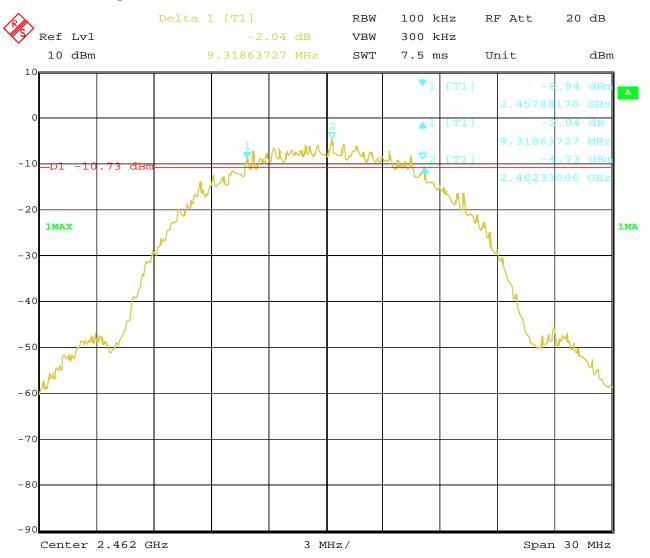

Page 31 of 104 Report No.: FCC1901184-01

Date: 2019-02-22



6dB Occupied Bandwidth

| EUT | | 21.5' Adve | ertising Dis | player | Model | | J | JLT215 |
|-------------|---------|-----------------------|---------------------------|--------|------------------|------|-------------------|------------|
| Mode | | 8 | 302.11g | | Input Vol | tage | | 120V~ |
| Temperature | | 24 | 4 deg. C, | | Humidity | | 5 | 6% RH |
| Channel | | el Frequency (MHz) | Data Transfer Rate (Mbps) | | andwidth [Hz] | | num Limit MHz) | Pass/ Fail |
| 1 | | 2412 | 6 | 16 | 5.41 | | 0.5 | Pass |
| 6 | | 2437 | 6 | 16 | 5.41 | | 0.5 | Pass |
| 11 | 11 2462 | | 6 | 16.41 | | 0.5 | | Pass |


Report No.: FCC1901184-01 Page 32 of 104

Date: 2019-02-22



Test Plots:

1. 802.11g at 6Mbps of CH01

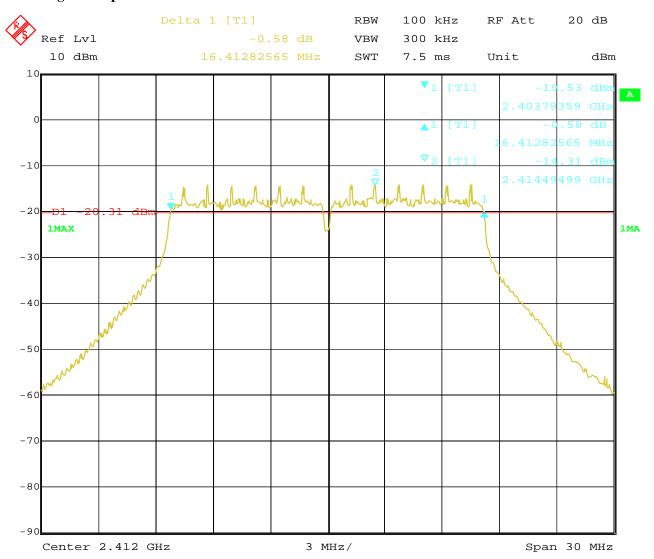


Report No.: FCC1901184-01 Page 33 of 104

Date: 2019-02-22



2. 802.11g at 6Mbps of CH06

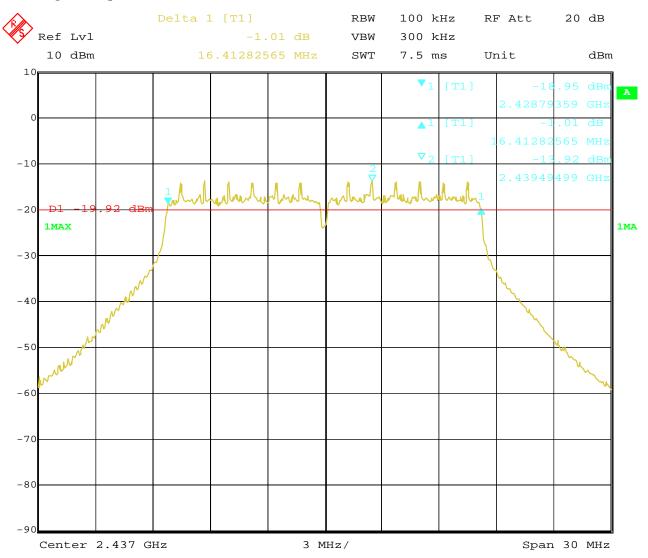


Report No.: FCC1901184-01 Page 34 of 104

Date: 2019-02-22



3. 802.11g at 6Mbps of CH11

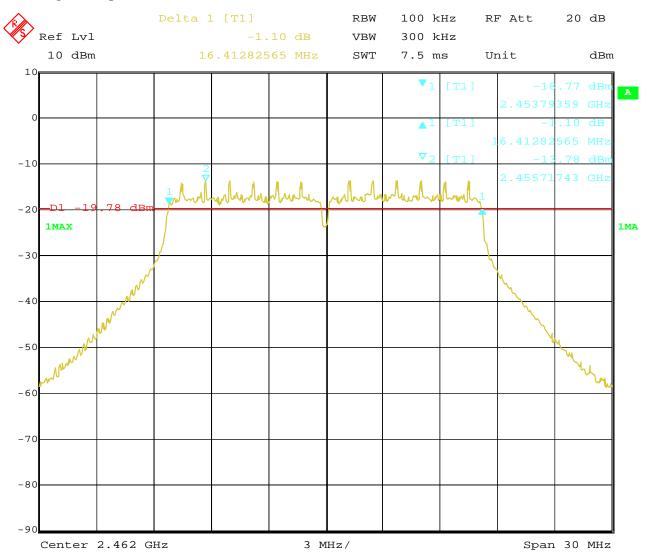

Page 35 of 104 Report No.: FCC1901184-01

Date: 2019-02-22



6dB Occupied Bandwidth

| EUT | | 21.5' Adve | ertising Dis | player | Model | | UL | Т215 |
|----------|-----|-----------------------|---------------------------|----------|----------------|------|-------------------|------------|
| Mode | | 802 | .11n HT20 | | Input Vol | tage | 12 | 0V~ |
| Temperat | ure | 24 | | Humidity | | 56% | % RH | |
| Channel | | el Frequency (MHz) | Data Transfer Rate (Mbps) | | ndwidth Hz) | | mum Limit MHz) | Pass/ Fail |
| 1 | | 2412 | mcs0 | 17 | .56 | | 0.5 | Pass |
| 6 | | 2437 | mcs0 | 17 | .56 | | 0.5 | Pass |
| 11 | | 2462 | mcs0 | 17 | .56 | 0.5 | | Pass |


Report No.: FCC1901184-01 Page 36 of 104

Date: 2019-02-22



Test Plots:


1. 802.11n at HT20 of CH01

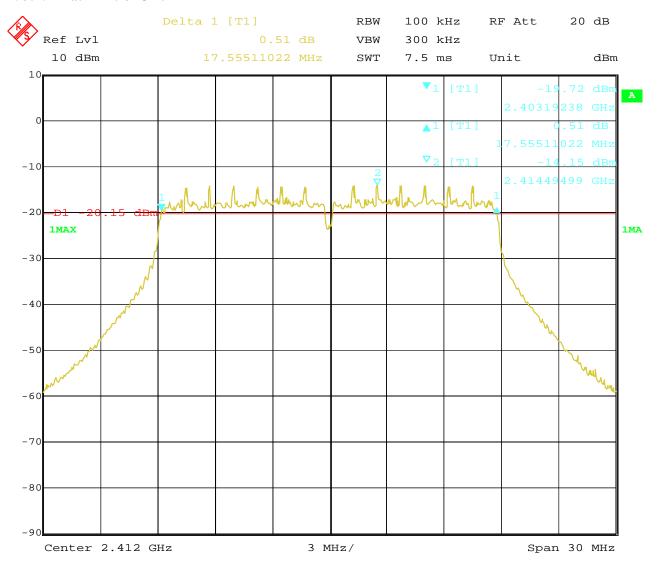

Report No.: FCC1901184-01 Page 37 of 104

Date: 2019-02-22




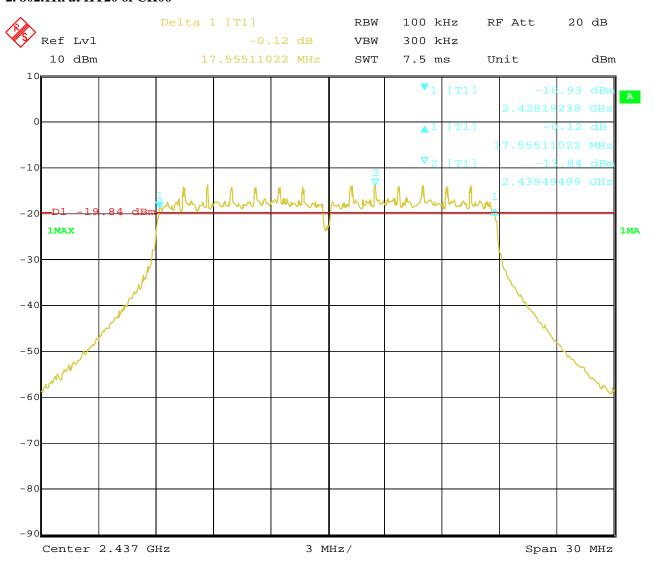

Report No.: FCC1901184-01 Page 38 of 104

Date: 2019-02-22



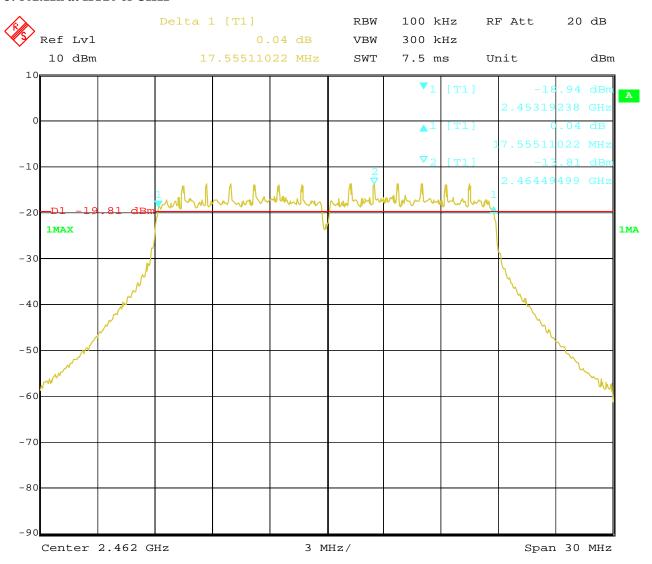

Page 39 of 104 Report No.: FCC1901184-01

Date: 2019-02-22



6dB Occupied Bandwidth

| EUT | • | 21.5' Adve | ertising Dis | player | Model | | ULT215 | |
|----------|-----|-----------------------|---------------------------|--------|----------------|------|-------------------|------------|
| Mode | | 802 | .11n HT40 | | Input Vol | tage | 12 | 0V~ |
| Temperat | ure | 24 | 4 deg. C, | | Humidity | | 56% | 6 RH |
| Channel | | el Frequency (MHz) | Data Transfer Rate (Mbps) | | ndwidth Hz) | | num Limit MHz) | Pass/ Fail |
| 3 | | 2422 | mcs0 | 35 | .39 | | 0.5 | Pass |
| 6 | | 2437 | mcs0 | 35 | .39 | | 0.5 | Pass |
| 9 | | 2452 | mcs0 | 35 | .39 | | 0.5 | Pass |


Page 40 of 104

Report No.: FCC1901184-01

Date: 2019-02-22




Test Plots:

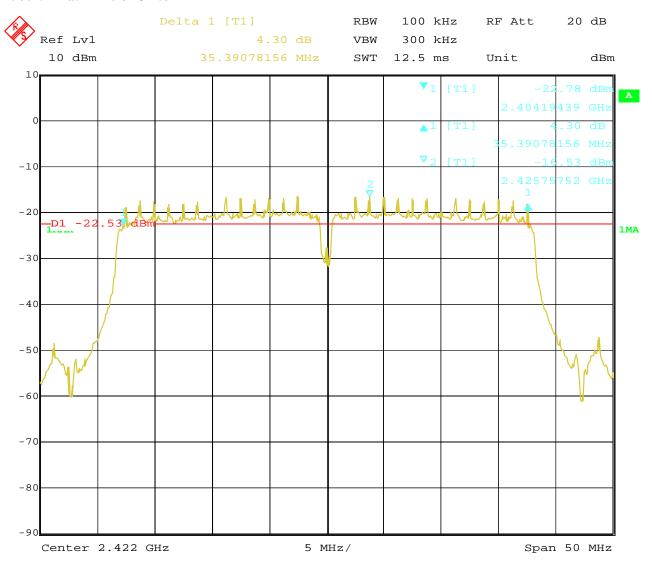

Report No.: FCC1901184-01 Page 41 of 104

Date: 2019-02-22




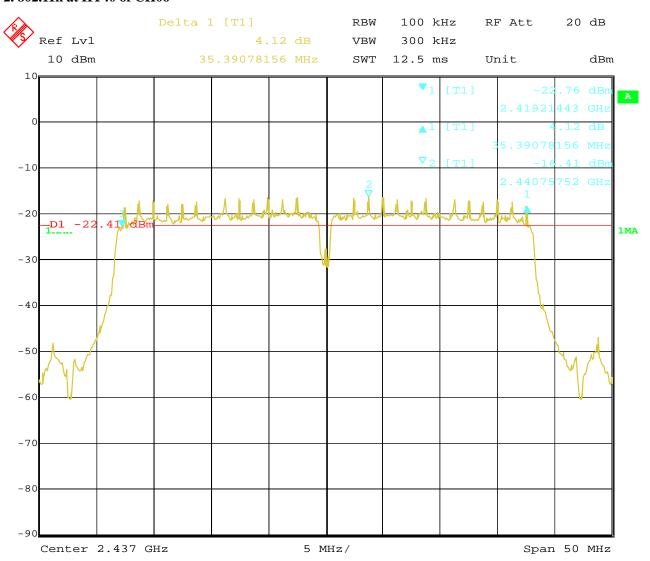

Report No.: FCC1901184-01 Page 42 of 104

Date: 2019-02-22



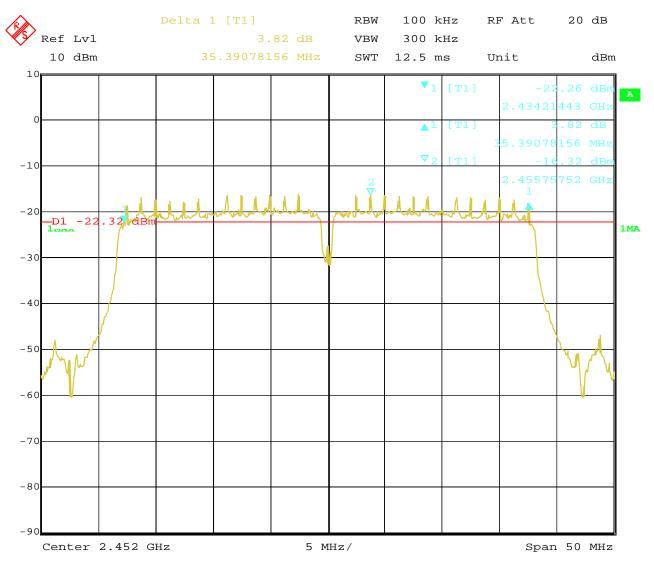

Report No.: FCC1901184-01


Date: 2019-02-22



Page 43 of 104

8. Maximum Output Power

8.1 Test Setup



8.2 Limits of Maximum Output Power

The Maximum Output Power Measurement is 30dBm.

8.3 Test Procedure

The RF power output was measured with a Power meter connected to the RF Antenna connector (conducted measurement) while EUT was operating in transmit mode at the appropriate centre frequency.

Note: the Peak power was measured

Report No.: FCC1901184-01 Page 44 of 104

Date: 2019-02-22



8.4Test Results

| EUT | EUT 21.5' Advertising Displayer Model | | odel | ULT215 | | | | |
|----------|---------------------------------------|--------|------------------|--------|-------------------|--|------------|--|
| Mode | Mode 802.11b Input Vo | | Voltage | | 120V~ | | | |
| Temperat | ure | 24 deg | g. C, | Hur | midity | | 56% RH | |
| Channel | Channel Frequency (MHz) | | Max. Power (dBm) | Output | Power Limit (dBm) | | Pass/ Fail | |
| | | , | Peak | | | | | |
| 1 | | 2412 | 9.13 | | 30 | | Pass | |
| 6 | | 2437 | 9.46 | | 30 | | Pass | |
| 11 | | 2462 | 9.72 | | 30 | | Pass | |

Note: 1. At finial test to get the worst-case emission at 1Mbps for CH01, CH06 and CH11

2. The result basic equation calculation as follow:

Max. Power Output = Power Reading + Cable loss + Attenuator

3. The worse case was recorded

| EUT | T 21.5' Advertising Displayer Model | | odel | ULT215 | | | |
|----------|-------------------------------------|-----------------------|------------------|--------|-----------|---|------------|
| Mode | Mode 802.11g Input | | Voltage | | 120V~ | | |
| Temperat | ure | 24 deg | g. C, | Hur | Humidity | | 56% RH |
| Channel | Cha | annel Frequency (MHz) | Max. Power (dBm) | Output | Power (dB | | Pass/ Fail |
| 1 | | 2412 | 6.29 | | |) | Pass |
| 6 | | 2437 | 6.47 | | 30 | | Pass |
| 11 | | 2462 | 6.39 | 30 | |) | Pass |

Note: 1. At finial test to get the worst-case emission at 6Mbps for CH01, CH06 and CH11

2. The result basic equation calculation as follow:

Max. Power Output = Power Reading + Cable loss + Attenuator

3. The worse case was recorded

Page 45 of 104

Report No.: FCC1901184-01

Date: 2019-02-22



| EUT | | 21.5' Advertisi | 21.5' Advertising Displayer Model | | | ULT215 | | |
|-----------|-------------------|-----------------|-----------------------------------|---------------|--------|--------|------------|--|
| Mode | | 802.11n (| (HT20) | Input Voltage | | | 120V~ | |
| Temperati | ure | 24 deg | g. C, | Hur | nidity | | 56% RH | |
| Channel | Channel Frequency | | Max. Power (dBm) | Power | | | Pass/ Fail | |
| | | (MHz) | Peak | | (dBm) | | | |
| 1 | | 2412 | 5.55 | | 30 | | Pass | |
| 6 | | 2437 | 5.84 | | 30 | | Pass | |
| 11 | | 2462 | 6.03 | | 30 | | Pass | |

Note: 1. At finial test to get the worst-case emission at mcs0 of 11n HT20 for CH01, CH06 and CH11

The result basic equation calculation as follow:
 Max. Power Output = Power Reading + Cable loss + Attenuator

3. The worse case was recorded

| EUT | | 21.5' Advertising Displayer Model | | ULT215 | | | | |
|----------|-------------------------|-----------------------------------|------------------|---------|-----------|-------|------------|--|
| Mode | | 802.11n (HT40) Input Voltage | | Voltage | | 120V~ | | |
| Temperat | ure | 24 deg | g. C, | Hur | Iumidity | | 56% RH | |
| Channel | Channel Frequency (MHz) | | Max. Power (dBm) | Output | Power (dB | | Pass/ Fail | |
| | | (WITIZ) | Peak | | (ubii | | | |
| 1 | | 2422 | 5.69 | | 30 |) | Pass | |
| 4 | | 2437 | 5.83 | | 30 |) | Pass | |
| 7 | | 2452 | 5.93 | 5.93 | |) | Pass | |

Note: 1. At finial test to get the worst-case emission at msc0 of 11n HT40 for CH01, CH04 and CH07

- 2. The result basic equation calculation as follow:Max. Power Output = Power Reading + Cable loss + Attenuator
- 3. The worse case was recorded


Report No.: FCC1901184-01 Page 46 of 104

Date: 2019-02-22



9. Power Spectral Density Measurement

9.1 Test Setup



9.2 Limits of Power Spectral Density Measurement

The Maximum Power Spectral Density Measurement is 8dBm.

9.3 Test Procedure

- 1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
- 2. Set the RBW = 10 kHz.
- 3. Set the VBW \geq 30 kHz.
- 4. Set the span to 1.5 times the DTS channel bandwidth.
- 5. Detector = peak.
- 6. Sweep time = auto couple.
- 7. Trace mode = max hold.
- 8. Allow trace to fully stabilize.
- 9. Use the peak marker function to determine the maximum amplitude level.
- 10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.
- 11. The resulting peak PSD level must be ≤ 8 dBm.

Page 47 of 104 Report No.: FCC1901184-01

Date: 2019-02-22



9.4Test Result

| EUT | EUT 21.5' Advertising Displayer Model | | odel | | ULT215 | | |
|----------|---------------------------------------|-----------------------|----------------------------|----------|---------------------|---|------------|
| Mode | Mode 802.11b 11Mbps Input Volt | | Voltage | | 120V~ | | |
| Temperat | ure | 24 deg | g. C, | Humidity | | | 56% RH |
| Channel | Cha | annel Frequency (MHz) | Final RF Power Level (dBm) | | Maximum Limit (dBm) | | Pass/ Fail |
| | | , | | | | , | |
| | | | 11Mbp: | S | | | |
| 1 | | 2412 | -15.88 | | 8 | | Pass |
| 6 | | 2437 | -15.47 | | 8 | | Pass |
| 11 | | 2462 | -15.77 | | 8 | | Pass |

| EUT | EUT 21.5' Advertising D | | ng Displayer | Model | | ULT215 | |
|----------|-------------------------|-----------------|------------------|---------------|---------------|-----------|------------|
| Mode | | 802.11b | 1Mbps | Input Voltage | | age 120V~ | |
| Temperat | ure | 24 deg | g. C, | Humidity | | | 56% RH |
| Channel | Cha | annel Frequency | Final RF Power N | | Maximum Limit | | Pass/ Fail |
| Chamici | | (MHz) | Level in (dl | 3m) | (dBm) | | |
| | | | | | | | |
| | | | 1Mbps | } | | | |
| 1 | | 2412 | -17.00 | | 8 | | Pass |
| 6 | | 2437 | -16.29 | | 8 | | Pass |
| 11 | | 2462 | -16.59 | | 8 | | Pass |

Page 48 of 104

Report No.: FCC1901184-01

Date: 2019-02-22



| EUT | EUT 21.5' Advertising Displa | | ng Displayer | Model | | ULT215 | | |
|----------|------------------------------|---------------------------------------|-------------------------------|---------------|---------------------|--------|------------|--|
| Mode | | 802.11g | 6Mbps | Input Voltage | | | 120V~ | |
| Temperat | ure | 24 deg | g. C, | Humidity | | | 56% RH | |
| Channel | Cha | annel Frequency (MHz) | Final RF Power Level in (dBm) | | Maximum Limit (dBm) | | Pass/ Fail | |
| | | , , , , , , , , , , , , , , , , , , , | 6Mbps | | | | | |
| 1 | | 2412 | -23.35 | | 8 | | Pass | |
| 6 | | 2437 | -23.47 | | 8 | | Pass | |
| 11 | | 2462 | -22.64 | | 8 | | Pass | |

| EUT | EUT 21.5' Advertisir | | ng Displayer Model | | odel | ULT215 | |
|----------|----------------------|---------------------------------|--------------------|---------|---------------|--------|------------|
| Mode | | 802.11n HT20 mcs0 Input Voltage | | Voltage | 120V~ | | |
| Temperat | ure | 24 deg | g. C, | Hur | Humidity | | 56% RH |
| Channel | Cha | annel Frequency | Final RF Power | | Maximum Limit | | Pass/ Fail |
| Chamilei | | (MHz) | Level (dB | m) | (dBm) | | |
| | | | HT20 | | | | |
| 1 | | 2412 | -22.91 | | 8 | | Pass |
| 6 | | 2437 | -22.63 | | 8 | | Pass |
| 11 | | 2462 | -22.74 | 8 | | | Pass |

| EUT | | 21.5' Advertising Displayer Model | | odel | ULT215 | | | |
|----------|-----|-----------------------------------|-------------|-----------------|----------|---------|------------|--|
| Mode | | 802.11n H7 | 740 msc0 | Input Voltage | | | 120V~ | |
| Temperat | ure | 24 deg | g. C, | Hur | Humidity | | 56% RH | |
| Channel | Cha | annel Frequency | Final RF Po | al RF Power Max | | n Limit | Pass/ Fail | |
| CHAINICI | | (MHz) | Level (dB | m) | (dBm) | | | |
| | | | HT40 | | | | | |
| 1 | | 2422 | -25.68 | | 8 | | Pass | |
| 4 | | 2437 | -25.68 | | 8 | | Pass | |
| 7 | | 2452 | -25.60 | | 8 | | Pass | |


Report No.: FCC1901184-01 Page 49 of 104

Date: 2019-02-22



9.5 Photo of Power Spectral Density Measurement

1.802.11b at 11Mbps of CH01

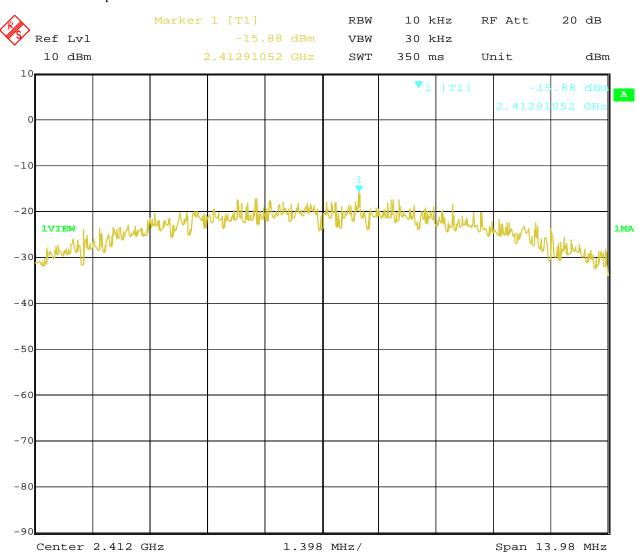


Page 50 of 104

Report No.: FCC1901184-01

Date: 2019-02-22



2. 802.11b at 11Mbps at CH06

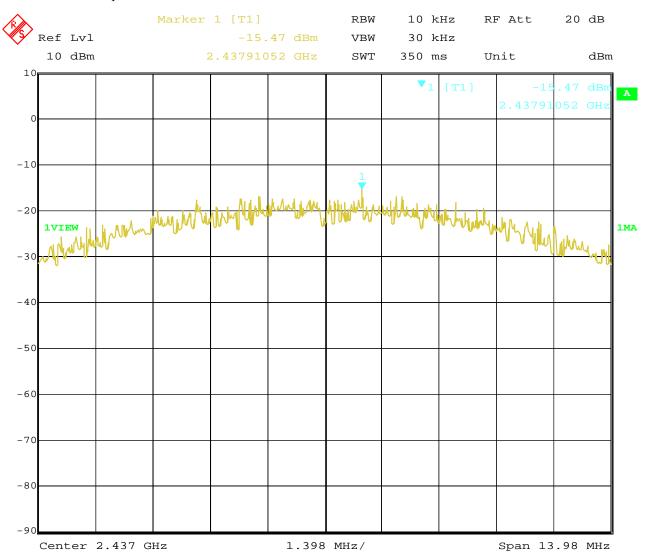


Page 51 of 104

Report No.: FCC1901184-01

Date: 2019-02-22



3. 802.11b at 11Mbps of CH11

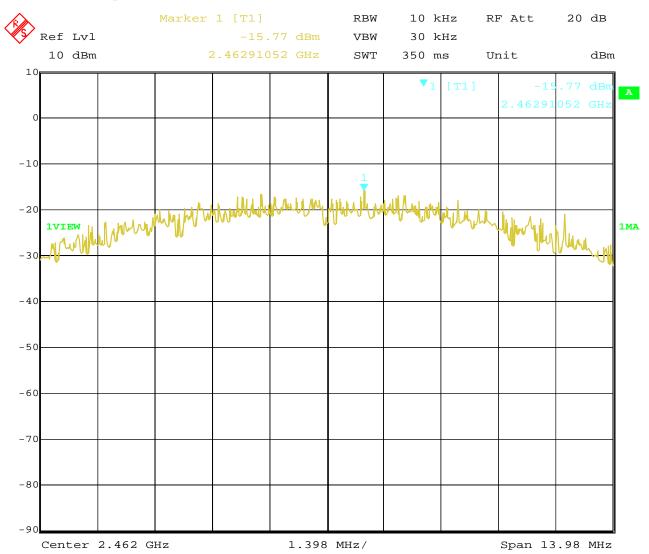


Page 52 of 104

Report No.: FCC1901184-01

Date: 2019-02-22



4. 802.11b at 1Mbps of CH1

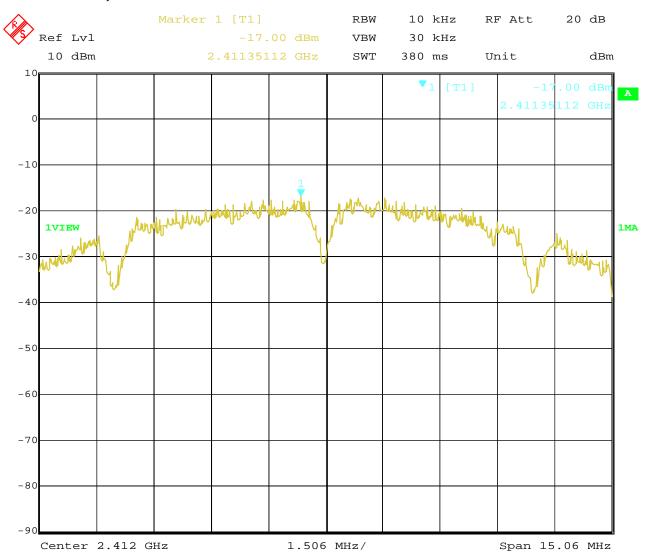


Page 53 of 104

Report No.: FCC1901184-01

Date: 2019-02-22



5. 802.11b at 1Mbps of CH6

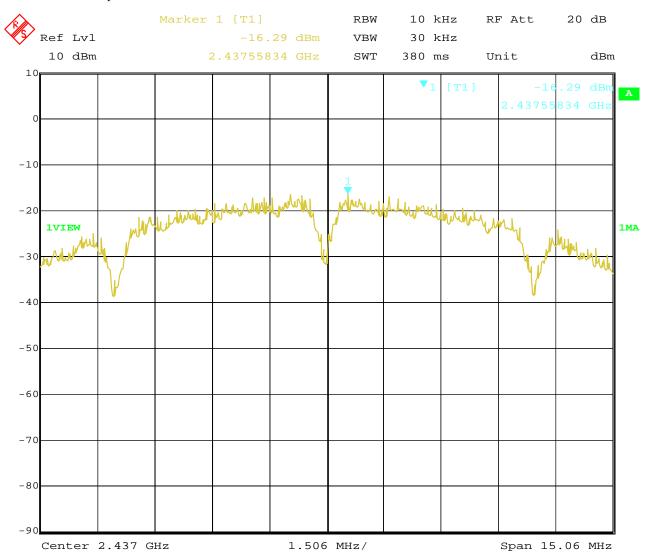


Page 54 of 104

Report No.: FCC1901184-01

Date: 2019-02-22



6. 802.11b at 1Mbps of CH11

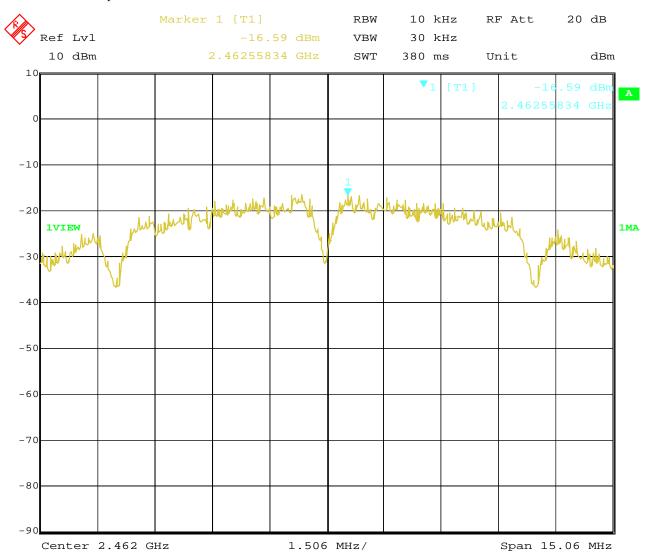


Page 55 of 104

Report No.: FCC1901184-01

Date: 2019-02-22



7. 802.11g at 6Mbps of CH1

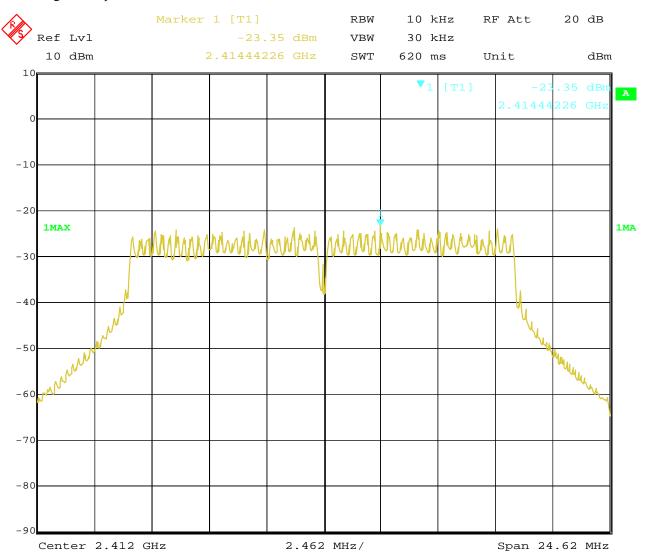


Page 56 of 104

Report No.: FCC1901184-01

Date: 2019-02-22



8. 802.11g at 6Mbps of CH6

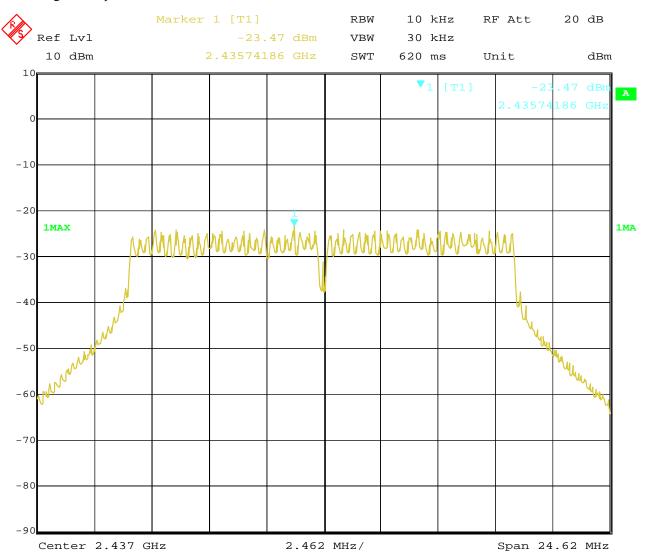


Page 57 of 104

Report No.: FCC1901184-01

Date: 2019-02-22



9. 802.11g at 6Mbps of CH11

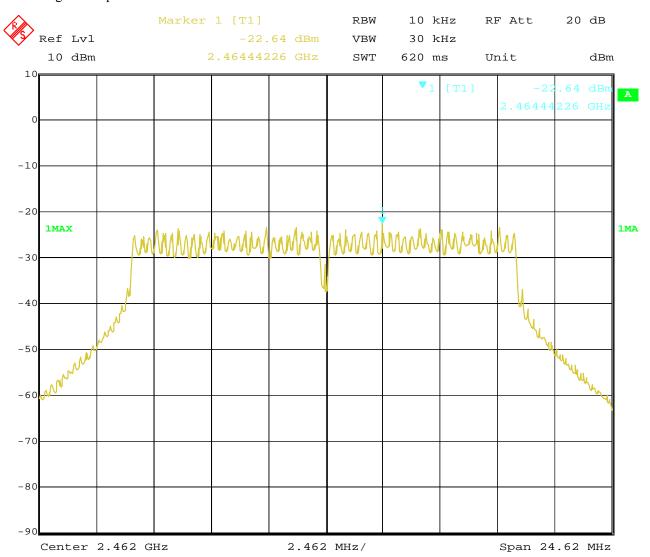


Page 58 of 104

Report No.: FCC1901184-01

Date: 2019-02-22



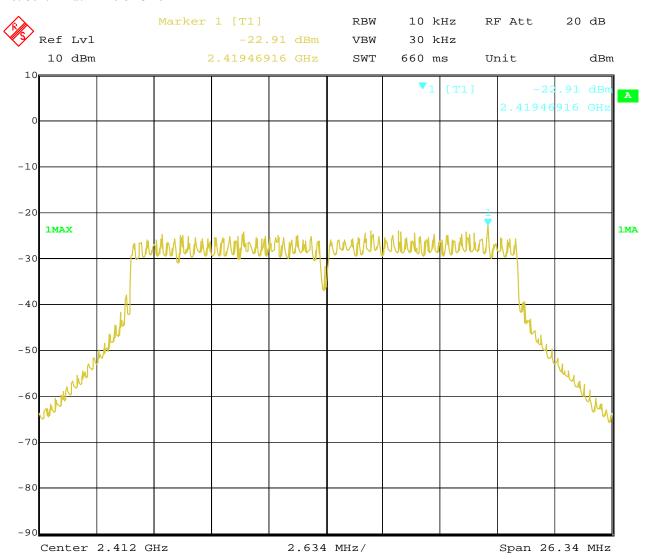


Page 59 of 104

Report No.: FCC1901184-01

Date: 2019-02-22



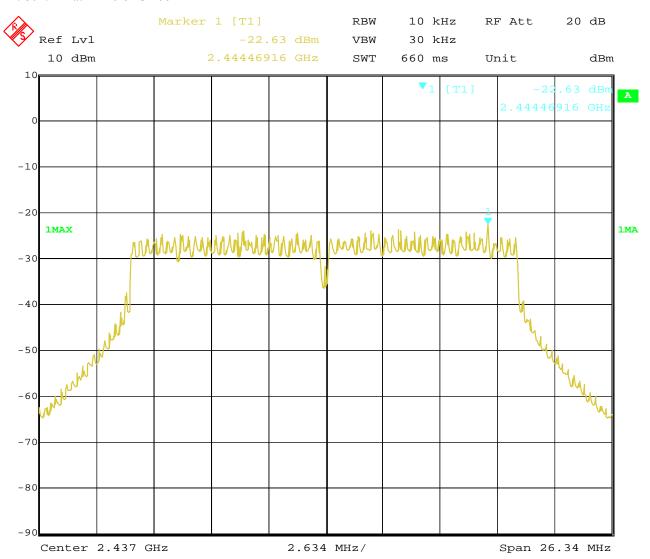


Page 60 of 104

Report No.: FCC1901184-01

Date: 2019-02-22



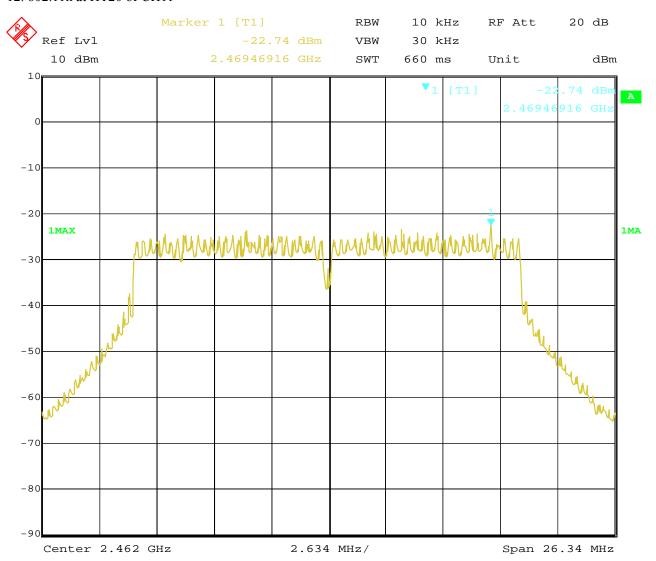


Page 61 of 104

Report No.: FCC1901184-01

Date: 2019-02-22



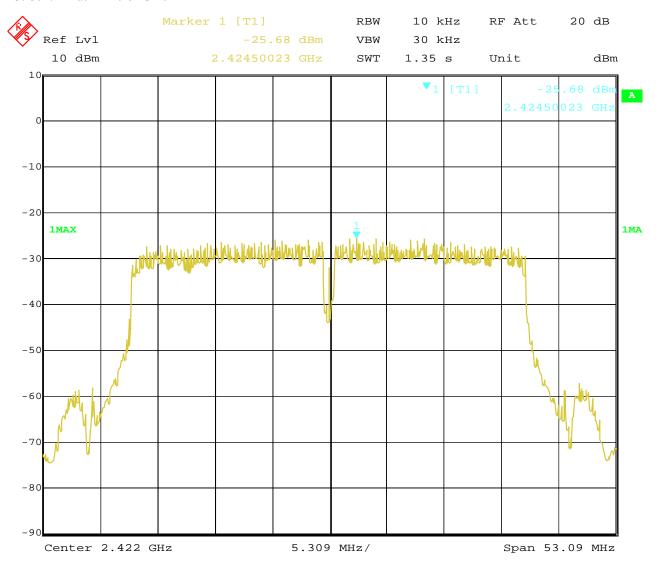


Page 62 of 104

Report No.: FCC1901184-01

Date: 2019-02-22



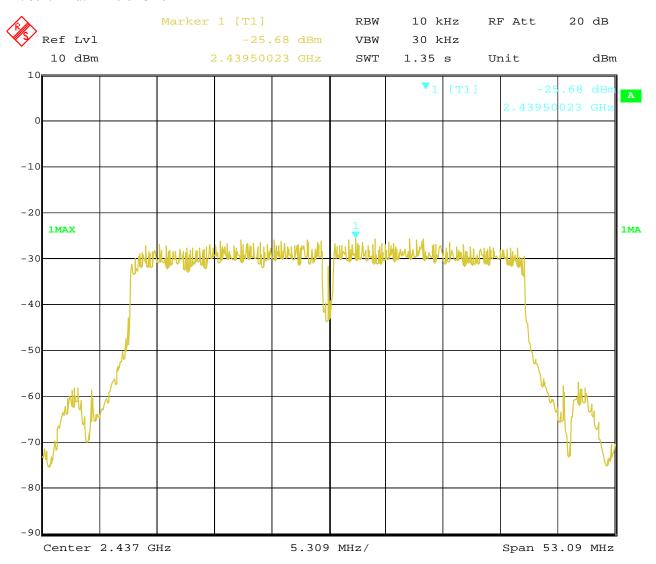


Page 63 of 104

Report No.: FCC1901184-01

Date: 2019-02-22



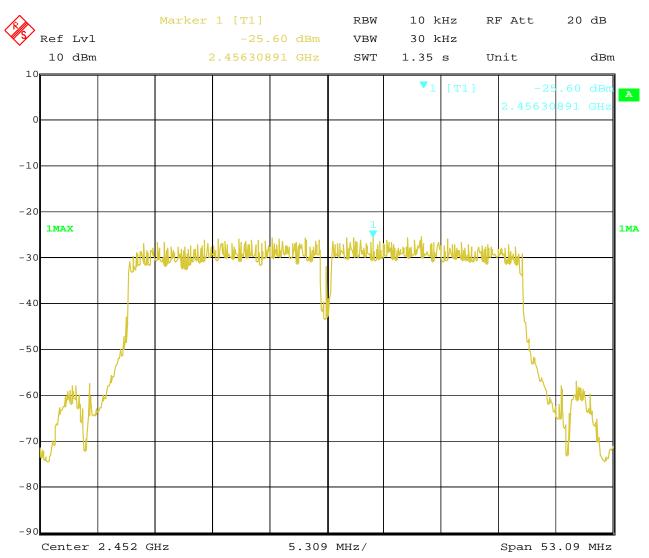

Report No.: FCC1901184-01


Date: 2019-02-22



Page 64 of 104

10 Out of Band Measurement

10.1 Test Setup for band edge



The restricted band requirement based on radiated emission test; please see the clause 6 for the test setup

10.2 Limits of Out of Band Emissions Measurement

- 1. Below –20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).
- 2. Fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209.

10.3 Test Procedure

For signals in the restricted bands above and below the 2.4-2.483GHz allocated band a measurement was made of radiated emission test.(Peak values with RBW=VBW=1MHz and PK detector. AV value with RBW=1MHz, VBW=3MHz and RMS detector)

For bandage test, the spectrum set as follows: RBW=100 kHz, VBW=300 kHz. A conducted measurement used

10.4 Test Result

Please see next pages

Note: For band-edge measurement, the frequency from 30MHz-25GHz was tested. And It met the FCC rule.

Page 65 of 104

Report No.: FCC1901184-01

Date: 2019-02-22




For 802.11b mode

CH01 at 1Mbps

10.4 Band-edge Measurement

| EUT | 21.5' Advertising Displayer | Model | ULT215 |
|--------------|-----------------------------|---------------|--------|
| Mode | Keeping Transmitting | Input Voltage | 120V~ |
| Temperature | 24 deg. C, | Humidity | 56% RH |
| Test Result: | Pass | Detector | PK |

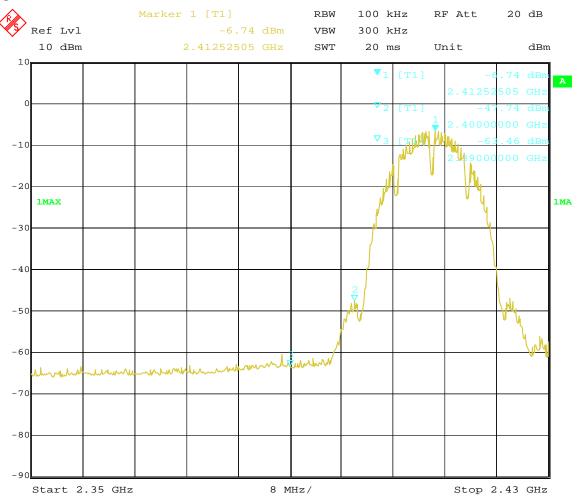

Page 66 of 104

Report No.: FCC1901184-01


Date: 2019-02-22



CH11 at 1Mbps

10.4 Band-edge Measurement

| EUT | 21.5' Advertising Displayer | Model | ULT215 |
|--------------|-----------------------------|---------------|--------|
| Mode | Keeping Transmitting | Input Voltage | 120V~ |
| Temperature | 24 deg. C, | Humidity | 56% RH |
| Test Result: | Pass | Detector | PK |

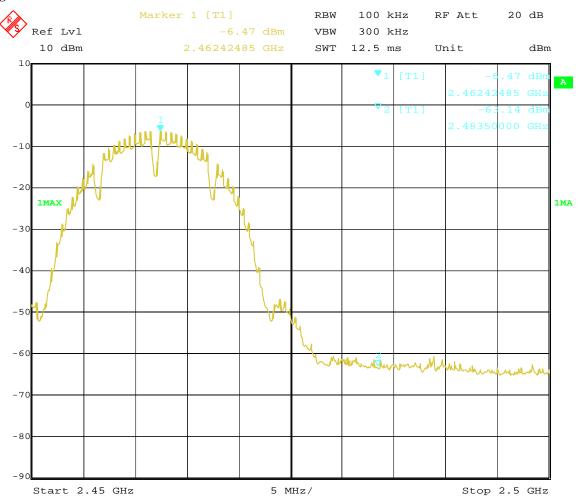

Page 67 of 104

Report No.: FCC1901184-01

Date: 2019-02-22




For 802.11b mode

CH01 at 11Mbps

Band-edge Measurement 10.4

| EUT | 21.5' Advertising Displayer | Model | ULT215 |
|--------------|-----------------------------|---------------|--------|
| Mode | Keeping Transmitting | Input Voltage | 120V~ |
| Temperature | 24 deg. C, | Humidity | 56% RH |
| Test Result: | Pass | Detector | PK |

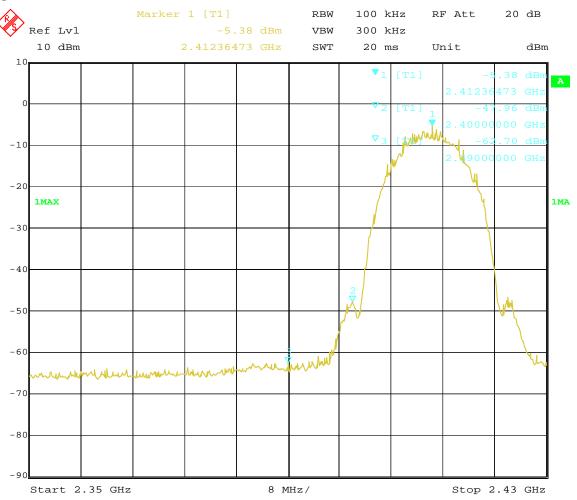

Page 68 of 104

Report No.: FCC1901184-01


Date: 2019-02-22



CH11 at 11Mbps

10.4 Band-edge Measurement

| EUT | 21.5' Advertising Displayer | Model | ULT215 |
|--------------|-----------------------------|---------------|--------|
| Mode | Keeping Transmitting | Input Voltage | 120V~ |
| Temperature | 24 deg. C, | Humidity | 56% RH |
| Test Result: | Pass | Detector | PK |

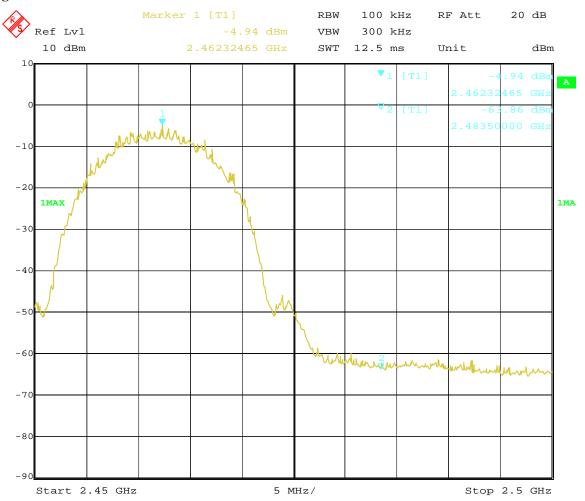

Page 69 of 104

Report No.: FCC1901184-01

Date: 2019-02-22




For 802.11g mode

CH01 at 6Mbps

Band-edge Measurement 10.4

| EUT | 21.5' Advertising Displayer | Model | ULT215 |
|--------------|-----------------------------|---------------|--------|
| Mode | Keeping Transmitting | Input Voltage | 120V~ |
| Temperature | 24 deg. C, | Humidity | 56% RH |
| Test Result: | Pass | Detector | PK |

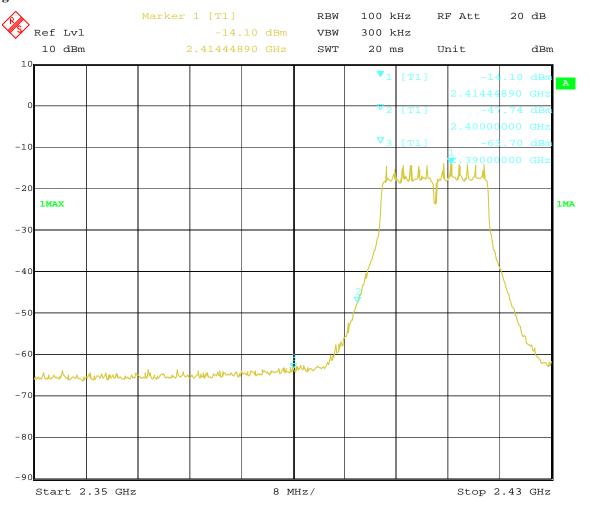

Page 70 of 104

Report No.: FCC1901184-01


Date: 2019-02-22



CH11 at 6Mbps

10.4 Band-edge Measurement

| EUT | 21.5' Advertising Displayer | Model | ULT215 |
|--------------|-----------------------------|---------------|--------|
| Mode | Keeping Transmitting | Input Voltage | 120V~ |
| Temperature | 24 deg. C, | Humidity | 56% RH |
| Test Result: | Pass | Detector | PK |

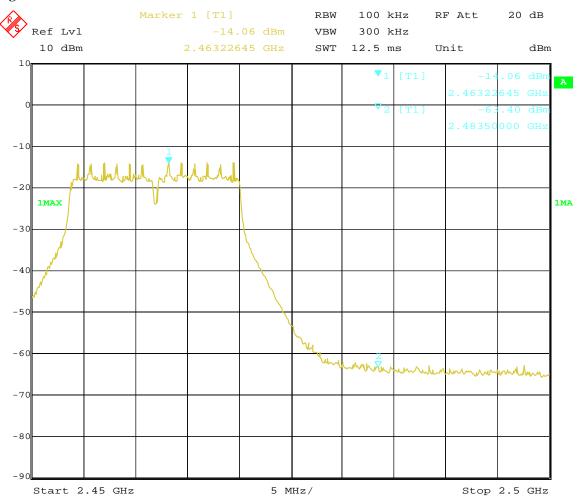

Report No.: FCC1901184-01 Page 71 of 104

Date: 2019-02-22




For 802.11n (HT20) mode

CH01 at mcs0

Band-edge Measurement 10.4

| EUT | 21.5' Advertising Displayer | Model | ULT215 |
|--------------|-----------------------------|---------------|--------|
| Mode | Keeping Transmitting | Input Voltage | 120V~ |
| Temperature | 24 deg. C, | Humidity | 56% RH |
| Test Result: | Pass | Detector | PK |

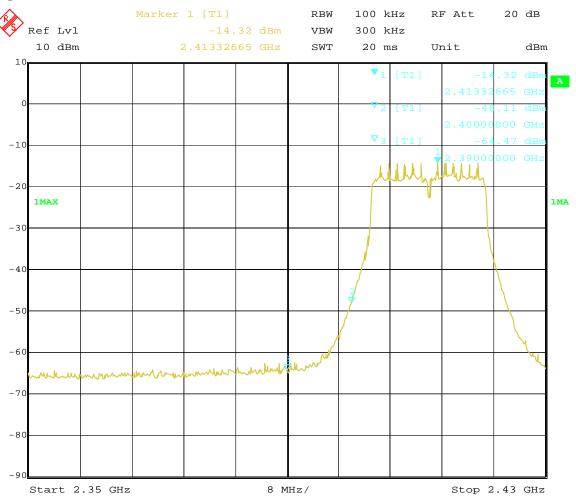

Report No.: FCC1901184-01 Page 72 of 104


Date: 2019-02-22



CH11 at mcs0

10.4 Band-edge Measurement

| EUT | 21.5' Advertising Displayer | Model | ULT215 |
|--------------|-----------------------------|---------------|--------|
| Mode | Keeping Transmitting | Input Voltage | 120V~ |
| Temperature | 24 deg. C, | Humidity | 56% RH |
| Test Result: | Pass | Detector | PK |

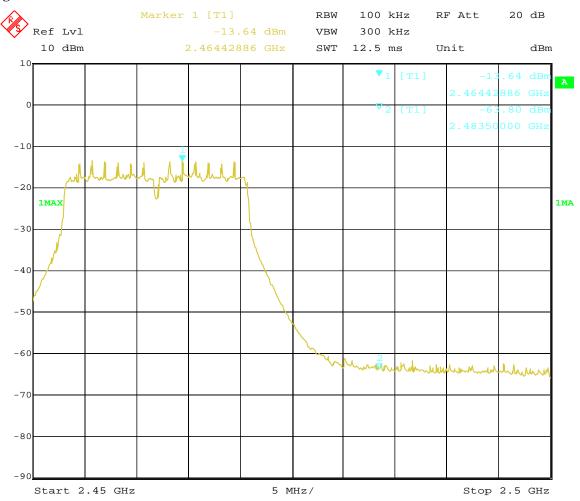

Page 73 of 104

Report No.: FCC1901184-01

Date: 2019-02-22




For 802.11n (HT40) mode

CH03 at msc0

10.4 Band-edge and Restricted band Measurement

| EUT | 21.5' Advertising Displayer | Model | ULT215 |
|--------------|-----------------------------|---------------|--------|
| Mode | Keeping Transmitting | Input Voltage | 120V~ |
| Temperature | 24 deg. C, | Humidity | 56% RH |
| Test Result: | Pass | Detector | PK |

Test Figure:

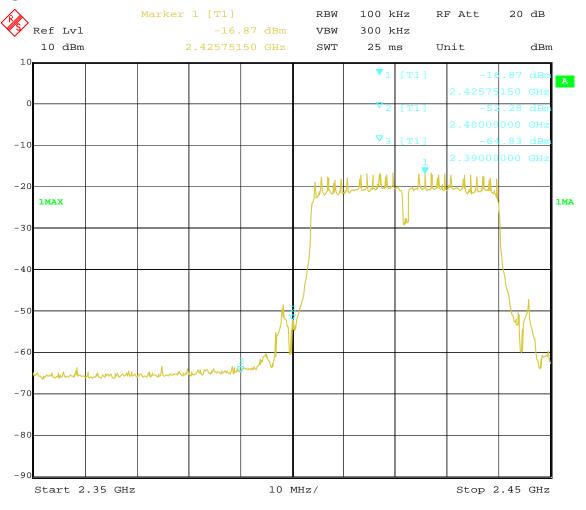

Note: The Max. FS in Restrict Band are measured in conventional method.

Page 74 of 104

Report No.: FCC1901184-01

Date: 2019-02-22




CH09 at msc0

10.4 Band-edge and Restricted band Measurement

| EUT | 21.5' Advertising Displayer | Model | ULT215 |
|--------------|-----------------------------|---------------|--------|
| Mode | Keeping Transmitting | Input Voltage | 120V~ |
| Temperature | 24 deg. C, | Humidity | 56% RH |
| Test Result: | Pass | Detector | PK |

Test Figure:

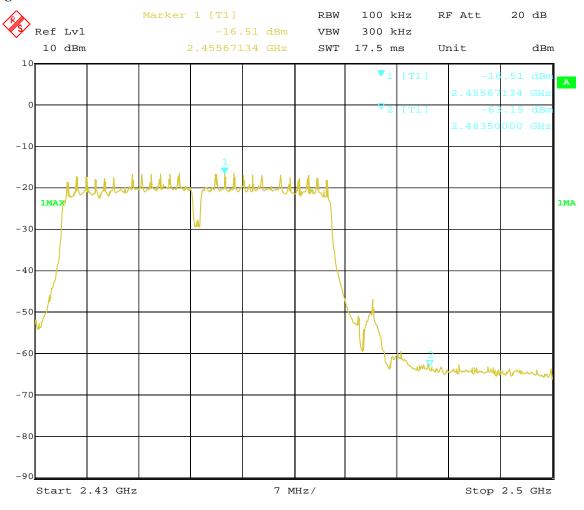

Note: The Max. FS in Restrict Band are measured in conventional method.

Page 75 of 104 Report No.: FCC1901184-01

Date: 2019-02-22



10.5 Restricted band Measurement

| EUT | 21.5' Adve | rtising Displayer | Model | ULT215 | | | |
|---------------------------------------|-------------------------------------|-------------------|---------------|-----------------|--|--|--|
| Mode | Keeping | g Transmitting | Input Voltage | 120V~ | | | |
| Temperature | 24 | deg. C, | Humidity | 56% RH | | | |
| Test Result: | | Pass | Detector | PK | | | |
| 802.11b mode, Low Channel, Horizontal | | | | | | | |
| 2390 | PK (dBμV/m) | 41.69 | T ::4 | $74(dB\mu V/m)$ | | | |
| | AV (dBμV/m) | | Limit | 54(dBµV/m) | | | |
| | 802.11b mode, Low Channel, Vertical | | | | | | |
| 2390 | PK (dBμV/m) | 37.02 | Limit | 74(dBµV/m) | | | |
| | AV (dBμV/m) | | Limit | 54(dBµV/m) | | | |

| Restricted data incastrement | | | | | | | | |
|--|--------------------------------------|-------------------|---------------|-----------------|--|--|--|--|
| EUT | 21.5' Adve | rtising Displayer | Model | ULT215 | | | | |
| Mode | Keeping | g Transmitting | Input Voltage | 120V~ | | | | |
| Temperature | 24 | deg. C, | Humidity | 56% RH | | | | |
| Test Result: | | Pass | Detector | PK | | | | |
| 802.11b mode, High Channel, Horizontal | | | | | | | | |
| 2483.5 | PK (dBµV/m) | 43.05 | T ::4 | $74(dB\mu V/m)$ | | | | |
| | AV ($dB\mu V/m$) | | Limit | $54(dB\mu V/m)$ | | | | |
| | 802.11b mode, High Channel, Vertical | | | | | | | |
| 2483.5 | PK (dBµV/m) | 36.55 | Timit | 74(dBμV/m) | | | | |
| | AV (dBμV/m) | | Limit | $54(dB\mu V/m)$ | | | | |

Page 76 of 104

Report No.: FCC1901184-01


Date: 2019-02-22



10.5 Restricted band Measurement

| EUT | 21.5' Adve | rtising Displayer | Model | ULT215 | | | |
|---------------------------------------|-------------|---------------------|------------------|-----------------|--|--|--|
| Mode | Keeping | g Transmitting | Input Voltage | 120V~ | | | |
| Temperature | 24 | deg. C, | Humidity | 56% RH | | | |
| Test Result: | | Pass | Detector | PK | | | |
| 802.11g mode, Low Channel, Horizontal | | | | | | | |
| 2390 | PK (dBµV/m) | 44.14 | T ::4 | $74(dB\mu V/m)$ | | | |
| | AV (dBμV/m) | | Limit | 54(dBµV/m) | | | |
| | | 802.11g mode, Low C | hannel, Vertical | | | | |
| 2390 | PK (dBµV/m) | 37.43 | Limit | $74(dB\mu V/m)$ | | | |
| | AV (dBμV/m) | | Limit | $54(dB\mu V/m)$ | | | |

Test Plots

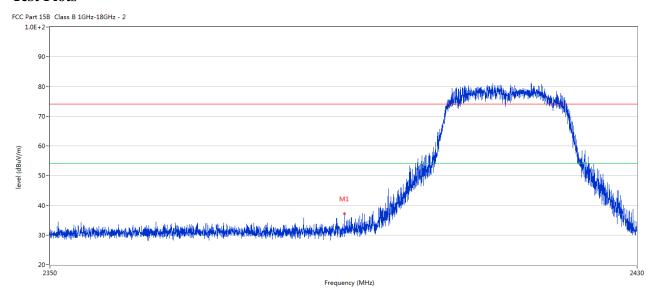


| No. | Frequency | Results | Factor | Limit | Over Limit | Detector | Table (o) | Height | ANT | Verdict |
|-----|-----------|----------|--------|----------|------------|----------|-----------|--------|-----|---------|
| | (MHz) | (dBuV/m) | (dB) | (dBuV/m) | (dB) | | | (cm) | | |
| 1 | 2390.000 | 37.13 | -3.53 | 74.0 | -36.87 | Peak | 283.00 | 100 | V | Pass |

Page 77 of 104 Report No.: FCC1901184-01

Date: 2019-02-22



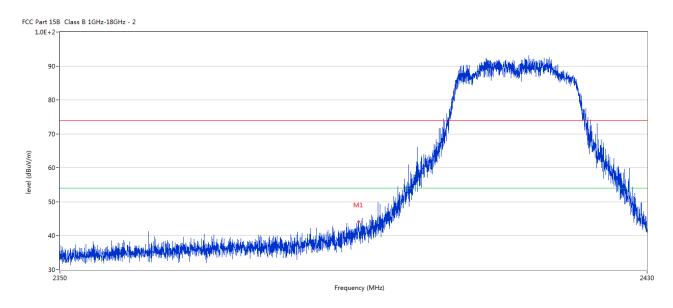

| No. | Frequency | Results | Factor | Limit | Over | Detector | Table (o) | Height | ANT | Verdict |
|-----|-----------|----------|--------|----------|------------|----------|-----------|--------|-----|---------|
| | (MHz) | (dBuV/m) | (dB) | (dBuV/m) | Limit (dB) | | | (cm) | | |
| 1 | 2390.000 | 44.14 | -3.53 | 74.0 | -29.86 | Peak | 184.00 | 100 | Н | Pass |


Page 78 of 104

Report No.: FCC1901184-01

Date: 2019-02-22



| EUT | 21.5' Adve | rtising Displayer | Model | ULT215 | | | | |
|--|--------------------------------------|-------------------|---------------|-----------------|--|--|--|--|
| Mode | Keeping | g Transmitting | Input Voltage | 120V~ | | | | |
| Temperature | 24 | deg. C, | Humidity | 56% RH | | | | |
| Test Result: | | Pass | Detector | PK | | | | |
| 802.11g mode, High Channel, Horizontal | | | | | | | | |
| 2483.5 | PK (dBµV/m) | 44.64 | T ::4 | $74(dB\mu V/m)$ | | | | |
| | AV (dBμV/m) | | Limit | $54(dB\mu V/m)$ | | | | |
| | 802.11g mode, High Channel, Vertical | | | | | | | |
| 2483.5 | PK (dBμV/m) | 36.49 | T ::4 | 74(dBμV/m) | | | | |
| | AV (dBμV/m) | | Limit | 54(dBµV/m) | | | | |

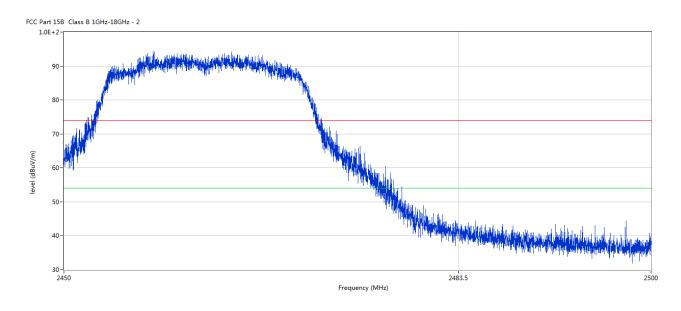


| No. | Frequency | Results | Factor | Limit | Over Limit | Detector | Table (o) | Height | ANT | Verdict |
|-----|-----------|----------|--------|----------|------------|----------|-----------|--------|-----|---------|
| | (MHz) | (dBuV/m) | (dB) | (dBuV/m) | (dB) | | | (cm) | | |
| 1 | 2483.500 | 44.64 | -3.57 | 74.0 | -29.36 | Peak | 220.00 | 100 | Н | Pass |

Report No.: FCC1901184-01 Page 79 of 104

Date: 2019-02-22



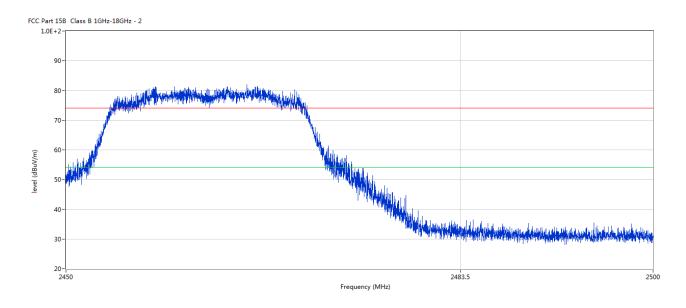

| No. | Frequency | Results | Factor | Limit | Over Limit | Detector | Table (o) | Height | ANT | Verdict |
|-----|-----------|----------|--------|----------|------------|----------|-----------|--------|-----|---------|
| | (MHz) | (dBuV/m) | (dB) | (dBuV/m) | (dB) | | | (cm) | | |
| 1 | 2483.500 | 36.49 | -3.57 | 74.0 | -37.51 | Peak | 322.00 | 100 | V | Pass |

Page 80 of 104 Report No.: FCC1901184-01

Date: 2019-02-22



10.5 Restricted band Measurement

| EUT | 21.5' Adve | rtising Displayer | Model | ULT215 | | | |
|--|-------------|-----------------------|--------------------|-----------------|--|--|--|
| Mode | Keeping | Transmitting | Input Voltage | 120V~ | | | |
| Temperature | 24 | deg. C, | Humidity | 56% RH | | | |
| Test Result: | | Pass | Detector | PK | | | |
| 802.11n HT20 mode, Low Channel, Horizontal | | | | | | | |
| 2390 | PK (dBµV/m) | 43.76 | T ::4 | $74(dB\mu V/m)$ | | | |
| | AV (dBμV/m) | | Limit | $54(dB\mu V/m)$ | | | |
| | 8 | 302.11n HT20 mode, Lo | ow Channel, Vertic | cal | | | |
| 2390 | PK (dBµV/m) | 37.28 | Limit | 74(dBμV/m) | | | |
| | AV (dBμV/m) | | Limit | $54(dB\mu V/m)$ | | | |

| EUT | 21.5' Adve | rtising Displayer | Model | ULT215 | | | |
|---|-------------|----------------------|---------------------|-----------------|--|--|--|
| Mode | Keeping | Transmitting | Input Voltage | 120V~ | | | |
| Temperature | 24 | deg. C, | Humidity | 56% RH | | | |
| Test Result: | | Pass | Detector | PK | | | |
| 802.11n HT20 mode, High Channel, Horizontal | | | | | | | |
| 2483.5 | PK (dBµV/m) | 43.98 | T ::4 | $74(dB\mu V/m)$ | | | |
| | AV (dBμV/m) | | Limit | $54(dB\mu V/m)$ | | | |
| | 8 | 02.11n HT20 mode, Hi | igh Channel, Vertic | cal | | | |
| 2483.5 | PK (dBμV/m) | 36.12 | Limit | 74(dBμV/m) | | | |
| | AV (dBμV/m) | | LIIIII | $54(dB\mu V/m)$ | | | |

Page 81 of 104 Report No.: FCC1901184-01

Date: 2019-02-22



10.5 Restricted band Measurement

| EUT | 21.5' Advertising Displayer | | Model | ULT215 | | | |
|--|-----------------------------|-------|---------------|-----------------|--|--|--|
| Mode | Keeping Transmitting | | Input Voltage | 120V~ | | | |
| Temperature | 24 deg. C, | | Humidity | 56% RH | | | |
| Test Result: | Pass | | Detector | PK | | | |
| 802.11n HT40 mode, Low Channel, Horizontal | | | | | | | |
| 2390 | PK (dBμV/m) | 44.52 | T ::4 | $74(dB\mu V/m)$ | | | |
| | AV (dBμV/m) | Limit | Limit | 54(dBµV/m) | | | |
| 802.11n HT40 mode, Low Channel, Vertical | | | | | | | |
| 2390 | PK (dBμV/m) | 37.08 | Limit | 74(dBμV/m) | | | |
| | AV (dBμV/m) | | | $54(dB\mu V/m)$ | | | |

| 10.5 Restricted band incastrement | | | | | | | |
|---|-----------------------------|-------|---------------|-----------------|--|--|--|
| EUT | 21.5' Advertising Displayer | | Model | ULT215 | | | |
| Mode | Keeping Transmitting | | Input Voltage | 120V~ | | | |
| Temperature | 24 deg. C, | | Humidity | 56% RH | | | |
| Test Result: | Pass | | Detector | PK | | | |
| 802.11n HT40 mode, High Channel, Horizontal | | | | | | | |
| 2483.5 | PK (dBµV/m) | 42.73 | Limit | $74(dB\mu V/m)$ | | | |
| | AV ($dB\mu V/m$) | | | 54(dBμV/m) | | | |
| 802.11n HT40 mode, High Channel, Vertical | | | | | | | |
| 2483.5 | PK (dBμV/m) | 35.98 | - Limit | 74(dBμV/m) | | | |
| | AV (dBμV/m) | | | 54(dBμV/m) | | | |

Report No.: FCC1901184-01

Date: 2019-02-22



Page 82 of 104

11.0 Antenna Requirement

11.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitter antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the mount in dB that the directional gain of the antenna exceeds 6 dBi.

11.2 Antenna Connected construction

Dipole antenna used. The gain of the antennas is 2.0dBi.

Report No.: FCC1901184-01 Page 83 of 104

Date: 2019-02-22



12.0 FCC ID Label

FCC ID: 2AACS-ULT215

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

The label must not be a stick-on paper label. The label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

Mark Location:



Page 84 of 104


Report No.: FCC1901184-01

Date: 2019-02-22



13.0 Photo of testing

Conducted Emission Test Setup:

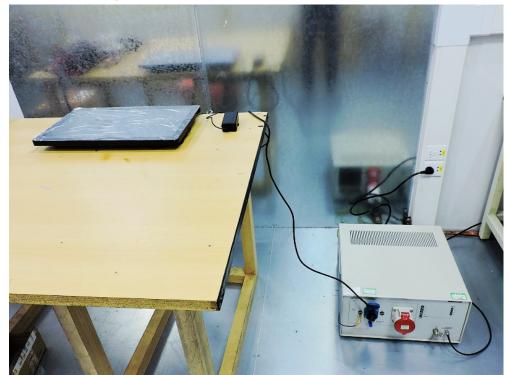


Page 85 of 104


Report No.: FCC1901184-01

Date: 2019-02-22



Radiated Emission Test Setup:

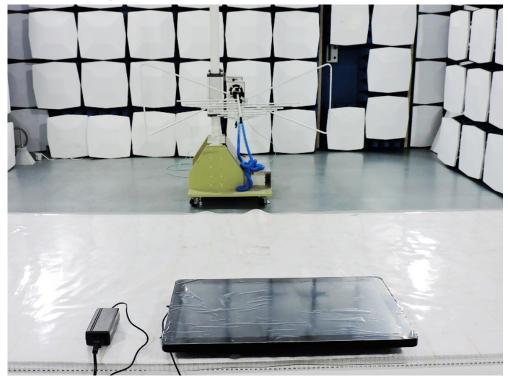

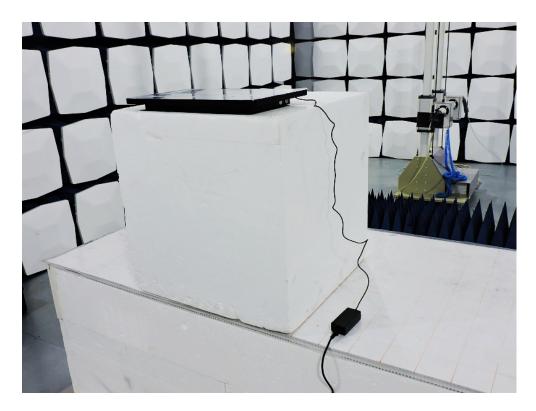

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the propert. discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

Page 86 of 104

Report No.: FCC1901184-01

Date: 2019-02-22



Photographs - EUT

Power Supply





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the propert. discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

Page 87 of 104

Report No.: FCC1901184-01

Date: 2019-02-22



Power Supply





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 88 of 104

Report No.: FCC1901184-01

Date: 2019-02-22



Power Supply





The report refers only to the sample tested and does not apply to the bulk.

This report released in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to


Page 89 of 104

Report No.: FCC1901184-01

Date: 2019-02-22



Outside view

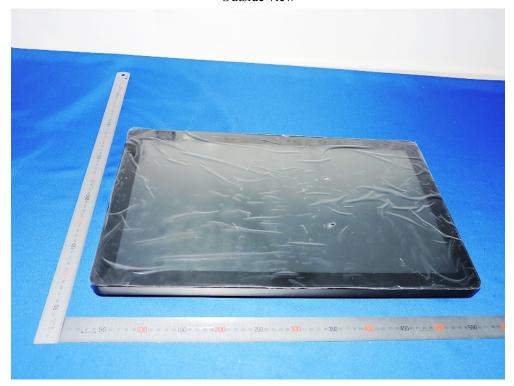



The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.


Page 90 of 104

Report No.: FCC1901184-01

Date: 2019-02-22



Outside view

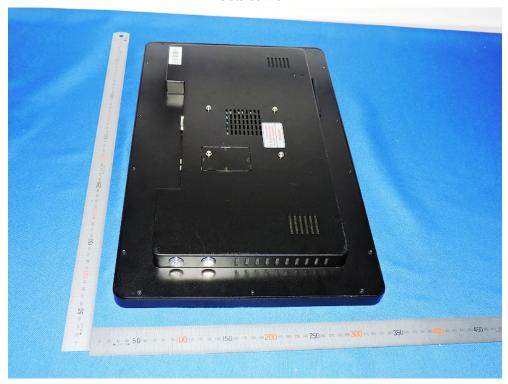



The report refers only to the sample tested and does not apply to the bulk.

This report released in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to