



FCC PART 27
FCC PART 22H, PART 24E
TEST REPORT

For

i.safe MOBILE GmbH

i_Park Tauberfranken 10 97922 Lauda-Koenigshofen, Germany

FCC ID: 2AACZ-IS9101

Report Type: Original Report	Product Type: Intrinsically safe tablet PC
Report Number: RSZ180529003-00D	
Report Date: 2018-07-20	
Reviewed By: RF Engineer	Rocky Kang <i>Rocky Kang</i>
Prepared By: Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F., West Wing, Third Phase of Wanli Industrial Building, Shihua Road, Futian Free Trade Zone, Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn	

Note: This report must not be used by the customer to claim product certification, approval, or endorsement by A2LA* or any agency of the Federal Government. * This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk “*”.

TABLE OF CONTENTS

GENERAL INFORMATION.....	3
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	3
OBJECTIVE	3
RELATED SUBMITTAL(S)/GRANT(S).....	3
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY	4
TEST FACILITY	4
SYSTEM TEST CONFIGURATION.....	5
DESCRIPTION OF TEST CONFIGURATION	5
EQUIPMENT MODIFICATIONS	5
SUPPORT EQUIPMENT LIST AND DETAILS	5
BLOCK DIAGRAM OF TEST SETUP	5
SUMMARY OF TEST RESULTS.....	6
TEST EQUIPMENT LIST	7
FCC §1.1307(B) & §2.1093 - RF EXPOSURE INFORMATION.....	9
APPLICABLE STANDARD	9
TEST RESULT	9
FCC §2.1047 - MODULATION CHARACTERISTIC	10
FCC § 2.1046, § 22.913 (A) & § 24.232 (C); §27.50(H) - RF OUTPUT POWER.....	11
APPLICABLE STANDARD	11
TEST PROCEDURE	11
TEST DATA	11
FCC §2.1049, §22.917, §22.905 & §24.238 & §27.53 - OCCUPIED BANDWIDTH.....	29
APPLICABLE STANDARD	29
TEST PROCEDURE	29
TEST DATA	29
FCC §2.1051, §22.917(A) & §24.238(A); §27.53 (H) (M) - SPURIOUS EMISSIONS AT ANTENNA TERMINALS.....	49
APPLICABLE STANDARD	49
TEST PROCEDURE	49
TEST DATA	49
FCC § 2.1053; § 22.917 (A);§ 24.238 (A); §27.53 (H)(M) SPURIOUS RADIATED EMISSIONS.....	72
APPLICABLE STANDARD	72
TEST PROCEDURE	72
TEST DATA	72
FCC § 22.917 (A);§ 24.238 (A); §27.53 (H)(M) - BAND EDGES	76
APPLICABLE STANDARD	76
TEST PROCEDURE	76
TEST DATA	76
FCC § 2.1055; § 22.355; § 24.235; §27.54 - FREQUENCY STABILITY	107
APPLICABLE STANDARD	107
TEST PROCEDURE	107
TEST DATA	108

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The *i.safe MOBILE GmbH's* product, model number: *IS910.1 (FCC ID: 2AACZ-IS9101)* or the "EUT" in this report was a *Intrinsically safe tablet PC*, which was measured approximately: 234.5 mm (L) * 154 mm (W) * 19.5 mm (H), rated with input voltage: DC 3.7 V battery or DC 5V from adapter.

Adapter Information: (For model IS910.1)

Model: ICP12-050-2000B

Input: AC 100-240V, 50/60Hz, 0.3 A

Output: DC 5V, 2000 mA

Adapter Information: (For model RG910)

Model: HKC0115020-2B

Input: AC 100-240V, 50/60Hz, 0.5 A

Output: DC 5V, 2A

Notes: This series products model: RG910 (Product name: Rugged Tablet Computer) and IS910.1 (Product name: Intrinsically safe tablet PC) are electrically identical, the detailed information can be referred to the declaration letter which was stated and guaranteed by the applicant.

**All measurement and test data in this report was gathered from production sample serial number: 180529003A (Assigned by BACL, Shenzhen). The EUT supplied by the applicant was received on 2018-05-29.*

Test frequency list

Test Band	Test Frequency
GSM850/EDGE850/WCDMA BAND 5	824-849MHz(TX), 869-894MHz(RX)
PCS1900/EDGE1900/WCDMA BAND 2	1850-1910MHz(TX), 1930-1990MHz(RX)
CDMA BC0	824-849MHz(TX), 869-894MHz(RX)
CDMA BC1	1850-1910MHz(TX), 1930-1990MHz(RX)
LTE BAND 7	2500-2570MHz(TX), 2620-2690MHz(RX)
LTE BAND 41	2555-2655MHz(TX)/(RX)

Objective

This test report is prepared on behalf of *i.safe MOBILE GmbH* in accordance with Part 2-Subpart J, Part 22-Subpart H and Part 24-Subpart E and Subpart 27 of the Federal Communication Commissions rules.

The objective is to determine the compliance of the EUT with FCC rules for output power, modulation characteristic, occupied bandwidth, and spurious emission at antenna terminal, spurious radiated emission, frequency stability and band edge.

Related Submittal(s)/Grant(s)

FCC Part 15B JBP, Part 15.247 DSS & DTS and Part 15.225 DXX submissions with FCC ID: 2AACZ-IS9101.

Test Methodology

All tests and measurements indicated in this document were performed in accordance with the Code of Federal Regulations Title 47 Part 2-Subpart J as well as the following parts:

Part 22 Subpart H - Public Mobile Services
 Part 24 Subpart E - Personal Communication Services
 Part 27 – Miscellaneous wireless communications services

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

Parameter		Uncertainty
Occupied Channel Bandwidth		±5%
RF output power, conducted		±1.5dB
Unwanted Emission, conducted		±1.5dB
Emissions, radiated	Below 1GHz	±4.70dB
	Above 1GHz	±4.80dB
Temperature		±1 °C
Supply voltages		±0.4%

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 6/F., West Wing, Third Phase of Wanli Industrial Building, Shihua Road, Futian Free Trade Zone, Shenzhen, Guangdong, China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No.: 342867, the FCC Designation No.: CN1221.

The test site has been registered with ISED Canada under ISED Canada Registration Number 3062B.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The EUT was configured for testing according to TIA/EIA-603-D.

The final qualification test was performed with the EUT operating at normal mode.


Equipment Modifications

No modification was made to the EUT.

Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
Rohde & Schwarz	Wideband Radio Communication Tester	CMW500	1201.002K50-116218-UY
Rohde & Schwarz	Universal Radio Communication Tester	CMU200	110605

Block Diagram of Test Setup

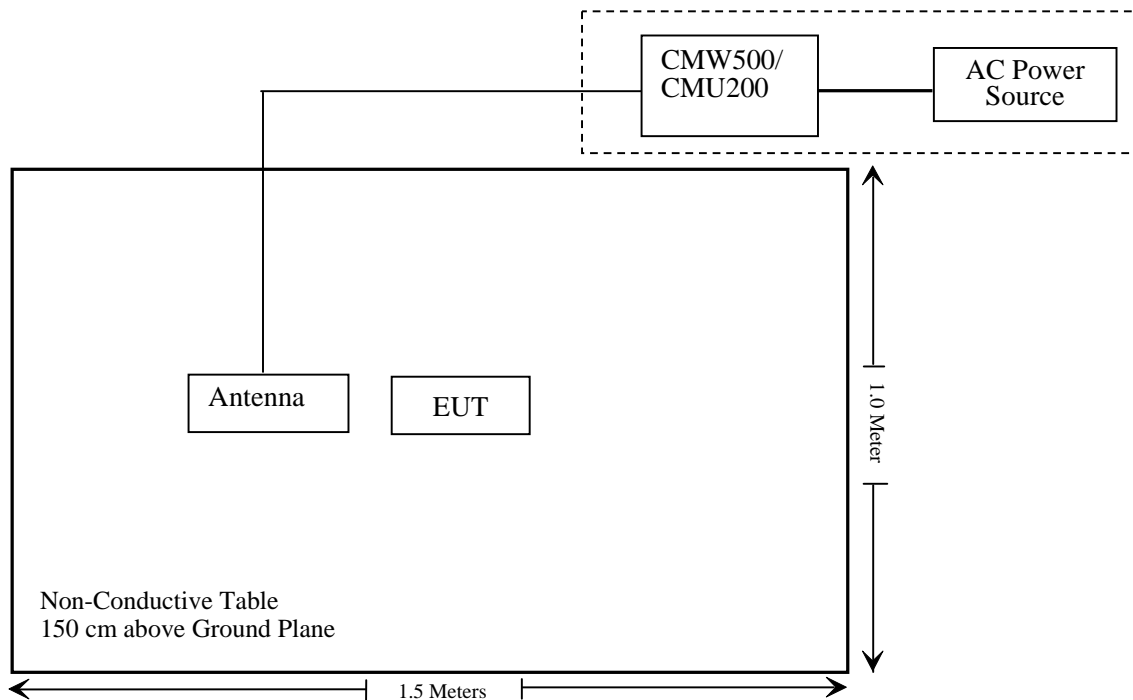

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§ 1.1307 , §2.1093	RF Exposure (SAR)	Compliance*
§2.1046; § 22.913 (a); § 24.232 (c); §27.50 (h)	RF Output Power	Compliance
§ 2.1047	Modulation Characteristics	Not Applicable
§ 2.1049; § 22.905; § 22.917; § 24.238; §27.53	Occupied Bandwidth	Compliance
§ 2.1051; § 22.917 (a); § 24.238 (a); §27.53 (h)(m)	Spurious Emissions at Antenna Terminal	Compliance
§ 2.1053; § 22.917 (a); § 24.238 (a); §27.53 (h)(m)	Field Strength of Spurious Radiation	Compliance
§ 22.917 (a); § 24.238 (a); §27.53 (h)(m)	Band Edge	Compliance
§ 2.1055; § 22.355; § 24.235; §27.54;	Frequency stability	Compliance

Note: * Please refer to SAR report released by BACL, report number: RSZ180529003-20A.

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Radiated Emission Test					
Sunol Sciences	Horn Antenna	DRH-118	A052604	2017-12-22	2020-12-21
Rohde & Schwarz	Signal Analyzer	FSEM	845987/005	2018-04-24	2019-04-24
Sunol Sciences	Broadband Antenna	JB1	A040904-1	2017-12-22	2020-12-21
Mini	Pre-amplifier	ZVA-183-S+	5969001149	2018-05-21	2019-05-21
HP	Amplifier	HP8447E	1937A01046	2018-05-21	2018-11-19
Anritsu	Signal Generator	68369B	004114	2017-12-24	2018-12-24
Rohde & Schwarz	EMI Test Receiver	ESCI	101120	2018-01-11	2019-01-11
COM POWER	Dipole Antenna	AD-100	041000	NCR	NCR
A.H. System	Horn Antenna	SAS-200/571	135	2015-08-18	2018-08-17
Ducommun technologies	RF Cable	UFA210A-1-4724-30050U	MFR64369 223410-001	2018-05-21	2018-11-19
Ducommun technologies	RF Cable	104PEA	218124002	2018-05-21	2018-11-19
Ducommun technologies	RF Cable	RG-214	1	2018-05-21	2018-11-19
Ducommun technologies	RF Cable	RG-214	2	2018-05-22	2018-11-22
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-04	2017-12-29	2020-12-28
Ducommun technologies	Horn Antenna	ARH-4223-02	1007726-03	2017-12-29	2020-12-28
Ducommun technologies	Pre-amplifier	ALN-22093530-01	991373-01	2017-08-03	2018-08-03

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
RF Conducted Test					
Rohde & Schwarz	SPECTRUM ANALYZER	FSU26	200120	2017-12-24	2018-12-24
ESPEC	Temperature & Humidity Chamber	EL-10KA	09107726	2017-12-21	2018-12-21
Long Wei	DC Power Supply	TPR-6420D	398363	NCR	NCR
Rohde & Schwarz	Wideband Radio Communication Tester	CMU200	106891	2017-12-14	2018-12-14
Rohde & Schwarz	Wideband Radio Communication Tester	CMW500	1201.002K50-146520-wh	2018-04-24	2019-04-24
Ducommun technologies	RF Cable	RG-214	3	Each Time	
WEINSCHTEL	10dB Attenuator	5324	AU 3842	Each Time	
WEINSCHTEL	3dB Attenuator	N/A	N/A	Each Time	
N/A	Power Splitter	N/A	N/A	2018-05-21	2019-05-21

* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §1.1307(b) & §2.1093 - RF EXPOSURE INFORMATION

Applicable Standard

FCC§1.1310 and §2.1093.

Test Result

Compliance, please refer to the SAR report: RSZ180529003-20A.

FCC §2.1047 - MODULATION CHARACTERISTIC

According to FCC § 2.1047(d), Part 22H & 24E & 27 there is no specific requirement for digital modulation, therefore modulation characteristic is not presented.

FCC § 2.1046, § 22.913 (a) & § 24.232 (c); §27.50(h) - RF OUTPUT POWER**Applicable Standard**

According to FCC §2.1046 and §22.913 (a), the ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 watts.

According to FCC §2.1046 and §24.232 (C), mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications.


The peak-to-average power ratio (PAPR) of the transmitter output power must not exceed 13 dB.

According to §27.50(h), Mobile stations are limited to 2.0 watts EIRP. All user stations are limited to 2.0 watts transmitter output power.

Test Procedure

Conducted method:

The RF output of the transmitter was connected to the CMW500/CMU200 through sufficient attenuation.



Radiated method:

TIA 603-D section 2.2.17

Test Data**Environmental Conditions**

Temperature:	25 °C
Relative Humidity:	52 %
ATM Pressure:	101.0 kPa

The testing was performed by Nancy Wang on 2018-07-10.

Conducted Power

Cellular Band (Part 22H)

Mode	Channel	Frequency (MHz)	Average Output Power (dBm)	Limit (dBm)
GSM	128	824.2	33.21	38.45
	190	836.6	33.05	38.45
	251	848.8	33.03	38.45

Mode	Channel	Frequency (MHz)	Average Output Power (dBm)				Limit (dBm)
			1 slot	2 slots	3 slots	4 slots	
GPRS	128	824.2	33.27	33.15	30.74	27.98	38.45
	190	836.6	33.10	32.98	30.25	27.60	38.45
	251	848.8	33.01	32.97	30.15	27.43	38.45

Mode	Channel	Frequency (MHz)	Average Output Power (dBm)				Limit (dBm)
			1 slot	2 slots	3 slots	4 slots	
EGPRS	128	824.2	27.40	25.72	24.52	23.27	38.45
	190	836.6	27.02	25.28	24.09	22.85	38.45
	251	848.8	26.87	25.08	23.92	22.70	38.45

2G:

RC1+S055:

Mode	Channel	Frequency (MHz)	Average Output Power (dBm)	Limit (dBm)
CDMA 1*RTT (BC0)	1013	824.70	21.21	38.45
	384	836.52	21.60	38.45
	777	848.31	21.51	38.45

RC3+S055:

Mode	Channel	Frequency (MHz)	Average Output Power (dBm)	Limit (dBm)
CDMA 1*RTT (BC0)	1013	824.70	21.44	38.45
	384	836.52	21.25	38.45
	777	848.31	21.20	38.45

RC3+SO32(FCH):

Mode	Channel	Frequency (MHz)	Average Output Power (dBm)	Limit (dBm)
CDMA 1*RTT (BC0)	1013	824.70	21.14	38.45
	384	836.52	21.52	38.45
	777	848.31	21.44	38.45

RC3+SO32(SCH):

Mode	Channel	Frequency (MHz)	Average Output Power (dBm)	Limit (dBm)
CDMA 1*RTT (BC0)	1013	824.70	21.24	38.45
	384	836.52	21.31	38.45
	777	848.31	21.56	38.45

3G:

RTAP 153.6kbps Subtype 0:

Mode	Channel	Frequency (MHz)	Average Output Power (dBm)	Limit (dBm)
CDMA EV-DO (BC0)	1013	824.70	21.62	38.45
	384	836.52	21.33	38.45
	777	848.31	21.45	38.45

RETAP 4096pbs Subtype 2:

Mode	Channel	Frequency (MHz)	Average Output Power (dBm)	Limit (dBm)
CDMA EV-DO (BC0)	1013	824.70	21.17	38.45
	384	836.52	21.02	38.45
	777	848.31	21.38	38.45

Mode	Test Condition	Test Mode	3GPP Sub Test	Average Output Power (dBm)		
				Low Frequency	Middle Frequency	High Frequency
WCDMA (Band V)	Normal	RMC12.2k		22.38	22.46	22.34
		HSDPA	1	22.31	22.32	22.26
			2	22.22	22.25	22.20
			3	22.36	22.37	22.36
			4	22.18	22.20	22.14
		HSUPA	1	21.73	21.77	21.76
			2	21.65	21.70	21.72
			3	21.84	21.88	21.83
			4	21.62	21.71	21.65
		5	21.85	21.83	21.81	
HSPA+	1	21.54	21.62	21.64		

PCS Band (Part 24E)

Mode	Channel	Frequency (MHz)	Average Output Power (dBm)	Limit (dBm)
GSM	512	1850.2	28.20	33
	661	1880.0	28.43	33
	810	1909.8	28.37	33

Mode	Channel	Frequency (MHz)	Average Output Power (dBm)				Limit (dBm)
			1 slot	2 slots	3 slots	4 slots	
GPRS	512	1850.2	28.22	26.58	26.17	22.53	33
	661	1880.0	28.43	27.38	26.19	23.78	33
	810	1909.8	28.38	27.46	26.15	24.09	33

Mode	Channel	Frequency (MHz)	Average Output Power (dBm)				Limit (dBm)
			1 slot	2 slots	3 slots	4 slots	
EGPRS	512	1850.2	24.41	23.36	23.27	21.12	33
	661	1880.0	25.20	24.24	23.29	22.25	33
	810	1909.8	25.40	24.55	23.63	22.58	33

2G:

RC1+SO55:

Mode	Channel	Frequency (MHz)	Average Output Power (dBm)	Limit (dBm)
CDMA 1*RTT (BC1)	25	1851.25	21.15	38.45
	600	1880.00	21.35	38.45
	1175	1908.75	21.47	38.45

RC3+SO55:

Mode	Channel	Frequency (MHz)	Average Output Power (dBm)	Limit (dBm)
CDMA 1*RTT (BC1)	25	1851.25	21.21	38.45
	600	1880.00	21.12	38.45
	1175	1908.75	21.14	38.45

RC3+SO32(FCH):

Mode	Channel	Frequency (MHz)	Average Output Power (dBm)	Limit (dBm)
CDMA 1*RTT (BC1)	25	1851.25	21.14	38.45
	600	1880.00	21.26	38.45
	1175	1908.75	21.41	38.45

RC3+SO32(SCH):

Mode	Channel	Frequency (MHz)	Average Output Power (dBm)	Limit (dBm)
CDMA 1*RTT (BC1)	25	1851.25	21.34	38.45
	600	1880.00	21.47	38.45
	1175	1908.75	21.52	38.45

3G:

RTAP 153.6kbps Subtype 0:

Mode	Channel	Frequency (MHz)	Average Output Power (dBm)	Limit (dBm)
CDMA EV-DO (BC1)	25	1851.25	21.21	38.45
	600	1880.00	21.27	38.45
	1175	1908.75	21.44	38.45

RETAP 4096pbs Subtype:

Mode	Channel	Frequency (MHz)	Average Output Power (dBm)	Limit (dBm)
CDMA EV-DO (BC1)	25	1851.25	21.62	38.45
	600	1880.00	21.37	38.45
	1175	1908.75	21.43	38.45

Mode	Test Condition	Test Mode	3GPP Sub Test	Average Output Power (dBm)		
				Low Frequency	Middle Frequency	High Frequency
WCDMA (Band II)	Normal	RMC12.2k		21.98	22.30	22.88
		HSDPA	1	20.87	21.12	21.74
			2	20.96	21.19	21.81
			3	20.76	21.06	21.63
			4	20.92	21.17	21.78
		HSUPA	1	20.49	20.58	21.13
			2	20.46	20.51	21.09
			3	20.58	20.66	21.17
			4	20.43	20.51	21.07
			5	20.60	20.61	21.22
		HSPA+	1	20.33	20.47	21.01

Peak-to-average ratio (PAR)

Cellular Band

Mode	Channel	PAR (dB)	Limit (dB)
GSM	Low	1.24	13
	Middle	1.44	13
	High	1.20	13

Mode	Channel	PAR (dB)	Limit (dB)
EGPRS	Low	1.22	13
	Middle	1.23	13
	High	1.22	13

Mode	Channel	PAR (dB)	Limit (dB)
CDMA 1*RTT (BC0)	Low	1.34	13
	Middle	1.30	13
	High	1.48	13

Mode	Channel	PAR (dB)	Limit (dB)
CDMA EV-DO (BC0)	Low	1.34	13
	Middle	1.44	13
	High	1.40	13

Mode	Channel	PAR (dB)	Limit (dB)
RMC (BPSK)	Low	3.23	13
	Middle	3.41	13
	High	3.54	13
HSDPA (16QAM)	Low	3.49	13
	Middle	3.68	13
	High	3.47	13
HSUPA (BPSK)	Low	3.33	13
	Middle	3.81	13
	High	3.29	13
HSPA+	Low	3.19	13
	Middle	3.24	13
	High	3.51	13

PCS Band

Mode	Channel	PAR (dB)	Limit (dB)
GSM	Low	1.16	13
	Middle	1.06	13
	High	1.32	13

Mode	Channel	PAR (dB)	Limit (dB)
EGPRS	Low	1.35	13
	Middle	1.64	13
	High	1.19	13

Mode	Channel	PAR (dB)	Limit (dB)
CDMA 1*RTT (BC1)	Low	2.06	13
	Middle	2.14	13
	High	2.14	13

Mode	Channel	PAR (dB)	Limit (dB)
CDMA EV-DO (BC1)	Low	2.16	13
	Middle	2.14	13
	High	2.10	13

Mode	Channel	PAR (dB)	Limit (dB)
RMC (BPSK)	Low	4.22	13
	Middle	4.29	13
	High	4.37	13
HSDPA (16QAM)	Low	4.34	13
	Middle	4.36	13
	High	4.74	13
HSUPA (BPSK)	Low	4.58	13
	Middle	4.69	13
	High	4.72	13
HSPA+	Low	4.41	13
	Middle	4.32	13
	High	4.58	13

Radiated Power

GSM Mode:

Frequency (MHz)	Receiver Reading (dBµV)	Turntable Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	FCC Part 22H/24E	
			Height (m)	Polar (H/V)	Level (dBm)	Cable loss (dB)	Antenna Gain (dBi)		Limit (dBm)	Margin (dB)
ERP for Cellular Band (Part 22H), Middle Channel										
836.6	88.29	195	2.0	H	25.9	0.7	0.0	25.20	38.45	13.25
836.6	90.54	160	2.5	V	30.1	0.7	0.0	29.40	38.45	9.05
EIRP for PCS Band (Part 24E), Middle Channel										
1880.00	85.37	85	2.2	H	15.3	1.30	9.40	23.40	33	9.6
1880.00	86.90	103	1.1	V	16.6	1.30	9.40	24.70	33	8.3

EDGE Mode:

Frequency (MHz)	Receiver Reading (dBµV)	Turntable Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Height (m)	Polar (H/V)	Level (dBm)	Cable loss (dB)	Antenna Gain (dBi)			
ERP, Cellular Band (Part 22H), Middle Channel										
836.6	82.45	1	1.4	H	20.1	0.7	0.0	19.40	38.45	19.05
836.6	84.62	317	1.7	V	24.2	0.7	0.0	23.50	38.45	14.95
EIRP, PCS Band (Part 24E), Middle Channel										
1880.00	82.77	282	1.2	H	12.7	1.30	9.40	20.80	33	12.2
1880.00	83.59	176	1.1	V	13.3	1.30	9.40	21.40	33	11.6

CDMA Mode:

Frequency (MHz)	Receiver Reading (dBμV)	Turntable Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	FCC Part 22H/24E	
			Height (m)	Polar (H/V)	Level (dBm)	Cable loss (dB)	Antenna Gain (dBi)		Limit (dBm)	Margin (dB)
ERP for CDMA (1*RTT , BC0)										
836.56	82.03	292	1.8	H	19.6	0.7	0.0	18.90	38.45	19.55
836.56	81.27	357	1.4	V	20.8	0.7	0.0	20.10	38.45	18.35
ERP for CDMA (EV-DO, BC0)										
836.56	81.89	164	2.1	H	19.5	0.7	0.0	18.80	38.45	19.65
836.56	81.32	235	1.4	V	20.9	0.7	0.0	20.20	38.45	18.25
EIRP for CDMA (1*RTT , BC1)										
1880.00	81.95	188	1.7	H	11.9	1.30	9.40	20.00	33	13.00
1880.00	82.69	344	2.2	V	12.4	1.30	9.40	20.50	33	12.50
EIRP for CDMA (EV-DO, BC1)										
1880.00	81.44	198	1.6	H	11.4	1.30	9.40	19.50	33	13.50
1880.00	82.21	211	1.3	V	11.9	1.30	9.40	20.00	33	13.00

WCDMA Mode:

Frequency (MHz)	Receiver Reading (dBμV)	Turntable Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	FCC Part 22H/24E	
			Height (m)	Polar (H/V)	Level (dBm)	Cable loss (dB)	Antenna Gain (dBi)		Limit (dBm)	Margin (dB)
ERP for WCDMA Band V (Part 22H), Middle Channel										
836.6	79.54	152	2.3	H	17.1	0.7	0.0	16.40	38.45	22.05
836.6	80.57	180	2.3	V	20.1	0.7	0.0	19.40	38.45	19.05
EIRP for WCDMA Band II (Part 24E), Middle Channel										
1880.00	80.99	120	1.9	H	10.9	1.30	9.40	19.00	33.00	14.00
1880.00	82.15	341	1.5	V	11.9	1.30	9.40	20.00	33.00	13.00

LTE Band 7:

Maximum Output Power

Bandwidth (MHz)	Modulation	RB size/RB Offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
5.0	QPSK	RB Size=1, RB Offset=0	21.54	21.43	21.38
		RB Size=1, RB Offset=12	21.52	21.58	21.5
		RB Size=1, RB Offset=24	21.54	21.67	21.54
		RB Size=12, RB Offset=0	21.46	21.55	21.4
		RB Size=12, RB Offset=6	21.35	21.37	21.32
		RB Size=12, RB Offset=11	21.34	21.08	21.32
		RB Size=25, RB Offset=0	21.24	21.4	21.3
	16QAM	RB Size=1, RB Offset=0	21.51	21.62	21.5
		RB Size=1, RB Offset=12	21.48	21.6	21.55
		RB Size=1, RB Offset=24	21.44	21.41	21.51
		RB Size=12, RB Offset=0	21.43	21.44	21.51
		RB Size=12, RB Offset=6	21.41	21.55	21.38
		RB Size=12, RB Offset=11	21.43	21.34	21.51
		RB Size=25, RB Offset=0	21.24	21.08	21.34
10.0	QPSK	RB Size=1, RB Offset=0	21.44	21.31	21.4
		RB Size=1, RB Offset=24	21.39	21.36	21.43
		RB Size=1, RB Offset=49	21.35	21.28	21.25
		RB Size=25, RB Offset=0	21.36	21.33	21.23
		RB Size=25, RB Offset=12	21.26	21.23	21.18
		RB Size=25, RB Offset=24	21.2	20.97	21.2
		RB Size=50, RB Offset=0	21.07	20.54	21.08
	16QAM	RB Size=1, RB Offset=0	21.46	21.43	21.4
		RB Size=1, RB Offset=24	21.59	21.48	21.49
		RB Size=1, RB Offset=49	21.63	21.57	21.79
		RB Size=25, RB Offset=0	21.53	21.66	21.64
		RB Size=25, RB Offset=12	21.55	21.52	21.59
		RB Size=25, RB Offset=24	21.55	21.45	21.54
		RB Size=50, RB Offset=0	21.6	21.4	21.78

Bandwidth (MHz)	Modulation	RB size/RB Offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
15.0	QPSK	RB Size=1, RB Offset=0	21.37	21.44	21.38
		RB Size=1, RB Offset=37	21.27	21.28	21.22
		RB Size=1, RB Offset=74	21.35	21.46	21.33
		RB Size=36, RB Offset=0	21.43	21.48	21.4
		RB Size=36, RB Offset=18	21.4	21.34	21.53
		RB Size=36, RB Offset=37	21.34	21.07	21.5
		RB Size=75, RB Offset=0	21.34	21.22	21.25
	16QAM	RB Size=1, RB Offset=0	21.32	21.14	21.31
		RB Size=1, RB Offset=37	21.42	21.57	21.51
		RB Size=1, RB Offset=74	21.56	21.76	21.53
		RB Size=36, RB Offset=0	21.49	21.58	21.52
		RB Size=36, RB Offset=18	21.54	21.69	21.54
		RB Size=36, RB Offset=37	21.56	21.78	21.59
		RB Size=75, RB Offset=0	21.58	21.71	21.54
20.0	QPSK	RB Size=1, RB Offset=0	21.07	21	20.98
		RB Size=1, RB Offset=49	21.08	21.06	21.12
		RB Size=1, RB Offset=99	21.14	21.16	21.12
		RB Size=50, RB Offset=0	21.20	21.07	21.20
		RB Size=50, RB Offset=24	21.33	21.52	21.29
		RB Size=50, RB Offset=49	21.23	21.20	21.38
		RB Size=100, RB Offset=0	21.18	20.94	21.16
	16QAM	RB Size=1, RB Offset=0	21.04	21.24	20.93
		RB Size=1, RB Offset=49	20.90	20.83	20.78
		RB Size=1, RB Offset=99	20.99	21.14	20.90
		RB Size=50, RB Offset=0	20.91	21.02	21.03
		RB Size=50, RB Offset=24	20.80	20.74	20.89
		RB Size=50, RB Offset=49	20.80	20.93	20.78
		RB Size=100, RB Offset=0	20.86	20.93	20.86

Peak-to-average ratio (PAR)

Modulation	Middle Channel (dB)	PAR Limit (dB)	Result
QPSK(1RB Size)	2.68	13	Pass
QPSK(100RB Size)	3.65	13	Pass
16QAM (1RB Size)	3.15	13	Pass
16QAM (100RB Size)	3.48	13	Pass

QPSK:

Frequency (MHz)	Receiver Reading (dBµV)	Turn table Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)
			Height (m)	Polar (H/V)	Level (dBm)	Cable Loss (dB)	Antenna Gain (dBi)		
Middle Channel									
5 MHz Bandwidth									
2535.00	77.55	185	1.6	H	8.1	2.60	10.20	15.70	33
2535.00	82.04	9	1.6	V	13.2	2.60	10.20	20.80	33
10 MHz Bandwidth									
2535.00	79.04	147	2.2	H	9.6	2.60	10.20	17.20	33
2535.00	81.84	246	1.8	V	13.0	2.60	10.20	20.60	33
15 MHz Bandwidth									
2535.00	78.94	105	1.3	H	9.5	2.60	10.20	17.10	33
2535.00	81.24	133	1.8	V	12.4	2.60	10.20	20.00	33
20 MHz Bandwidth									
2535.00	78.04	31	1.6	H	8.6	2.60	10.20	16.20	33
2535.00	80.87	278	1.4	V	12.0	2.60	10.20	19.60	33

16QAM:

Frequency (MHz)	Receiver Reading (dBµV)	Turn table Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)
			Height (m)	Polar (H/V)	Level (dBm)	Cable Loss (dB)	Antenna Gain (dBi)		
Middle Channel									
5 MHz Bandwidth									
2535.00	80.24	165	1.4	H	10.8	2.60	10.20	18.40	33
2535.00	81.92	352	2.4	V	13.0	2.60	10.20	20.60	33
10 MHz Bandwidth									
2535.00	80.01	286	2.5	H	10.5	2.60	10.20	18.10	33
2535.00	81.62	234	1.9	V	12.7	2.60	10.20	20.30	33
15 MHz Bandwidth									
2535.00	79.84	299	2.1	H	10.4	2.60	10.20	18.00	33
2535.00	81.27	352	1.9	V	12.4	2.60	10.20	20.00	33
20 MHz Bandwidth									
2535.00	79.53	218	1.3	H	10.0	2.60	10.20	17.60	33
2535.00	81.08	208	2.3	V	12.2	2.60	10.20	19.80	33

LTE Band 41:

Maximum Output Power

Bandwidth (MHz)	Modulation	RB size/RB Offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
5.0	QPSK	RB Size=1, RB Offset=0	22.00	20.97	21.15
		RB Size=1, RB Offset=12	21.23	21.25	21.54
		RB Size=1, RB Offset=24	21.74	21.55	21.80
		RB Size=12, RB Offset=0	21.89	21.93	21.05
		RB Size=12, RB Offset=6	21.02	21.20	21.30
		RB Size=12, RB Offset=11	21.64	21.44	21.36
		RB Size=25, RB Offset=0	21.53	21.29	20.85
	16QAM	RB Size=1, RB Offset=0	21.88	21.23	21.37
		RB Size=1, RB Offset=12	21.37	21.19	21.39
		RB Size=1, RB Offset=24	21.89	21.63	21.67
		RB Size=12, RB Offset=0	21.44	21.43	21.14
		RB Size=12, RB Offset=6	21.19	21.69	21.75
		RB Size=12, RB Offset=11	21.56	21.72	21.46
		RB Size=25, RB Offset=0	21.35	20.70	21.69
10.0	QPSK	RB Size=1, RB Offset=0	21.01	21.45	21.13
		RB Size=1, RB Offset=24	21.36	20.91	21.04
		RB Size=1, RB Offset=49	21.60	21.70	20.85
		RB Size=25, RB Offset=0	21.63	21.59	21.03
		RB Size=25, RB Offset=12	21.60	21.27	20.89
		RB Size=25, RB Offset=24	20.81	20.60	21.34
		RB Size=50, RB Offset=0	21.50	20.05	20.81
	16QAM	RB Size=1, RB Offset=0	21.95	21.38	20.92
		RB Size=1, RB Offset=24	21.35	21.46	21.23
		RB Size=1, RB Offset=49	21.21	21.38	21.91
		RB Size=25, RB Offset=0	21.44	21.60	21.28
		RB Size=25, RB Offset=12	21.16	21.27	21.11
		RB Size=25, RB Offset=24	21.84	21.88	21.97
		RB Size=50, RB Offset=0	21.85	21.00	21.65

Bandwidth (MHz)	Modulation	RB size/RB Offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
15.0	QPSK	RB Size=1, RB Offset=0	20.90	21.55	21.85
		RB Size=1, RB Offset=37	21.16	20.93	20.89
		RB Size=1, RB Offset=74	21.75	21.29	21.83
		RB Size=36, RB Offset=0	21.69	21.92	21.54
		RB Size=36, RB Offset=18	21.16	21.51	21.61
		RB Size=36, RB Offset=37	21.63	21.14	21.88
		RB Size=75, RB Offset=0	21.40	21.50	20.91
	16QAM	RB Size=1, RB Offset=0	21.08	20.76	20.82
		RB Size=1, RB Offset=37	21.50	21.32	21.80
		RB Size=1, RB Offset=74	21.91	22.04	21.87
		RB Size=36, RB Offset=0	21.44	21.92	21.81
		RB Size=36, RB Offset=18	21.76	22.07	21.57
		RB Size=36, RB Offset=37	21.80	21.37	21.84
		RB Size=75, RB Offset=0	21.40	21.81	21.05
20.0	QPSK	RB Size=1, RB Offset=0	20.77	21.43	21.06
		RB Size=1, RB Offset=49	21.46	20.59	21.41
		RB Size=1, RB Offset=99	21.30	21.13	21.00
		RB Size=50, RB Offset=0	21.23	21.14	21.67
		RB Size=50, RB Offset=24	20.98	21.50	21.74
		RB Size=50, RB Offset=49	21.12	21.53	21.50
		RB Size=100, RB Offset=0	20.93	21.13	21.09
	16QAM	RB Size=1, RB Offset=0	20.85	21.28	21.40
		RB Size=1, RB Offset=49	20.49	21.13	20.99
		RB Size=1, RB Offset=99	20.62	21.58	20.59
		RB Size=50, RB Offset=0	20.49	21.27	21.49
		RB Size=50, RB Offset=24	21.20	21.21	21.35
		RB Size=50, RB Offset=49	20.80	21.16	20.31
		RB Size=100, RB Offset=0	21.04	21.11	21.30

Peak-to-average ratio (PAR)

Modulation	Middle Channel (dB)	PAR Limit (dB)	Result
QPSK(1RB Size)	8.58	13	Pass
QPSK(100RB Size)	8.15	13	Pass
16QAM (1RB Size)	8.21	13	Pass
16QAM (100RB Size)	8.18	13	Pass

EIRP:

QPSK:

Frequency (MHz)	Receiver Reading (dBµV)	Turn table Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)
			Height (m)	Polar (H/V)	Level (dBm)	Cable Loss (dB)	Antenna Gain (dBi)		
Middle Channel									
5 MHz Bandwidth									
2605.00	78.52	111	1.3	H	9.0	2.20	10.20	17.00	33
2605.00	81.66	329	1.7	V	12.5	2.20	10.20	20.50	33
10 MHz Bandwidth									
2605.00	78.34	258	2.0	H	8.8	2.20	10.20	16.80	33
2605.00	81.47	66	1.9	V	12.3	2.20	10.20	20.30	33
15 MHz Bandwidth									
2605.00	78.02	176	1.9	H	8.5	2.20	10.20	16.50	33
2605.00	81.19	151	1.4	V	12.0	2.20	10.20	20.00	33
20 MHz Bandwidth									
2605.00	77.68	261	1.8	H	8.1	2.20	10.20	16.10	33
2605.00	80.84	285	1.3	V	11.6	2.20	10.20	19.60	33

16QAM:

Frequency (MHz)	Receiver Reading (dBμV)	Turn table Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)
			Height (m)	Polar (H/V)	Level (dBm)	Cable Loss (dB)	Antenna Gain (dBi)		
Middle Channel									
5 MHz Bandwidth									
2605.00	78.37	329	1.1	H	8.8	2.20	10.20	16.80	33
2605.00	81.89	198	2.1	V	12.7	2.20	10.20	20.70	33
10 MHz Bandwidth									
2605.00	78.19	82	2.0	H	8.6	2.20	10.20	16.60	33
2605.00	81.63	93	1.6	V	12.4	2.20	10.20	20.40	33
15 MHz Bandwidth									
2605.00	78.01	105	2.0	H	8.4	2.20	10.20	16.40	33
2605.00	81.42	262	1.2	V	12.2	2.20	10.20	20.20	33
20 MHz Bandwidth									
2605.00	76.93	45	2.3	H	7.4	2.20	10.20	15.40	33
2605.00	80.49	123	2.2	V	11.3	2.20	10.20	19.30	33

Note:

All above data were tested with no amplifier

Absolute Level = Substituted Level - Cable loss + Antenna Gain

Margin = Limit - Absolute Level

FCC §2.1049, §22.917, §22.905 & §24.238 & §27.53 - OCCUPIED BANDWIDTH


Applicable Standard

FCC 47 §2.1049, §22.917, §22.905, §24.238 and §27.53.

Test Procedure

The RF output of the transmitter was connected to the simulator and the spectrum analyzer through sufficient attenuation.

The resolution bandwidth of the spectrum analyzer was set at 1% to 5% of the anticipated emission bandwidth and the 26 dB & 99% bandwidth was recorded.

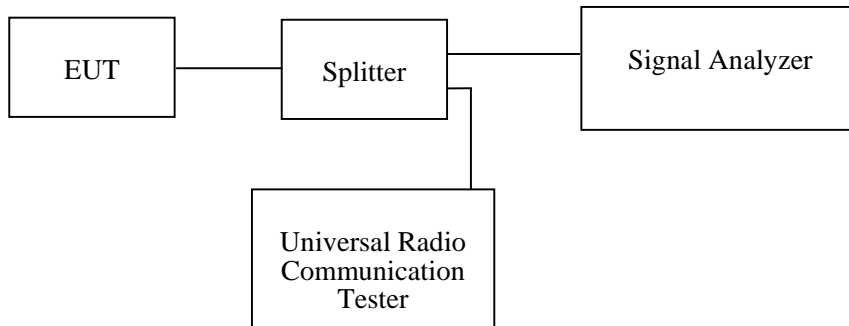

Test Data

Environmental Conditions

Temperature:	24~25 °C
Relative Humidity:	52~53 %
ATM Pressure:	101.0~101.2 kPa

The testing was performed by Nancy Wang from 2018-06-08 to 2018-07-13.

EUT operation mode: Transmitting

Test Result: Compliance. Please refer to the following tables and plots.

Cellular Band (Part 22H)

Mode	Frequency (MHz)	99% Occupied Bandwidth (kHz)	26 dB Emission Bandwidth (kHz)
GSM(GMSK)	836.6	245.19	314.10
EGPRS(8PSK)	836.6	246.79	314.10

Mode	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26 dB Emission Bandwidth (MHz)
CDMA (1*RTT) BC0	836.52	1.274	1.423
CDMA (EV-DO) BC0	836.52	1.279	1.428

Mode	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26 dB Emission Bandwidth (MHz)
RMC (BPSK)	836.6	4.119	4.712
HSUPA (BPSK)	836.6	4.135	4.696
HSDPA (16QAM)	836.6	4.135	4.696

PCS Band (Part 24E)


Mode	Frequency (MHz)	99% Occupied Bandwidth (kHz)	26 dB Emission Bandwidth (kHz)
GSM(GMSK)	1880.0	243.59	314.10
EGPRS(8PSK)	1880.0	245.19	317.31

Mode	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26 dB Emission Bandwidth (MHz)
CDMA (1*RTT) BC0	1880.00	1.274	1.428
CDMA (EV-DO) BC0	1880.00	1.279	1.438

Mode	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26 dB Emission Bandwidth (MHz)
RMC (BPSK)	1880.0	4.103	4.712
HSUPA (BPSK)	1880.0	4.119	4.712
HSDPA (16QAM)	1880.0	4.119	4.712


Cellular Band (Part 22H)

26 dB Emissions & 99% Occupied Bandwidth for GSM (GMSK) Mode

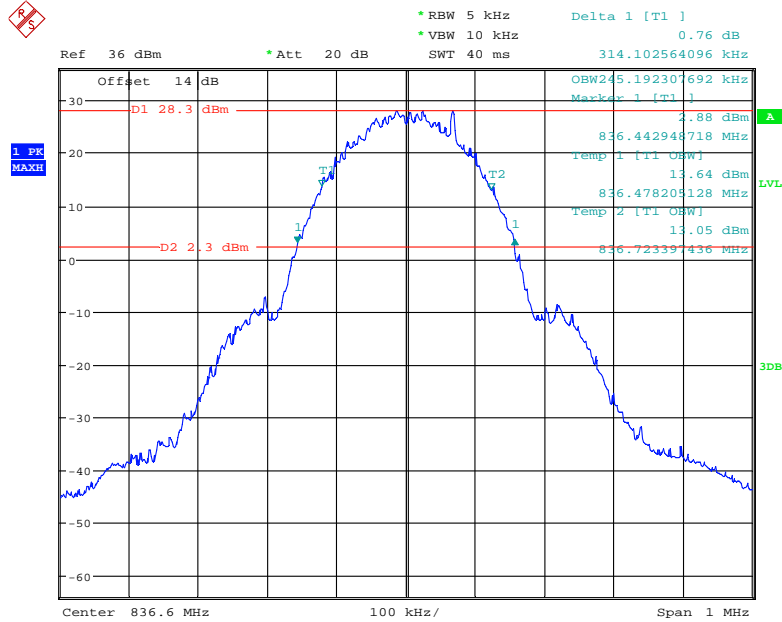


Date: 11.JUN.2018 16:16:10

26 dB Emissions & 99% Occupied Bandwidth for EDGE Mode

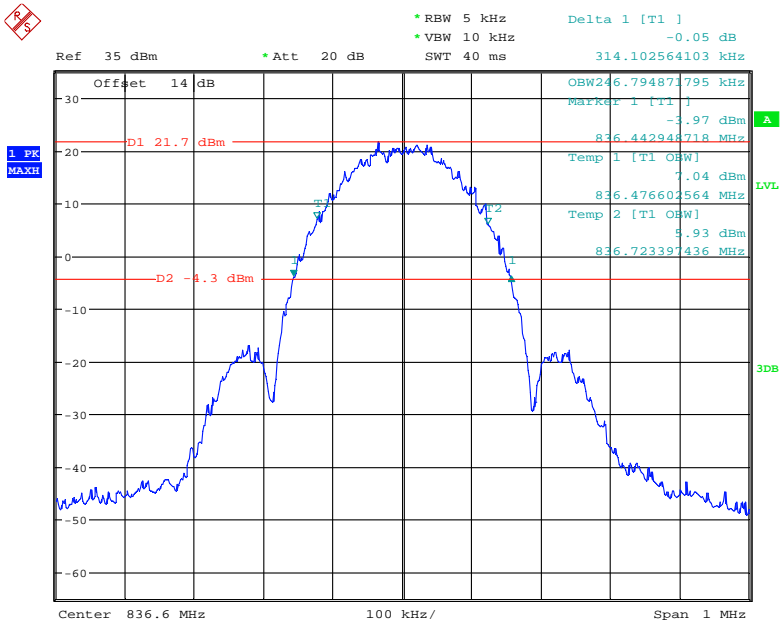


Date: 12.JUN.2018 15:32:41

26 dB Emissions & 99% Occupied Bandwidth for RMC (BPSK) Mode

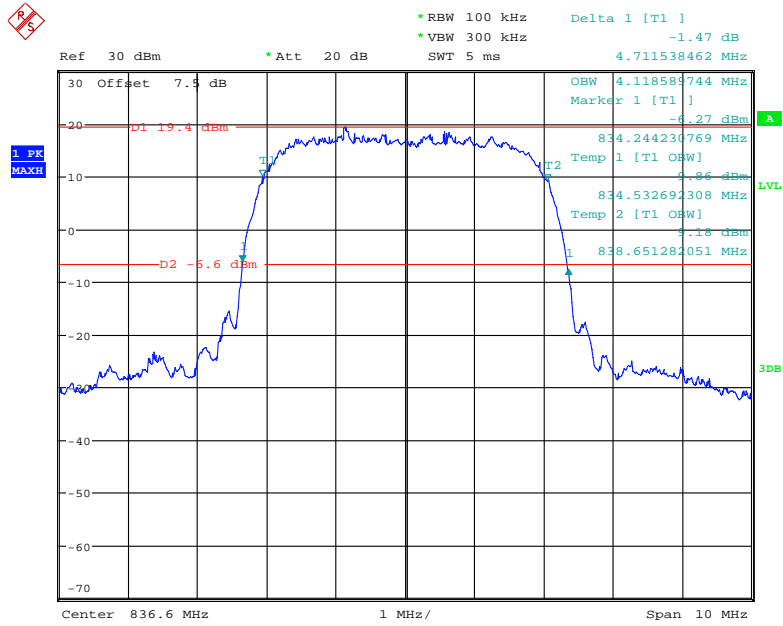


Date: 16.JUN.2018 15:47:55

26 dB Emissions & 99% Occupied Bandwidth for HSUPA (BPSK) Mode

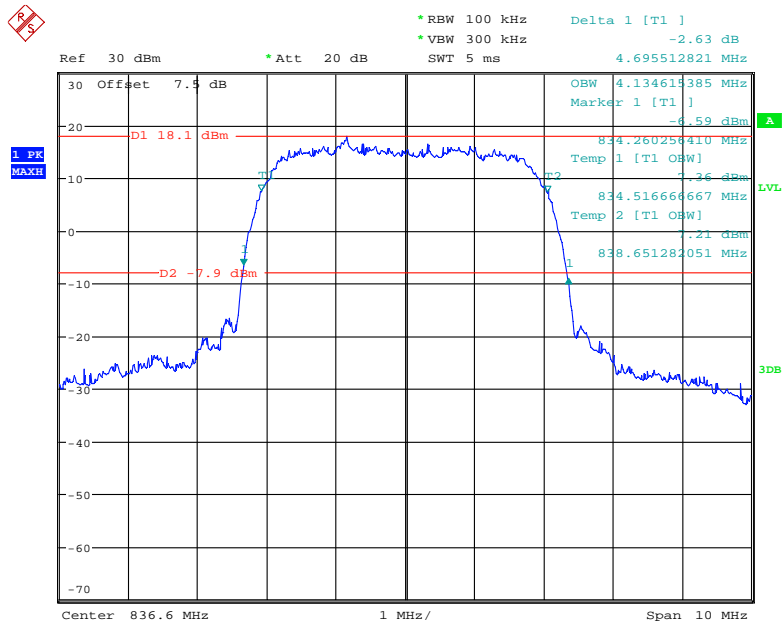


Date: 16.JUN.2018 16:09:15

26 dB Emissions & 99% Occupied Bandwidth for HSDPA (16QAM) Mode

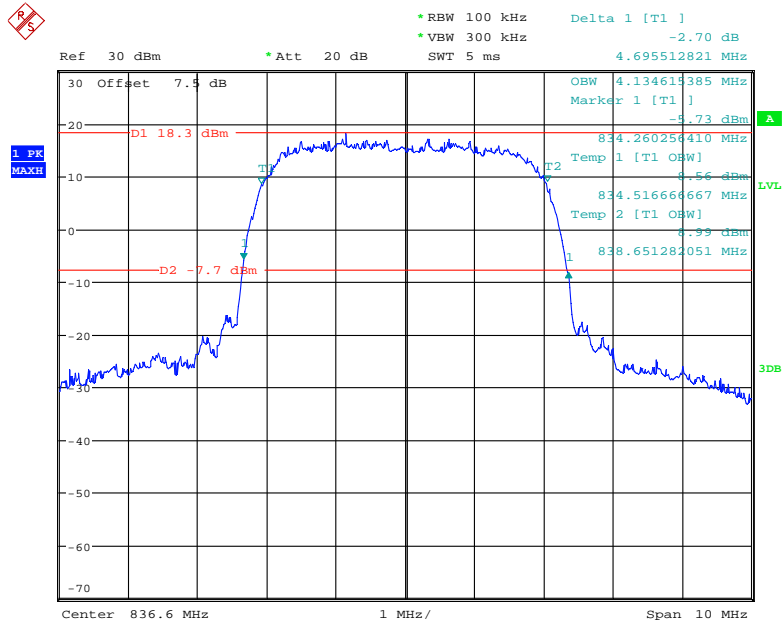


Date: 16.JUN.2018 16:04:14

26 dB Emissions & 99% Occupied Bandwidth for CDMA (1*RTT, BC0) Mode, Middle Channel

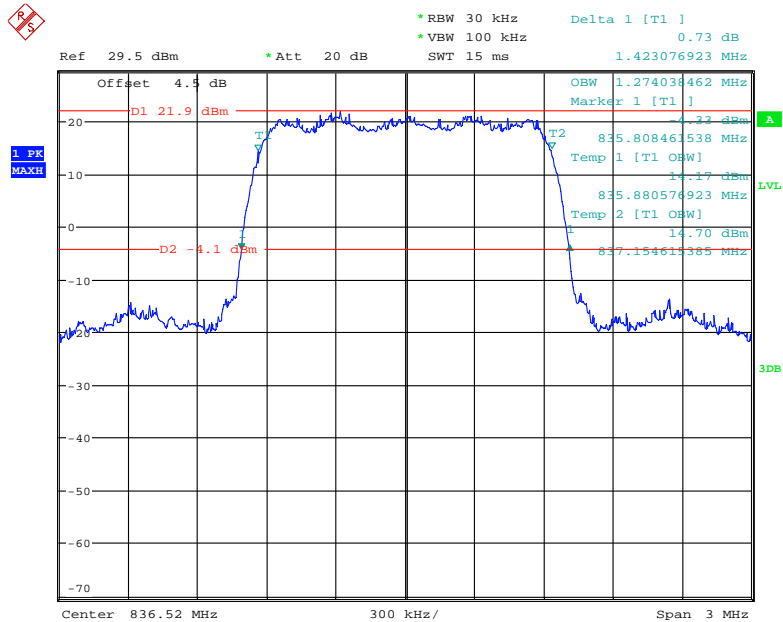

Date: 26.JUN.2018 12:09:24


26 dB Emissions & 99% Occupied Bandwidth for CDMA (EV-DO, BC0) Mode, Middle Channel

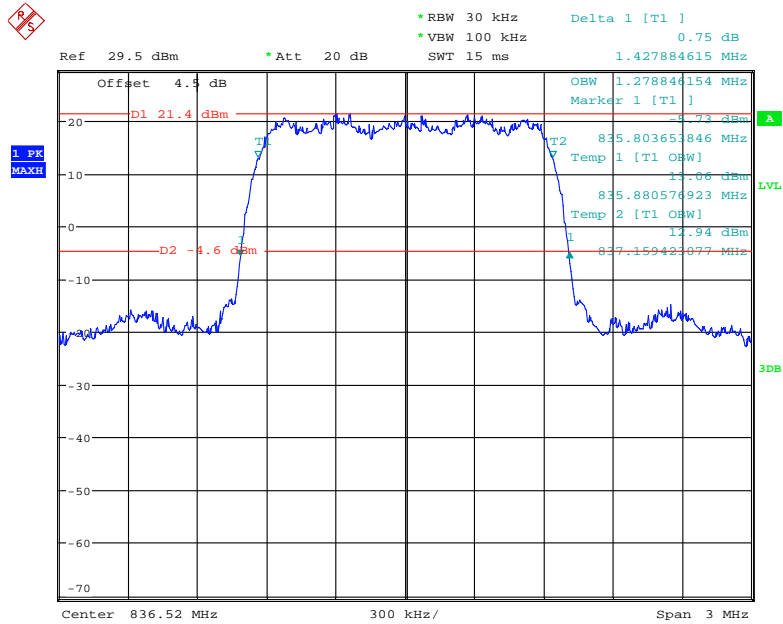

Date: 26.JUN.2018 16:03:30


PCS Band (Part 24E)

26 dB Emissions & 99% Occupied Bandwidth for GSM (GMSK) Mode

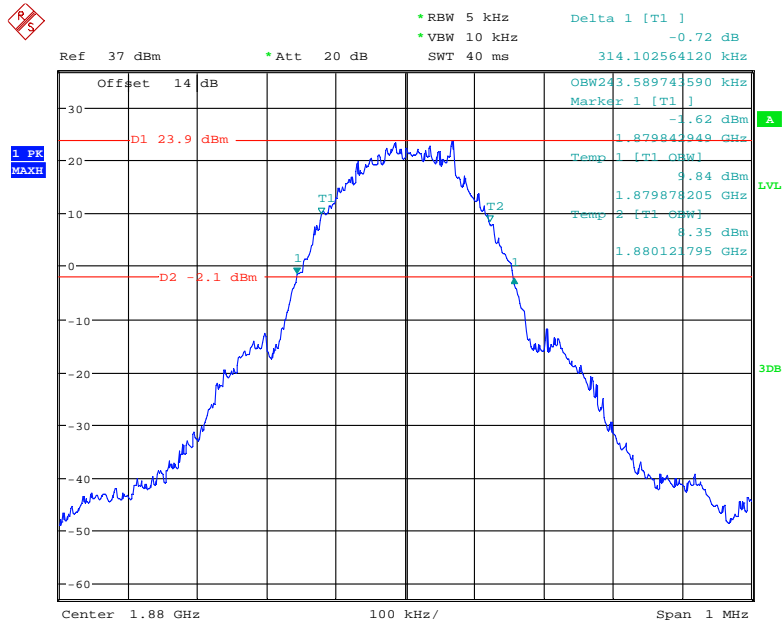


Date: 11.JUN.2018 17:19:20

26 dB Emissions & 99% Occupied Bandwidth for EDGE Mode

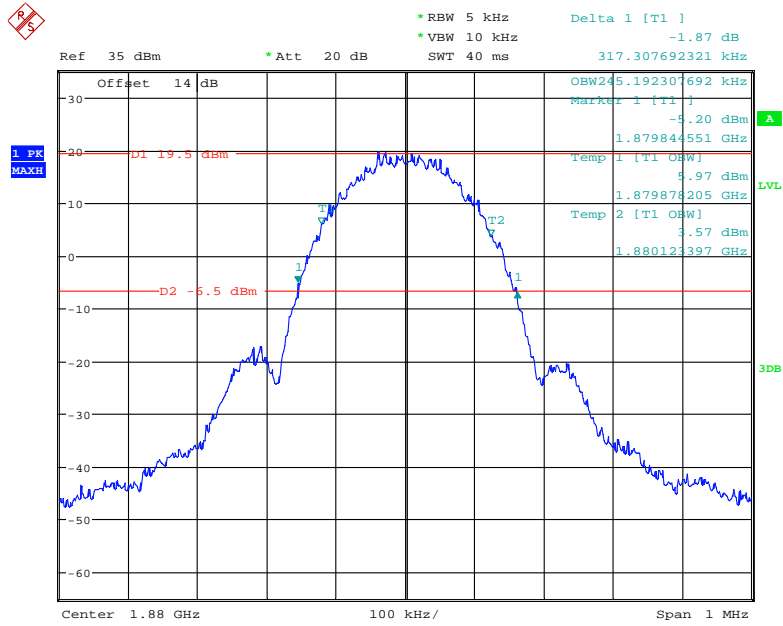


Date: 12.JUN.2018 16:30:57

26 dB Emissions & 99% Occupied Bandwidth for RMC (BPSK) Mode

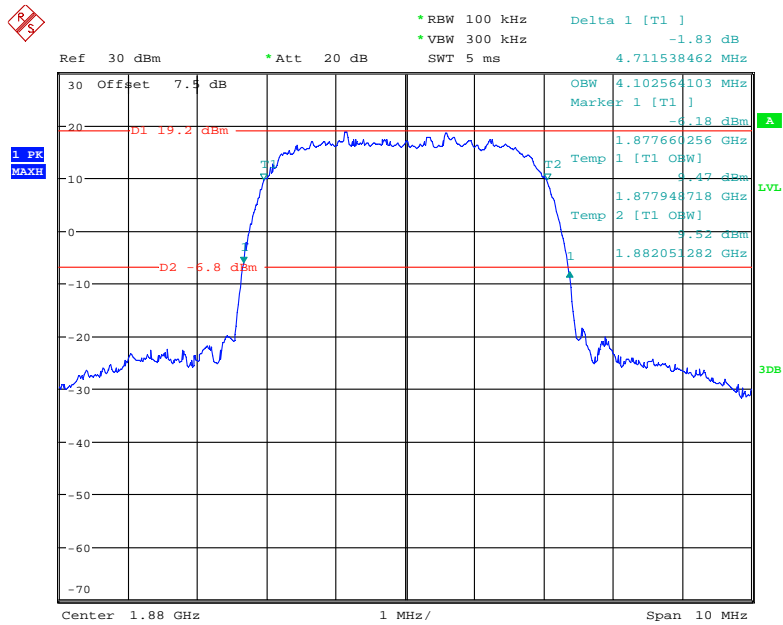


Date: 16.JUN.2018 15:52:00

26 dB Emissions & 99% Occupied Bandwidth for HSUPA (BPSK) Mode

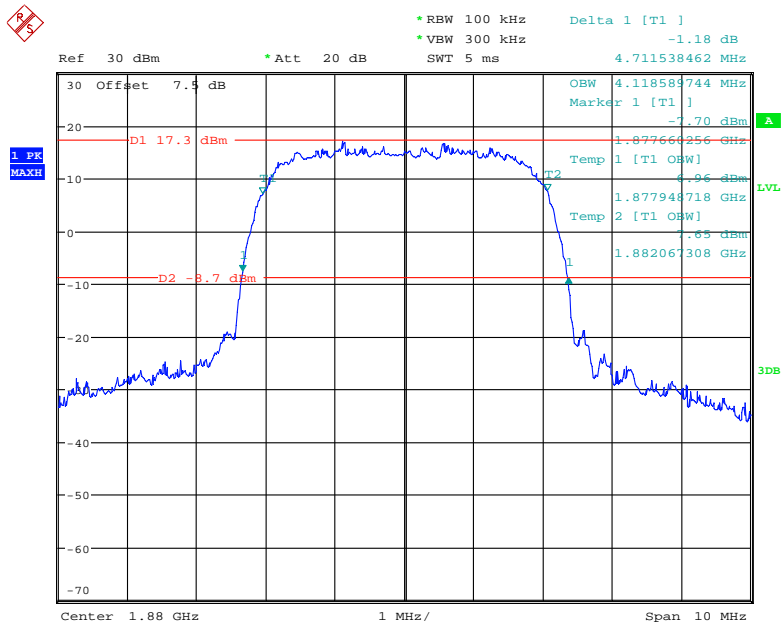


Date: 16.JUN.2018 16:12:23

26 dB Emissions & 99% Occupied Bandwidth for HSDPA (16QAM) Mode

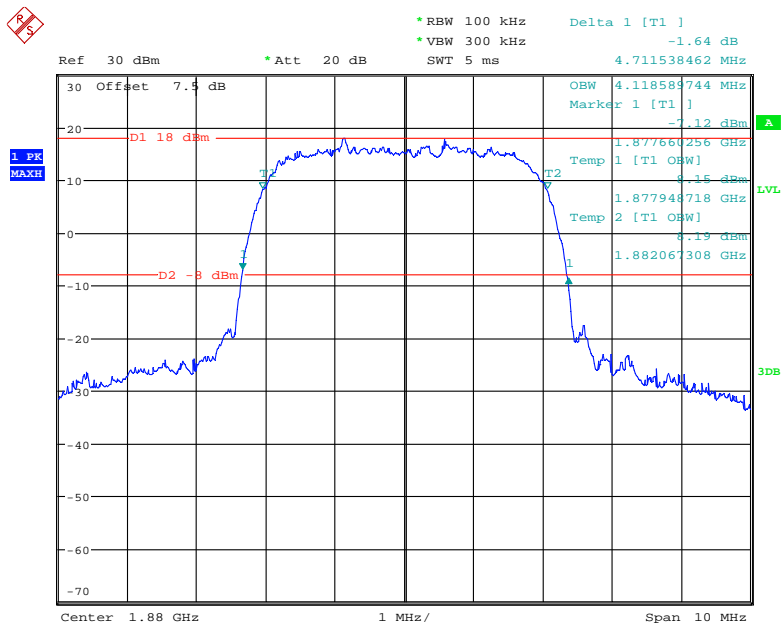


Date: 16.JUN.2018 16:01:30

26 dB Emissions & 99% Occupied Bandwidth for CDMA (1*RTT, BC1) Mode, Middle Channel

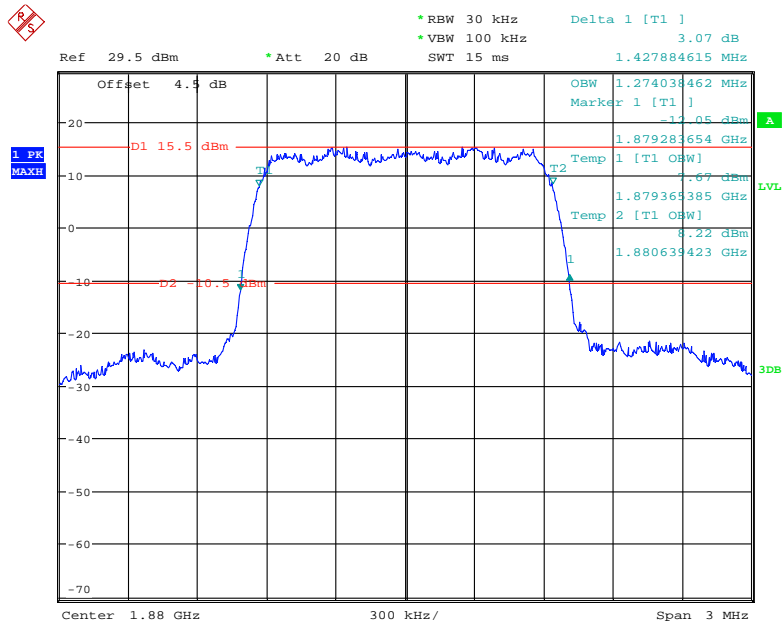

Date: 26.JUN.2018 12:36:12

26 dB Emissions & 99% Occupied Bandwidth for CDMA (EV-DO, BC1) Mode, Middle Channel

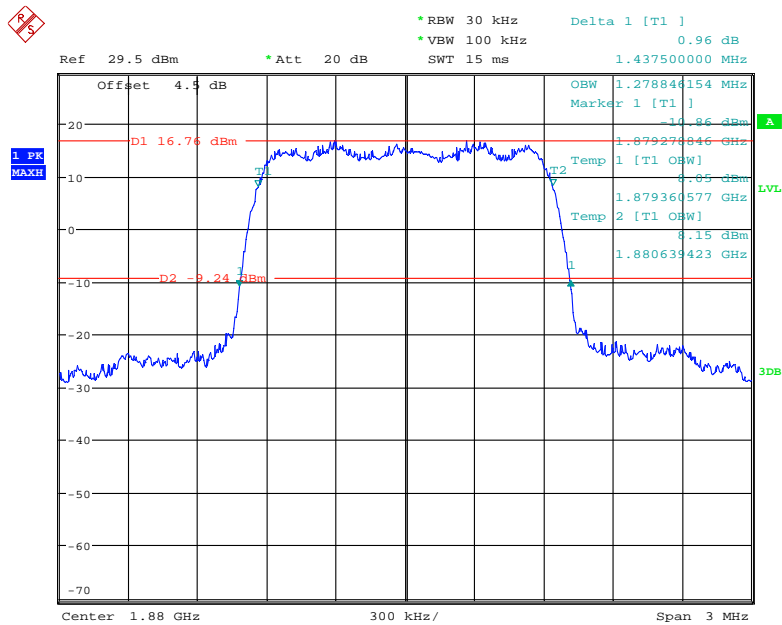


Date: 13.JUL.2018 17:05:02

LTE Band 7: (Middle Channel)


Bandwidth (MHz)	Modulation	99% Occupied Bandwidth (MHz)	26 dB Emission Bandwidth (MHz)
5.0	QPSK	4.52	5.03
	16QAM	4.52	4.99
10.0	QPSK	9.00	9.84
	16QAM	8.96	9.72
15.0	QPSK	13.44	14.66
	16QAM	13.44	14.67
20.0	QPSK	17.92	19.17
	16QAM	17.92	19.32

QPSK (5.0 MHz) - 26 dB Bandwidth & 99% Occupied Bandwidth, Middle channel

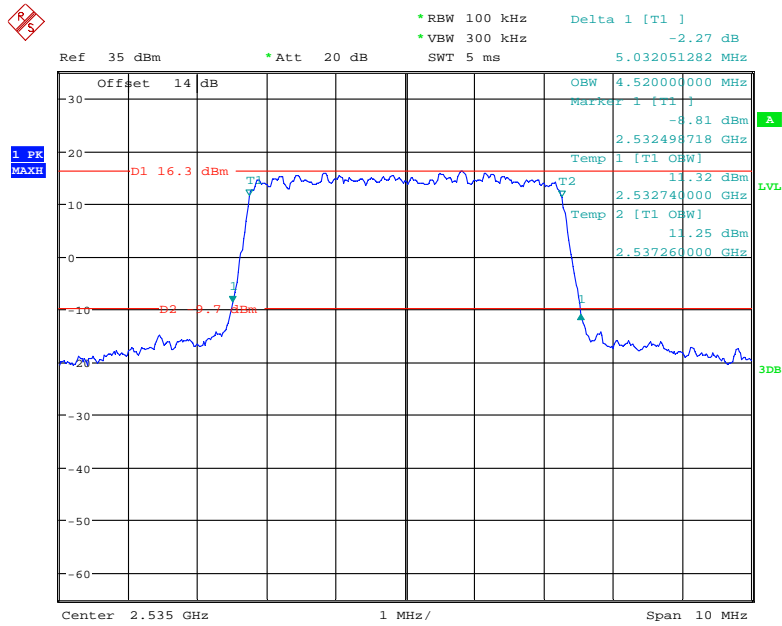


Date: 8.JUN.2018 15:01:17

16-QAM (5.0 MHz) - 26 dB Bandwidth & 99% Occupied Bandwidth, Middle channel

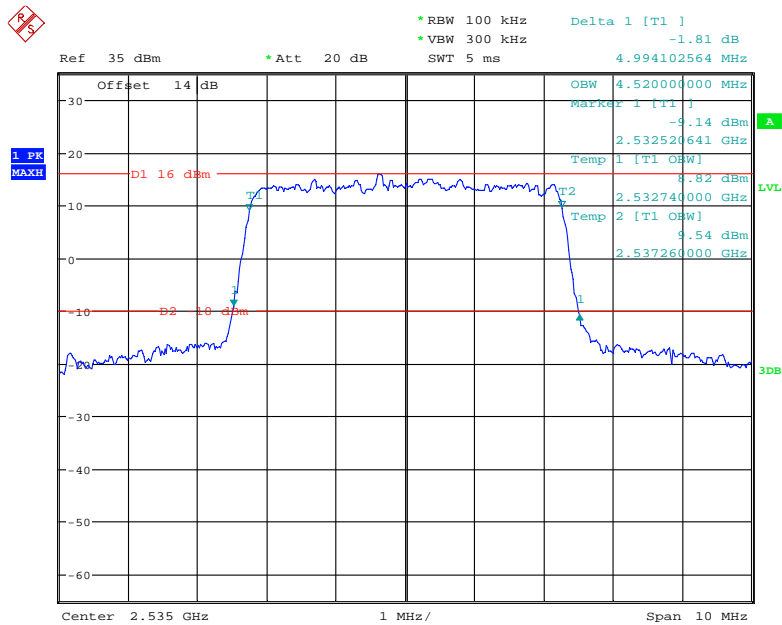


Date: 8.JUN.2018 15:03:43

QPSK (10.0 MHz) - 26 dB Bandwidth & 99% Occupied Bandwidth, Middle channel

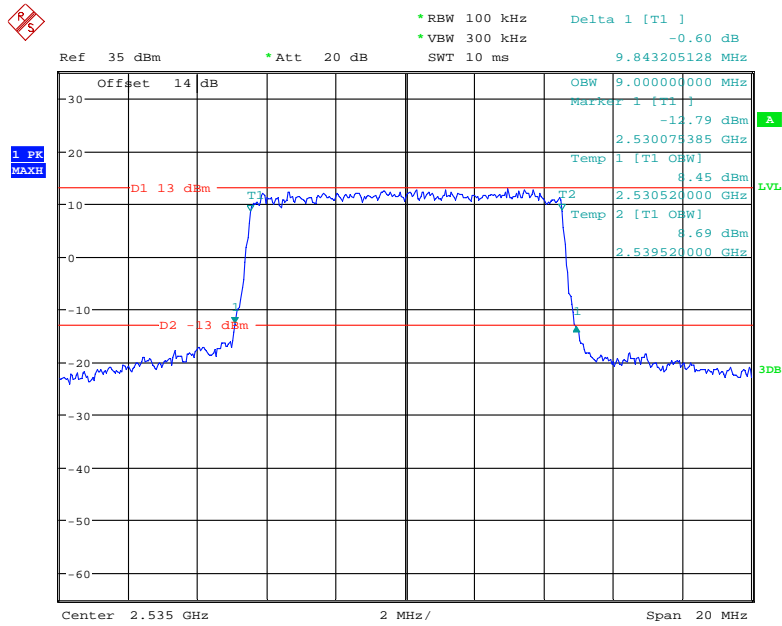


Date: 8.JUN.2018 15:05:25

16-QAM (10.0 MHz) - 26 dB Bandwidth & 99% Occupied Bandwidth, Middle channel

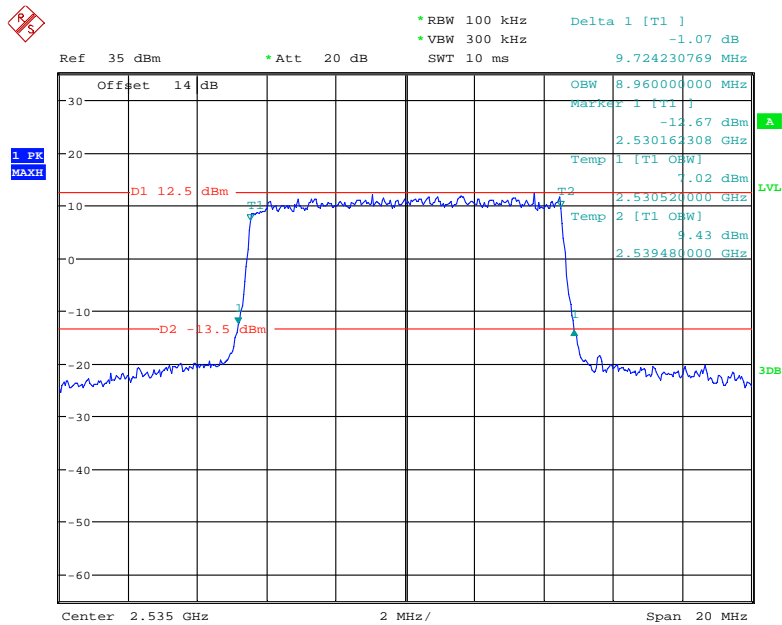


Date: 8.JUN.2018 15:06:46

QPSK (15.0 MHz) - 26 dB Bandwidth & 99% Occupied Bandwidth, Middle channel

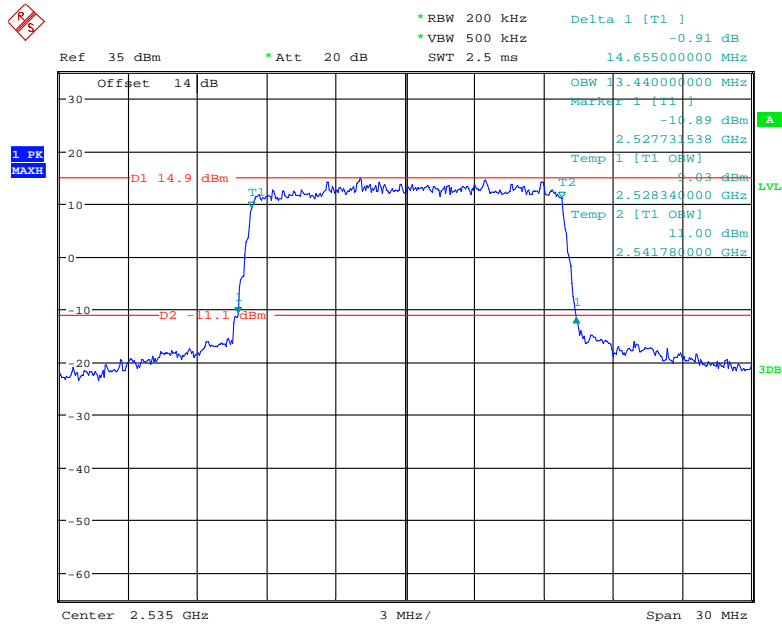

Date: 8.JUN.2018 15:10:29

16-QAM (15.0 MHz) - 26 dB Bandwidth & 99% Occupied Bandwidth, Middle channel

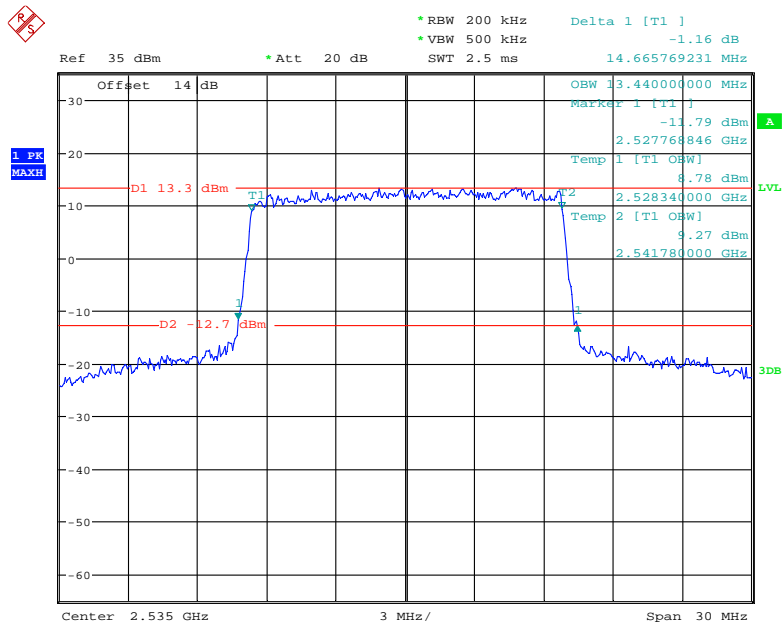


Date: 8.JUN.2018 15:09:12

LTE Band 41: (Middle Channel)


Bandwidth (MHz)	Modulation	99% Occupied Bandwidth (MHz)	26 dB Emission Bandwidth (MHz)
5.0	QPSK	4.52	5.10
	16QAM	4.55	5.56
10.0	QPSK	9.04	10.42
	16QAM	9.01	10.42
15.0	QPSK	13.51	15.59
	16QAM	13.51	15.40
20.0	QPSK	17.95	19.20
	16QAM	17.88	19.26

QPSK (5.0 MHz) - 26 dB Bandwidth & 99% Occupied Bandwidth, Middle channel

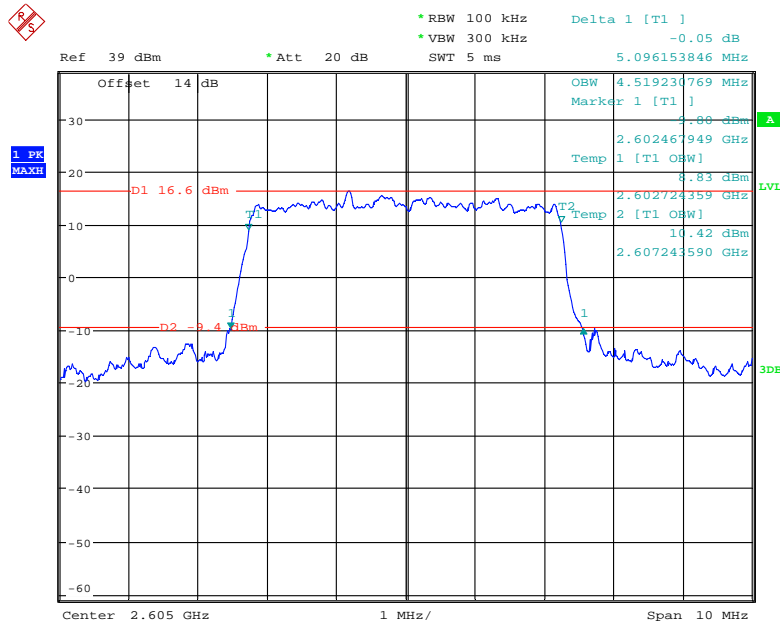


Date: 20.JUN.2018 16:57:34

16-QAM (5.0 MHz) - 26 dB Bandwidth & 99% Occupied Bandwidth, Middle channel

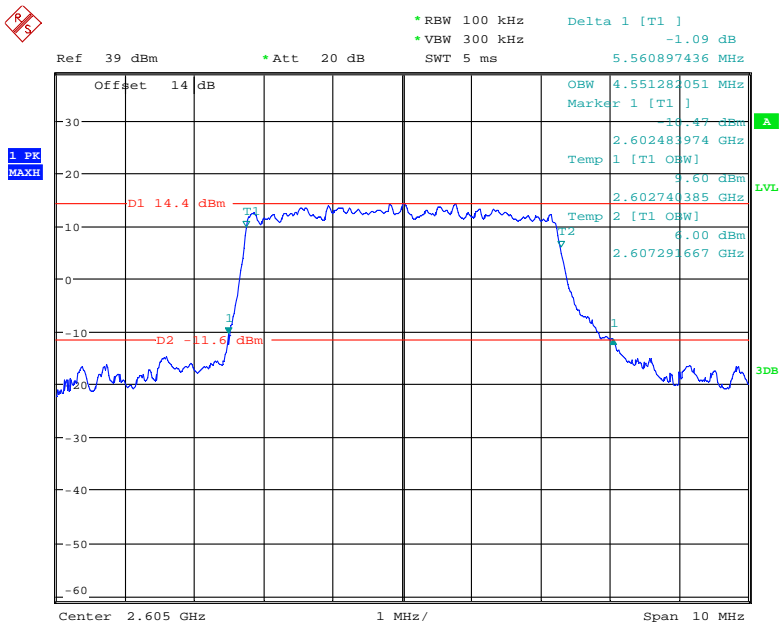


Date: 20.JUN.2018 17:00:53

QPSK (10.0 MHz) - 26 dB Bandwidth & 99% Occupied Bandwidth, Middle channel

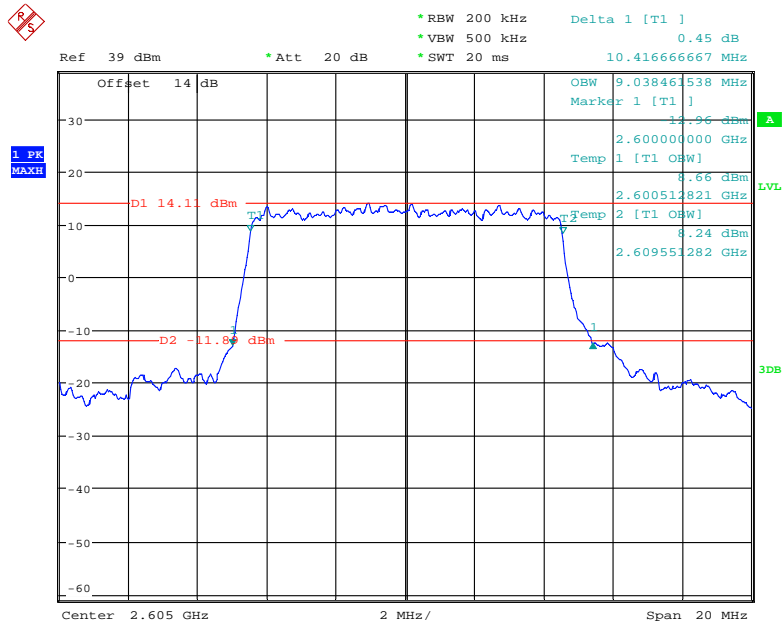


Date: 13.JUL.2018 14:24:36

16-QAM (10.0 MHz) - 26 dB Bandwidth & 99% Occupied Bandwidth, Middle channel

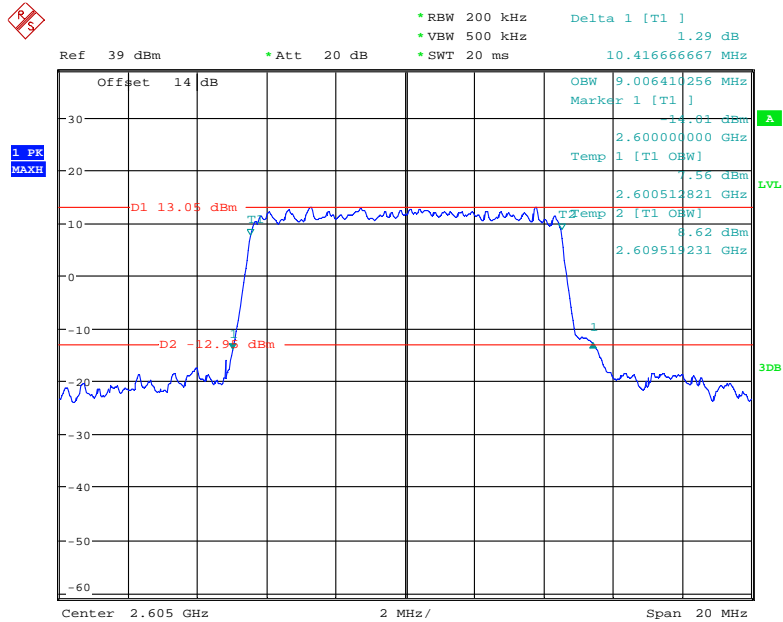


Date: 13.JUL.2018 14:21:49

QPSK (15.0 MHz) - 26 dB Bandwidth & 99% Occupied Bandwidth, Middle channel

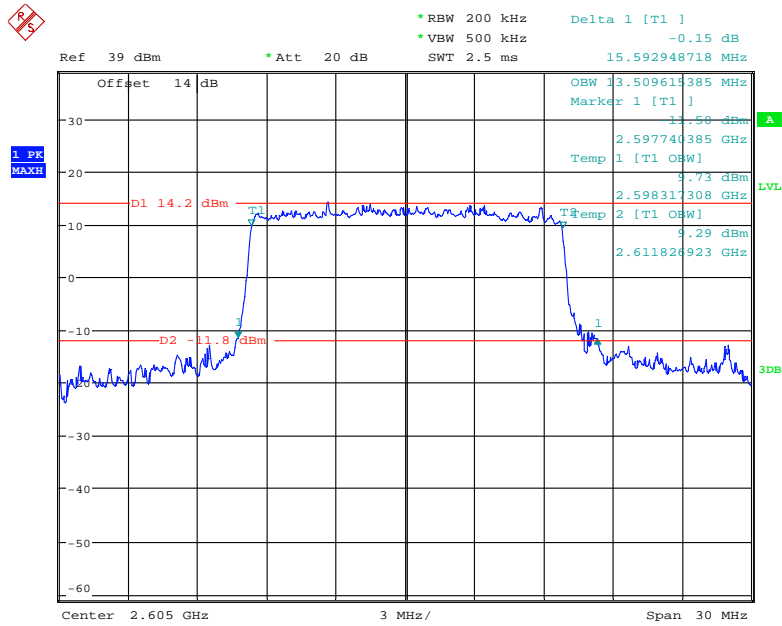


Date: 20.JUN.2018 17:08:28

16-QAM (15.0 MHz) - 26 dB Bandwidth & 99% Occupied Bandwidth, Middle channel

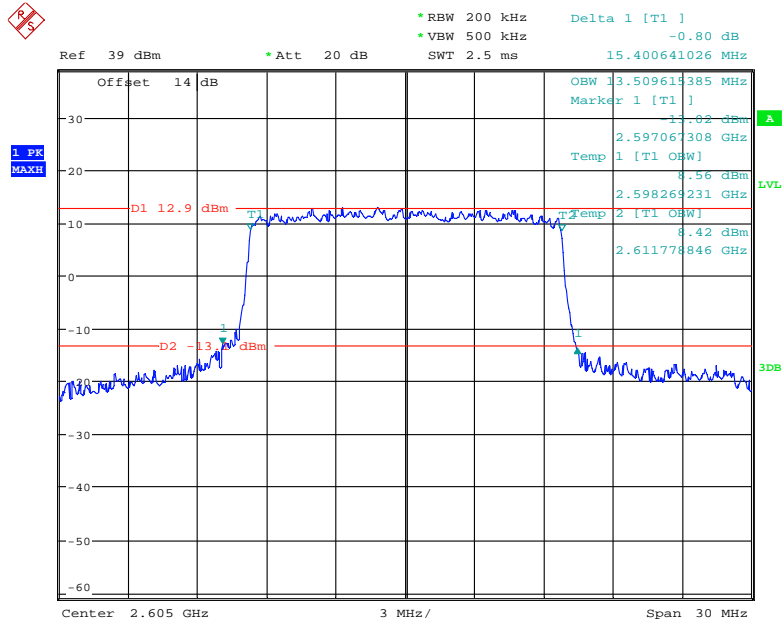


Date: 20.JUN.2018 17:10:44

QPSK (20.0 MHz) - 26 dB Bandwidth & 99% Occupied Bandwidth, Middle channel

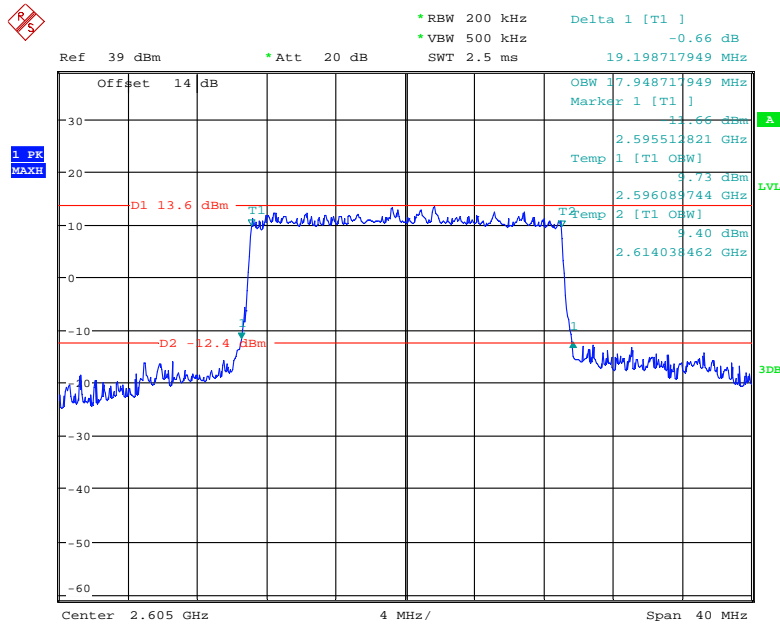

Date: 20.JUN.2018 17:13:18

16-QAM (20.0 MHz) - 26 dB Bandwidth & 99% Occupied Bandwidth, Middle channel

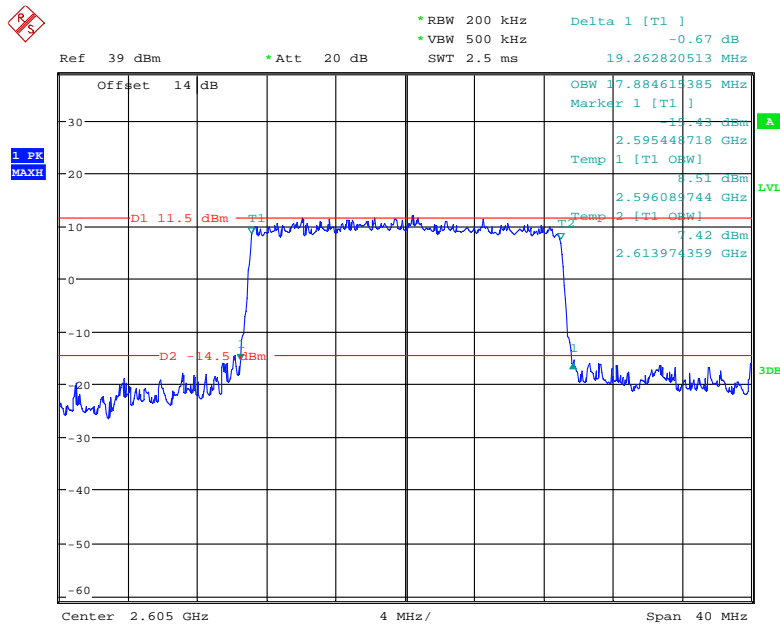

Date: 20.JUN.2018 17:14:40

FCC §2.1051, §22.917(a) & §24.238(a); §27.53 (h) (m) - SPURIOUS EMISSIONS AT ANTENNA TERMINALS


Applicable Standard

FCC §2.1051, §22.917(a) and §24.238(a) and §27.53(h) (m).

The spectrum was to be investigated to the tenth harmonics of the highest fundamental frequency as specified in § 2.1051.

Test Procedure

The RF output of the transceiver was connected to a spectrum analyzer and simulator through appropriate attenuation. The resolution bandwidth of the spectrum analyzer was set at 1MHz. Sufficient scans were taken to show any out of band emissions up to 10th harmonic.

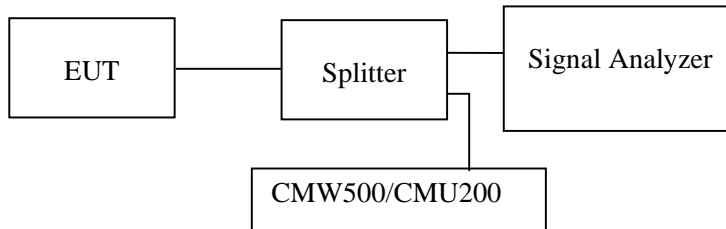

Test Data

Environmental Conditions

Temperature:	24~25 °C
Relative Humidity:	52~53 %
ATM Pressure:	101.0~101.2 kPa

The testing was performed by Nancy Wang from 2018-06-08 to 2018-06-26.


Test result: Compliance.

EUT operation mode: transmitting

Please refer to the following plots.

Cellular Band (Part 22H)


30 MHz – 1 GHz (GSM Mode)

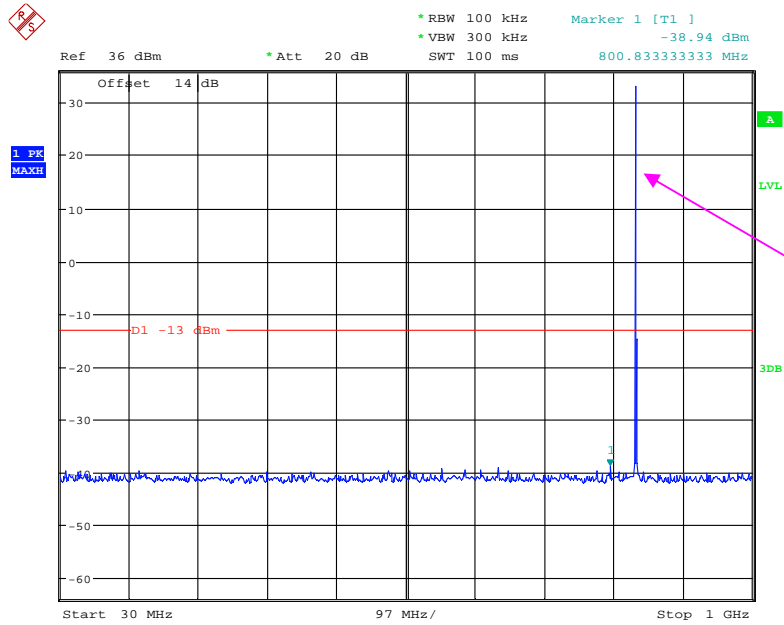

Fundamental test


Date: 11.JUN.2018 16:34:26

1 GHz – 10 GHz (GSM Mode)

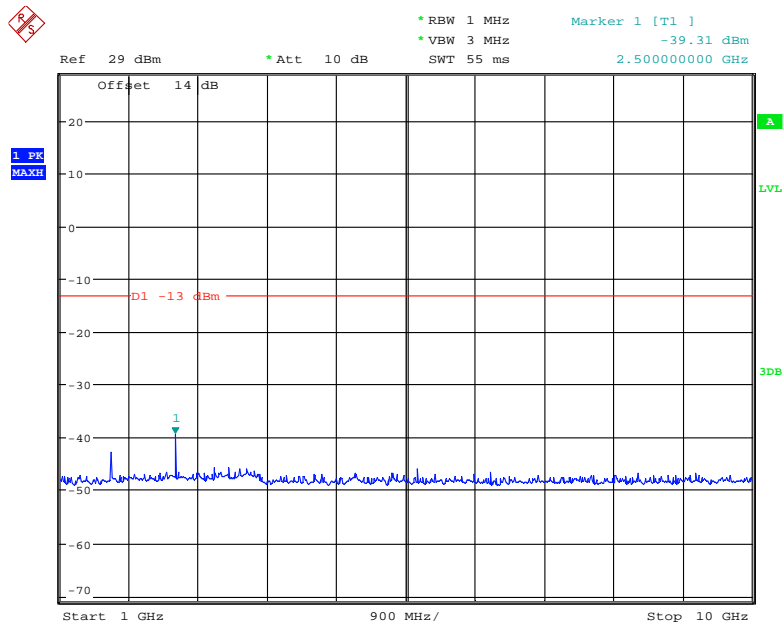

Date: 11.JUN.2018 16:47:53


30 MHz – 1 GHz CDMA (1*RTT BC 0) Mode, Middle channel

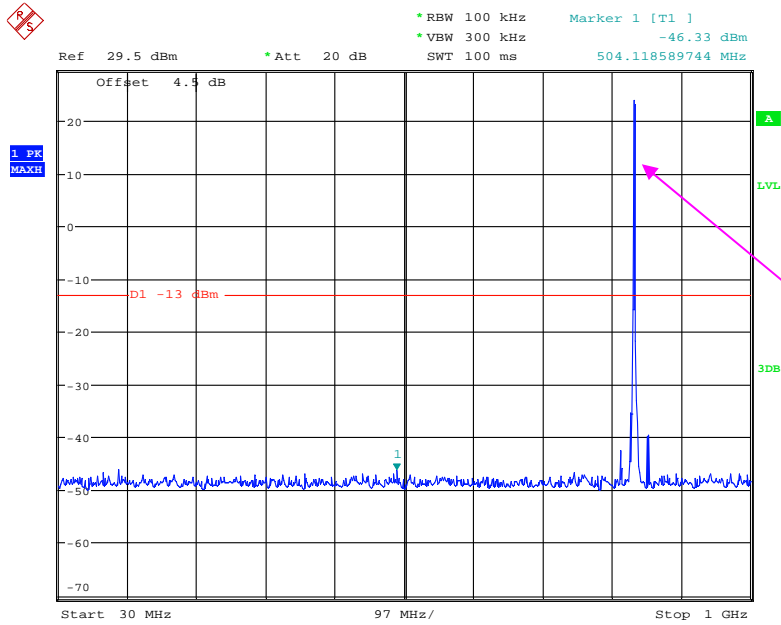

Fundamental test


Date: 26.JUN.2018 14:57:29

1 GHz – 10 GHz CDMA (1*RTT BC 0) Mode, Middle channel

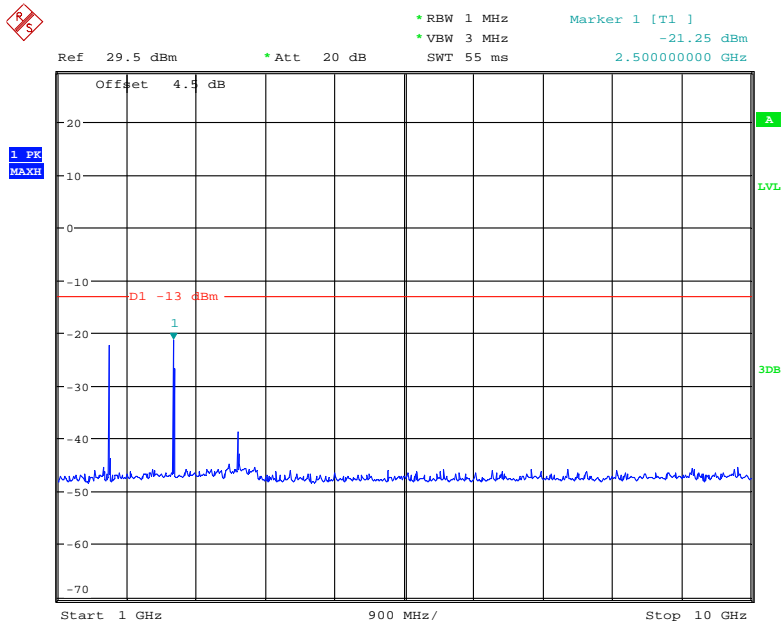


Date: 26.JUN.2018 14:56:56

30 MHz – 1 GHz CDMA (EV-DO, BC0) Mode, Middle channel

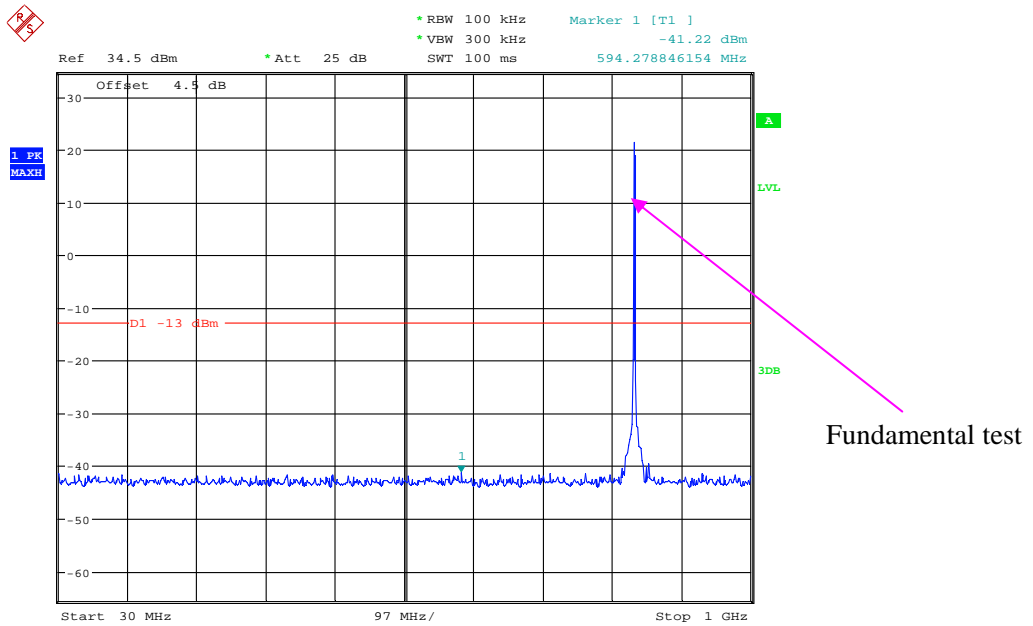

Date: 26.JUN.2018 16:25:47


1 GHz – 10 GHz CDMA (EV-DO, BC0) Mode, Middle channel

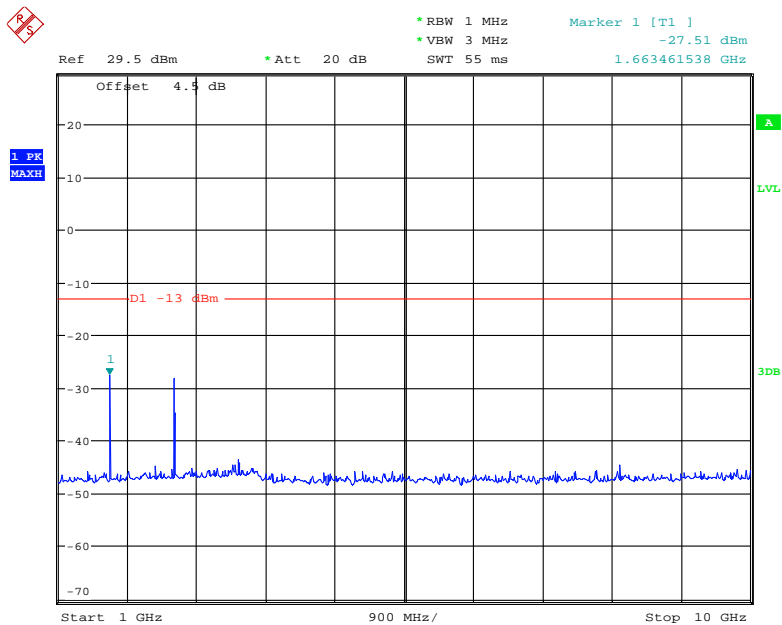

Date: 26.JUN.2018 16:35:02


PCS Band (Part 24E)

30 MHz – 1 GHz (GSM Mode)

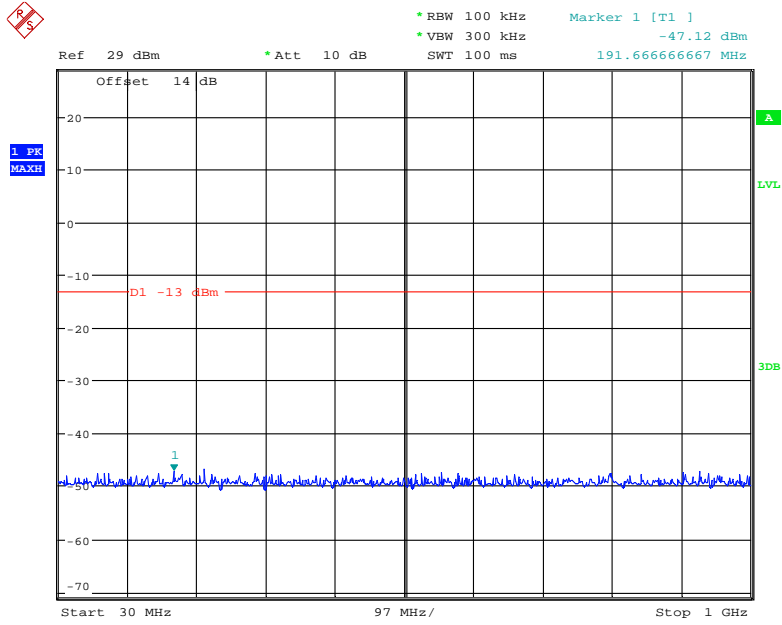

Date: 11.JUN.2018 17:04:22


1 GHz – 2 GHz (GSM Mode)

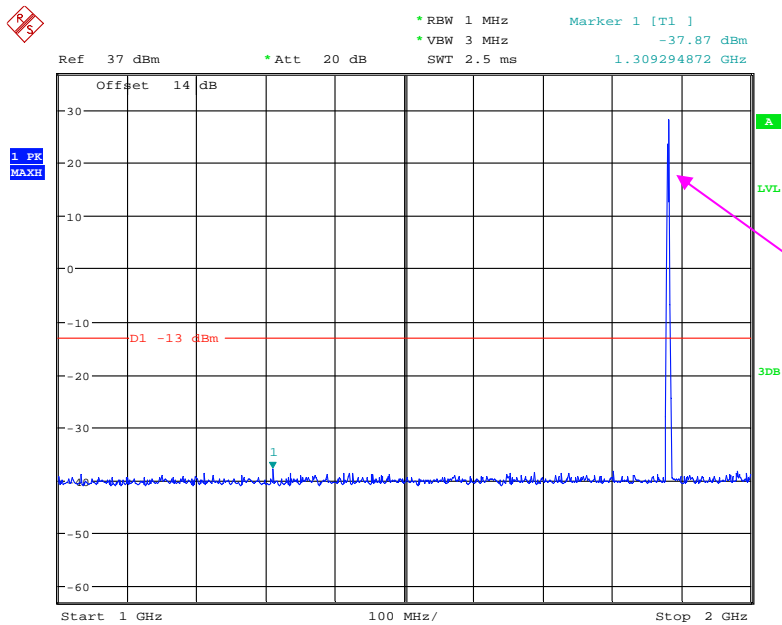

Fundamental test


Date: 11.JUN.2018 17:06:30

2 GHz – 20 GHz (GSM Mode)

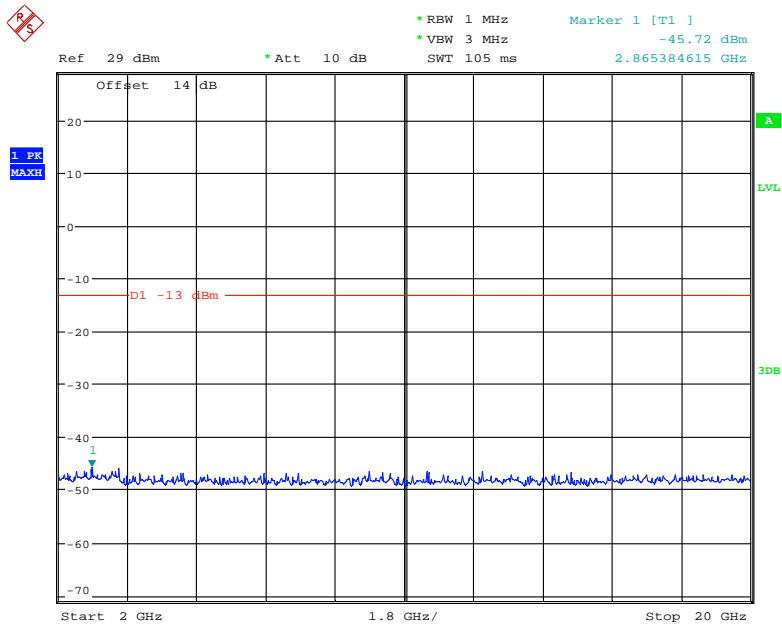


Date: 11.JUN.2018 17:07:46

30 MHz – 1 GHz CDMA (1*RTT BC 1) Mode, Middle channel

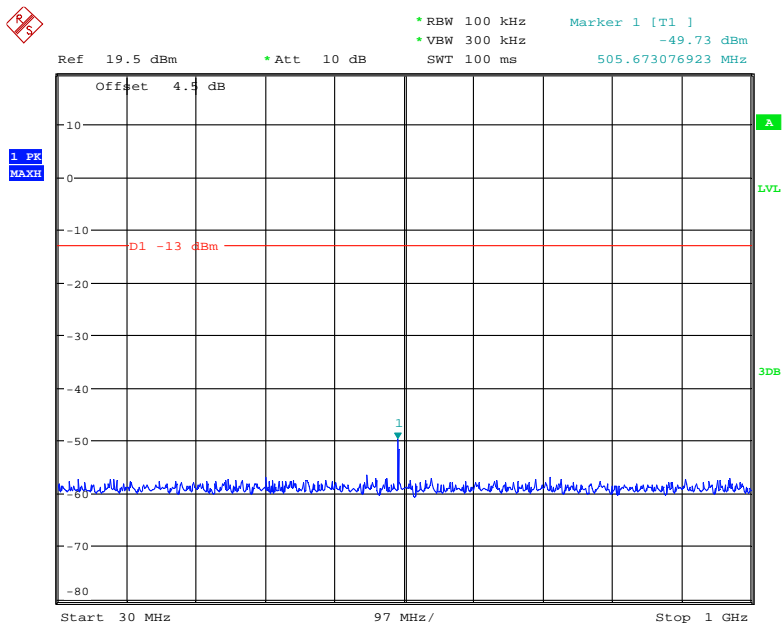

Date: 26.JUN.2018 15:12:21


1 GHz – 2 GHz CDMA (1*RTT BC 1) Mode, Middle channel

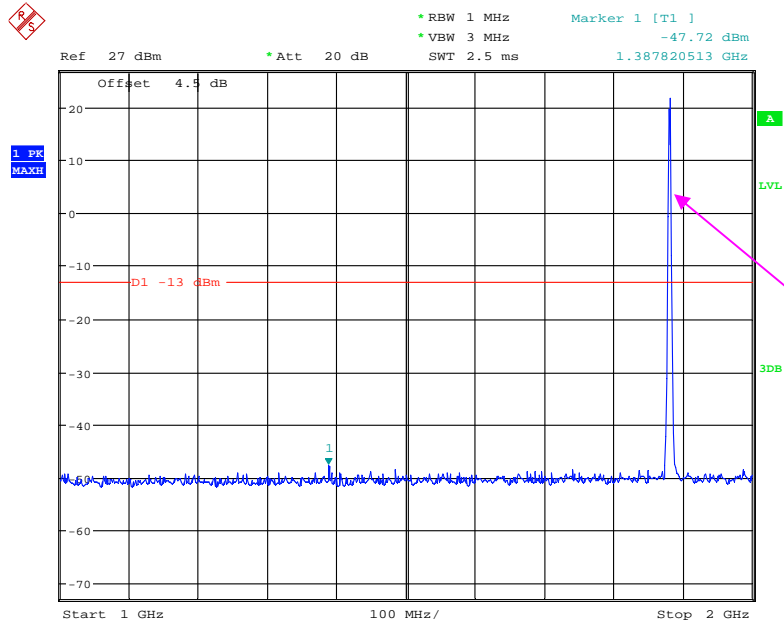

Fundamental test


Date: 26.JUN.2018 15:11:50

2 GHz – 20 GHz CDMA (1*RTT BC 1) Mode, Middle channel

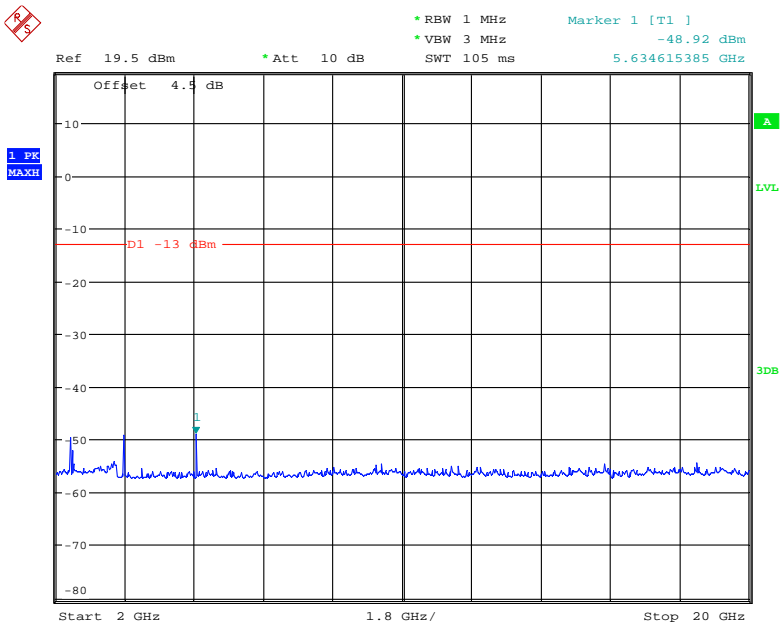


Date: 26.JUN.2018 15:11:17

30 MHz – 1 GHz CDMA (EV-DO, BC1) Mode, Middle channel

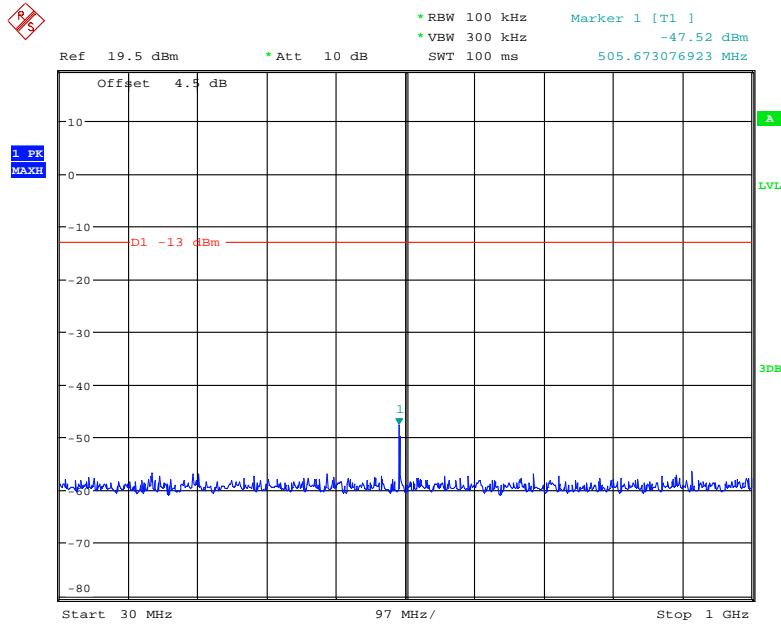


Date: 26.JUN.2018 16:36:40

1 GHz – 2 GHz CDMA (EV-DO, BC1) Mode, Middle channel

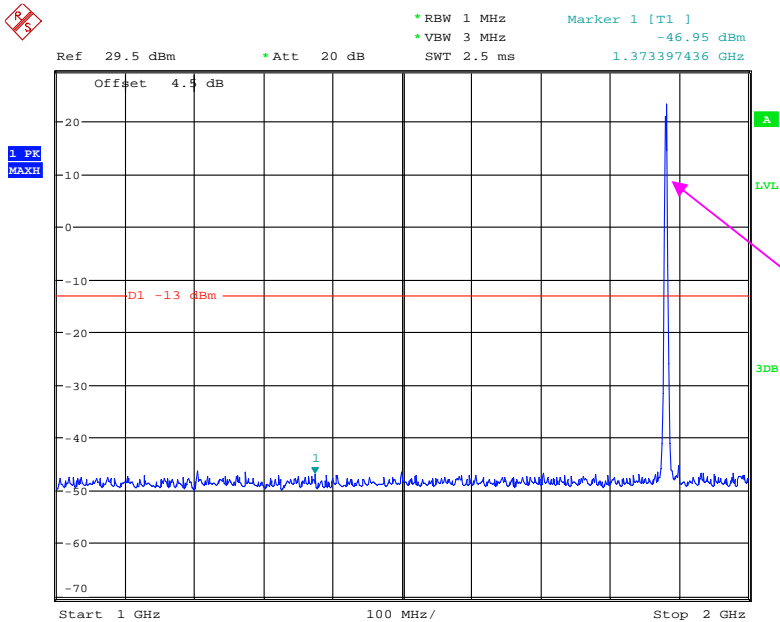


Date: 26.JUN.2018 16:37:15

2 GHz – 20 GHz CDMA (EV-DO, BC1) Mode, Middle channel

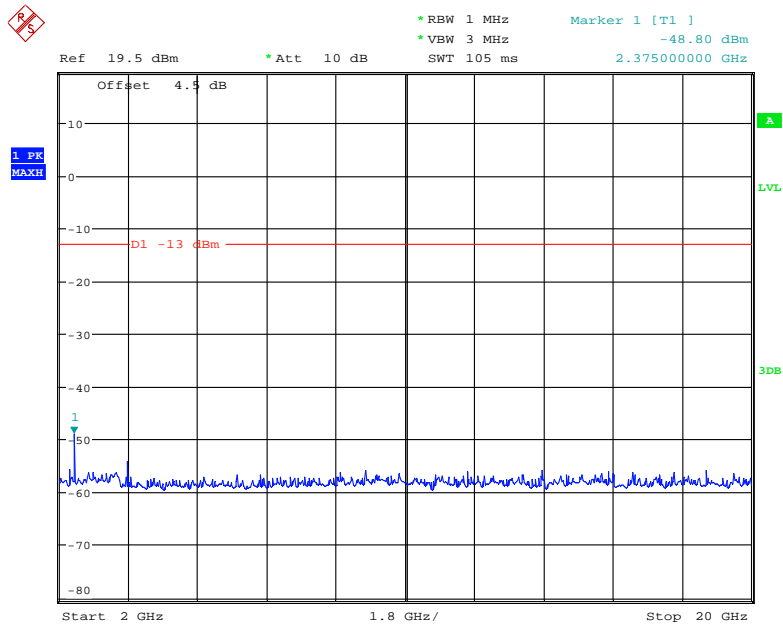


Date: 26.JUN.2018 16:37:32

30 MHz – 1 GHz (WCDMA Mode)

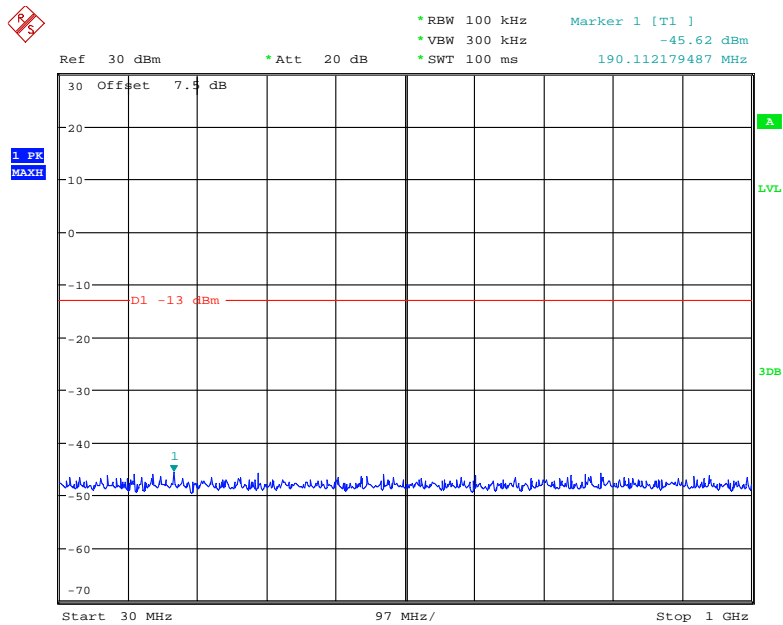


Date: 16.JUN.2018 16:52:43

1 GHz – 2 GHz (WCDMA Mode)

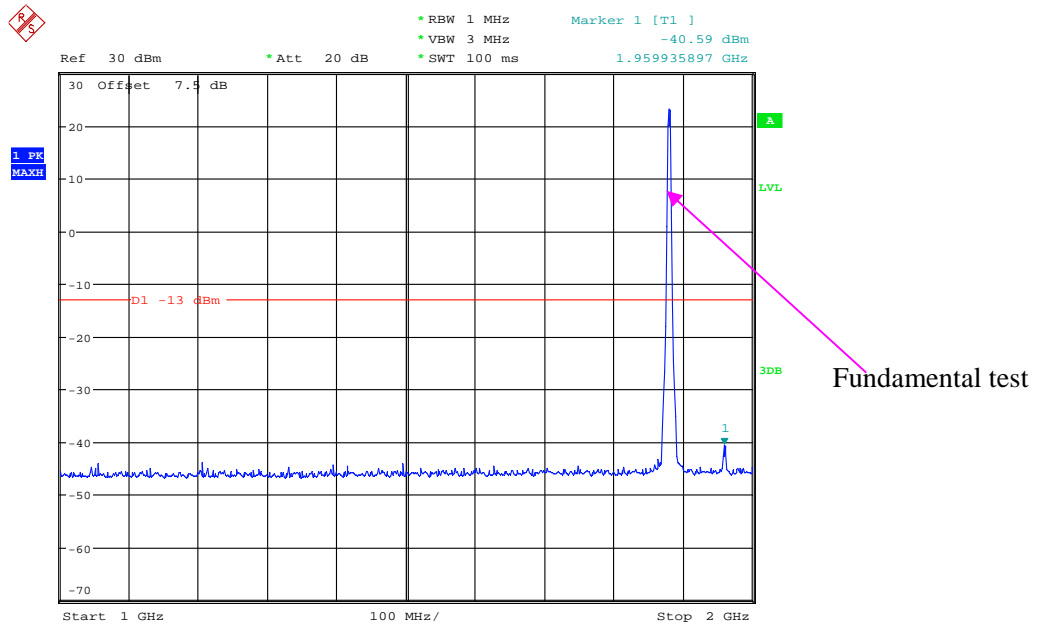

Date: 16.JUN.2018 16:53:55


2 GHz – 20 GHz (WCDMA Mode)

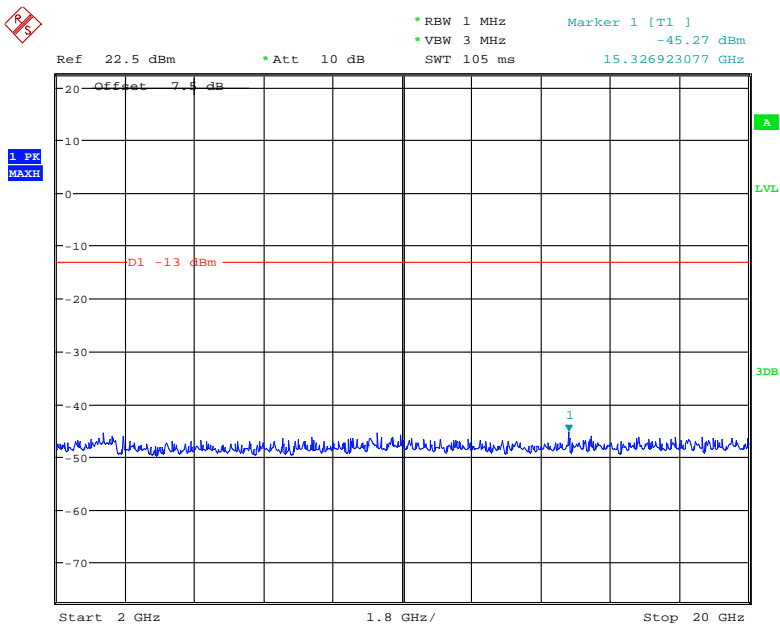

Date: 16.JUN.2018 16:54:56


LTE Band 7:

30 MHz - 1 GHz (5.0 MHz, Middle Channel)

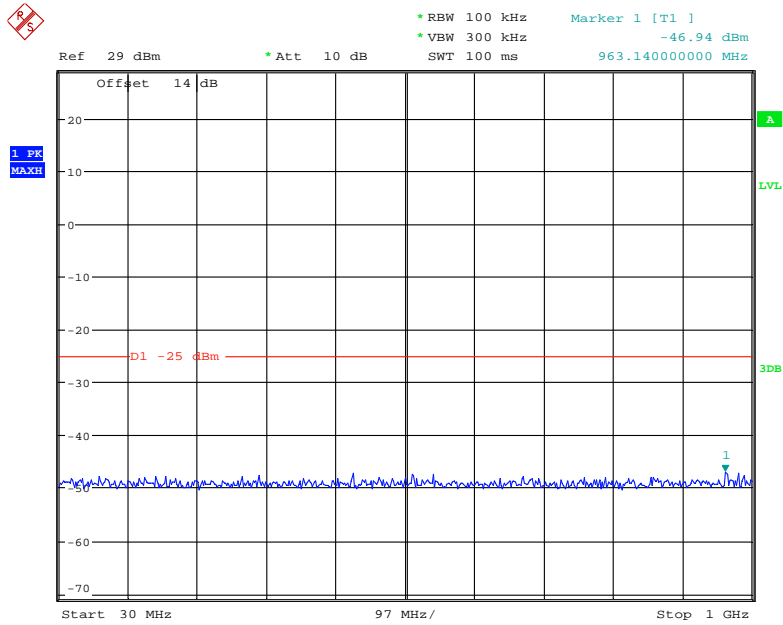

Date: 8.JUN.2018 16:58:02


1 GHz - 3 GHz (5.0 MHz, Middle Channel)

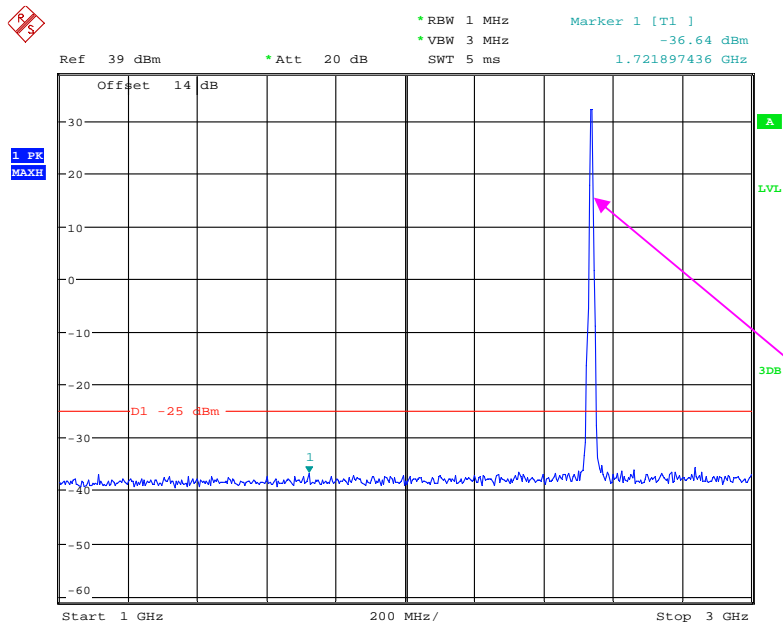

Fundamental test


Date: 8.JUN.2018 16:59:48

3 GHz – 26 GHz (5.0 MHz, Middle Channel)

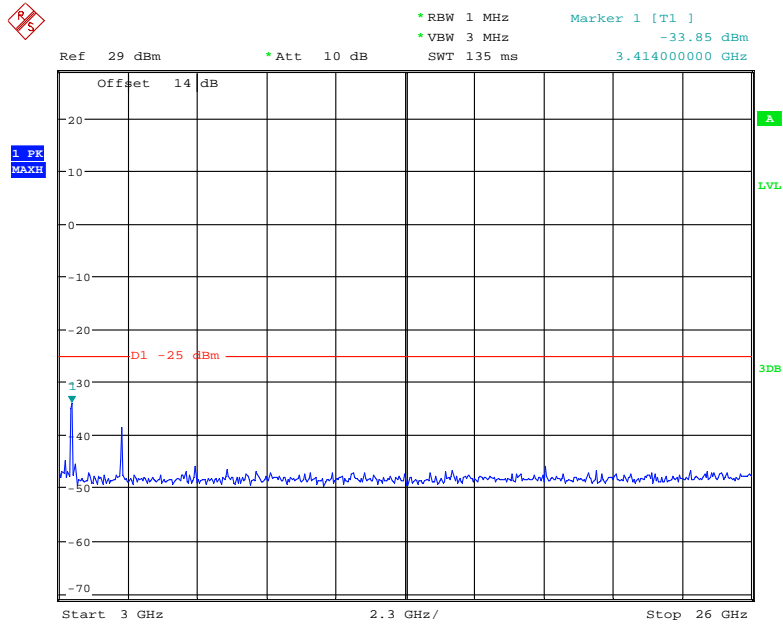


Date: 8.JUN.2018 17:01:05

30 MHz - 1 GHz (10.0 MHz, Middle Channel)

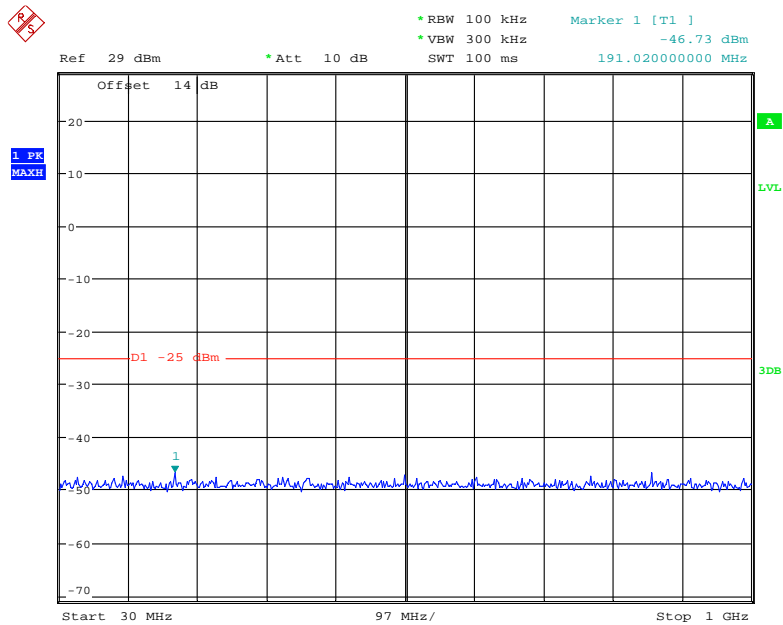


Date: 8.JUN.2018 17:05:22

1 GHz – 3 GHz (10.0 MHz, Middle Channel)

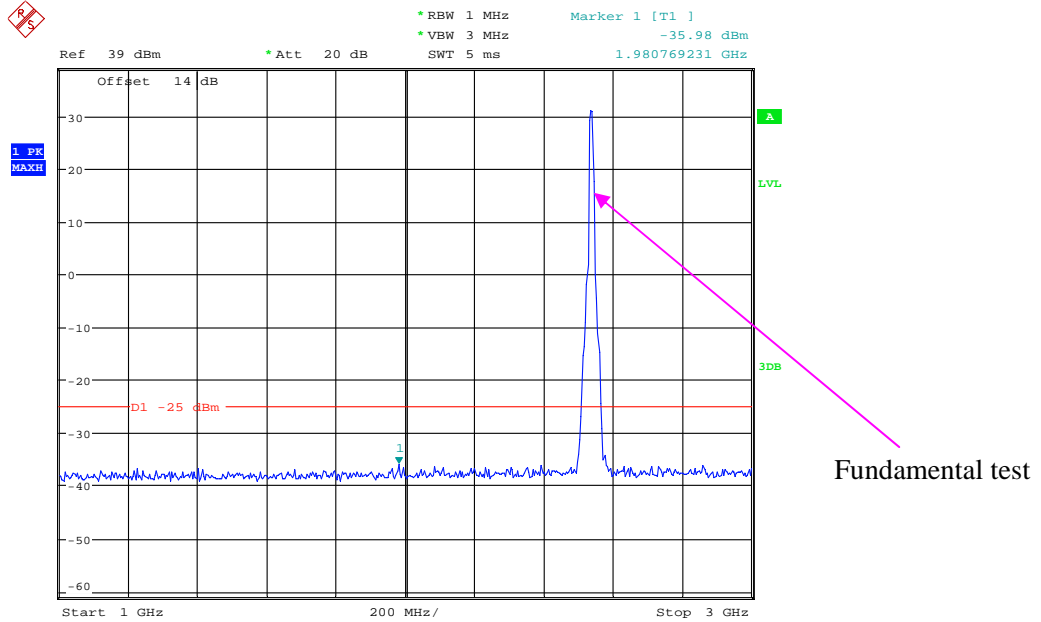


Date: 8.JUN.2018 17:03:44

3 GHz – 26 GHz (10.0 MHz, Middle Channel)

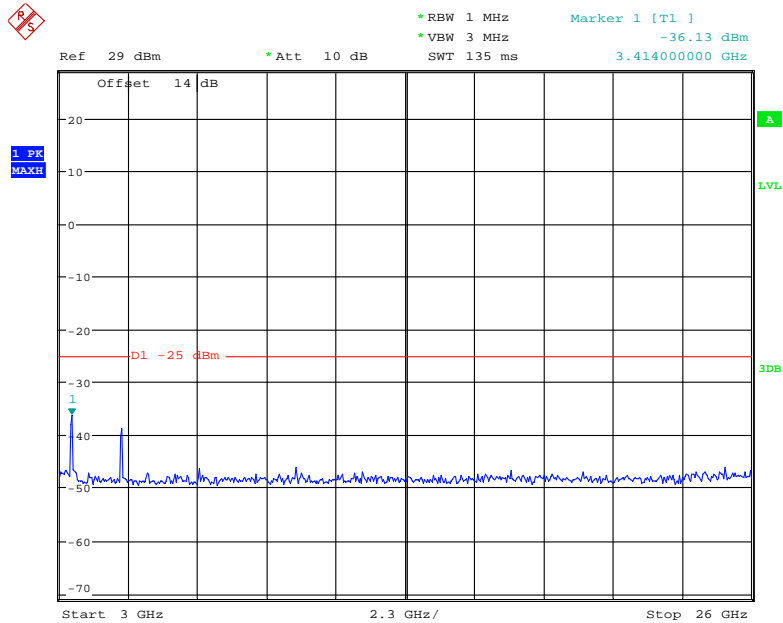


Date: 8.JUN.2018 17:02:28

30 MHz - 1 GHz (15.0 MHz, Middle Channel)

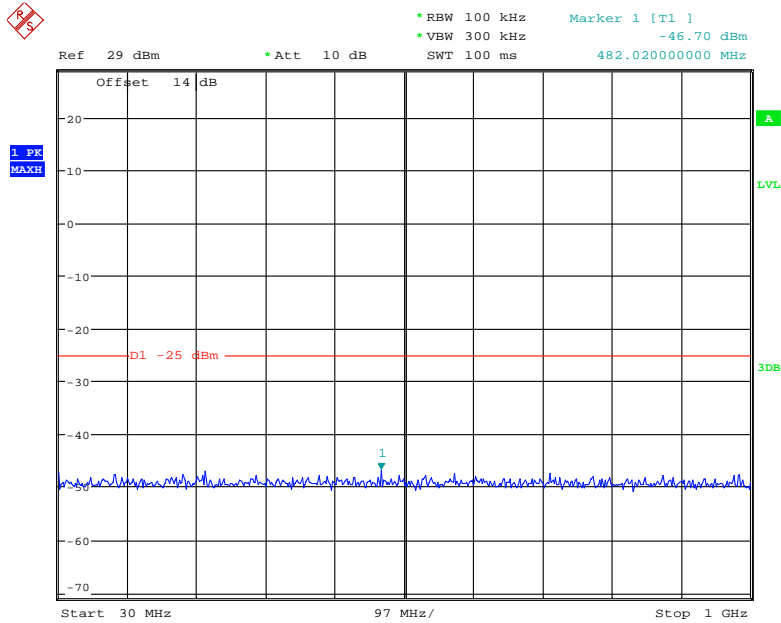


Date: 8.JUN.2018 17:08:14

1 GHz - 3 GHz (15.0 MHz, Middle Channel)

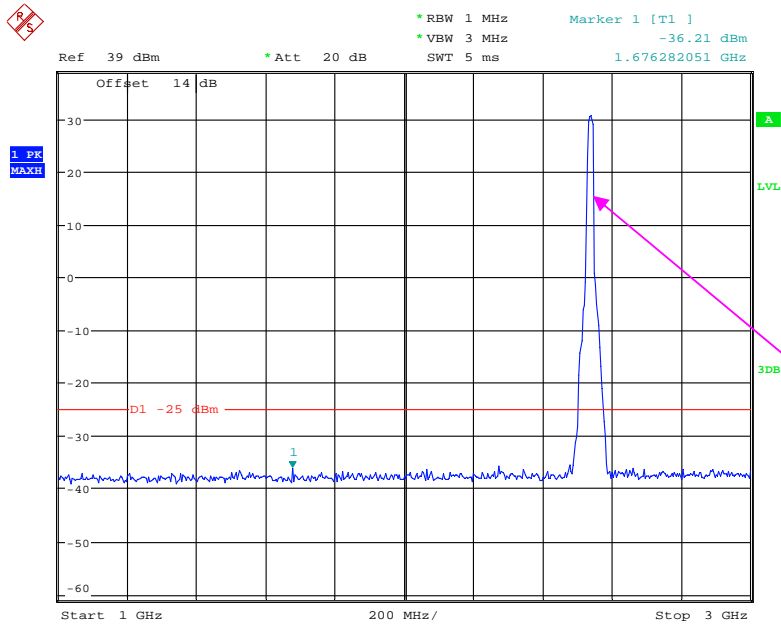


Date: 8.JUN.2018 17:10:08

3 GHz – 26 GHz (15.0 MHz, Middle Channel)

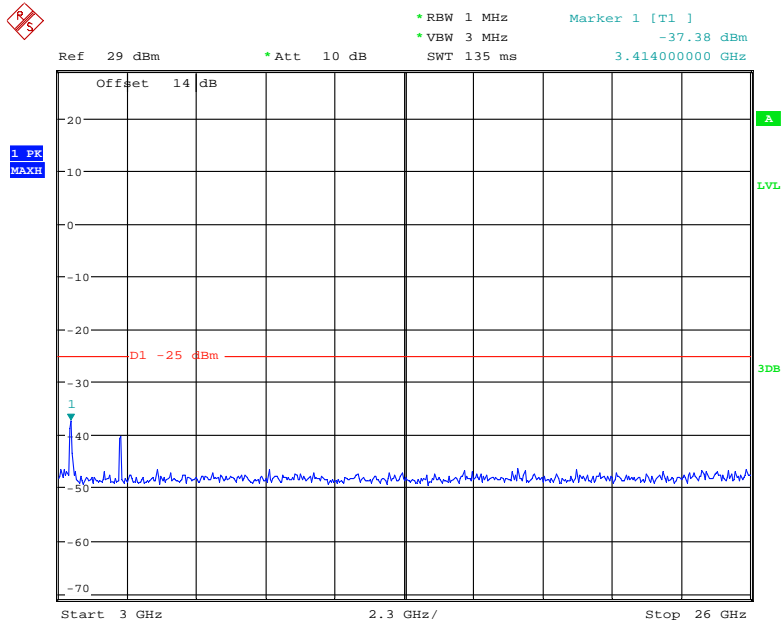


Date: 8.JUN.2018 17:12:11

30 MHz - 1 GHz (20.0 MHz, Middle Channel)

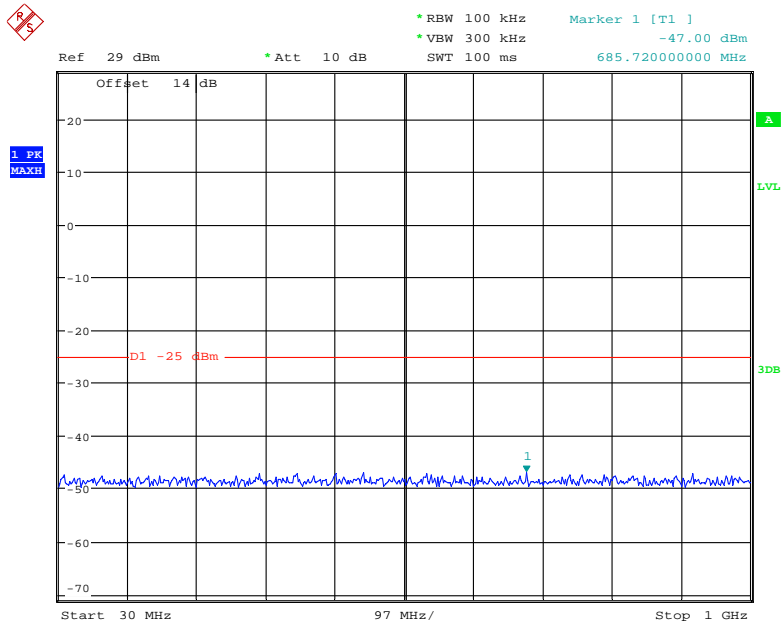


Date: 8.JUN.2018 17:20:45

1 GHz – 3 GHz (20.0 MHz, Middle Channel)

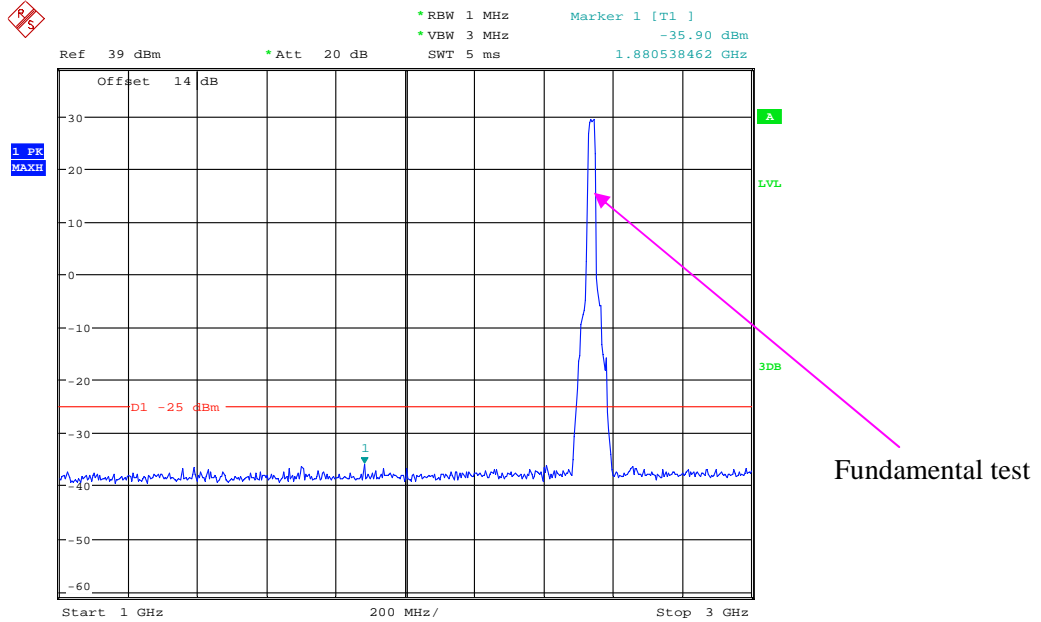

Date: 8.JUN.2018 17:18:34


3 GHz – 26 GHz (20.0 MHz, Middle Channel)

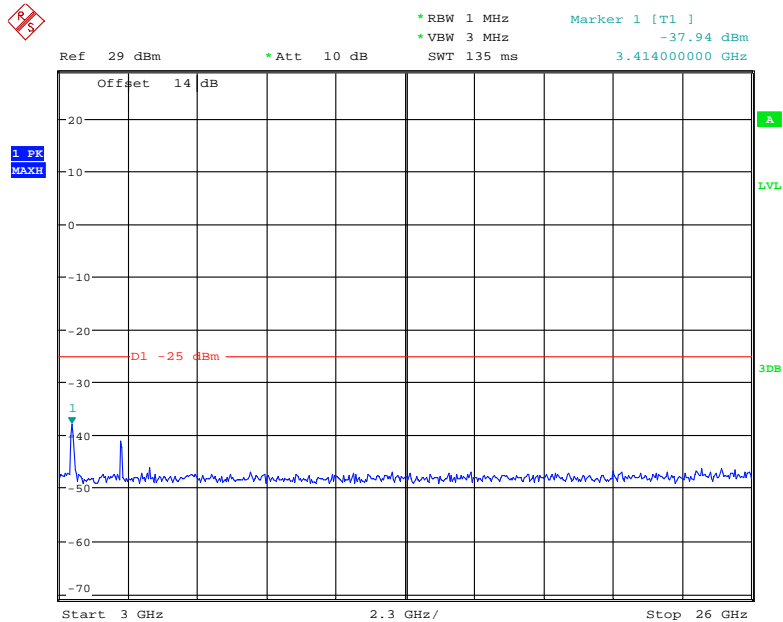

Date: 8.JUN.2018 17:15:26


LTE Band 41:

30 MHz - 1 GHz (5.0 MHz, Middle Channel)

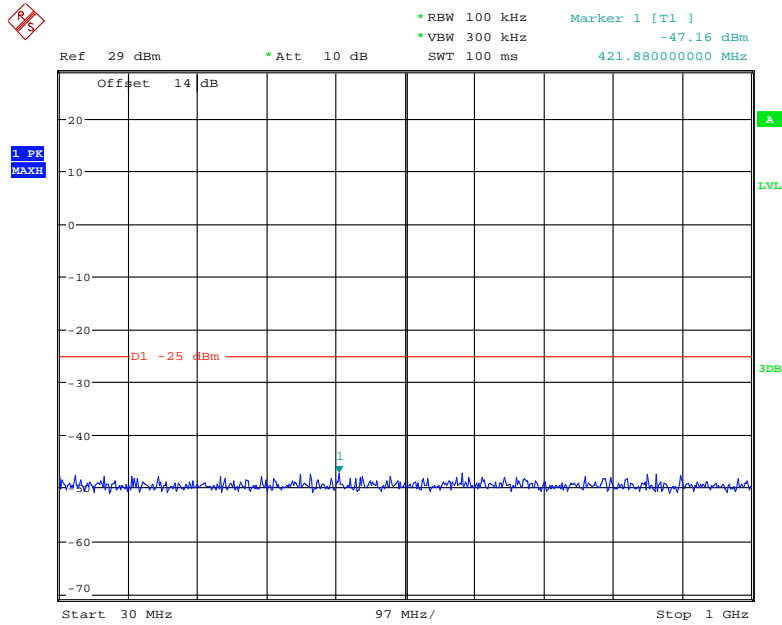


Date: 8.JUN.2018 16:16:22

1 GHz - 3 GHz (5.0 MHz, Middle Channel)

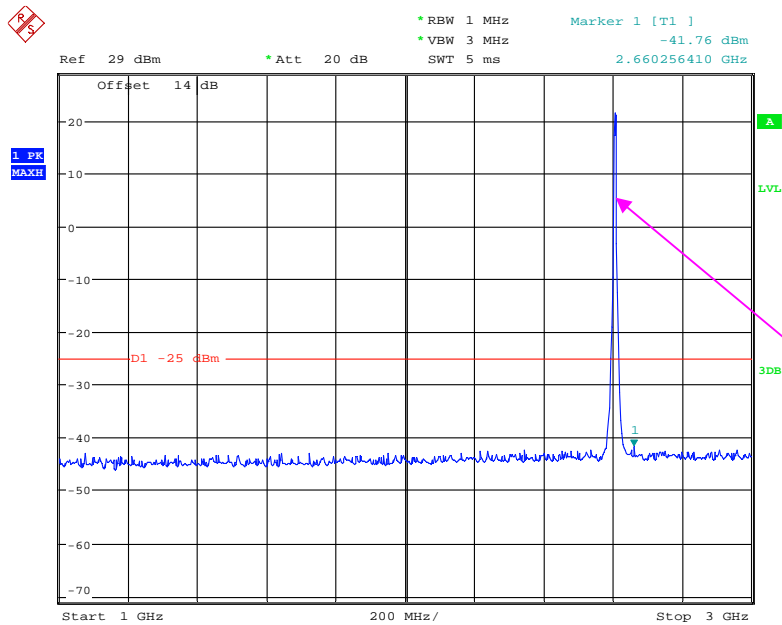


Date: 20.JUN.2018 16:27:14

3 GHz – 26 GHz (5.0 MHz, Middle Channel)

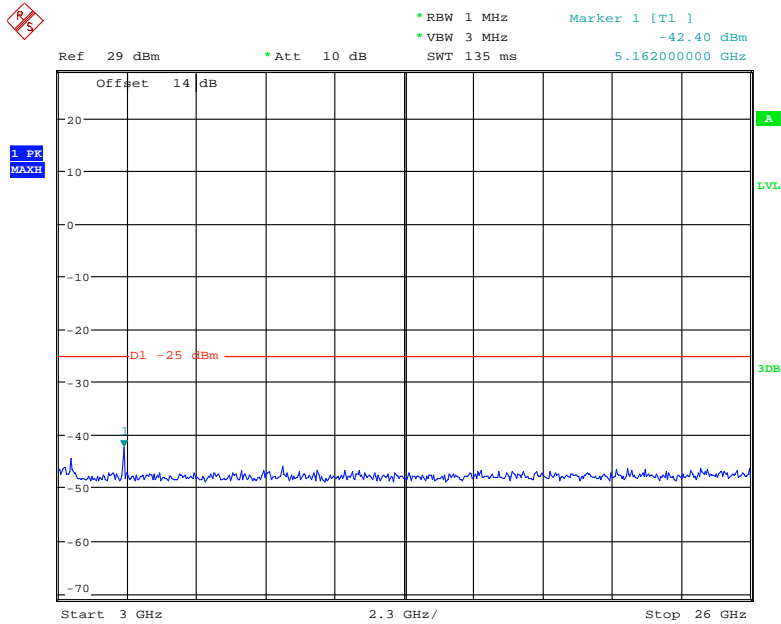


Date: 8.JUN.2018 16:48:50

30 MHz - 1 GHz (10.0 MHz, Middle Channel)

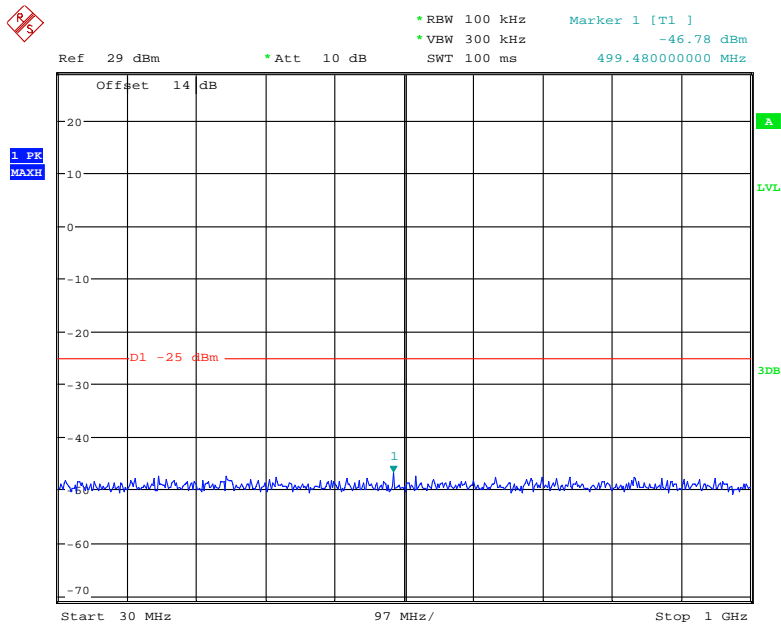


Date: 8.JUN.2018 16:29:53

1 GHz – 3 GHz (10.0 MHz, Middle Channel)

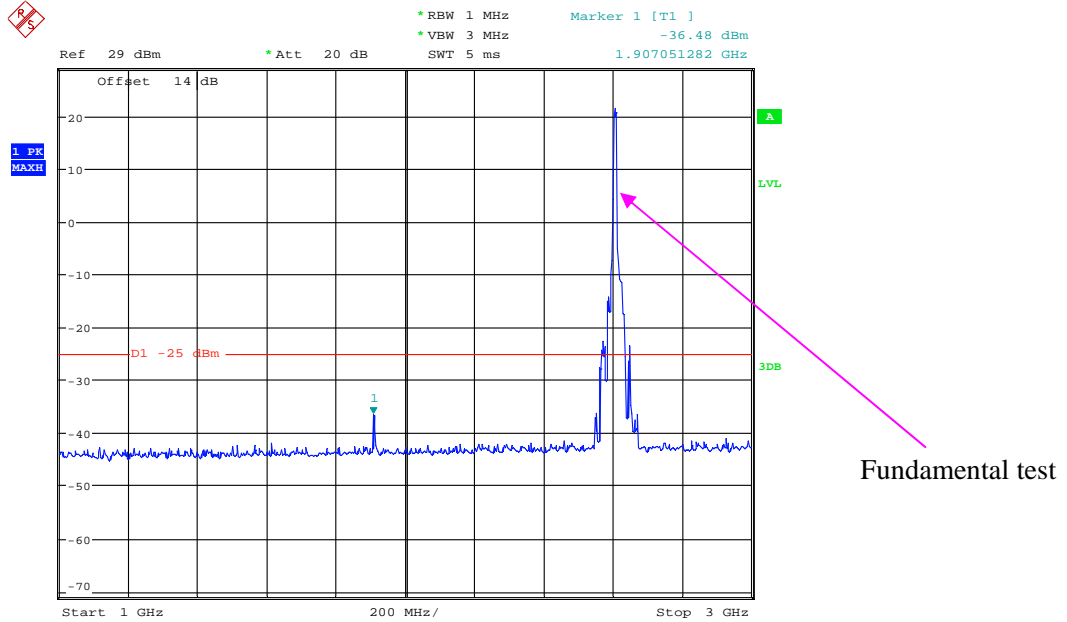


Date: 20.JUN.2018 16:30:09

3 GHz – 26 GHz (10.0 MHz, Middle Channel)

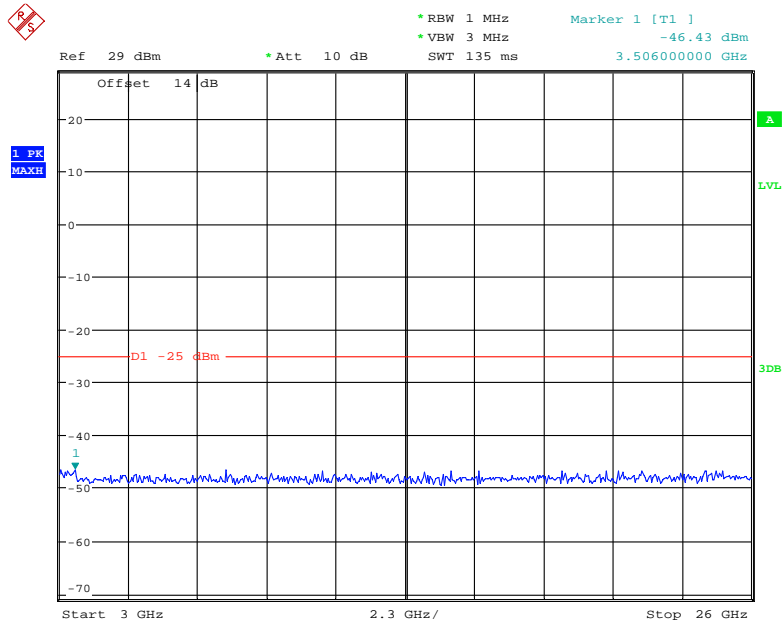


Date: 8.JUN.2018 16:28:22

30 MHz - 1 GHz (15.0 MHz, Middle Channel)

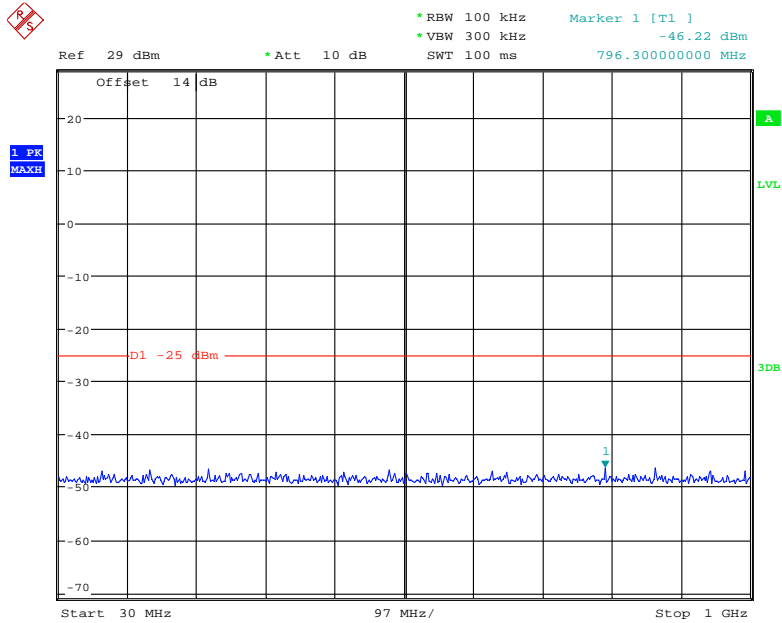


Date: 8.JUN.2018 16:40:44

1 GHz - 3 GHz (15.0 MHz, Middle Channel)

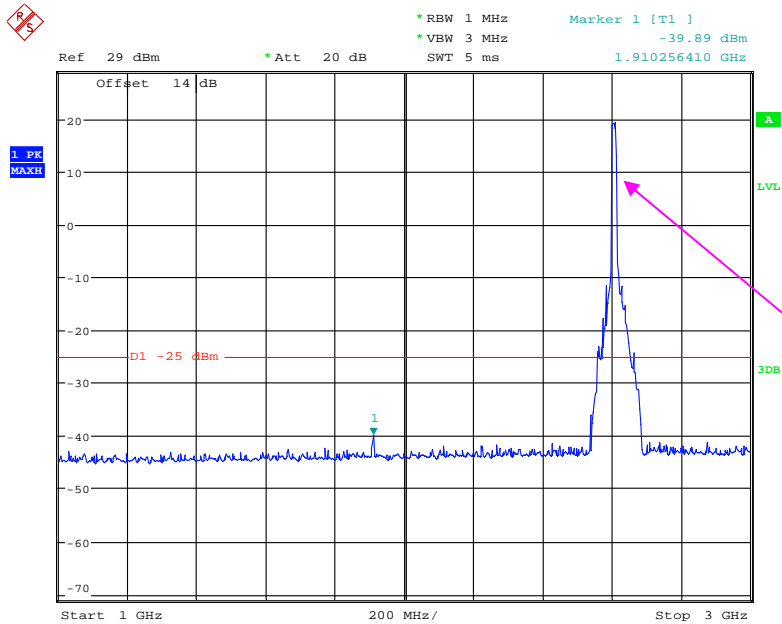


Date: 20.JUN.2018 16:31:09

3 GHz – 26 GHz (15.0 MHz, Middle Channel)

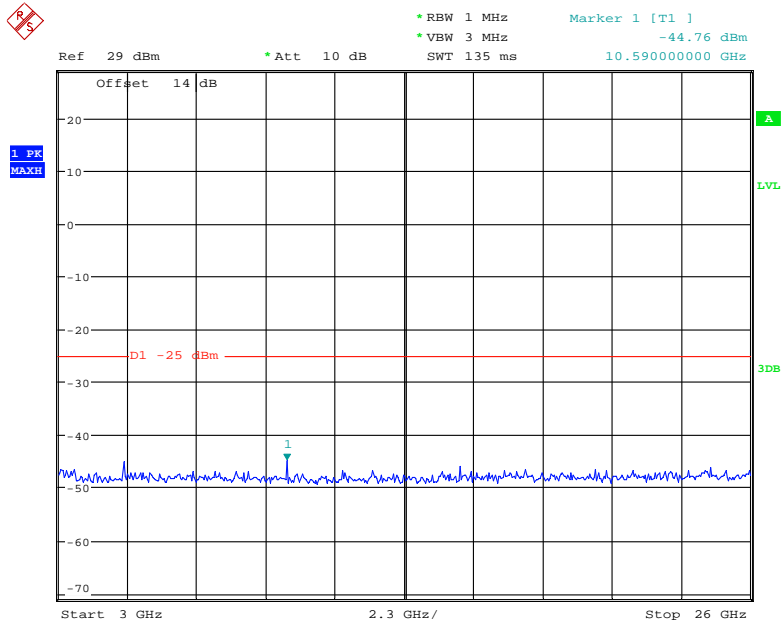


Date: 8.JUN.2018 16:47:20

30 MHz - 1 GHz (20.0 MHz, Middle Channel)

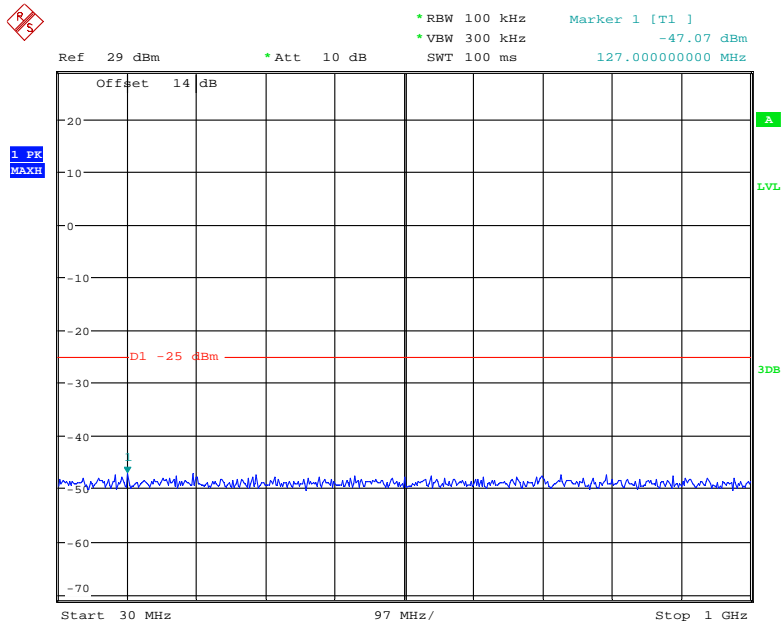


Date: 8.JUN.2018 16:56:21

1 GHz – 3 GHz (20.0 MHz, Middle Channel)

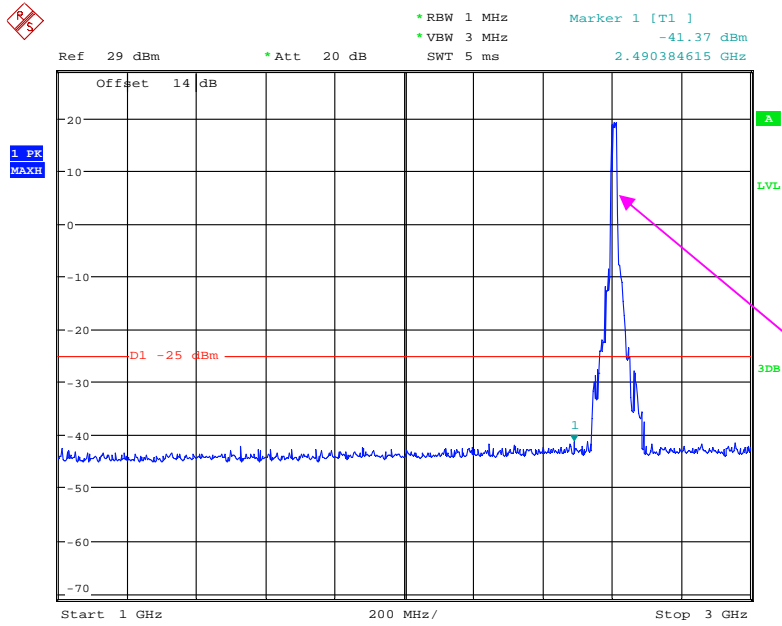

Date: 20.JUN.2018 16:32:13

3 GHz – 26 GHz (20.0 MHz, Middle Channel)

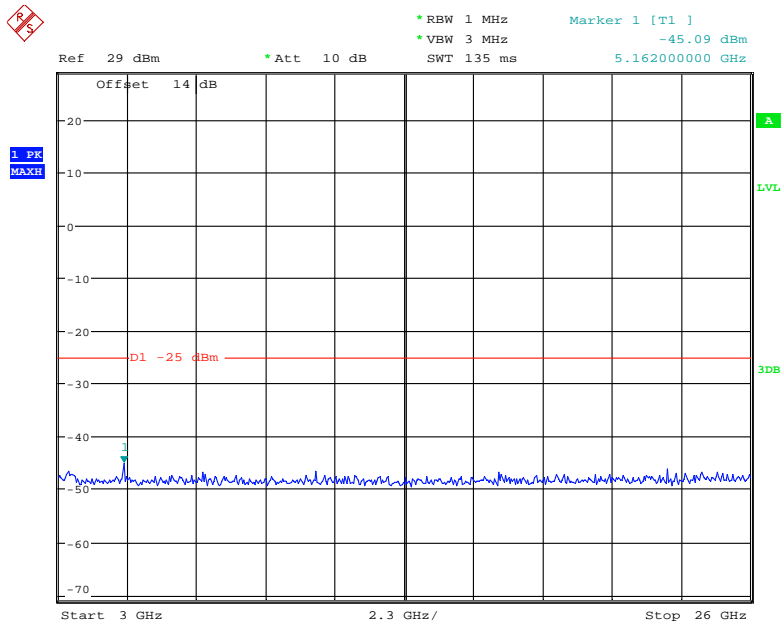

Date: 8.JUN.2018 16:46:49

FCC § 2.1053; § 22.917 (a); § 24.238 (a); § 27.53 (h)(m) SPURIOUS RADIATED EMISSIONS

Applicable Standard

FCC § 2.1053, § 22.917(a) and § 24.238(a) and § 27.53(h)(m)

Test Procedure

The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load which was also placed on the turntable.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the receiving antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.

The frequency range up to tenth harmonic of the fundamental frequency was investigated.

Test Data

Environmental Conditions

Temperature:	24~25 °C
Relative Humidity:	52~53 %
ATM Pressure:	101.0~101.2 kPa

The testing was performed by Nancy Wang from 2018-06-16 to 2018-07-17.

EUT operation mode: Transmitting

Pre-scan with Low, Middle and High channel, the worst case as below:

For model IS910.1:

30 MHz ~ 10 GHz:

Cellular Band (Part 22H)

Frequency (MHz)	Receiver Reading (dBµV)	Turntable Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	FCC Part 22H	
			Height (m)	Polar (H/V)	Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)		Limit (dBm)	Margin (dB)
GSM Mode, middle channel										
224.85	31.39	179	2.4	H	-65.6	0.30	0	-65.90	-13	52.90
224.85	32.56	42	2.3	V	-64.4	0.30	0	-64.70	-13	51.70
3346.40	52.76	26	2.4	H	-47.6	1.50	11.70	-37.40	-13	24.40
3346.40	53.98	134	1.9	V	-46.4	1.50	11.70	-36.20	-13	23.20
4183.00	52.37	240	1.3	H	-49.0	1.50	11.80	-38.70	-13	25.70
4183.00	53.64	65	2.4	V	-47.0	1.50	11.80	-36.70	-13	23.70
WCDMA Mode, Middle channel										
224.85	31.19	83	1.2	H	-65.8	0.30	0	-66.10	-13	53.10
224.85	31.80	118	2.1	V	-65.2	0.30	0	-65.50	-13	52.50
1673.20	57.01	282	1.9	H	-50.1	1.30	8.90	-42.50	-13	29.50
1673.20	58.93	54	1.7	V	-47.5	1.30	8.90	-39.90	-13	26.90
CDMA (1*RTT , BC0), Middle channel										
224.85	31.55	67	2.5	H	-65.4	0.30	0	-65.70	-13	52.70
224.85	32.25	326	2.5	V	-64.8	0.30	0	-65.10	-13	52.10
1673.04	65.48	48	1.5	H	-41.6	1.30	8.90	-34.00	-13	21.00
1673.04	65.94	30	1.9	V	-40.5	1.30	8.90	-32.90	-13	19.90
2509.56	57.62	209	1.3	H	-45.9	2.60	10.20	-38.30	-13	25.30
2509.56	51.27	296	1.9	V	-51.6	2.60	10.20	-44.00	-13	31.00
CDMA(EV-DO, BC0), Middle channel										
224.85	32.58	229	1.4	H	-64.4	0.30	0	-64.70	-13	51.70
224.85	32.81	310	1.7	V	-64.2	0.30	0	-64.50	-13	51.50
1673.04	64.23	333	2.0	H	-42.8	1.30	8.90	-35.20	-13	22.20
1673.04	64.71	66	1.2	V	-41.8	1.30	8.90	-34.20	-13	21.20
2509.56	53.19	34	2.4	H	-50.3	2.60	10.20	-42.70	-13	29.70
2509.56	50.58	150	2.0	V	-52.3	2.60	10.20	-44.70	-13	31.70

30 MHz ~ 20 GHz:

PCS Band (Part 24E)

Frequency (MHz)	Receiver Reading (dBµV)	Turntable Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	FCC Part 24E	
			Height (m)	Polar (H/V)	Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)		Limit (dBm)	Margin (dB)
GSM Mode, middle channel										
224.85	31.79	147	2.3	H	-65.2	0.30	0	-65.50	-13	52.50
224.85	33.10	234	2.1	V	-63.9	0.30	0	-64.20	-13	51.20
3760.00	50.86	298	2.2	H	-50.4	1.50	11.80	-40.10	-13	27.10
3760.00	52.62	60	1.3	V	-48.1	1.50	11.80	-37.80	-13	24.80
5640.00	48.16	100	1.6	H	-49.4	1.70	12.40	-38.70	-13	25.70
5640.00	49.58	112	2.1	V	-47.7	1.70	12.40	-37.00	-13	24.00
WCDMA Mode Band II, Middle channel										
224.85	31.70	96	1.2	H	-65.3	0.30	0	-65.60	-13	52.60
224.85	32.66	104	1.7	V	-64.3	0.30	0	-64.60	-13	51.60
3760.00	50.88	315	2.1	H	-50.3	1.50	11.80	-40.00	-13	27.00
3760.00	53.44	62	2.4	V	-47.3	1.50	11.80	-37.00	-13	24.00
CDMA (1*RTT , BC1), Middle channel										
224.85	32.51	205	1.2	H	-64.5	0.30	0	-64.80	-13	51.80
224.85	32.34	353	1.3	V	-64.7	0.30	0	-65.00	-13	52.00
3760.00	45.28	238	1.7	H	-55.9	1.50	11.80	-45.60	-13	32.60
3760.00	45.17	17	1.1	V	-55.6	1.50	11.80	-45.30	-13	32.30
CDMA(EV-DO, BC1), Middle channel										
224.85	31.85	244	2.1	H	-65.1	0.30	0	-65.40	-13	52.40
224.85	31.23	340	1.1	V	-65.8	0.30	0	-66.10	-13	53.10
3760.00	46.52	122	2.4	H	-54.7	1.50	11.80	-44.40	-13	31.40
3760.00	45.27	343	1.2	V	-55.5	1.50	11.80	-45.20	-13	32.20

LTE Band: (Pre-scan with all the bandwidth, and worse case as below)

Frequency	Receiver	Turntable	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
(MHz)	Reading (dBμV)	Angle Degree	Height (m)	Polar (H/V)	Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)			
Band 7										
Test frequency range:30 MHz ~ 26 GHz										
224.85	31.47	178	2.3	H	-65.5	0.30	0	-65.80	-25	40.80
224.85	32.03	229	2.0	V	-65.0	0.30	0	-65.30	-25	40.30
5070.00	43.24	45	1.3	H	-54.6	1.60	12.10	-44.10	-25	19.10
5070.00	43.15	194	1.1	V	-54.7	1.60	12.10	-44.20	-25	19.20
Band 41										
Test frequency range: 30 MHz ~ 26GHz										
224.85	31.79	70	1.8	H	-65.2	0.30	0	-65.50	-25	40.50
224.85	30.47	257	1.5	V	-66.5	0.30	0	-66.80	-25	41.80
5210.00	44.71	184	1.6	H	-53.9	1.60	12.10	-43.40	-25	18.40
5210.00	43.57	260	1.5	V	-54.6	1.60	12.10	-44.10	-25	19.10

Note:

- 1) Absolute Level = Substituted Level - Cable loss + Antenna Gain
- 2) Margin = Limit- Absolute Level

FCC § 22.917 (a);§ 24.238 (a); §27.53 (h)(m) - BAND EDGES

Applicable Standard

According to § 22.917(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.


According to §24.238(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

According to FCC §27.53 (h)(m), the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

Test Procedure

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.

The center of the spectrum analyzer was set to block edge frequency

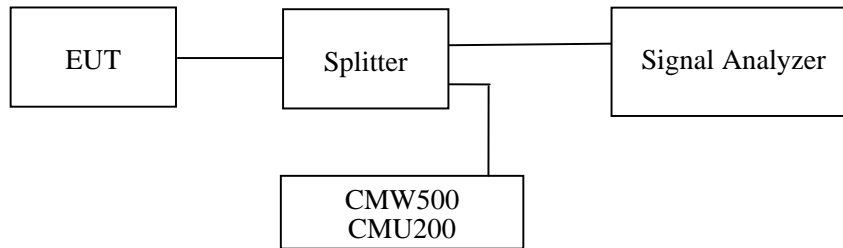

Test Data

Environmental Conditions


Temperature:	24~25 °C
Relative Humidity:	52~53 %
ATM Pressure:	101.0~101.2 kPa

The testing was performed by Nancy Wang from 2018-06-11 to 2018-07-13.

EUT operation mode: Transmitting


Test Result: Compliance. Please refer to the following plots.

Cellular Band, Left Band Edge for GSM (GMSK) Mode

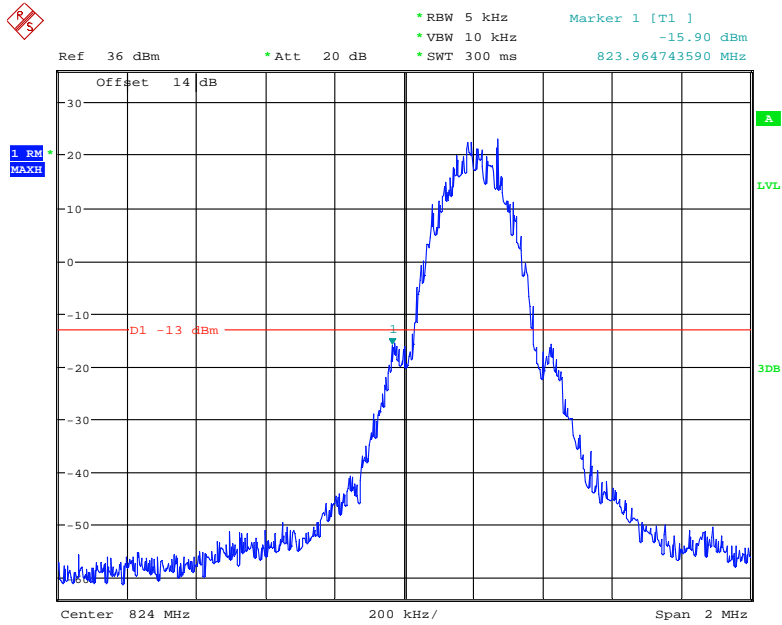


Date: 11.JUN.2018 16:23:50

Cellular Band, Right Band Edge for GSM (GMSK) Mode

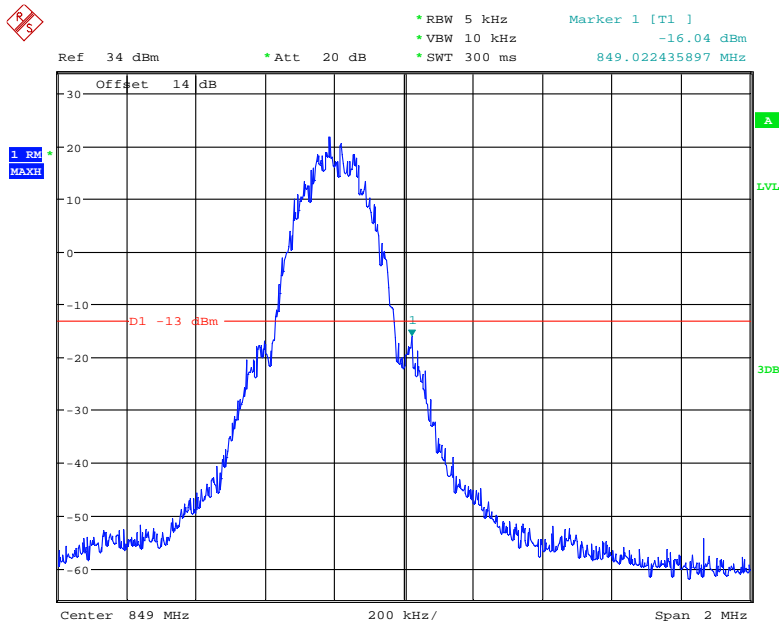


Date: 13.JUL.2018 10:09:35

Cellular Band, Left Band Edge for EDGE Mode

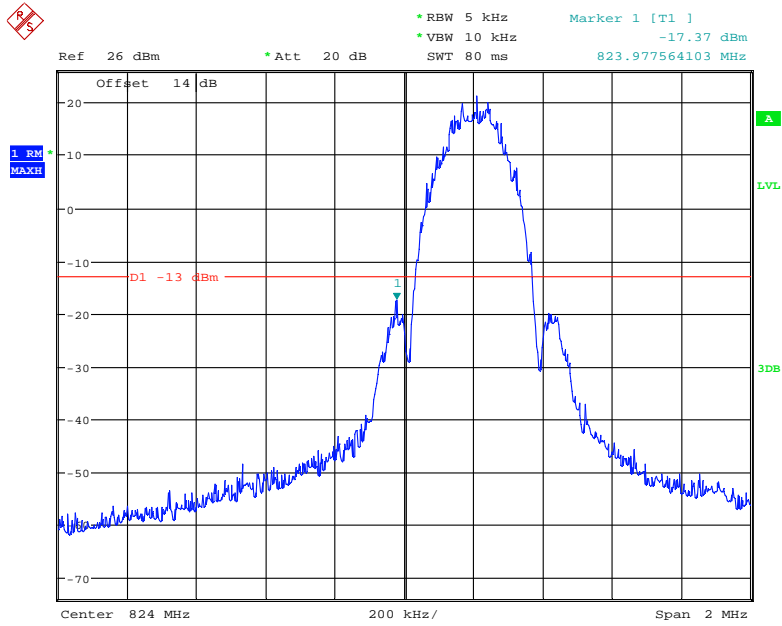


Date: 12.JUN.2018 14:44:52

Cellular Band, Right Band Edge for EDGE Mode

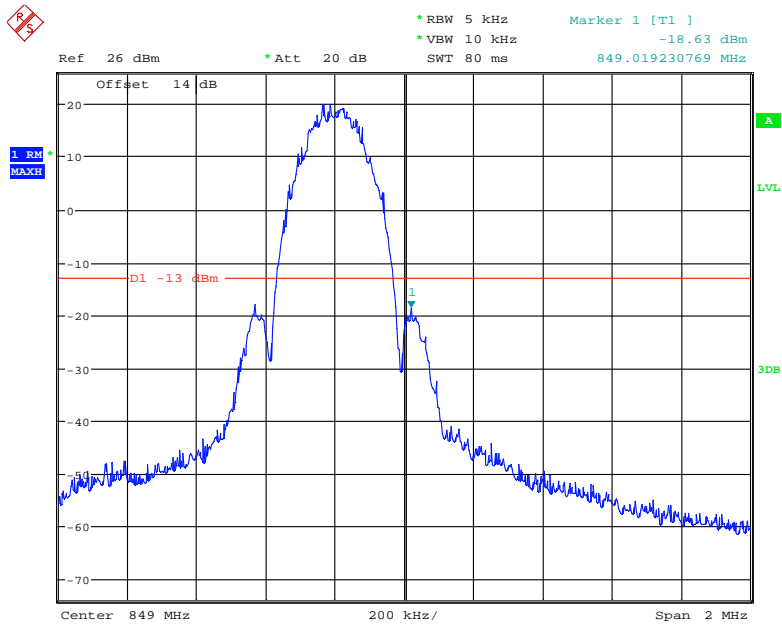


Date: 12.JUN.2018 14:46:56

Cellular Band, Left Band Edge for WCDMA (BPSK) Mode

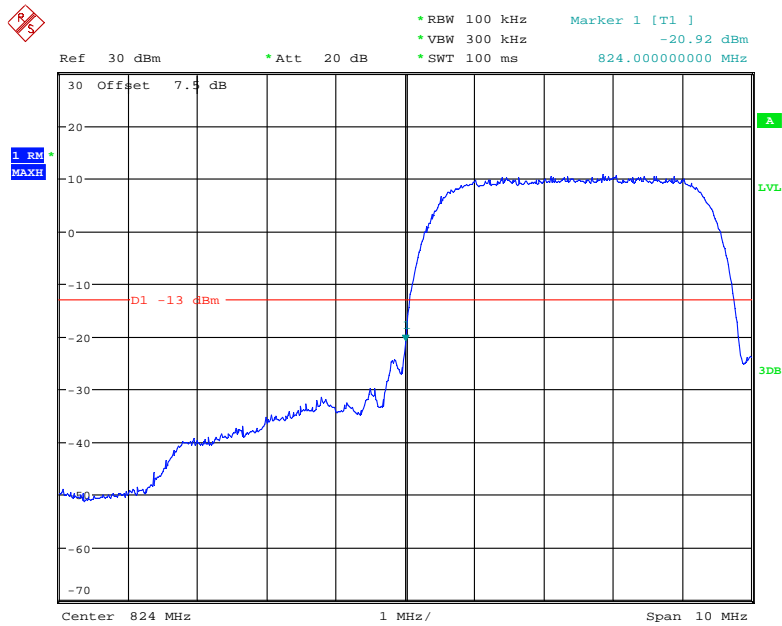


Date: 16.JUN.2018 16:45:18

Cellular Band, Right Band Edge for WCDMA (BPSK) Mode

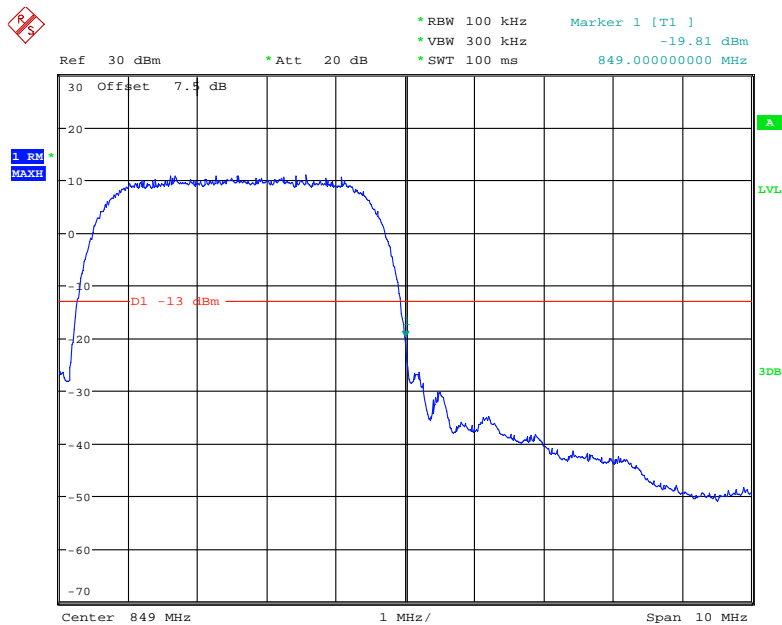


Date: 16.JUN.2018 16:44:27

Cellular Band, Left Band Edge for HSDPA (16QAM) Mode

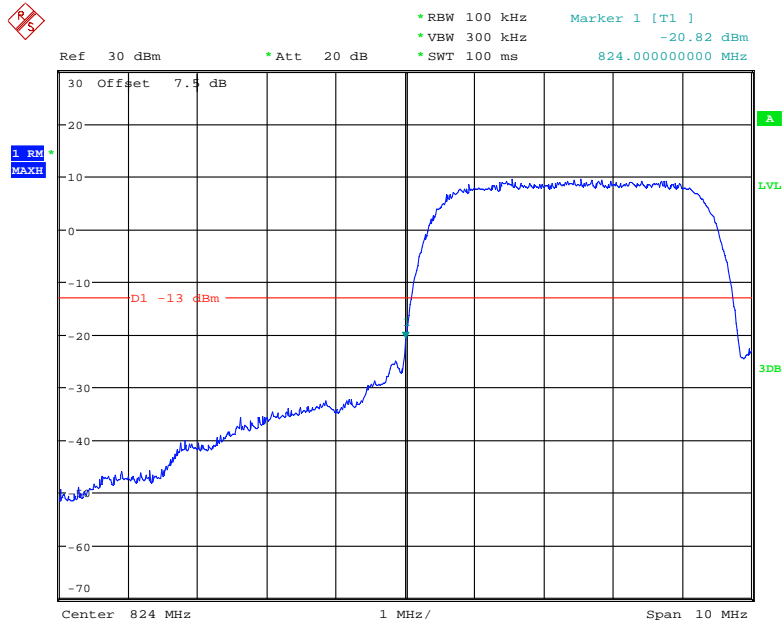


Date: 16.JUN.2018 16:35:43

Cellular Band, Right Band Edge for HSDPA (16QAM) Mode

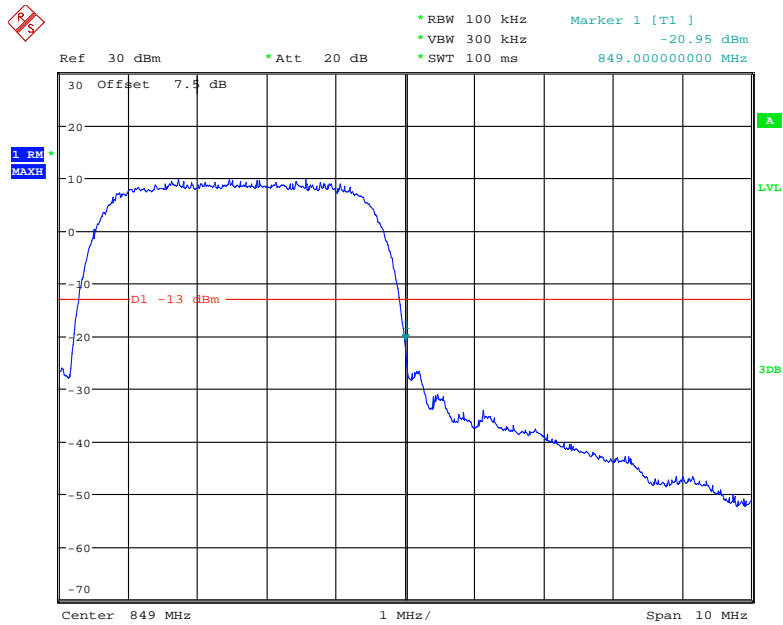


Date: 16.JUN.2018 16:36:54

Cellular Band, Left Band Edge for HSUPA (BPSK) Mode

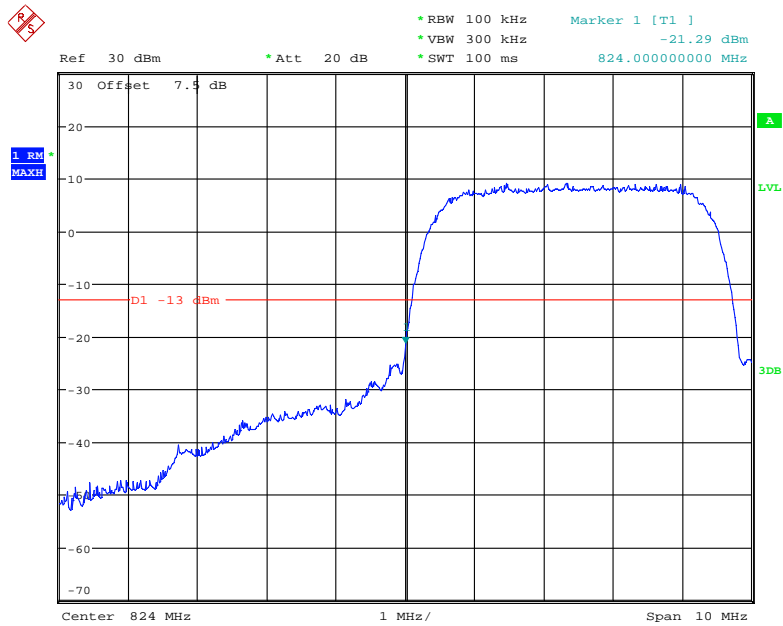


Date: 16.JUN.2018 16:33:47

Cellular Band, Right Band Edge for HSUPA (BPSK) Mode

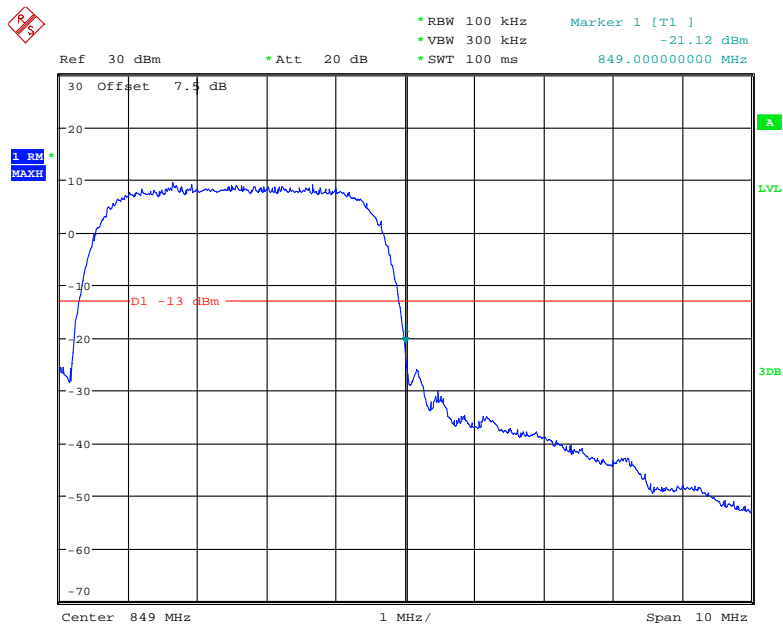


Date: 16.JUN.2018 16:32:44

Cellular Band, Left Band Edge for CDMA (1*RTT, BC0) Mode

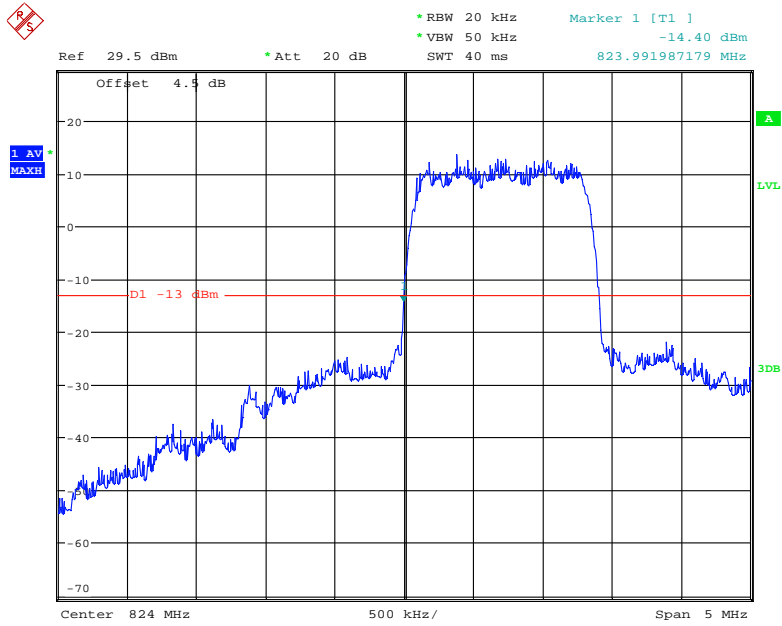


Date: 26.JUN.2018 12:54:54

Cellular Band, Right Band Edge for CDMA (1*RTT, BC0) Mode

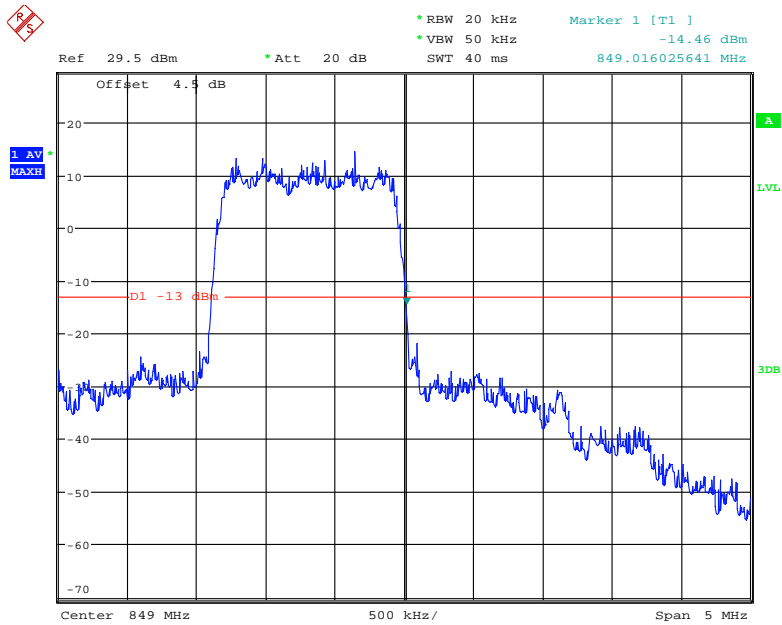


Date: 26.JUN.2018 12:58:56

Cellular Band, Left Band Edge for CDMA (EV-DO, BC0) Mode

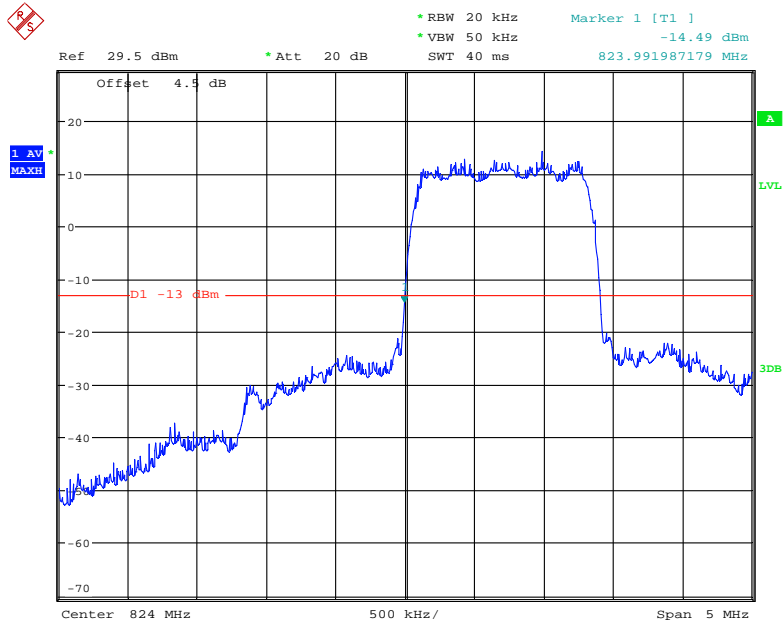


Date: 26.JUN.2018 16:15:02

Cellular Band, Right Band Edge for CDMA (EV-DO, BC0) Mode

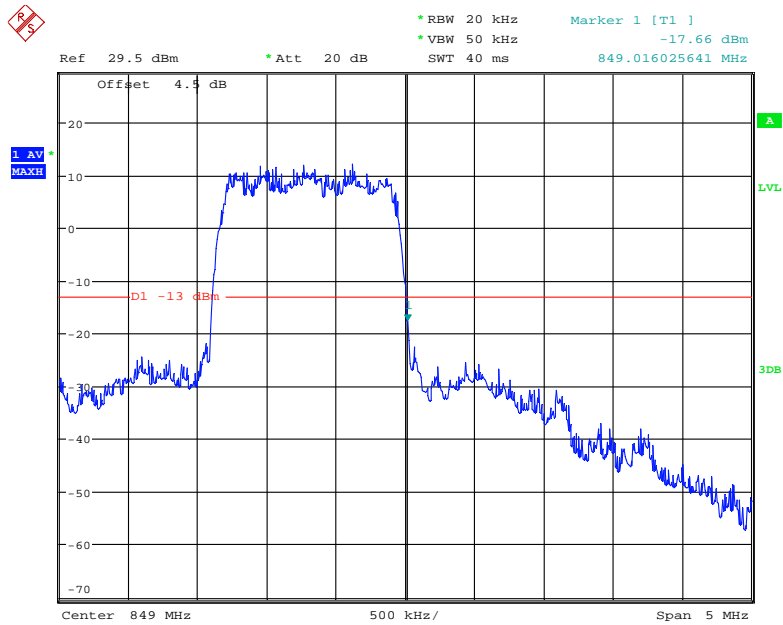


Date: 26.JUN.2018 16:16:06

PCS Band, Left Band Edge for GSM (GMSK) Mode

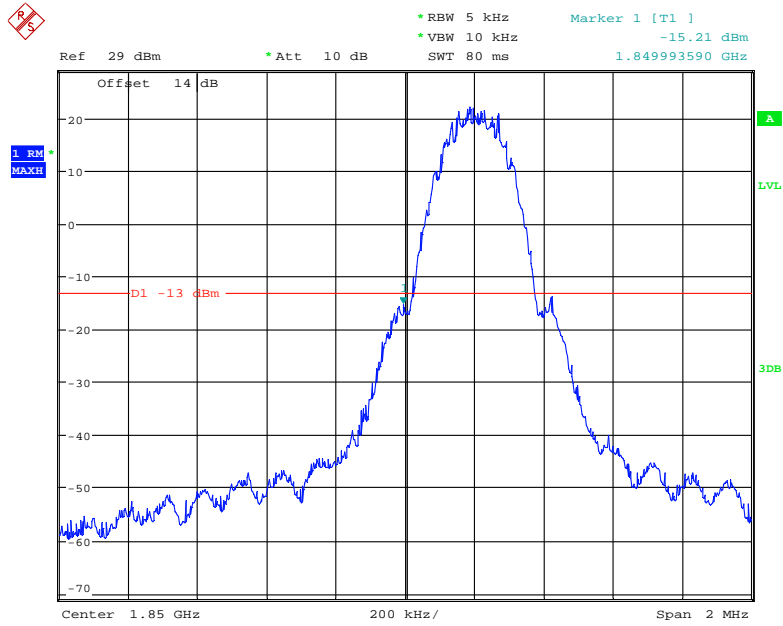


Date: 11.JUN.2018 17:11:28

PCS Band, Right Band Edge for GSM (GMSK) Mode

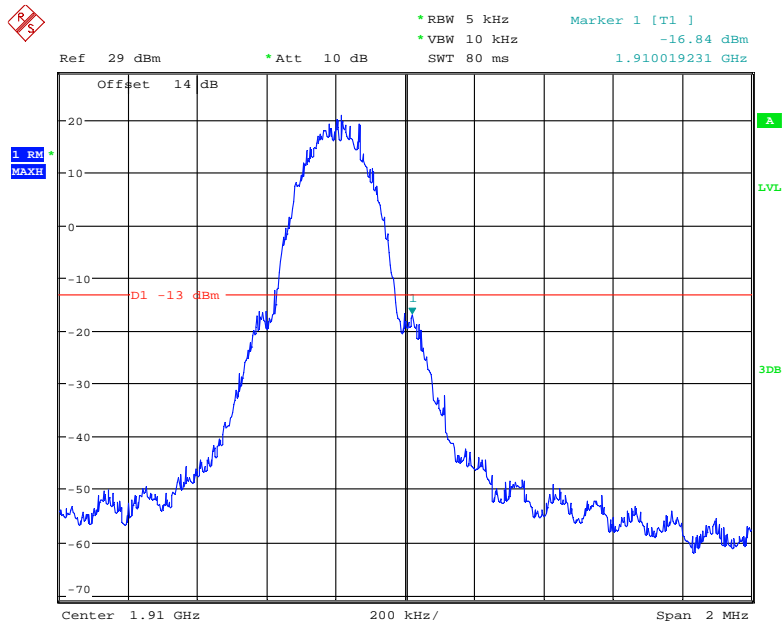


Date: 11.JUN.2018 17:12:59

PCS Band, Left Band Edge for EDGE Mode

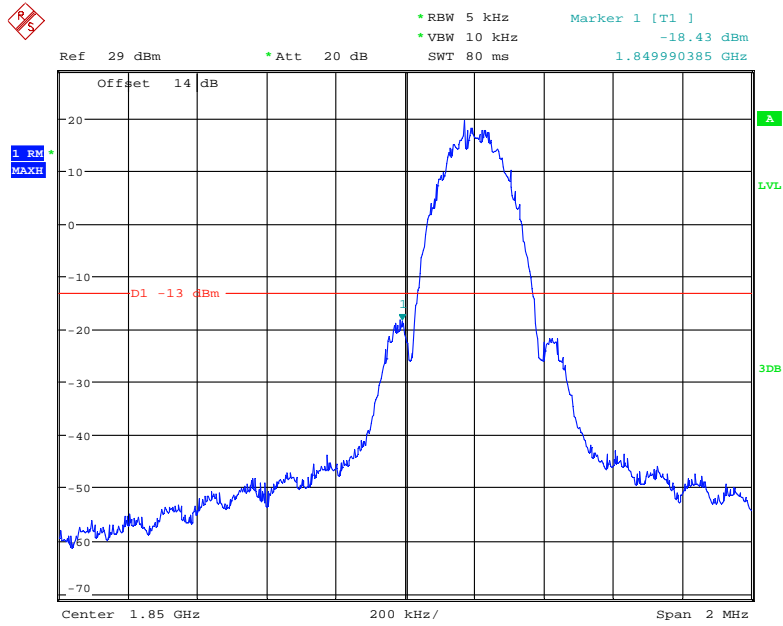


Date: 12.JUN.2018 15:19:59

PCS Band, Right Band Edge for EDGE Mode

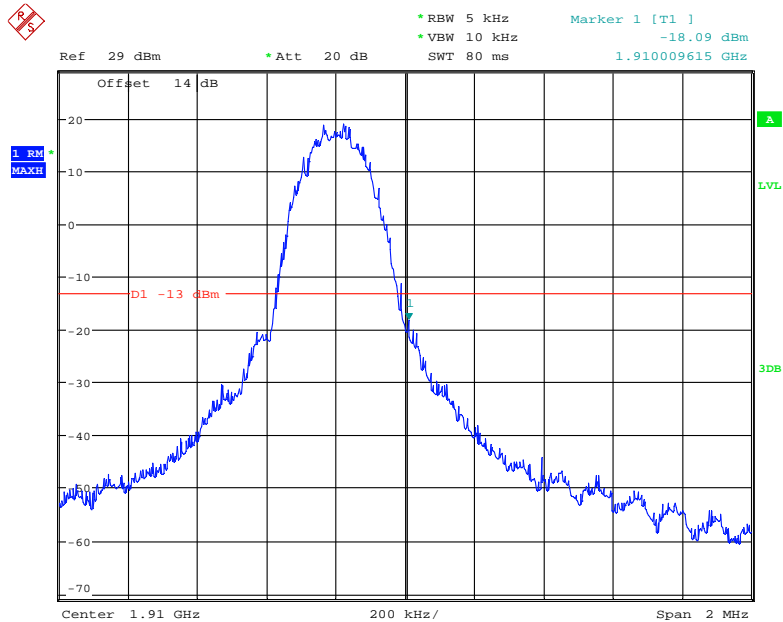


Date: 12.JUN.2018 15:22:27

PCS Band, Left Band Edge for WCDMA (BPSK) Mode

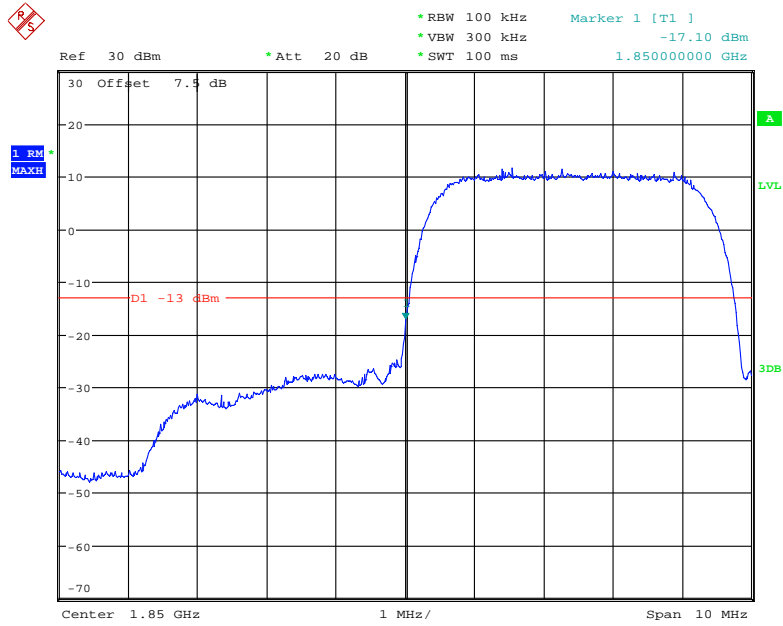


Date: 16.JUN.2018 16:42:22

PCS Band, Right Band Edge for WCDMA (BPSK) Mode

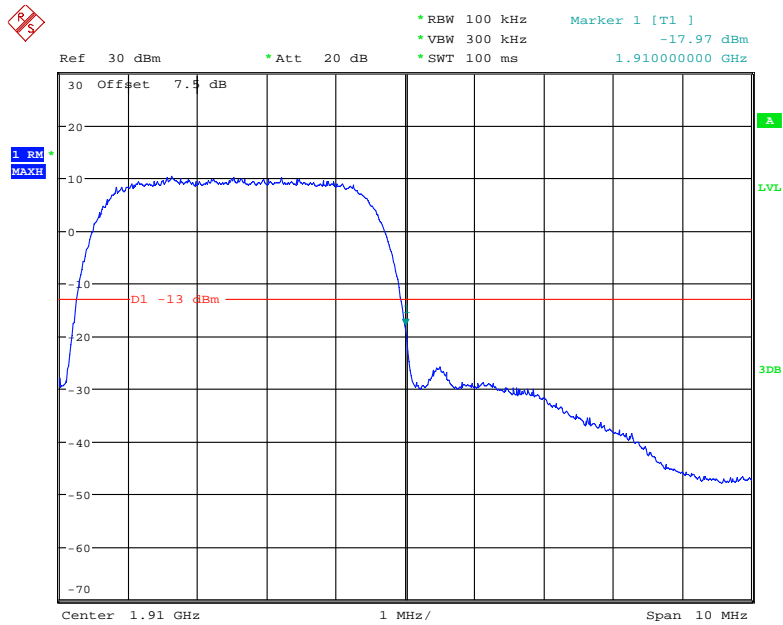


Date: 16.JUN.2018 16:43:16

PCS Band, Left Band Edge for HSDPA (16QAM) Mode

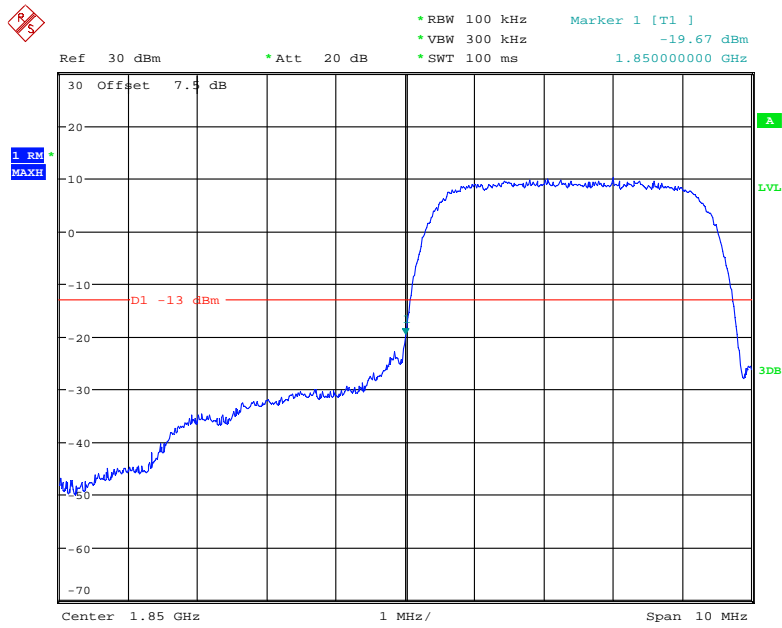


Date: 16.JUN.2018 16:39:40

PCS Band, Right Band Edge for HSDPA (16QAM) Mode

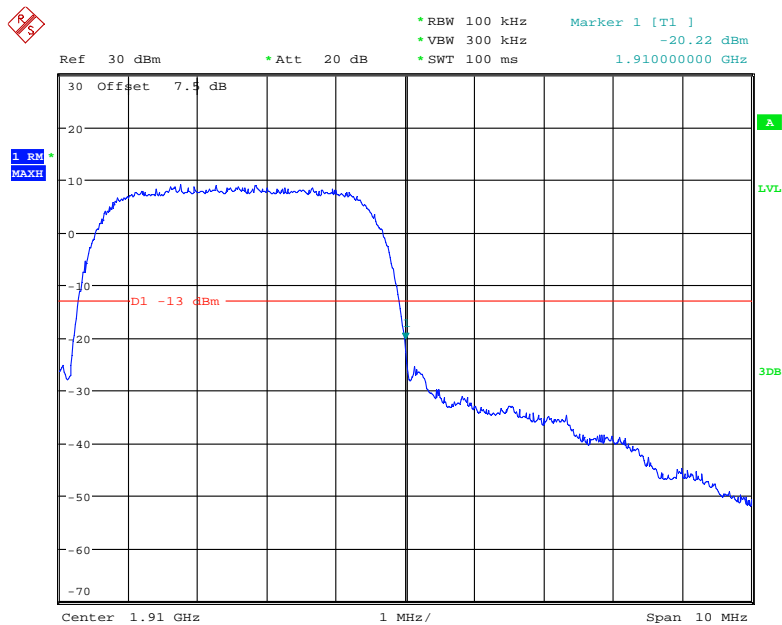


Date: 16.JUN.2018 16:38:33

PCS Band, Left Band Edge for HSUPA (BPSK) Mode

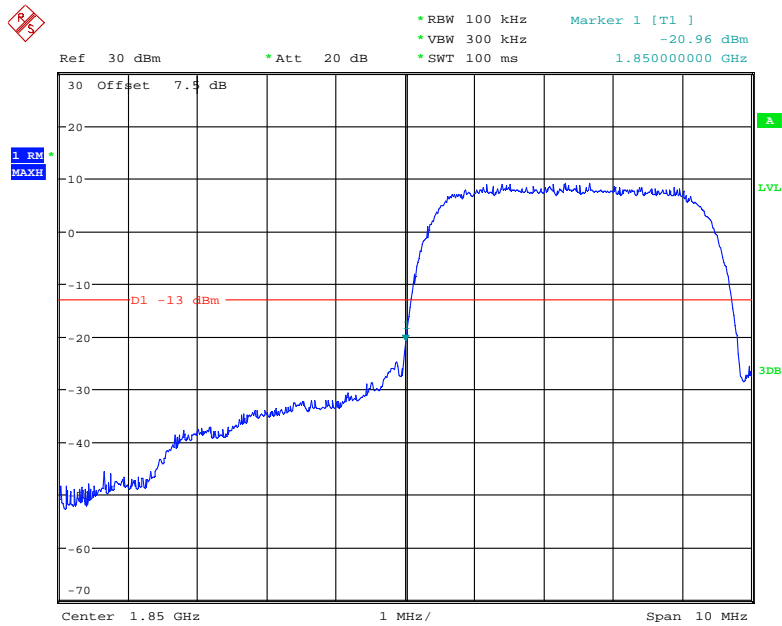


Date: 16.JUN.2018 16:28:02

PCS Band, Right Band Edge for HSUPA (BPSK) Mode

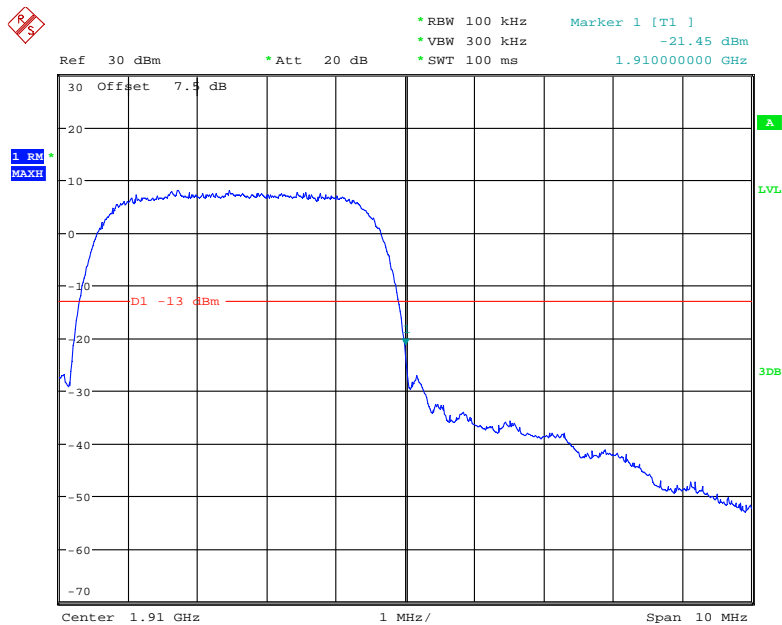


Date: 16.JUN.2018 16:30:53

Left Band Edge for CDMA (1*RTT, BC1) Mode

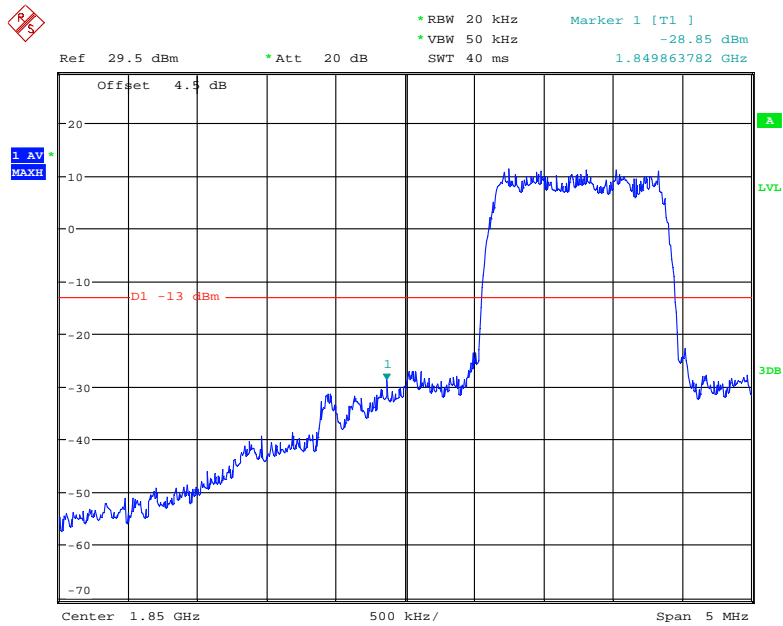


Date: 26.JUN.2018 13:00:18

Right Band Edge for CDMA (1*RTT, BC1) Mode

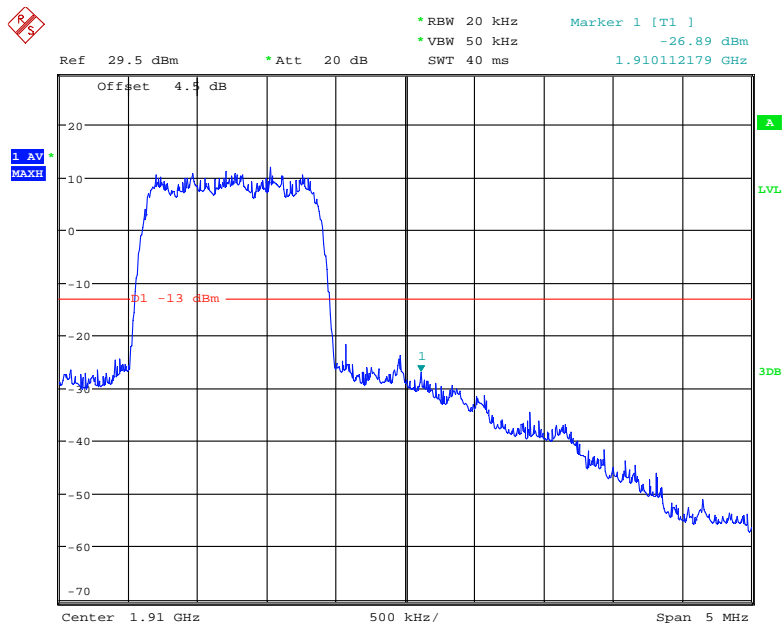


Date: 26.JUN.2018 13:01:17

Left Band Edge for CDMA (EV-DO, BC1) Mode

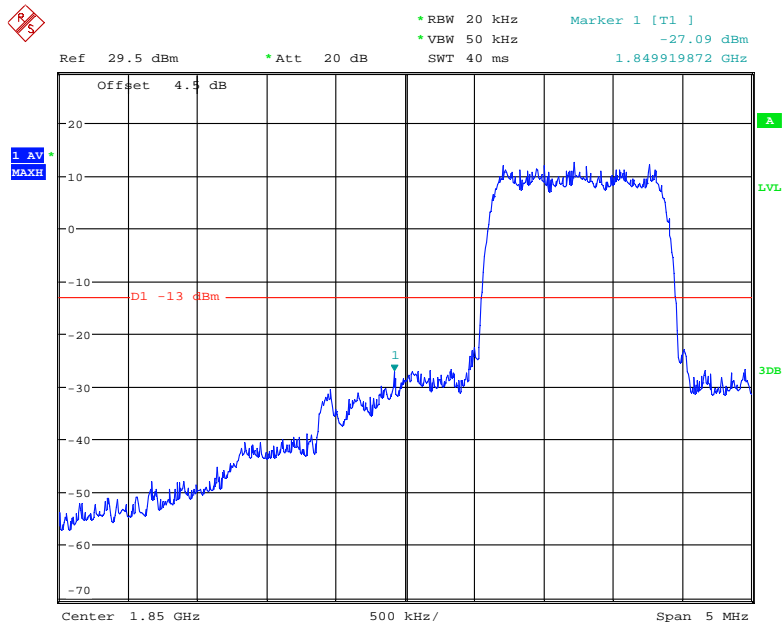

Date: 26.JUN.2018 16:16:53


Right Band Edge for CDMA (EV-DO, BC1) Mode

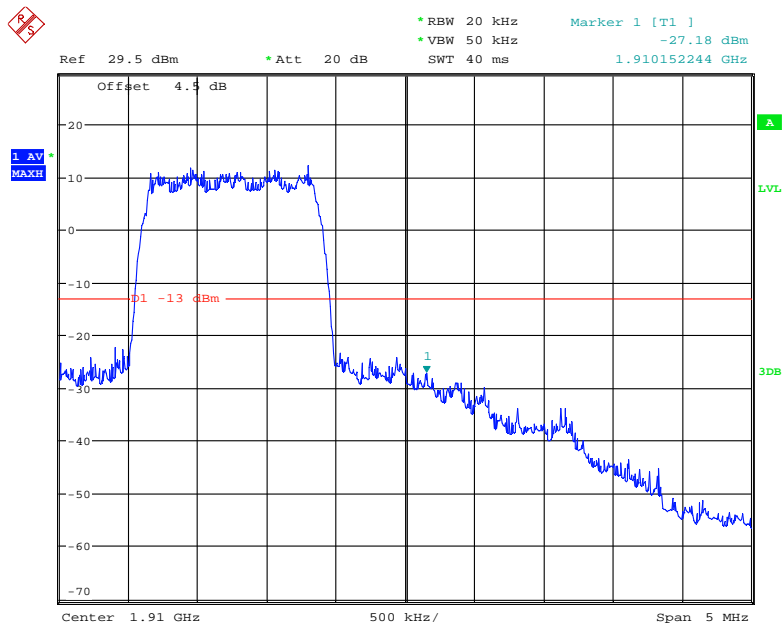

Date: 26.JUN.2018 16:17:38


Band 7:

QPSK (5.0 MHz, FULL RB) - Left Band Edge

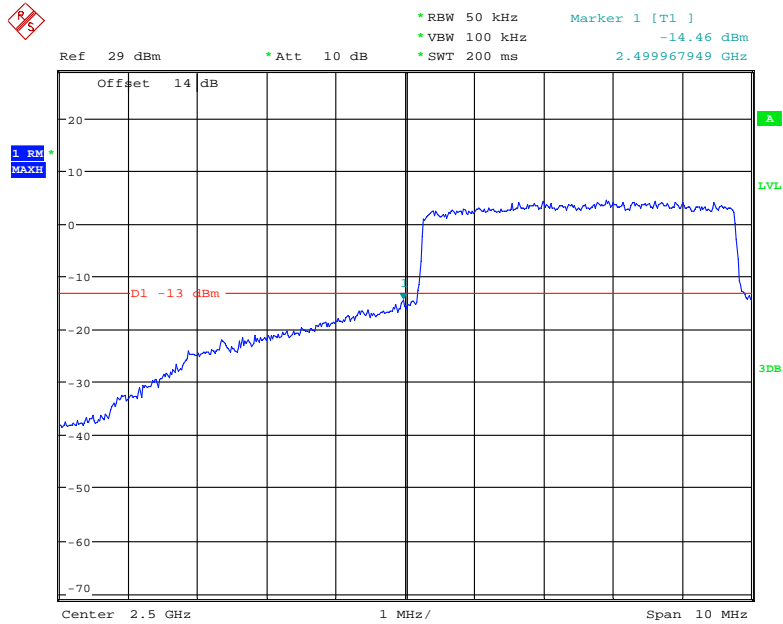


Date: 20.JUN.2018 09:50:58

QPSK (5.0 MHz, FULL RB) - Right Band Edge

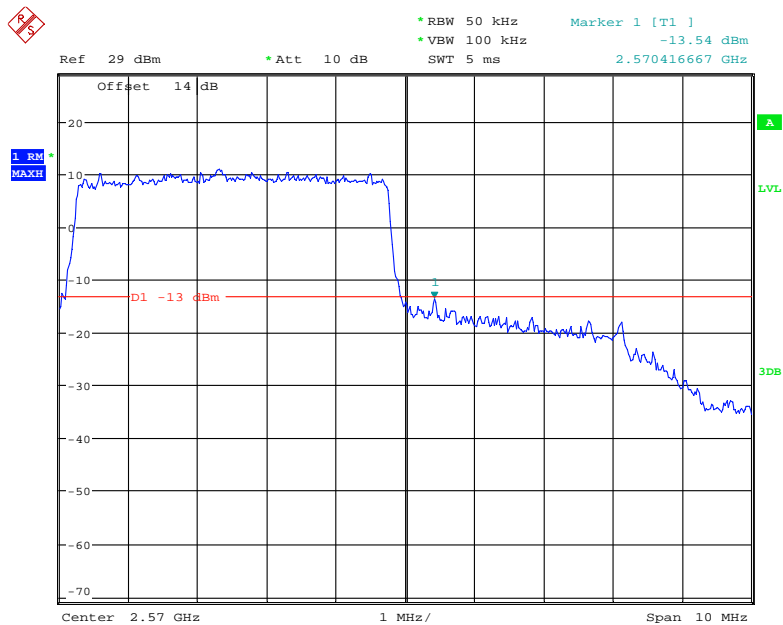


Date: 20.JUN.2018 09:55:33

16-QAM (5.0 MHz, FULL RB) - Left Band Edge

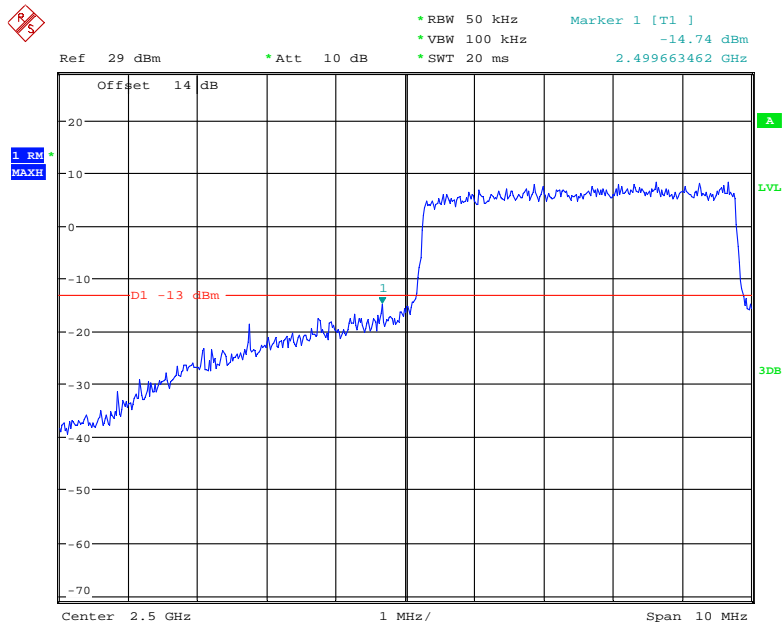


Date: 20.JUN.2018 09:48:38

16-QAM (5.0 MHz, FULL RB) - Right Band Edge

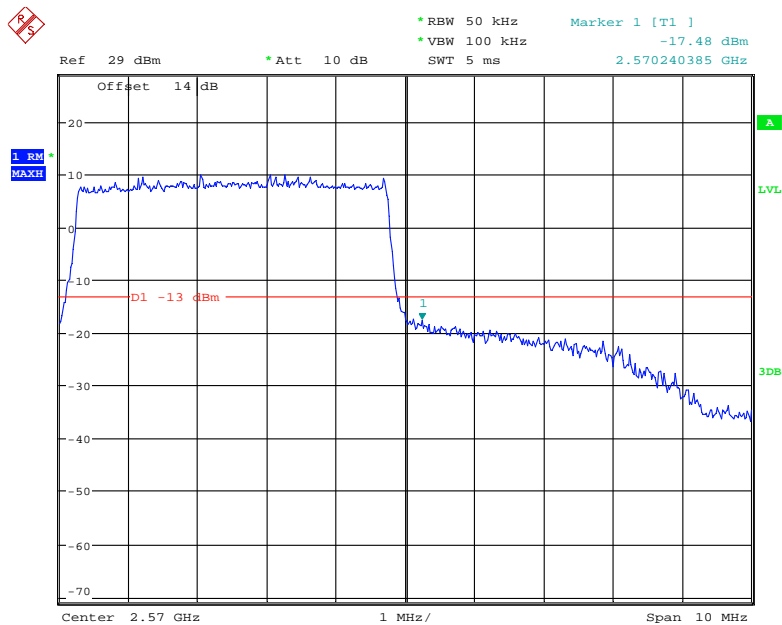


Date: 20.JUN.2018 09:56:25

QPSK (10.0 MHz, FULL RB) - Left Band Edge

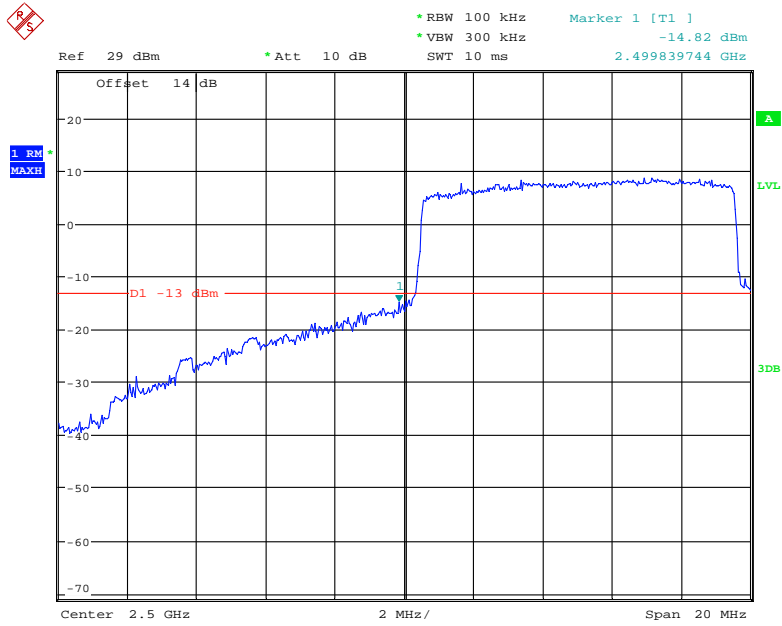


Date: 20.JUN.2018 10:02:30

QPSK (10.0 MHz, FULL RB) - Right Band Edge

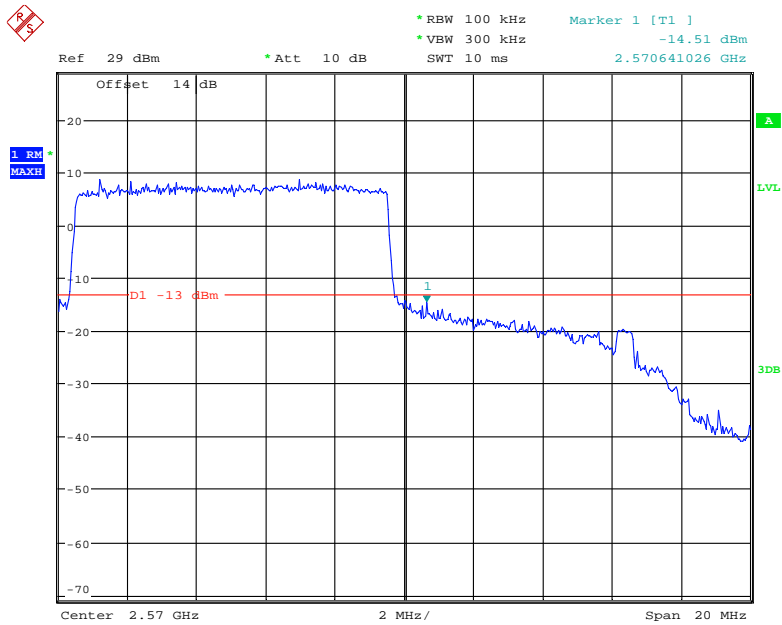


Date: 20.JUN.2018 10:00:44

16-QAM (10.0 MHz, FULL RB) - Left Band Edge

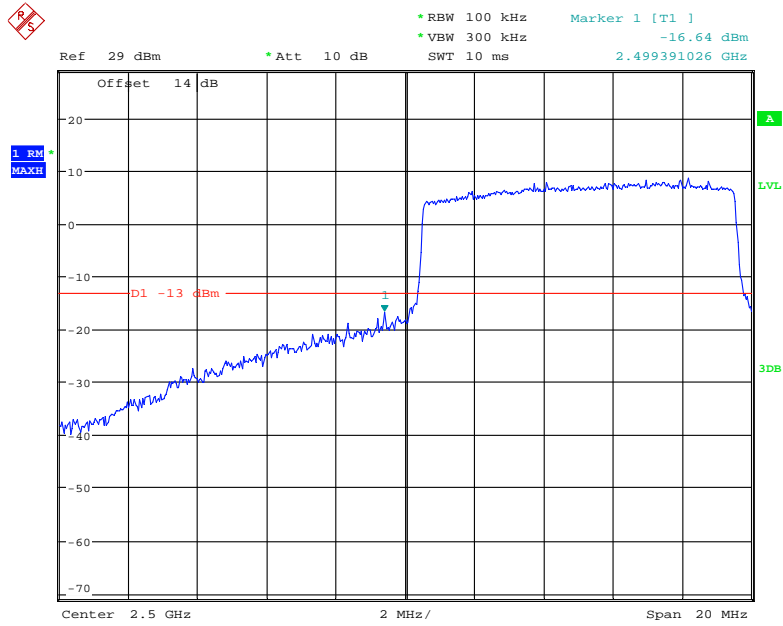


Date: 20.JUN.2018 10:03:25

16-QAM (10.0 MHz, FULL RB) - Right Band Edge

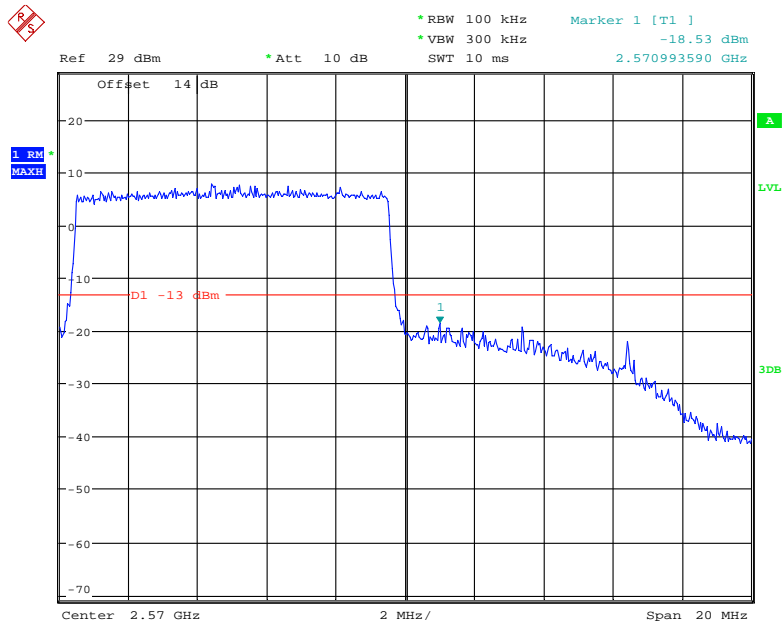


Date: 20.JUN.2018 10:00:07

QPSK (15.0 MHz, FULL RB) - Left Band Edge

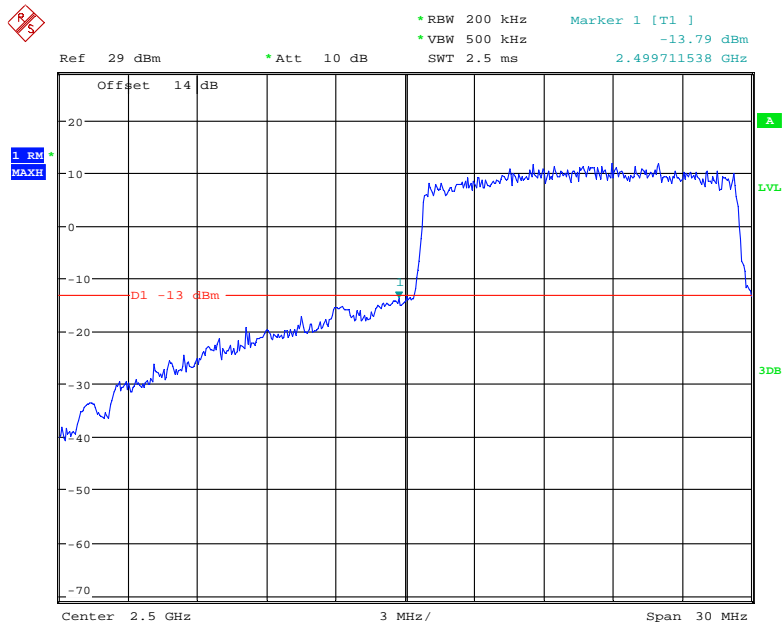


Date: 20.JUN.2018 10:05:02

QPSK (15.0 MHz, FULL RB) - Right Band Edge

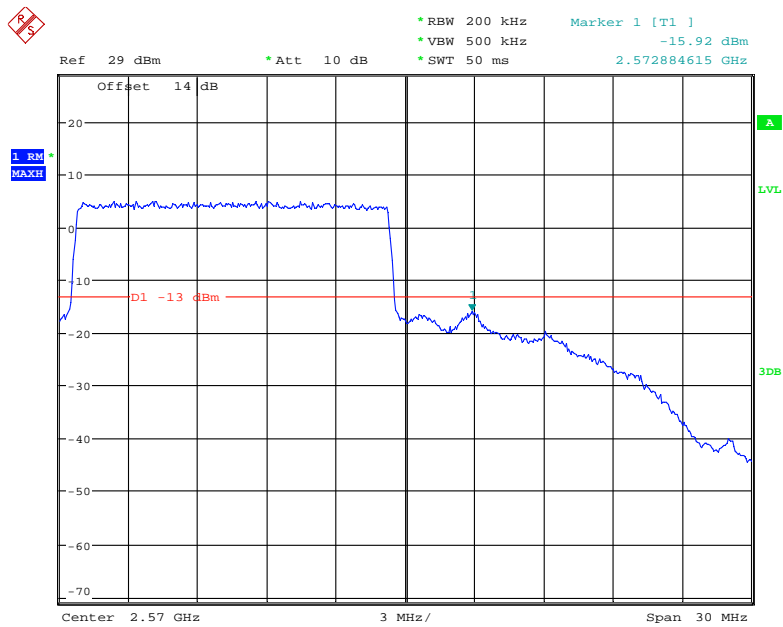


Date: 20.JUN.2018 10:07:51

16-QAM (15.0 MHz, FULL RB) - Left Band Edge

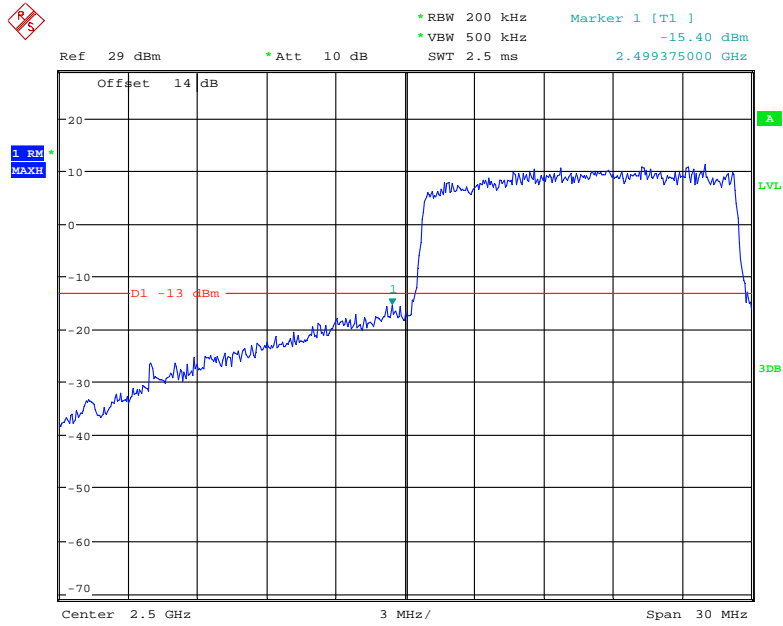


Date: 20.JUN.2018 10:05:49

16-QAM (15.0 MHz, FULL RB) - Right Band Edge

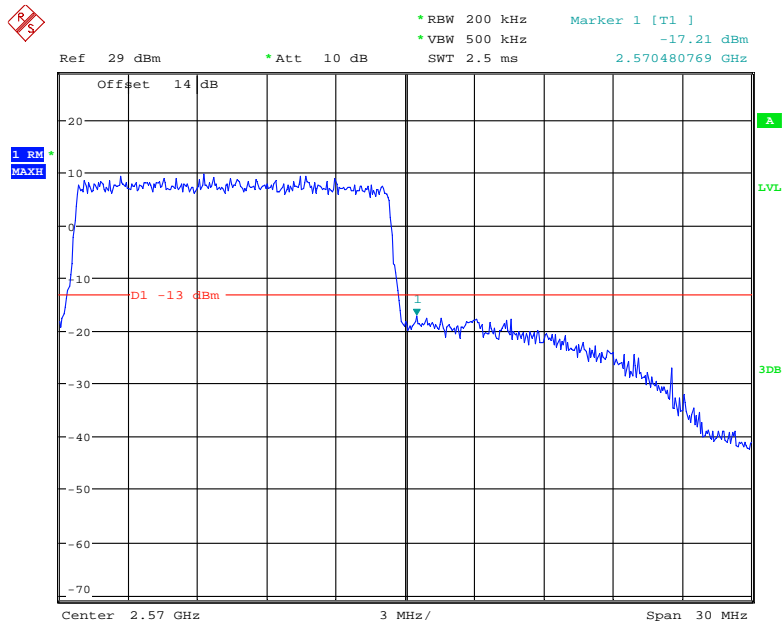


Date: 20.JUN.2018 10:06:44

QPSK (20.0 MHz, FULL RB) - Left Band Edge

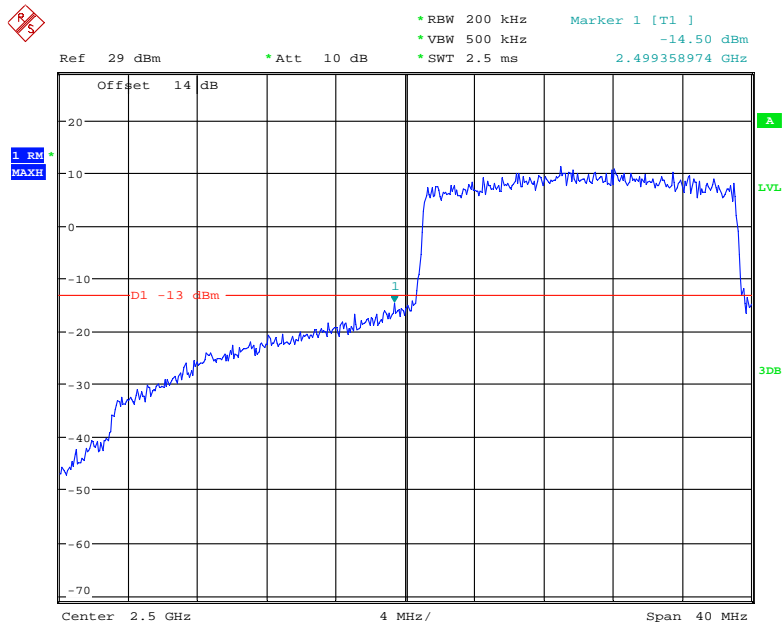


Date: 20.JUN.2018 10:11:21

QPSK (20.0 MHz, FULL RB) - Right Band Edge

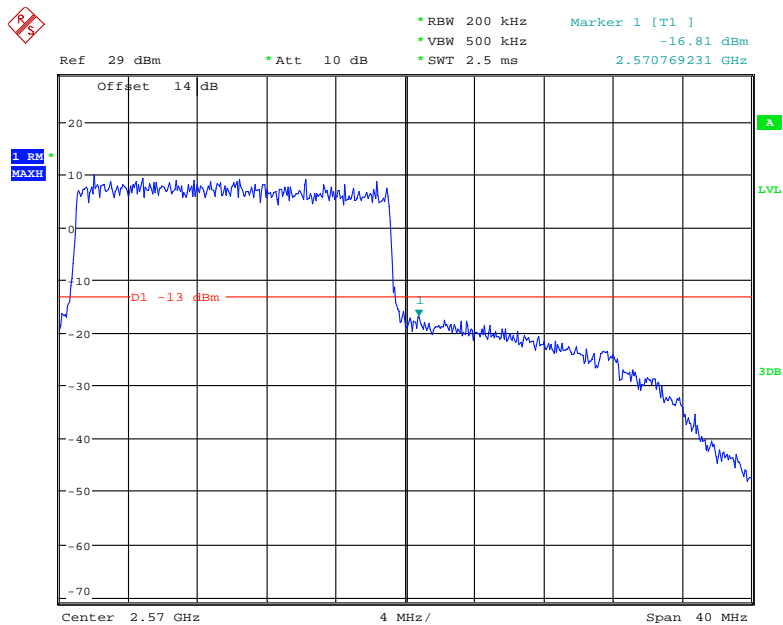


Date: 20.JUN.2018 10:10:45

16-QAM (20.0 MHz, FULL RB) - Left Band Edge

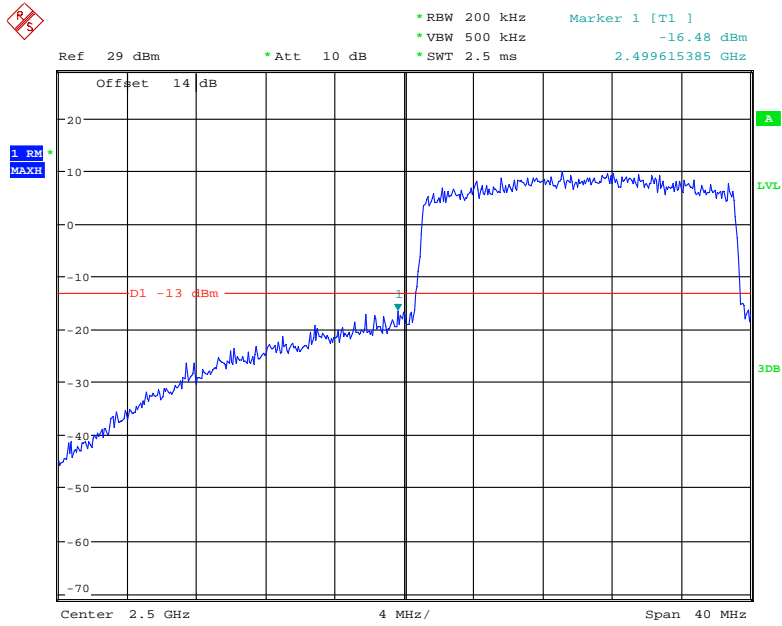

Date: 20.JUN.2018 10:11:59


16-QAM (20.0 MHz, FULL RB) - Right Band Edge

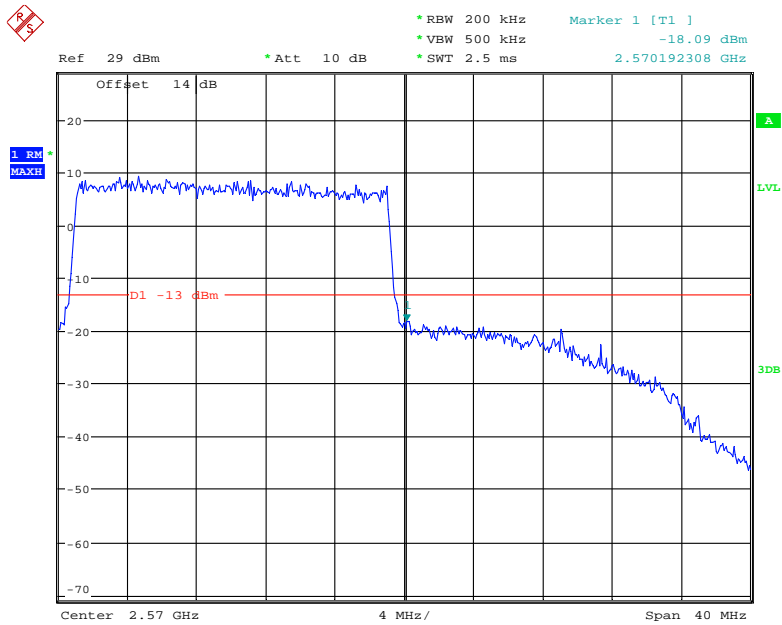

Date: 20.JUN.2018 10:10:14


Band 41:

QPSK (5.0 MHz, FULL RB) - Left Band Edge

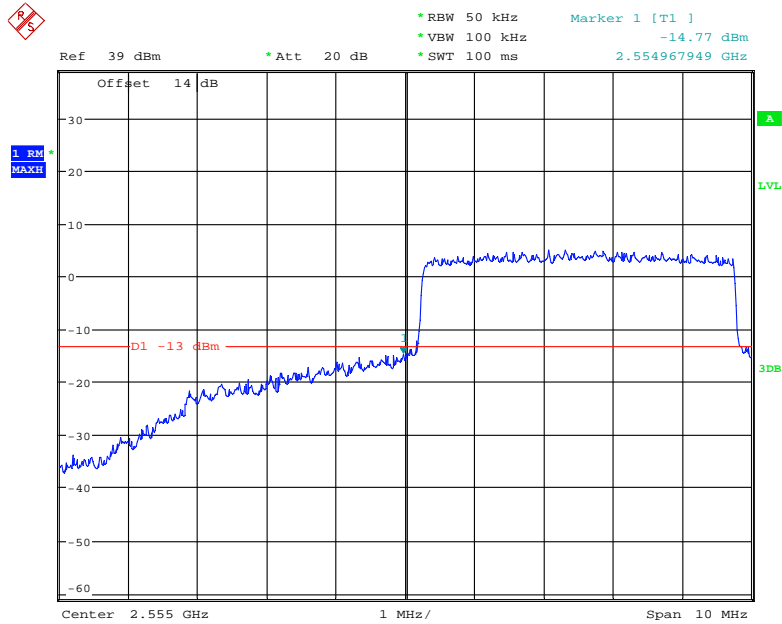


Date: 20.JUN.2018 17:28:30

QPSK (5.0 MHz, FULL RB) - Right Band Edge

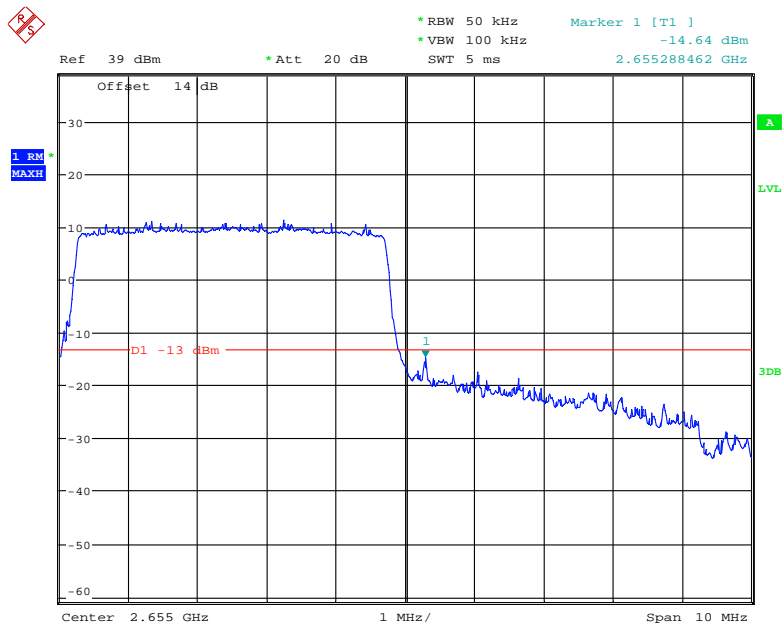


Date: 22.JUN.2018 16:54:17

16-QAM (5.0 MHz, FULL RB) - Left Band Edge

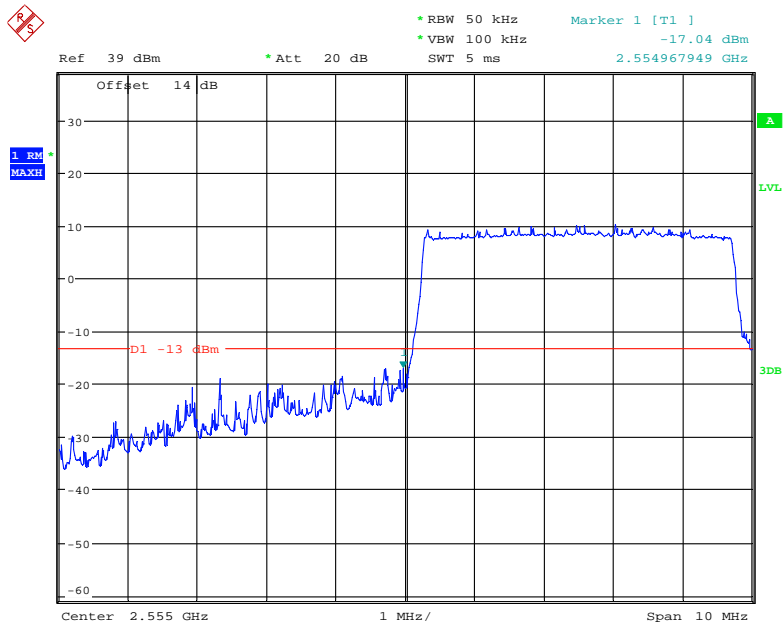


Date: 20.JUN.2018 17:27:16

16-QAM (5.0 MHz, FULL RB) - Right Band Edge

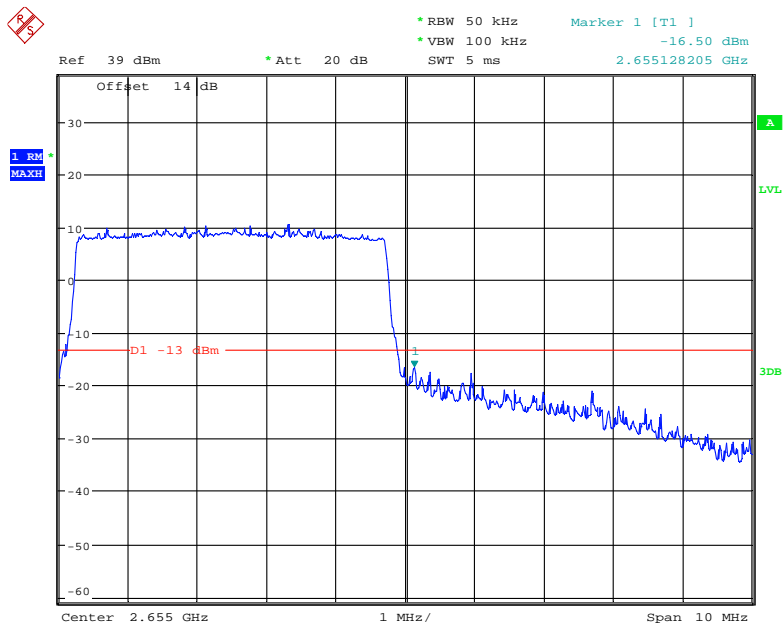


Date: 22.JUN.2018 16:55:39

QPSK (10.0 MHz, FULL RB) - Left Band Edge

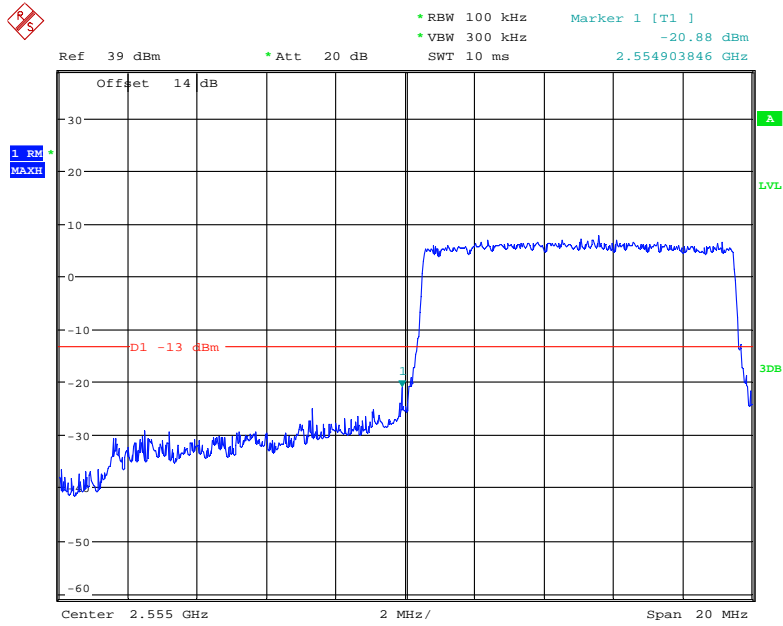


Date: 22.JUN.2018 17:03:46

QPSK (10.0 MHz, FULL RB) - Right Band Edge

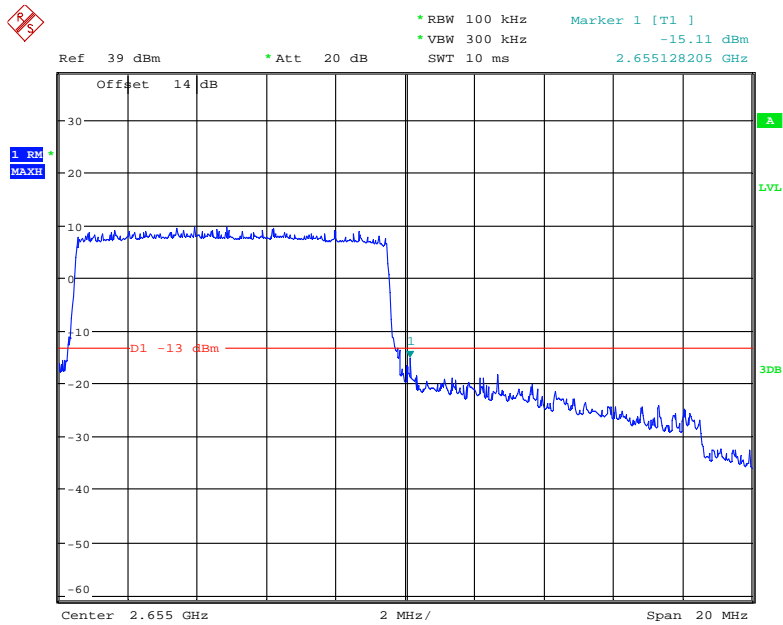


Date: 22.JUN.2018 16:59:17

16-QAM (10.0 MHz, FULL RB) - Left Band Edge

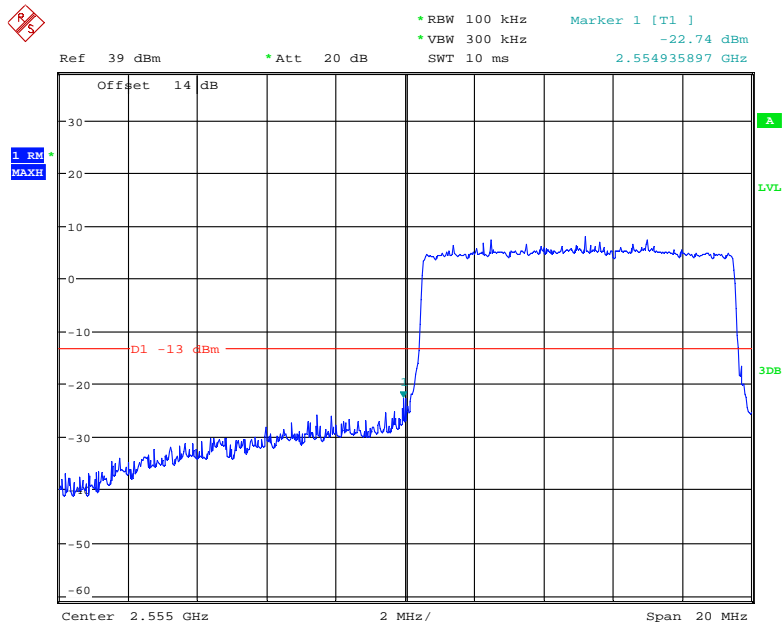


Date: 22.JUN.2018 17:02:55

16-QAM (10.0 MHz, FULL RB) - Right Band Edge

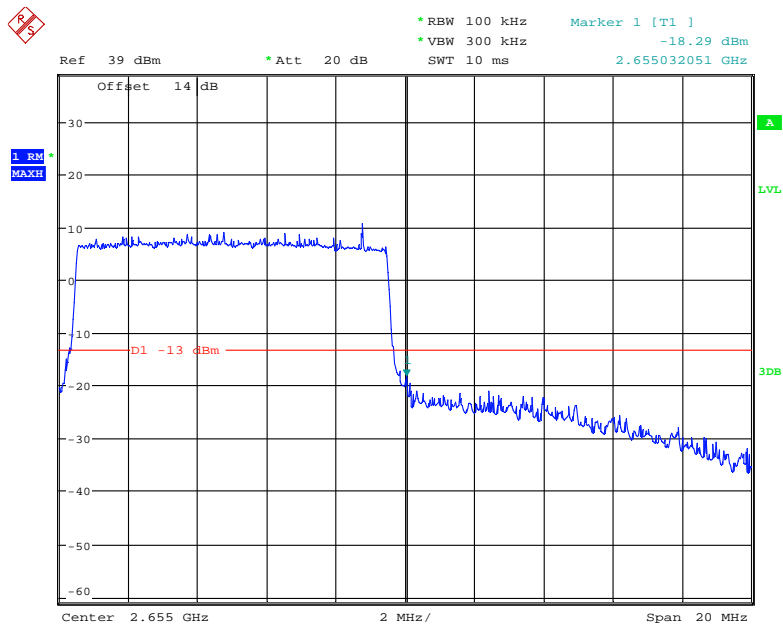


Date: 22.JUN.2018 17:00:16

QPSK (15.0 MHz, FULL RB) - Left Band Edge

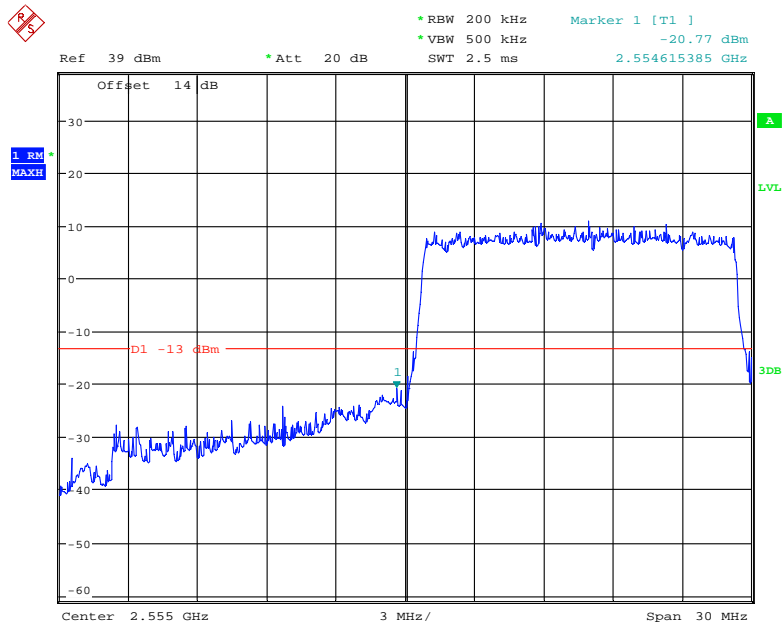


Date: 22.JUN.2018 17:06:53

QPSK (15.0 MHz, FULL RB) - Right Band Edge

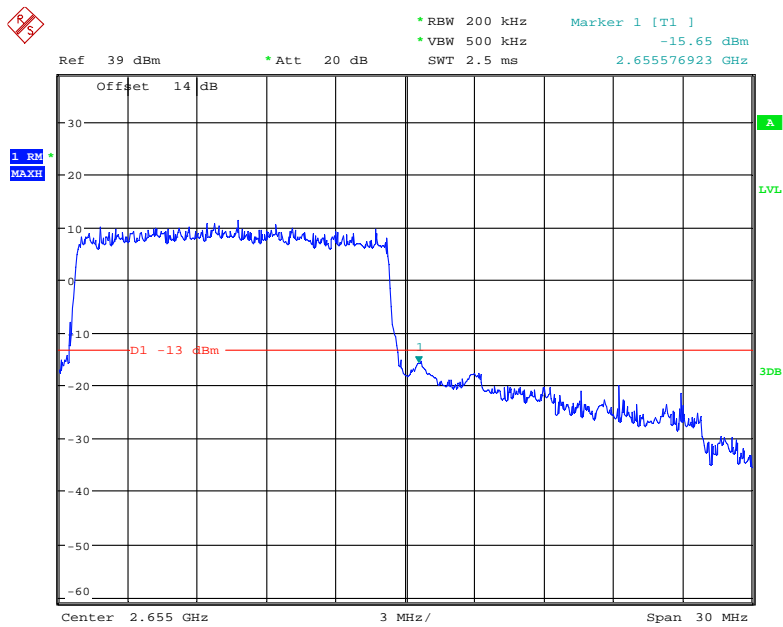


Date: 22.JUN.2018 17:11:11

16-QAM (15.0 MHz, FULL RB) - Left Band Edge

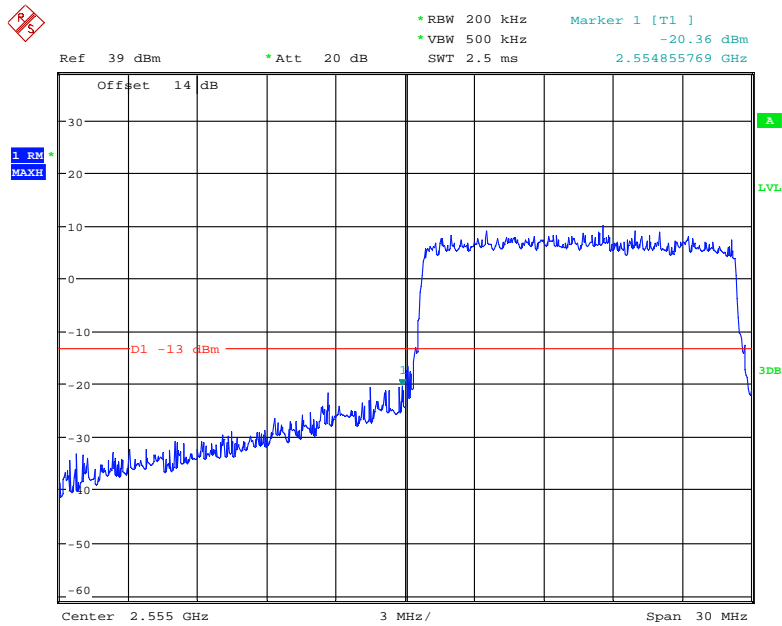


Date: 22.JUN.2018 17:08:07

16-QAM (15.0 MHz, FULL RB) - Right Band Edge

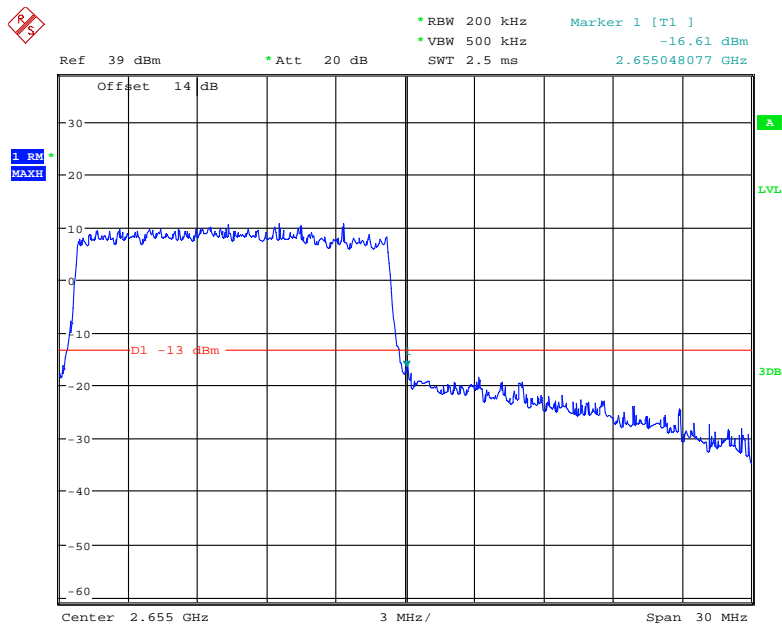


Date: 22.JUN.2018 17:10:31

QPSK (20.0 MHz, FULL RB) - Left Band Edge

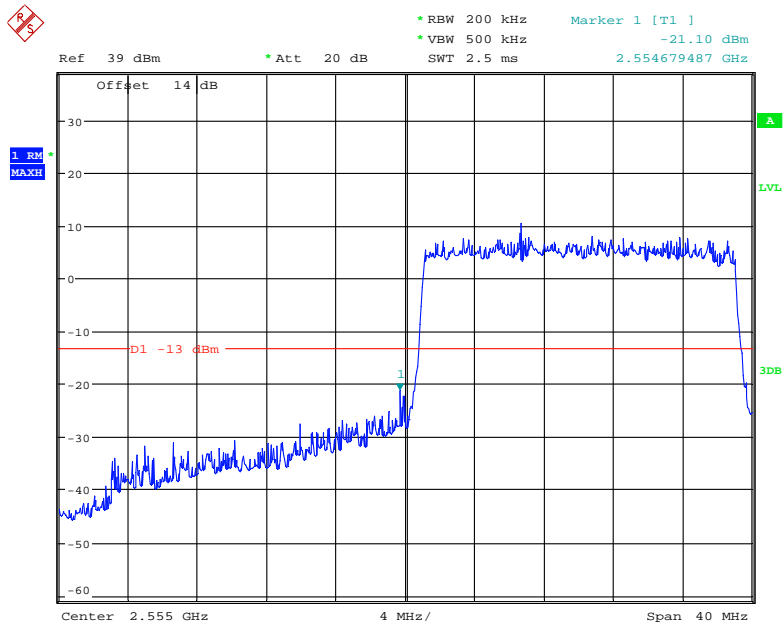


Date: 22.JUN.2018 17:20:25

QPSK (20.0 MHz, FULL RB) - Right Band Edge

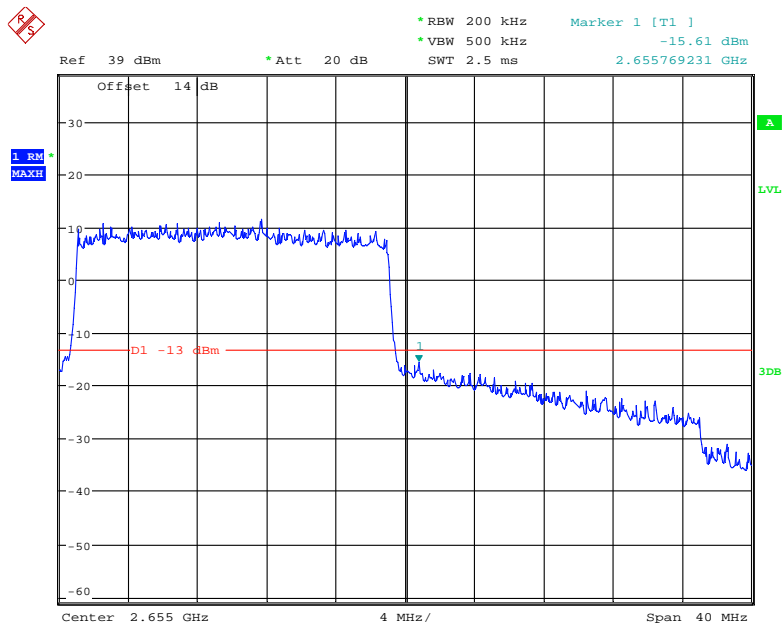


Date: 22.JUN.2018 17:14:56

16-QAM (20.0 MHz, FULL RB) - Left Band Edge

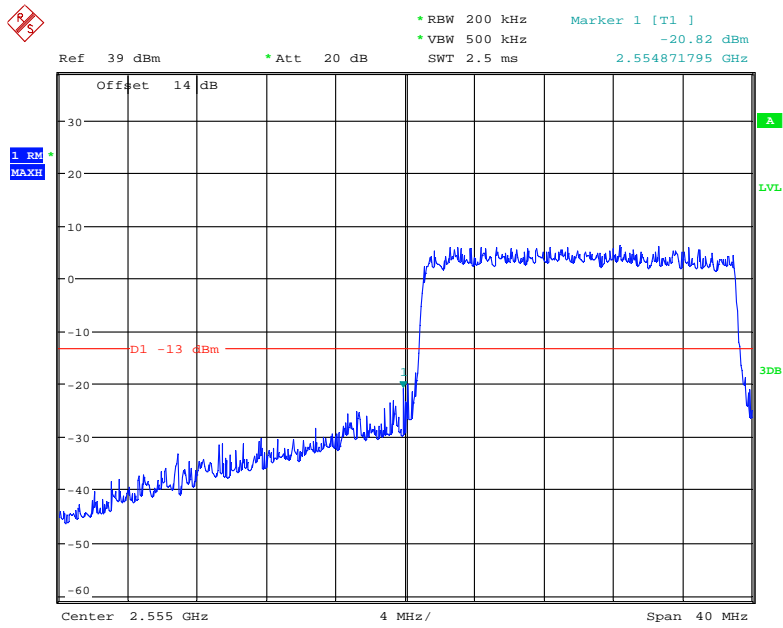

Date: 22.JUN.2018 17:19:27

16-QAM (20.0 MHz, FULL RB) - Right Band Edge

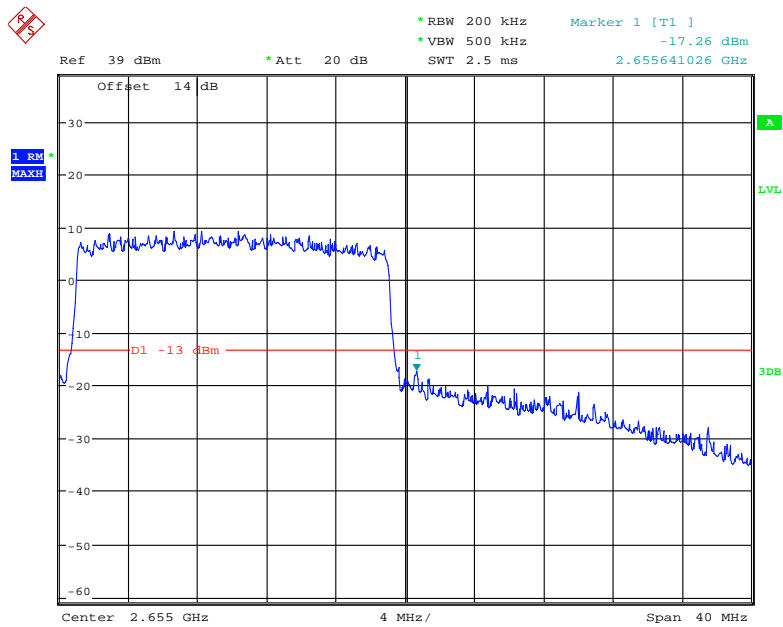

Date: 22.JUN.2018 17:16:34

FCC § 2.1055; § 22.355; § 24.235; §27.54 - FREQUENCY STABILITY

Applicable Standard

FCC § 2.1055, §22.355, §24.235 and §27.54.

According to FCC §2.1055, the frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

According to §22.355, the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances given in Table below:

Frequency Tolerance for Transmitters in the Public Mobile Services

Frequency Range (MHz)	Base, fixed (ppm)	Mobile ≤ 3 watts (ppm)	Mobile > 3 watts (ppm)
25 to 50	20.0	20.0	50.0
50 to 450	5.0	5.0	50.0
450 to 512	2.5	5.0	5.0
821 to 896	1.5	2.5	2.5
928 to 929.	5.0	N/A	N/A
929 to 960.	1.5	N/A	N/A
2110 to 2220	10.0	N/A	N/A


According to §24.235, the frequency stability shall be sufficient to ensure that the fundamental emissions stays within the authorized frequency block.

Test Procedure

Frequency Stability vs. Temperature: The equipment under test was connected to an external DC power supply and the RF output was connected to communication test set via feed-through attenuators. The EUT was placed inside the temperature chamber. The DC leads and RF output cable exited the chamber through an opening made for the purpose.

After the temperature stabilized for approximately 20 minutes, the frequency output was recorded from the communication test set.

Frequency Stability vs. Voltage: For hand carried, battery powered equipment; reduce primary supply voltage to the battery operating end point which shall be specified by the manufacturer.

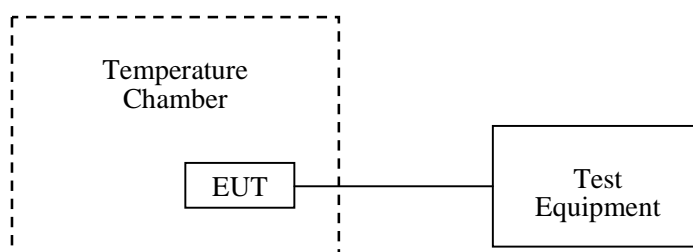

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	52 %
ATM Pressure:	101.0 kPa

The testing was performed by Nancy Wang on 2018-06-12.

EUT operation mode: Transmitting

Test Result: Compliance. Please refer to the following tables.

Cellular Band (Part 22H)

GSM Mode

Middle Channel, $f_0=836.6\text{MHz}$				
Temperature (°C)	Voltage Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-30	3.7	-8	-0.009563	2.5
-20		-1	-0.001195	2.5
-10		-7	-0.008367	2.5
0		-4	-0.004781	2.5
10		1	0.001195	2.5
20		-4	-0.004781	2.5
30		-4	-0.004781	2.5
40		-1	-0.001195	2.5
50		1	0.001195	2.5
25		V min.= 3.5	-2	-0.002391
	V max.= 4.2	-6	-0.007172	2.5

EDGE Mode

Middle Channel, $f_0=836.6\text{MHz}$				
Temperature (°C)	Voltage Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-30	3.7	9	0.010758	2.5
-20		8	0.009563	2.5
-10		4	0.004781	2.5
0		2	0.002391	2.5
10		8	0.009563	2.5
20		7	0.008367	2.5
30		7	0.008367	2.5
40		7	0.008367	2.5
50		10	0.011953	2.5
25		V min.= 3.5	7	0.008367
	V max.= 4.2	12	0.014344	2.5

CDMA (1*RTT, BC0) Mode

Middle Channel, $f_0=836.52\text{MHz}$				
Temperature (°C)	Power Supplied (V_{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-30	3.7	-2	-0.0024	2.5
-20		-4	-0.0048	2.5
-10		-1	-0.0012	2.5
0		-5	-0.0060	2.5
10		-7	-0.0084	2.5
20		-5	-0.0060	2.5
30		-4	-0.0048	2.5
40		-3	-0.0036	2.5
50		-1	-0.0012	2.5
25	V min.= 3.5	2	0.0024	2.5
	V max.= 4.2	3	0.0036	2.5

CDMA (EV-DO, BC0) Mode

Middle Channel, $f_0=836.52\text{MHz}$				
Temperature (°C)	Power Supplied (V_{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-30	3.7	-4	-0.0048	2.5
-20		0	0.0000	2.5
-10		-5	-0.0060	2.5
0		-2	-0.0024	2.5
10		-5	-0.0060	2.5
20		-1	-0.0012	2.5
30		-7	-0.0084	2.5
40		-6	-0.0072	2.5
50		2	0.0024	2.5
25	V min.= 3.5	4	0.0048	2.5
	V max.= 4.2	7	0.0084	2.5

WCDMA Mode

Middle Channel, $f_0 = 836.6\text{MHz}$				
Temperature (°C)	Voltage Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-30	3.7	1	0.001195	2.5
-20		-1	-0.001195	2.5
-10		-2	-0.002391	2.5
0		1	0.001195	2.5
10		2	0.002391	2.5
20		-1	-0.001195	2.5
30		0	0.000000	2.5
40		3	0.003586	2.5
50		1	0.001195	2.5
25		V min.= 3.5	2	0.002391
	V max.= 4.2	3	0.003586	2.5

PCS Band (Part 24E)

GSM Mode

Middle Channel, $f_0 = 1880.0\text{ MHz}$				
Temperature (°C)	Voltage Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Result
-30	3.7	-12	-0.006383	pass
-20		-4	-0.002128	pass
-10		-2	-0.001064	pass
0		-7	-0.003723	pass
10		-7	-0.003723	pass
20		-6	-0.003191	pass
30		-12	-0.006383	pass
40		-10	-0.005319	pass
50		-2	-0.001064	pass
25		V min.= 3.5	-6	-0.003191
	V max.= 4.2	-4	-0.002128	pass

EDGE Mode

Middle Channel, $f_o=1880.0$ MHz				
Temperature (°C)	Voltage Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Result
-30	3.7	-2	-0.001064	pass
-20		1	0.000532	pass
-10		1	0.000532	pass
0		7	0.003723	pass
10		6	0.003191	pass
20		2	0.001064	pass
30		5	0.002660	pass
40		2	0.001064	pass
50		0	0.000000	pass
25		V min.= 3.5	-1	-0.000532
	V max.= 4.2	0	0.000000	pass

CDMA (1*RTT, BC1) Mode

Middle Channel, $f_o=1880.0$ MHz				
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Result
-30	3.7	-4	-0.0021	pass
-20		-5	-0.0027	pass
-10		-4	-0.0021	pass
0		-6	-0.0032	pass
10		-4	-0.0021	pass
20		-4	-0.0021	pass
30		-1	-0.0005	pass
40		1	0.0005	pass
50		2	0.0011	Pass
25		V min.= 3.5	5	0.0027
	V max.= 4.2	7	0.0037	Pass

CDMA (EV-DO, BC1) Mode

Middle Channel, $f_0=1880.0\text{MHz}$				
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Result
-30	3.7	-4	-0.0021	pass
-20		-2	-0.0011	pass
-10		5	0.0027	pass
0		-6	-0.0032	pass
10		-4	-0.0021	pass
20		-6	-0.0032	pass
30		-3	-0.0016	pass
40		-2	-0.0011	pass
50		2	0.0011	Pass
25	V min.= 3.5	1	0.0005	pass
	V max.= 4.2	3	0.0016	Pass

WCDMA Mode

Middle Channel, $f_0=1880.0\text{ MHz}$				
Temperature (°C)	Voltage Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Result
-30	3.7	-1	-0.000532	pass
-20		1	0.000532	pass
-10		2	0.001064	pass
0		-2	-0.001064	pass
10		1	0.000532	pass
20		-1	-0.000532	pass
30		-2	-0.001064	pass
40		3	0.001596	pass
50		1	0.000532	pass
25	V min.= 3.5	3	0.001596	pass
	V max.= 4.2	2	0.001064	pass

**LTE:
QPSK:**

Band 7:

Temperature (°C)	Power Supplied (V _{DC})	F _L (MHz)	F _H (MHz)	F _L Limit (MHz)	F _H Limit (MHz)
-30	3.7	2500.832	2569.103	2500	2570
-20		2500.853	2569.084	2500	2570
-10		2500.876	2569.165	2500	2570
0		2500.863	2569.146	2500	2570
10		2500.837	2569.163	2500	2570
20		2500.848	2569.133	2500	2570
30		2500.812	2569.100	2500	2570
40		2500.872	2569.112	2500	2570
50		2500.811	2569.102	2500	2570
25		V min.= 3.5	2500.847	2569.085	2500
	V max.= 4.2	2500.887	2569.107	2500	2570

Band 41:

Temperature (°C)	Power Supplied (V _{DC})	F _L (MHz)	F _H (MHz)	F _L Limit (MHz)	F _H Limit (MHz)
-30	3.7	2555.844	2654.085	2555	2655
-20		2555.836	2654.088	2555	2655
-10		2555.823	2654.123	2555	2655
0		2555.836	2654.108	2555	2655
10		2555.821	2654.117	2555	2655
20		2555.823	2654.095	2555	2655
30		2555.841	2654.108	2555	2655
40		2555.813	2654.111	2555	2655
50		2555.858	2654.186	2555	2655
25		V min.= 3.5	2555.840	2654.120	2555
	V max.= 4.2	2555.860	2654.147	2555	2655

16QAM:

Band 7:

Temperature (°C)	Power Supplied (V _{DC})	F _L (MHz)	F _H (MHz)	F _L Limit (MHz)	F _H Limit (MHz)
-30	3.7	2500.795	2569.121	2500	2570
-20		2500.809	2569.134	2500	2570
-10		2500.823	2569.136	2500	2570
0		2500.828	2569.159	2500	2570
10		2500.783	2569.117	2500	2570
20		2500.794	2569.148	2500	2570
30		2500.860	2569.140	2500	2570
40		2500.805	2569.114	2500	2570
50		2500.785	2569.090	2500	2570
25		V min.= 3.5	2500.782	2569.151	2500
	V max.= 4.2	2500.792	2569.146	2500	2570

Band 41:

Temperature (°C)	Power Supplied (V _{DC})	F _L (MHz)	F _H (MHz)	F _L Limit (MHz)	F _H Limit (MHz)
-30	3.7	2555.844	2654.085	2555	2655
-20		2555.836	2654.088	2555	2655
-10		2555.823	2654.163	2555	2655
0		2555.836	2654.148	2555	2655
10		2555.821	2654.097	2555	2655
20		2555.823	2654.095	2555	2655
30		2555.841	2654.108	2555	2655
40		2555.813	2654.111	2555	2655
50		2555.858	2654.086	2555	2655
25		V min.= 3.5	2555.840	2654.120	2555
	V max.= 4.2	2555.860	2654.147	2555	2655

***** END OF REPORT *****