



BUREAU
VERITAS

Test Report No.: W7L-P22110036RF02



FCC TEST REPORT (Part 15, Subpart C)



Applicant:	i.safe MOBILE GmbH
Address:	i_Park Tauberfranken 10 97922 Lauda-Koenigshofen Germany

Manufacturer or Supplier:	i.safe MOBILE GmbH
Address:	i_Park Tauberfranken 10 97922 Lauda-Koenigshofen Germany
Product:	Smartphone
Brand Name:	i.safe MOBILE
Model Name:	M540A01
Marketing Name:	IS540.1,IS540.M1,IS540.2,IS540.RG
FCC ID:	2AACZ-M540A01
Date of tests:	Nov. 24, 2022 ~ Feb. 03, 2023

The tests have been carried out according to the requirements of the following standard:

- FCC Part 15, Subpart C, Section 15.247**
- ANSI C63.10-2013**

CONCLUSION: The submitted sample was found to COMPLY with the test requirement

Prepared by Simon Wang Engineer / Mobile Department	Approved by Luke Lu Manager / Mobile Department
	
Date: Feb. 03, 2023	Date: Feb. 03, 2023

This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.



TABLE OF CONTENTS

RELEASE CONTROL RECORD5

1 SUMMARY OF TEST RESULTS.....6

1.1 MEASUREMENT UNCERTAINTY7

2 GENERAL INFORMATION8

2.1 GENERAL DESCRIPTION OF EUT8

2.2 DESCRIPTION OF TEST MODES10

2.2.1 CONFIGURATION OF SYSTEM UNDER TEST11

2.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL.....11

2.3 DUTY CYCLE OF TEST SIGNAL15

2.4 GENERAL DESCRIPTION OF APPLIED STANDARDS16

2.5 DESCRIPTION OF SUPPORT UNITS16

3 TEST TYPES AND RESULTS.....17

3.1 CONDUCTED EMISSION MEASUREMENT17

3.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT17

3.1.2 TEST INSTRUMENTS.....17

3.1.3 TEST PROCEDURES18

3.1.4 DEVIATION FROM TEST STANDARD18

3.1.5 TEST SETUP19

3.1.6 EUT OPERATING CONDITIONS19

3.1.7 TEST RESULTS20

3.2 RADIATED EMISSION MEASUREMENT22

3.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT22

3.2.2 TEST INSTRUMENTS.....23

3.2.3 TEST PROCEDURES24

3.2.4 DEVIATION FROM TEST STANDARD24

3.2.5 TEST SETUP25

3.2.6 EUT OPERATING CONDITIONS26

3.2.7 TEST RESULTS27

3.3 6 DB BANDWIDTH MEASUREMENT73

3.3.1 LIMITS OF 6DB BANDWIDTH MEASUREMENT73

3.3.2 TEST INSTRUMENTS.....73

3.3.3 TEST PROCEDURE.....73

3.3.4 DEVIATION FROM TEST STANDARD74



3.3.5	TEST SETUP	74
3.3.6	EUT OPERATING CONDITIONS	74
3.3.7	TEST RESULTS	75
3.4	CONDUCTED OUTPUT POWER.....	76
3.4.1	LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT	76
3.4.2	TEST SETUP	76
3.4.3	TEST INSTRUMENTS.....	76
3.4.4	TEST PROCEDURES	76
3.4.5	DEVIATION FROM TEST STANDARD	76
3.4.6	EUT OPERATING CONDITIONS	76
3.4.7	TEST RESULTS	77
3.4.7.1	MAXIMUM PEAK OUTPUT POWER	77
3.4.7.2	AVERAGE OUTPUT POWER (FOR REFERENCE).....	78
3.5	POWER SPECTRAL DENSITY MEASUREMENT	79
3.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	79
3.5.2	TEST SETUP	79
3.5.3	TEST INSTRUMENTS.....	79
3.5.4	TEST PROCEDURE.....	79
3.5.5	DEVIATION FROM TEST STANDARD	79
3.5.6	EUT OPERATING CONDITION	79
3.5.7	TEST RESULTS	80
3.6	OUT OF BAND EMISSION MEASUREMENT	81
3.6.1	LIMITS OF OUT OF BAND EMISSION MEASUREMENT	81
3.6.2	TEST SETUP	81
3.6.3	TEST INSTRUMENTS.....	81
3.6.4	TEST PROCEDURE.....	81
3.6.5	DEVIATION FROM TEST STANDARD	82
3.6.6	EUT OPERATING CONDITION	82
3.6.7	TEST RESULTS	82
3.7	ANTENNA REQUIREMENTS.....	83
3.7.1	STANDARD APPLICABLE	83
3.7.2	ANTENNA CONNECTED CONSTRUCTION.....	83
3.7.3	ANTENNA GAIN	83
4	PHOTOGRAPHS OF THE TEST CONFIGURATION	84
5	MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB85	
6	APPENDIX 1.....	86



**BUREAU
VERITAS**

Test Report No.: W7L-P22110036RF02

WLAN 2.4G	86
WLAN_OFDMA.....	242
7 APPENDIX 2 BLE	297



**BUREAU
VERITAS**

Test Report No.: W7L-P22110036RF02

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
W7L-P22110036RF02	Original release	Feb. 03, 2023



1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC PART 15, SUBPART C (SECTION 15.247)		
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT
15.207	AC Power Conducted Emission	Compliance
15.205 15.209	Radiated Emissions	Compliance
15.247(d)	Out of band Emission Measurement	Compliance
15.247(a)(2)	6dB bandwidth	Compliance
15.247(b)	Conducted Output power	Compliance
15.247(e)	Power Spectral Density	Compliance
15.203	Antenna Requirement	Compliance

Note : 1.Except RSE, other data please refer to Appendix 1 (for WIFI-2.4G) and Appendix 2 (for BLE).

2. WLAN(normal mode& RU-OFDMA)2.4G supports SISO&MIMO mode , the whole testing have assessed the MIMO mode by referring to their maximum conducted power.

3. 11ax OFDMA Mode Only support full RU tone.

4. For WIFI-2.4G, RSE had been tested on SISO&MIMO mode of EUT. The worst case was found on MIMO mode, only the worst case data had been reported in the report.



1.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	UNCERTAINTY
AC Power Conducted emissions	±2.70dB
Radiated emissions (9KHz~30MHz)	±2.68dB
Radiated emissions (30MHz~1GHz)	±4.98dB
Radiated emissions (1GHz ~6GHz)	±4.70dB
Radiated emissions (6GHz ~18GHz)	±4.60dB
Radiated emissions (18GHz ~40GHz)	±4.12dB
Conducted emissions	±4.01dB
Occupied Channel Bandwidth	±43.58KHz
Conducted Output power	±2.06dB
Power Spectral Density	±0.85 dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.



2 GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

PRODUCT	Smartphone
BRAND NAME	i.safe MOBILE
MODEL NAME	M540A01
MARKETING NAME	IS540.1,IS540.M1,IS540.2,IS540.RG
NOMINAL VOLTAGE	5.0Vdc(adapter or host equipment) 3.7Vdc (Li-ion, battery)
MODULATION	DSSS, OFDM, GFSK, OFDMA
TRANSMISSION RATE	802.11b: 11/ 5.5/ 2.0 / 1.0 Mbps 802.11g: 54/ 48/ 36 / 24 / 18 / 9/ 6 Mbps 802.11n20: up to 144.4 Mbps 802.11n40: up to 300 Mbps BT_LE: 0.125 Mbps /0.5 Mbps /1 Mbps/2 Mbps 802.11ax 20 (RU242): up to 286.8Mbps 802.11ax 40 (RU484): up to 573.5Mbps
OPERATING FREQUENCY	2412-2462MHz for 11b/g/n(HT20/40) 2402-2480MHz for BT-LE(GFSK) 2412-2462MHz for ax(20M RU242)/ax (40M RU484)
MAX. OUTPUT POWER	WLAN: 299.23mW (Maximum) BT-LE: 8.91mW (Maximum) RU WLAN: 152.05mW (Maximum)
ANTENNA TYPE	ANT 1: PIFA Antenna with 0.1dBi gain for WIFI ANT 2: PIFA Antenna with -3.7dBi gain for WIFI
HW VERSION	V02
SW VERSION	IS540_ROW_00.00_1_20221017
I/O PORTS	Refer to user's manual
CABLE SUPPLIED	USB cable1: non-shielded cable, with w/o ferrite core, 1.0 meter USB cable2: non-shielded cable, with w/o ferrite core, 1.0 meter



NOTE:

1. For a more detailed features description, please refer to the manufacturer’s specifications or the user's manual.
2. The EUT incorporates a MIMO function. Physically, the EUT provides two transmitter and two receiver.

MODULATION MODE	TX/RX FUNCTION
802.11b	2TX /2RX
802.11g	2TX /2RX
802.11n (20MHz)	2TX /2RX
802.11n (40MHz)	2TX /2RX
802.11ax (20MHz RU 242)	2TX /2RX
802.11ax (40MHz RU 484)	2TX /2RX
BT_LE(1MHz)	1TX /1RX

3. For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.

List of Accessory:

ACCESSORIES	BRAND	MANUFACTURER	MODEL	SPECIFICATION
Battery	N/A	FPR Connectivity Technology Inc.	MBP540A01	Capacity: 3.7Vdc, 4400mAh
AC Adapter	N/A	SHENZHEN SHI YINGYUAN POWER SUPPLY TECHNOLOGY CO., LTD.	ICP12-050-2000B	I/P: 100-240Vac, 0.3A, O/P: 5.0Vdc, 2A
USB Cable 1	N/A	Winpower Technology Co., LTD	PROTECTOR 2.0	Signal Line,1.0meter
USB Cable 2	N/A	Winpower Technology Co., LTD	USB2.0	Signal Line,1.0meter



2.2 DESCRIPTION OF TEST MODES

11 channels are provided for 802.11b, 802.11g and 802.11n (HT20), 802.11ax20 (RU 242):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2412 MHz	7	2442 MHz
2	2417 MHz	8	2447 MHz
3	2422 MHz	9	2452 MHz
4	2427 MHz	10	2457 MHz
5	2432 MHz	11	2462 MHz
6	2437 MHz		

7 channels are provided for 802.11n (HT40), 802.11ax40 (RU 484):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
3	2422 MHz	7	2442 MHz
4	2427 MHz	8	2447 MHz
5	2432 MHz	9	2452 MHz
6	2437 MHz		

40 channels are provided for BT-LE (GFSK):

CHANNEL	FREQ. (MHZ)	CHANNEL	FREQ. (MHZ)	CHANNEL	FREQ. (MHZ)	CHANNEL	FREQ. (MHZ)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480



2.2.1 CONFIGURATION OF SYSTEM UNDER TEST

Please see section 5 photographs of the test configuration for reference.

2.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports. The worst case was found when positioned on Y axis for radiated emission. Following test modes were selected for the final test, and the final worst case is marked in boldface and recorded in the report:

EUT CONFIGURE MODE	APPLICABLE TO				MODE
	RE<1G	RE≥1G	PLC	APCM	
-	√	√	√	√	-

Where **RE<1G**: Radiated Emission below 1GHz **RE≥1G**: Radiated Emission above 1GHz
PLC: Power Line Conducted Emission **APCM**: Antenna Port Conducted Measurement

NOTE: No need to concern of Conducted Emission due to the EUT is powered by battery.

RADIATED EMISSION TEST (BELOW 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	DATA RATE (Mbps)
802.11ax 40 (RU 484)	3 to 9	3	OFDMA	MCS0
BT-LE	0 to 39	39	GFSK	0.125



RADIATED EMISSION TEST (ABOVE 1GHz):

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	1.0
802.11g	1 to 11	1, 6, 11	OFDM	6.0
802.11n HT20	1 to 11	1, 6, 11	OFDM	MCS0
802.11n HT40	3 to 9	3,6,9	OFDM	MCS0
BT-LE	0 to 39	0,19, 39	GFSK	0.125&0.5&1&2
802.11ax 20 (RU 242)	1 to 11	1, 11	OFDMA	MCS0
802.11ax 40 (RU 484)	3 to 9	3, 9	OFDMA	MCS0

POWER LINE CONDUCTED EMISSION TEST

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	DATA RATE (Mbps)
802.11ax 40 (RU 484)	3 to 9	3	OFDMA	MCS0



BANDEDGE MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	1.0
802.11g	1 to 11	1, 6, 11	OFDM	6.0
802.11n HT20	1 to 11	1, 6, 11	OFDM	MCS0
802.11n HT40	3 to 9	3,6,9	OFDM	MCS0
BT-LE	0 to 39	0,19, 39	GFSK	0.125&0.5&1&2
802.11ax 20 (RU 242)	1 to 11	1,11	OFDMA	MCS0
802.11ax 40 (RU 484)	3 to 9	3,9	OFDMA	MCS0



ANTENNA PORT CONDUCTED MEASUREMENT:

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	1.0
802.11g	1 to 11	1, 6, 11	OFDM	6.0
802.11n HT20	1 to 11	1, 6, 11	OFDM	MCS0
802.11n HT40	3 to 9	3,6,9	OFDM	MCS0
BT-LE	0 to 39	0,19, 39	GFSK	0.125&0.5&1&2
802.11ax 20 (RU 242)	1 to 11	1,11	OFDMA	MCS0
802.11ax 40 (RU 484)	3 to 9	3,9	OFDMA	MCS0

TEST CONDITION:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	TEST VOLTAGE	TESTED BY
RE<1G	23deg. C, 70%RH	DC 5V By Adapter	Jace Hu
RE≥1G	23deg. C, 70%RH	DC 5V By Adapter	Jace Hu
PLC	25deg. C, 52%RH	DC 5V By Adapter	Carl Xie
APCM	25deg. C, 60%RH	DC 3.7V By DC Supply	James Fu



2.3 DUTY CYCLE OF TEST SIGNAL

Please Refer to Appendix1/2 Of this test report.

WORST-CASE DATA:

Measured Duty Cycle		
Mode	Duty Cycle [%]	
	ANT1/2	
WIFI 2.4GHz	11B	98.53
	11G	99.53
	11N20	99.82
	11N40	99.63
	11ax20	99.82
	11ax40	99.82
	11ax 20 (RU 242)	99.63
	11ax 40 (RU 484)	99.63
BT LE	BT4.0	61.90
	BT5.0	33.33
	BTS2	57.45
	BTS8	82.93

Note:

Duty cycle of test signal is < 98%, duty factor shall be considered.



2.4 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C, Section 15.247

KDB 558074 D01 DTS Meas Guidance v05r02

ANSI C63.10-2013

Note :

1. All test items have been performed and recorded as per the above standards.
2. The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (Certification). The test report has been issued separately.

2.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	Desktop	Lenovo	M73 SFF	PC04GRQV	N/A
2	Desktop	Lenovo	M73 SFF	PC06CS27	N/A
3	Laptop	Lenovo	Thinkpad T450	PC-049PT1	N/A

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	AC Line: Unshielded, Detachable 1.5m
2	AC Line: Unshielded, Detachable 1.5m
3	AC Line: Unshielded, Detachable 1.5m



3 TEST TYPES AND RESULTS

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dBµV)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56	56 to 46
0.5 ~ 5	56	46
5 ~ 30	60	50

- NOTE:** 1.The lower limit shall apply at the transition frequencies.
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.
3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

3.1.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESR3	101900	Feb. 15,22	Feb. 14,23
EMC32 test software	Rohde&Schwarz	EMC32	NA	NA	NA
LISN network	Rohde&Schwarz	ENV216	101922	Mar. 04,22	Mar. 03,23

- NOTE:**
1. The test was performed in CE shielded room.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.



3.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.


NOTE: All modes of operation were investigated and the worst-case emissions are reported.

3.1.4 DEVIATION FROM TEST STANDARD

No deviation.



3.1.5 TEST SETUP

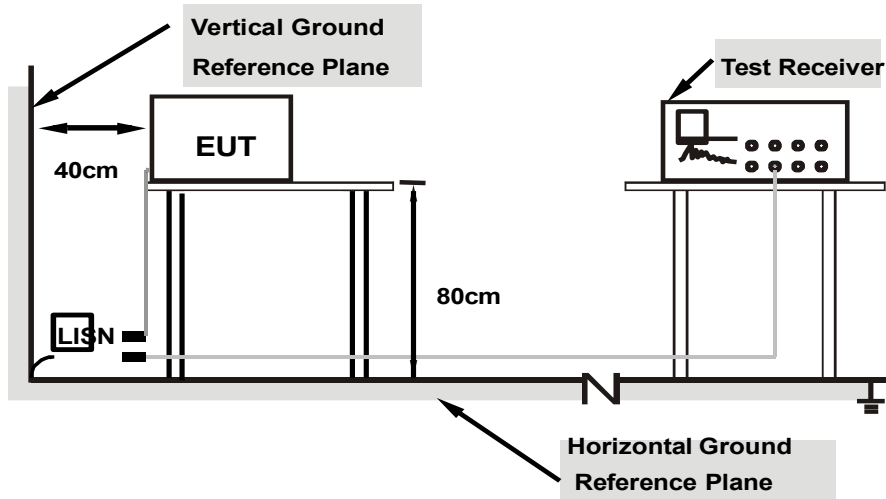

- Note:**
- 1.Support units were connected to second LISN.
 - 2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

For the actual test configuration, please refer to the attached file (Test Setup Photo).

3.1.6 EUT OPERATING CONDITIONS

- a. Turned on the power and connected of all equipment.
- b. EUT was operated according to the type used was description in manufacturer's specifications or the User's Manual.



3.1.7 TEST RESULTS


CONDUCTED WORST-CASE DATA:

Frequency Range	150KHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120Vac, 60Hz	Environmental Conditions	26deg. C, 51%RH
Tested By	Carl Xie		

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.388000	---	16.71	48.11	31.39	L1	ON	9.7
0.388000	35.85	---	58.11	22.26	L1	ON	9.7
0.956000	---	19.66	46.00	26.34	L1	ON	9.7
0.956000	36.61	---	56.00	19.39	L1	ON	9.7
2.072000	---	16.34	46.00	29.66	L1	ON	9.7
2.072000	29.43	---	56.00	26.57	L1	ON	9.7
3.060000	---	14.41	46.00	31.59	L1	ON	9.7
3.060000	24.76	---	56.00	31.24	L1	ON	9.7
4.012000	---	15.32	46.00	30.68	L1	ON	9.7
4.012000	26.62	---	56.00	29.38	L1	ON	9.7
25.884000	---	18.17	50.00	31.83	L1	ON	9.8
25.884000	29.88	---	60.00	30.12	L1	ON	9.8

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Limit value -Emission level
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

Full Spectrum

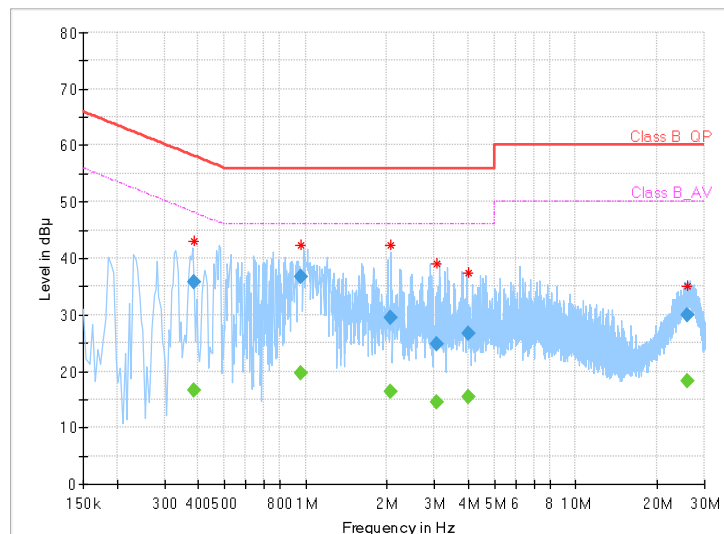




Frequency Range	150KHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120Vac, 60Hz	Environmental Conditions	26deg. C, 51%RH
Tested By	Carl Xie		

Frequency (MHz)	QuasiPeak (dBUV)	CAverage (dBUV)	Limit (dBUV)	Margin (dB)	Line	Filter	Corr. (dB)
0.320000	---	28.46	49.71	21.25	N	ON	9.7
0.320000	37.25	---	59.71	22.45	N	ON	9.7
0.460000	---	28.09	46.69	18.60	N	ON	9.7
0.460000	39.21	---	56.69	17.48	N	ON	9.7
1.084000	---	21.00	46.00	25.00	N	ON	9.8
1.084000	35.06	---	56.00	20.94	N	ON	9.8
1.252000	---	21.07	46.00	24.93	N	ON	9.8
1.252000	35.76	---	56.00	20.24	N	ON	9.8
2.228000	---	21.44	46.00	24.56	N	ON	9.8
2.228000	34.11	---	56.00	21.89	N	ON	9.8
4.900000	---	19.19	46.00	26.81	N	ON	9.8
4.900000	28.58	---	56.00	27.42	N	ON	9.8

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Limit value -Emission level
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

Full Spectrum

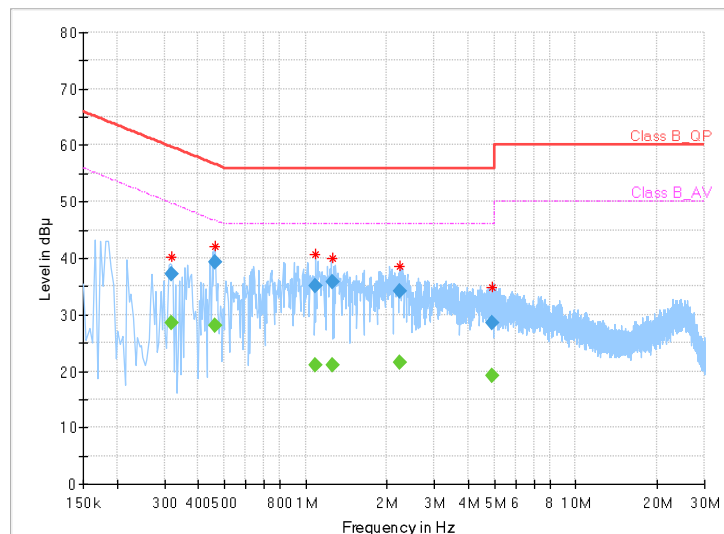



3.2 RADIATED EMISSION MEASUREMENT

3.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

**3.2.2 TEST INSTRUMENTS**

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
3m Semi-anechoic Chamber	ETS-LINDGREN	9m*6m*6m	Euroshieldpn-CT0001143-1216	May. 19,20	May. 18,23
Bilog Antenna	ETS-LINDGREN	3143B	00161965	Mar. 06,22	Mar. 05,23
Horn Antenna	ETS-LINDGREN	3117	00168692	Mar. 06,22	Mar. 05,23
Horn Antenna (18GHz-40GHz)	N/A	QWH-SL-18-40-K-SG/QMS-00361	15433	Aug. 27, 22	Aug. 26, 23
Test Software	E3	V 9.160323	N/A	N/A	N/A
Test Software	JS1120-3	3.2.06	N/A	N/A	N/A
10dB Attenuator	JFW/USA	50HF-010-SMA	1505	Jun. 02,22	Jun. 01,23
MXE EMI Receiver	KEYSIGHT	N9038A-544	MY54450026	Feb. 21,22	Feb. 20,23
Signal Pre-Amplifier	EMSI	EMC 9135	980249	May.12,22	May.11,23
Signal Pre-Amplifier	EMSI	EMC 012645B	980257	May.12,22	May.11,23
Signal Pre-Amplifier	EMSI	EMC 184045B	980259	Feb. 21,22	Feb.20,23
DC Source	Kikusui/JP	PMX18-5A	0000001	Aug. 24,22	Aug. 23,23
Power Meter	Anritsu	ML2495A	1506002	Feb. 22,22	Feb. 21,23
Power Sensor	Anritsu	MA2411B	1339352	May. 14,22	May. 13,23
Loop Antenna	Schwarzbeck	FMZB 1519B	00173	Sep. 04,22	Sep. 03,23

- NOTE:**
1. The calibration interval of the above test instruments is 12 months or 36 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
 2. The test was performed in 3m Chamber.
 3. The FCC Site Registration No. is 525120; The Designation No. is CN1171.



3.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters (for below 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, For battery operated equipment, the equipment tests shall be perform using fresh batteries. The turntable was rotated to maximize the emission level.

Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 3MHz for RMS Average (Duty cycle < 98%) for Average detection (AV) at frequency above 1GHz, then the measurement results was added to a correction factor ($10 \log(1/\text{duty cycle})$).
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.
5. All modes of operation were investigated and the worst-case emissions are reported.


3.2.4 DEVIATION FROM TEST STANDARD

No deviation




3.2.5 TEST SETUP

<Frequency Range 9KHz~30MHz >

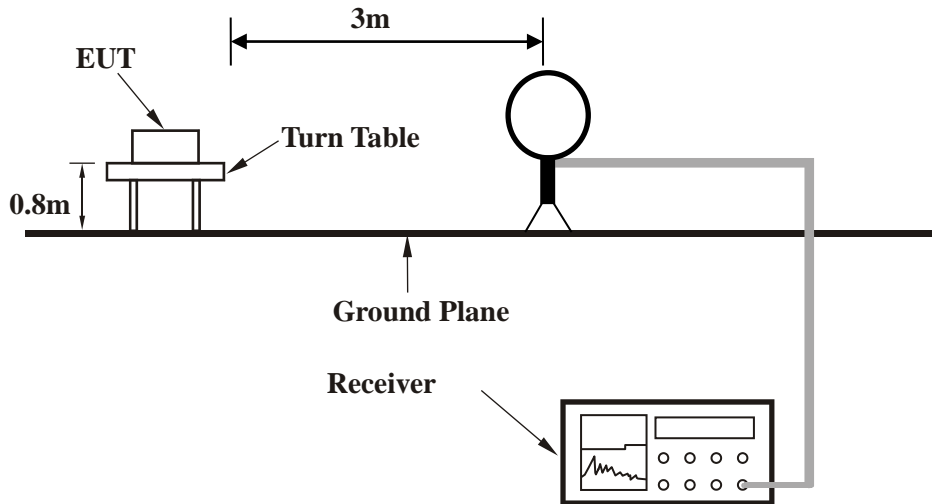


< Frequency Range 30MHz~1GHz >

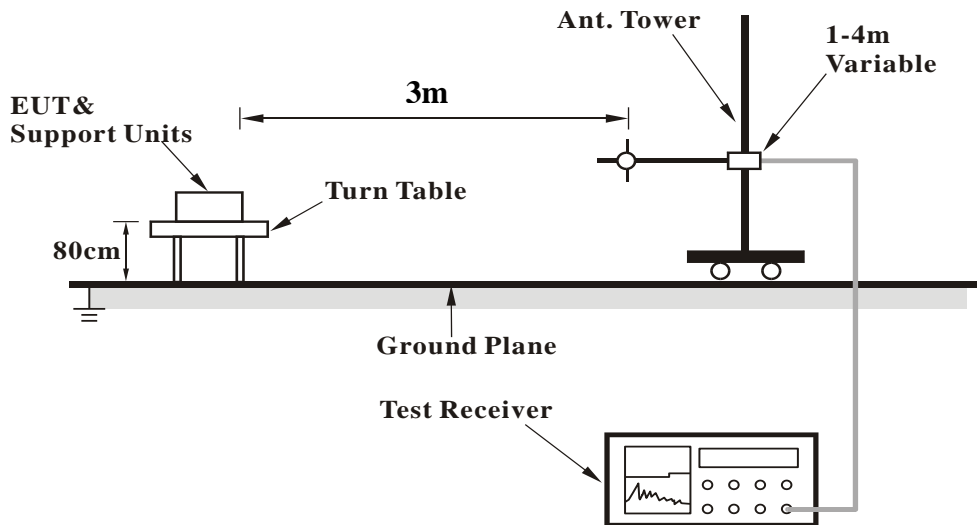



<Frequency Range above 1GHz>

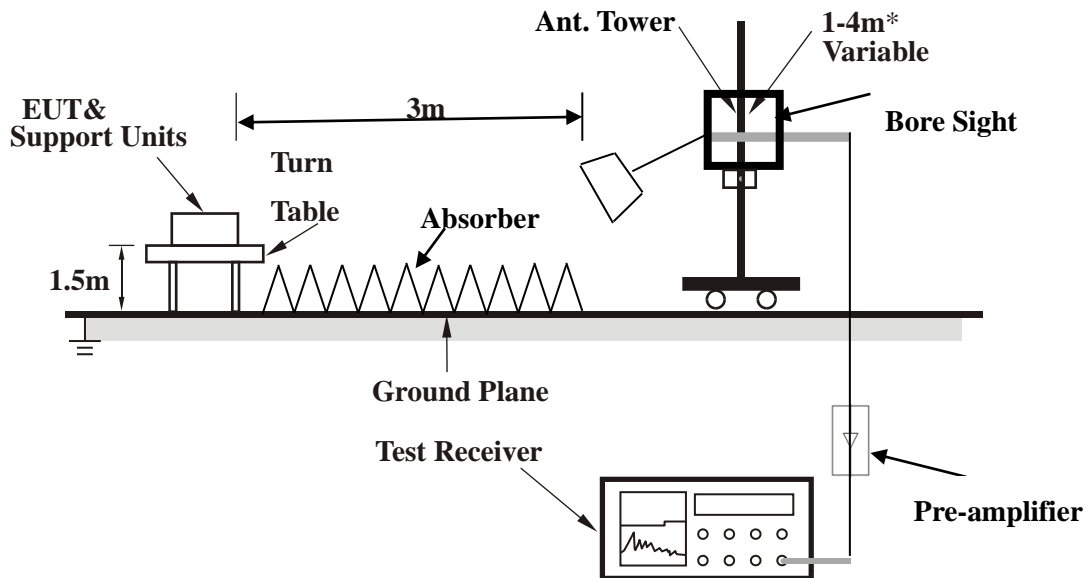

Note: Above 1G is a directional antenna

Depends on the EUT height and the antenna 3dB beamwidth both, refer to section 7.3 of CISPR 16-2-3.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

3.2.6 EUT OPERATING CONDITIONS

- Set the EUT under full load condition and placed them on a testing table.
- Set the transmitter part of EUT under transmission condition continuously at specific channel frequency.
- The necessary accessories enable the EUT in full functions.



3.2.7 TEST RESULTS

NOTE : The 9K~30MHz amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required in the report.

BELOW 1GHz WORST-CASE DATA:

30 MHz – 1GHz data:


802.11ax (40MHz) (RU484):

CHANNEL	TX Channel 3	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M											
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK	
63.950	24.97	52.86	40.00	-15.03	8.61	0.45	36.95	100	360	QP	
165.800	30.07	54.81	43.50	-13.43	11.05	0.68	36.47	100	360	QP	
220.120	32.55	55.87	46.00	-13.45	12.19	0.77	36.28	100	360	QP	
323.910	32.17	52.99	46.00	-13.83	14.53	0.95	36.30	100	360	QP	
598.420	28.94	44.76	46.00	-17.06	19.67	1.36	36.85	100	360	QP	
799.210	31.54	44.77	46.00	-14.46	22.39	1.58	37.20	100	360	QP	

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.

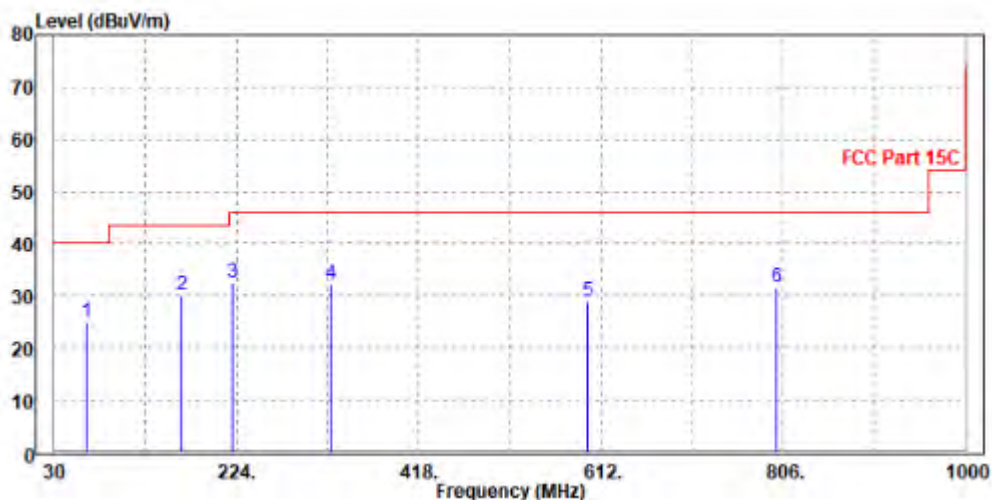



**BUREAU
VERITAS**


Test Report No.: W7L-P22110036RF02

CHANNEL	TX Channel 3	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
59.100	24.50	52.31	40.00	-15.50	8.70	0.44	36.95	100	0	QP
118.270	19.56	47.16	43.50	-23.94	8.55	0.58	36.73	100	0	QP
245.340	25.07	48.03	46.00	-20.93	12.50	0.82	36.28	100	0	QP
342.340	30.42	50.80	46.00	-15.58	14.97	0.98	36.33	100	0	QP
598.420	27.53	43.45	46.00	-18.47	19.57	1.36	36.85	100	0	QP
797.270	30.92	44.97	46.00	-15.08	21.57	1.58	37.20	100	0	QP

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.

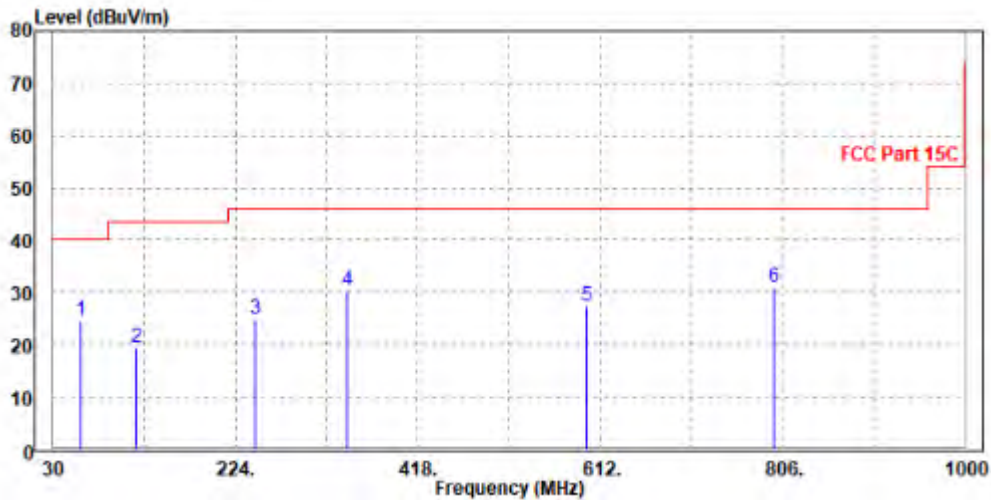



ABOVE 1GHz WORST-CASE DATA:

Note: 1. For radiated emissions testing , the full testing range of different modes have been scanned , only the worst case harmonic data is reported in the sheet.

2. All other emissions were greater than 20dB below the limit was not recorded

802.11b:

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390.000	49.63	57.67	74.00	-24.37	31.75	6.18	45.97	175	35	Peak
2390.000	43.93	51.97	54.00	-10.07	31.75	6.18	45.97	175	35	Average
2412.000	107.21	115.14	/	/	31.82	6.21	45.96	175	35	Peak
2412.000	106.03	113.96	/	/	31.82	6.21	45.96	175	35	Average
2483.500	51.69	59.26	74.00	-22.31	32.05	6.31	45.93	175	35	Peak
2483.500	44.02	51.59	54.00	-9.98	32.05	6.31	45.93	175	35	Average

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390.000	50.67	58.32	74.00	-23.33	32.14	6.18	45.97	100	315	Peak
2390.000	44.08	51.73	54.00	-9.92	32.14	6.18	45.97	100	315	Average
2412.000	103.71	111.27	/	/	32.19	6.21	45.96	100	315	Peak
2412.000	101.64	109.20	/	/	32.19	6.21	45.96	100	315	Average
2483.500	50.88	58.14	74.00	-23.12	32.36	6.31	45.93	100	315	Peak
2483.500	43.78	51.04	54.00	-10.22	32.36	6.31	45.93	100	315	Average

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 2412MHz: Fundamental frequency.



CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390.000	51.49	59.53	74.00	-22.51	31.75	6.18	45.97	175	35	Peak
2390.000	43.42	51.46	54.00	-10.58	31.75	6.18	45.97	175	35	Average
2437.000	105.62	113.43	/	/	31.90	6.24	45.95	175	35	Peak
2437.000	104.14	111.95	/	/	31.90	6.24	45.95	175	35	Average
2483.500	49.88	57.45	74.00	-24.12	32.05	6.31	45.93	175	35	Peak
2483.500	43.38	50.95	54.00	-10.62	32.05	6.31	45.93	175	35	Average

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390.000	51.15	58.80	74.00	-22.85	32.14	6.18	45.97	100	320	Peak
2390.000	43.77	51.42	54.00	-10.23	32.14	6.18	45.97	100	320	Average
2437.000	101.21	108.67	/	/	32.25	6.24	45.95	100	320	Peak
2437.000	99.26	106.72	/	/	32.25	6.24	45.95	100	320	Average
2483.500	51.02	58.28	74.00	-22.98	32.36	6.31	45.93	100	320	Peak
2483.500	43.82	51.08	54.00	-10.18	32.36	6.31	45.93	100	320	Average

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 2437MHz: Fundamental frequency.



CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390.000	50.89	58.93	74.00	-23.11	31.75	6.18	45.97	190	35	Peak
2390.000	43.23	51.27	54.00	-10.77	31.75	6.18	45.97	190	35	Average
2462.000	106.48	114.16	/	/	31.98	6.28	45.94	190	35	Peak
2462.000	105.08	112.76	/	/	31.98	6.28	45.94	190	35	Average
2483.500	51.66	59.23	74.00	-22.34	32.05	6.31	45.93	190	35	Peak
2483.500	43.67	51.24	54.00	-10.33	32.05	6.31	45.93	190	35	Average

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390.000	52.23	59.88	74.00	-21.77	32.14	6.18	45.97	100	280	Peak
2390.000	43.53	51.18	54.00	-10.47	32.14	6.18	45.97	100	280	Average
2462.000	104.15	111.50	/	/	32.31	6.28	45.94	100	280	Peak
2462.000	101.74	109.09	/	/	32.31	6.28	45.94	100	280	Average
2483.500	52.11	59.37	74.00	-21.89	32.36	6.31	45.93	100	280	Peak
2483.500	44.79	52.05	54.00	-9.21	32.36	6.31	45.93	100	280	Average

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 2462MHz: Fundamental frequency.



802.11g

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390.000	52.19	60.23	74.00	-21.81	31.75	6.18	45.97	190	35	Peak
2390.000	43.44	51.48	54.00	-10.56	31.75	6.18	45.97	190	35	Average
2412.000	108.57	116.50	/	/	31.82	6.21	45.96	190	35	Peak
2412.000	105.03	112.96	/	/	31.82	6.21	45.96	190	35	Average
2483.500	51.52	59.09	74.00	-22.48	32.05	6.31	45.93	190	35	Peak
2483.500	43.38	50.95	54.00	-10.62	32.05	6.31	45.93	190	35	Average

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390.000	51.24	58.89	74.00	-22.76	32.14	6.18	45.97	100	280	Peak
2390.000	44.10	51.75	54.00	-9.90	32.14	6.18	45.97	100	280	Average
2412.000	103.34	110.90	/	/	32.19	6.21	45.96	100	280	Peak
2412.000	99.89	107.45	/	/	32.19	6.21	45.96	100	280	Average
2483.500	51.61	58.87	74.00	-22.39	32.36	6.31	45.93	100	280	Peak
2483.500	44.24	51.50	54.00	-9.76	32.36	6.31	45.93	100	280	Average

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 2412MHz: Fundamental frequency.



CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390.000	50.89	58.93	74.00	-23.11	31.75	6.18	45.97	190	35	Peak
2390.000	43.50	51.54	54.00	-10.50	31.75	6.18	45.97	190	35	Average
2437.000	106.74	114.55	/	/	31.90	6.24	45.95	190	35	Peak
2437.000	102.28	110.09	/	/	31.90	6.24	45.95	190	35	Average
2483.500	51.69	59.26	74.00	-22.31	32.05	6.31	45.93	190	35	Peak
2483.500	43.82	51.39	54.00	-10.18	32.05	6.31	45.93	190	35	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390.000	50.96	58.61	74.00	-23.04	32.14	6.18	45.97	100	280	Peak
2390.000	44.53	52.18	54.00	-9.47	32.14	6.18	45.97	100	280	Average
2437.000	103.22	110.68	/	/	32.25	6.24	45.95	100	280	Peak
2437.000	98.59	106.05	/	/	32.25	6.24	45.95	100	280	Average
2483.500	51.47	58.73	74.00	-22.53	32.36	6.31	45.93	100	280	Peak
2483.500	45.07	52.33	54.00	-8.93	32.36	6.31	45.93	100	280	Average

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 2437MHz: Fundamental frequency.



CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390.000	51.06	59.10	74.00	-22.94	31.75	6.18	45.97	190	35	Peak
2390.000	43.93	51.97	54.00	-10.07	31.75	6.18	45.97	190	35	Average
2462.000	109.21	116.89	/	/	31.98	6.28	45.94	190	35	Peak
2462.000	103.93	111.61	/	/	31.98	6.28	45.94	190	35	Average
2483.500	52.31	59.88	74.00	-21.69	32.05	6.31	45.93	190	35	Peak
2483.500	43.89	51.46	54.00	-10.11	32.05	6.31	45.93	190	35	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390.000	50.75	58.40	74.00	-23.25	32.14	6.18	45.97	100	280	Peak
2390.000	44.22	51.87	54.00	-9.78	32.14	6.18	45.97	100	280	Average
2462.000	104.30	111.65	/	/	32.31	6.28	45.94	100	280	Peak
2462.000	100.19	107.54	/	/	32.31	6.28	45.94	100	280	Average
2483.500	52.42	59.68	74.00	-21.58	32.36	6.31	45.93	100	280	Peak
2483.500	44.15	51.41	54.00	-9.85	32.36	6.31	45.93	100	280	Average

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 2462MHz: Fundamental frequency.



802.11n (20MHz)

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390.000	53.88	61.92	74.00	-20.12	31.75	6.18	45.97	175	35	Peak
2390.000	44.89	52.93	54.00	-9.11	31.75	6.18	45.97	175	35	Average
2412.000	105.74	113.67	/	/	31.82	6.21	45.96	175	35	Peak
2412.000	98.49	106.42	/	/	31.82	6.21	45.96	175	35	Average
2483.500	52.61	60.18	74.00	-21.39	32.05	6.31	45.93	175	35	Peak
2483.500	43.79	51.36	54.00	-10.21	32.05	6.31	45.93	175	35	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390.000	51.22	58.87	74.00	-22.78	32.14	6.18	45.97	100	295	Peak
2390.000	44.21	51.86	54.00	-9.79	32.14	6.18	45.97	100	295	Average
2412.000	101.22	108.78	/	/	32.19	6.21	45.96	100	295	Peak
2412.000	93.48	101.04	/	/	32.19	6.21	45.96	100	295	Average
2483.500	51.44	58.70	74.00	-22.56	32.36	6.31	45.93	100	295	Peak
2483.500	43.76	51.02	54.00	-10.24	32.36	6.31	45.93	100	295	Average

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 2412MHz: Fundamental frequency.



CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390.000	50.45	58.49	74.00	-23.55	31.75	6.18	45.97	175	35	Peak
2390.000	44.25	52.29	54.00	-9.75	31.75	6.18	45.97	175	35	Average
2437.000	103.89	111.70	/	/	31.90	6.24	45.95	175	35	Peak
2437.000	96.47	104.28	/	/	31.90	6.24	45.95	175	35	Average
2483.500	52.05	59.62	74.00	-21.95	32.05	6.31	45.93	175	35	Peak
2483.500	44.19	51.76	54.00	-9.81	32.05	6.31	45.93	175	35	Average

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390.000	51.45	59.10	74.00	-22.55	32.14	6.18	45.97	100	280	Peak
2390.000	44.06	51.71	54.00	-9.94	32.14	6.18	45.97	100	280	Average
2437.000	100.64	108.10	/	/	32.25	6.24	45.95	100	280	Peak
2437.000	92.48	99.94	/	/	32.25	6.24	45.95	100	280	Average
2483.500	52.73	59.99	74.00	-21.27	32.36	6.31	45.93	100	280	Peak
2483.500	43.73	50.99	54.00	-10.27	32.36	6.31	45.93	100	280	Average

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 2437MHz: Fundamental frequency.



CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390.000	50.82	58.86	74.00	-23.18	31.75	6.18	45.97	175	35	Peak
2390.000	43.01	51.05	54.00	-10.99	31.75	6.18	45.97	175	35	Average
2462.000	104.46	112.14	/	/	31.98	6.28	45.94	175	35	Peak
2462.000	97.15	104.83	/	/	31.98	6.28	45.94	175	35	Average
2483.500	51.67	59.24	74.00	-22.33	32.05	6.31	45.93	175	35	Peak
2483.500	45.07	52.64	54.00	-8.93	32.05	6.31	45.93	175	35	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390.000	52.06	59.71	74.00	-21.94	32.14	6.18	45.97	100	280	Peak
2390.000	43.61	51.26	54.00	-10.39	32.14	6.18	45.97	100	280	Average
2462.000	100.39	107.74	/	/	32.31	6.28	45.94	100	280	Peak
2462.000	93.56	100.91	/	/	32.31	6.28	45.94	100	280	Average
2483.500	52.05	59.31	74.00	-21.95	32.36	6.31	45.93	100	280	Peak
2483.500	45.20	52.46	54.00	-8.80	32.36	6.31	45.93	100	280	Average

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 2462MHz: Fundamental frequency.



802.11n (40MHz)

CHANNEL	TX Channel 3	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390.000	56.57	64.61	74.00	-17.43	31.75	6.18	45.97	175	35	Peak
2390.000	47.41	55.45	54.00	-6.59	31.75	6.18	45.97	175	35	Average
2422.000	103.70	111.59	/	/	31.85	6.22	45.96	175	35	Peak
2422.000	95.77	103.66	/	/	31.85	6.22	45.96	175	35	Average
2483.500	51.59	59.16	74.00	-22.41	32.05	6.31	45.93	175	35	Peak
2483.500	43.14	50.71	54.00	-10.86	32.05	6.31	45.93	175	35	Average

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390.000	50.90	58.55	74.00	-23.10	32.14	6.18	45.97	100	280	Peak
2390.000	44.48	52.13	54.00	-9.52	32.14	6.18	45.97	100	280	Average
2422.000	98.43	105.96	/	/	32.21	6.22	45.96	100	280	Peak
2422.000	91.23	98.76	/	/	32.21	6.22	45.96	100	280	Average
2483.500	52.43	59.69	74.00	-21.57	32.36	6.31	45.93	100	280	Peak
2483.500	44.44	51.70	54.00	-9.56	32.36	6.31	45.93	100	280	Average

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 2422MHz: Fundamental frequency.