

FCC TEST REPORT

(PART 27)



Applicant:	i.safe MOBILE GmbH
Address:	i_Park Tauberfranken 10 97922 Lauda-Koenigshofen Germany

Manufacturer or Supplier:	i.safe MOBILE GmbH
Address:	i_Park Tauberfranken 10 97922 Lauda-Koenigshofen Germany
Product:	Tablet
Brand Name:	i.safe MOBILE
Model Name	M940A01
Marketing Name:	IS940.1, IS940.M1, IS940.2, IS940.RG
FCC ID:	2AACZ-M940A01
Date of tests:	Jun. 05, 2024 ~ Jul. 17, 2024

The tests have been carried out according to the requirements of the following standard:

☒ **FCC Part 27** ☒ **ANSI/TIA/EIA-603-D**
☒ **FCC Part 2** ☒ **ANSI/TIA/EIA-603-E** ☒ **ANSI C63.26-2015**

CONCLUSION: The submitted sample was found to COMPLY with the test requirement

Prepared by Simon Wang Engineer / Mobile Department	Approved by Luke Lu Manager / Mobile Department
	
Date: Jul. 17, 2024	Date: Jul. 17, 2024

This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

TABLE OF CONTENTS

RELEASE CONTROL RECORD	4
1 SUMMARY OF TEST RESULTS	5
1.1 MEASUREMENT UNCERTAINTY	7
1.2 TEST SITE AND INSTRUMENTS	8
2 GENERAL INFORMATION	11
2.1 GENERAL DESCRIPTION OF EUT	11
2.2 CONFIGURATION OF SYSTEM UNDER TEST	15
2.3 DESCRIPTION OF SUPPORT UNITS	16
2.4 TEST ITEM AND TEST CONFIGURATION	16
2.5 GENERAL DESCRIPTION OF APPLIED STANDARDS	24
3 TEST TYPES AND RESULTS	25
3.1 OUTPUT POWER MEASUREMENT	25
3.1.1 LIMITS OF OUTPUT POWER MEASUREMENT	25
3.1.2 TEST PROCEDURES	25
3.1.3 TEST SETUP	27
3.1.4 TEST RESULTS	28
3.2 FREQUENCY STABILITY MEASUREMENT	61
3.2.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT	61
3.2.2 TEST PROCEDURE	61
3.2.3 TEST SETUP	61
3.2.4 TEST RESULTS	62
3.3 OCCUPIED BANDWIDTH MEASUREMENT	63
3.3.1 LIMITS OF OCCUPIED BANDWIDTH MEASUREMENT	63
3.3.2 TEST SETUP	63
3.3.3 TEST PROCEDURES	63
3.3.4 TEST RESULTS	64
3.4 BAND EDGE MEASUREMENT	65
3.4.1 LIMITS OF BAND EDGE MEASUREMENT	65
3.4.2 TEST SETUP	66
3.4.3 TEST PROCEDURES	67
3.4.4 TEST RESULTS	68
3.5 CONDUCTED SPURIOUS EMISSIONS	69
3.5.1 LIMITS OF CONDUCTED SPURIOUS EMISSIONS MEASUREMENT	69
3.5.2 TEST PROCEDURE	69
3.5.3 TEST SETUP	70
3.5.4 TEST RESULTS	70
3.6 RADIATED EMISSION MEASUREMENT	71
3.6.1 LIMITS OF RADIATED EMISSION MEASUREMENT	71
3.6.2 TEST PROCEDURES	71
3.6.3 DEVIATION FROM TEST STANDARD	72
3.6.4 TEST SETUP	73
3.6.5 TEST RESULTS	75
3.7 PEAK TO AVERAGE RATIO	129
3.7.1 LIMITS OF PEAK TO AVERAGE RATIO MEASUREMENT	129
3.7.2 TEST SETUP	129
3.7.3 TEST PROCEDURES	129
3.7.4 TEST RESULTS	130
4 INFORMATION ON THE TESTING LABORATORIES	131



Test Report No.: W7L-P24050018RF06

5 MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB. 132



Test Report No.: W7L-P24050018RF06

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
W7L-P24050018RF06	Original release	Jul. 17, 2024

1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC PART 27 & PART 2			
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT	TEST LAB*
§2.1046	Conducted Output Power	Compliance	A
§27.50(b)(10) §27.50(c)(10)	Effective Radiated Power (Band 12) (Band 13) (Band 17) (Band 71)	Compliance	A
§27.50(h)(2) §27.50(a)(3)	Equivalent Isotropically Radiated Power (Band 7) (Band 30)	Compliance	A
§2.1055 §27.54	Frequency Stability	Compliance	A
§2.1049	Occupied Bandwidth	Compliance	A
§2.1051 §27.53(c)(2)(4) §27.53(g) §27.53(m)(4)(6) §27.53(a)(4)	Conducted Band Edge Measurements (Band 7) (Band 12) (Band 13) (Band 17) (Band 30) (Band 71)	Compliance	A
§2.1051 §27.53(c)(2)(4) §27.53(g) §27.53(m)(4)(6) §27.53(a)(4)	Conducted Spurious Emissions (Band 7) (Band 12) (Band 13) (Band 17) (Band 30) (Band 71)	Compliance	A
§2.1053 §27.53(c)(2)(4) §27.53(f) §27.53(g) §27.53(m)(4)(6) §27.53(a)(4)	Radiated Spurious Emissions (Band 7) (Band 12) (Band 13) (Band 17) (Band 30) (Band 71)	Compliance	A/B
NA	Peak to average ratio	Compliance	A



Test Report No.: W7L-P24050018RF06

NOTE:

The worst-case scenario for all measurements is based on an engineering evaluation made on different modulations. Then, QPSK and 16QAM were observed as the worst mode to LTE bands respectively and set for all conducted and radiated. Output power measurements were measured on QPSK, 16QAM, 64QAM, and 256QAM modulations, and tests other than output power are performed only in worse-case QPSK and 16QAM modulations.

***Test Lab Information Reference**

Lab A:

BV 7Layers Communications Technology (Shenzhen) Co., Ltd

Lab Address:

Room B37, Warehouse A5, No.3 Chiwan 4th Road, Zhaoshang Street, Nanshan District Shenzhen, Guangdong, People's Republic of China

Accredited Test Lab Cert 3939.01

FCC Site Registration No. : 525120; Designation No. : CN1171;

Lab B:

Huarui 7Layers High Technology (Suzhou) Co., Ltd.

Lab Address:

Tower N, Innovation Center, 88 Zuyi Road, High-tech District, Suzhou City, Anhui Province

Accredited Test Lab Cert 6613.01

The FCC Site Registration No. is 434559; The Designation No. is CN1325.

1.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	UNCERTAINTY
Frequency Stability	$\pm 76.97\text{Hz}$
Radiated emissions (9KHz~30MHz)	$\pm 2.68\text{dB}$
Radiated emissions & Radiated Power (30MHz~1GHz)	$\pm 4.98\text{dB}$
Radiated emissions & Radiated Power (1GHz ~6GHz)	$\pm 4.70\text{dB}$
Radiated emissions (6GHz ~18GHz)	$\pm 4.60\text{dB}$
Radiated emissions (18GHz ~40GHz)	$\pm 4.12\text{dB}$
Conducted emissions	$\pm 4.01\text{dB}$
Occupied Channel Bandwidth	$\pm 43.58\text{KHz}$
Conducted Output power	$\pm 2.06\text{dB}$
Band Edge Measurements	$\pm 4.70\text{dB}$

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

1.2 TEST SITE AND INSTRUMENTS

Lab A:

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
MXE EMI Receiver	KEYSIGHT	N9038A-544	MY54450026	Mar. 28,24	Mar. 27,25
EXA Signal Analyzer	KEYSIGHT	N9010A-544	MY54510355	May.10,24	May.09,25
Loop Antenna	Schwarzbeck	FMZB 1519B	00173	Sep.03,23	Sep.02,24
Bilog Antenna	ETS-LINDGRE N	3143B	00161965	Feb. 18,24	Feb. 17,25
Horn Antenna	ETS-LINDGRE N	3117	00168692	Feb. 18,24	Feb. 17,25
Horn Antenna (18GHz-40GHz)	N/A	QWH-SL-18-40-K- SG/QMS-00361	15433	Sep.04, 23	Sep.03, 24
Radio Communication Analyzer	ANRITSU	MT8820C	6201465426	Feb. 14,24	Feb. 13,25
Signal Pre-Amplifier	EMSI	EMC 9135	980249	May. 06,24	May. 05,25
Signal Pre-Amplifier	EMSI	EMC 012645B	980257	May.10,24	May.09,25
Signal Pre-Amplifier	EMSI	EMC 184045B	980259	Feb. 17,24	Feb.16,25
3m Semi-anechoic Chamber	ETS-LINDGRE N	9m*6m*6m	Euroshieldpn- CT0001143-121 6	Nov. 14,23	Nov. 13,26
Test Software	E3	V 9.160323	N/A	N/A	N/A
Test Software	JS1120	3.1.36	N/A	N/A	N/A
10dB Attenuator	JFW/USA	50HF-010-SMA	50HF-010-SMA	May. 06,24	May. 05,25
Power Meter	Anritsu	ML2495A	1506002	Feb. 14,24	Feb. 13,25
Power Sensor	Anritsu	MA2411B	1339352	Feb. 14,24	Feb. 13,25
Temperature Chamber	ESPEC	SH-242	93000855	May. 06,24	May. 05,25
MXG Analog Microvave Signal Generator	KEYSIGHT	N5183A	MY50143024	Feb. 14,24	Feb. 13,25
Base station R&S CMW500	Rohde&Schwa rz	CMW500	153085	May.10,24	May.09,25
DC Source	Kikusui/JP	PMX18-5A	N/A	Aug. 11,23	Aug. 10,24

- NOTE:**
1. The calibration interval of the above test instruments is 12 months or 36 months and the calibrations are traceable to CEPREI/CHINA, GREGT/CHINA and NIM/CHINA.
 2. The test was performed in 3m Semi-anechoic Chamber and RF Oven Room.
 3. The horn antenna is used only for the measurement of emission frequency above 1GHz if tested.
 4. The FCC Site Registration No. is 525120; The Designation No. is CN1171.

Lab B:

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Pre-Amplifier	R&S	SCU18F1	100815	Aug.30,22	Aug.29,24
Pre-Amplifier	R&S	SCU08F1	101028	Sep.16,22	Sep.15,24
Vector Signal Generator	R&S	SMBV100B	102176	Feb.16,24	Feb.15,26
Signal Generator	R&S	SMB100A	182185	Feb.16,24	Feb.15,26
3m Fully-anechoic Chamber	TDK	9m*6m*6m	HRSW-SZ-EMC-01Chamber	Nov.25,22	Nov.24,25
3m Semi-anechoic Chamber	TDK	9m*6m*6m	HRSW-SZ-EMC-02Chamber	Nov.25,22	Nov.24,25
EMI TEST Receiver	R&S	ESR26	101734	Feb.25,24	Feb.24,26
EMI TEST Receiver	R&S	ESW44	101973	Feb.25,24	Feb.24,26
Bilog Antenna	SCHWARZBECK	VULB 9163	1264	Feb.28,24	Feb.27,26
Horn Antenna	ETS-LINDGREN	3117	227836	Aug.22,22	Aug.21,24
Horn Antenna (18GHz-40GHz)	Steatite Q-par Antennas	QMS 00880	23486	Feb.23,24	Feb.22,26
Horn Antenna	Steatite Q-par Antennas	QMS 00208	23485	Aug.22,22	Aug.21,24
Loop Antenna	SCHWARZ	HFH2-Z2/Z2E	100976	Feb.23,24	Feb.22,26
WIDEBANDRADIO COMMUNICATION TESTER	R&S	CMW500	169399	Jun.27,22	Jun.26,24
WIDEBANDRADIO COMMUNICATION TESTER	R&S	CMW500	169399	Jun.26,24	Jun.25,26
Test Software	EMC32	EMC32	N/A	N/A	N/A
6DB attenuator	Tonscend Technology Co., Ltd	N/A	23062787	N/A	N/A
Test Software	ELEKTRA	ELEKTRA4.32	N/A	N/A	N/A
Open Switch and Control Unit	R&S	OSP220	101964	Oct.01,22	Sep.30,24
DC Source	HYELEC	HY3010B	551016	Aug.31,22	Aug.30,24
Hygrothermograph	DELI	20210528	SZ014	Sep.06,22	Sep.05,24
PC	LENOVO	E14	HRSW0024	N/A	N/A
TMC-AMI18843A(CABLE)	R&S	HF290-NMNM-7.00M	N/A	N/A	N/A
TMC-AMI18843A(CABLE)	R&S	HF290-NMNM-4.00M	N/A	N/A	N/A
CABLE	R&S	W13.02	N/A	Apr.28,24	Apr.27,25
CABLE	R&S	W12.14	N/A	Apr.28,24	Apr.27,25
CABLE	R&S	J12J103539-00-1	SEP-03-20-069	Apr.28,24	Apr.27,25
CABLE	R&S	J12J103539-00-1	SEP-03-20-070	Apr.28,24	Apr.27,25
Temperature Chamber	votsch	VT4002	58566078100050	May.31,24	May.30,26



Test Report No.: W7L-P24050018RF06

- NOTE:**
1. The calibration interval of the above test instruments is 12 months or 36 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
 2. The test was performed in 3m Semi-anechoic Chamber and RF Oven Room.
 3. The horn antenna is used only for the measurement of emission frequency above 1GHz if tested.
 4. The FCC Site Registration No. is 434559; The Designation No. is CN1325.

2 GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

PRODUCT	Tablet	
BRAND NAME	i.safe MOBILE	
MODEL NAME	M940A01	
MARKETING NAME	IS940.1, IS940.M1, IS940.2, IS940.RG	
NOMINAL VOLTAGE	5Vdc (adapter or host equipment) 3.7Vdc (Li-ion, battery)	
MODULATION TECHNOLOGY	LTE	QPSK, 16QAM, 64QAM, 256QAM
FREQUENCY RANGE	LTE Band 7 Channel Bandwidth: 5MHz	2502.5MHz ~ 2567.5MHz
	LTE Band 7 Channel Bandwidth: 10MHz	2505MHz ~ 2565MHz
	LTE Band 7 Channel Bandwidth: 15MHz	2507.5MHz ~ 2562.5MHz
	LTE Band 7 Channel Bandwidth: 20MHz	2510MHz ~ 2560MHz
	LTE Band 12 Channel Bandwidth: 1.4MHz	699.7MHz ~ 715.3MHz
	LTE Band 12 Channel Bandwidth: 3MHz	700.5MHz ~ 714.5MHz
	LTE Band 12 Channel Bandwidth: 5MHz	701.5MHz ~ 713.5MHz
	LTE Band 12 Channel Bandwidth: 10MHz	704MHz ~ 711MHz
	LTE Band 13 Channel Bandwidth: 5MHz	779.5MHz ~ 784.5MHz
	LTE Band 13 Channel Bandwidth: 10MHz	782MHz
	LTE Band 17 Channel Bandwidth: 5MHz	706.5MHz ~ 713.5MHz
	LTE Band 17 Channel Bandwidth: 10MHz	709MHz ~ 711 MHz
	LTE Band 30 Channel Bandwidth: 5MHz	2307.5MHz ~ 2312.5MHz
	LTE Band 30 Channel Bandwidth: 10MHz	2310MHz
	LTE Band 71 Channel Bandwidth: 5MHz	665.5MHz ~ 695.5MHz
	LTE Band 71 Channel Bandwidth: 10MHz	668MHz ~ 693MHz



**BUREAU
VERITAS**

Test Report No.: W7L-P24050018RF06

	LTE Band 71 Channel Bandwidth: 15MHz	670.5MHz ~ 690.5MHz
	LTE Band 71 Channel Bandwidth: 20MHz	673MHz ~ 688MHz
MAX. EIRP POWER	LTE Band 7 Channel Bandwidth: 5MHz	220.8mW
	LTE Band 7 Channel Bandwidth: 10MHz	219.79mW
	LTE Band 7 Channel Bandwidth: 15MHz	220.8mW
	LTE Band 7 Channel Bandwidth: 20MHz	226.99mW
	LTE Band 12 Channel Bandwidth: 1.4MHz	111.17mW
	LTE Band 12 Channel Bandwidth: 3MHz	108.64mW
	LTE Band 12 Channel Bandwidth: 5MHz	109.14mW
	LTE Band 12 Channel Bandwidth: 10MHz	110.66mW
	LTE Band 13 Channel Bandwidth: 5MHz	83.95mW
	LTE Band 13 Channel Bandwidth: 10MHz	84.53mW
	LTE Band 17 Channel Bandwidth: 5MHz	108.64mW
	LTE Band 17 Channel Bandwidth: 10MHz	109.14mW
	LTE Band 30 Channel Bandwidth: 5MHz	239.33mW
	LTE Band 30 Channel Bandwidth: 10MHz	243.22mW
	LTE Band 71 Channel Bandwidth: 5MHz	82.6mW
	LTE Band 71 Channel Bandwidth: 10MHz	81.85mW
	LTE Band 71 Channel Bandwidth: 15MHz	82.22mW
	LTE Band 71 Channel Bandwidth: 20MHz	84.33mW
EMISSION DESIGNATOR	LTE Band 7 Channel Bandwidth: 5MHz	QPSK: 4M52G7D 16QAM: 4M51W7D
	LTE Band 7 Channel Bandwidth: 10MHz	QPSK: 9M02G7D 16QAM: 9M00W7D
	LTE Band 7	QPSK: 13M5G7D



**BUREAU
VERITAS**

Test Report No.: W7L-P24050018RF06

EMISSION DESIGNATOR	Channel Bandwidth: 15MHz	16QAM: 13M5W7D
	LTE Band 7	QPSK: 18M0G7D
	Channel Bandwidth: 20MHz	16QAM: 18M0W7D
	LTE Band 12	QPSK: 1M10G7D
	Channel Bandwidth: 1.4MHz	16QAM: 1M09W7D
	LTE Band 12	QPSK: 2M70G7D
	Channel Bandwidth: 3MHz	16QAM: 2M70W7D
	LTE Band 12	QPSK: 4M52G7D
	Channel Bandwidth: 5MHz	16QAM: 4M51W7D
	LTE Band 12	QPSK: 9M00G7D
	Channel Bandwidth: 10MHz	16QAM: 8M99W7D
	LTE Band 13	QPSK: 4M52G7D
	Channel Bandwidth: 5MHz	16QAM: 4M51W7D
	LTE Band 13	QPSK: 8M99G7D
	Channel Bandwidth: 10MHz	16QAM: 8M96W7D
	LTE Band 30	QPSK: 4M53G7D
	Channel Bandwidth: 5MHz	16QAM: 4M52W7D
	LTE Band 30	QPSK: 9M01G7D
	Channel Bandwidth: 10MHz	16QAM: 9M02W7D
	LTE Band 71	QPSK: 4M52G7D
	Channel Bandwidth: 5MHz	16QAM: 4M51W7D
	LTE Band 71	QPSK: 9M01G7D
	Channel Bandwidth: 10MHz	16QAM: 8M98W7D
	LTE Band 71	QPSK: 13M5G7D
	Channel Bandwidth: 15MHz	16QAM: 13M5W7D
	CLTE Band 71	QPSK: 18M0G7D
	Channel Bandwidth: 20MHz	16QAM: 17M9W7D



**BUREAU
VERITAS**

Test Report No.: W7L-P24050018RF06

ANTENNA TYPE	ANT1 PIFA Antenna with 0.7dBi gain for LTE B7 PIFA Antenna with 1dBi gain for LTE B30 ANT2 PIFA Antenna with -0.3dBi gain for LTE B12 PIFA Antenna with -1.5dBi gain for LTE B13 PIFA Antenna with -0.3dBi gain for LTE B17 PIFA Antenna with -1.5dBi gain for LTE B71
HW VERSION	V05
SW VERSION	IS940_ROW_00.00_2_20240605
I/O PORTS	Refer to user's manual
CABLE SUPPLIED	USB cable: With shielded cable, w/o ferrite core, 1.0 meter
EXTREME TEMPERATURE	-10-55 °C
EXTREME VOLTAGE	3.6V - 4.2V

NOTE:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
2. The EUT incorporates a SISO function.

MODULATION MODE	TX FUNCTION
LTE	1TX





3. For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.
4. Antenna gain and EUT conducted cable loss are provided by the customer, and the laboratory will record the results based on these items that involve these two parameters.

5. List of Accessory:

ACCESSORIES	BRAND	MANUFACTURER	MODEL	SPECIFICATION
AC Adapter	N/A	SHENZHEN SHI YINGYUAN POWER SUPPLY TECHNOLOGY CO., LTD.	ICP12-050-2000B	I/P: 100-240Vac, 0.5A, O/P: 5Vdc, 2A
Battery	N/A	BMZ Company Limited	MBP940AA01	Capacity: 3.7Vdc, 8160mAh
USB Cable	N/A	Winpower Technology Co., LTD	PROTECTOR 2.0	Signal Line,1.0meter

2.2 CONFIGURATION OF SYSTEM UNDER TEST

FOR RADIATION EMISSION TEST

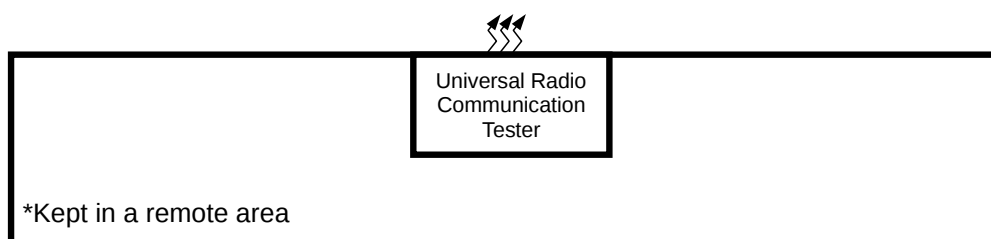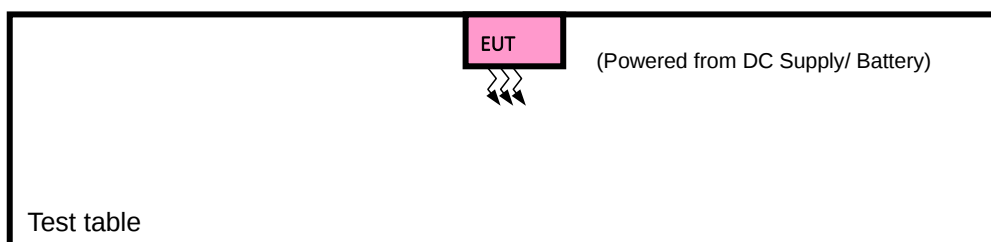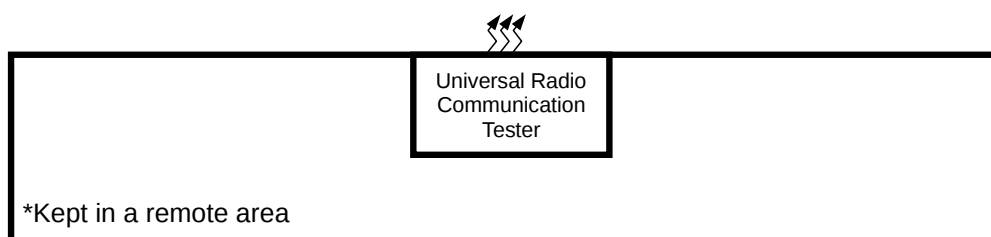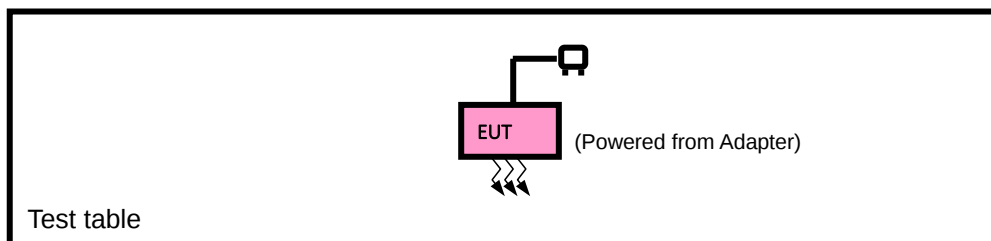

2.3 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	N/A	N/A	N/A	N/A	N/A

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	USB cable: Unshielded, Detachable 1.0m

2.4 TEST ITEM AND TEST CONFIGURATION

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports. The worst case was found when positioned on Y-plane for EIRP and X-axis for radiated emission. Following channel(s) was (were) selected for the final test as listed below:

EUT CONFIGURE MODE	DESCRIPTION
A	EUT + Adapter + USB Cable with LTE link
B	EUT + Supply with LTE link

LTE BAND 7 MODE

EUT CONFIGURE MODE	TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	CHANNEL BANDWIDT H	MODULATION	MODE
A	EIRP	20775 to 21425	20775, 21100, 21425	5MHz	QPSK, 16QAM, 64QAM, 256QAM	1 RB / 0 RB Offset
		20800 to 21400	20800, 21100, 21400	10MHz	QPSK, 16QAM, 64QAM, 256QAM	1 RB / 0RB Offset
		20825 to 21375	20825, 21100, 21375	15MHz	QPSK, 16QAM, 64QAM, 256QAM	1 RB / 0 RB Offset
		20850 to 21350	20850, 21100, 21350	20MHz	QPSK, 16QAM, 64QAM, 256QAM	1 RB / 0 RB Offset
B	FREQUENCY STABILITY	20800 to 21400	20800, 21100, 21400	10MHz	QPSK	50 RB / 0 RB Offset
A	OCCUPIED BANDWIDTH	20775 to 21425	20775, 21100, 21425	5MHz	QPSK,16QAM	25 RB / 0 RB Offset
		20800 to 21400	20800, 21100, 21400	10MHz	QPSK,16QAM	50 RB / 0 RB Offset
		20825 to 21375	20825, 21100, 21375	15MHz	QPSK,16QAM	75 RB / 0 RB Offset
		20850 to 21350	20850, 21100, 21350	20MHz	QPSK,16QAM	100 RB / 0 RB Offset
A	PEAK TO AVERAGE RATIO	20775 to 21425	20775, 21100, 21425	5MHz	QPSK,16QAM	1 RB / 0 RB Offset 25 RB / 0 RB Offset
		20800 to 21400	20800, 21100, 21400	10MHz	QPSK,16QAM	1 RB / 0 RB Offset 50 RB / 0 RB Offset
		20825 to 21375	20825, 21100, 21375	15MHz	QPSK,16QAM	1 RB / 0 RB Offset 75 RB / 0 RB Offset
		20850 to 21350	20850, 21100, 21350	20MHz	QPSK,16QAM	1 RB / 0 RB Offset 100 RB / 0 RB Offset
A	BAND EDGE	20775 to 21425	20775	5MHz	QPSK,16QAM	1 RB / 0 RB Offset 25 RB / 0 RB Offset
			21425	5MHz	QPSK,16QAM	1 RB / 24 RB Offset 25 RB / 0 RB Offset
		20800 to 21400	20800	10MHz	QPSK,16QAM	1 RB / 0 RB Offset 50 RB / 0 RB Offset
			21400	10MHz	QPSK,16QAM	1 RB / 49 RB Offset 50 RB / 0 RB Offset
		20825 to 21375	20825	15MHz	QPSK,16QAM	1 RB / 0 RB Offset 75 RB / 0 RB Offset
			21375	15MHz	QPSK,16QAM	1 RB / 74 RB Offset 75 RB / 0 RB Offset
		20850 to 21350	20850	20MHz	QPSK,16QAM	1 RB / 0 RB Offset 100 RB / 0 RB Offset
			21350	20MHz	QPSK,16QAM	1 RB / 99 RB Offset 100 RB / 0 RB Offset
A	CONDUCTE D EMISSION	20775 to 21425	20775, 21100, 21425	5MHz	QPSK	1 RB / 0 RB Offset
		20800 to 21400	20800, 21100, 21400	10MHz	QPSK	1 RB / 0RB Offset
		20825 to 21375	20825, 21100, 21375	15MHz	QPSK	1 RB / 0 RB Offset
		20850 to 21350	20850, 21100, 21350	20MHz	QPSK	1 RB / 0 RB Offset
A	RADIATED EMISSION	20775 to 21425	21100	5MHz	QPSK	1 RB / 0 RB Offset
		20800 to 21400	20800, 21100, 21400	10MHz	QPSK	1 RB / 0 RB Offset
		20825 to 21375	21100	15MHz	QPSK	1 RB / 0 RB Offset
		20850 to 21350	21100	20MHz	QPSK	1 RB / 0 RB Offset

Note: This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.

LTE BAND 12 MODE

EUT CONFIGURE MODE	TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	CHANNEL BANDWIDTH	MODULATION	MODE
A	ERP	23017 to 23173	23017, 23095 , 23173	1.4MHz	QPSK, 16QAM, 64QAM, 256QAM	1 RB / 0 RB Offset
		23025 to 23165	23025, 23095 ,23165	3MHz	QPSK, 16QAM, 64QAM, 256QAM	1 RB / 0 RB Offset
		23035 to 23155	23035, 23095 ,23155	5MHz	QPSK, 16QAM, 64QAM, 256QAM	1 RB / 0 RB Offset
		23060 to 23130	23060, 23095 ,23130	10MHz	QPSK, 16QAM, 64QAM, 256QAM	1 RB / 0 RB Offset
B	FREQUENCY STABILITY	23060 to 23130	23060, 23095 ,23130	10MHz	QPSK,16QAM	50 RB / 0 RB Offset
A	OCCUPIED BANDWIDTH	23017 to 23173	23017, 23095 , 23173	1.4MHz	QPSK,16QAM	6 RB / 0 RB Offset
		23025 to 23165	23025, 23095 ,23165	3MHz	QPSK,16QAM	15 RB / 0 RB Offset
		23035 to 23155	23035, 23095 ,23155	5MHz	QPSK,16QAM	25 RB / 0 RB Offset
		23060 to 23130	23060, 23095 ,23130	10MHz	QPSK,16QAM	50 RB / 0 RB Offset
A	PEAK TO AVERAGE RATIO	23017 to 23173	23017, 23095 , 23173	1.4MHz	QPSK,16QAM	1 RB / 0 RB Offset 6 RB / 0 RB Offset
		23025 to 23165	23025, 23095 ,23165	3MHz	QPSK,16QAM	1 RB / 0 RB Offset 15 RB / 0 RB Offset
		23035 to 23155	23035, 23095 ,23155	5MHz	QPSK,16QAM	1 RB / 0 RB Offset 25 RB / 0 RB Offset
		23060 to 23130	23060, 23095 ,23130	10MHz	QPSK,16QAM	1 RB / 0 RB Offset 50 RB / 0 RB Offset
A	BAND EDGE	23017 to 23173	23017	1.4MHz	QPSK,16QAM	1 RB / 0 RB Offset 6 RB / 0 RB Offset
			23173	1.4MHz	QPSK,16QAM	1 RB / 5 RB Offset 6 RB / 0 RB Offset
		23025 to 23165	23025	3MHz	QPSK,16QAM	1 RB / 0 RB Offset 15 RB / 0 RB Offset
			23165	3MHz	QPSK,16QAM	1 RB / 14 RB Offset 15 RB / 0 RB Offset
		23035 to 23155	23035	5MHz	QPSK,16QAM	1 RB / 0 RB Offset 25 RB / 0 RB Offset
			23155	5MHz	QPSK,16QAM	1 RB / 24 RB Offset 25 RB / 0 RB Offset
		23060 to 23130	23060	10MHz	QPSK,16QAM	1 RB / 0 RB Offset 50 RB / 0 RB Offset
			23130	10MHz	QPSK,16QAM	1 RB / 49 RB Offset 50 RB / 0 RB Offset
A	CONDUCTED EMISSION	23017 to 23173	23017, 23095 , 23173	1.4MHz	QPSK	1 RB / 0 RB Offset
		23025 to 23165	23025, 23095 ,23165	3MHz	QPSK	1 RB / 0 RB Offset
		23035 to 23155	23035, 23095 ,23155	5MHz	QPSK	1 RB / 0 RB Offset
		23060 to 23130	23060, 23095 ,23130	10MHz	QPSK	1 RB / 0 RB Offset
A	RADIATED EMISSION	23017 to 23173	23095	1.4MHz	QPSK	1 RB / 0 RB Offset
		23025 to 23165	23095	3MHz	QPSK	1 RB / 0 RB Offset
		23035 to 23155	23095	5MHz	QPSK	1 RB / 0 RB Offset
		23060 to 23130	23060, 23095 ,23130	10MHz	QPSK	1 RB / 0 RB Offset

Note: This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.

LTE BAND 13 MODE

EUT CONFIGURE MODE	TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	CHANNEL BANDWIDTH	MODULATION	MODE
A	ERP	23205 to 23255	23205, 23230, 23255	5MHz	QPSK, 16QAM, 64QAM, 256QAM	1 RB / 0 RB Offset
		23230	23230	10MHz	QPSK, 16QAM, 64QAM, 256QAM	1 RB / 0 RB Offset
B	FREQUENCY STABILITY	23205 to 23255	23205, 23230, 23255	5MHz	QPSK, 16QAM	25 RB / 0 RB Offset
A	OCCUPIED BANDWIDTH	23205 to 23255	23205, 23230, 23255	5MHz	QPSK, 16QAM	25 RB / 0 RB Offset
		23230	23230	10MHz	QPSK, 16QAM	50 RB / 0 RB Offset
A	PEAK TO AVERAGE RATIO	23205 to 23255	23205, 23230, 23255	5MHz	QPSK, 16QAM	1 RB / 0 RB Offset 25 RB / 0 RB Offset
		23230	23230	10MHz	QPSK, 16QAM	1 RB / 0 RB Offset 50 RB / 0 RB Offset
A	BAND EDGE	23205 to 23255	23205	5MHz	QPSK, 16QAM	1 RB / 0 RB Offset 25 RB / 0 RB Offset
			23255	5MHz	QPSK, 16QAM	1 RB / 24 RB Offset 25 RB / 0 RB Offset
		23230	23230	10MHz	QPSK, 16QAM	1 RB / 0 RB Offset 1 RB / 49 RB Offset 50 RB / 0 RB Offset
A	CONDUCTED EMISSION	23205 to 23255	23205, 23230, 23255	5MHz	QPSK	1 RB / 0 RB Offset
		23230	23230	10MHz	QPSK	1 RB / 0 RB Offset
A	RADIATED EMISSION	23205 to 23255	23205, 23230, 23255	5MHz	QPSK	1 RB / 0 RB Offset
		23230	23230	10MHz	QPSK	1 RB / 0 RB Offset

Note: This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.

LTE BAND 17 MODE

EUT CONFIGURE MODE	TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	CHANNEL BANDWIDTH	MODULATION	MODE
A	ERP	23755 to 23825	23755, 23790, 23825	5MHz	QPSK, 16QAM, 64QAM, 256QAM	1 RB / 0 RB Offset
		23780 to 23800	23780, 23790, 23800	10MHz	QPSK, 16QAM, 64QAM, 256QAM	1 RB / 0 RB Offset

Note: 1. This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.

2. LTE Band 17 are covered by LTE Band 12, Because it is a subset of LTE Band 12 with the same output power and supported bandwidths, So the conducted test data and RSE test data please refer to LTE Band 12

LTE BAND 30

EUT CONFIGURE MODE	TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	CHANNEL BANDWIDTH	MODULATION	MODE
A	ERP	27685 to 27735	27685, 27710, 27735	5MHz	QPSK, 16QAM, 64QAM, 256QAM	1 RB / 0 RB Offset
		27710	27710	10MHz	QPSK, 16QAM, 64QAM, 256QAM	1 RB / 0 RB Offset
B	FREQUENCY STABILITY	27685 to 27735	27685, 27710, 27735	5MHz	QPSK, 16QAM	25 RB / 0 RB Offset
A	OCCUPIED BANDWIDTH	27685 to 27735	27685, 27710, 27735	5MHz	QPSK, 16QAM	25 RB / 0 RB Offset
		27710	27710	10MHz	QPSK, 16QAM	50 RB / 0 RB Offset
A	PEAK TO AVERAGE RATIO	27685 to 27735	27685, 27710, 27735	5MHz	QPSK, 16QAM	1 RB / 0 RB Offset 25 RB / 0 RB Offset
		27710	27710	10MHz	QPSK, 16QAM	1 RB / 0 RB Offset 50 RB / 0 RB Offset
A	BAND EDGE	27685 to 27735	27685	5MHz	QPSK, 16QAM	1 RB / 0 RB Offset 25 RB / 0 RB Offset
			27735	5MHz	QPSK, 16QAM	1 RB / 24 RB Offset 25 RB / 0 RB Offset
		27710	27710	10MHz	QPSK, 16QAM	1 RB / 0 RB Offset 50 RB / 0 RB Offset 1 RB / 49 RB Offset
A	CONDUCTED EMISSION	27685 to 27735	27685, 27710, 27735	5MHz	QPSK	1 RB / 0 RB Offset
		27710	27710	10MHz	QPSK	1 RB / 0 RB Offset
A	RADIATED EMISSION	27685 to 27735	27710	5MHz	QPSK	1 RB / 0 RB Offset
		27710	27710	10MHz	QPSK	1 RB / 0 RB Offset

Note: This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.

LTE BAND 71

EUT CONFIGURE MODE	TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	CHANNEL BANDWIDTH	MODULATION	MODE
A	ERP	133147 to 133447	133147, 133297, 133447	5MHz	QPSK, 16QAM, 64QAM, 256QAM	1 RB / 0 RB Offset
		133172 to 133422	133172, 133297 133422	10MHz	QPSK, 16QAM, 64QAM, 256QAM	1 RB / 0 RB Offset
		133197 to 133397	133197, 133297, 133397	15MHz	QPSK, 16QAM, 64QAM, 256QAM	1 RB / 0 RB Offset
		133222 to 133372	133222, 133322, 133372	20MHz	QPSK, 16QAM, 64QAM, 256QAM	1 RB / 0 RB Offset
B	FREQUENCY STABILITY	133172 to 133422	133172,133422	10MHz	QPSK,16QAM	50 RB / 0 RB Offset
A	OCCUPIED BANDWIDTH	133147 to 133447	133147, 133297, 133447	5MHz	QPSK,16QAM	25 RB / 0 RB Offset
		133172 to 133422	133172, 133297 133422	10MHz	QPSK,16QAM	50 RB / 0 RB Offset
		133197 to 133397	133197, 133297, 133397	15MHz	QPSK,16QAM	75 RB / 0 RB Offset
		133222 to 133372	133222, 133322, 133372	20MHz	QPSK,16QAM	100 RB / 0 RB Offset
A	PEAK TO AVERAGE RATIO	133147 to 133447	133147, 133297, 133447	5MHz	QPSK,16QAM	1 RB / 0 RB Offset 25 RB / 0 RB Offset
		133172 to 133422	133172, 133297 133422	10MHz	QPSK,16QAM	1 RB / 0 RB Offset 50 RB / 0 RB Offset
		133197 to 133397	133197, 133297, 133397	15MHz	QPSK,16QAM	1 RB / 0 RB Offset 75 RB / 0 RB Offset
		133222 to 133372	133222, 133322, 133372	20MHz	QPSK,16QAM	1 RB / 0 RB Offset 100 RB / 0 RB Offset
A	BAND EDGE	133147 to 133447	133147	5MHz	QPSK,16QAM	1 RB / 0 RB Offset 25 RB / 0 RB Offset
			133447	5MHz	QPSK,16QAM	1 RB / 24 RB Offset 25 RB / 0 RB Offset
		133172 to 133422	133172	10MHz	QPSK,16QAM	1 RB / 0 RB Offset 50 RB / 0 RB Offset
			133422	10MHz	QPSK,16QAM	1 RB / 49 RB Offset 50 RB / 0 RB Offset
		133197 to 133397	133197	15MHz	QPSK,16QAM	1 RB / 0 RB Offset 75 RB / 0 RB Offset
			133397	15MHz	QPSK,16QAM	1 RB / 74 RB Offset 75 RB / 0 RB Offset
		133222 to 133372	133222	20MHz	QPSK,16QAM	1 RB / 0 RB Offset 100 RB / 0 RB Offset
			133372	20MHz	QPSK,16QAM	1 RB / 99 RB Offset 100 RB / 0 RB Offset
A	CONDUCTED EMISSION	133147 to 133447	133147, 133297, 133447	5MHz	QPSK	1 RB / 0 RB Offset
		133172 to 133422	133172, 133297 133422	10MHz	QPSK	1 RB / 0 RB Offset
		133197 to 133397	133197, 133297, 133397	15MHz	QPSK	1 RB / 0 RB Offset
		133222 to 133372	133222, 133322, 133372	20MHz	QPSK	1 RB / 0 RB Offset
A	RADIATED EMISSION	133147 to 133447	133147, 133297 133447	5MHz	QPSK	1 RB / 0 RB Offset
		133172 to 133422	133297	10MHz	QPSK	1 RB / 0 RB Offset
		133197 to 133397	133297	15MHz	QPSK	1 RB / 0 RB Offset



BUREAU
VERITAS

Test Report No.: W7L-P24050018RF06

		133222 to 133372	133322	20MHz	QPSK	1 RB / 0 RB Offset
--	--	------------------	--------	-------	------	--------------------

Note: This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.

TEST CONDITION:

TEST ITEM	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
ERP&EIRP	23deg. C, 70%RH	DC 5V By Adapter	Jace Hu
FREQUENCY STABILITY	23deg. C, 70%RH	DC 3.6V/3.7V/4.2V By Battery	James Fu
OCCUPIED BANDWIDTH	23deg. C, 70%RH	DC 5V By Adapter	James Fu
BAND EDGE	23deg. C, 70%RH	DC 5V By Adapter	James Fu
CONDUCTED EMISSION	23deg. C, 70%RH	DC 5V By Adapter	James Fu
RADIATED EMISSION	23deg. C, 70%RH	DC 5V By Adapter	Jace Hu
PEAK TO AVERAGE RATIO	23deg. C, 70%RH	DC 5V By Adapter	James Fu



Test Report No.: W7L-P24050018RF06

2.5 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC 47 CFR Part 2

FCC 47 CFR Part 27

KDB 971168 D01 Power Meas License Digital Systems v03r01

ANSI/TIA/EIA-603-D

ANSI/TIA/EIA-603-E

ANSI C63.26-2015

NOTE: All test items have been performed and recorded as per the above standards.

3 TEST TYPES AND RESULTS

3.1 OUTPUT POWER MEASUREMENT

3.1.1 LIMITS OF OUTPUT POWER MEASUREMENT

The radiated peak output power shall be according to the specific rule Part 27.50(h)(2) that “User stations are limited to 2 watts” and 27.50(i) specific that “Peak transmit power must be measure over any interval of continuous transmission using instrumentation calibration in terms of rms-equivalent voltage.”

Fixed, mobile, and portable (hand-held) stations operating in the 1710-1755 MHz band and mobile and portable stations operating in the 1695-1710 MHz and 1755-1780 MHz bands are limited to 1 watt EIRP

According to the specific rule Part 27.50(b)(10) and 27.50(c)(10) Fixed, mobile, and Portable stations (hand-held devices) transmitting in the 698-746 MHz, 746-757 MHz, 776-788 MHz, and 805-806 MHz bands are limited to 3 watts ERP.

For mobile and portable stations transmitting in the 2305-2315 MHz band or the 2350-2360 MHz band, the average EIRP must not exceed 50 milliwatts within any 1 megahertz of authorized bandwidth, except that for mobile and portable stations compliant with 3GPP LTE standards or another advanced mobile broadband protocol that avoids concentrating energy at the edge of the operating band the average EIRP must not exceed 250 milliwatts within any 5 megahertz of authorized bandwidth but may exceed 50 milliwatts within any 1 megahertz of authorized bandwidth. For mobile and portable stations using time division duplexing (TDD) technology, the duty cycle must not exceed 38 percent in the 2305-2315 MHz and 2350-2360 MHz bands. Mobile and portable stations using FDD technology are restricted to transmitting in the 2305-2315 MHz band. Power averaging shall not include intervals in which the transmitter is off.

3.1.2 TEST PROCEDURES

EIRP MEASUREMENT:

Per KDB 971168 D01 Power Meas License Digital Systems v03r01 or subclause 5.2.5.5 of ANSI C63.26-2015, the relevant equation for determining the ERP or EIRP from the conducted RF output power measured using the guidance provided above is:

$$\text{ERP or EIRP} = P_{\text{Meas}} + G_T - L_C$$

Where:

ERP or EIRP = effective radiated power or equivalent isotropically radiated power, respectively
(expressed in the same units as P_{Meas} , typically dBW or dBm);



BUREAU
VERITAS

Test Report No.: W7L-P24050018RF06

P_{Meas} = measured transmitter output power or PSD, in dBm or dBW;

G_T = gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP);

L_C = signal attenuation in the connecting cable between the transmitter and antenna, in dB.

CONDUCTED POWER MEASUREMENT:

- a. The EUT was set up for the maximum power with LTE link data modulation and link up with simulator.
- b. Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.

3.1.3 TEST SETUP

CONDUCTED POWER MEASUREMENT:



For the actual test configuration, please refer to the attached file (Test Setup Photo).

3.1.4 TEST RESULTS

CONDUCTED OUTPUT POWER (dBm)

LTE Band 7 (Ant1)						
BW	Modulation	RB Size	RB Offset	Low	Mid	High
		Channel		20850	21100	21350
		Frequency (MHz)		2510	2535	2560
20M	QPSK	1	0	22.75	22.71	22.86
		1	50	22.66	22.64	22.66
		1	99	22.56	22.55	22.63
		50	0	21.95	21.86	21.90
		50	25	21.95	21.95	21.99
		50	50	21.86	21.95	21.96
		100	0	21.88	21.87	21.89
	16QAM	1	0	21.99	21.96	21.97
		1	50	22.04	22.10	21.98
		1	99	22.13	22.09	22.08
		50	0	20.89	20.86	20.90
		50	25	20.91	20.99	20.92
		50	50	21.02	20.87	20.99
		100	0	20.89	20.97	20.90
	64QAM	1	0	20.84	20.75	20.82
		1	50	20.86	20.80	20.83
		1	99	21.03	20.92	20.99
		50	0	19.88	19.86	19.92
		50	25	20.01	19.87	19.96
		50	50	20.01	19.89	20.03
		100	0	19.96	19.95	19.93
	256QAM	1	0	17.76	17.80	17.83
		1	50	17.80	17.83	17.90
		1	99	17.75	17.74	17.86
		50	0	17.79	17.85	17.85
		50	25	17.81	17.89	17.80
		50	50	17.91	17.80	17.89
		100	0	17.74	17.77	17.84

BW	Modulation	Channel		20825	21100	21375
		Frequency (MHz)		2507.5	2535	2562.5
15M	QPSK	1	0	22.70	22.69	22.74
		1	37	22.57	22.57	22.58
		1	74	22.54	22.42	22.57
		36	0	21.87	21.76	21.88
		36	19	21.93	21.85	21.94
		36	39	21.75	21.87	21.88
		75	0	21.86	21.73	21.80
	16QAM	1	0	21.98	21.94	21.89
		1	37	21.98	21.95	21.95
		1	74	22.10	21.94	21.95
		36	0	20.87	20.79	20.81
		36	19	20.79	20.90	20.84
		36	39	20.91	20.75	20.98
		75	0	20.85	20.88	20.84
	64QAM	1	0	20.83	20.73	20.74
		1	37	20.73	20.69	20.82
		1	74	21.02	20.85	20.89
		36	0	19.82	19.79	19.78
		36	19	19.87	19.82	19.90
		36	39	19.99	19.74	19.91
		75	0	19.92	19.88	19.80
	256QAM	1	0	17.66	17.78	17.78
		1	37	17.66	17.81	17.86
		1	74	17.70	17.63	17.73
		36	0	17.68	17.74	17.71
		36	19	17.79	17.76	17.77
		36	39	17.89	17.71	17.86
		75	0	17.67	17.67	17.79

BW	Modulation	Channel		20800	21100	21400
		Frequency (MHz)		2505	2535	2565
10M	QPSK	1	0	22.72	22.63	22.72
		1	24	22.60	22.57	22.61
		1	49	22.53	22.40	22.49
		25	0	21.81	21.71	21.89
		25	12	21.91	21.86	21.92
		25	25	21.81	21.88	21.82
		50	0	21.79	21.79	21.78
	16QAM	1	0	21.87	21.90	21.96
		1	24	21.90	22.06	21.84
		1	49	21.98	21.99	22.01
		25	0	20.75	20.85	20.83
		25	12	20.83	20.90	20.89
		25	25	20.95	20.85	20.84
		50	0	20.80	20.88	20.82
	64QAM	1	0	20.79	20.70	20.70
		1	24	20.75	20.74	20.77
		1	49	21.01	20.77	20.88
		25	0	19.87	19.75	19.80
		25	12	20.00	19.84	19.88
		25	25	19.87	19.82	20.01
		50	0	19.88	19.83	19.87
	256QAM	1	0	17.71	17.69	17.79
		1	24	17.72	17.82	17.86
		1	49	17.73	17.68	17.82
		25	0	17.64	17.78	17.75
		25	12	17.80	17.84	17.67
		25	25	17.81	17.71	17.85
		50	0	17.63	17.75	17.78

BW	Modulation	Channel		20775	21100	21425
		Frequency (MHz)		2502.5	2535	2567.5
5M	QPSK	1	0	22.69	22.62	22.74
		1	12	22.63	22.54	22.65
		1	24	22.44	22.50	22.51
		12	0	21.80	21.73	21.85
		12	6	21.80	21.95	21.83
		12	13	21.75	21.83	21.93
		25	0	21.75	21.85	21.77
	16QAM	1	0	21.89	21.88	21.89
		1	12	21.96	22.02	21.95
		1	24	22.09	21.95	21.94
		12	0	20.82	20.84	20.89
		12	6	20.86	20.97	20.90
		12	13	20.88	20.75	20.96
		25	0	20.80	20.84	20.88
	64QAM	1	0	20.81	20.69	20.81
		1	12	20.78	20.78	20.76
		1	24	20.93	20.80	20.90
		12	0	19.77	19.78	19.85
		12	6	19.89	19.77	19.94
		12	13	19.99	19.85	19.89
		25	0	19.87	19.80	19.85
	256QAM	1	0	17.74	17.74	17.77
		1	12	17.78	17.72	17.78
		1	24	17.70	17.68	17.72
		12	0	17.70	17.79	17.71
		12	6	17.73	17.78	17.68
		12	13	17.85	17.68	17.80
		25	0	17.73	17.65	17.80

LTE Band 12 (Ant2)						
BW	Modulation	RB Size	RB Offset	Low	Mid	High
		Channel		23060	23095	23130
		Frequency (MHz)		704	707.5	711
10M	QPSK	1	0	22.73	22.67	22.79
		1	24	22.74	22.71	22.74
		1	49	22.82	22.89	22.83
		25	0	21.79	21.79	21.80
		25	12	21.69	21.78	21.82
		25	25	21.83	21.93	21.91
		50	0	21.60	21.88	21.82
	16QAM	1	0	21.82	21.91	21.77
		1	24	21.94	21.93	22.00
		1	49	21.88	21.91	21.81
		25	0	20.69	20.76	20.73
		25	12	20.71	20.80	20.77
		25	25	20.75	20.71	20.77
		50	0	20.70	20.75	20.74
	64QAM	1	0	20.53	20.77	20.67
		1	24	20.90	20.91	20.94
		1	49	20.84	20.98	20.99
		25	0	19.84	19.89	19.89
		25	12	19.69	19.76	19.78
		25	25	19.82	19.86	19.97
		50	0	19.76	19.72	19.76
	256QAM	1	0	17.73	17.78	17.73
		1	24	17.66	17.78	17.80
		1	49	17.70	17.76	17.80
		25	0	17.67	17.73	17.64
		25	12	17.75	17.72	17.69
		25	25	17.71	17.82	17.82
		50	0	17.71	17.75	17.69

BW	Modulation	Channel		23035	23095	23155
		Frequency (MHz)		701.5	707.5	713.5
5M	QPSK	1	0	22.59	22.66	22.74
		1	12	22.68	22.68	22.63
		1	24	22.72	22.83	22.80
		12	0	21.66	21.74	21.66
		12	6	21.66	21.70	21.76
		12	13	21.82	21.79	21.90
		25	0	21.53	21.76	21.70
	16QAM	1	0	21.73	21.78	21.68
		1	12	21.93	21.89	21.95
		1	24	21.79	21.90	21.67
		12	0	20.61	20.69	20.67
		12	6	20.65	20.79	20.74
		12	13	20.67	20.62	20.73
		25	0	20.66	20.64	20.62
	64QAM	1	0	20.38	20.67	20.52
		1	12	20.78	20.80	20.81
		1	24	20.81	20.84	20.88
		12	0	19.72	19.76	19.79
		12	6	19.54	19.67	19.70
		12	13	19.74	19.83	19.85
		25	0	19.69	19.66	19.68
	256QAM	1	0	17.69	17.66	17.59
		1	12	17.62	17.73	17.71
		1	24	17.58	17.61	17.72
		12	0	17.64	17.72	17.57
		12	6	17.69	17.67	17.60
		12	13	17.70	17.72	17.71
		25	0	17.69	17.67	17.58

BW	Modulation	Channel		23025	23095	23165
		Frequency (MHz)		700.5	707.5	714.5
3M	QPSK	1	0	22.60	22.64	22.67
		1	7	22.63	22.56	22.71
		1	14	22.74	22.81	22.73
		8	0	21.68	21.64	21.75
		8	3	21.61	21.63	21.74
		8	7	21.78	21.82	21.85
		15	0	21.57	21.80	21.77
	16QAM	1	0	21.80	21.82	21.66
		1	7	21.84	21.83	21.90
		1	14	21.84	21.76	21.80
		8	0	20.64	20.67	20.61
		8	3	20.57	20.78	20.66
		8	7	20.72	20.70	20.76
		15	0	20.59	20.73	20.66
	64QAM	1	0	20.42	20.71	20.65
		1	7	20.80	20.76	20.90
		1	14	20.79	20.83	20.91
		8	0	19.81	19.82	19.81
		8	3	19.61	19.74	19.65
		8	7	19.72	19.73	19.94
		15	0	19.69	19.66	19.67
	256QAM	1	0	17.72	17.77	17.62
		1	7	17.65	17.63	17.67
		1	14	17.59	17.73	17.71
		8	0	17.66	17.59	17.55
		8	3	17.70	17.58	17.62
		8	7	17.70	17.78	17.71
		15	0	17.59	17.73	17.67

BW	Modulation	Channel		23017	23095	23173
		Frequency (MHz)		699.7	707.5	715.3
1.4M	QPSK	1	0	22.71	22.64	22.76
		1	2	22.63	22.64	22.71
		1	5	22.68	22.86	22.77
		3	0	22.64	22.64	22.78
		3	1	22.62	22.75	22.71
		3	3	22.75	22.91	22.76
		6	0	21.57	21.83	21.80
	16QAM	1	0	21.67	21.85	21.74
		1	2	21.80	21.89	21.88
		1	5	21.78	21.76	21.76
		3	0	21.67	21.72	21.66
		3	1	21.57	21.69	21.64
		3	3	21.67	21.64	21.72
		6	0	20.55	20.63	20.59
	64QAM	1	0	20.39	20.76	20.60
		1	2	20.88	20.78	20.91
		1	5	20.77	20.95	20.91
		3	0	20.82	20.80	20.78
		3	1	20.65	20.75	20.76
		3	3	20.80	20.81	20.82
		6	0	19.74	19.64	19.67
	256QAM	1	0	17.58	17.77	17.72
		1	2	17.63	17.70	17.70
		1	5	17.61	17.62	17.76
		3	0	17.63	17.65	17.52
		3	1	17.61	17.59	17.65
		3	3	17.64	17.69	17.70
		6	0	17.65	17.69	17.62

LTE Band 13 (Ant2)						
BW	Modulation	RB Size	RB Offset	Mid		
		Channel		23230		
		Frequency (MHz)		782		
10M	QPSK	1	0		22.92	
		1	24		22.89	
		1	49		22.88	
		25	0		21.92	
		25	12		21.94	
		25	25		22.00	
		50	0		21.95	
	16QAM	1	0		22.14	
		1	24		22.11	
		1	49		22.12	
		25	0		20.93	
		25	12		20.97	
		25	25		20.99	
		50	0		20.92	
	64QAM	1	0		21.10	
		1	24		21.15	
		1	49		21.14	
		25	0		20.02	
		25	12		20.00	
		25	25		20.01	
		50	0		20.02	
	256QAM	1	0		17.92	
		1	24		17.95	
		1	49		17.96	
		25	0		17.94	
		25	12		17.93	
		25	25		17.94	
		50	0		17.94	

BW	Modulation	Channel		23205	23230	23255
		Frequency (MHz)		779.5	782	784.5
5M	QPSK	1	0	22.88	22.89	22.82
		1	12	22.83	22.80	22.76
		1	24	22.85	22.79	22.76
		12	0	21.90	21.91	21.90
		12	6	21.87	21.81	21.92
		12	13	21.92	21.85	21.91
		25	0	21.86	21.92	21.90
	16QAM	1	0	22.11	22.09	22.00
		1	12	22.05	22.05	22.04
		1	24	21.98	21.98	22.09
		12	0	20.80	20.92	20.81
		12	6	20.82	20.88	20.85
		12	13	20.91	20.95	20.93
		25	0	20.84	20.88	20.91
	64QAM	1	0	21.00	21.06	21.04
		1	12	21.13	21.07	21.02
		1	24	21.11	21.11	21.07
		12	0	19.89	19.88	19.99
		12	6	19.95	19.89	19.96
		12	13	19.95	19.88	19.90
		25	0	19.94	19.97	19.96
	256QAM	1	0	17.81	17.91	17.85
		1	12	17.86	17.82	17.94
		1	24	17.90	17.94	17.90
		12	0	17.80	17.83	17.91
		12	6	17.86	17.91	17.87
		12	13	17.93	17.88	17.81
		25	0	17.90	17.87	17.81

LTE Band 17 (Ant2)						
BW	Modulation	RB Size	RB Offset	Low	Mid	High
		Channel		23780	23790	23800
		Frequency (MHz)		709	710	711
10M	QPSK	1	0	22.60	22.48	22.59
		1	24	22.83	22.83	22.73
		1	49	22.77	22.74	22.73
		25	0	21.68	21.66	21.80
		25	12	21.77	21.79	21.85
		25	25	21.73	21.72	21.81
		50	0	21.75	21.77	21.86
	16QAM	1	0	21.85	21.73	21.81
		1	24	21.92	21.86	21.77
		1	49	21.80	21.78	22.02
		25	0	20.65	20.76	20.68
		25	12	20.79	20.73	20.67
		25	25	20.92	20.76	20.86
		50	0	20.57	20.75	20.67
	64QAM	1	0	20.78	20.64	20.77
		1	24	20.87	20.78	20.91
		1	49	20.95	20.82	20.80
		25	0	19.81	19.77	19.77
		25	12	19.69	19.72	19.71
		25	25	19.92	19.80	19.85
		50	0	19.65	19.82	19.74
	256QAM	1	0	17.74	17.65	17.77
		1	24	17.66	17.57	17.57
		1	49	17.63	17.61	17.55
		25	0	17.66	17.64	17.69
		25	12	17.67	17.74	17.58
		25	25	17.56	17.64	17.58
		50	0	17.60	17.56	17.72

BW	Modulation	Channel		23755	23790	23825
		Frequency (MHz)		706.5	710	713.5
5M	QPSK	1	0	22.45	22.44	22.52
		1	12	22.81	22.75	22.71
		1	24	22.62	22.60	22.72
		12	0	21.64	21.55	21.78
		12	6	21.63	21.67	21.76
		12	13	21.58	21.67	21.79
		25	0	21.70	21.64	21.81
	16QAM	1	0	21.80	21.72	21.70
		1	12	21.79	21.76	21.73
		1	24	21.71	21.69	21.88
		12	0	20.58	20.71	20.54
		12	6	20.76	20.69	20.64
		12	13	20.83	20.63	20.82
		25	0	20.55	20.73	20.65
	64QAM	1	0	20.76	20.62	20.71
		1	12	20.77	20.66	20.81
		1	24	20.91	20.79	20.74
		12	0	19.70	19.76	19.66
		12	6	19.57	19.63	19.68
		12	13	19.78	19.65	19.83
		25	0	19.56	19.77	19.67
	256QAM	1	0	17.63	17.61	17.64
		1	12	17.64	17.49	17.43
		1	24	17.58	17.56	17.54
		12	0	17.53	17.60	17.61
		12	6	17.60	17.70	17.43
		12	13	17.45	17.55	17.46
		25	0	17.54	17.46	17.59

LTE Band 30 (Ant1)						
BW	Modulation	RB Size	RB Offset	Mid		
		Channel		27710		
		Frequency (MHz)		2310		
10M	QPSK	1	0		22.86	
		1	24		22.76	
		1	49		22.74	
		25	0		21.70	
		25	12		21.79	
		25	25		21.81	
		50	0		21.73	
	16QAM	1	0		22.03	
		1	24		22.09	
		1	49		21.06	
		25	0		20.79	
		25	12		20.82	
		25	25		20.81	
		50	0		20.71	
	64QAM	1	0		21.06	
		1	24		21.00	
		1	49		21.05	
		25	0		19.84	
		25	12		19.85	
		25	25		19.87	
		50	0		19.77	
	256QAM	1	0		17.86	
		1	24		17.91	
		1	49		17.90	
		25	0		17.88	
		25	12		17.89	
		25	25		17.88	
		50	0		17.88	

BW	Modulation	Channel		27685	27710	27735
		Frequency (MHz)		2307.5	2310	2312.5
5M	QPSK	1	0	22.79	22.77	22.74
		1	12	22.67	22.74	22.66
		1	24	22.73	22.59	22.60
		12	0	21.69	21.66	21.59
		12	6	21.72	21.73	21.78
		12	13	21.68	21.79	21.76
		25	0	21.69	21.63	21.58
	16QAM	1	0	21.96	22.00	21.96
		1	12	21.95	22.01	22.05
		1	24	21.02	21.05	20.98
		12	0	20.77	20.65	20.68
		12	6	20.73	20.81	20.76
		12	13	20.67	20.77	20.79
		25	0	20.66	20.68	20.66
	64QAM	1	0	20.96	21.03	20.98
		1	12	20.90	20.91	20.96
		1	24	21.00	20.91	20.91
		12	0	19.81	19.79	19.81
		12	6	19.73	19.78	19.78
		12	13	19.81	19.73	19.85
		25	0	19.75	19.62	19.62
	256QAM	1	0	17.80	17.73	17.77
		1	12	17.88	17.89	17.90
		1	24	17.83	17.85	17.84
		12	0	17.80	17.87	17.78
		12	6	17.84	17.84	17.81
		12	13	17.80	17.87	17.84
		25	0	17.77	17.87	17.83

LTE Band 71 (Ant2)						
BW	Modulation	RB Size	RB Offset	Low	Mid	High
		Channel		133222	133322	133372
		Frequency (MHz)		673	683	688
20M	QPSK	1	0	22.64	22.75	22.67
		1	50	22.78	22.81	22.91
		1	99	22.70	22.78	22.74
		50	0	21.86	21.81	21.98
		50	25	21.85	21.80	21.72
		50	50	21.80	21.68	21.76
		100	0	21.66	21.78	21.79
	16QAM	1	0	21.88	21.77	21.90
		1	50	21.85	21.99	21.95
		1	99	21.85	21.89	21.88
		50	0	20.98	20.94	20.88
		50	25	20.79	20.96	20.91
		50	50	20.70	20.75	20.78
		100	0	20.69	20.73	20.85
	64QAM	1	0	20.69	20.74	20.80
		1	50	20.87	20.88	20.89
		1	99	20.96	20.78	20.81
		50	0	19.82	19.88	19.87
		50	25	19.85	19.84	19.79
		50	50	19.79	19.74	19.89
		100	0	19.86	19.96	19.76
	256QAM	1	0	17.65	17.78	17.75
		1	50	17.79	17.75	17.63
		1	99	17.61	17.66	17.77
		50	0	17.78	17.73	17.69
		50	25	17.77	17.72	17.67
		50	50	17.72	17.77	17.72
		100	0	17.74	17.73	17.75

BW	Modulation	Channel		133197	133297	133397
		Frequency (MHz)		670.5	680.5	690.5
15M	QPSK	1	0	22.51	22.72	22.62
		1	37	22.75	22.68	22.80
		1	74	22.68	22.63	22.71
		36	0	21.74	21.77	21.83
		36	19	21.76	21.65	21.62
		36	39	21.69	21.56	21.69
		75	0	21.56	21.71	21.64
	16QAM	1	0	21.82	21.63	21.80
		1	37	21.83	21.88	21.94
		1	74	21.80	21.79	21.73
		36	0	20.86	20.92	20.81
		36	19	20.65	20.95	20.88
		36	39	20.61	20.69	20.65
		75	0	20.58	20.60	20.70
	64QAM	1	0	20.66	20.70	20.72
		1	37	20.85	20.86	20.76
		1	74	20.87	20.66	20.76
		36	0	19.74	19.81	19.84
		36	19	19.77	19.80	19.73
		36	39	19.75	19.67	19.78
		75	0	19.76	19.81	19.64
	256QAM	1	0	17.50	17.70	17.69
		1	37	17.64	17.62	17.62
		1	74	17.48	17.53	17.67
		36	0	17.75	17.59	17.54
		36	19	17.70	17.59	17.54
		36	39	17.57	17.65	17.65
		75	0	17.60	17.63	17.66

BW	Modulation	Channel		133172	133272	133422
		Frequency (MHz)		668	678	693
10M	QPSK	1	0	22.57	22.74	22.65
		1	24	22.75	22.76	22.78
		1	49	22.56	22.64	22.71
		25	0	21.73	21.78	21.94
		25	12	21.80	21.77	21.67
		25	25	21.79	21.58	21.75
		50	0	21.61	21.73	21.76
	16QAM	1	0	21.83	21.70	21.81
		1	24	21.70	21.91	21.92
		1	49	21.79	21.87	21.78
		25	0	20.85	20.87	20.74
		25	12	20.78	20.86	20.81
		25	25	20.56	20.71	20.64
		50	0	20.55	20.59	20.78
	64QAM	1	0	20.61	20.67	20.66
		1	24	20.85	20.79	20.78
		1	49	20.81	20.77	20.72
		25	0	19.70	19.80	19.78
		25	12	19.74	19.72	19.76
		25	25	19.74	19.67	19.79
		50	0	19.81	19.92	19.66
	256QAM	1	0	17.55	17.63	17.61
		1	24	17.75	17.66	17.48
		1	49	17.48	17.56	17.65
		25	0	17.65	17.58	17.67
		25	12	17.76	17.58	17.58
		25	25	17.65	17.68	17.68
		50	0	17.72	17.69	17.60

BW	Modulation	Channel		133147	133247	133447
		Frequency (MHz)		665.5	675.5	695.5
5M	QPSK	1	0	22.63	22.72	22.58
		1	12	22.68	22.73	22.82
		1	24	22.55	22.68	22.66
		12	0	21.82	21.72	21.91
		12	6	21.70	21.67	21.61
		12	13	21.70	21.54	21.68
		25	0	21.63	21.72	21.70
	16QAM	1	0	21.85	21.64	21.84
		1	12	21.72	21.88	21.93
		1	24	21.82	21.75	21.81
		12	0	20.87	20.86	20.73
		12	6	20.66	20.83	20.85
		12	13	20.65	20.73	20.63
		25	0	20.65	20.60	20.83
	64QAM	1	0	20.63	20.60	20.66
		1	12	20.75	20.79	20.76
		1	24	20.86	20.66	20.77
		12	0	19.80	19.75	19.74
		12	6	19.84	19.79	19.65
		12	13	19.70	19.73	19.86
		25	0	19.71	19.87	19.72
	256QAM	1	0	17.57	17.68	17.74
		1	12	17.67	17.69	17.55
		1	24	17.56	17.58	17.65
		12	0	17.70	17.63	17.57
		12	6	17.68	17.65	17.58
		12	13	17.57	17.65	17.59
		25	0	17.66	17.65	17.74

EIRP

LTE B7 5M QPSK						
Channel	Frequency (MHz)	Conducted Power (dBm)	Gain (dBi)	EIRP (dBm)	EIRP (mW)	Lmit (W)
20775	2502.5	22.69	0.7	23.39	218.27	2
21100	2535	22.62	0.7	23.32	214.78	2
21425	2567.5	22.74	0.7	23.44	220.8	2

LTE B7 5M 16QAM						
Channel	Frequency (MHz)	Conducted Power (dBm)	Gain (dBi)	EIRP (dBm)	EIRP (mW)	Lmit (W)
20775	2502.5	22.09	0.7	22.79	190.11	2
21100	2535	22.02	0.7	22.72	187.07	2
21425	2567.5	21.95	0.7	22.65	184.08	2

LTE B7 5M 64QAM						
Channel	Frequency (MHz)	Conducted Power (dBm)	Gain (dBi)	EIRP (dBm)	EIRP (mW)	Lmit (W)
20775	2502.5	20.93	0.7	21.63	145.55	2
21100	2535	20.8	0.7	21.5	141.25	2
21425	2567.5	20.9	0.7	21.6	144.54	2

LTE B7 5M 256QAM						
Channel	Frequency (MHz)	Conducted Power (dBm)	Gain (dBi)	EIRP (dBm)	EIRP (mW)	Lmit (W)
20775	2502.5	17.85	0.7	18.55	71.61	2
21100	2535	17.79	0.7	18.49	70.63	2
21425	2567.5	17.8	0.7	18.5	70.79	2

LTE B7 10M QPSK						
Channel	Frequency (MHz)	Conducted Power (dBm)	Gain (dBi)	EIRP (dBm)	EIRP (mW)	Lmit (W)
20800	2505	22.72	0.7	23.42	219.79	2
21100	2535	22.63	0.7	23.33	215.28	2
21400	2565	22.72	0.7	23.42	219.79	2

LTE B7 10M 16QAM						
Channel	Frequency (MHz)	Conducted Power (dBm)	Gain (dBi)	EIRP (dBm)	EIRP (mW)	Lmit (W)
20800	2505	21.98	0.7	22.68	185.35	2
21100	2535	22.06	0.7	22.76	188.8	2
21400	2565	22.01	0.7	22.71	186.64	2

LTE B7 10M 64QAM						
Channel	Frequency (MHz)	Conducted Power (dBm)	Gain (dBi)	EIRP (dBm)	EIRP (mW)	Lmit (W)
20800	2505	21.01	0.7	21.71	148.25	2
21100	2535	20.77	0.7	21.47	140.28	2
21400	2565	20.88	0.7	21.58	143.88	2

LTE B7 10M 256QAM						
Channel	Frequency (MHz)	Conducted Power (dBm)	Gain (dBi)	EIRP (dBm)	EIRP (mW)	Lmit (W)
20800	2505	17.81	0.7	18.51	70.96	2
21100	2535	17.84	0.7	18.54	71.45	2
21400	2565	17.86	0.7	18.56	71.78	2

LTE B7 15M QPSK						
Channel	Frequency (MHz)	Conducted Power (dBm)	Gain (dBi)	EIRP (dBm)	EIRP (mW)	Lmit (W)
20825	2507.5	22.7	0.7	23.4	218.78	2
21100	2535	22.69	0.7	23.39	218.27	2
21375	2562.5	22.74	0.7	23.44	220.8	2

LTE B7 15M 16QAM						
Channel	Frequency (MHz)	Conducted Power (dBm)	Gain (dBi)	EIRP (dBm)	EIRP (mW)	Lmit (W)
20825	2507.5	22.1	0.7	22.8	190.55	2
21100	2535	21.95	0.7	22.65	184.08	2
21375	2562.5	21.95	0.7	22.65	184.08	2

LTE B7 15M 64QAM						
Channel	Frequency (MHz)	Conducted Power (dBm)	Gain (dBi)	EIRP (dBm)	EIRP (mW)	Lmit (W)
20825	2507.5	21.02	0.7	21.72	148.59	2
21100	2535	20.85	0.7	21.55	142.89	2
21375	2562.5	20.89	0.7	21.59	144.21	2

LTE B7 15M 256QAM						
Channel	Frequency (MHz)	Conducted Power (dBm)	Gain (dBi)	EIRP (dBm)	EIRP (mW)	Lmit (W)
20825	2507.5	17.89	0.7	18.59	72.28	2
21100	2535	17.81	0.7	18.51	70.96	2
21375	2562.5	17.86	0.7	18.56	71.78	2

LTE B7 20M QPSK						
Channel	Frequency (MHz)	Conducted Power (dBm)	Gain (dBi)	EIRP (dBm)	EIRP (mW)	Lmit (W)
20850	2510	22.75	0.7	23.45	221.31	2
21100	2535	22.71	0.7	23.41	219.28	2
21350	2560	22.86	0.7	23.56	226.99	2

LTE B7 20M 16QAM						
Channel	Frequency (MHz)	Conducted Power (dBm)	Gain (dBi)	EIRP (dBm)	EIRP (mW)	Lmit (W)
20850	2510	22.13	0.7	22.83	191.87	2
21100	2535	22.1	0.7	22.8	190.55	2
21350	2560	22.08	0.7	22.78	189.67	2

LTE B7 20M 64QAM						
Channel	Frequency (MHz)	Conducted Power (dBm)	Gain (dBi)	EIRP (dBm)	EIRP (mW)	Lmit (W)
20850	2510	21.03	0.7	21.73	148.94	2
21100	2535	20.92	0.7	21.62	145.21	2
21350	2560	20.99	0.7	21.69	147.57	2

LTE B7 20M 256QAM						
Channel	Frequency (MHz)	Conducted Power (dBm)	Gain (dBi)	EIRP (dBm)	EIRP (mW)	Lmit (W)
20850	2510	17.91	0.7	18.61	72.61	2
21100	2535	17.89	0.7	18.59	72.28	2
21350	2560	17.9	0.7	18.6	72.44	2

LTE B12 1.4M QPSK						
Channel	Frequency (MHz)	Conducted Power (dBm)	Gain (dBi)	ERP (dBm)	ERP (mW)	Lmit (W)
23017	699.7	22.75	-0.3	20.3	107.15	3
23095	707.5	22.91	-0.3	20.46	111.17	3
23173	715.3	22.78	-0.3	20.33	107.89	3

LTE B12 1.4M 16QAM						
Channel	Frequency (MHz)	Conducted Power (dBm)	Gain (dBi)	ERP (dBm)	ERP (mW)	Lmit (W)
23017	699.7	21.8	-0.3	19.35	86.1	3
23095	707.5	21.89	-0.3	19.44	87.9	3
23173	715.3	21.88	-0.3	19.43	87.7	3

LTE B12 1.4M 64QAM						
Channel	Frequency (MHz)	Conducted Power (dBm)	Gain (dBi)	ERP (dBm)	ERP (mW)	Lmit (W)
23017	699.7	20.88	-0.3	18.43	69.66	3
23095	707.5	20.95	-0.3	18.5	70.79	3
23173	715.3	20.91	-0.3	18.46	70.15	3

LTE B12 1.4M 256QAM						
Channel	Frequency (MHz)	Conducted Power (dBm)	Gain (dBi)	ERP (dBm)	ERP (mW)	Lmit (W)
23017	699.7	17.65	-0.3	15.2	33.11	3
23095	707.5	17.77	-0.3	15.32	34.04	3
23173	715.3	17.76	-0.3	15.31	33.96	3

LTE B12 3M QPSK						
Channel	Frequency (MHz)	Conducted Power (dBm)	Gain (dBi)	ERP (dBm)	ERP (mW)	Lmit (W)
23025	700.5	22.74	-0.3	20.29	106.91	3
23095	707.5	22.81	-0.3	20.36	108.64	3
23165	714.5	22.73	-0.3	20.28	106.66	3

LTE B12 3M 16QAM						
Channel	Frequency (MHz)	Conducted Power (dBm)	Gain (dBi)	ERP (dBm)	ERP (mW)	Lmit (W)
23025	700.5	21.84	-0.3	19.39	86.9	3
23095	707.5	21.83	-0.3	19.38	86.7	3
23165	714.5	21.9	-0.3	19.45	88.1	3

LTE B12 3M 64QAM						
Channel	Frequency (MHz)	Conducted Power (dBm)	Gain (dBi)	ERP (dBm)	ERP (mW)	Lmit (W)
23025	700.5	20.8	-0.3	18.35	68.39	3
23095	707.5	20.83	-0.3	18.38	68.87	3
23165	714.5	20.91	-0.3	18.46	70.15	3

LTE B12 3M 256QAM						
Channel	Frequency (MHz)	Conducted Power (dBm)	Gain (dBi)	ERP (dBm)	ERP (mW)	Lmit (W)
23025	700.5	17.72	-0.3	15.27	33.65	3
23095	707.5	17.78	-0.3	15.33	34.12	3
23165	714.5	17.71	-0.3	15.26	33.57	3

LTE B12 5M QPSK						
Channel	Frequency (MHz)	Conducted Power (dBm)	Gain (dBi)	ERP (dBm)	ERP (mW)	Lmit (W)
23035	701.5	22.72	-0.3	20.27	106.41	3
23095	707.5	22.83	-0.3	20.38	109.14	3
23155	713.5	22.8	-0.3	20.35	108.39	3

LTE B12 5M 16QAM						
Channel	Frequency (MHz)	Conducted Power (dBm)	Gain (dBi)	ERP (dBm)	ERP (mW)	Lmit (W)
23035	701.5	21.93	-0.3	19.48	88.72	3
23095	707.5	21.9	-0.3	19.45	88.1	3
23155	713.5	21.95	-0.3	19.5	89.13	3

LTE B12 5M 64QAM						
Channel	Frequency (MHz)	Conducted Power (dBm)	Gain (dBi)	ERP (dBm)	ERP (mW)	Lmit (W)
23035	701.5	20.81	-0.3	18.36	68.55	3
23095	707.5	20.84	-0.3	18.39	69.02	3
23155	713.5	20.88	-0.3	18.43	69.66	3

LTE B12 5M 256QAM						
Channel	Frequency (MHz)	Conducted Power (dBm)	Gain (dBi)	ERP (dBm)	ERP (mW)	Lmit (W)
23035	701.5	17.7	-0.3	15.25	33.5	3
23095	707.5	17.73	-0.3	15.28	33.73	3
23155	713.5	17.72	-0.3	15.27	33.65	3

LTE B12 10M QPSK						
Channel	Frequency (MHz)	Conducted Power (dBm)	Gain (dBi)	ERP (dBm)	ERP (mW)	Lmit (W)
23060	704	22.82	-0.3	20.37	108.89	3
23095	707.5	22.89	-0.3	20.44	110.66	3
23130	711	22.83	-0.3	20.38	109.14	3

LTE B12 10M 16QAM						
Channel	Frequency (MHz)	Conducted Power (dBm)	Gain (dBi)	ERP (dBm)	ERP (mW)	Lmit (W)
23060	704	21.94	-0.3	19.49	88.92	3
23095	707.5	21.93	-0.3	19.48	88.72	3
23130	711	22	-0.3	19.55	90.16	3

LTE B12 10M 64QAM						
Channel	Frequency (MHz)	Conducted Power (dBm)	Gain (dBi)	ERP (dBm)	ERP (mW)	Lmit (W)
23060	704	20.9	-0.3	18.45	69.98	3
23095	707.5	20.98	-0.3	18.53	71.29	3
23130	711	20.99	-0.3	18.54	71.45	3

LTE B12 10M 256QAM						
Channel	Frequency (MHz)	Conducted Power (dBm)	Gain (dBi)	ERP (dBm)	ERP (mW)	Lmit (W)
23060	704	17.75	-0.3	15.3	33.88	3
23095	707.5	17.82	-0.3	15.37	34.43	3
23130	711	17.82	-0.3	15.37	34.43	3

LTE B13 5M QPSK						
Channel	Frequency (MHz)	Conducted Power (dBm)	Gain (dBi)	ERP (dBm)	ERP (mW)	Lmit (W)
23205	779.5	22.88	-1.5	19.23	83.75	3
23230	782	22.89	-1.5	19.24	83.95	3
23255	784.5	22.82	-1.5	19.17	82.6	3

LTE B13 5M 16QAM						
Channel	Frequency (MHz)	Conducted Power (dBm)	Gain (dBi)	ERP (dBm)	ERP (mW)	Lmit (W)
23205	779.5	22.11	-1.5	18.46	70.15	3
23230	782	22.09	-1.5	18.44	69.82	3
23255	784.5	22.09	-1.5	18.44	69.82	3

LTE B13 5M 64QAM						
Channel	Frequency (MHz)	Conducted Power (dBm)	Gain (dBi)	ERP (dBm)	ERP (mW)	Lmit (W)
23205	779.5	21.13	-1.5	17.48	55.98	3
23230	782	21.11	-1.5	17.46	55.72	3
23255	784.5	21.07	-1.5	17.42	55.21	3

LTE B13 5M 256QAM						
Channel	Frequency (MHz)	Conducted Power (dBm)	Gain (dBi)	ERP (dBm)	ERP (mW)	Lmit (W)
23205	779.5	17.93	-1.5	14.28	26.79	3
23230	782	17.94	-1.5	14.29	26.85	3
23255	784.5	17.94	-1.5	14.29	26.85	3

LTE B13 10M QPSK						
Channel	Frequency (MHz)	Conducted Power (dBm)	Gain (dBi)	ERP (dBm)	ERP (mW)	Lmit (W)
23230	782	22.92	-1.5	19.27	84.53	3

LTE B13 10M 16QAM						
Channel	Frequency (MHz)	Conducted Power (dBm)	Gain (dBi)	ERP (dBm)	ERP (mW)	Lmit (W)
23230	782	22.14	-1.5	18.49	70.63	3

LTE B13 10M 64QAM						
Channel	Frequency (MHz)	Conducted Power (dBm)	Gain (dBi)	ERP (dBm)	ERP (mW)	Lmit (W)
23230	782	21.15	-1.5	17.5	56.23	3

LTE B13 10M 256QAM						
Channel	Frequency (MHz)	Conducted Power (dBm)	Gain (dBi)	ERP (dBm)	ERP (mW)	Lmit (W)
23230	782	17.96	-1.5	14.31	26.98	3

LTE B17 5M QPSK						
Channel	Frequency (MHz)	Conducted Power (dBm)	Gain (dBi)	ERP (dBm)	ERP (mW)	Lmit (W)
23755	706.5	22.81	-0.3	20.36	108.64	3
23790	710	22.75	-0.3	20.3	107.15	3
23825	713.5	22.72	-0.3	20.27	106.41	3

LTE B17 5M 16QAM						
Channel	Frequency (MHz)	Conducted Power (dBm)	Gain (dBi)	ERP (dBm)	ERP (mW)	Lmit (W)
23755	706.5	21.8	-0.3	19.35	86.1	3
23790	710	21.76	-0.3	19.31	85.31	3
23825	713.5	21.88	-0.3	19.43	87.7	3

LTE B17 5M 64QAM						
Channel	Frequency (MHz)	Conducted Power (dBm)	Gain (dBi)	ERP (dBm)	ERP (mW)	Lmit (W)
23755	706.5	20.91	-0.3	18.46	70.15	3
23790	710	20.79	-0.3	18.34	68.23	3
23825	713.5	20.81	-0.3	18.36	68.55	3

LTE B17 5M 256QAM						
Channel	Frequency (MHz)	Conducted Power (dBm)	Gain (dBi)	ERP (dBm)	ERP (mW)	Lmit (W)
23755	706.5	17.64	-0.3	15.19	33.04	3
23790	710	17.7	-0.3	15.25	33.5	3
23825	713.5	17.64	-0.3	15.19	33.04	3

LTE B17 10M QPSK						
Channel	Frequency (MHz)	Conducted Power (dBm)	Gain (dBi)	ERP (dBm)	ERP (mW)	Lmit (W)
23780	709	22.83	-0.3	20.38	109.14	3
23790	710	22.83	-0.3	20.38	109.14	3
23800	711	22.73	-0.3	20.28	106.66	3

LTE B17 10M 16QAM						
Channel	Frequency (MHz)	Conducted Power (dBm)	Gain (dBi)	ERP (dBm)	ERP (mW)	Lmit (W)
23780	709	21.92	-0.3	19.47	88.51	3
23790	710	21.86	-0.3	19.41	87.3	3
23800	711	22.02	-0.3	19.57	90.57	3

LTE B17 10M 64QAM						
Channel	Frequency (MHz)	Conducted Power (dBm)	Gain (dBi)	ERP (dBm)	ERP (mW)	Lmit (W)
23780	709	20.95	-0.3	18.5	70.79	3
23790	710	20.82	-0.3	18.37	68.71	3
23800	711	20.91	-0.3	18.46	70.15	3

LTE B17 10M 256QAM						
Channel	Frequency (MHz)	Conducted Power (dBm)	Gain (dBi)	ERP (dBm)	ERP (mW)	Lmit (W)
23780	709	17.74	-0.3	15.29	33.81	3
23790	710	17.74	-0.3	15.29	33.81	3
23800	711	17.77	-0.3	15.32	34.04	3

LTE B30 5M QPSK						
Channel	Frequency (MHz)	Conducted Power (dBm)	Gain (dBi)	EIRP (dBm)	EIRP (mW)	Lmit (W)
27685	2307.5	22.79	1	23.79	239.33	0.25
27710	2310	22.77	1	23.77	238.23	0.25
27735	2312.5	22.74	1	23.74	236.59	0.25

LTE B30 5M 16QAM						
Channel	Frequency (MHz)	Conducted Power (dBm)	Gain (dBi)	EIRP (dBm)	EIRP (mW)	Lmit (W)
27685	2307.5	21.96	1	22.96	197.7	0.25
27710	2310	22.01	1	23.01	199.99	0.25
27735	2312.5	22.05	1	23.05	201.84	0.25

LTE B30 5M 64QAM						
Channel	Frequency (MHz)	Conducted Power (dBm)	Gain (dBi)	EIRP (dBm)	EIRP (mW)	Lmit (W)
27685	2307.5	21	1	22	158.49	0.25
27710	2310	21.03	1	22.03	159.59	0.25
27735	2312.5	20.98	1	21.98	157.76	0.25

LTE B30 5M 256QAM						
Channel	Frequency (MHz)	Conducted Power (dBm)	Gain (dBi)	EIRP (dBm)	EIRP (mW)	Lmit (W)
27685	2307.5	17.88	1	18.88	77.27	0.25
27710	2310	17.89	1	18.89	77.45	0.25
27735	2312.5	17.9	1	18.9	77.62	0.25

LTE B30 10M QPSK						
Channel	Frequency (MHz)	Conducted Power (dBm)	Gain (dBi)	EIRP (dBm)	EIRP (mW)	Lmit (W)
27710	2310	22.86	1	23.86	243.22	0.25

LTE B30 10M 16QAM						
Channel	Frequency (MHz)	Conducted Power (dBm)	Gain (dBi)	EIRP (dBm)	EIRP (mW)	Lmit (W)
27710	2310	22.09	1	23.09	203.7	0.25

LTE B30 10M 64QAM						
Channel	Frequency (MHz)	Conducted Power (dBm)	Gain (dBi)	EIRP (dBm)	EIRP (mW)	Lmit (W)
27710	2310	21.06	1	22.06	160.69	0.25

LTE B30 10M 256QAM						
Channel	Frequency (MHz)	Conducted Power (dBm)	Gain (dBi)	EIRP (dBm)	EIRP (mW)	Lmit (W)
27710	2310	17.91	1	18.91	77.8	0.25

LTE B71 5M QPSK						
Channel	Frequency (MHz)	Conducted Power (dBm)	Gain (dBi)	ERP (dBm)	ERP (mW)	Lmit (W)
133147	665.5	22.68	-1.5	19.03	79.98	3
133297	680.5	22.73	-1.5	19.08	80.91	3
133447	695.5	22.82	-1.5	19.17	82.6	3

LTE B71 5M 16QAM						
Channel	Frequency (MHz)	Conducted Power (dBm)	Gain (dBi)	ERP (dBm)	ERP (mW)	Lmit (W)
133147	665.5	21.85	-1.5	18.2	66.07	3
133297	680.5	21.88	-1.5	18.23	66.53	3
133447	695.5	21.93	-1.5	18.28	67.3	3

LTE B71 5M 64QAM						
Channel	Frequency (MHz)	Conducted Power (dBm)	Gain (dBi)	ERP (dBm)	ERP (mW)	Lmit (W)
133147	665.5	20.86	-1.5	17.21	52.6	3
133297	680.5	20.79	-1.5	17.14	51.76	3
133447	695.5	20.77	-1.5	17.12	51.52	3

LTE B71 5M 256QAM						
Channel	Frequency (MHz)	Conducted Power (dBm)	Gain (dBi)	ERP (dBm)	ERP (mW)	Lmit (W)
133147	665.5	17.7	-1.5	14.05	25.41	3
133297	680.5	17.69	-1.5	14.04	25.35	3
133447	695.5	17.74	-1.5	14.09	25.64	3

LTE B71 10M QPSK						
Channel	Frequency (MHz)	Conducted Power (dBm)	Gain (dBi)	ERP (dBm)	ERP (mW)	Lmit (W)
133172	668	22.75	-1.5	19.1	81.28	3
133297	680.5	22.76	-1.5	19.11	81.47	3
133422	693	22.78	-1.5	19.13	81.85	3

LTE B71 10M 16QAM						
Channel	Frequency (MHz)	Conducted Power (dBm)	Gain (dBi)	ERP (dBm)	ERP (mW)	Lmit (W)
133172	668	21.83	-1.5	18.18	65.77	3
133297	680.5	21.91	-1.5	18.26	66.99	3
133422	693	21.92	-1.5	18.27	67.14	3

LTE B71 10M 64QAM						
Channel	Frequency (MHz)	Conducted Power (dBm)	Gain (dBi)	ERP (dBm)	ERP (mW)	Lmit (W)
133172	668	20.85	-1.5	17.2	52.48	3
133297	680.5	20.79	-1.5	17.14	51.76	3
133422	693	20.78	-1.5	17.13	51.64	3

LTE B71 10M 256QAM						
Channel	Frequency (MHz)	Conducted Power (dBm)	Gain (dBi)	ERP (dBm)	ERP (mW)	Lmit (W)
133172	668	17.76	-1.5	14.11	25.76	3
133297	680.5	17.69	-1.5	14.04	25.35	3
133422	693	17.68	-1.5	14.03	25.29	3

LTE B71 15M QPSK						
Channel	Frequency (MHz)	Conducted Power (dBm)	Gain (dBi)	ERP (dBm)	ERP (mW)	Lmit (W)
133197	670.5	22.75	-1.5	19.1	81.28	3
133297	680.5	22.72	-1.5	19.07	80.72	3
133397	690.5	22.8	-1.5	19.15	82.22	3

LTE B71 15M 16QAM						
Channel	Frequency (MHz)	Conducted Power (dBm)	Gain (dBi)	ERP (dBm)	ERP (mW)	Lmit (W)
133197	670.5	21.83	-1.5	18.18	65.77	3
133297	680.5	21.88	-1.5	18.23	66.53	3
133397	690.5	21.94	-1.5	18.29	67.45	3

LTE B71 15M 64QAM						
Channel	Frequency (MHz)	Conducted Power (dBm)	Gain (dBi)	ERP (dBm)	ERP (mW)	Lmit (W)
133197	670.5	20.87	-1.5	17.22	52.72	3
133297	680.5	20.86	-1.5	17.21	52.6	3
133397	690.5	20.76	-1.5	17.11	51.4	3

LTE B71 15M 256QAM						
Channel	Frequency (MHz)	Conducted Power (dBm)	Gain (dBi)	ERP (dBm)	ERP (mW)	Lmit (W)
133197	670.5	17.75	-1.5	14.1	25.7	3
133297	680.5	17.7	-1.5	14.05	25.41	3
133397	690.5	17.69	-1.5	14.04	25.35	3

LTE B71 20M QPSK						
Channel	Frequency (MHz)	Conducted Power (dBm)	Gain (dBi)	ERP (dBm)	ERP (mW)	Lmit (W)
133222	673	22.78	-1.5	19.13	81.85	3
133322	683	22.81	-1.5	19.16	82.41	3
133372	688	22.91	-1.5	19.26	84.33	3

LTE B71 20M 16QAM						
Channel	Frequency (MHz)	Conducted Power (dBm)	Gain (dBi)	ERP (dBm)	ERP (mW)	Lmit (W)
133222	673	21.88	-1.5	18.23	66.53	3
133322	683	21.99	-1.5	18.34	68.23	3
133372	688	21.95	-1.5	18.3	67.61	3

LTE B71 20M 64QAM						
Channel	Frequency (MHz)	Conducted Power (dBm)	Gain (dBi)	ERP (dBm)	ERP (mW)	Lmit (W)
133222	673	20.96	-1.5	17.31	53.83	3
133322	683	20.88	-1.5	17.23	52.84	3
133372	688	20.89	-1.5	17.24	52.97	3

LTE B71 20M 256QAM						
Channel	Frequency (MHz)	Conducted Power (dBm)	Gain (dBi)	ERP (dBm)	ERP (mW)	Lmit (W)
133222	673	17.79	-1.5	14.14	25.94	3
133322	683	17.78	-1.5	14.13	25.88	3
133372	688	17.77	-1.5	14.12	25.82	3

3.2 FREQUENCY STABILITY MEASUREMENT

3.2.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT


The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

3.2.2 TEST PROCEDURE

- Device is placed at the oven room. The oven room could control the temperatures and humidity. Power warm up is at least 15 min and power applied should perform before recording frequency error.
- EUT is connected the external power supply to control the DC input power. The test voltage range is from minimum to maximum working voltage. Each step shall be record the frequency error rate.
- The temperature range step is 10 degrees in this test items. All temperature levels shall be hold the $\pm 0.5^{\circ}\text{C}$ during the measurement testing. The each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.

NOTE: The frequency error was recorded frequency error from the communication simulator.

3.2.3 TEST SETUP

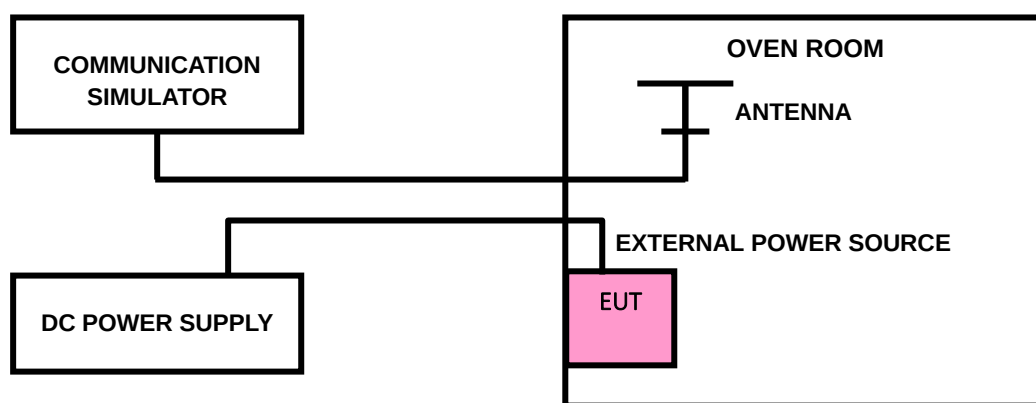



Test Report No.: W7L-P24050018RF06

3.2.4 TEST RESULTS

Please Refer to Appendix H.


Note: VL = Low voltage(3.6V); VN/NV = Normal voltage(3.7V); VH = High voltage(4.2V);
NT = Normal temperature (25°C)

3.3 OCCUPIED BANDWIDTH MEASUREMENT

3.3.1 LIMITS OF OCCUPIED BANDWIDTH MEASUREMENT

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 %of the total mean power of a given emission.

3.3.2 TEST SETUP

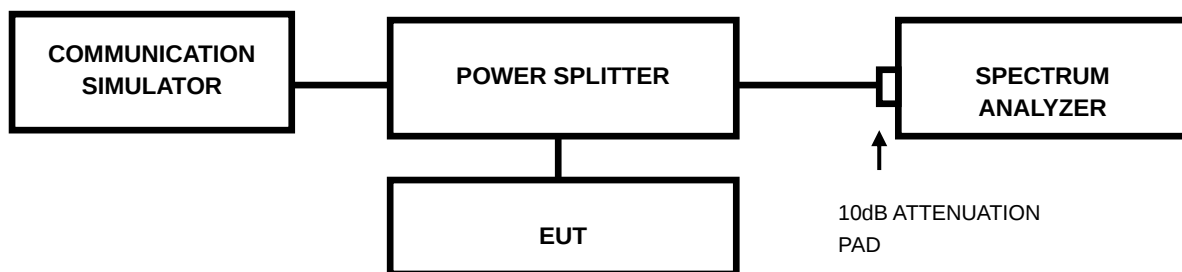

3.3.3 TEST PROCEDURES

- The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.
- Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth.



Test Report No.: W7L-P24050018RF06

3.3.4 TEST RESULTS

Please Refer to Appendix H.

3.4 BAND EDGE MEASUREMENT

3.4.1 LIMITS OF BAND EDGE MEASUREMENT

According to FCC 27.53(c) specified that For operations in the 746-758 MHz band and the 776-788 MHz band , the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log (P)$ dB. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed. In addition, the power of any unwanted emission in an 6.25kHz bandwidth for all frequencies between 763-775 MHz and 793-806 MHz shall be attenuated below the transmitter power, $P(\text{dBW})$, by at least $65 + 10 \log 10 P(P)$, dB, for mobile and portable equipment.

According to FCC 27.53(g) specified that For operations in the 600 MHz band and the 698-746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log (P)$ dB. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

According to FCC 27.53(m)(4) specified that For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less that $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees. For mobile digital stations, in the 1 megahertz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least two percent may be employed.

According to FCC 27.53(a)(4) specified that For mobile and portable stations operating in the 2305-2315 MHz and 2350-2360 MHz bands:


- (i) By a factor of not less than: $43 + 10 \log (P)$ dB on all frequencies between 2305 and 2320 MHz and on all frequencies between 2345 and 2360 MHz that are outside the licensed band(s) of operation, not less than $55 + 10 \log (P)$ dB on all frequencies between 2320 and 2324 MHz and on all frequencies between

2341 and 2345 MHz, not less than $61 + 10 \log (P)$ dB on all frequencies between 2324 and 2328 MHz and on all frequencies between 2337 and 2341 MHz, and not less than $67 + 10 \log (P)$ dB on all frequencies between 2328 and 2337 MHz;

(ii) By a factor of not less than $43 + 10 \log (P)$ dB on all frequencies between 2300 and 2305 MHz, $55 + 10 \log (P)$ dB on all frequencies between 2296 and 2300 MHz, $61 + 10 \log (P)$ dB on all frequencies between 2292 and 2296 MHz, $67 + 10 \log (P)$ dB on all frequencies between 2288 and 2292 MHz, and $70 + 10 \log (P)$ dB below 2288 MHz;

(iii) By a factor of not less than $43 + 10 \log (P)$ dB on all frequencies between 2360 and 2365 MHz, and not less than $70 + 10 \log (P)$ dB above 2365 MHz.

3.4.2 TEST SETUP

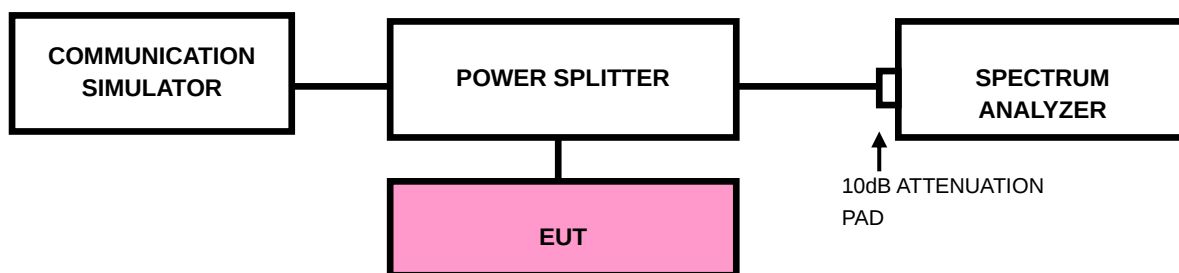

3.4.3 TEST PROCEDURES

- a) All measurements were done at low and high operational frequency range
- b) Connect the transmitter to the spectrum analyzer via coaxial cable while ensuring proper impedance matching.
- c) Tune the analyzer to the nominal center frequency of the emission bandwidth
(EBW)
- d) .Set the resolution bandwidth (RBW) $\geq 1\%$ EBW in the 1MHz band immediately outside and adjacent to the band edge.
- e) Beyond the 1MHz band from the band edge, RBW=1MHz was used.
- f) Set the video bandwidth (VBW) to $\geq 3 \times$ RBW.
- g) Select the average power (RMS) display detector.
- h) Set the number of measurement points to ≥ 1001 .
- i) Use auto-coupled sweep time.
- j) Perform the measurement over an interval of time when the transmission is continuous and at its maximum power level.
- k) The RF fundamental frequency should be excluded against the limit line in the operating frequency band and use RBW is 10KHz or 100KHz.
- l) Record the max trace plot into the test report.



Test Report No.: W7L-P24050018RF06

3.4.4 TEST RESULTS

Please Refer to Appendix H.

3.5 CONDUCTED SPURIOUS EMISSIONS

3.5.1 LIMITS OF CONDUCTED SPURIOUS EMISSIONS MEASUREMENT

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13dBm .

For: LTE Band7

The power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least $55 + 10 \log_{10}(P)$ dB. The limit of emission is equal to -25dBm .

For: LTE Band30

The power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least $70 + 10 \log_{10}(P)$ dB. The limit of emission is equal to -40dBm .

47 CFR 27.53(c)(2)

On any frequency outside the 776–788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log$ (P) dB;


47 CFR 27.53(f)

For operations in the 746–758 MHz, 775–788 MHz, and 805–806 MHz bands, emissions in the band 1559–1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth. For the purpose of equipment authorization, a transmitter shall be tested with an antenna that is representative of the type that will be used with the equipment in normal operation.

3.5.2 TEST PROCEDURE

- a. The EUT makes a phone call to the communication simulator. All measurements were done at low, middle and high operational frequency range.
- b. Measuring frequency range is from 9kHz up to a frequency including its 10th harmonic. 10dB attenuation pad is connected with spectrum. RBW=1MHz and VBW=3MHz is used for conducted emission measurement.

3.5.3 TEST SETUP

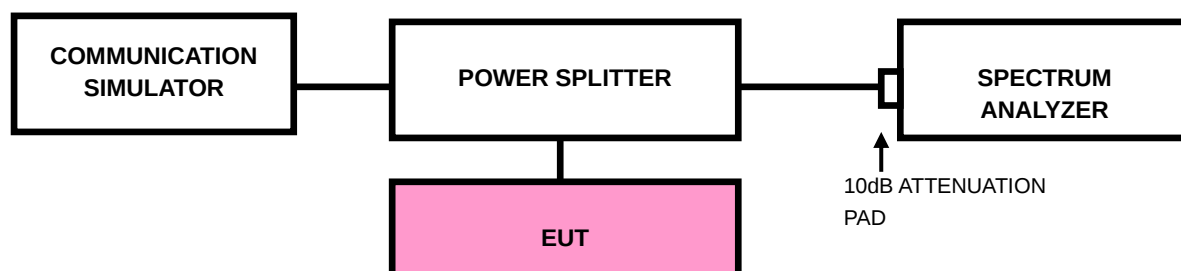

3.5.4 TEST RESULTS

NOTE : The 9K~30MHz amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required in the report.

Please Refer to Appendix H.

3.6 RADIATED EMISSION MEASUREMENT

3.6.1 LIMITS OF RADIATED EMISSION MEASUREMENT

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13dBm .

For: LTE Band7

The power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least $55 + 10 \log_{10}(P)$ dB. The limit of emission is equal to -25dBm .

For: LTE Band30

The power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least $70 + 10 \log_{10}(P)$ dB. The limit of emission is equal to -40dBm .

47 CFR 27.53(c)(2)

On any frequency outside the 776–788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log(P)$ dB;

47 CFR 27.53(f)

For operations in the 746–758 MHz, 775–788 MHz, and 805–806 MHz bands, emissions in the band 1559–1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth. For the purpose of equipment authorization, a transmitter shall be tested with an antenna that is representative of the type that will be used with the equipment in normal operation..

3.6.2 TEST PROCEDURES

- a. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The “Read Value” is the spectrum reading the maximum power value.
- b. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation



Test Report No.: W7L-P24050018RF06

power. Adjust output power level of S.G to get a Value of spectrum reading equal to “Read Value “ of step a. Record the power level of S.G.

- c. EIRP = Output power level of S.G – TX cable loss + Antenna gain of substitution horn.
- d. E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole,
 $E.R.P \text{ power} = E.I.R.P \text{ power} - 2.15\text{dBi}$.


NOTE: The resolution bandwidth of spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz.

3.6.3 DEVIATION FROM TEST STANDARD


No deviation

3.6.4 TEST SETUP


< Frequency Range below 30MHz >

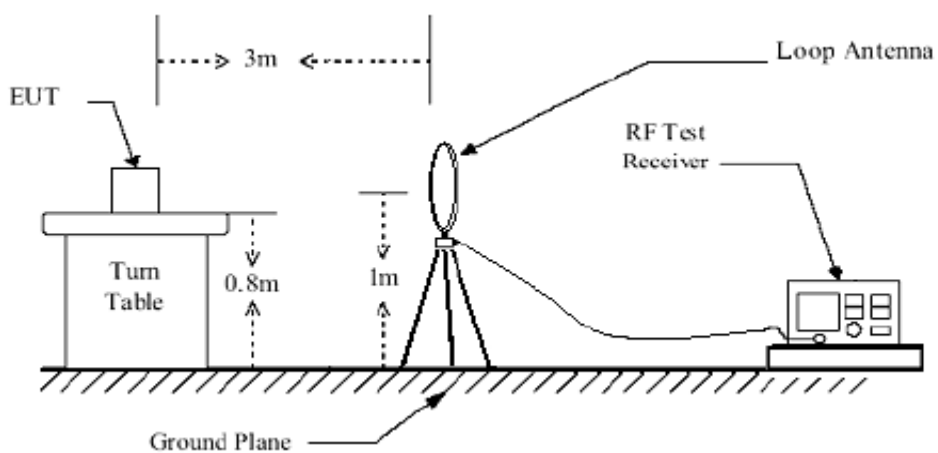

< Frequency Range 30MHz~1GHz >

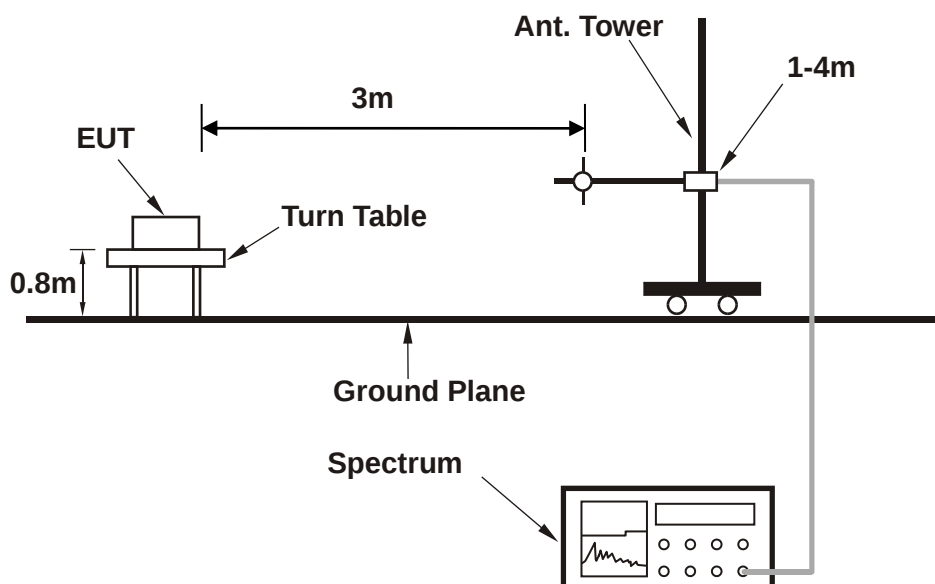

<Frequency Range above 1GHz>

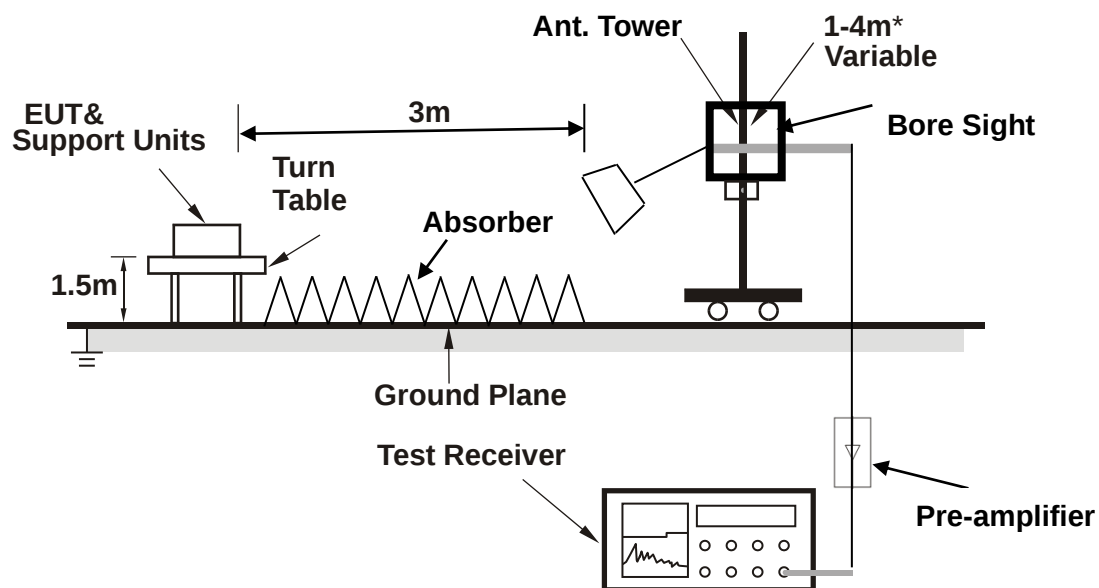

Note: Above 1G is a directional antenna depends on the EUT height and the antenna 3dB beamwidth both, refer to section 7.3 of CISPR 16-2-3.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

3.6.5 TEST RESULTS

NOTE : The 9K~30MHz amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required in the report.

BELOW 1GHz WORST-CASE DATA


30 MHz – 1GHz data:

LTE Band 30

CHANNEL BANDWIDTH: 10MHz / QPSK


MODE	TX channel 27710	FREQUENCY RANGE	Below 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	43.000	-65.41	-40.00	25.41	3.20	H	132.2	1.00
1	64.450	-68.32	-40.00	28.32	1.63	H	231.5	1.00
1	108.600	-69.29	-40.00	29.29	-0.90	H	126.2	2.00
1	186.450	-73.94	-40.00	33.94	-1.46	H	126.2	2.00
1	314.500	-69.59	-40.00	29.59	5.70	H	126.2	2.00
2	475.896	-67.73	-40.00	27.73	6.27	H	2.2	2.00

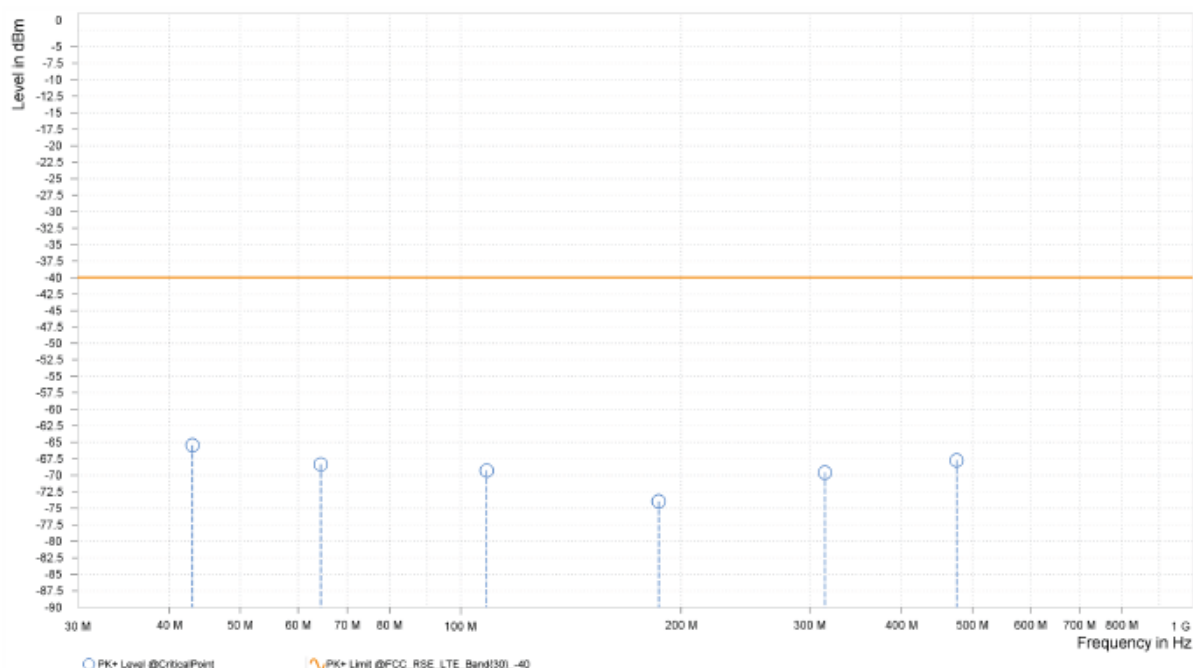

MODE	TX channel 27710	FREQUENCY RANGE	Below 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	47.800	-65.29	-40.00	25.29	4.54	V	133.3	1.00
1	98.600	-67.52	-40.00	27.52	5.05	V	24.7	2.00
1	187.150	-75.57	-40.00	35.57	-0.34	V	5	1.00
1	254.150	-74.54	-40.00	34.54	2.96	V	255.3	1.00
1	337.250	-71.25	-40.00	31.25	5.58	V	226.7	2.00
2	500.096	-66.95	-40.00	26.95	6.75	V	76.1	2.00

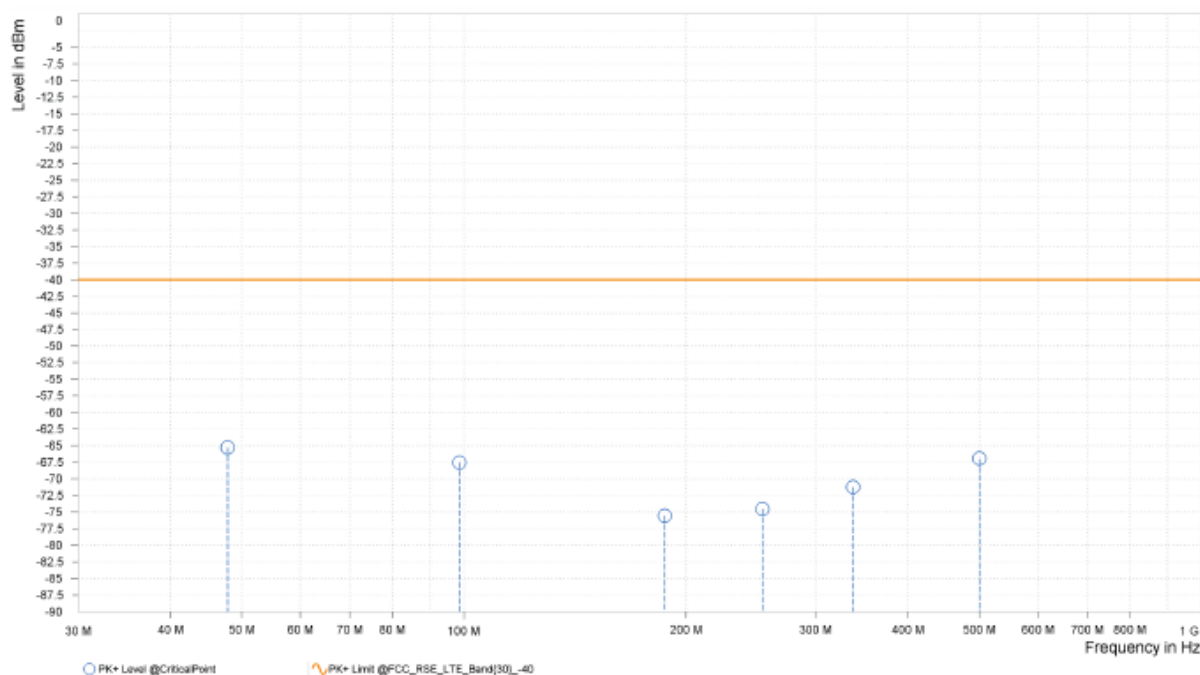



**BUREAU
VERITAS**

Test Report No.: W7L-P24050018RF06

ABOVE 1GHz


Note: For higher frequency, the emission is too low to be detected.

LTE Band 7

CHANNEL BANDWIDTH: 5MHz / QPSK


MODE	TX channel 21100	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	5,065.500	-50.81	-25.00	25.81	23.37	H	324	1.00
5	7,598.250	-44.90	-25.00	19.90	26.93	H	237.6	2.00

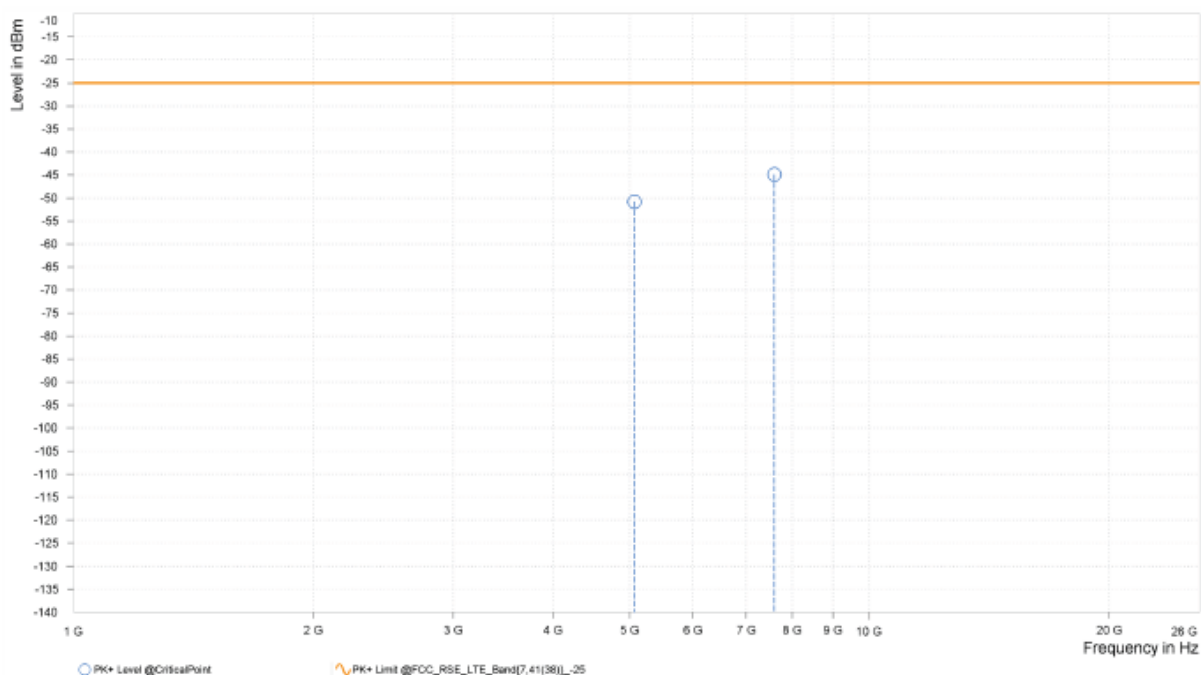

MODE	TX channel 21100	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			


Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	5,065.500	-49.64	-25.00	24.64	23.82	V	227.8	1.00
5	7,598.250	-46.02	-25.00	21.02	26.72	V	330.3	1.00

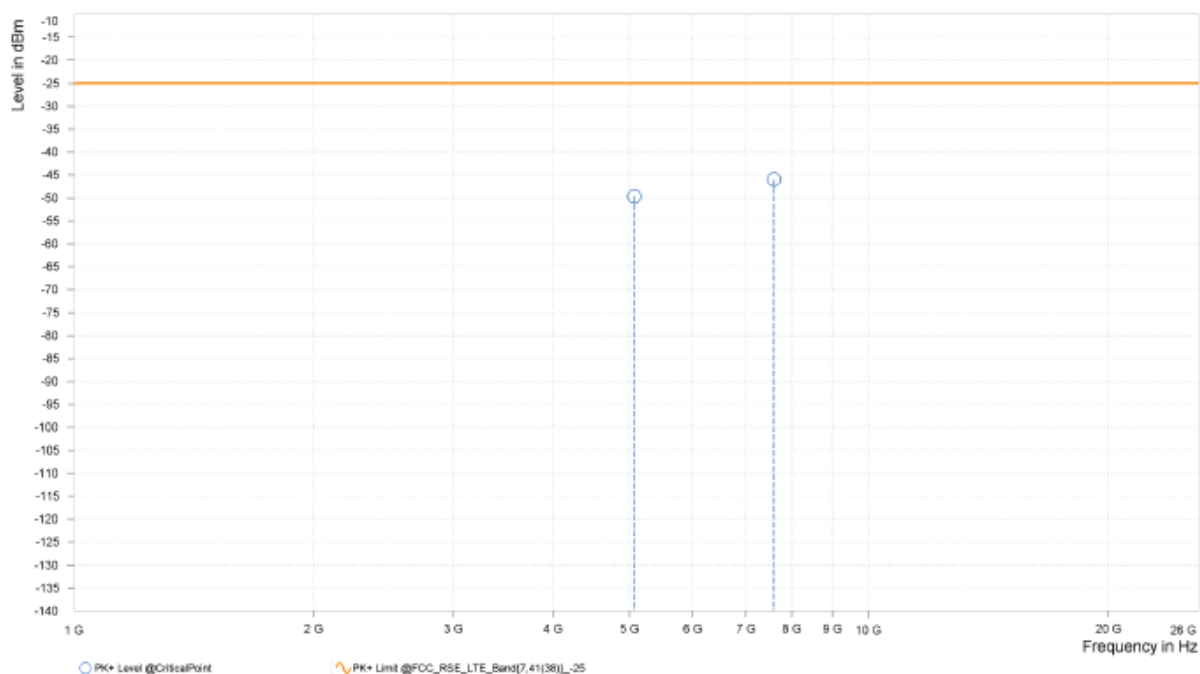

CHANNEL BANDWIDTH: 10MHz / QPSK
CH 20800


MODE	TX channel 20800	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	5,001.000	-47.53	-25.00	22.53	23.40	H	359	1.00
5	7,501.500	-45.13	-25.00	20.13	27.03	H	21	2.00

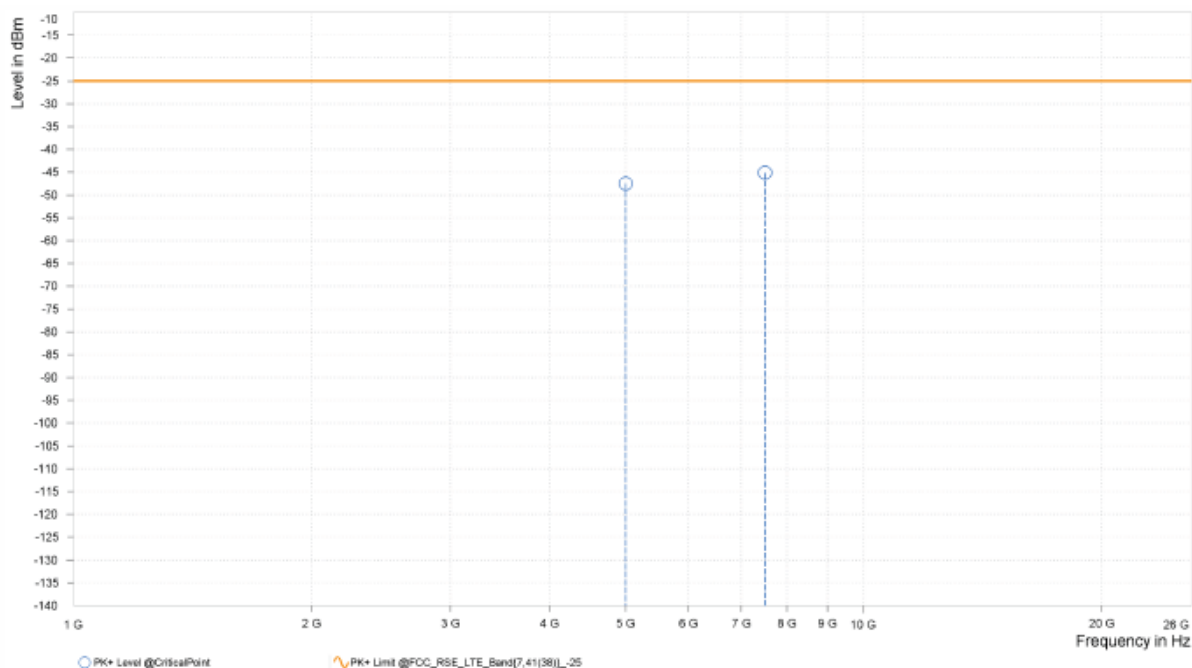

MODE	TX channel 20800	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			


Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	5,001.000	-46.44	-25.00	21.44	23.61	V	11.1	2.00
5	7,501.500	-44.77	-25.00	19.77	27.00	V	359	2.00

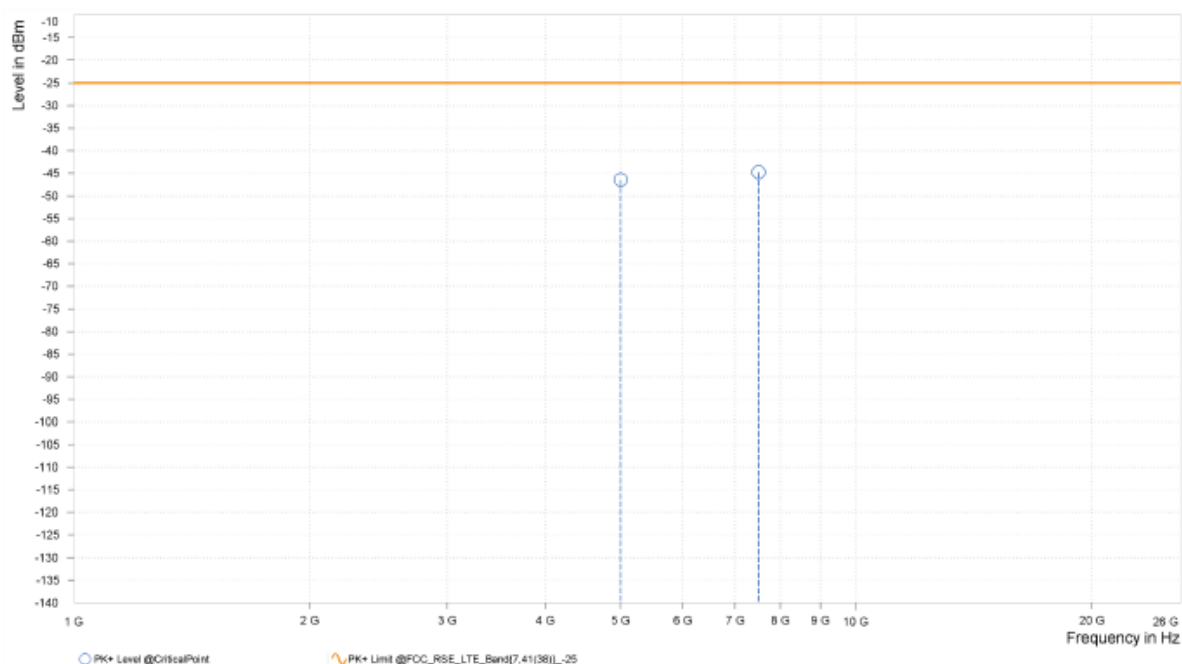

CH 21100


MODE	TX channel 21100	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	5,061.000	-49.93	-25.00	24.93	23.43	H	38.8	2.00
5	7,591.500	-45.84	-25.00	20.84	26.92	H	78.5	2.00

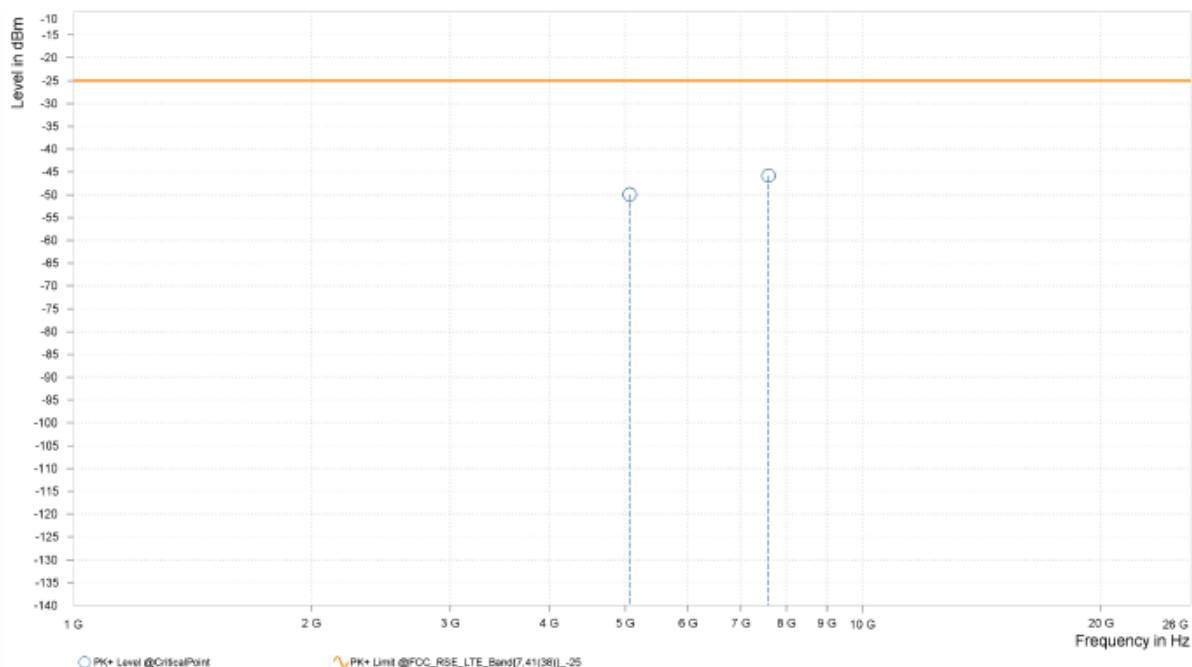

MODE	TX channel 21100	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	5,061.000	-48.15	-25.00	23.15	23.87	V	92.6	1.00
5	7,591.500	-43.82	-25.00	18.82	26.70	V	75.6	2.00

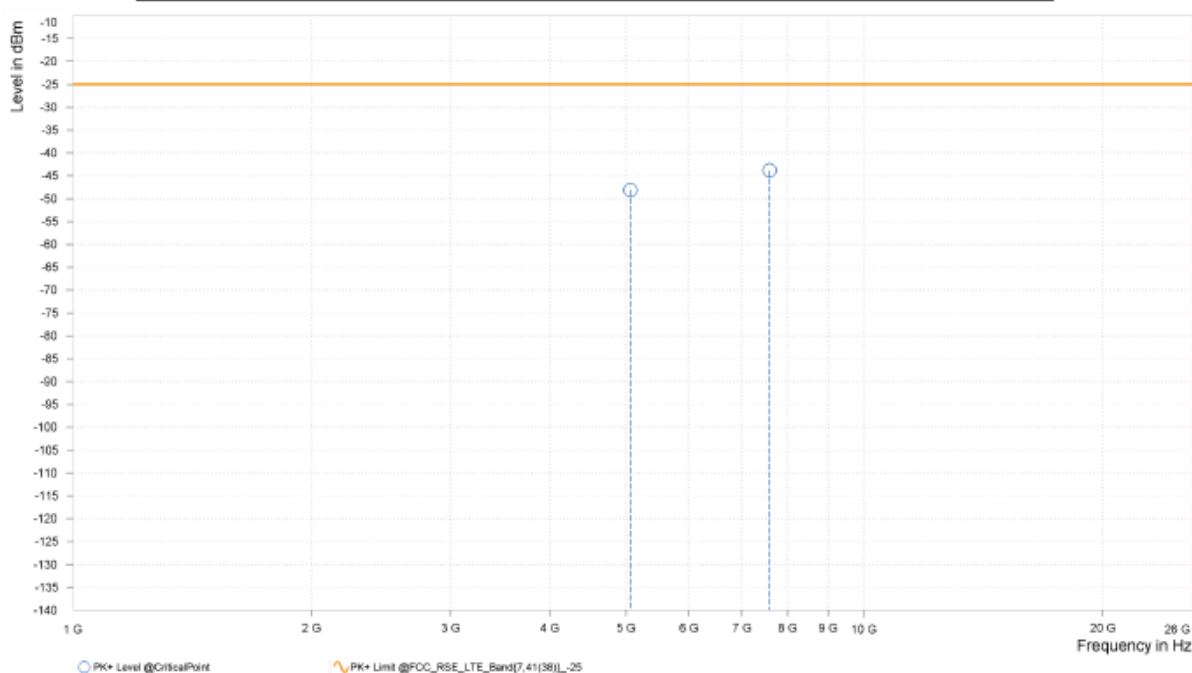




BUREAU
VERITAS

Test Report No.: W7L-P24050018RF06

CH 21400


MODE	TX channel 21400	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	5,121.000	-51.52	-25.00	26.52	23.01	H	0.9	2.00
5	7,681.500	-45.97	-25.00	20.97	26.97	H	246.2	1.00

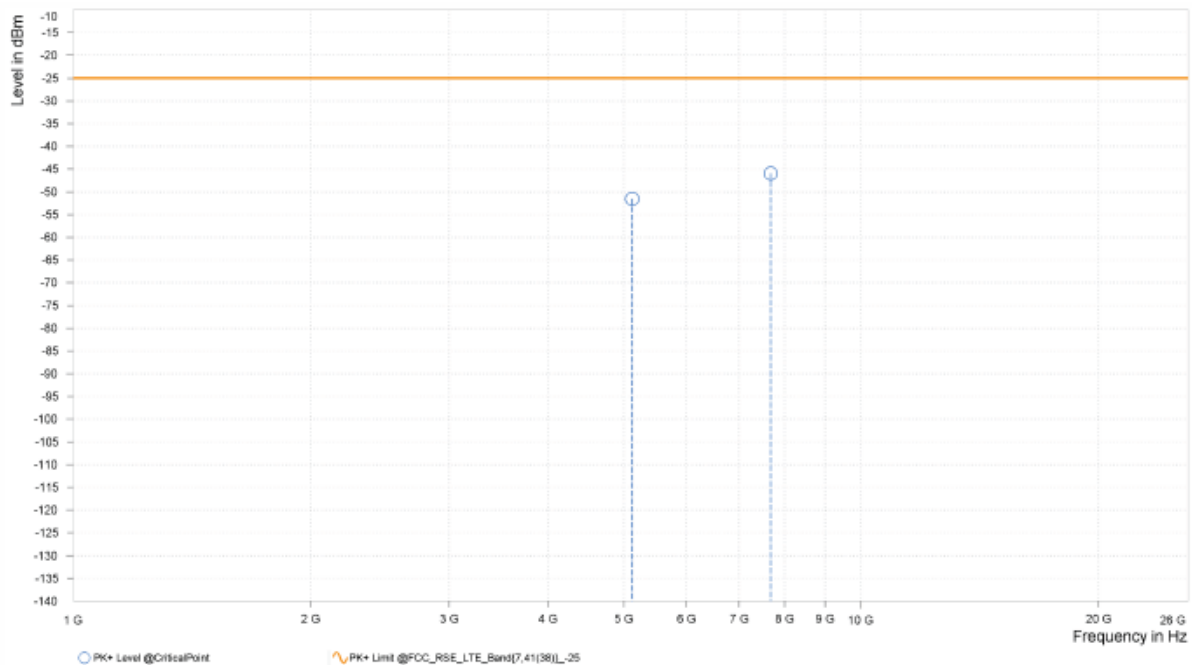

MODE	TX channel 21400	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			


Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	5,121.000	-49.86	-25.00	24.86	23.41	V	359	2.00
5	7,681.500	-46.21	-25.00	21.21	26.79	V	0.9	2.00

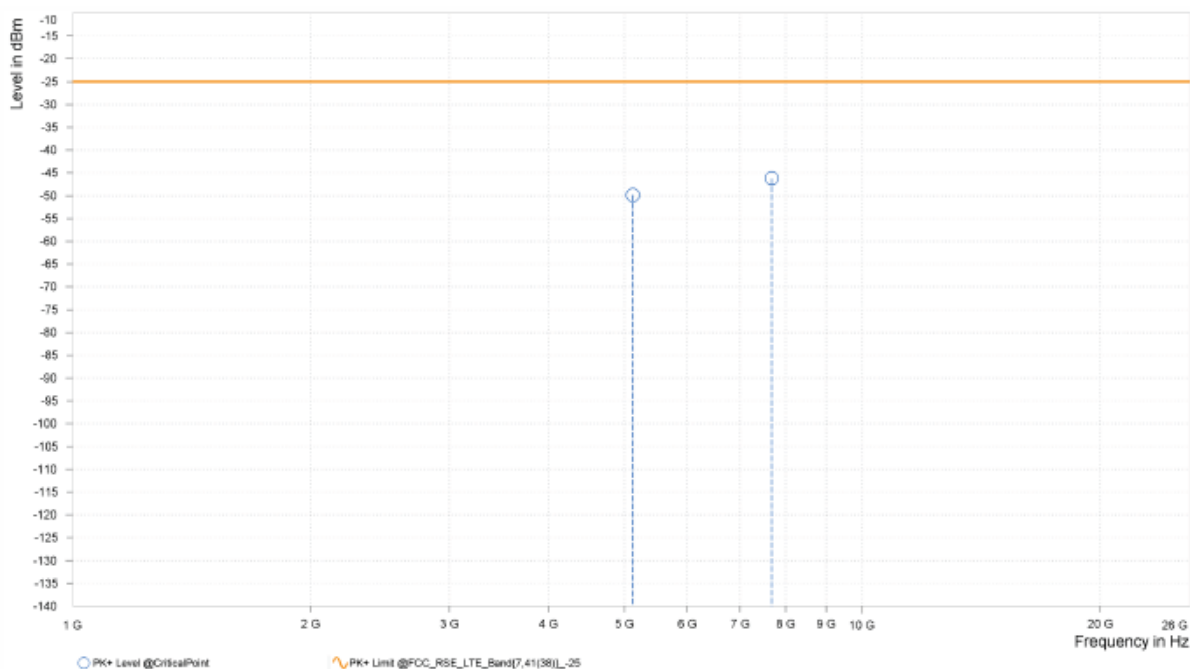

CHANNEL BANDWIDTH: 15MHz / QPSK


MODE	TX channel 21100	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	5,056.500	-49.24	-25.00	24.24	23.50	H	266	2.00
5	7,584.750	-45.57	-25.00	20.57	26.92	H	71.4	2.00

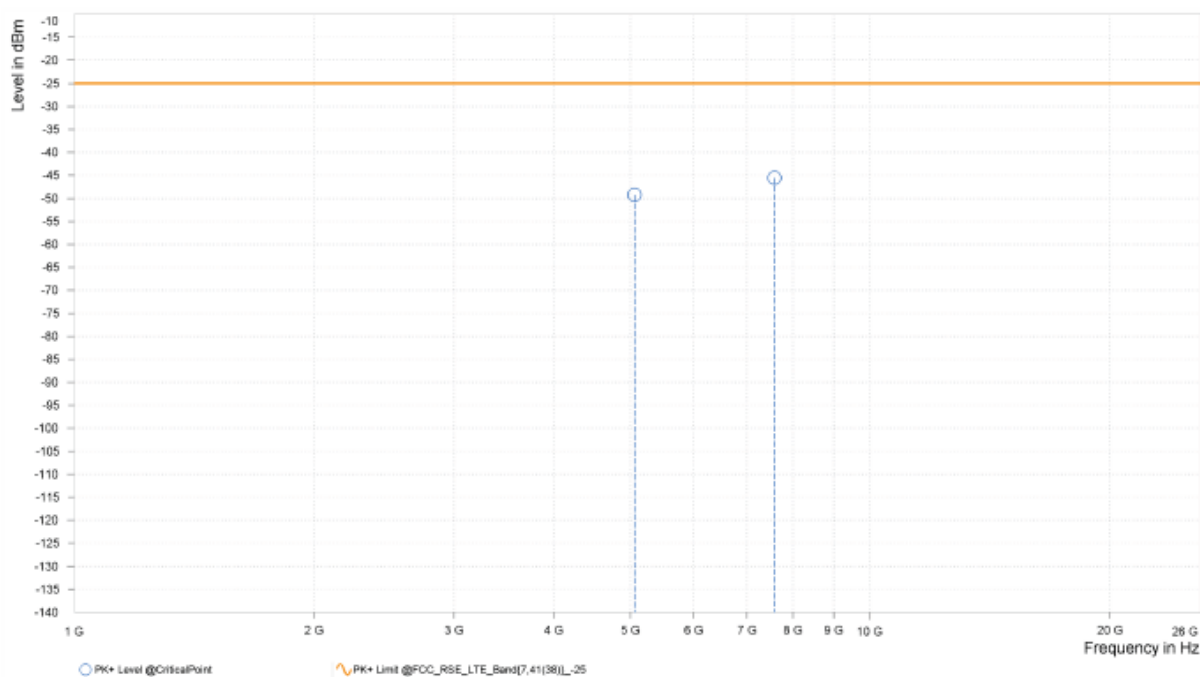

MODE	TX channel 21100	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			


Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	5,056.500	-48.40	-25.00	23.40	23.92	V	1	1.00
5	7,584.750	-45.11	-25.00	20.11	26.70	V	188.1	1.00

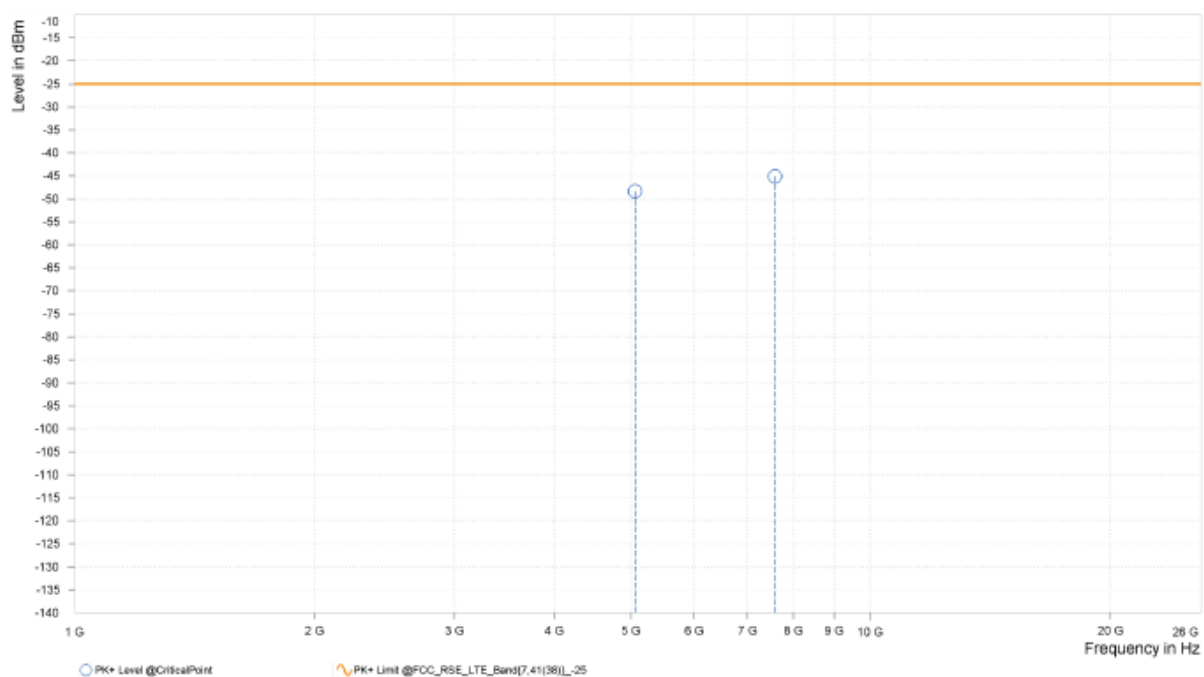

CHANNEL BANDWIDTH: 20MHz / QPSK


MODE	TX channel 21100	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	5,052.000	-48.76	-25.00	23.76	23.57	H	178.2	2.00
5	7,578.000	-45.27	-25.00	20.27	26.95	H	359.1	1.00

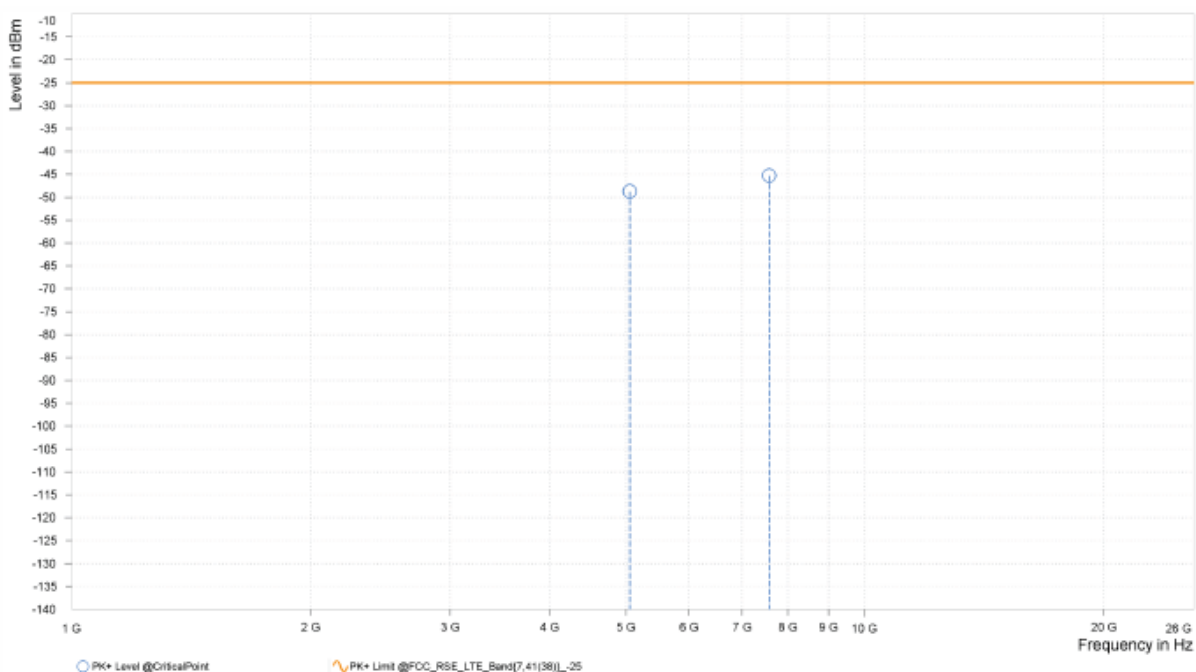

MODE	TX channel 21100	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	5,052.000	-48.33	-25.00	23.33	23.98	V	186	1.00
5	7,578.000	-45.96	-25.00	20.96	26.74	V	356.6	1.00

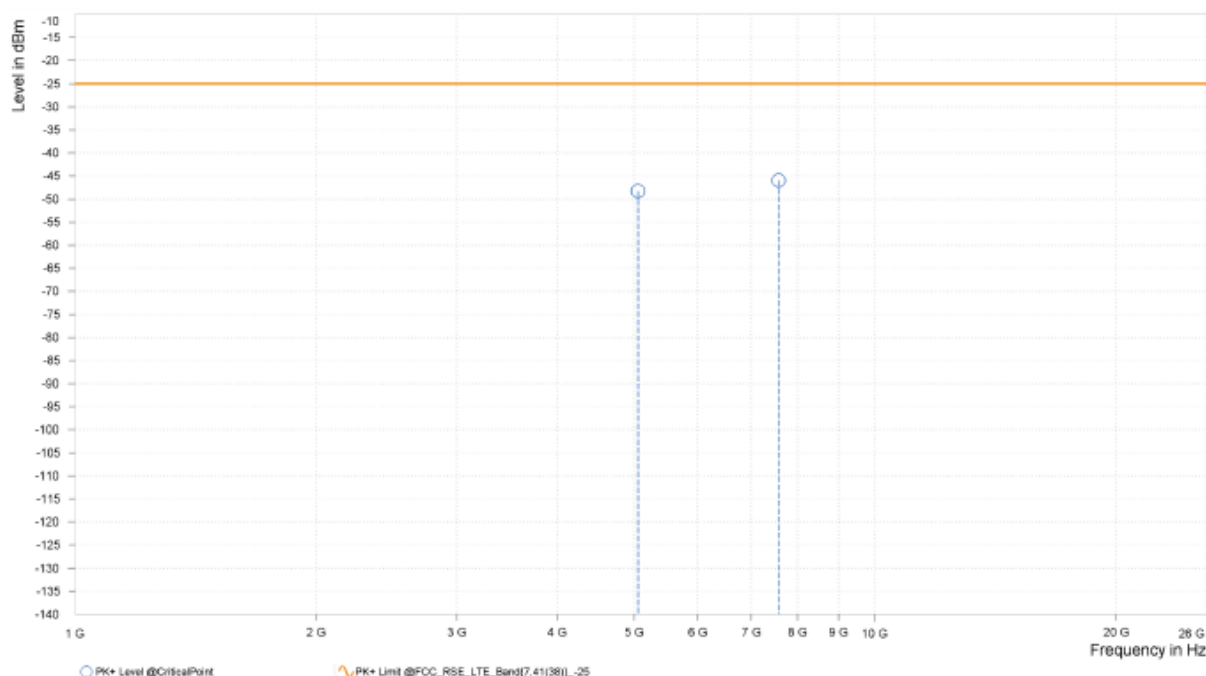


LTE BAND 12

CHANNEL BANDWIDTH: 1.4MHz / QPSK


MODE	TX channel 23095	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,413.740	-56.73	-13.00	43.73	13.01	H	326	2.00
2	2,120.610	-52.90	-13.00	39.90	18.12	H	39.4	2.00

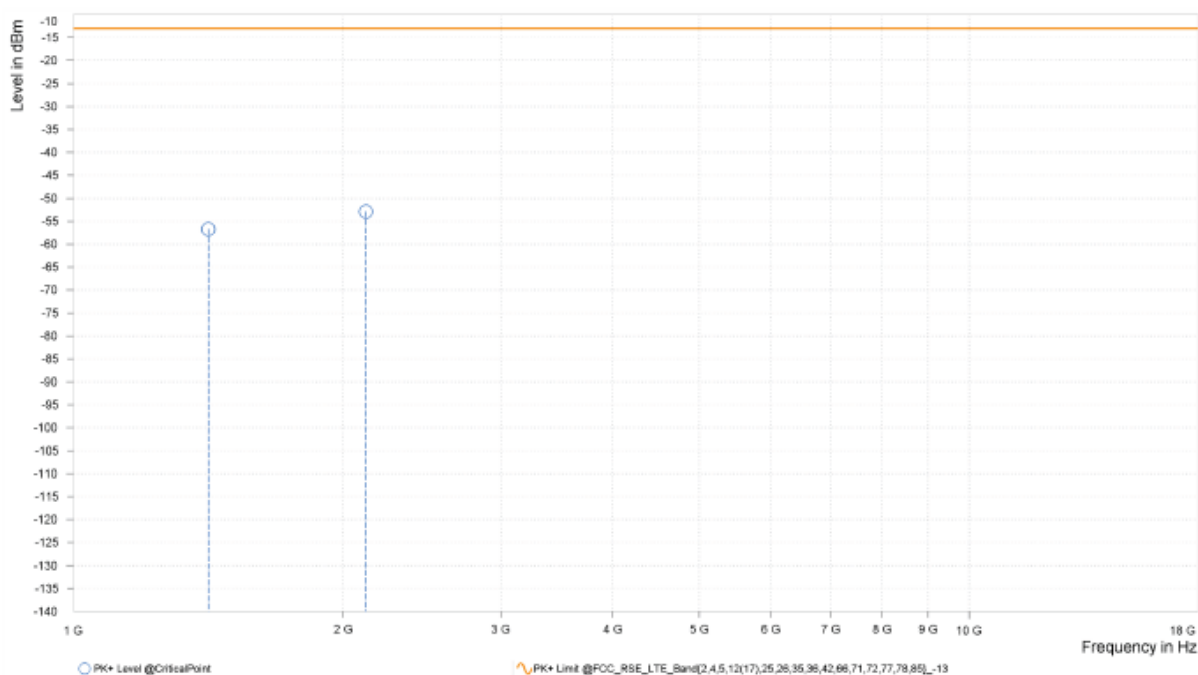

MODE	TX channel 23095	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			


Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,413.740	-56.89	-13.00	43.89	12.62	V	267.4	1.00
2	2,120.610	-52.82	-13.00	39.82	18.71	V	359	2.00

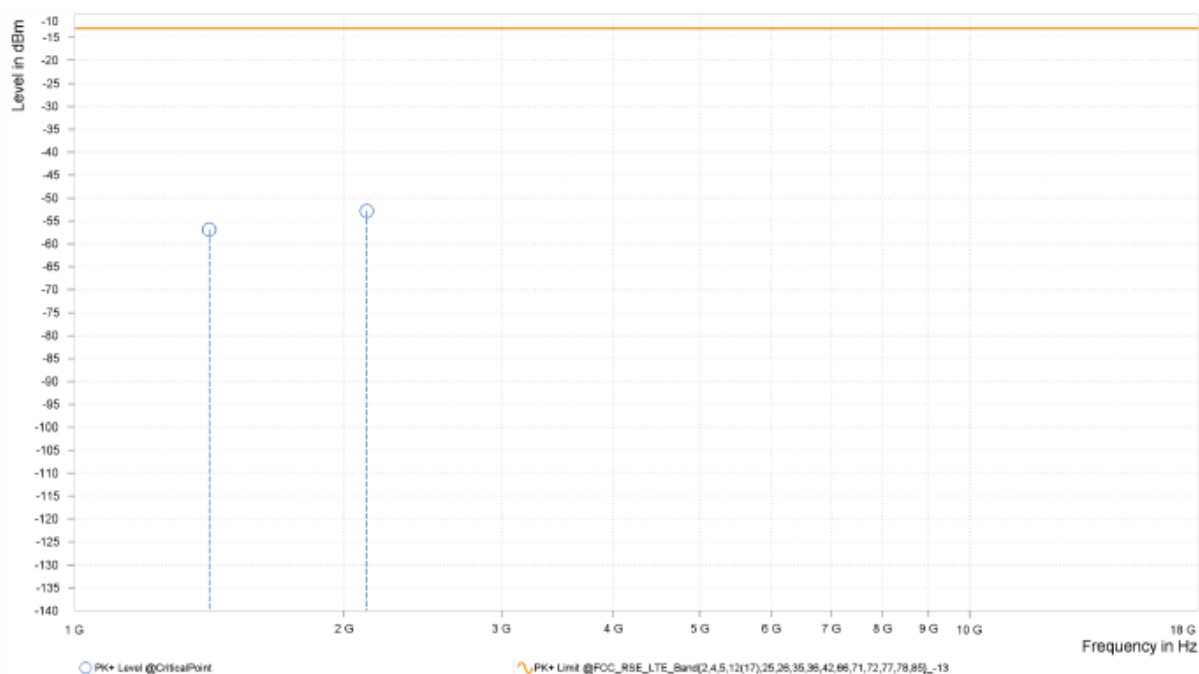

CHANNEL BANDWIDTH: 3MHz / QPSK


MODE	TX channel 23095	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,412.300	-56.71	-13.00	43.71	12.98	H	224.2	1.00
2	2,118.450	-53.07	-13.00	40.07	18.15	H	169	2.00

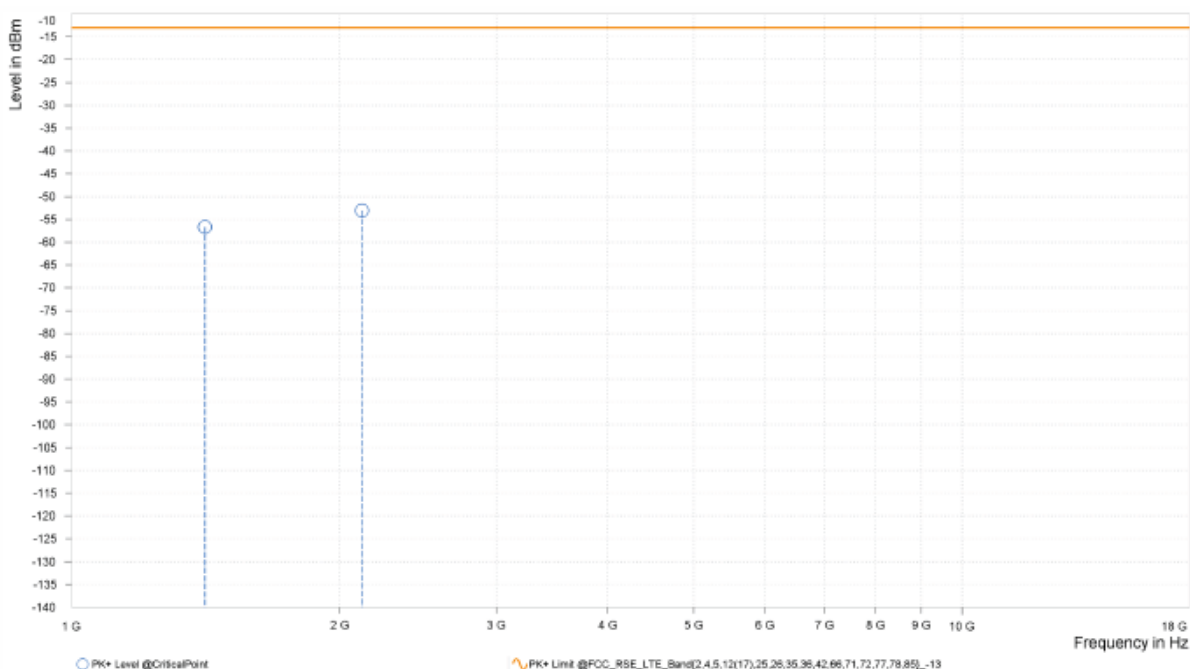

MODE	TX channel 23095	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			


Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,412.300	-56.84	-13.00	43.84	12.65	V	229.1	1.00
2	2,118.450	-53.70	-13.00	40.70	18.76	V	359	1.00

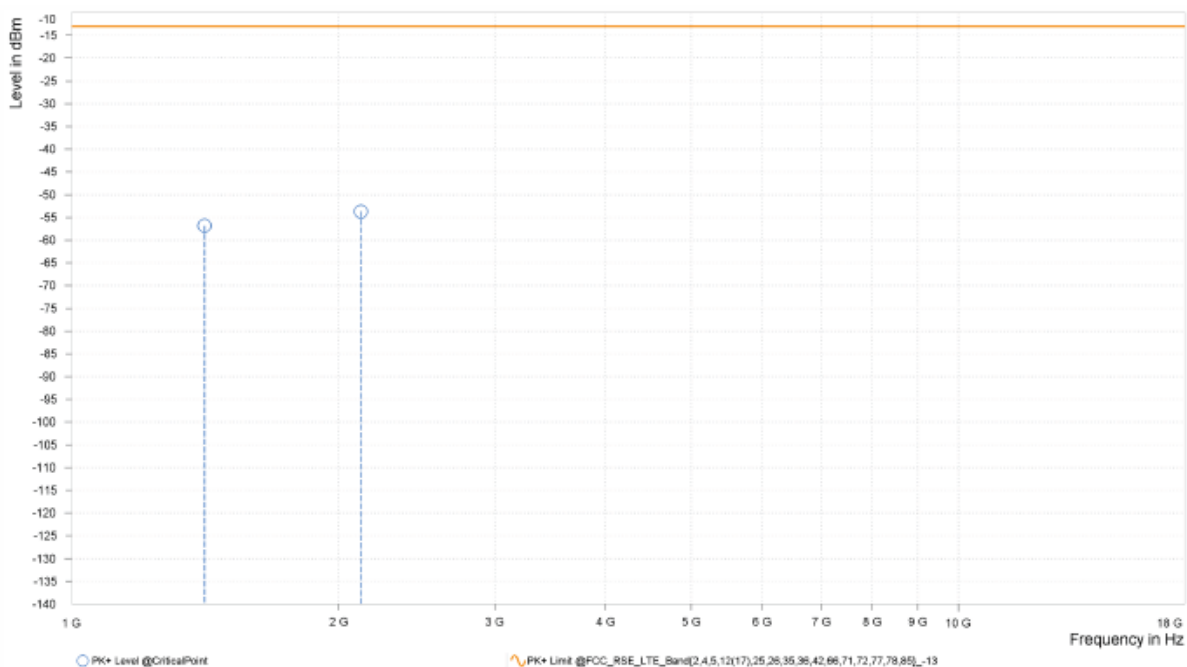

CHANNEL BANDWIDTH: 5MHz / QPSK


MODE	TX channel 23095	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,410.500	-56.37	-13.00	43.37	12.90	H	219.3	1.00
2	2,115.750	-53.89	-13.00	40.89	18.19	H	45.9	2.00

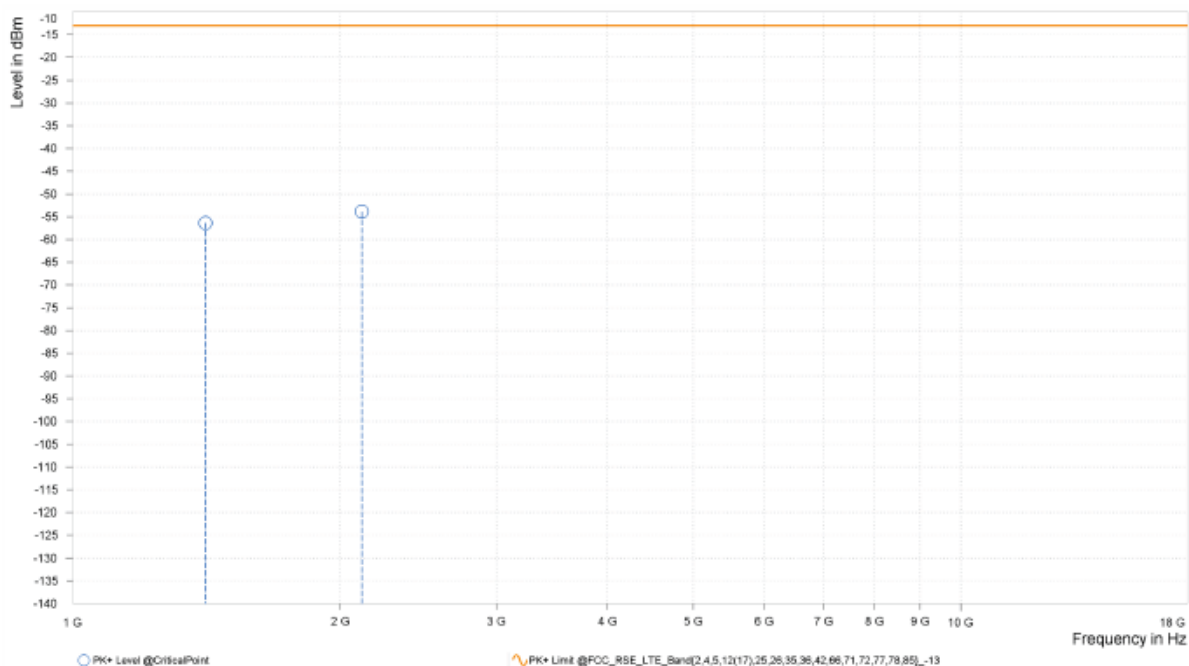

MODE	TX channel 23095	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,410.500	-57.26	-13.00	44.26	12.72	V	33.9	1.00
2	2,115.750	-52.50	-13.00	39.50	18.83	V	90.4	2.00

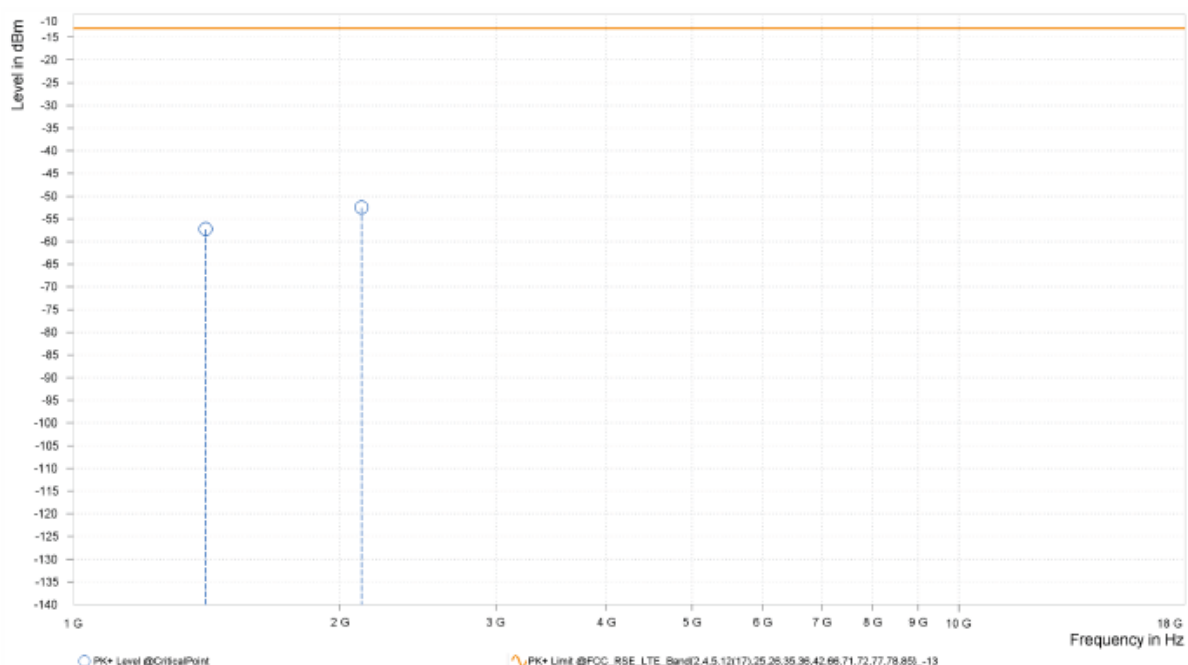


CHANNEL BANDWIDTH: 10MHz / QPSK

CH 23060


MODE	TX channel 23060	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,399.000	-56.13	-13.00	43.13	12.46	H	37.3	2.00
2	2,098.500	-52.69	-13.00	39.69	17.77	H	37.3	2.00

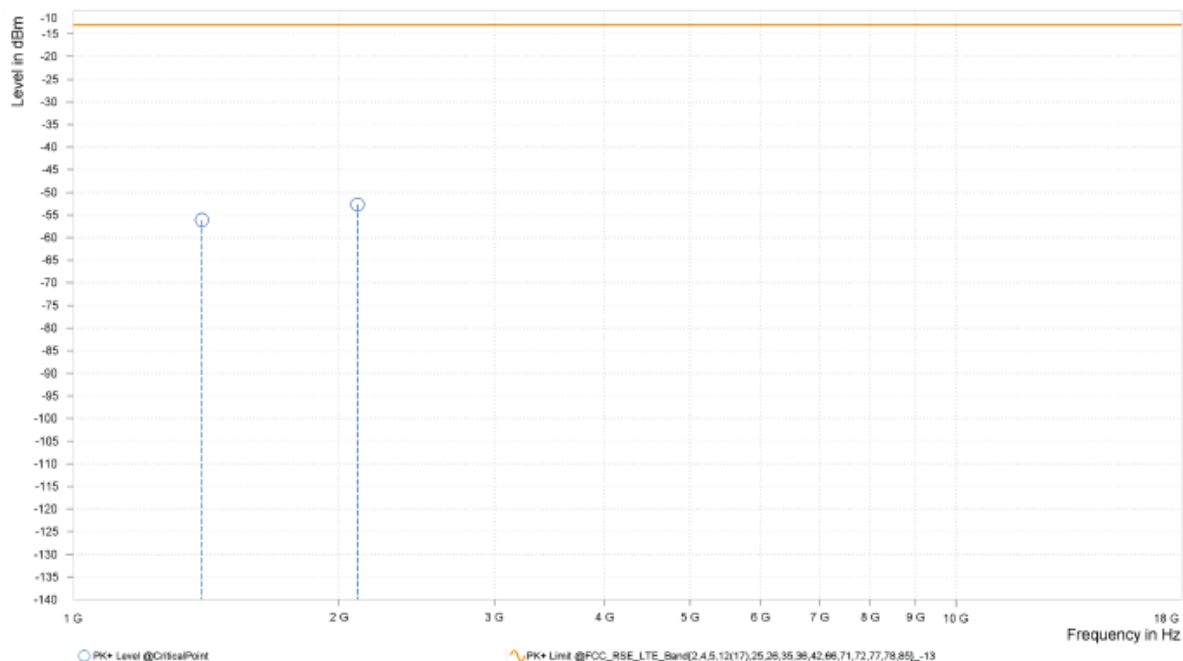

MODE	TX channel 23060	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			


Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,399.000	-56.53	-13.00	43.53	12.88	V	359.1	1.00
2	2,098.500	-52.32	-13.00	39.32	18.78	V	178.9	1.00

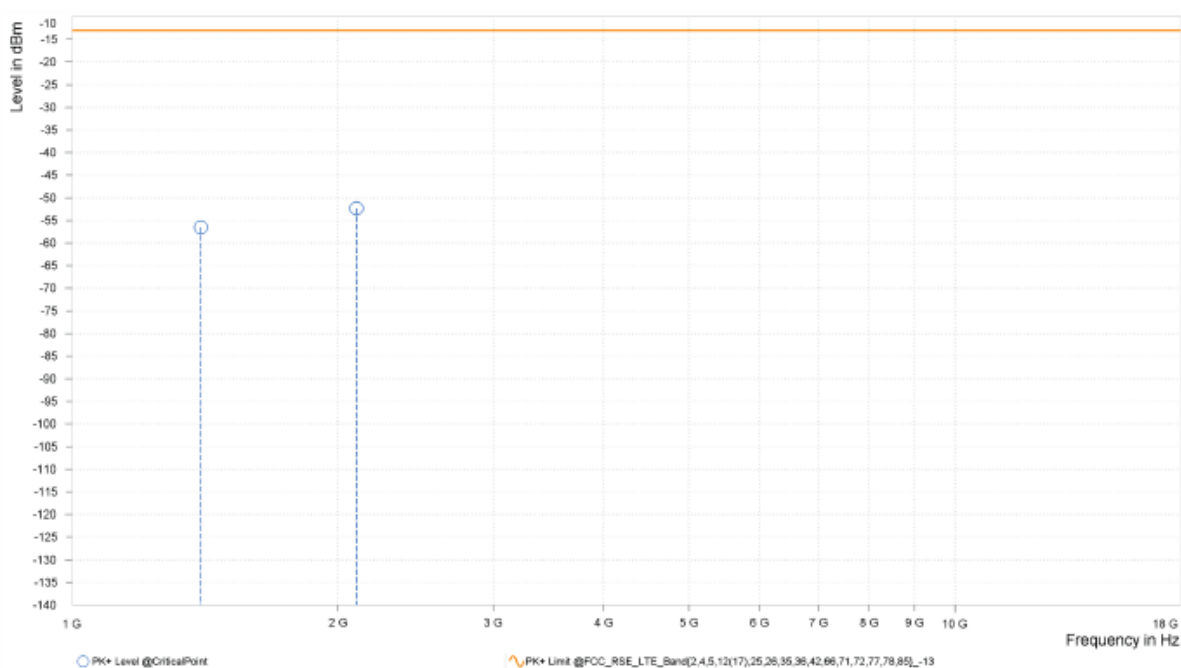

CH 23095


MODE	TX channel 23095	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,406.500	-50.89	-13.00	37.89	12.73	H	266	1.00
2	2,109.000	-52.42	-13.00	39.42	18.25	H	33.9	1.00

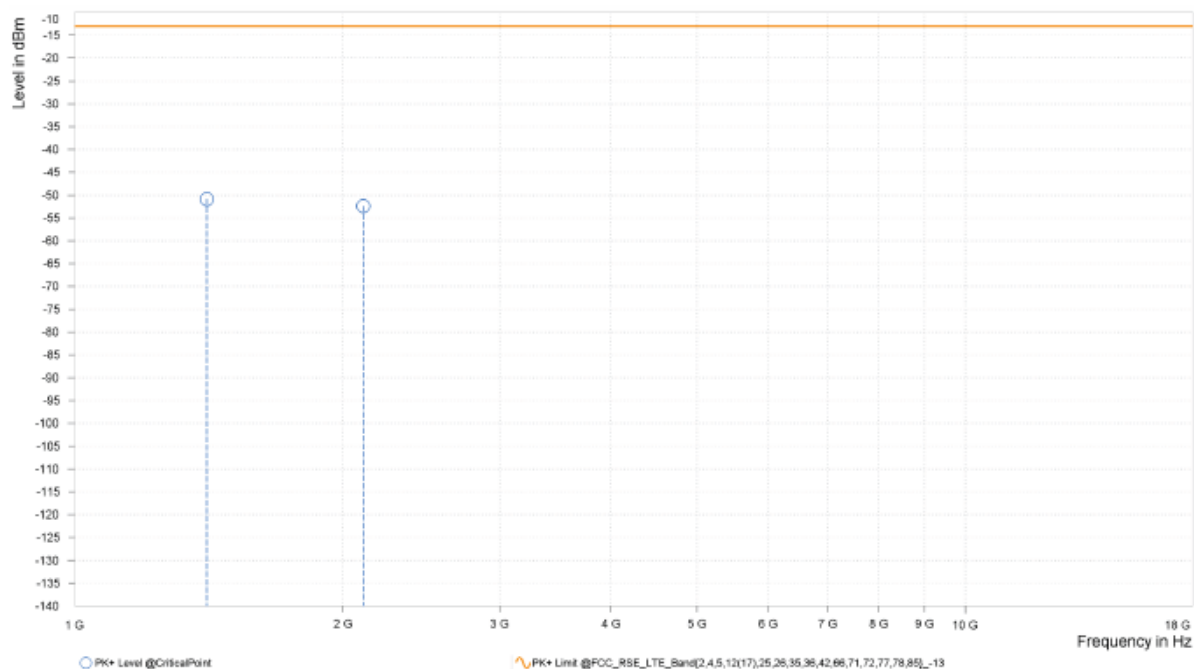

MODE	TX channel 23095	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			


Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,406.000	-57.28	-13.00	44.28	12.84	V	359.1	1.00
2	2,109.000	-52.57	-13.00	39.57	18.95	V	265.9	1.00

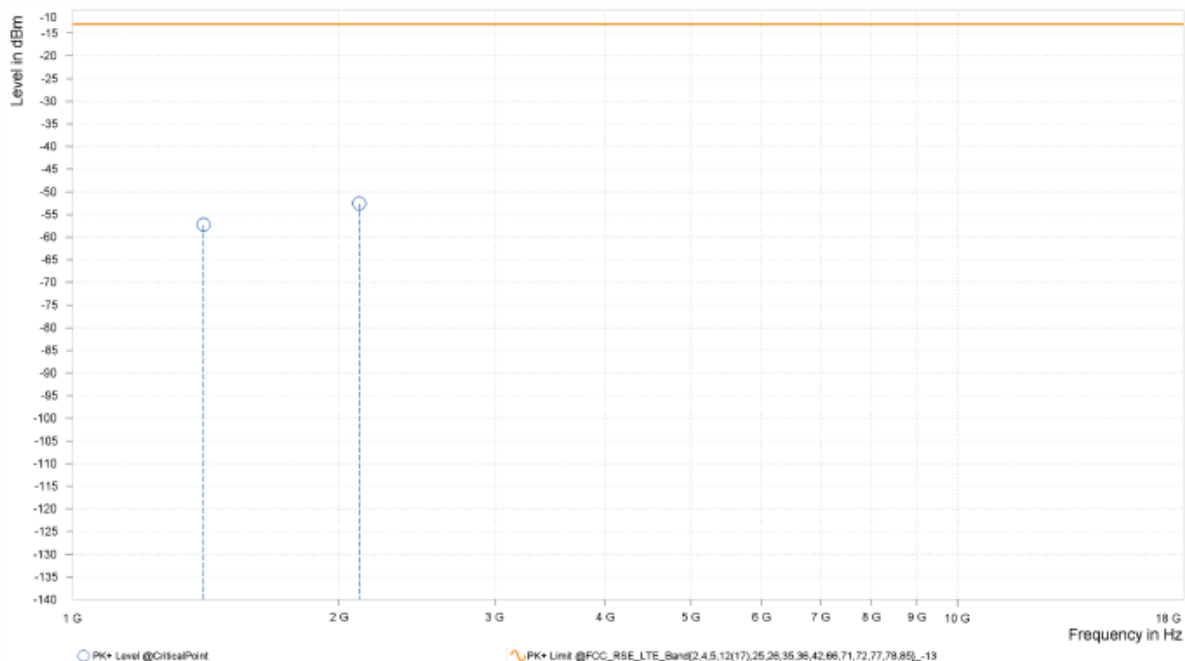

CH 23130


MODE	TX channel 23130	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,413.000	-55.96	-13.00	42.96	12.99	H	170.5	1.00
2	2,119.500	-53.14	-13.00	40.14	18.14	H	1	1.00

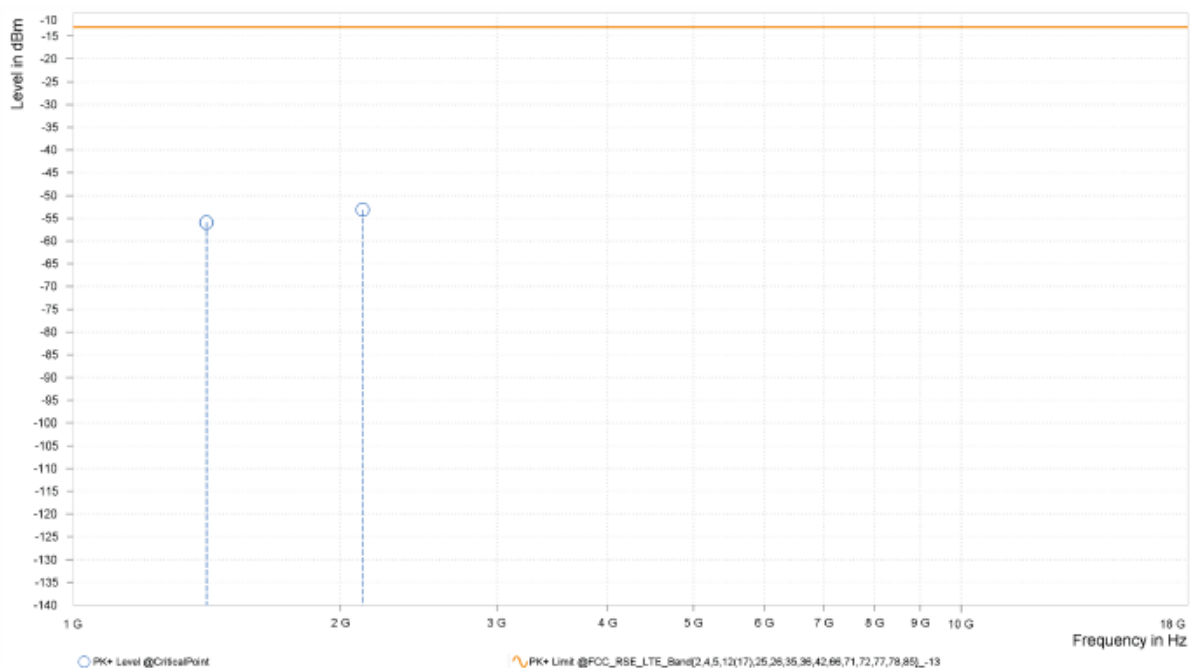

MODE	TX channel 23130	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,413.000	-56.34	-13.00	43.34	12.64	V	341.7	1.00
2	2,119.500	-51.48	-13.00	38.48	18.74	V	38	2.00

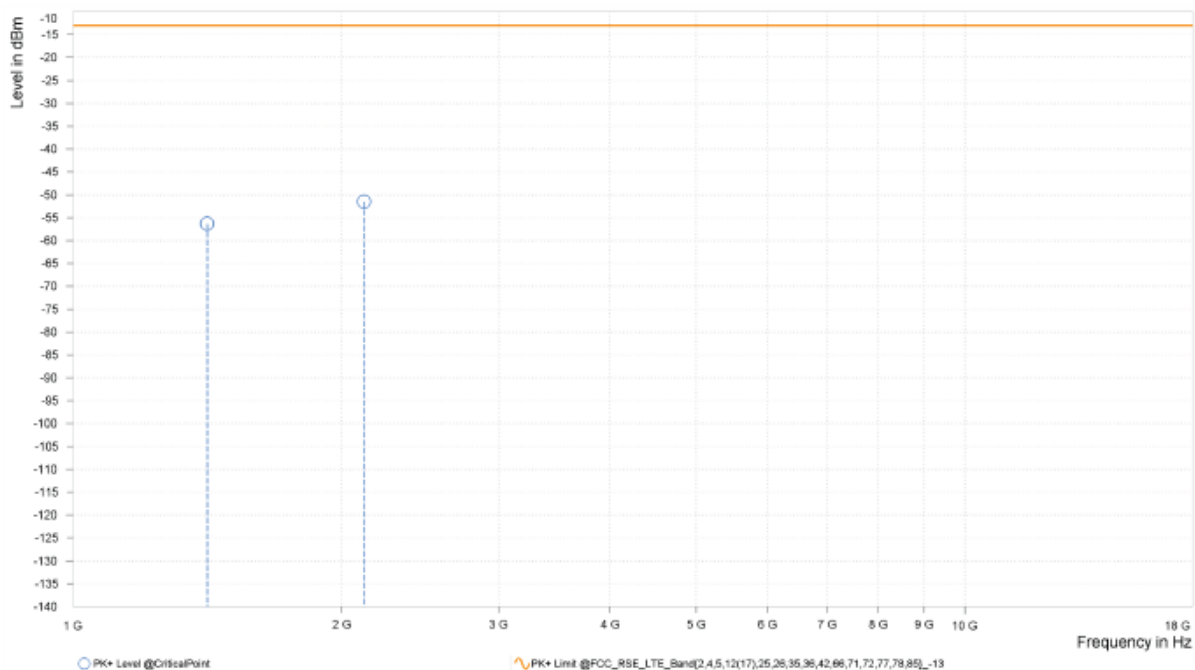


LTE B13

CHANNEL BANDWIDTH: 5MHz / QPSK

CH23205


CH1205			
MODE	TX channel 23205	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,554.500	-58.32	-13.00	45.32	12.09	H	275.2	1.00
3	2,331.750	-52.53	-13.00	39.53	18.55	H	229.8	1.00

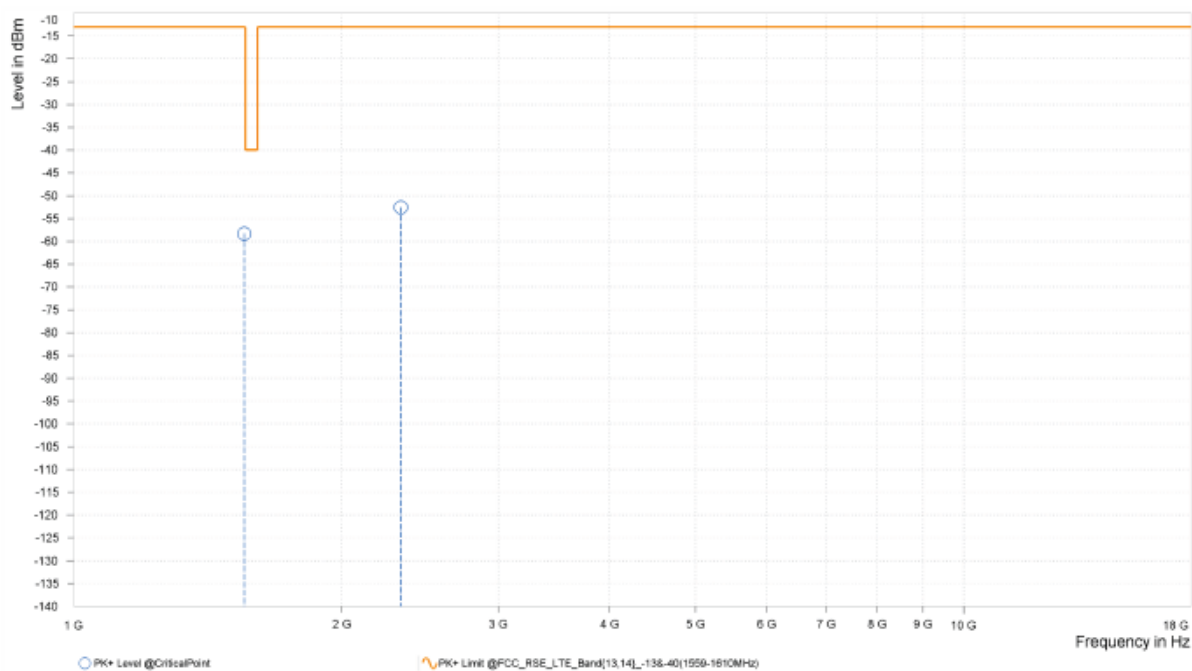

MODE	TX channel 23205	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,554.500	-57.62	-13.00	44.62	13.43	V	326.1	2.00
3	2,331.750	-51.51	-13.00	38.51	19.17	V	1	1.00

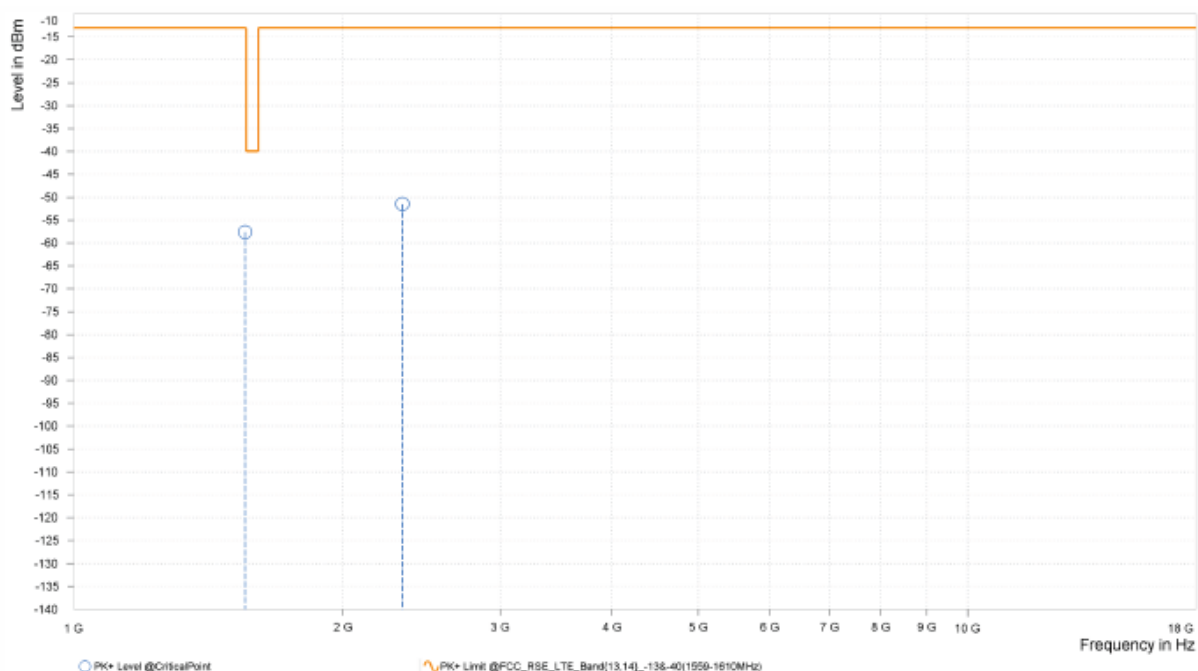




BUREAU
VERITAS

Test Report No.: W7L-P24050018RF06

CH 23230


MODE	TX channel 23230	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,559.500	-57.53	-40.00	17.53	12.10	H	168.3	1.00
3	2,339.250	-51.50	-13.00	38.50	18.80	H	184.5	2.00

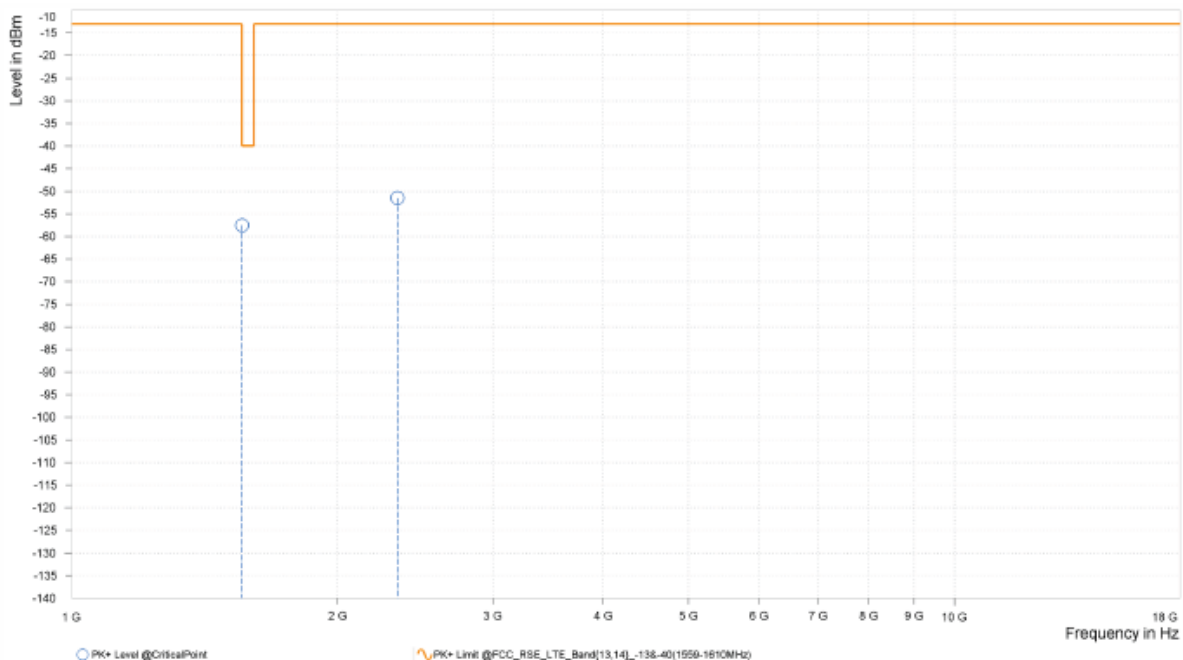

MODE	TX channel 23230	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			


Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,559.500	-56.16	-40.00	16.16	13.48	V	33.9	1.00
3	2,339.250	-52.73	-13.00	39.73	19.20	V	79.8	2.00

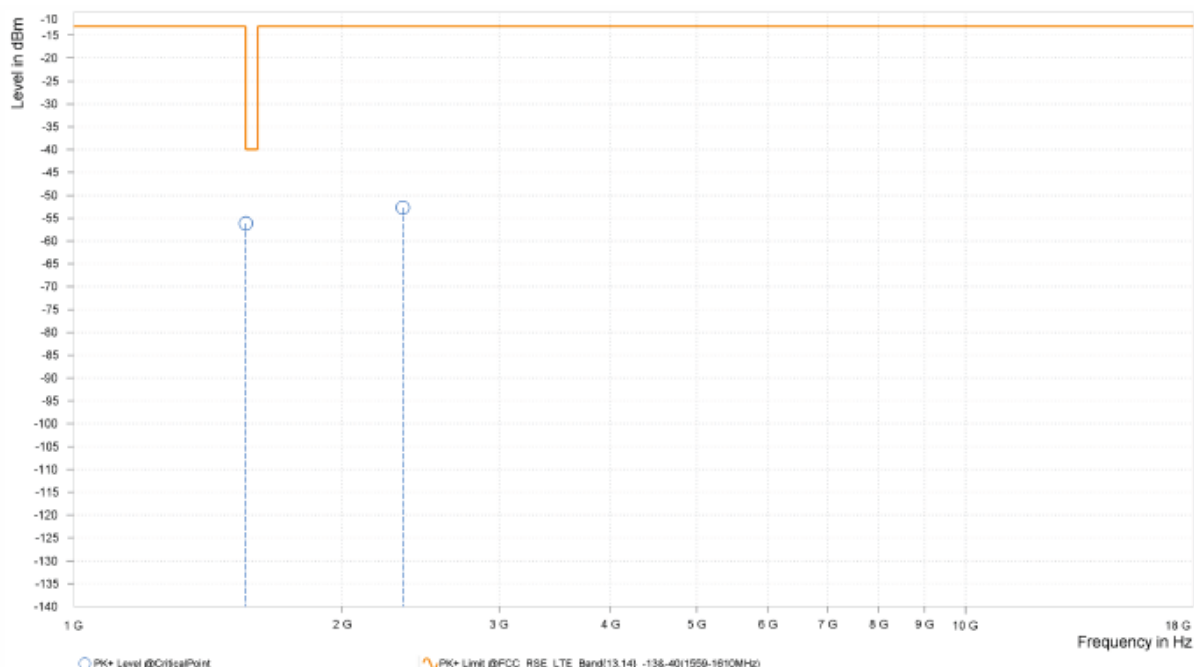

CH 23255


MODE	TX channel 23255	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,564.500	-57.45	-40.00	17.45	12.06	H	1.8	2.00
3	2,346.750	-51.43	-13.00	38.43	19.04	H	1	2.00

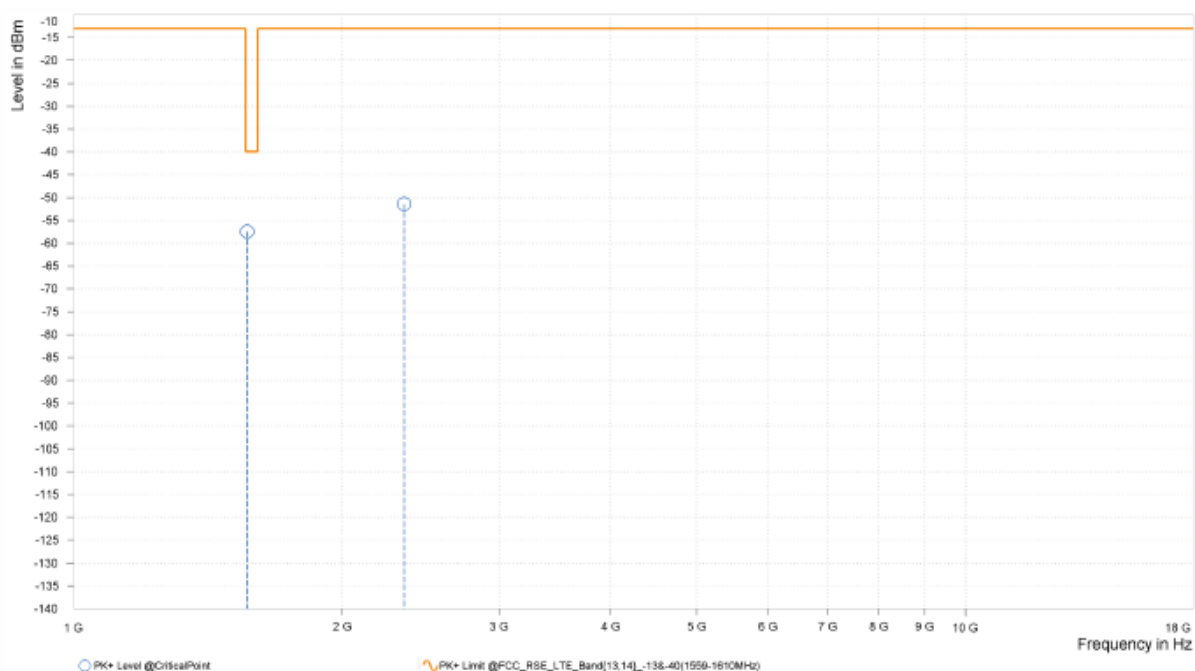

MODE	TX channel 23255	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			


Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,564.500	-56.80	-40.00	16.80	13.47	V	33.8	1.00
3	2,346.750	-51.72	-13.00	38.72	19.24	V	81.3	2.00

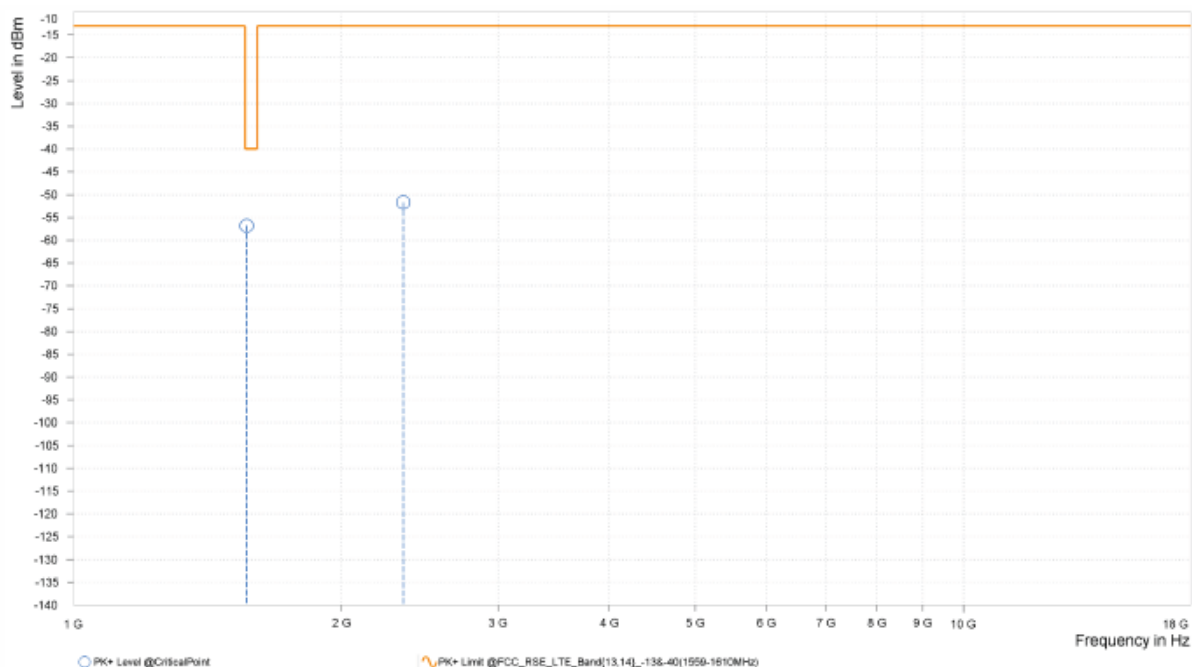

CHANNEL BANDWIDTH: 10MHz /QPSK


MODE	TX channel 23230	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,555.000	-58.46	-13.00	45.46	12.09	H	359.1	1.00
3	2,332.500	-52.57	-13.00	39.57	18.59	H	356.3	1.00

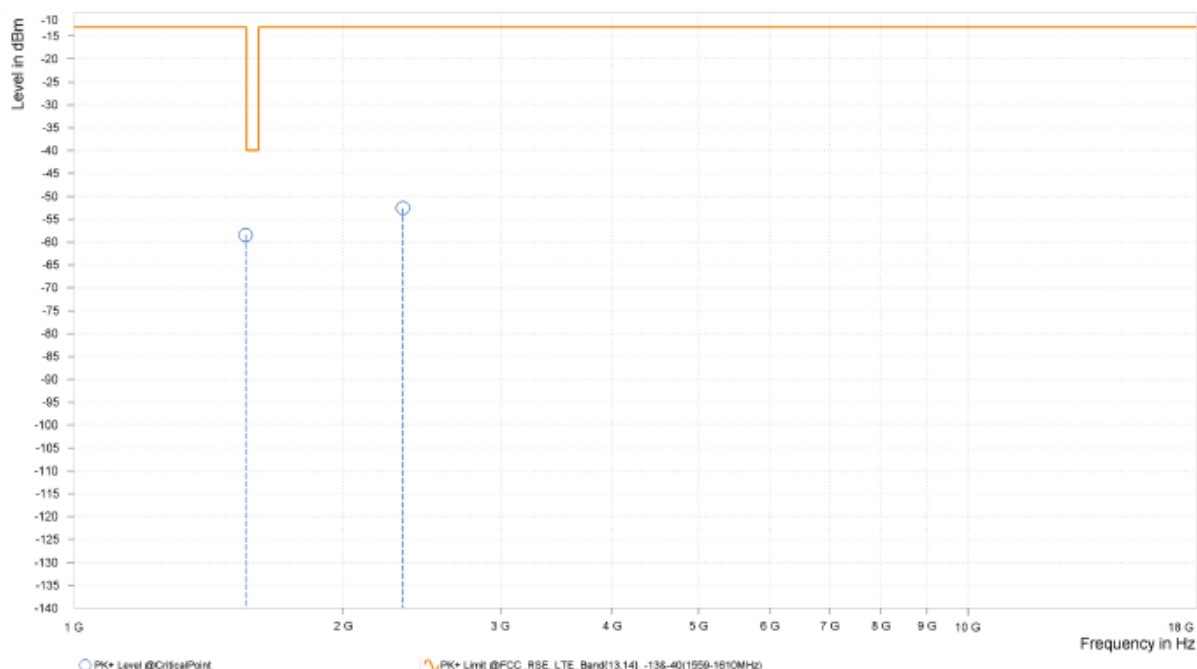

MODE	TX channel 23230	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,555.000	-57.72	-13.00	44.72	13.43	V	83.4	2.00
3	2,332.500	-52.27	-13.00	39.27	19.17	V	64.3	1.00

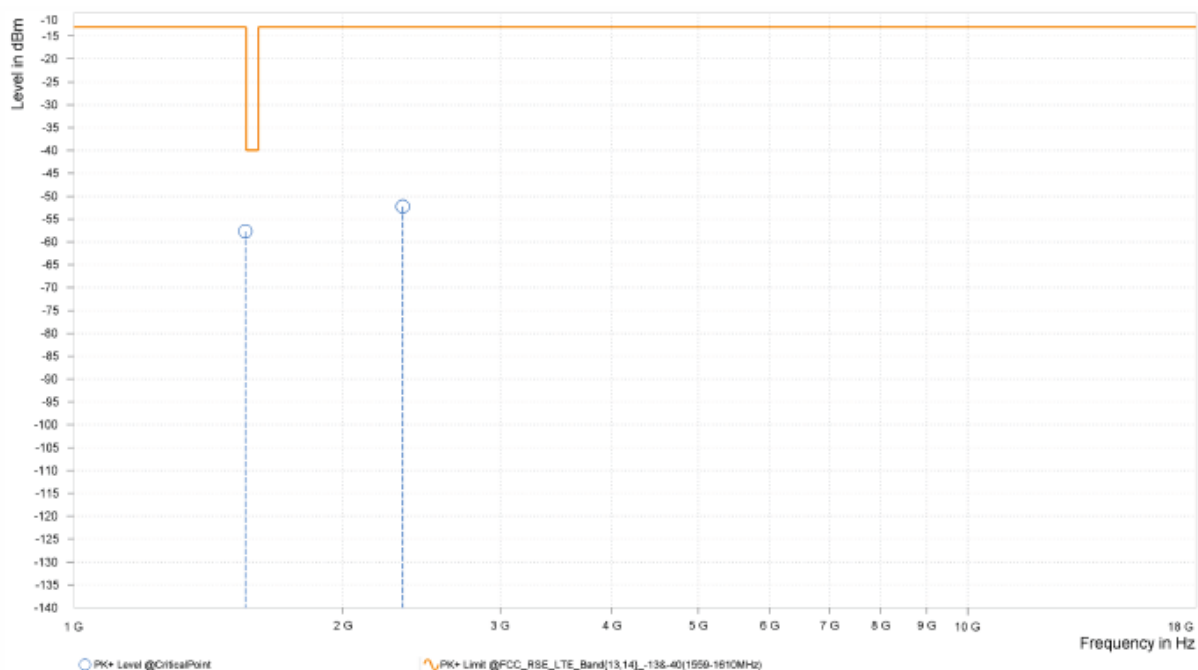


LTE B30

CHANNEL BANDWIDTH: 5MHz / QPSK


MODE	TX channel 27710	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	4,615.500	-50.47	-40.00	10.47	22.54	H	93.3	2.00
5	6,923.250	-47.61	-40.00	7.61	26.74	H	317	2.00

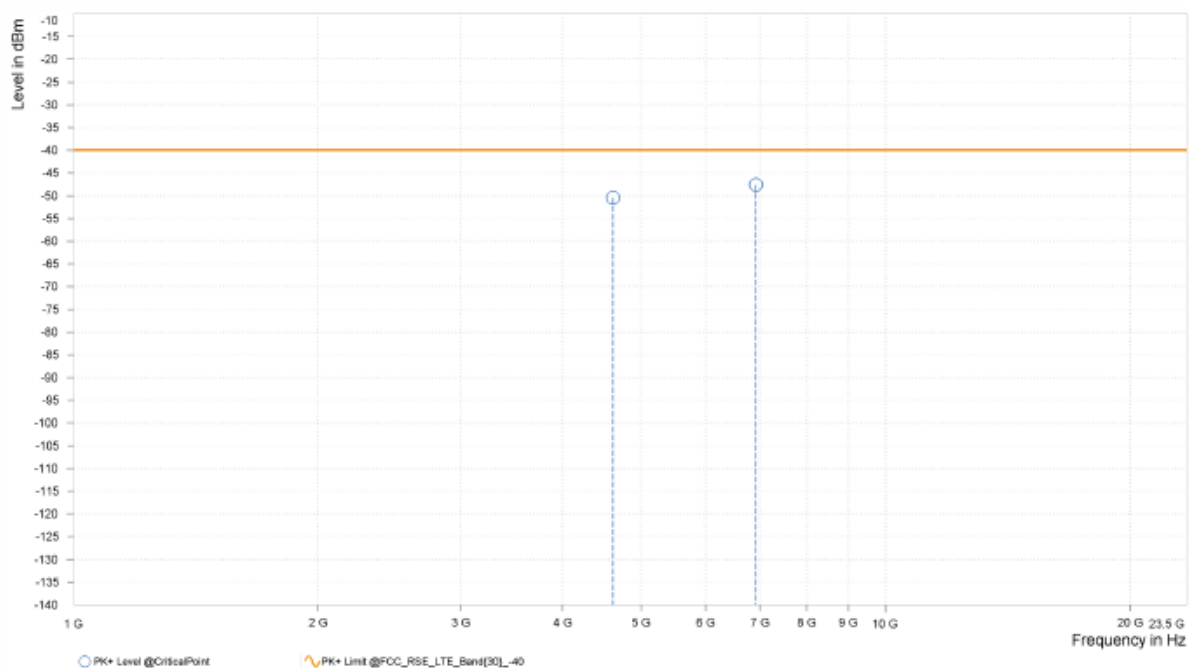

MODE	TX channel 27710	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			


Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	4,615.500	-51.75	-40.00	11.75	23.03	V	192.3	1.00
5	6,923.250	-49.35	-40.00	9.35	26.75	V	1	1.00

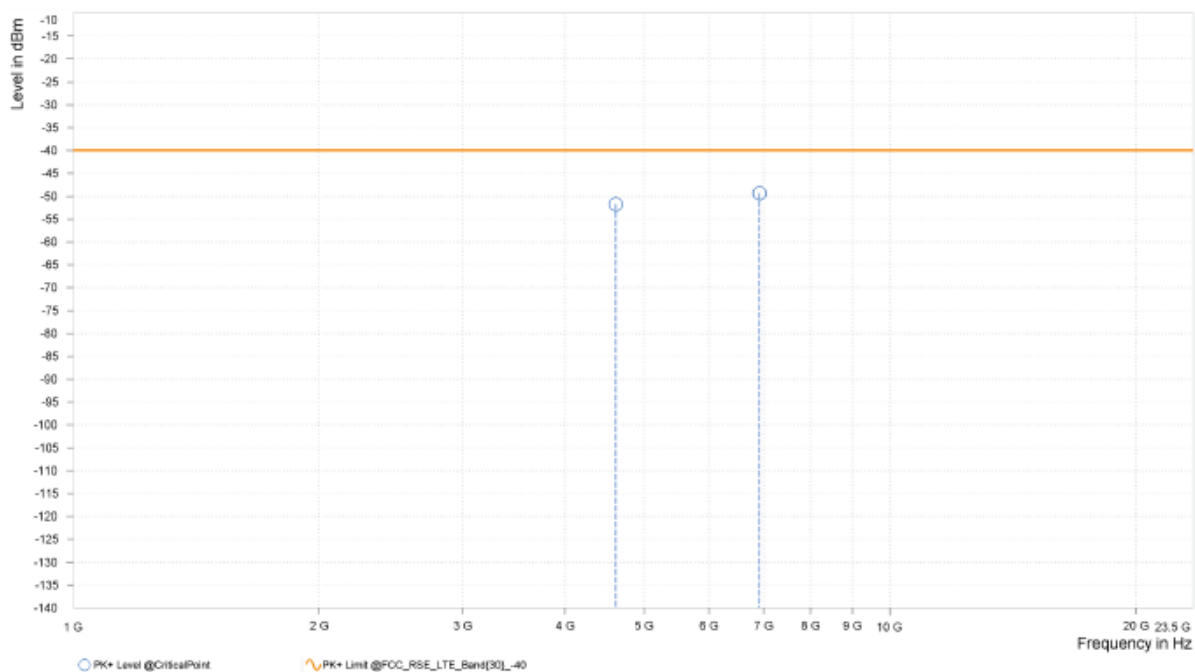

CHANNEL BANDWIDTH: 10MHz / QPSK


MODE	TX channel 27710	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	4,611.000	-50.46	-40.00	10.46	22.54	H	93.3	1.00
5	6,916.500	-46.40	-40.00	6.40	26.77	H	123	2.00

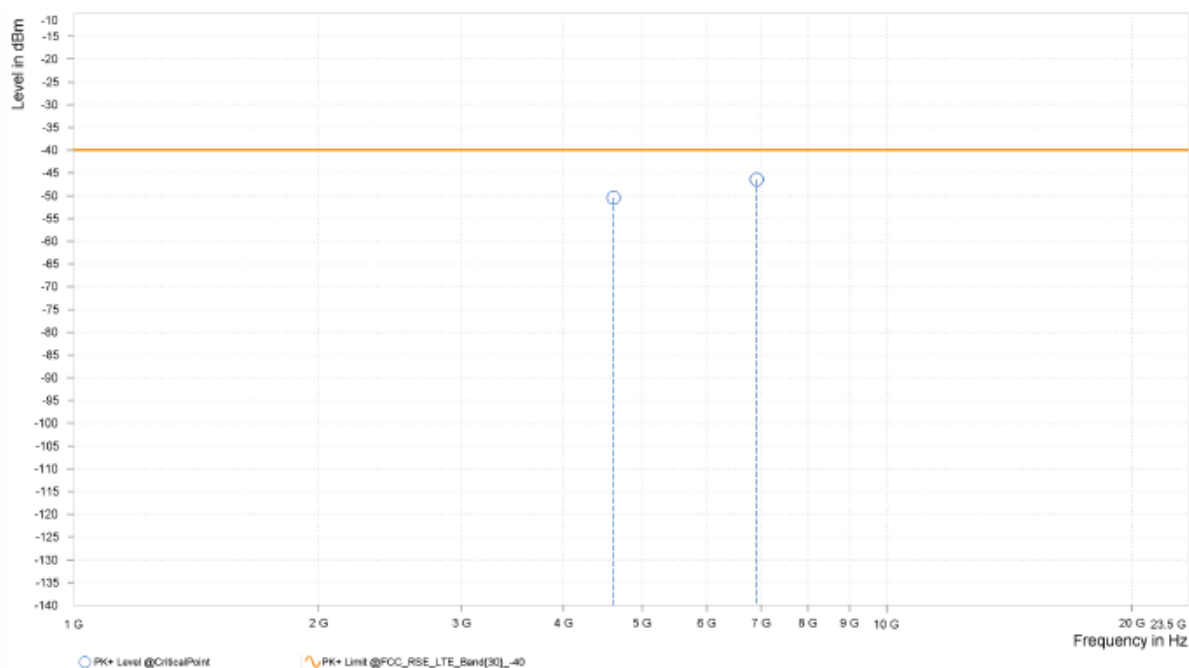

MODE	TX channel 27710	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	4,611.500	-50.71	-40.00	10.71	23.03	V	359	2.00
5	6,916.250	-47.84	-40.00	7.84	26.75	V	307.8	2.00

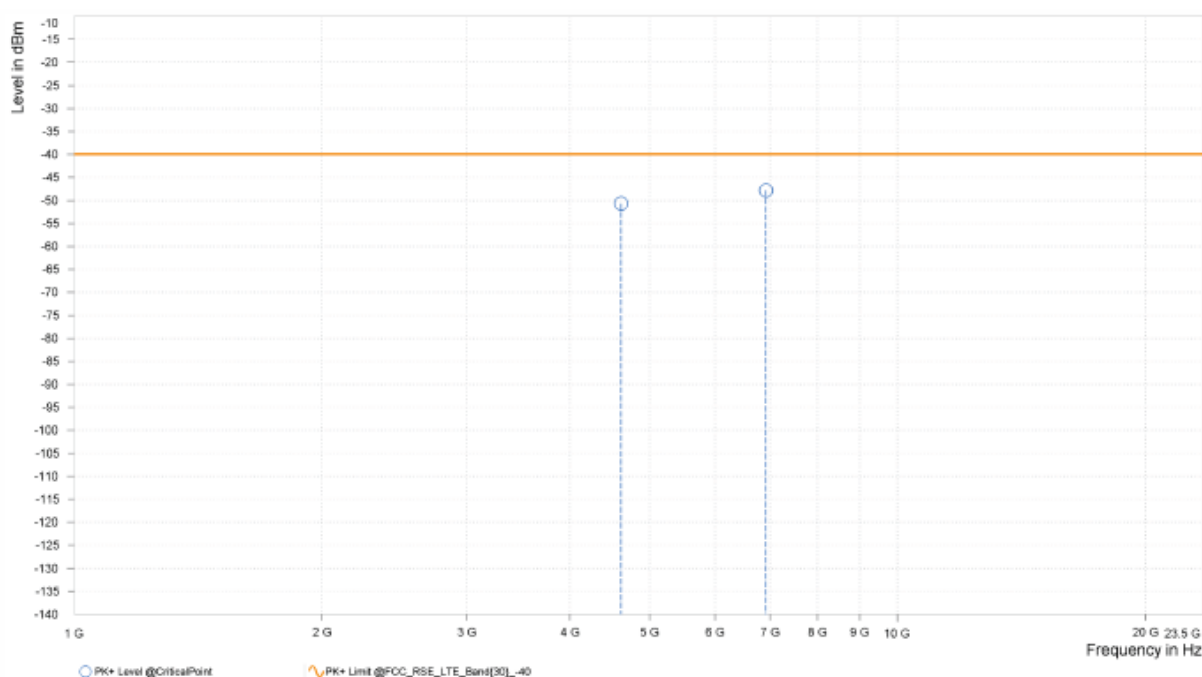


LTE B71

CHANNEL BANDWIDTH: 5MHz / QPSK

CH133147


MODE	TX channel 133147	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	1,326.500	-46.94	-13.00	33.94	4.38	H	2.4	2.00
1	1,989.750	-50.83	-13.00	37.83	9.53	H	354.9	2.00

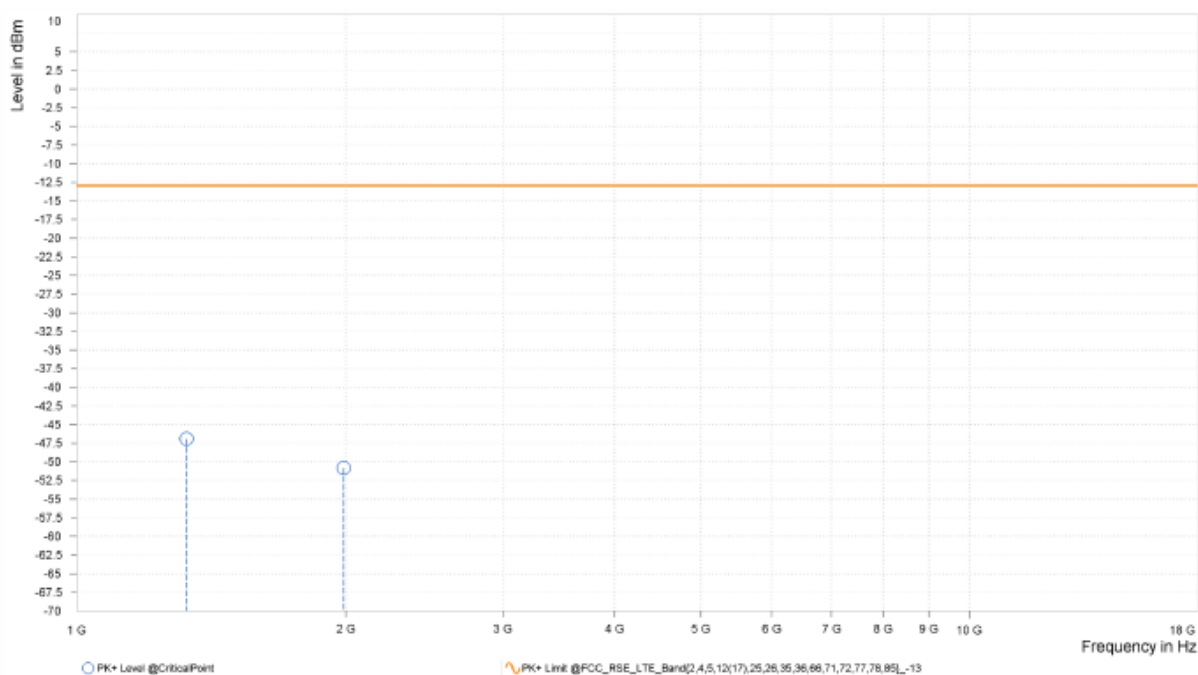

MODE	TX channel 133147	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			


Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	1,326.500	-53.25	-13.00	40.25	4.44	V	2.7	2.00
1	1,989.750	-52.04	-13.00	39.04	9.47	V	225.4	1.00

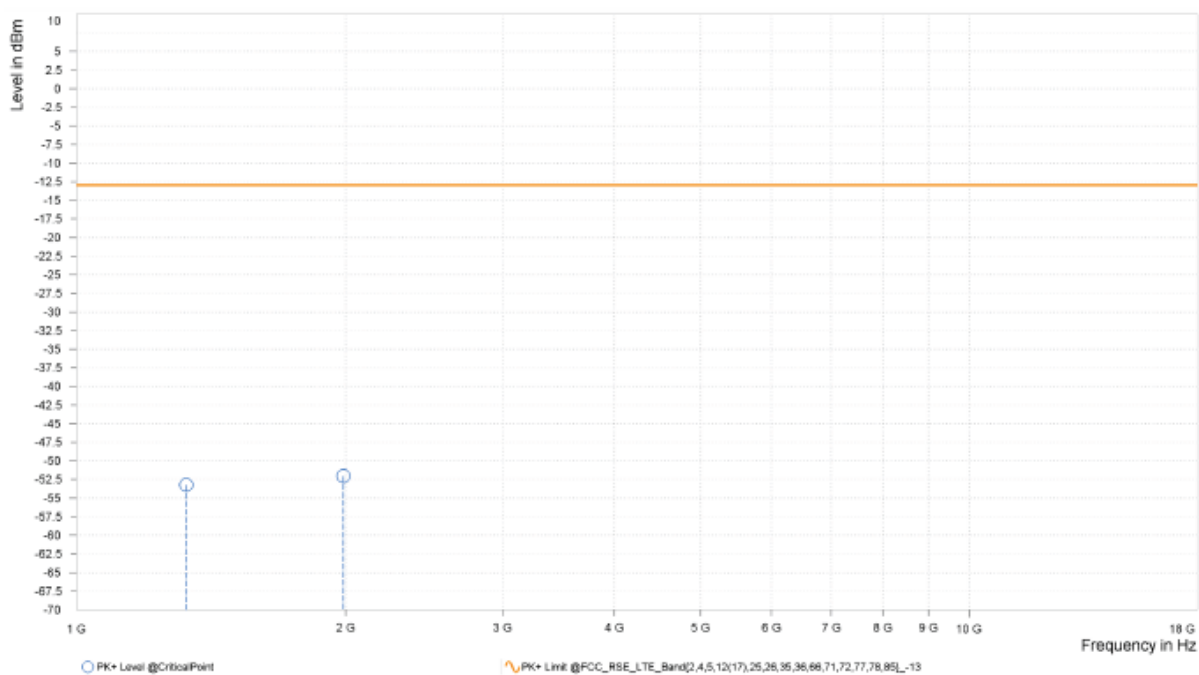

CH133297


CH133297			
MODE	TX channel 133297	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	1,356.500	-47.35	-13.00	34.35	6.95	H	359	2.00
1	2,034.750	-48.92	-13.00	35.92	11.39	H	330.6	1.00

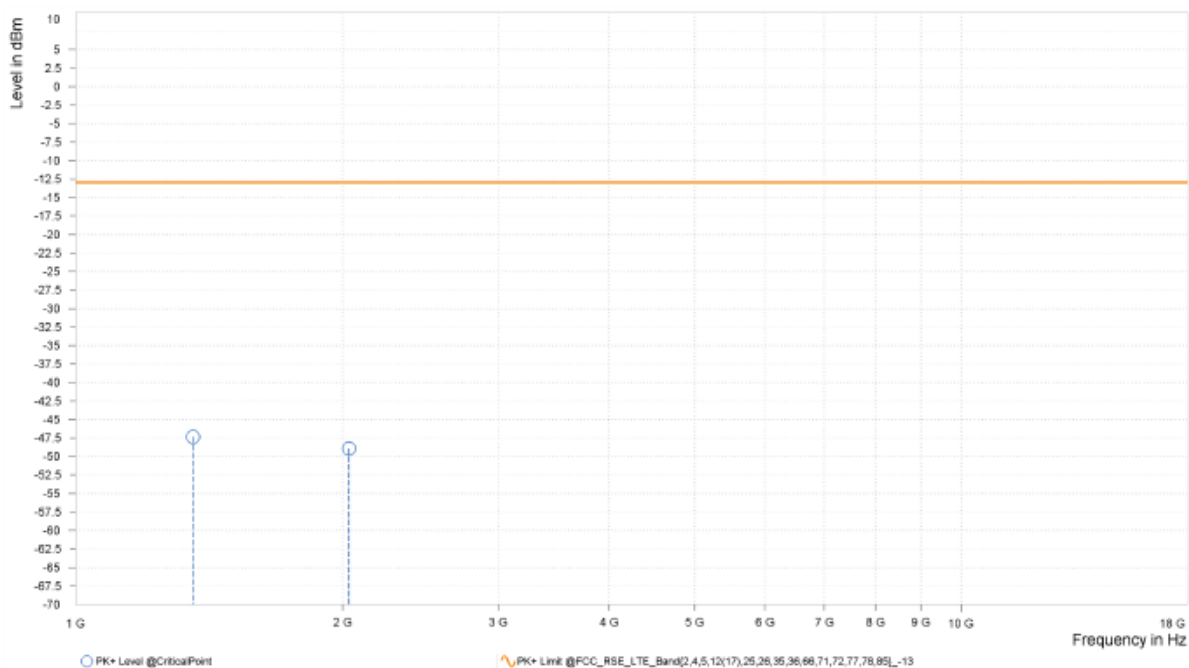

MODE	TX channel 133297	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	1,356.500	-45.24	-13.00	32.24	7.03	V	5	1.00
1	2,034.750	-49.11	-13.00	36.11	11.93	V	355.6	2.00

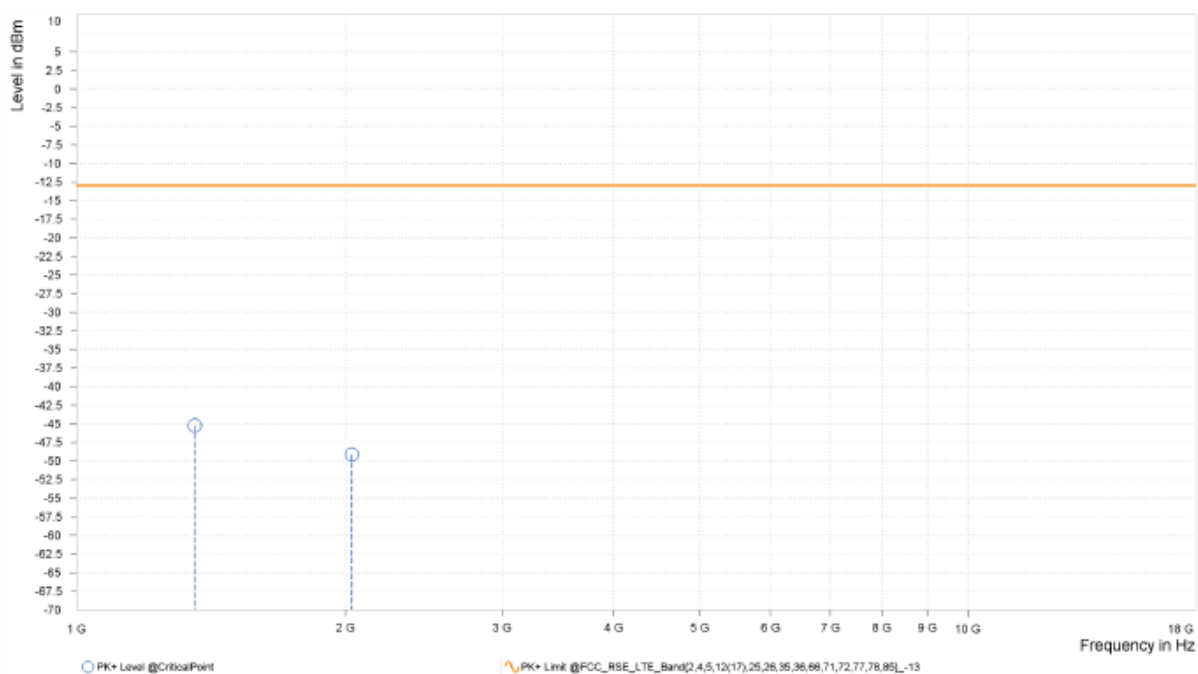




**BUREAU
VERITAS**

Test Report No.: W7L-P24050018RF06

CH133447


MODE	TX channel 133447	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	1,386.000	-45.04	-13.00	32.04	6.86	H	1	1.00
1	2,079.750	-50.65	-13.00	37.65	9.91	H	4.4	1.00

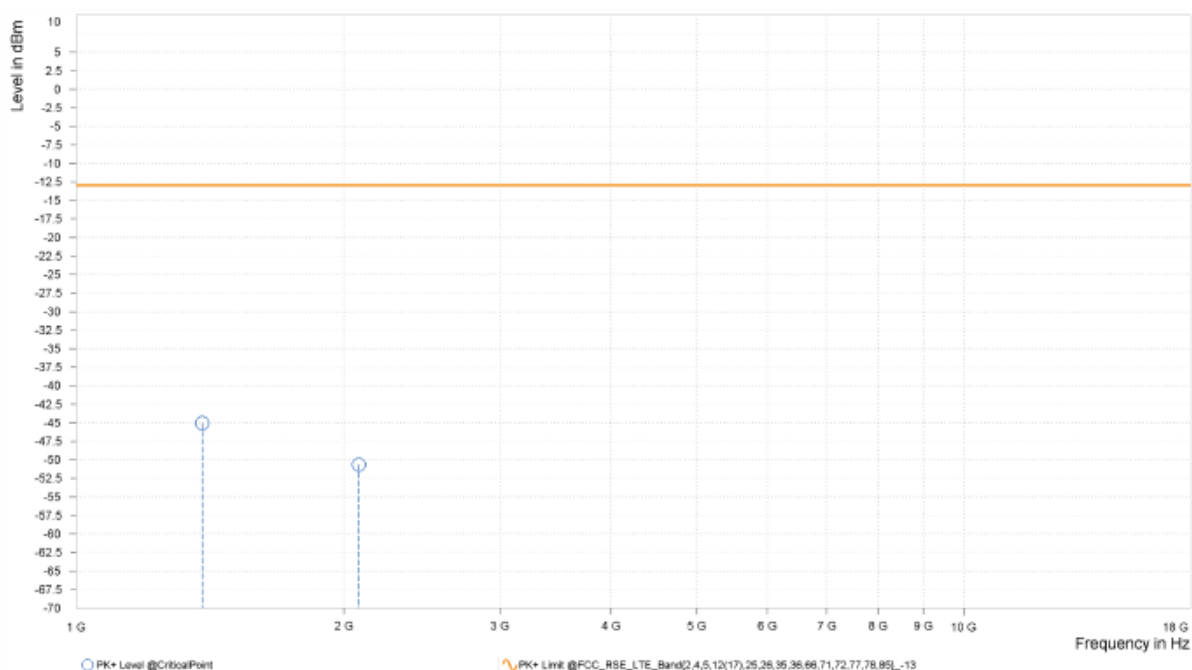

MODE	TX channel 133447	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			


Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	1,386.500	-48.28	-13.00	35.28	6.87	V	5.1	1.00
1	2,079.750	-51.24	-13.00	38.24	10.00	V	2.2	2.00

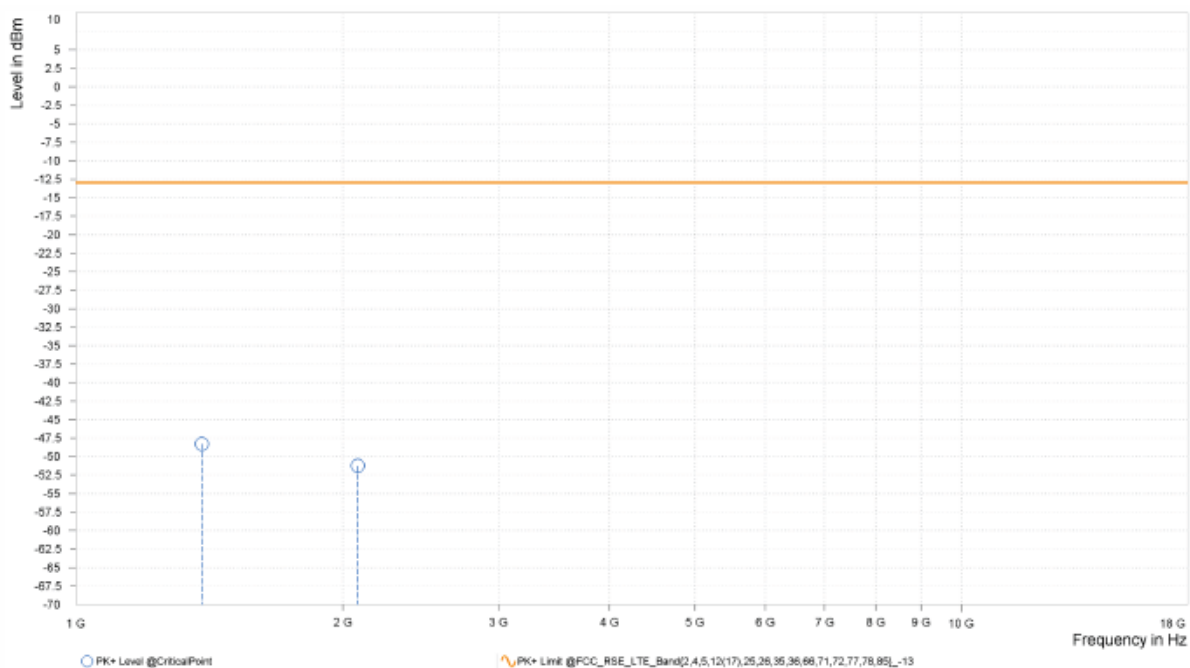

CHANNEL BANDWIDTH: 10MHz / QPSK


MODE	TX channel 133297	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	1,352.000	-47.49	-13.00	34.49	6.90	H	2.6	2.00
1	2,028.000	-50.27	-13.00	37.27	11.48	H	2.6	2.00

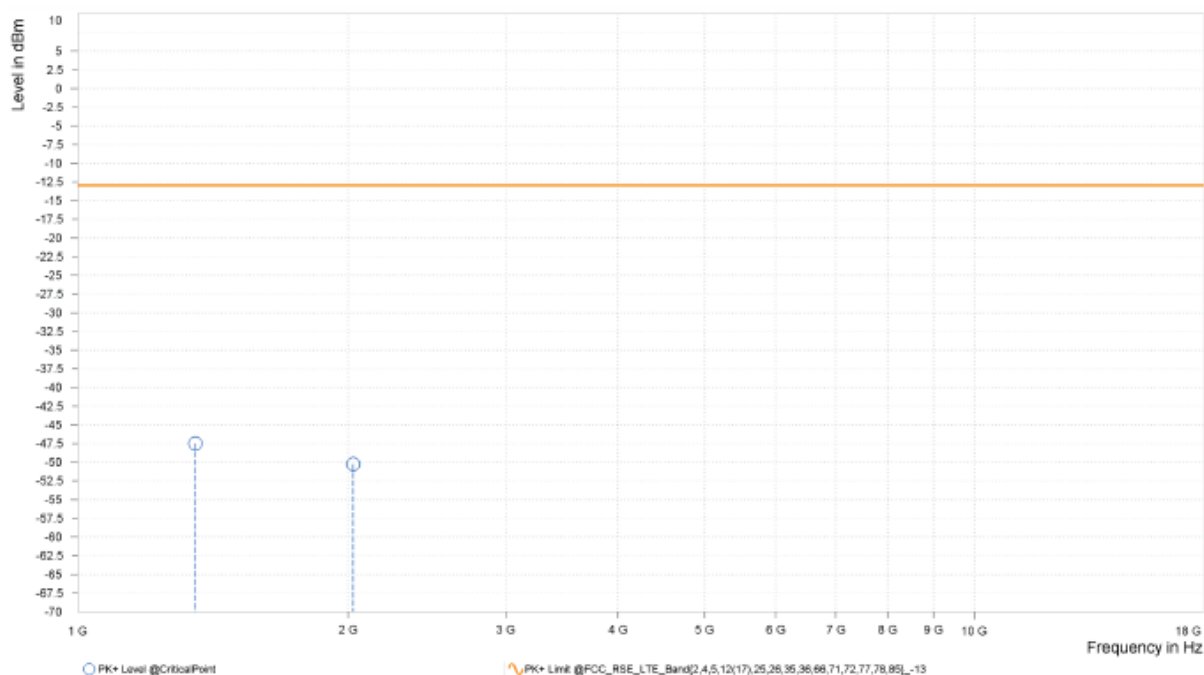

MODE	TX channel 133297	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			


Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	1,352.000	-46.13	-13.00	33.13	6.97	V	2.8	2.00
1	2,028.000	-49.22	-13.00	36.22	12.05	V	355.5	2.00

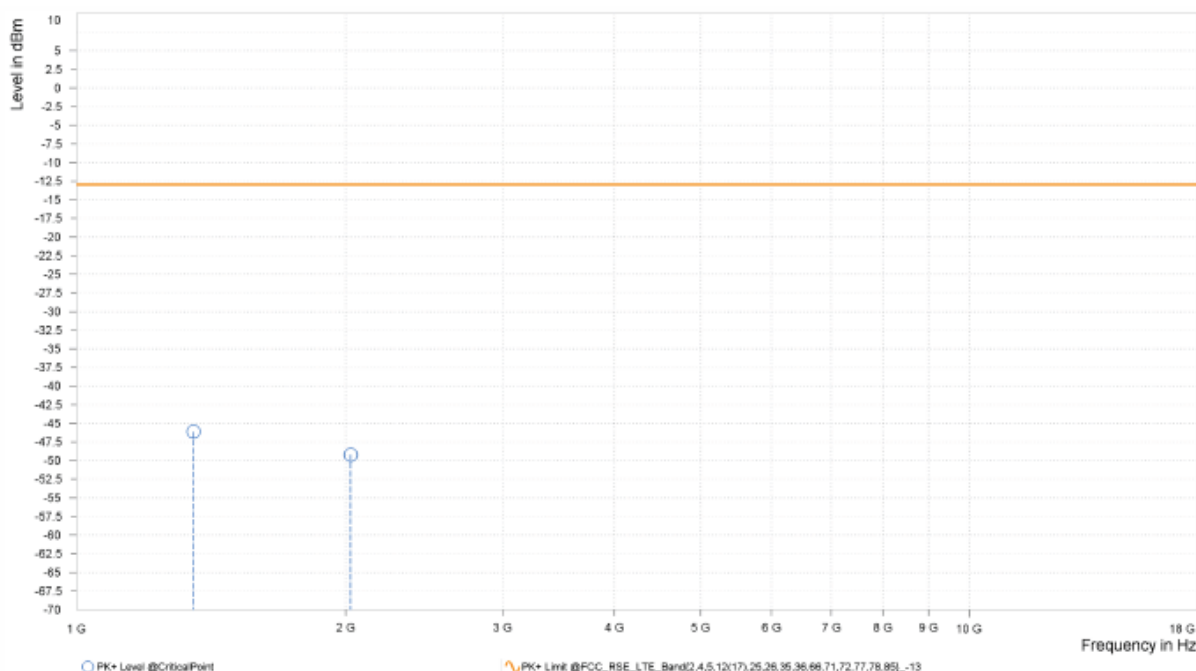

CHANNEL BANDWIDTH: 15MHz / QPSK


MODE	TX channel 133297	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	1,347.500	-48.18	-13.00	35.18	6.85	H	2.4	2.00
1	2,021.250	-50.88	-13.00	37.88	11.13	H	225.4	1.00

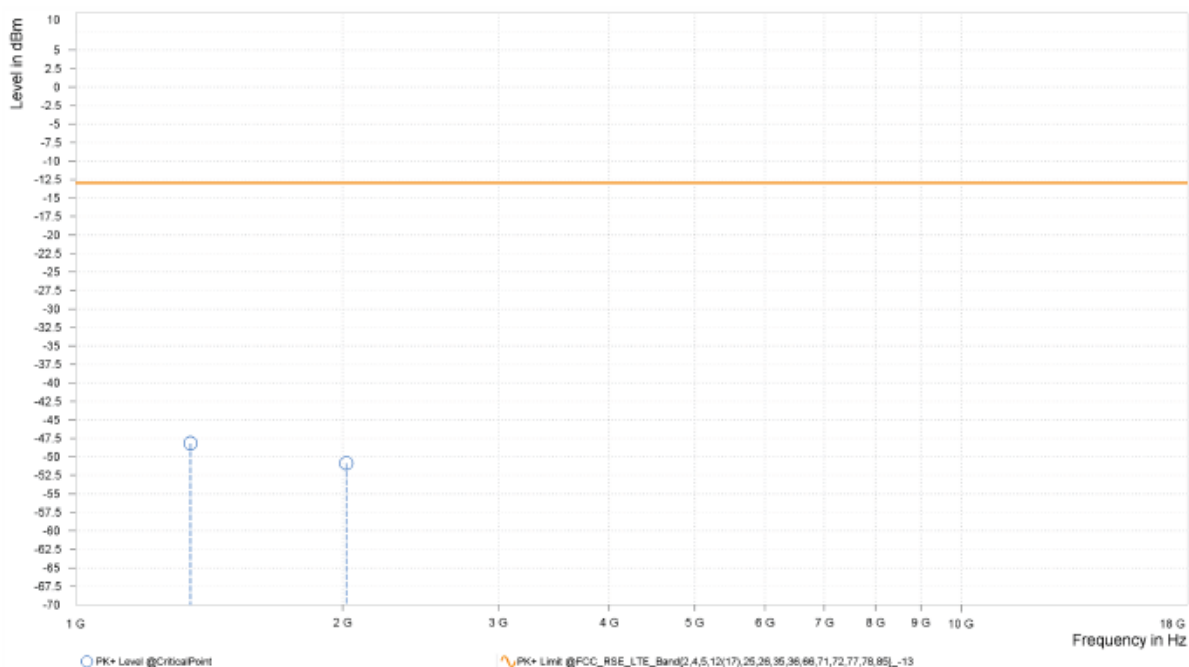

MODE	TX channel 133297	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			


Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	1,347.500	-47.55	-13.00	34.55	6.91	V	1	1.00
1	2,021.250	-49.01	-13.00	36.01	11.58	V	225.4	1.00

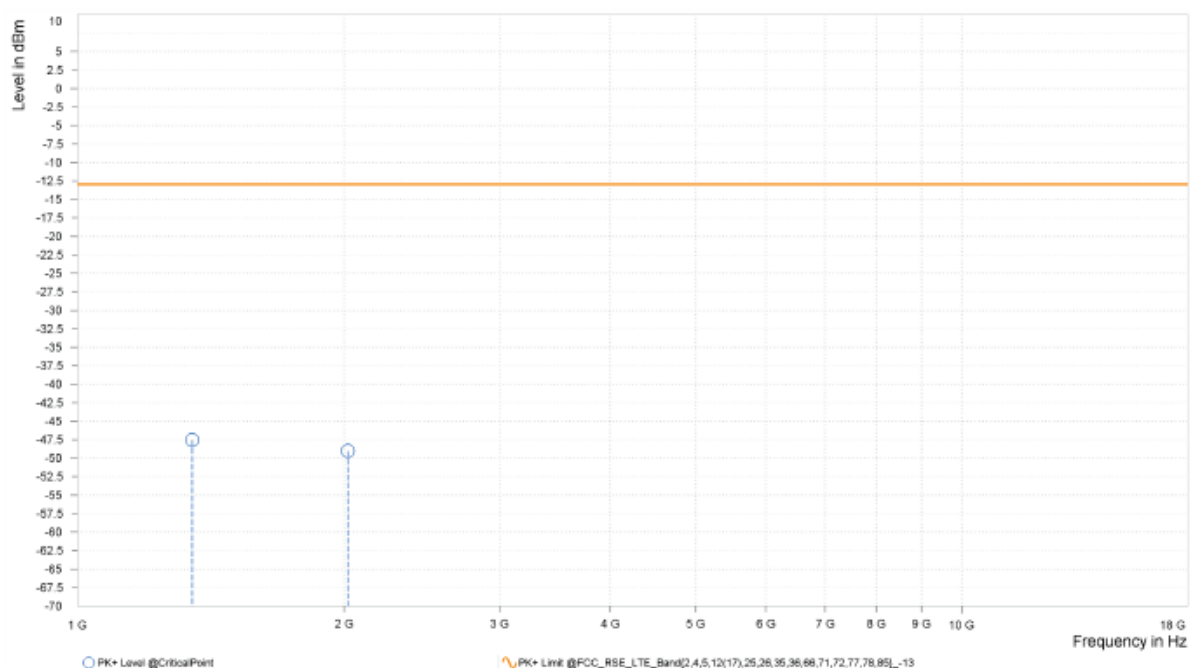

CHANNEL BANDWIDTH: 20MHz / QPSK


MODE	TX channel 133322	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	1,348.000	-53.47	-13.00	40.47	6.85	H	359	2.00
1	2,022.000	-50.59	-13.00	37.59	11.18	H	5.8	1.00

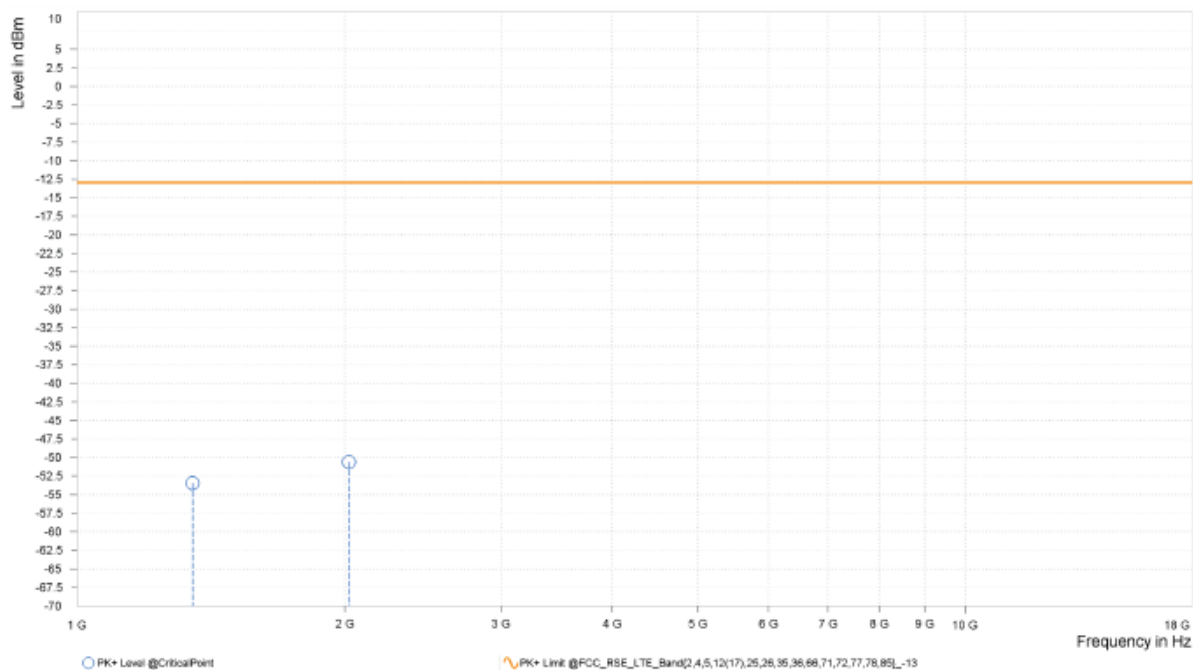

MODE	TX channel 133322	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	1,348.000	-53.75	-13.00	40.75	6.91	V	1	1.00
1	2,022.000	-49.52	-13.00	36.52	11.65	V	359	2.00

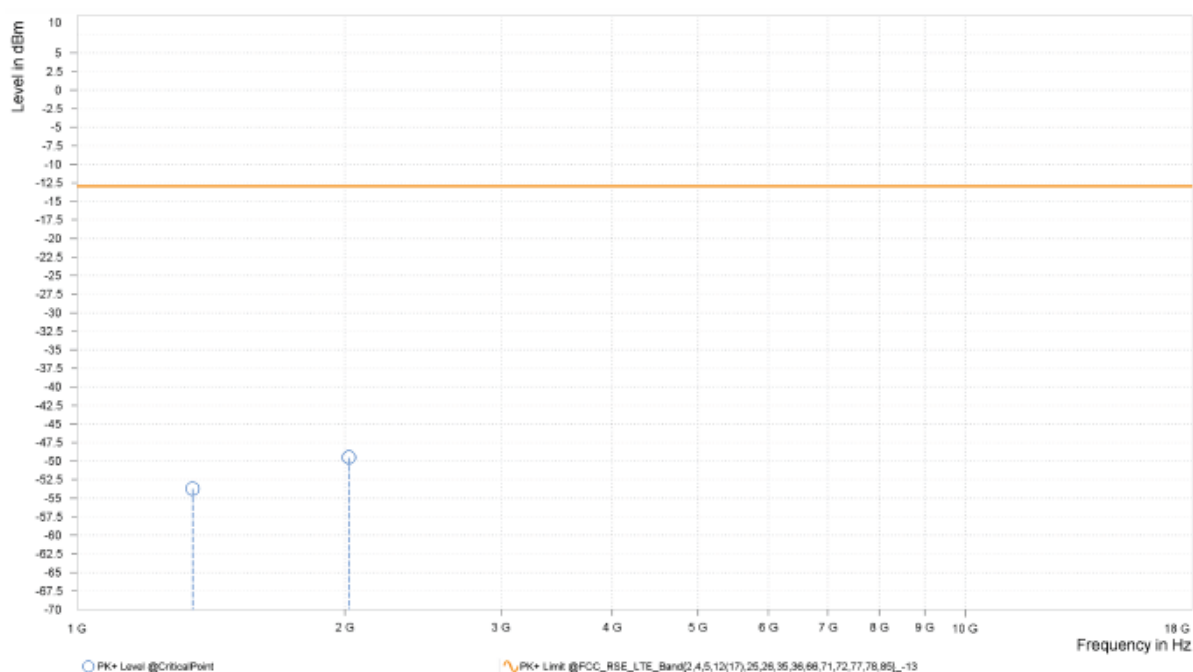


CA_12A-66A:

CHANNEL BANDWIDTH: 10MHz+20MHz / QPSK


MODE	TX channel 23095/ 132322	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1407.000	-55.96	-58.87	-13.00	-42.96	2.91	Peak	Horizontal
2	2121.000	-54.97	-60.05	-13.00	-41.97	5.08	Peak	Horizontal
3	3490.000	-51.34	-59.89	-13.00	-38.34	8.55	Peak	Horizontal
4 PP	5235.000	-48.36	-59.77	-13.00	-35.36	11.41	Peak	Horizontal

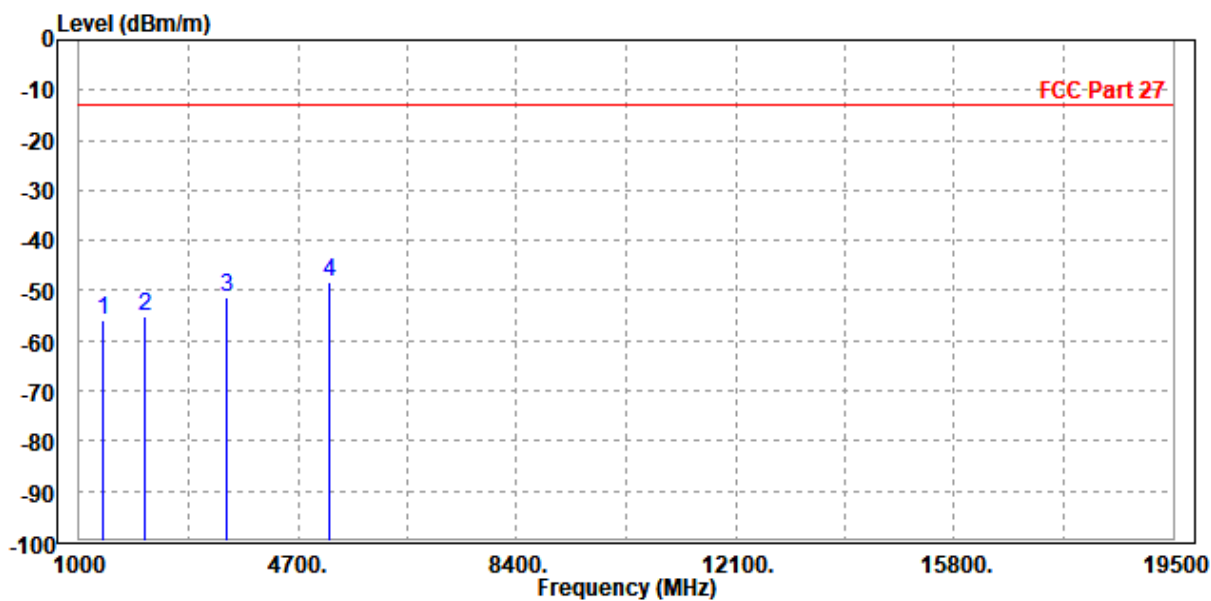

MODE	TX channel 23095/ 132322	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1414.000	-56.63	-59.55	-13.00	-43.63	2.92	Peak	Vertical
2	2121.000	-54.34	-58.77	-13.00	-41.34	4.43	Peak	Vertical
3	3497.500	-51.42	-60.06	-13.00	-38.42	8.64	Peak	Vertical
4 PP	5235.000	-47.64	-59.47	-13.00	-34.64	11.83	Peak	Vertical

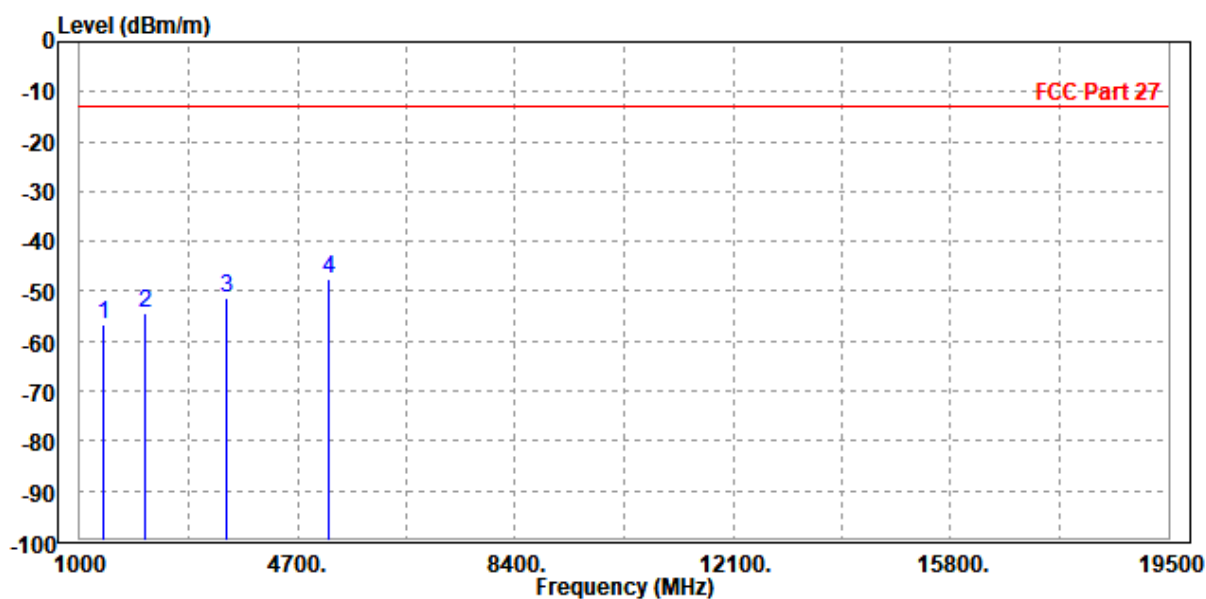



**BUREAU
VERITAS**


Test Report No.: W7L-P24050018RF06

CA_13A-66A:

CHANNEL BANDWIDTH: 10MHz+20MHz / QPSK


MODE	TX channel 23230/ 132322	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

		Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
		MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP	1564.000	-55.91	-59.31	-40.00	-15.91	3.40	Peak	Horizontal
2		2343.000	-53.92	-59.60	-13.00	-40.92	5.68	Peak	Horizontal
3		3490.000	-51.22	-59.77	-13.00	-38.22	8.55	Peak	Horizontal
4		5235.000	-48.10	-59.51	-13.00	-35.10	11.41	Peak	Horizontal

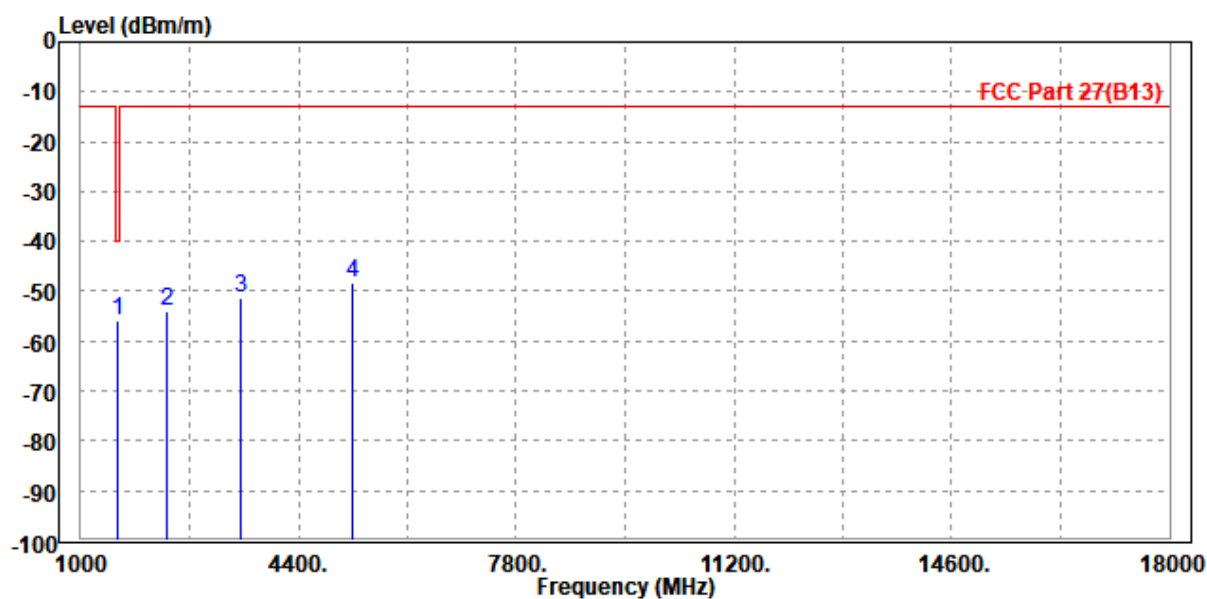

MODE	TX channel 23230/ 132322	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1 PP	1564.000	-55.75	-58.99	-40.00	-15.75	3.24	Peak	Vertical
2	2346.000	-54.18	-59.41	-13.00	-41.18	5.23	Peak	Vertical
3	3490.000	-51.34	-59.98	-13.00	-38.34	8.64	Peak	Vertical
4	5233.000	-47.51	-59.33	-13.00	-34.51	11.82	Peak	Vertical

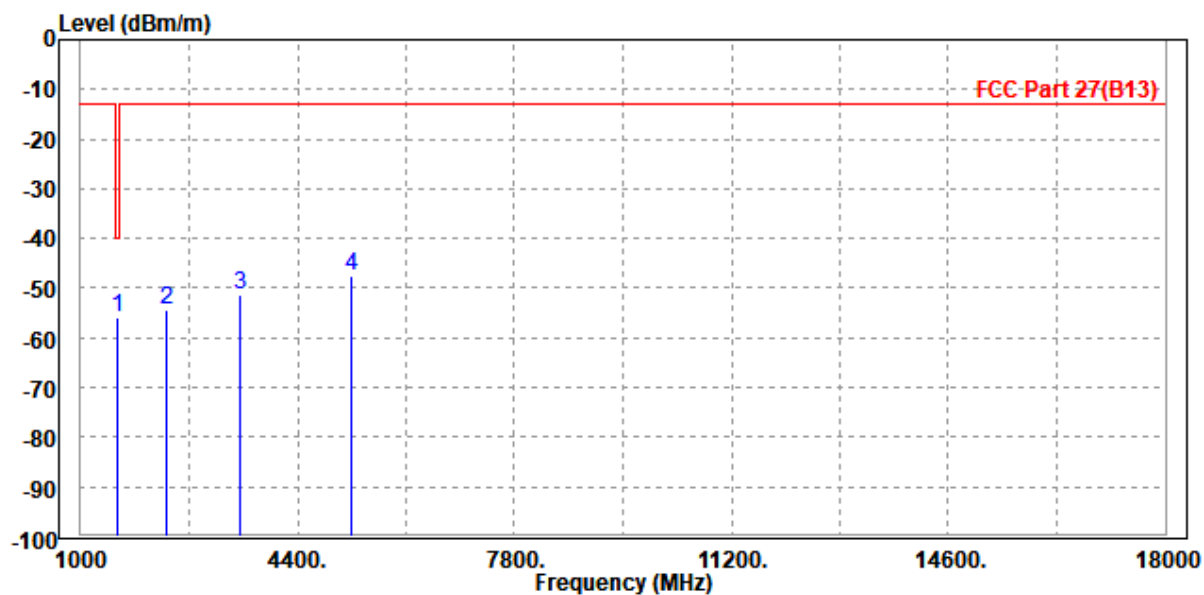


3.7 PEAK TO AVERAGE RATIO

3.7.1 LIMITS OF PEAK TO AVERAGE RATIO MEASUREMENT

In measuring transmissions in this band using an average power technique, the peak to-average ratio (PAR) of the transmission may not exceed 13 dB

3.7.2 TEST SETUP

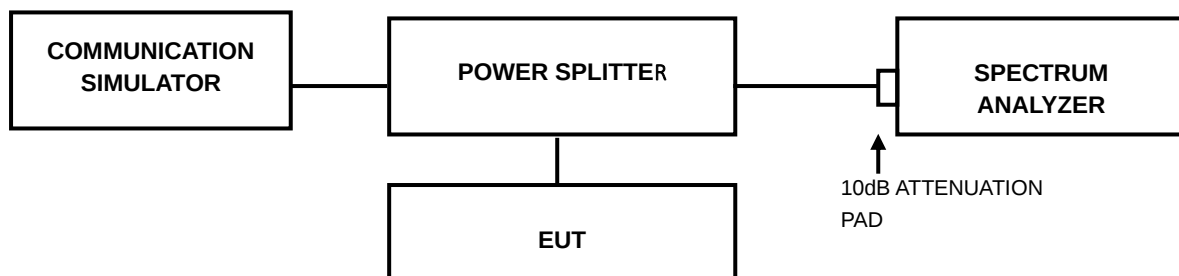

3.7.3 TEST PROCEDURES

1. Set resolution/measurement bandwidth $\geq$ signal's occupied bandwidth.
2. Set the number of counts to a value that stabilizes the measured CCDF curve.
3. Record the maximum PAPR level associated with a probability of 0.1%.



Test Report No.: W7L-P24050018RF06

3.7.4 TEST RESULTS

Please Refer to Appendix H.



Test Report No.: W7L-P24050018RF06

4 INFORMATION ON THE TESTING LABORATORIES

We, BV 7LAYERS COMMUNICATIONS TECHNOLOGY (SHENZHEN) CO. LTD., were founded in 2015 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Shenzhen EMC/RF Lab:

Tel: +86-755-88696566

Fax: +86-755-88696577

Email: customerservice.sw@cn.bureauveritas.com

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.



Test Report No.: W7L-P24050018RF06

5 MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.

---END---