



TEST REPORT

FCC ID: 2AAD8-U0639

Applicant : HAOLIYUAN(SHENZHEN) ELECTRONIC CO., LTD
Address : 3/F, Building A1, Junfeng Industrial Park, Yonghe Road, Fuyong, Bao' an District, Shenzhen, Guangdong, China

Equipment under Test (EUT):

Name : 802.11ac Wireless USB Adapter
Model : U0639, WU636

Standards : FCC PART 15, SUBPART C : 2015 (Section 15.247)
RSS-247 ISSUE 2 Feb 2017
ANSI C63.4:2014 ; ANSI C63.10:2013

Report No. : T1870620 01
Date of Test : April 25, 2017 - May 10, 2017
Date of Issue : May 10, 2017

Test Result :	PASS *
----------------------	---------------

* In the configuration tested, the EUT complied with the standards specified above

Authorized Signature

(Mark Zhu)
General Manager

The manufacture should ensure that all the products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of Shenzhen Alpha Product Testing Co., Ltd. Or test done by Shenzhen Alpha Product Testing Co., Ltd. Approvals in connection with, distribution or use of the product described in this report must be approved by Shenzhen Alpha Product Testing Co., Ltd. Approvals in writing.

TABLE OF CONTENT

Description	Page
1 General Information -----	5
1.1 Description of Device (EUT) -----	5
1.2 Description of Test Facility -----	6
2 EMC Equipment List-----	6
3 Test Procedure-----	7
4 Summary of Measurement-----	8
4.1 Summary of test result -----	8
4.2 Test connection -----	8
4.3 Assistant equipment used for test -----	9
4.4 Test mode-----	9
4.5 Channel list-----	9
4.6 Test Conditions -----	10
4.7 Measurement Uncertainty (95% confidence levels, k=2) -----	10
5 Spurious Emission-----	11
5.1 Radiation Emission-----	11
5.1.1 Radiation Emission Limits(15.209)-----	11
5.1.2 Test Setup -----	11
5.1.3 Test Procedure -----	13
5.1.4 Test Equipment Setting For emission test Result -----	14
5.1.5 Test Condition -----	14
5.1.6 Test Result-----	14
6 POWER LINE CONDUCTED EMISSION-----	29
6.1 Conducted Emission Limits(15.207)-----	29
6.2 Test Setup -----	29
6.3 Test Procedure -----	30
6.4 Test Results -----	30
7 Conducted Maximum Output Power -----	33
7.1 Test limit-----	33
7.2 Test Procedure -----	33
7.3 Test Setup -----	33
7.4 Test Results -----	33
8 PEAK POWER SPECTRAL DENSITY-----	35
8.1 Test limit-----	35
8.2 Method of measurement -----	35
8.3 Test Setup -----	35
8.4 Test Results -----	36
9 Bandwidth-----	44
9.1 Test limit-----	44
9.2 Method of measurement -----	44
9.3 Test Setup -----	44
9.4 Test Results -----	44

10 Band Edge Check	52
10.1 Test limit	52
10.2 Test Procedure	52
10.3 Test Setup	52
10.4 Test Result	52
11 Antenna Requirement	65
11.1 Standard Requirement	65
11.2 Antenna Connected Construction	65
11.3 Result	65
12 Test setup photo	66
12.1 Photos of Radiated emission	66
12.2 Photos of Conducted Emission test	67
13 Photographs of EUT	68

TEST REPORT VERIFICATION

Applicant : HAOLIYUAN(SHENZHEN) ELECTRONIC CO.,LTD
 Manufacturer : HAOLIYUAN(SHENZHEN) ELECTRONIC CO.,LTD
 EUT Description : 802.11ac Wireless USB Adapter
 (A) Model No. : U0639, WU636
 (B) Trademark : N/A
 (C) Ratings Supply : DC 5V from USB Port
 (D) Test Voltage : DC 5V from USB Port

Measurement Standard Used:


FCC Rules and Regulations Part 15 Subpart C 2015,
ANSI C63.4:2014, ANSI C63.10:2013

The device described above is tested by Shenzhen Alpha Product Testing Co., Ltd. to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart C limits both conducted and radiated emissions. The test results are contained in this test report and Shenzhen Alpha Product Testing Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests.


After the test, our opinion is that EUT compliance with the requirement of the above standards.

This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Shenzhen Alpha Product Testing Co., Ltd.

Tested by (name + signature).....: Eric Huang
Test Engineer

.....


Approved by (name + signature).....: Simple Guan
Project Manager

.....


Date of issue.....: May 10, 2017

1 General Information

1.1 Description of Device (EUT)

Trade Name	: N/A
EUT	: 802.11ac Wireless USB Adapter
Model No.	U0639, WU636
DIFF.	: Only model name is different.
Antenna Type	: External Antenna with reversed polarity Non standards unique antenna port :5.0dBi
Operation Frequency	: IEEE 802.11b/g: 2412MHz-2462MHz IEEE 802.11n HT20: 2412MHz-2462MHz IEEE 802.11n HT40: 2422MHz-2452MHz IEEE 802.11b/g:11Channels
Channel number	: IEEE 802.11n HT20: 11 Channels IEEE 802.11n HT40: 7Channels IEEE 802.11b: DSSS(CCK,DQPSK,DBPSK)
Modulation type	: IEEE 802.11g: OFDM(64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n :OFDM(64QAM, 16QAM, QPSK, BPSK)
Power Supply	: DC 5V from USB Port
Applicant	: HAOLIYUAN(SHENZHEN) ELECTRONIC CO.,LTD
Address	: 3/F,Building A1, Junfeng Industrial Park, Yonghe Road, Fuyong, Bao' an District, Shenzhen, Guangdong, China
Manufacturer	: HAOLIYUAN(SHENZHEN) ELECTRONIC CO.,LTD
Address	: 3/F,Building A1, Junfeng Industrial Park, Yonghe Road, Fuyong, Bao' an District, Shenzhen, Guangdong, China

1.2 Description of Test Facility

Shenzhen Alpha Product Testing Co., Ltd
Building B, East Area of Nanchang Second, Industrial Zone, Gushu 2nd Road,
Bao'an, Shenzhen, China

August 11, 2014 File on Federal Communication Commission
Registration Number: 203110

July 18, 2014 Certificated by IC
Registration Number: 12135A

2 EMC Equipment List

Equipment	Manufacture	Model No.	Serial No.	Last cal. Due to	Cal Interval
3m Semi-Anechoic	CHENYU	N/A	N/A	2017.01.18	2Year
Spectrum analyzer	Agilent	E4407B	MY46185649	2017.01.16	1Year
Receiver	R&S	ESPI	101873	2017.01.16	1Year
Receiver	R&S	ESCI	101165	2017.01.16	1Year
Bilog Antenna	SCHWARZBECK	VULB 9168	VULB9168-438	2017.01.18	2Year
Horn Antenna	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D(1201)	2017.01.20	2Year
Cable	Resenberger	N/A	No.1	2017.01.16	1Year
Cable	SCHWARZBECK	N/A	No.2	2017.01.16	1Year
Cable	SCHWARZBECK	N/A	No.3	2017.01.16	1Year
Pre-amplifier	HP	HP8347A	2834A00455	2017.01.18	1Year
Pre-amplifier	Agilent	8449B	3008A02664	2017.01.18	1Year
vector Signal Generator	Agilent	N5182A	MY49060042	2016.11.16	1 Year
vector Signal Generator	Agilent	E4438C	US44271917	2016.11.16	1 Year
X-series USB Peak and Average Power Sensor	Agilent	U2021XA	MY54080020	2016.11.16	1 Year

X-series USB Peak and Average Power Sensor	Agilent	U2021XA	MY54110001	2016.11.16	1 Year
Signal Analyzer	Agilent	N9020A	MY48030494	2016.11.16	1 Year
L.I.S.N.#1	Schwarzbeck	NSLK8126	8126466	2017.01.16	1 Year
L.I.S.N.#2	ROHDE&SCHWARZ	ENV216	101043	2017.01.16	1 Year

3 Test Procedure

POWER LINE CONDUCTED INTERFERENCE: The test procedure used was ANSI Standard ANSI C63.4:2014 using a 50 u H LISN. Both Lines were observed. The bandwidth of the receiver was 10kHz with an appropriate sweep speed. The ambient temperature of the EUT was 25°C with a humidity of 58%.

RADIATION INTERFERENCE: The test procedure used was ANSI Standard ANSI C63.4:2014 using a ANRITSU spectrum analyzer with a pre-selector. The analyzer was calibrated in dB above a micro volt at the output of the antenna. The resolution bandwidth was 100kHz and the video bandwidth was 300 kHz up to 1 GHz and 1 MHz with a video BW of 3MHz above 1 GHz. The ambient temperature of the EUT was 25°C with a humidity of 58%.

FORMULA OF CONVERSION FACTORS: The Field Strength at 3m was established by adding the meter reading of the spectrum analyzer (which is set to read in units of dBuV) to the antenna correction factor supplied by the antenna manufacturer and cable loss. The antenna correction factors and cable loss are stated in terms of dB. The gain of the Pre-selector was accounted for in the Spectrum Analyzer Meter Reading.

Example:

Freq (MHz) METER READING + ACF + CABLE = FS

33.20 dBuV + 10.36 dB + 0.9 dB= 44.46 dBuV/m @ 3m

ANSI STANDARD ANSI C63.4:2014 10.1.7 MEASUREMENT PROCEDURES: The EUT was placed on a table 80 cm high and with dimensions of 1m by 1.5m. The EUT was placed in the center of the table (1.5m side). The table used for radiated measurements is capable of continuous rotation. When an emission was found, the table was rotated to produce the maximum signal strength. At this point, the antenna was raised and lowered from 1m to 4m. The antenna was placed in both the horizontal and vertical planes. The situation was similar for the conducted measurement except that the table did not rotate. The EUT was setup as described in ANSI Standard ANSI C63.4:2014 10.1.7 with the EUT 40 cm from the vertical ground wall.


4 Summary of Measurement

4.1 Summary of test result

Test Item	Test Requirement	Standards Paragraph	Result
Spurious Emission	FCC PART 15 : 2014 & IC RSS-247	Section 15.247&15.209	Compliance
Conduction Emission	FCC PART 15 : 2015 & IC RSS Gen	Section 15.207	Compliance
Bandwidth Test	FCC PART 15 : 2015 & IC RSS-247	Section 15.247	Compliance
Peak Power	FCC PART 15 : 2015 & IC RSS-247	Section 15.247	Compliance
Power Density	FCC PART 15 : 2015 & IC RSS-247	Section 15.247	Compliance
Band Edge	FCC PART 15 : 2015 & IC RSS-247	Section 15.247	Compliance
Antenna Requirement	FCC PART 15 : 2015 & IC RSS Gen	Section 15.203	Compliance

Note: The EUT has been tested as an independent unit. And Continual Transmitting in maximum power (The adapter be used during Test)

4.2 Test connection



4.3 Assistant equipment used for test

Description	:	Notebook
Manufacturer	:	ACER
Model No.	:	ZQT

4.4 Test mode

Dutycycle :100% Keeping TX			
Mode	data rate (Mbps)(see Note)	Channel	Frequency (MHz)
IEEE 802.11b	1	Low :CH1	2412
	1	Middle: CH6	2437
	1	High: CH11	2462
IEEE 802.11g	6	Low :CH1	2412
	6	Middle: CH6	2437
	6	High: CH11	2462
IEEE 802.11 n/HT20 with 2.4G	6.5	Low :CH1	2412
	6.5	Middle: CH6	2437
	6.5	High: CH11	2462
IEEE 802.11 n/HT40 with 2.4G	13.5	Low :CH3	2422
	13.5	Middle:CH6	2437
	13.5	High:CH9	2452

Note: According exploratory test, EUT will have maximum output power in those data rate. so those data rate were used for all test.

4.5 Channel list

For IEEE 802.11b/g and IEEE 802.11n/HT20 with 2.4G					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
CH1	2412	CH5	2432	CH9	2452
CH2	2417	CH6	2437	CH10	2457
CH3	2422	CH7	2442	CH11	2462
CH4	2427	CH8	2447		

For IEEE 802.11n/HT40 with 2.4G					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
CH1	/	CH5	2432	CH9	2452
CH2	/	CH6	2437	/	/
CH3	2422	CH7	2442	/	/
CH4	2427	CH8	2447	/	/

4.6 Test Conditions

Temperature range	21-25°C
Humidity range	40-75%
Pressure range	86-106kPa

4.7 Measurement Uncertainty (95% confidence levels, k=2)

Item	MU	Remark
Uncertainty for Power point Conducted Emissions Test	2.42dB	
Uncertainty for Radiation Emission test in 3m chamber (below 30MHz)	2.13 dB	Polarize: V
	2.57dB	Polarize: H
Uncertainty for Radiation Emission test in 3m chamber (30MHz to 1GHz)	3.54dB	Polarize: V
	4.1dB	Polarize: H
Uncertainty for Radiation Emission test in 3m chamber (1GHz to 25GHz)	2.08dB	Polarize: H
	2.56dB	Polarize: V
Uncertainty for radio frequency	1×10^{-9}	
Uncertainty for conducted RF Power	0.65dB	
Uncertainty for temperature	0.2°C	
Uncertainty for humidity	1%	
Uncertainty for DC and low frequency voltages	0.06%	

5 Spurious Emission

5.1 Radiation Emission

5.1.1 Radiation Emission Limits(15.209)

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3


Harmonic emissions limits comply with below 54 dBuV/m at 3m. Other emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or comply with the radiated emissions limits specified in section 15.209(a) limit in the table below has to be followed.

NOTE:


- a) The tighter limit applies at the band edges.
- b) Emission Level(dB uV/m)=20log Emission Level(Uv/m)

5.1.2 Test Setup


See the next page

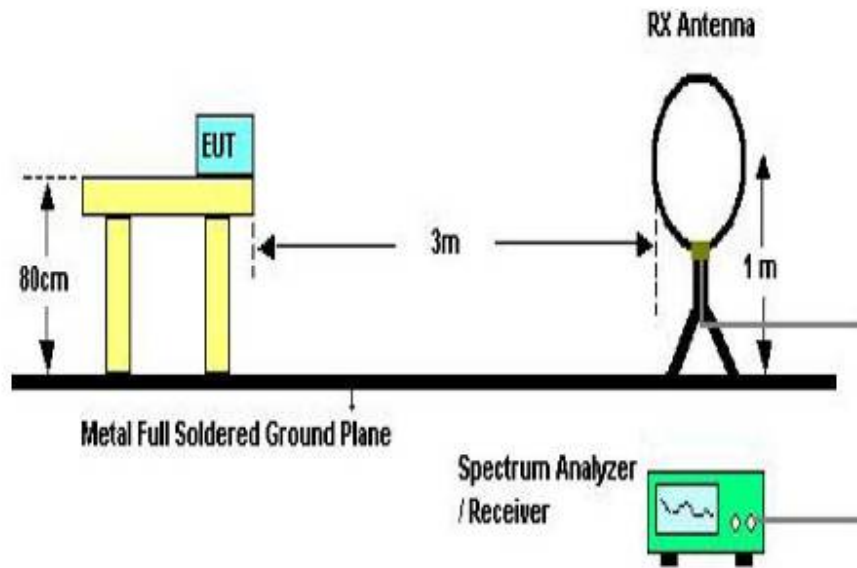

Below 30MHz Test Setup

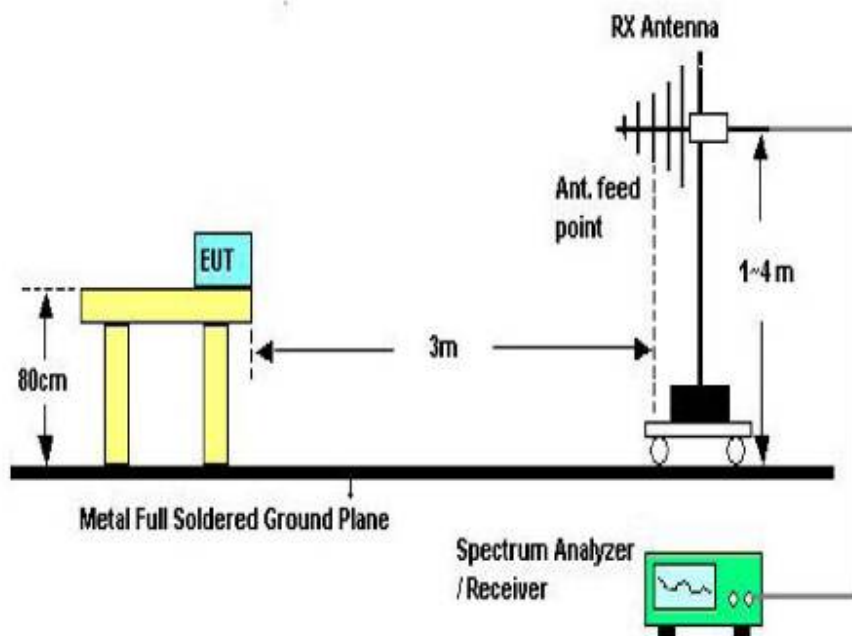

Above 30MHz Test Setup

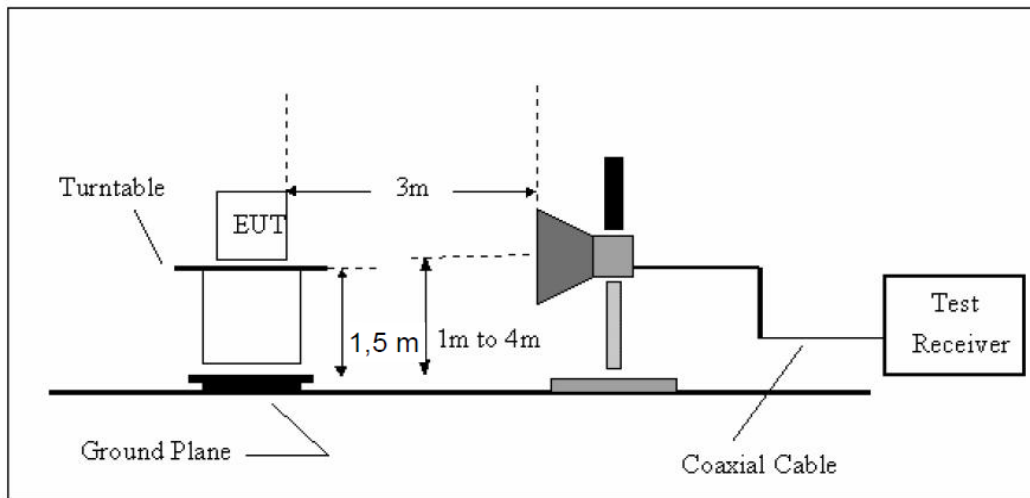

Above 1GHz Test Setup

5.1.3 Test Procedure

- The measuring distance of 3m shall be used for measurements at frequency up to 1GHz and above 1GHz, The EUT was placed on a rotating 0.8 m high above ground, The table was rotated 360 degrees to determine the position of the highest radiation
- The Test antenna shall vary between 1m and 4m, Both Horizontal and Vertical antenna are set of make measurement.
- The initial step in collecting conducted emission data is a spectrum analyzer Peak detector mode pre-scanning the measurement frequency range. Significant Peaks are then marked. and then Qusia Peak Detector mode premeasured
- If Peak value comply with QP limit Below 1GHz. The EUT deemed to comply with QP limit. But the Peak value and average value both need to comply with applicable limit above 1GHz.
- For the actual test configuration, please see the test setup photo.

5.1.4 Test Equipment Setting For emission test Result

9KHz~150KHz	RBW 200Hz	VBW1KHz
150KHz~30MHz	RBW 9KHz	VBW 30KHz
30MHz~1GHz	RBW 120KHz	VBW 300KHz
Above 1GHz	RBW 1MHz	VBW 3MHz

5.1.5 Test Condition

Continual Transmitting in maximum power.

5.1.6 Test Result

We have scanned the 9KHz from 25GHz to the EUT.
Detailed information please see the following page.


From 9KHz to 30MHz: Conclusion: PASS

Note: The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Site: LAB	Polarization: <i>Vertical</i>	Temperature: 23.5
Limit: FCC Part15 Class B Radiation	Power: DC 5V	Humidity: 51 %
EUT: 802.11ac Wireless USB Adapter	Distance: 3m	
M/N: U0639		
Mode:		
Note:		

Radiated Emission Measurement

File :U0639 2017 Data :#1 Date: 2017/4/27 Time: 9:00:00

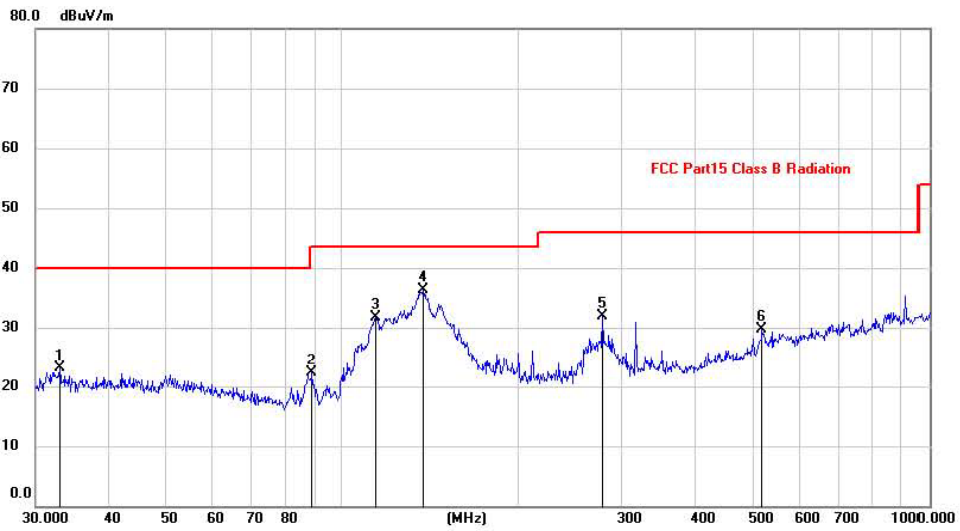


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1		32.9791	9.66	13.44	23.10	40.00	-16.90	peak			
2		88.9637	12.63	9.77	22.40	43.50	-21.10	peak			
3		114.1137	19.80	11.96	31.76	43.50	-11.74	peak			
4	*	137.4202	22.71	13.67	36.38	43.50	-7.12	peak			
5		277.0935	18.89	12.92	31.81	46.00	-14.19	peak			
6		519.0649	11.79	17.84	29.63	46.00	-16.37	peak			

Site: LAB	Polarization: Horizontal	Temperature: 23.5
Limit: FCC Part15 Class B Radiation	Power: DC 5V	Humidity: 51 %
EUT: 802.11ac Wireless USB Adapter	Distance: 3m	
M/N: U0639		
Mode:		
Note:		

Radiated Emission Measurement

File :U0639 2017 Data :#2 Date: 2017/4/27 Time: 9:03:55

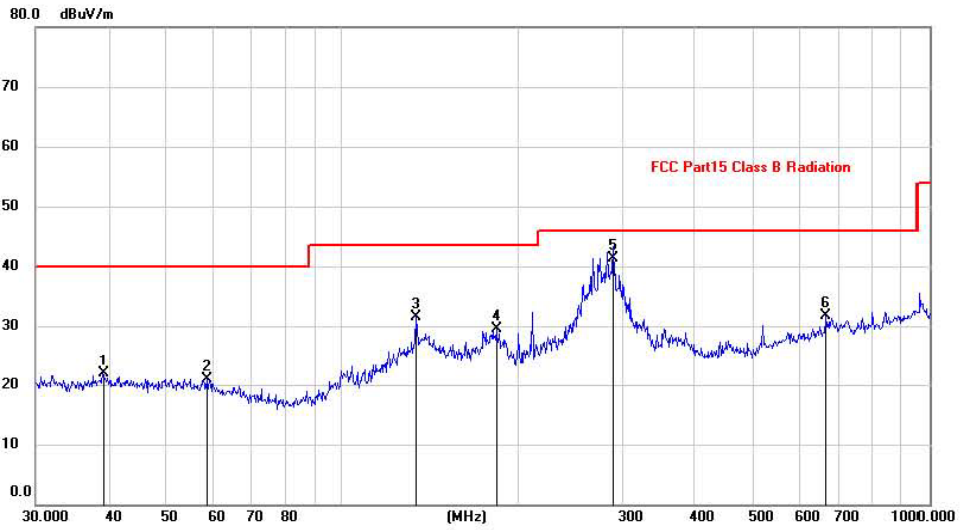

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		39.1616	7.79	14.21	22.00	40.00	-18.00			peak
2		58.6126	7.89	13.10	20.99	40.00	-19.01			peak
3		133.6188	17.99	13.45	31.44	43.50	-12.06			peak
4		183.2005	17.78	11.76	29.54	43.50	-13.96			peak
5	*	289.0021	28.19	13.11	41.30	46.00	-4.70			QP
6		670.4893	11.18	20.51	31.69	46.00	-14.31			peak

Remark: All modes and channels have been tested and only worst data of 802.11b, 2412MHz is listed in this report.

From 1G-25GHz

IEEE 802.11b

EUT	802.11ac Wireless USB Adapter	Model Name	U0639
Temperature	26°C	Relative Humidity	56%
Pressure	960hPa	Test voltage	DC 5V From USB port
Test Mode	TX Low		

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
1124	V	43.59	---	-11.21	32.38	---	74	54	41.62	Peak
4824	V	36.74	---	0.64	37.38	---	74	54	36.62	Peak
N/A										

EUT	802.11ac Wireless USB Adapter	Model Name	U0639
Temperature	26°C	Relative Humidity	56%
Pressure	960hPa	Test voltage	DC 5V From USB port
Test Mode	TX Low		

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
1124	H	44.67	---	-11.21	33.46	---	74	54	40.54	Peak
4824	H	35.37	---	0.64	36.01	---	74	54	37.99	Peak
N/A										

Notes: AV Means AV detector test data, Peak Means Peak detector test data.

Emissions attenuated more than 20 dB below the permissible value are not reported.

EUT	802.11ac Wireless USB Adapter	Model Name	U0639
Temperature	26°C	Relative Humidity	56%
Pressure	960hPa	Test voltage	DC 5V From USB port
Test Mode	TX Mid		

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
1124	V	42.91	---	-11.21	31.7	---	74	54	42.3	Peak
4874	V	37.53	---	0.76	38.29	---	74	54	35.71	Peak

EUT	802.11ac Wireless USB Adapter	Model Name	U0639
Temperature	26°C	Relative Humidity	56%
Pressure	960hPa	Test voltage	DC 5V From USB port
Test Mode	TX Mid		

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
1103	H	42.68	---	-11.21	31.47	---	74	54	42.53	Peak
4874	H	35.42	---	0.76	36.18	---	74	54	37.82	Peak

Notes: AV Means AV detector test data, Peak Means Peak detector test data.

Emissions attenuated more than 20 dB below the permissible value are not reported.

EUT	802.11ac Wireless USB Adapter	Model Name	U0639
Temperature	26°C	Relative Humidity	56%
Pressure	960hPa	Test voltage	DC 5V From USB port
Test Mode	TX High		

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
1103	V	43.99	---	-11.21	32.78	---	74	54	41.22	Peak
4924	V	32.87	---	0.87	33.74	---	74	54	40.26	Peak

EUT	802.11ac Wireless USB Adapter	Model Name	U0639
Temperature	26°C	Relative Humidity	56%
Pressure	960hPa	Test voltage	DC 5V From USB port
Test Mode	TX High		

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
1103	H	45.52	---	-11.21	34.31	---	74	54	39.69	Peak
4924	H	31.69	---	0.87	32.56	---	74	54	41.44	Peak

Notes: AV Means AV detector test data, Peak Means Peak detector test data.

Emissions attenuated more than 20 dB below the permissible value are not reported.

IEEE 802.11 g:

EUT	802.11ac Wireless USB Adapter	Model Name	U0639
Temperature	26°C	Relative Humidity	56%
Pressure	960hPa	Test voltage	DC 5V From USB port
Test Mode	TX Low		

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
1129	V	40.59	---	-11.15	29.44	---	74	54	44.56	Peak
2573	V	44.54	---	-7.19	37.35	---	74	54	36.65	Peak
3128	V	42.47	---	-5.25	37.22	---	74	54	36.78	Peak
4824	V	43.59	---	0.64	44.23	---	74	54	29.77	Peak
N/A										

EUT	802.11ac Wireless USB Adapter	Model Name	U0639
Temperature	26°C	Relative Humidity	56%
Pressure	960hPa	Test voltage	DC 5V From USB port
Test Mode	TX Low		

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
1263	H	41.25	---	-10.52	30.73	---	74	54	43.27	Peak
2059	H	42.63	---	-8.57	34.06	---	74	54	39.94	Peak
3391	H	44.51	---	-4.74	39.77	---	74	54	34.23	Peak
4824	H	40.25	---	0.64	40.89	---	74	54	33.11	Peak
N/A										

Notes: AV Means AV detector test data, Peak Means Peak detector test data.

Emissions attenuated more than 20 dB below the permissible value are not reported.

EUT	802.11ac Wireless USB Adapter	Model Name	U0639
Temperature	26°C	Relative Humidity	56%
Pressure	960hPa	Test voltage	DC 5V From USB port
Test Mode	TX Mid		

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
1376	V	42.08	---	-10.45	31.63	---	74	54	42.37	Peak
2564	V	43.37	---	-7.63	35.74	---	74	54	38.26	Peak
3342	V	40.94	---	-5.23	35.71	---	74	54	38.29	Peak
4874	V	42.67	---	0.76	43.43	---	74	54	30.57	Peak

EUT	802.11ac Wireless USB Adapter	Model Name	U0639
Temperature	26°C	Relative Humidity	56%
Pressure	960hPa	Test voltage	DC 5V From USB port
Test Mode	TX Mid		

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
1317	H	41.91	---	-10.71	31.2	---	74	54	42.8	Peak
2362	H	42.61	---	-7.41	35.2	---	74	54	38.8	Peak
3551	H	40.9	---	-4.75	36.15	---	74	54	37.85	Peak
4874	H	38.61	---	0.76	39.37	---	74	54	34.63	Peak

Notes: AV Means AV detector test data, Peak Means Peak detector test data.

Emissions attenuated more than 20 dB below the permissible value are not reported.

EUT	802.11ac Wireless USB Adapter	Model Name	U0639
Temperature	26°C	Relative Humidity	56%
Pressure	960hPa	Test voltage	DC 5V From USB port
Test Mode	TX High		

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
1325	V	41.25	---	-10.6	30.65	---	74	54	43.35	Peak
2902	V	42.94	---	-5.27	37.67	---	74	54	36.33	Peak
3846	V	45.27	---	-3.84	41.43	---	74	54	32.57	Peak
4924	V	40.28	---	0.87	41.15	---	74	54	32.85	Peak

EUT	802.11ac Wireless USB Adapter	Model Name	U0639
Temperature	26°C	Relative Humidity	56%
Pressure	960hPa	Test voltage	DC 5V From USB port
Test Mode	TX High		

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
1439	H	43.05	---	-10.24	32.81	---	74	54	41.19	Peak
2143	H	42.17	---	-8.27	33.9	---	74	54	40.1	Peak
3712	H	44.39	---	-6.04	38.35	---	74	54	35.65	Peak
4924	H	46.08	---	0.87	46.95	---	74	54	27.05	Peak

Notes: AV Means AV detector test data, Peak Means Peak detector test data.

Emissions attenuated more than 20 dB below the permissible value are not reported.

IEEE 802.11n/HT20 with 2.4G

EUT	802.11ac Wireless USB Adapter	Model Name	U0639
Temperature	26°C	Relative Humidity	56%
Pressure	960hPa	Test voltage	DC 5V From USB port
Test Mode	TX Low		

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
1347	V	42.09	---	-10.41	31.68	---	74	54	42.32	Peak
2651	V	41.68	---	-6.52	35.16	---	74	54	38.84	Peak
3916	V	41.87	---	-3.19	38.68	---	74	54	35.32	Peak
4824	V	40.62	---	0.64	41.26	---	74	54	32.74	Peak
N/A										

EUT	802.11ac Wireless USB Adapter	Model Name	U0639
Temperature	26°C	Relative Humidity	56%
Pressure	960hPa	Test voltage	DC 5V From USB port
Test Mode	TX Low		

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
1451	H	42.12	---	-10.52	31.6	---	74	54	42.4	Peak
2864	H	42.39	---	-6.15	36.24	---	74	54	37.76	Peak
3659	H	41.96	---	-4.24	37.72	---	74	54	36.28	Peak
4824	H	40.88	---	0.64	41.52	---	74	54	32.48	Peak
N/A										

Notes: AV Means AV detector test data, Peak Means Peak detector test data.

Emissions attenuated more than 20 dB below the permissible value are not reported.

EUT	802.11ac Wireless USB Adapter	Model Name	U0639
Temperature	26°C	Relative Humidity	56%
Pressure	960hPa	Test voltage	DC 5V From USB port
Test Mode	TX Mid		

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
1351	V	41.81	---	-10.84	30.97	---	74	54	43.03	Peak
2154	V	42.25	---	-8.52	33.73	---	74	54	40.27	Peak
3407	V	41.49	---	-4.33	37.16	---	74	54	36.84	Peak
4874	V	40.61	---	0.76	41.37	---	74	54	32.63	Peak

EUT	802.11ac Wireless USB Adapter	Model Name	U0639
Temperature	26°C	Relative Humidity	56%
Pressure	960hPa	Test voltage	DC 5V From USB port
Test Mode	TX Mid		

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
1206	H	41.71	---	-10.55	31.16	---	74	54	42.84	Peak
2454	H	41.87	---	-7.28	34.59	---	74	54	39.41	Peak
3202	H	42.14	---	-5.36	36.78	---	74	54	37.22	Peak
4874	H	40.88	---	0.76	41.64	---	74	54	32.36	Peak

Notes: AV Means AV detector test data, Peak Means Peak detector test data.

Emissions attenuated more than 20 dB below the permissible value are not reported.

EUT	802.11ac Wireless USB Adapter	Model Name	U0639
Temperature	26°C	Relative Humidity	56%
Pressure	960hPa	Test voltage	DC 5V From USB port
Test Mode	TX High		

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
1374	V	43.14	---	-10.21	32.93	---	74	54	41.07	Peak
2036	V	42.02	---	-6.34	35.68	---	74	54	38.32	Peak
3651	V	41.91	---	-4.7	37.21	---	74	54	36.79	Peak
4924	V	40.74	---	0.87	41.61	---	74	54	32.39	Peak

EUT	802.11ac Wireless USB Adapter	Model Name	U0639
Temperature	26°C	Relative Humidity	56%
Pressure	960hPa	Test voltage	DC 5V From USB port
Test Mode	TX High		

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
1315	H	41.69	---	-10.03	31.66	---	74	54	42.34	Peak
3483	H	41.99	---	-4.34	37.65	---	74	54	36.35	Peak
4117	H	41.8	---	-2.56	39.24	---	74	54	34.76	Peak
4924	H	39.85	---	0.87	40.72	---	74	54	33.28	Peak

Notes: AV Means AV detector test data, Peak Means Peak detector test data.

Emissions attenuated more than 20 dB below the permissible value are not reported.

IEEE 802.11n/HT40 with 2.4G

EUT	802.11ac Wireless USB Adapter	Model Name	U0639
Temperature	26°C	Relative Humidity	56%
Pressure	960hPa	Test voltage	DC 5V From USB port
Test Mode	TX Low		

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
1245	V	42.15	---	-10.16	31.99	---	74	54	42.01	Peak
2456	V	42.02	---	-6.91	35.11	---	74	54	38.89	Peak
3402	V	41.31	---	-4.74	36.57	---	74	54	37.43	Peak
4844	V	39.9	---	0.64	40.54	---	74	54	33.46	Peak
N/A										

EUT	802.11ac Wireless USB Adapter	Model Name	U0639
Temperature	26°C	Relative Humidity	56%
Pressure	960hPa	Test voltage	DC 5V From USB port
Test Mode	TX Low		

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
1442	H	41.92	---	-10.15	31.77	---	74	54	42.23	Peak
2347	H	41.78	---	-7.52	34.26	---	74	54	39.74	Peak
3075	H	42.19	---	-5.34	36.85	---	74	54	37.15	Peak
4844	H	40.59	---	0.64	41.23	---	74	54	32.77	Peak
N/A										

Notes: AV Means AV detector test data, Peak Means Peak detector test data.

Emissions attenuated more than 20 dB below the permissible value are not reported.

EUT	802.11ac Wireless USB Adapter	Model Name	U0639
Temperature	26°C	Relative Humidity	56%
Pressure	960hPa	Test voltage	DC 5V From USB port
Test Mode	TX Mid		

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
1664	V	42.48	---	-9.45	33.03	---	74	54	40.97	Peak
2483	V	41.9	---	-7.37	34.53	---	74	54	39.47	Peak
3261	V	42.04	---	-5.42	36.62	---	74	54	37.38	Peak
4874	V	40.89	---	0.76	41.65	---	74	54	32.35	Peak

EUT	802.11ac Wireless USB Adapter	Model Name	U0639
Temperature	26°C	Relative Humidity	56%
Pressure	960hPa	Test voltage	DC 5V From USB port
Test Mode	TX Mid		

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
1558	H	42.11	---	-10.54	31.57	---	74	54	42.43	Peak
2286	H	42.45	---	-8.26	34.19	---	74	54	39.81	Peak
3119	H	41.41	---	-5.51	35.9	---	74	54	38.1	Peak
4874	H	40.66	---	0.76	41.42	---	74	54	32.58	Peak

Notes: AV Means AV detector test data, Peak Means Peak detector test data.

Emissions attenuated more than 20 dB below the permissible value are not reported.

EUT	802.11ac Wireless USB Adapter	Model Name	U0639
Temperature	26°C	Relative Humidity	56%
Pressure	960hPa	Test voltage	DC 5V From USB port
Test Mode	TX High		

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
1605	V	42.54	---	-9.74	32.8	---	74	54	41.2	Peak
2587	V	42.07	---	-7.59	34.48	---	74	54	39.52	Peak
3763	V	41.49	---	-3.81	37.68	---	74	54	36.32	Peak
4904	V	39.84	---	0.87	40.71	---	74	54	33.29	Peak

EUT	802.11ac Wireless USB Adapter	Model Name	U0639
Temperature	26°C	Relative Humidity	56%
Pressure	960hPa	Test voltage	DC 5V From USB port
Test Mode	TX High		

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
1743	H	42.21	---	-9.34	32.87	---	74	54	41.13	Peak
2880	H	42.39	---	-6.15	36.24	---	74	54	37.76	Peak
3752	H	42.75	---	-4.27	38.48	---	74	54	35.52	Peak
4904	H	41.18	---	0.87	42.05	---	74	54	31.95	Peak

Notes: AV Means AV detector test data, Peak Means Peak detector test data.

Emissions attenuated more than 20 dB below the permissible value are not reported.

6 POWER LINE CONDUCTED EMISSION

6.1 Conducted Emission Limits(15.207)


Frequency MHz	Limits dB(μ V)	
	Quasi-peak Level	Average Level
0.15 -0.50	66 -56*	56 - 46*
0.50 -5.00	56	46
5.00 -30.00	60	50

Notes: 1. *Decreasing linearly with logarithm of frequency.

2. The lower limit shall apply at the transition frequencies.

3. The limit decreases in line with the logarithm of the frequency in the rang of 0.15 to 0.50 MHz.

6.2 Test Setup

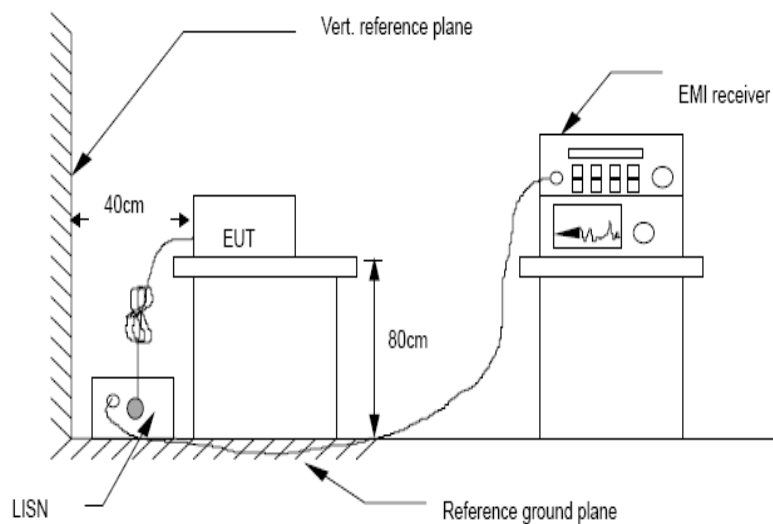

6.3 Test Procedure

The EUT is put on the plane 0.8m high above the ground by insulating support and is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC lines are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.4:2014 on Conducted Emission Measurement. The bandwidth of test receiver is set at 9 kHz.

6.4 Test Results

Worse case is reported only


PASS

Detailed information please see the following page.

Site: LAB
 Limit: FCC Part 15 CLASS B QP
 EUT: 802.11ac Wireless USB Adapter
 M/N: U0639
 Mode:
 Note:

Phase: **N**
 Power: DC 5V
 Temperature: 24.2
 Humidity: 53 %


Conducted Emission Measurement

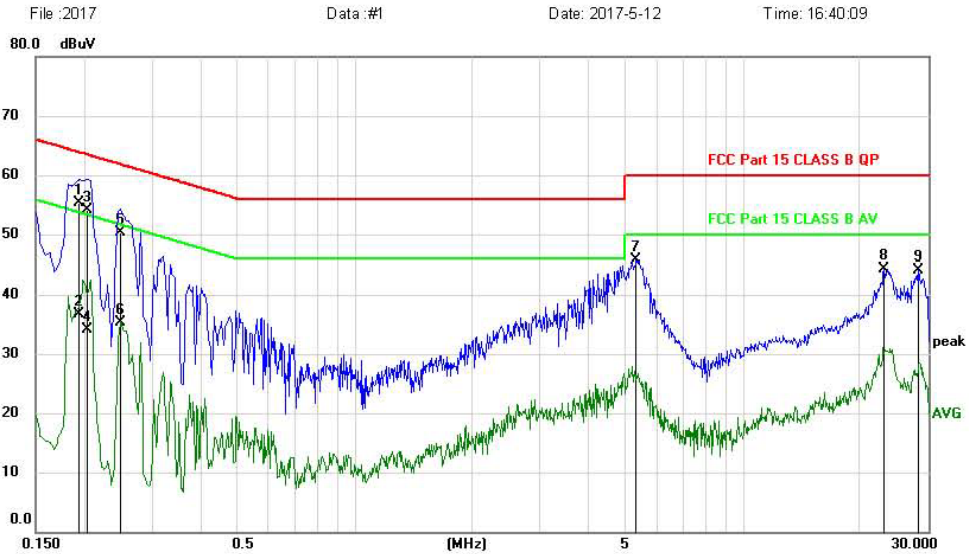

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	*	0.1949	45.66	9.67	55.33	63.83	-8.50	QP	
2		0.1949	26.97	9.67	36.64	53.83	-17.19	AVG	
3		0.2040	44.51	9.67	54.18	63.45	-9.27	QP	
4		0.2040	24.47	9.67	34.14	53.45	-19.31	AVG	
5		0.2489	40.61	9.69	50.30	61.79	-11.49	QP	
6		0.2489	25.52	9.69	35.21	51.79	-16.58	AVG	
7		5.3250	35.54	10.17	45.71	60.00	-14.29	peak	
8		23.0955	33.57	10.66	44.23	60.00	-15.77	peak	
9		28.3785	33.23	10.92	44.15	60.00	-15.85	peak	

Site: LAB	Phase: L1	Temperature: 24.2
Limit: FCC Part 15 CLASS B QP	Power: DC 5V	Humidity: 53 %
EUT: 802.11ac Wireless USB Adapter		
M/N: U0639		
Mode:		
Note:		

Conducted Emission Measurement

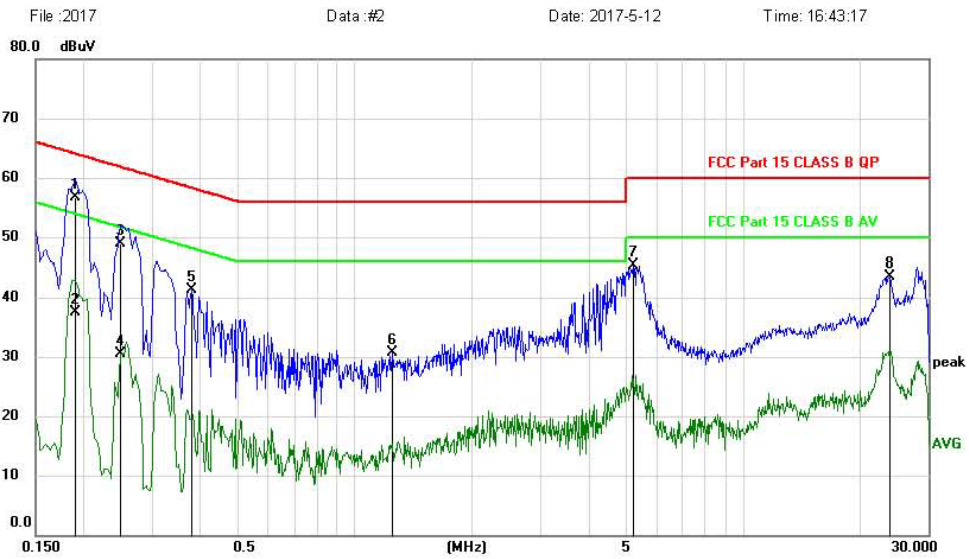

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	*	0.1905	47.01	9.67	56.68	64.01	-7.33	QP	
2		0.1905	27.90	9.67	37.57	54.01	-16.44	AVG	
3		0.2490	39.30	9.69	48.99	61.79	-12.80	QP	
4		0.2490	20.90	9.69	30.59	51.79	-21.20	AVG	
5		0.3795	31.65	9.70	41.35	58.29	-16.94	peak	
6		1.2435	20.87	9.79	30.66	56.00	-25.34	peak	
7		5.2485	35.17	10.17	45.34	60.00	-14.66	peak	
8		23.9550	32.70	10.71	43.41	60.00	-16.59	peak	

Remark: All modes and channels have been tested and only worst data of 802.11b, 2412MHz is listed in this report.

7 Conducted Maximum Output Power

7.1 Test limit

Please refer section 15.247.

Regulation 15.247(b) The limit of Maximum Peak Output Power Measurement is 1W(30dBm)

7.2 Test Procedure

Details see the KDB558074 Meas Guidance V03

7.2.1 Place the EUT on the table and set it in transmitting mode.


7.2.2 Connected the EUT's antenna port to peak power meter by 20dB attenuator.

7.2.3 Measure out each mode and each bands peak output power of EUT.

Note: The cable loss and attenuator loss were offset into measure device as amplitude offset.

Details see the KDB558074 DTS Meas Guidance V03

7.3 Test Setup



7.4 Test Results

PASS

Detailed information please see the following page.

EUT: 802.11ac Wireless USB Adapter M/N: U0639						
Test date: 2017-05-05		Test site: RF site		Tested by: Simple Guan		
Mode	Frequency (MHz)	Ant Port	PK Output power(dBm)		Limit (dBm)	Margin (dB)
IEEE 802.11 b	CH1: 2412	0	8.60	8.60	30	21.40
		1	/			
	CH6: 2437	0	8.25	8.25	30	21.75
		1	/			
	CH11: 2462	0	8.64	8.64	30	21.36
		1	/			
IEEE 802.11 g	CH1: 2412	0	7.15	7.15	30	22.85
		1	/			
	CH6: 2437	0	7.87	7.87	30	22.13
		1	/			
	CH11: 2462	0	8.12	8.12	30	21.88
		1	/			
IEEE 802.11 n/HT20 with 2.4G	CH1: 2412	0	7.92	7.92	30	22.08
		1	/			
	CH6: 2437	0	7.85	7.85	30	22.15
		1	/			
	CH11: 2462	0	7.26	7.26	30	22.74
		1	/			
IEEE 802.11 n/HT40 with 2.4G	CH1: 2422	0	6.80	6.80	30	23.20
		1	/			
	CH4: 2437	0	6.99	6.99	30	23.01
		1	/			
	CH7: 2452	0	6.56	6.56	30	23.44
		1	/			
Conclusion: PASS						

8 PEAK POWER SPECTRAL DENSITY

8.1 Test limit

8.1.1 Please refer section 15.247.

8.1.2 For direct sequence systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.

8.1.3 The direct sequence operating of the hybrid system, with the frequency hopping operation turned off, shall comply with the power density requirements of paragraph (d) of this section.

8.2 Method of measurement

Details see the KDB558074 DTS Meas Guidance V03

8.2.1 Place the EUT on the table and set it in transmitting mode.


8.2.2 Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

8.2.3 Set the spectrum analyzer as RBW = 3kHz, VBW = 10kHz, span=5-30%EBW, detail see the test plot.

8.2.4 Record the max reading.

8.2.5 Repeat the above procedure until the measurements for all frequencies are completed.

8.3 Test Setup



8.4 Test Results


PASS.

Detailed information please see the following page.


EUT: 802.11ac Wireless USB Adapter M/N: U0639						
Test date: 2017-05-05		Test site: RF site		Tested by: Simple Guan		
Mode	Frequency (MHz)	Ant Port	PK Output power(dBm)		Limit (dBm)	Result
IEEE 802.11 b	CH1: 2412	0	-26.959	-26.959	8	PASS
		1	/			
	CH6: 2437	0	-24.531	-24.531	8	PASS
		1	/			
	CH11: 2462	0	-24.738	-24.738	8	PASS
		1	/			
IEEE 802.11 g	CH1: 2412	0	-26.613	-26.613	8	PASS
		1	/			
	CH6: 2437	0	-24.472	-24.709	8	PASS
		1	/			
	CH11: 2462	0	-24.865	-24.865	8	PASS
		1	/			
IEEE 802.11 n/HT20 with 2.4G	CH1: 2412	0	-26.438	-26.438	8	PASS
		1	/			
	CH6: 2437	0	-23.883	-25.029	8	PASS
		1	/			
	CH11: 2462	0	-23.171	-23.171	8	PASS
		1	/			
IEEE 802.11 n/HT40 with 2.4G	CH1: 2422	0	-27.939	-27.939	8	PASS
		1	/			
	CH4: 2437	0	-25.889	-25.889	8	PASS
		1	/			
	CH7: 2452	0	-25.273	-25.273	8	PASS
		1	/			
Conclusion: PASS						

IEEE 802.11b :


CH Low :

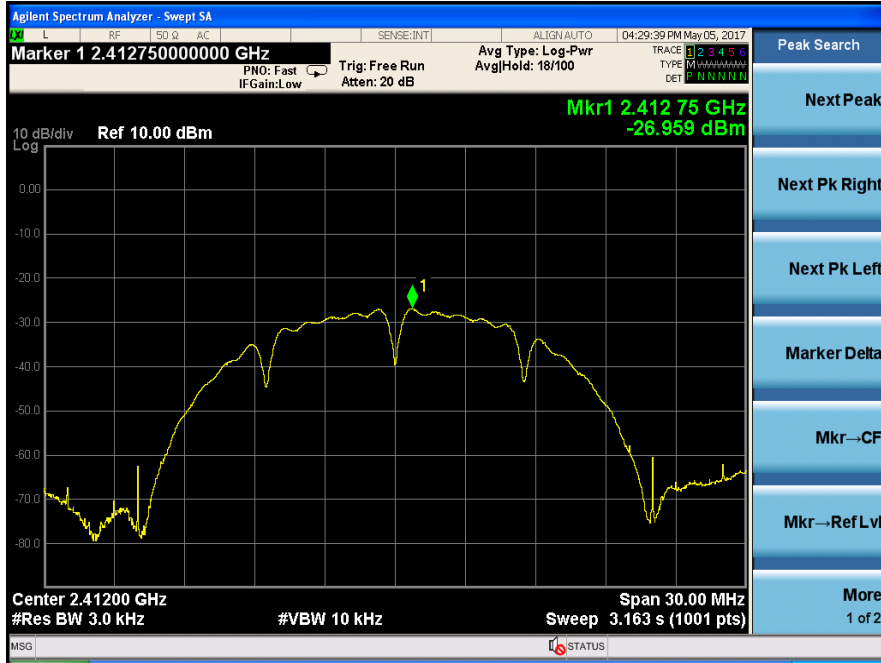


CH Mid:

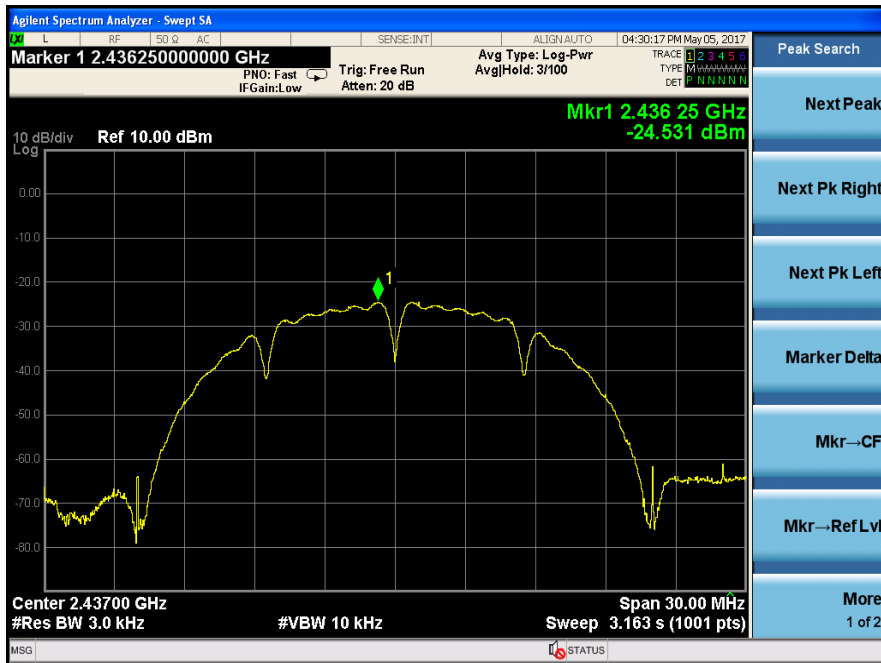


CH Hig:

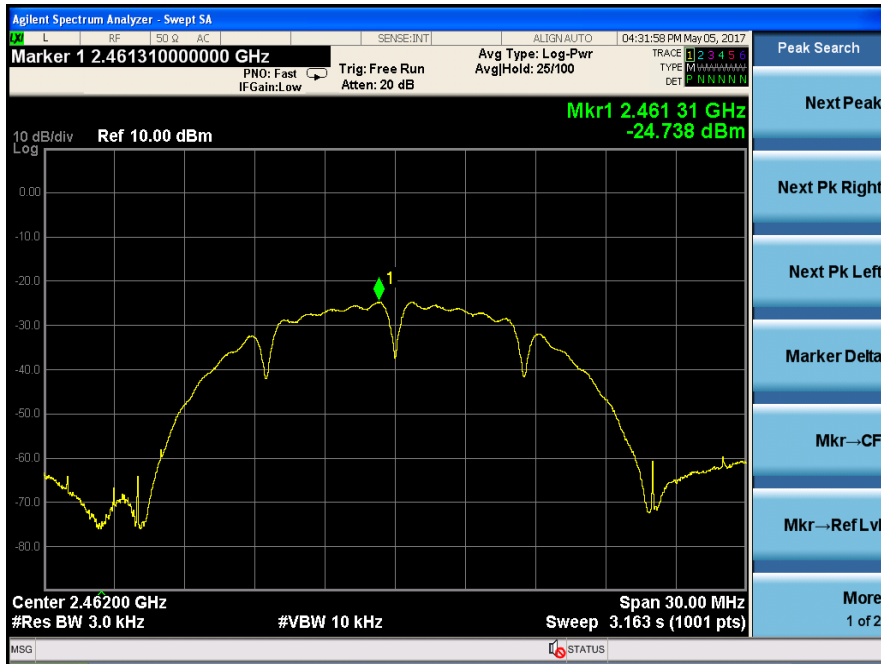


IEEE 802.11g :
CH Low

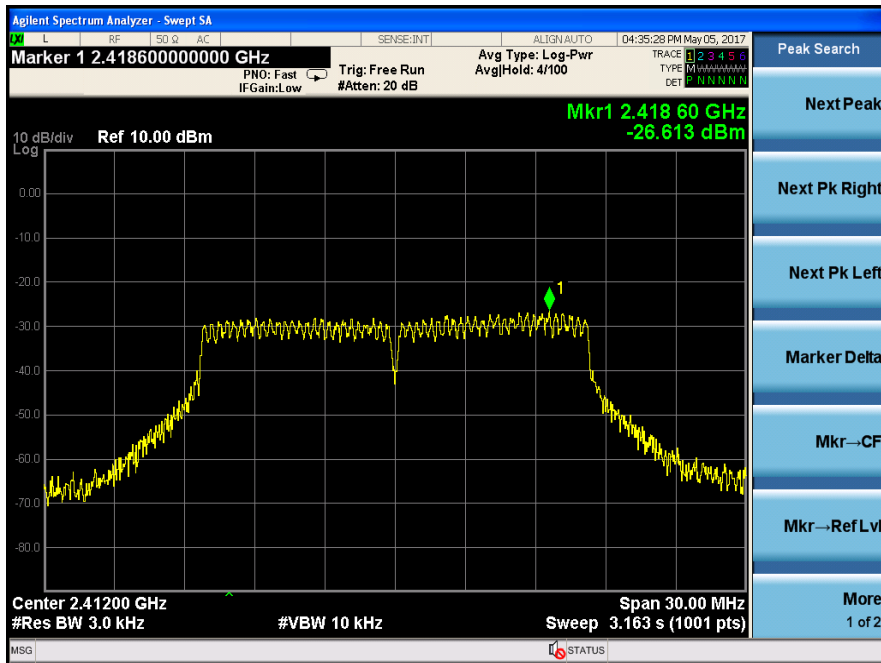

CH Mid:

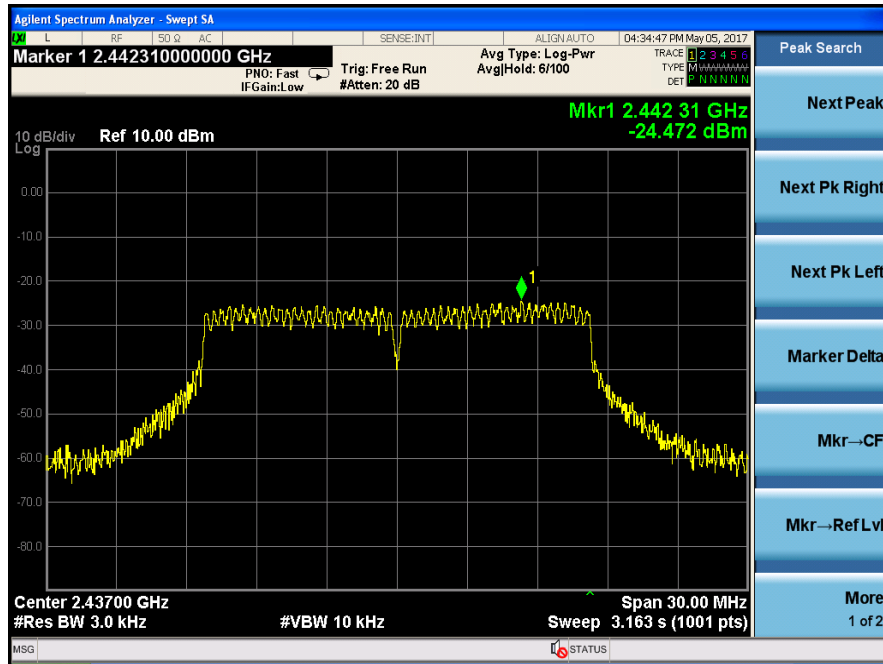


CH Hig:

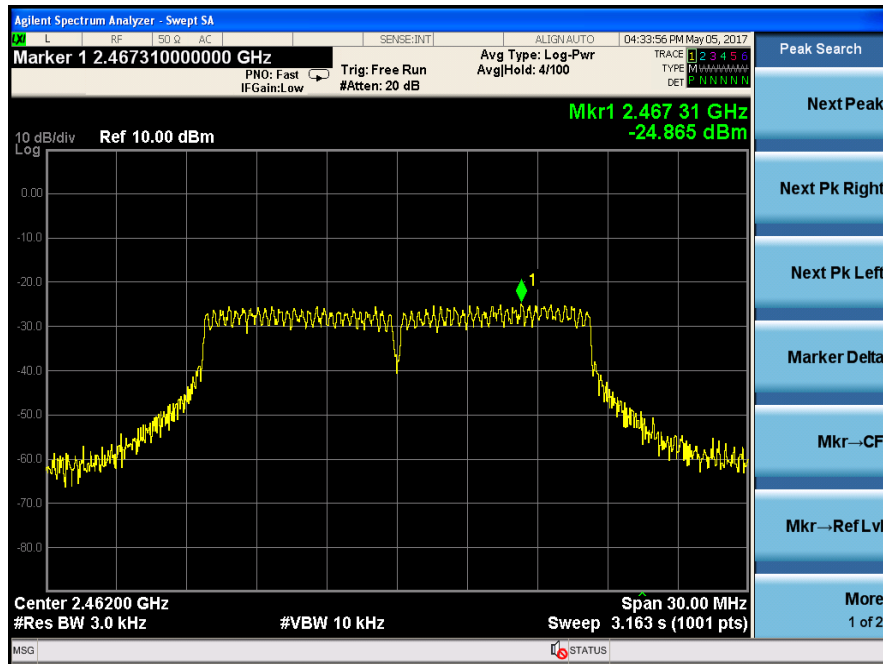


IEEE 802.11n HT20 :


CH Low :

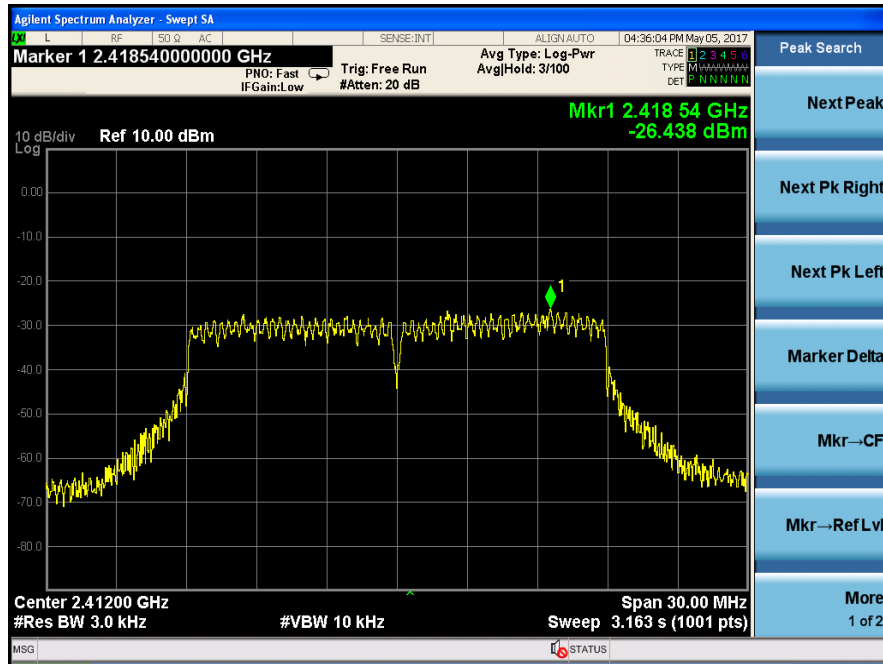


CH Mid:

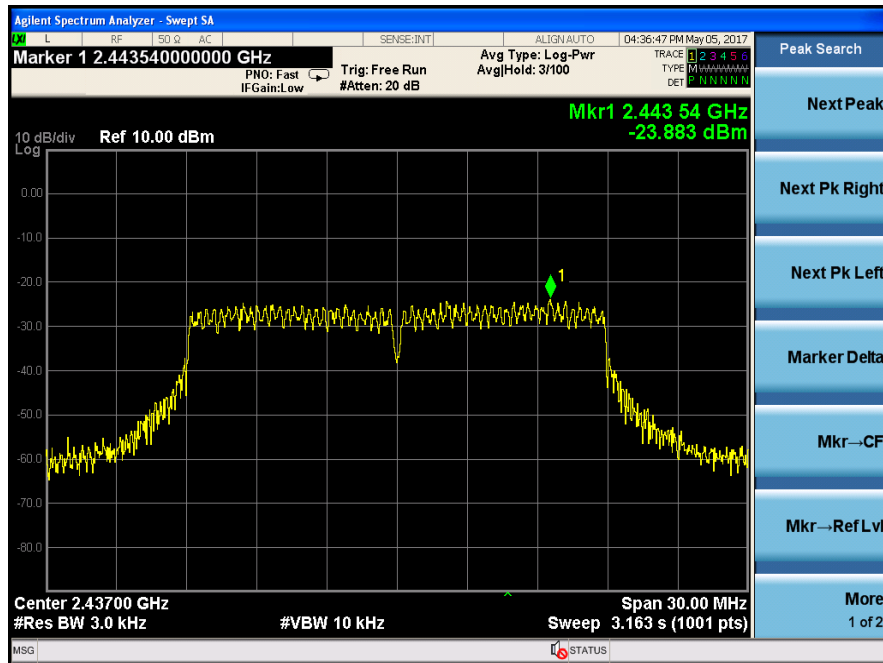


CH Hig:

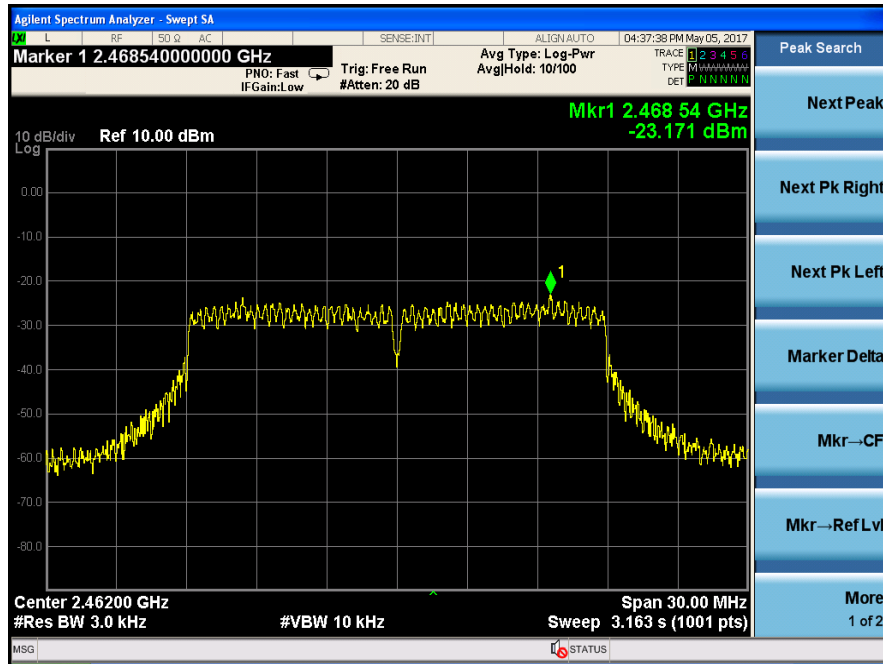


IEEE 802.11n HT40 :
CH Low :

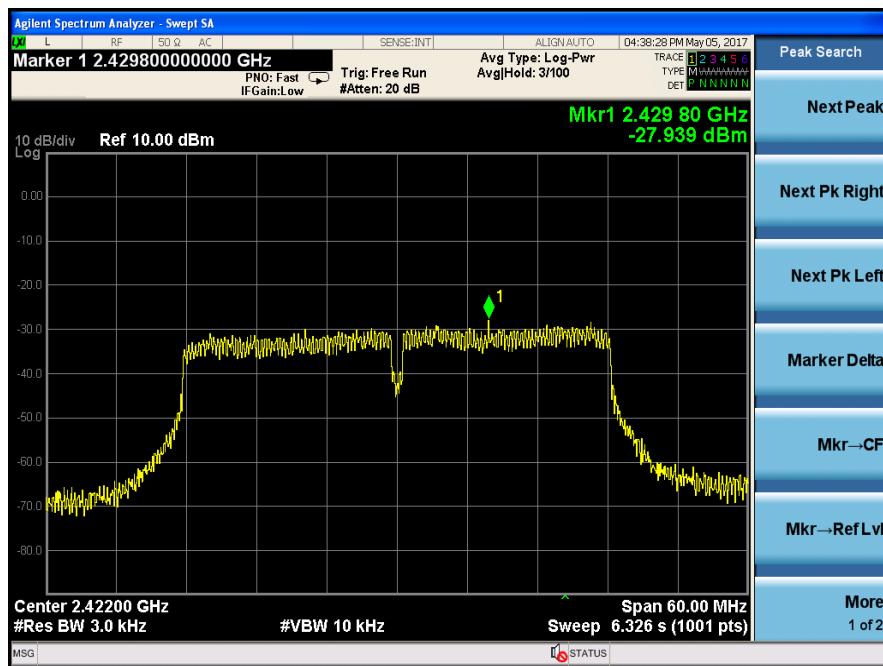

CH Mid:

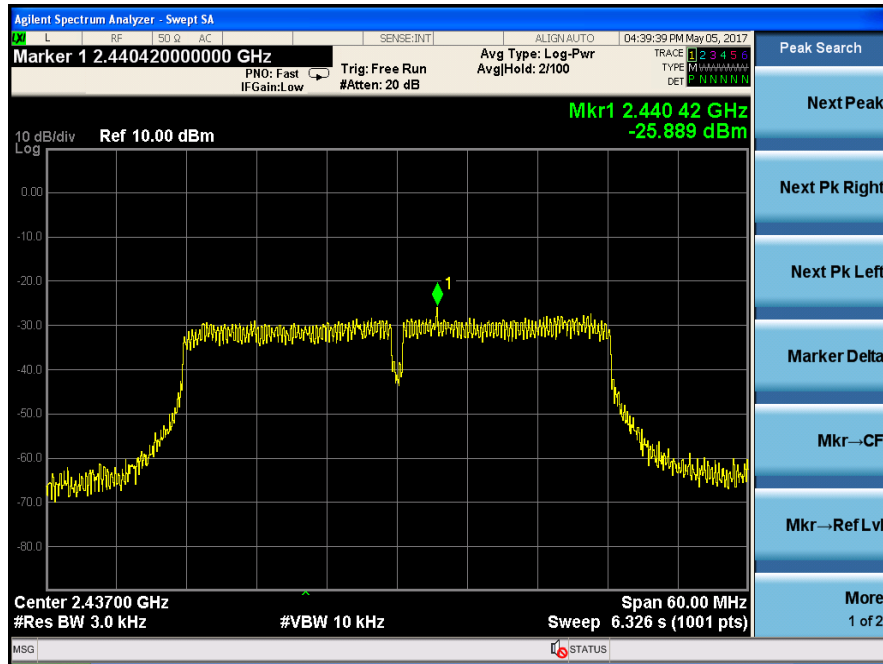

CH Hig:

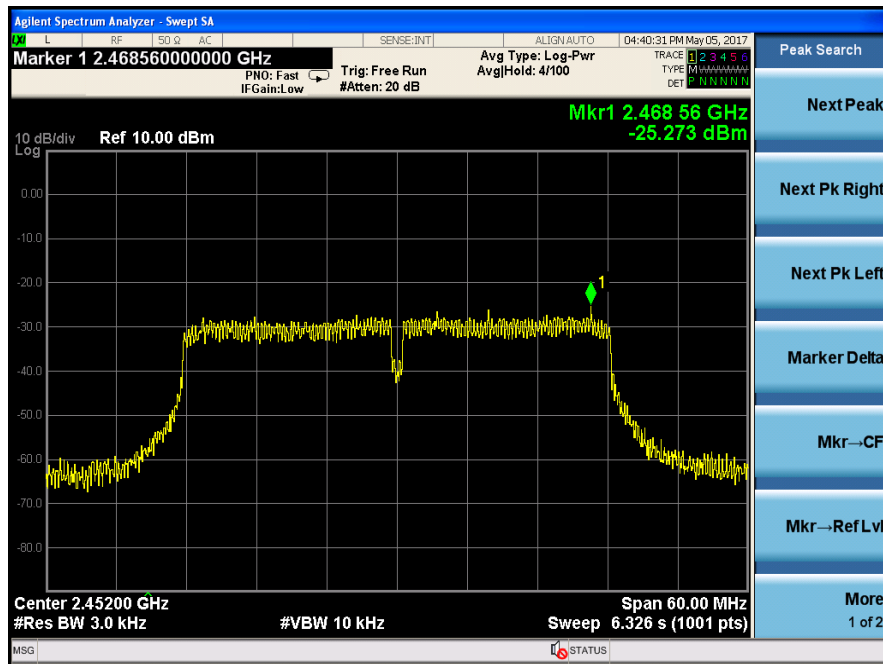

9 Bandwidth

9.1 Test limit

Please refer section 15.247


For direct sequence systems, the minimum 6dB bandwidth shall be at least 500 kHz.

9.2 Method of measurement

Details see the KDB558074 D01 Meas Guidance

- a) The bandwidth is measured at an amplitude level reduced 20dB from the reference level. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. Once the reference level is established, the equipment is conditioned with typical modulating signal to produce the worst-case (i.e. the widest) bandwidth.
- b) The test receiver set $RBW = 100\text{kHz}$, $VBW \geq 3RBW$, Peak Detector, Sweep time set auto, detail see the test plot.

9.3 Test Setup



9.4 Test Results


PASS.

Detailed information please see the following page.


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (MHz)	Result
IEEE 802.11b:					
Low	2412	10.14	15.089	0.5	PASS
Mid	2437	10.13	15.015	0.5	PASS
High	2462	10.14	15.029	0.5	PASS
IEEE 802.11g					
Low	2412	16.53	16.487	0.5	PASS
Mid	2437	16.58	16.493	0.5	PASS
High	2462	16.56	16.499	0.5	PASS
IEEE 802.11n/HT20:					
Low	2412	17.76	17.673	0.5	PASS
Mid	2437	17.77	17.669	0.5	PASS
High	2462	17.75	17.680	0.5	PASS
IEEE 802.11n/HT40:					
Low	2422	36.48	36.124	0.5	PASS
Mid	2437	36.48	36.152	0.5	PASS
High	2452	36.55	36.167	0.5	PASS

IEEE 802.11b:

CH Low :

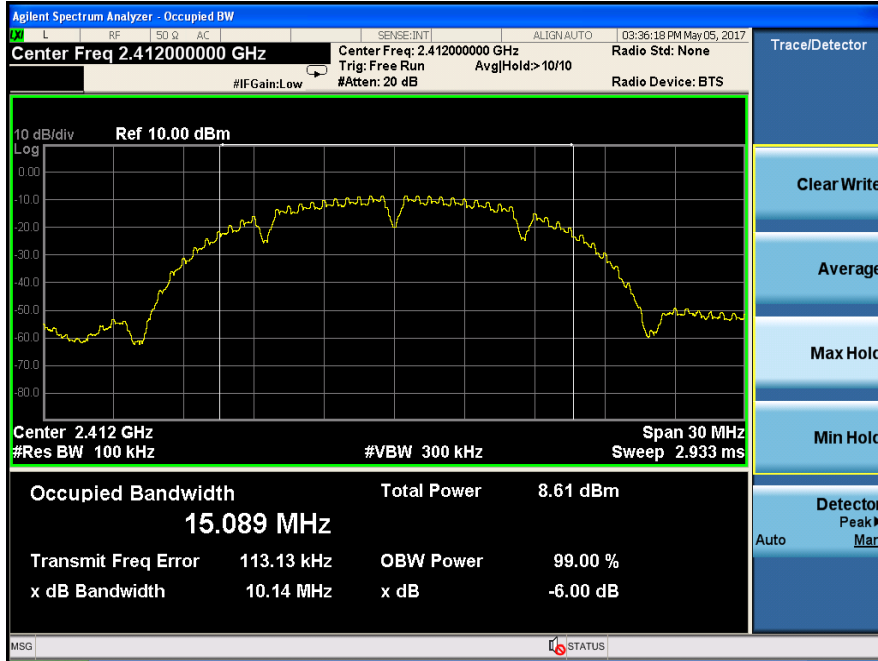

CH Mid :

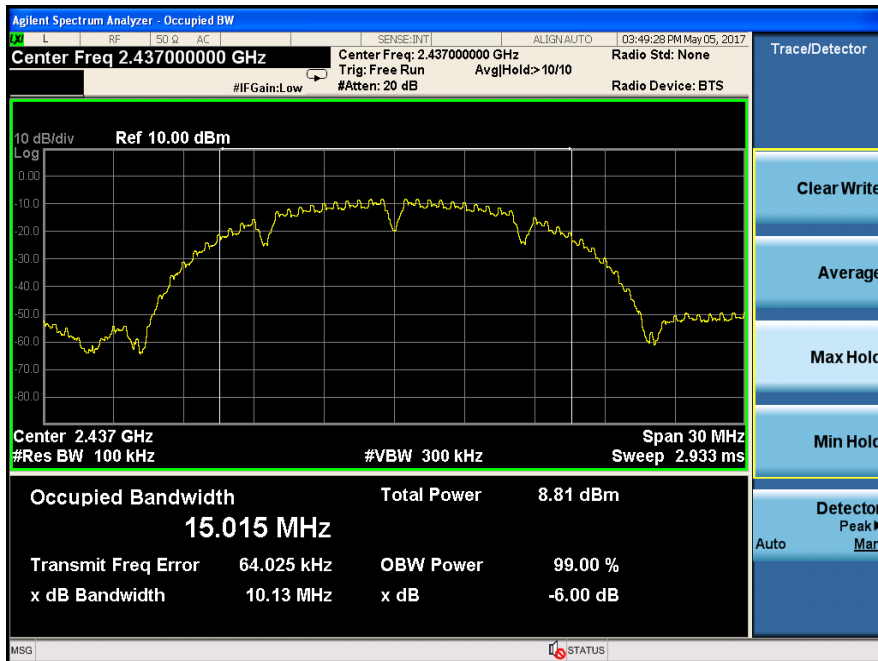


CH High :




IEEE 802.11g:


CH Low :

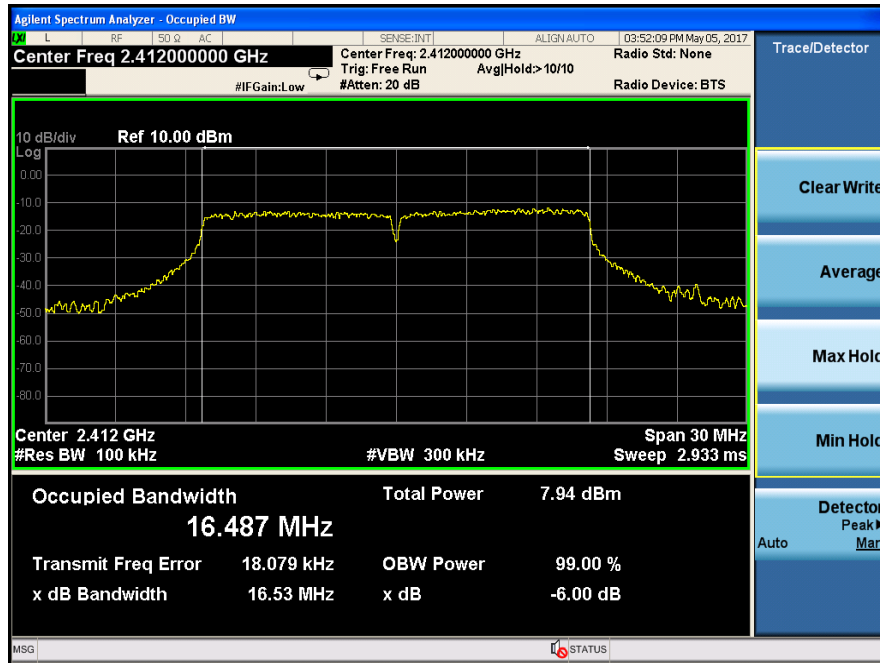

CH Mid:

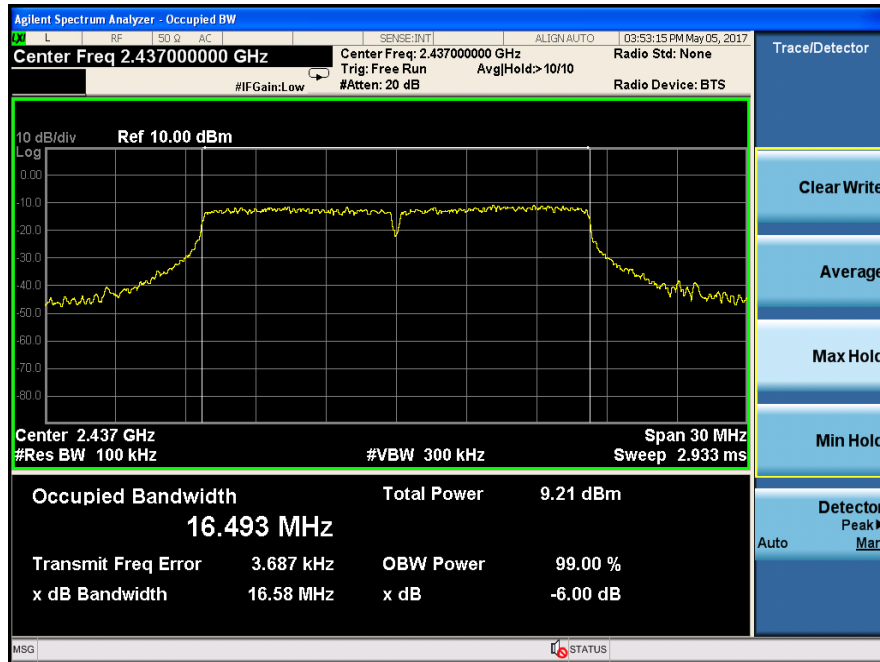


CH Hig:

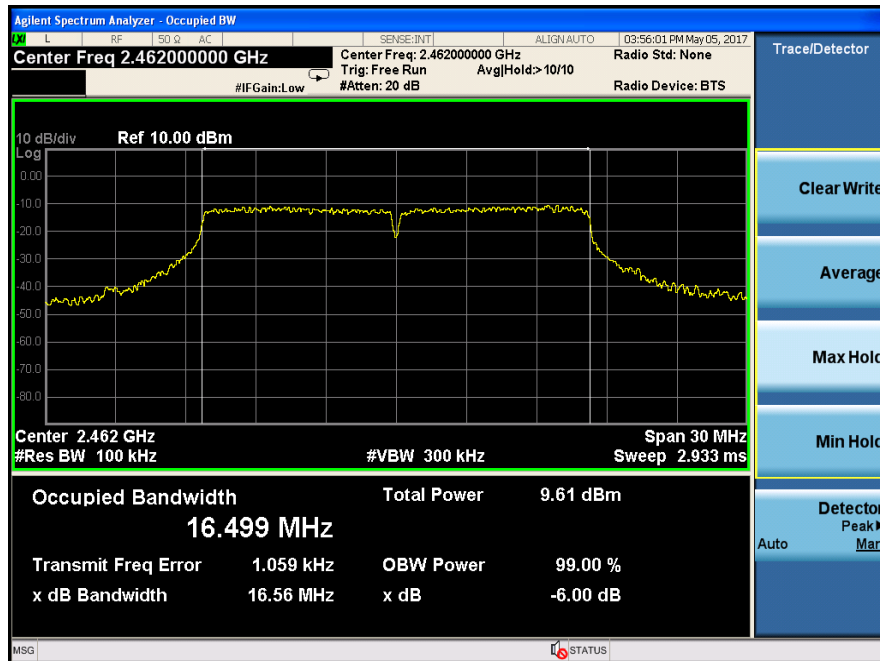


IEEE 802.11n HT20:


CH Low :

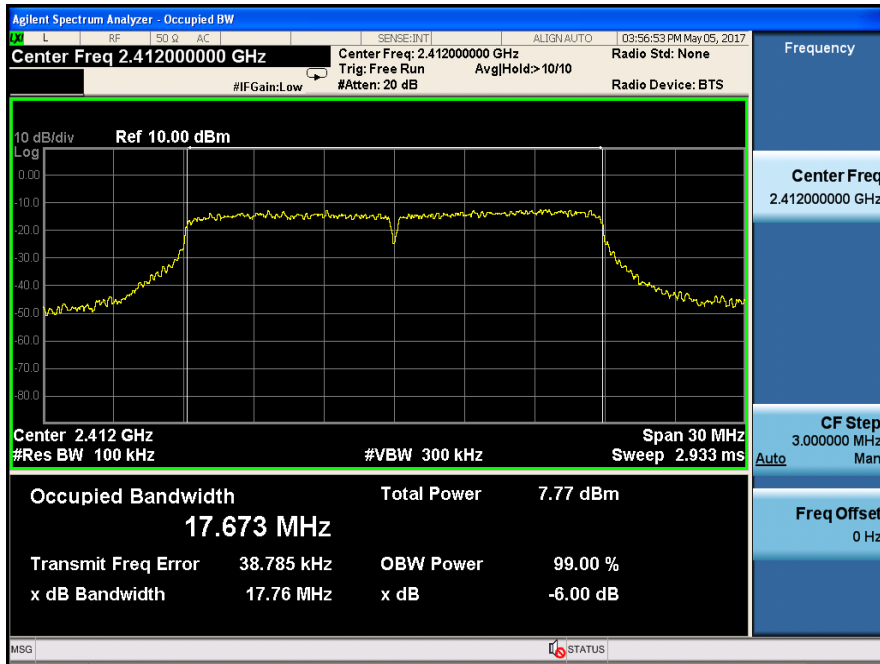

CH Mid :

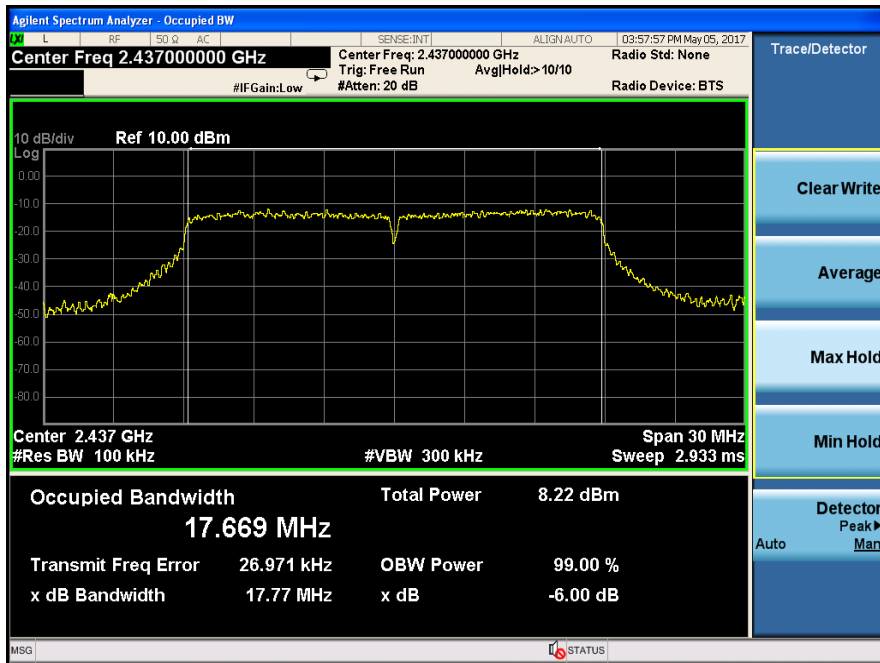


CH High :

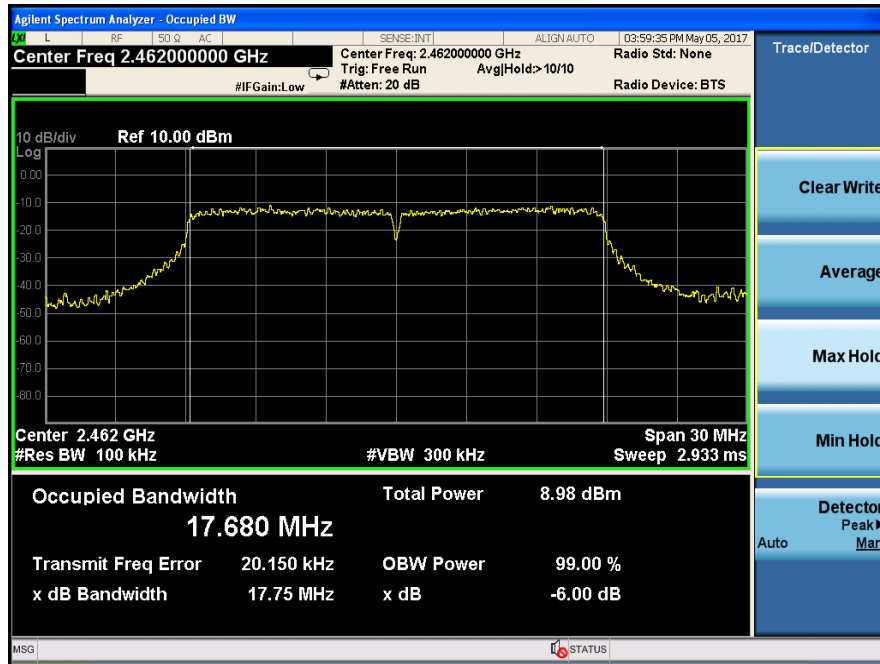


IEEE 802.11n/HT40:


CH Low :

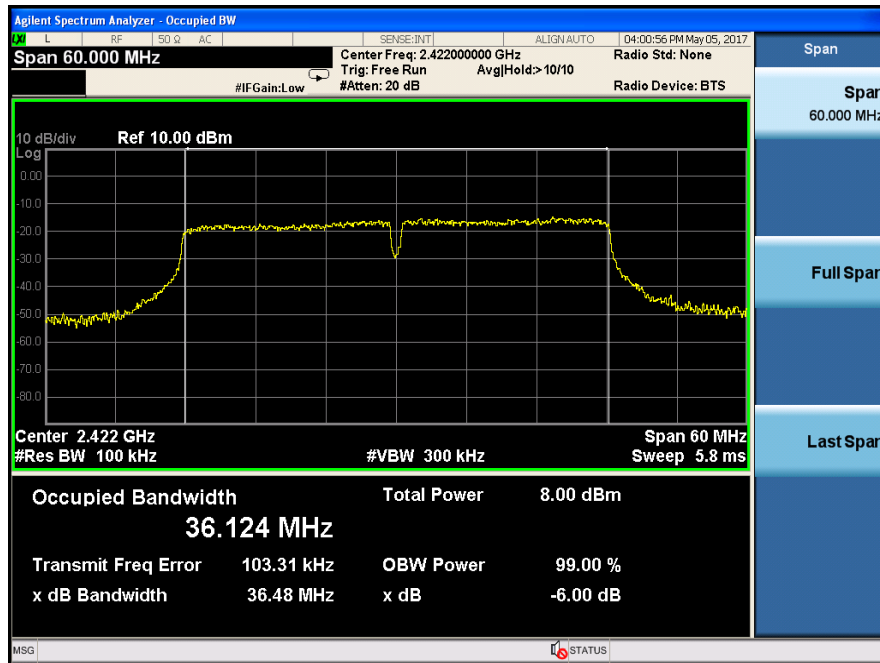

CH Mid:

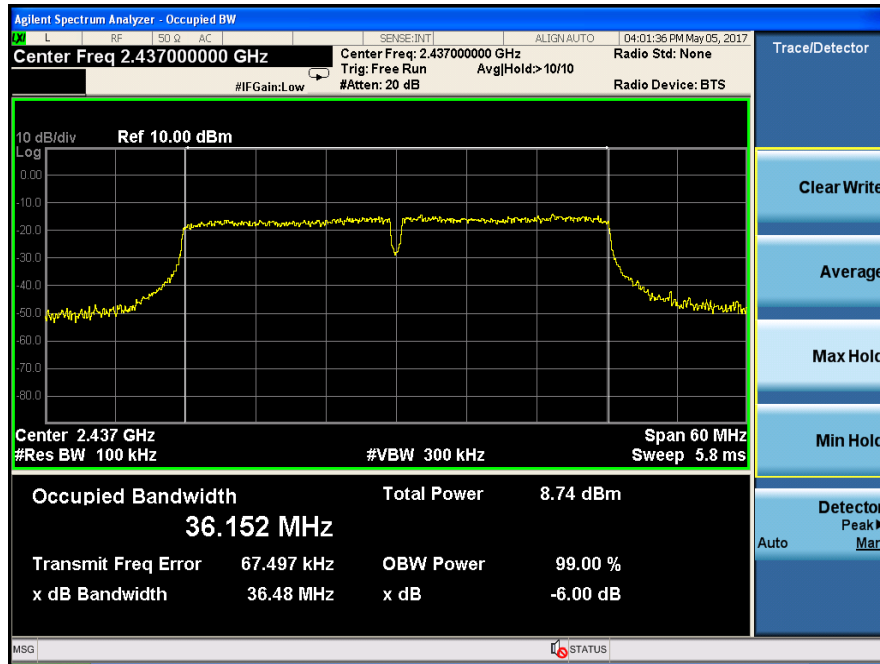

CH High :

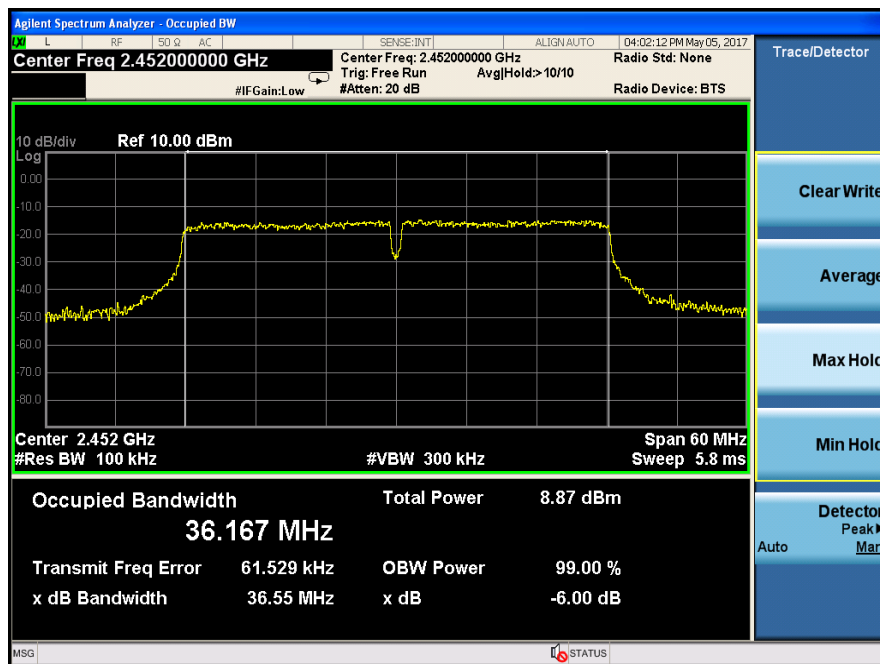

10 Band Edge Check

10.1 Test limit

Please refer section 15.247

All the lower and upper band-edges emissions appearing within 2310MHz to 2390MHz and 2483.5MHz to 2500MHz restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions outside operation frequency band 2400MHz to 2483.5MHz and 5725MHz to 5850MHz shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

10.2 Test Procedure

12.2.1 Put the EUT on a 0.8m high table, power on the EUT. Emissions were scanned and measured rotating the EUT to 360 degrees, Find the maximum Emission

12.2.2 Check the spurious emissions out of band.

12.2.3 RBW 1MHz ,VBW 3MHz ,peak detector for peak value , RBW 1MHz ,VBW 3MHz , RMS detector for AV value.

10.3 Test Setup

Same as 5.2.2.

10.4 Test Result

PASS.

Detailed information please see the following page.

Radiated Method:
IEEE 802.11b CH LOW

Band Edge Test result								
EUT: 802.11ac Wireless USB Adapter					M/N: U0639			
Power: DC 5V From USB port								
Test date: 2017-05-05			Test site: 3m Chamber		Tested by: Eric			
Test mode: TX Low								
Antenna polarity: Vertical								
Freq (MHz)	Read Level (dBuV/m)	Antenna Factor (dB/m)	Cable loss(dB)	Amp Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
2390	42.44	27.62	3.92	34.97	39.01	74	34.99	PK
2390	--	27.62	3.92	34.97	--	54	--	AV
Antenna Polarity: Horizontal								
2390	43.93	27.62	3.92	34.97	40.5	74	33.5	PK
2390	--	27.62	3.92	34.97	--	54	--	AV
Note:								
1, Spectrum Set for PK measure: RBW=1MHz, VBW=1MHz, Sweep time=Auto, Detector: PK								
2, Spectrum Set for AV measure: RBW=1MHz, VBW=3MHz, Sweep time=Auto, Detector: RMS								
3, Result = Read level + Antenna factor + cable loss-Amp factor								
4, All the other emissions not reported were too low to read and deemed to comply with FCC limit.								

IEEE 802.11b CH High

Band Edge Test result								
EUT: 802.11ac Wireless USB Adapter					M/N: U0639			
Power: DC 5V From USB port								
Test date: 2017-05-05			Test site: 3m Chamber		Tested by: Eric			
Test mode: TX High								
Antenna polarity: Vertical								
Freq (MHz)	Read Level (dBuV/m)	Antenna Factor (dB/m)	Cable loss(dB)	Amp Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
2483.5	42.15	27.89	4	34.97	39.07	74	34.93	PK
2483.5	--	27.89	4	34.97	--	54	--	AV
Antenna Polarity: Horizontal								
2483.5	43.42	27.89	4	34.97	40.34	74	33.66	PK
2483.5	--	27.89	4	34.97	--	54	--	AV
Note:								
1, Spectrum Set for PK measure: RBW=1MHz, VBW=1MHz, Sweep time=Auto, Detector: PK								
2, Spectrum Set for AV measure: RBW=1MHz, VBW=3MHz, Sweep time=Auto, Detector: RMS								
3, Result = Read level + Antenna factor + cable loss-Amp factor								
4, All the other emissions not reported were too low to read and deemed to comply with FCC limit.								

IEEE 802.11g CH LOW

Band Edge Test result								
EUT: 802.11ac Wireless USB Adapter					M/N: U0639			
Power: DC 5V From USB port								
Test date: 2017-05-05			Test site: 3m Chamber		Tested by: Eric			
Test mode: TX Low								
Antenna polarity: Vertical								
Freq (MHz)	Read Level (dBuV/m)	Antenna Factor (dB/m)	Cable loss(dB)	Amp Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
2390	47.71	27.62	3.92	34.97	44.28	74	29.72	PK
2390	--	27.62	3.92	34.97	--	54	--	AV
Antenna Polarity: Horizontal								
2390	48.89	27.62	3.92	34.97	45.46	74	28.54	PK
2390	--	27.62	3.92	34.97	--	54	--	AV
Note:								
1, Spectrum Set for PK measure: RBW=1MHz, VBW=1MHz, Sweep time=Auto, Detector: PK								
2, Spectrum Set for AV measure: RBW=1MHz, VBW=3MHz, Sweep time=Auto, Detector: RMS								
3, Result = Read level + Antenna factor + cable loss-Amp factor								
4, All the other emissions not reported were too low to read and deemed to comply with FCC limit.								

IEEE 802.11g CH High

Band Edge Test result								
EUT: 802.11ac Wireless USB Adapter					M/N: U0639			
Power: DC 5V From USB port								
Test date: 2017-05-05			Test site: 3m Chamber		Tested by: Eric			
Test mode: TX High								
Antenna polarity: Vertical								
Freq (MHz)	Read Level (dBuV/m)	Antenna Factor (dB/m)	Cable loss(dB)	Amp Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
2483.5	45.61	27.89	4	34.97	42.53	74	31.47	PK
2483.5		--	--	--	--	54	--	AV
Antenna Polarity: Horizontal								
2483.5	45.68	27.89	4	34.97	42.6	74	31.4	PK
2483.5		--	--	--	--	54	--	AV
Note:								
1, Spectrum Set for PK measure: RBW=1MHz, VBW=1MHz, Sweep time=Auto, Detector: PK								
2, Spectrum Set for AV measure: RBW=1MHz, VBW=3MHz, Sweep time=Auto, Detector: RMS								
3, Result = Read level + Antenna factor + cable loss-Amp factor								
4, All the other emissions not reported were too low to read and deemed to comply with FCC limit.								

IEEE 802.11n HT20 CH Low

Band Edge Test result								
EUT: 802.11ac Wireless USB Adapter					M/N: U0639			
Power: DC 5V From USB port								
Test date: 2017-05-05			Test site: 3m Chamber		Tested by: Eric			
Test mode: TX Low								
Antenna polarity: Vertical								
Freq (MHz)	Read Level (dBuV/m)	Antenna Factor (dB/m)	Cable loss(dB)	Amp Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
2390	43.58	27.62	3.92	34.97	40.15	74	33.85	PK
2390	--	27.62	3.92	34.97	--	54	--	AV
Antenna Polarity: Horizontal								
2390	45.62	27.62	3.92	34.97	42.19	74	31.81	PK
2390	--	27.62	3.92	34.97	--	54	--	AV
Note:								
1, Spectrum Set for PK measure: RBW=1MHz, VBW=1MHz, Sweep time=Auto, Detector: PK								
2, Spectrum Set for AV measure: RBW=1MHz, VBW=3MHz, Sweep time=Auto, Detector: RMS								
3, Result = Read level + Antenna factor + cable loss-Amp factor								
4, All the other emissions not reported were too low to read and deemed to comply with FCC limit.								

IEEE 802.11n HT20 CH High

Band Edge Test result								
EUT: 802.11ac Wireless USB Adapter					M/N: U0639			
Power: DC 5V From USB port								
Test date: 2017-05-05			Test site: 3m Chamber		Tested by: Eric			
Test mode: TX High								
Antenna polarity: Vertical								
Freq (MHz)	Read Level (dBuV/m)	Antenna Factor (dB/m)	Cable loss(dB)	Amp Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
2483.5	42.91	27.89	4	34.97	39.83	74	34.17	PK
2483.5		--	--	--	--	54	--	AV
Antenna Polarity: Horizontal								
2483.5	44.54	27.89	4	34.97	41.46	74	32.54	PK
2483.5		--	--	--	--	54	--	AV
Note:								
1, Spectrum Set for PK measure: RBW=1MHz, VBW=1MHz, Sweep time=Auto, Detector: PK								
2, Spectrum Set for AV measure: RBW=1MHz, VBW=3MHz, Sweep time=Auto, Detector: RMS								
3, Result = Read level + Antenna factor + cable loss-Amp factor								
4, All the other emissions not reported were too low to read and deemed to comply with FCC limit.								


IEEE 802.11n HT40 CH Low

Band Edge Test result								
EUT: 802.11ac Wireless USB Adapter					M/N: U0639			
Power: DC 5V From USB port								
Test date: 2017-05-05			Test site: 3m Chamber		Tested by: Eric			
Test mode: TX Low								
Antenna polarity: Vertical								
Freq (MHz)	Read Level (dBuV/m)	Antenna Factor (dB/m)	Cable loss(dB)	Amp Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
2390	43.91	27.62	3.92	34.97	40.48	74	33.52	PK
2390	--	27.62	3.92	34.97	--	54	--	AV
Antenna Polarity: Horizontal								
2390	45.09	27.62	3.92	34.97	41.66	74	32.34	PK
2390	--	27.62	3.92	34.97	--	54	--	AV
Note:								
1, Spectrum Set for PK measure: RBW=1MHz, VBW=1MHz, Sweep time=Auto, Detector: PK								
2, Spectrum Set for AV measure: RBW=1MHz, VBW=3MHz, Sweep time=Auto, Detector: RMS								
3, Result = Read level + Antenna factor + cable loss-Amp factor								
4, All the other emissions not reported were too low to read and deemed to comply with FCC limit.								


IEEE 802.11n HT40 CH High

Band Edge Test result								
EUT: 802.11ac Wireless USB Adapter					M/N: U0639			
Power: DC 5V From USB port								
Test date: 2017-05-05			Test site: 3m Chamber		Tested by: Eric			
Test mode: TX High								
Antenna polarity: Vertical								
Freq (MHz)	Read Level (dBuV/m)	Antenna Factor (dB/m)	Cable loss(dB)	Amp Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
2483.5	42.44	27.89	4	34.97	39.36	74	34.64	PK
2483.5		--	--	--	--	54	--	AV
Antenna Polarity: Horizontal								
2483.5	47.91	27.89	4	34.97	44.83	74	29.17	PK
2483.5		--	--	--	--	54	--	AV
Note:								
1, Spectrum Set for PK measure: RBW=1MHz, VBW=1MHz, Sweep time=Auto, Detector: PK								
2, Spectrum Set for AV measure: RBW=1MHz, VBW=3MHz, Sweep time=Auto, Detector: RMS								
3, Result = Read level + Antenna factor + cable loss-Amp factor								
4, All the other emissions not reported were too low to read and deemed to comply with FCC limit.								



802.11g

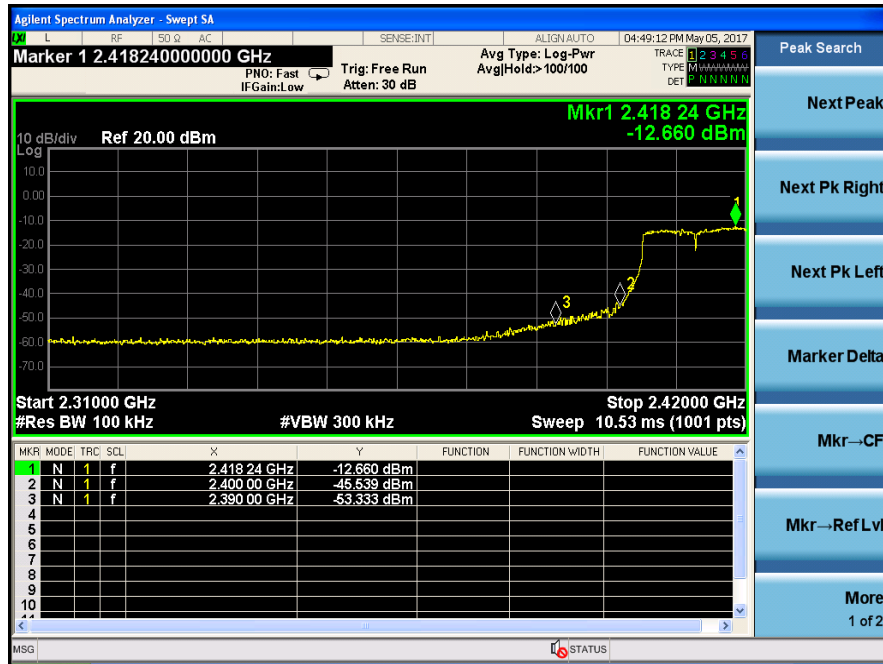

802.11n HT20

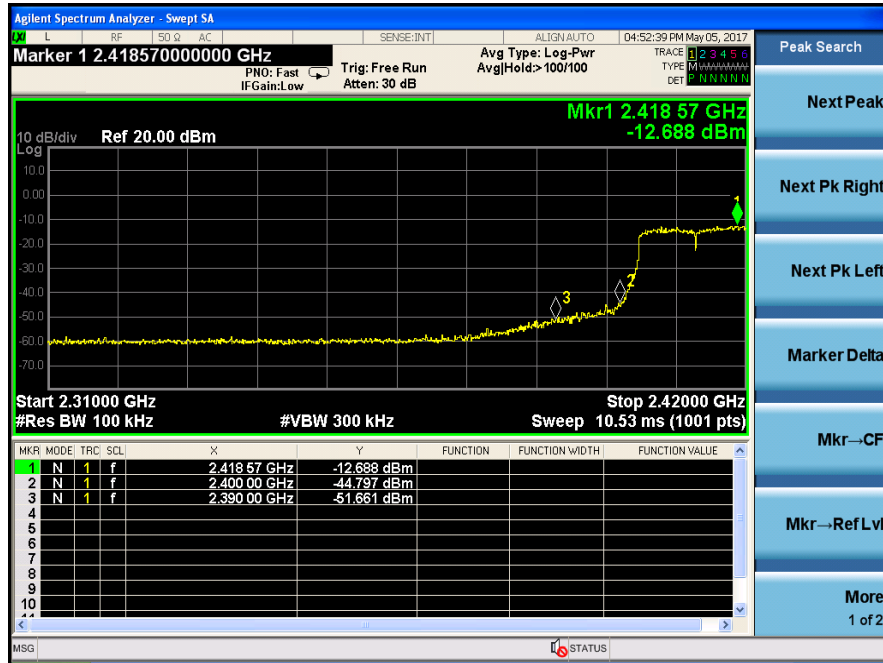

802.11n HT40

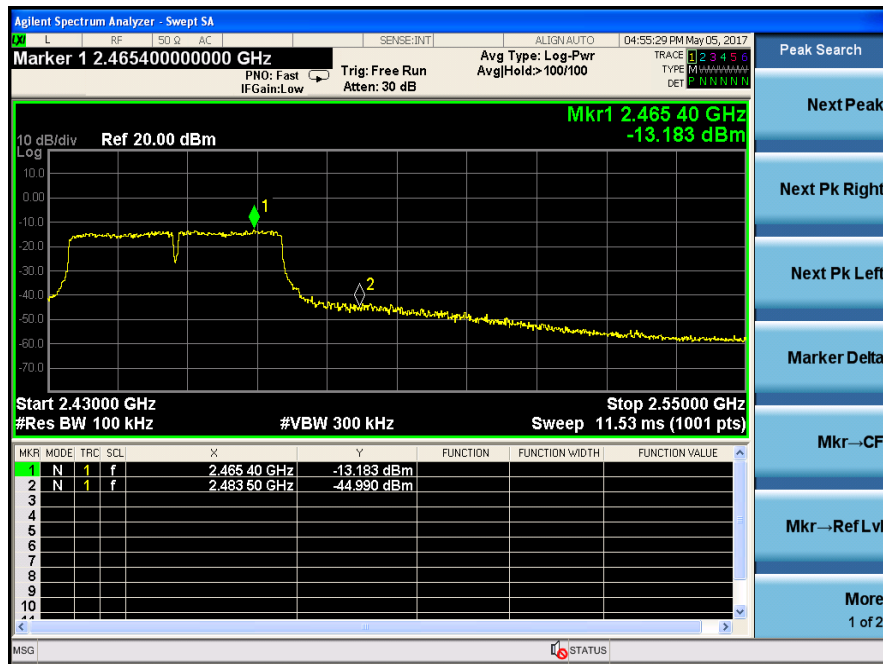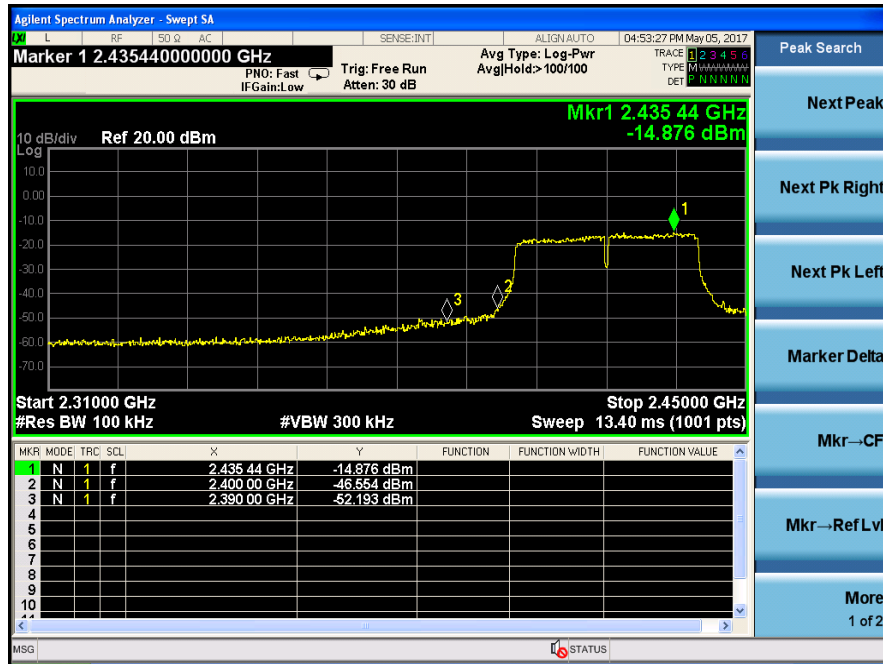

11 Antenna Requirement

11.1 Standard Requirement

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

11.2 Antenna Connected Construction


The antenna connector is unique antenna and no consideration of replacement. Please see EUT photo for details.

11.3 Result


The EUT antenna is unique Antenna. It comply with the standard requirement.

12 Test setup photo

12.1 Photos of Radiated emission

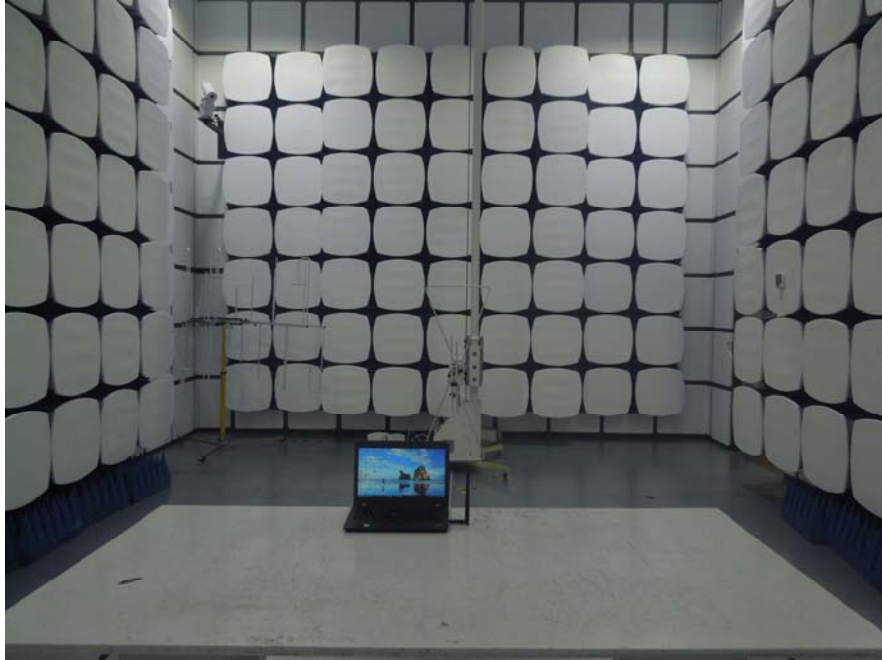

12.2 Photos of Conducted Emission test

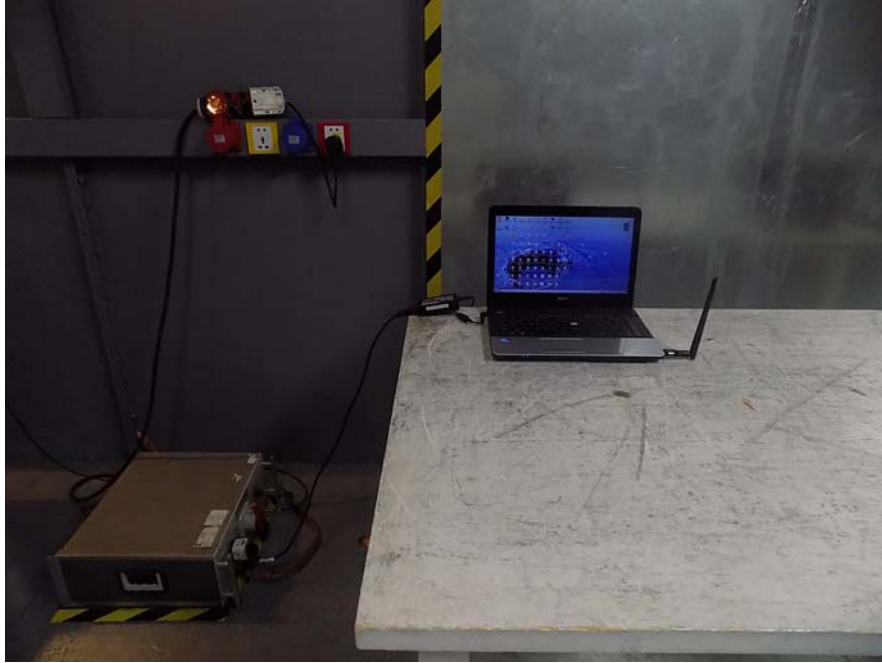

13 Photographs of EUT



-----END OF THE REPORT-----