

Date of Test:	May 29, 2013	Temperature:	25°C
EUT:	Mini Wireless AP Client	Humidity:	50%
Model No.:	WA150M	Power Supply:	DC 5V
Test Mode:	802.11g Channel High 2462MHz	Test Engineer:	Pei

**For Below 30MHz**

Frequency (MHz)	Reading (dBμV/m)	Factor(dB) Corr.	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
-	-	-	-	-	-	X
-	-	-	-	-	-	Y
-	-	-	-	-	-	Z

**For 30MHz-1000MHz**

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading (dBμV/m)	Factor Corr. (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
360.4476	59.39	-15.92	43.47	46.50	-3.03	Vertical
601.4265	52.97	-11.65	41.32	46.50	-5.18	
842.1295	51.72	-7.10	44.62	46.50	-1.88	
360.4476	60.18	-15.92	44.26	46.50	-2.24	Horizontal
601.4265	54.26	-11.65	42.61	46.50	-3.89	
842.1295	51.72	-7.10	44.62	46.50	-1.88	

**For 1GHz-25GHz**

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading(dBμV/m)		Factor Corr. (dB)	Result(dBμV/m)		Limit(dBμV/m)		Margin(dBμV/m)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
-	-	-	-	-	-	-	-	-	-	Vertical
-	-	-	-	-	-	-	-	-	-	Horizontal

**Note: 1. Emissions attenuated more than 20 dB below the permissible value are not reported.****2. \*: Denotes restricted band of operation.****3. The fundamental radiated emissions were reduced by Band Reject Filter in the attached plots.**

Date of Test:	<u>May 29, 2013</u>	Temperature:	<u>25°C</u>
EUT:	<u>Mini Wireless AP Client</u>	Humidity:	<u>50%</u>
Model No.:	<u>WA150M</u>	Power Supply:	<u>DC 5V</u>
	<u>802.11n Channel Low 2412MHz</u>		
Test Mode:	<u>(20MHz)</u>	Test Engineer:	<u>Pei</u>

**For Below 30MHz**

Frequency (MHz)	Reading (dBμV/m)	Factor(dB) Corr.	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
-	-	-	-	-	-	X
-	-	-	-	-	-	Y
-	-	-	-	-	-	Z

**For 30MHz-1000MHz**

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading (dBμV/m)	Factor Corr. (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
360.4476	60.15	-15.92	44.23	46.50	-2.27	Vertical
601.4265	54.49	-11.65	42.84	46.50	-3.66	
842.1295	51.59	-7.10	44.49	46.50	-2.01	
360.4476	60.55	-15.92	44.63	46.50	-1.87	Horizontal
601.4265	54.02	-11.65	42.37	46.50	-4.13	
842.1296	51.94	-7.10	44.84	46.50	-1.66	

**For 1GHz-25GHz**

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading(dBμV/m)		Factor Corr. (dB)	Result(dBμV/m)		Limit(dBμV/m)		Margin(dBμV/m)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
-	-	-	-	-	-	-	-	-	-	Vertical
-	-	-	-	-	-	-	-	-	-	Horizontal

**Note: 1. Emissions attenuated more than 20 dB below the permissible value are not reported.**

**2. \*: Denotes restricted band of operation.**

**3. The fundamental radiated emissions were reduced by Band Reject Filter in the attached plots.**

Date of Test:	<u>May 29, 2013</u>	Temperature:	<u>25°C</u>
EUT:	<u>Mini Wireless AP Client</u>	Humidity:	<u>50%</u>
Model No.:	<u>WA150M</u>	Power Supply:	<u>DC 5V</u>
	<u>802.11n Channel Middle 2437MHz</u>		
Test Mode:	<u>(20MHz)</u>	Test Engineer:	<u>Pei</u>

**For Below 30MHz**

Frequency (MHz)	Reading (dBμV/m)	Factor(dB) Corr.	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
-	-	-	-	-	-	X
-	-	-	-	-	-	Y
-	-	-	-	-	-	Z

**For 30MHz-1000MHz**

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading (dBμV/m)	Factor Corr. (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
360.4476	60.31	-15.92	44.39	46.50	-2.11	Vertical
601.4265	51.93	-11.65	40.28	46.50	-6.22	
842.1296	51.15	-7.10	44.05	46.50	-2.47	
360.4476	60.37	-15.92	44.45	46.50	-2.05	Horizontal
601.4265	53.58	-11.65	41.93	46.50	-4.57	
842.1295	51.27	-7.10	44.17	46.50	-2.33	

**For 1GHz-25GHz**

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading(dBμV/m)		Factor Corr. (dB)	Result(dBμV/m)		Limit(dBμV/m)		Margin(dBμV/m)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
-	-	-	-	-	-	-	-	-	-	Vertical
-	-	-	-	-	-	-	-	-	-	Horizontal

**Note: 1. Emissions attenuated more than 20 dB below the permissible value are not reported.**

**2. \*: Denotes restricted band of operation.**

**3. The fundamental radiated emissions were reduced by Band Reject Filter in the attached plots.**

Date of Test:	<u>May 29, 2013</u>	Temperature:	<u>25°C</u>
EUT:	<u>Mini Wireless AP Client</u>	Humidity:	<u>50%</u>
Model No.:	<u>WA150M</u>	Power Supply:	<u>DC 5V</u>
	<u>802.11n Channel High 2462MHz</u>		
Test Mode:	<u>(20MHz)</u>	Test Engineer:	<u>Pei</u>

**For Below 30MHz**

Frequency (MHz)	Reading (dB $\mu$ V/m)	Factor(dB) Corr.	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
-	-	-	-	-	-	X
-	-	-	-	-	-	Y
-	-	-	-	-	-	Z

**For 30MHz-1000MHz**

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading (dB $\mu$ V/m)	Factor Corr. (dB)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
360.4476	60.48	-15.92	44.56	46.50	-1.94	Vertical
601.4265	53.96	-11.65	42.31	46.50	-4.19	
842.1296	51.11	-7.10	44.01	46.50	-2.49	
360.4476	60.59	-15.92	44.67	46.50	-1.83	Horizontal
601.4265	53.51	-11.65	41.86	46.50	-4.64	
842.1295	51.35	-7.10	44.25	46.50	-2.25	

**For 1GHz-25GHz**

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading(dB $\mu$ V/m)		Factor Corr. (dB)	Result(dB $\mu$ V/m)		Limit(dB $\mu$ V/m)		Margin(dB $\mu$ V/m)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
-	-	-	-	-	-	-	-	-	-	Vertical
-	-	-	-	-	-	-	-	-	-	Horizontal

**Note: 1. Emissions attenuated more than 20 dB below the permissible value are not reported.****2. \*: Denotes restricted band of operation.****3. The fundamental radiated emissions were reduced by Band Reject Filter in the attached plots.**

Date of Test:	<u>May 29, 2013</u>	Temperature:	<u>25°C</u>
EUT:	<u>Mini Wireless AP Client</u>	Humidity:	<u>50%</u>
Model No.:	<u>WA150M</u>	Power Supply:	<u>DC 5V</u>
	<u>802.11n Channel Low 2422MHz</u>		
Test Mode:	<u>(40MHz)</u>	Test Engineer:	<u>Pei</u>

**For Below 30MHz**

Frequency (MHz)	Reading (dB $\mu$ V/m)	Factor(dB) Corr.	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
-	-	-	-	-	-	X
-	-	-	-	-	-	Y
-	-	-	-	-	-	Z

**For 30MHz-1000MHz**

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading (dB $\mu$ V/m)	Factor Corr. (dB)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
360.4476	60.46	-15.92	44.51	46.50	-1.96	Vertical
601.4265	54.65	-11.65	43.00	46.50	-3.50	
842.1295	51.15	-7.10	44.05	46.50	-2.45	
360.4476	60.43	-15.92	44.51	46.50	-1.99	Horizontal
601.4265	52.43	-11.65	40.78	46.50	-5.72	
842.1295	50.89	-7.10	43.79	46.50	-2.71	

**For 1GHz-25GHz**

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading(dB $\mu$ V/m)		Factor Corr. (dB)	Result(dB $\mu$ V/m)		Limit(dB $\mu$ V/m)		Margin(dB $\mu$ V/m)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
-	-	-	-	-	-	-	-	-	-	Vertical
-	-	-	-	-	-	-	-	-	-	Horizontal

**Note: 1. Emissions attenuated more than 20 dB below the permissible value are not reported.**

**2. \*: Denotes restricted band of operation.**

**3. The fundamental radiated emissions were reduced by Band Reject Filter in the attached plots.**

Date of Test:	<u>May 29, 2013</u>	Temperature:	<u>25°C</u>
EUT:	<u>Mini Wireless AP Client</u>	Humidity:	<u>50%</u>
Model No.:	<u>WA150M</u>	Power Supply:	<u>DC 5V</u>
	<u>802.11n Channel Middle 2437MHz</u>		
Test Mode:	<u>(40MHz)</u>	Test Engineer:	<u>Pei</u>

**For Below 30MHz**

Frequency (MHz)	Reading (dBμV/m)	Factor(dB) Corr.	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
-	-	-	-	-	-	X
-	-	-	-	-	-	Y
-	-	-	-	-	-	Z

**For 30MHz-1000MHz**

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading (dBμV/m)	Factor Corr. (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
360.4476	60.40	-15.92	44.48	46.50	-2.02	Vertical
601.4265	53.75	-11.65	42.10	46.50	-4.40	
842.1295	50.69	-7.10	43.59	46.50	-2.91	
360.4479	60.56	-15.92	44.67	46.50	-1.83	Horizontal
601.4265	52.44	-11.65	40.79	46.50	-5.71	
842.1295	51.56	-7.10	44.46	46.50	-2.04	

**For 1GHz-25GHz**

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading(dBμV/m)		Factor Corr. (dB)	Result(dBμV/m)		Limit(dBμV/m)		Margin(dBμV/m)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
-	-	-	-	-	-	-	-	-	-	Vertical
-	-	-	-	-	-	-	-	-	-	Horizontal

**Note: 1. Emissions attenuated more than 20 dB below the permissible value are not reported.**

**2. \*: Denotes restricted band of operation.**

**3. The fundamental radiated emissions were reduced by Band Reject Filter in the attached plots.**

Date of Test:	<u>May 29, 2013</u>	Temperature:	<u>25°C</u>
EUT:	<u>Mini Wireless AP Client</u>	Humidity:	<u>50%</u>
Model No.:	<u>WA150M</u>	Power Supply:	<u>DC 5V</u>
Test Mode:	<u>802.11n Channel High 2452MHz (40MHz)</u>	Test Engineer:	<u>Pei</u>

**For Below 30MHz**

Frequency (MHz)	Reading (dBμV/m)	Factor(dB) Corr.	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
-	-	-	-	-	-	X
-	-	-	-	-	-	Y
-	-	-	-	-	-	Z

**For 30MHz-1000MHz**

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading (dBμV/m)	Factor Corr. (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
360.4476	60.29	-15.92	44.67	46.50	-2.13	Vertical
601.4265	54.10	-11.65	42.45	46.50	-4.05	
842.1295	51.12	-7.10	44.02	46.50	-2.48	
360.4476	60.47	-15.92	44.55	46.50	-1.95	Horizontal
601.4265	52.24	-11.65	40.59	46.50	-5.91	
842.1296	51.80	-7.10	44.70	46.50	-1.80	

**For 1GHz-25GHz**

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading(dBμV/m)		Factor Corr. (dB)	Result(dBμV/m)		Limit(dBμV/m)		Margin(dBμV/m)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
-	-	-	-	-	-	-	-	-	-	Vertical
-	-	-	-	-	-	-	-	-	-	Horizontal

- Note: 1. Emissions attenuated more than 20 dB below the permissible value are not reported.**
- 2. \*: Denotes restricted band of operation.**
- 3. The fundamental radiated emissions were reduced by Band Reject Filter in the attached plots.**




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: STAR #868	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: DC 5V
Test item: Radiation Test	Date: 2013/05/29
Temp.( C)/Hum.(%) 26 C / 55 %	Time: 13:39:35
EUT: Mini Wireless AP Client	Engineer Signature: STAR
Mode: TX Channel 1(802.11b)	Distance: 3m
Model: WA150M	
Manufacturer: HAOLIYUAN	

Note: Report No.:ATE20131062

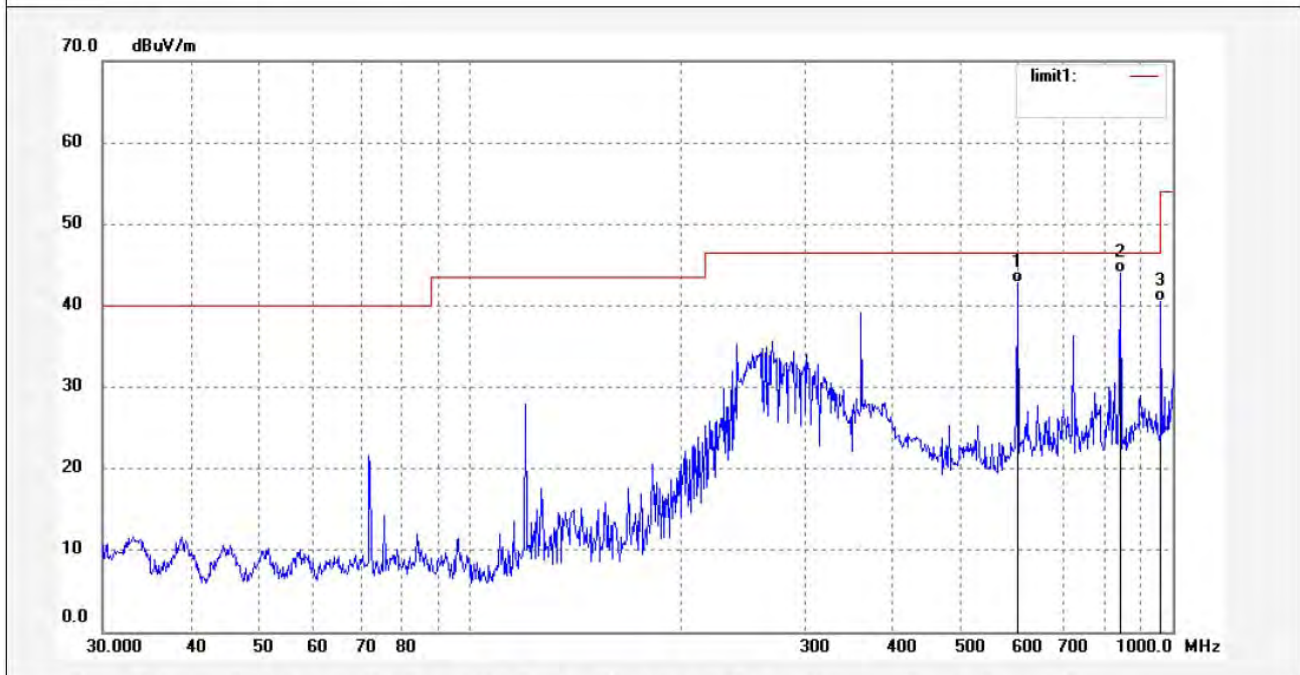

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	601.4265	54.44	-11.65	42.79	46.50	-3.71	QP			
2	842.1295	51.13	-7.10	44.03	46.50	-2.47	QP			
3	962.1622	45.73	-5.23	40.50	54.00	-13.50	QP			





**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: STAR #869	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: DC 5V
Test item: Radiation Test	Date: 2013/05/29
Temp.( C)/Hum.(%) 26 C / 55 %	Time: 13:41:40
EUT: Mini Wireless AP Client	Engineer Signature: STAR
Mode: TX Channel 1(802.11b)	Distance: 3m
Model: WA150M	
Manufacturer: HAOLIYUAN	

Note: Report No.:ATE20131062



No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	360.4476	58.39	-15.92	42.47	46.50	-4.03	QP			
2	601.4265	52.88	-11.65	41.23	46.50	-5.27	QP			
3	842.1296	51.38	-7.10	44.28	46.50	-2.22	QP			




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: star #3386	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: DC 5V
Test item: Radiation Test	Date: 13/05/31/
Temp.( C)/Hum.(%) 26 C / 60 %	Time: 16/01/25
EUT: Mini Wireless AP Client	Engineer Signature:
Mode: TX Channel 1(802.11b)	Distance: 3m
Model: WA150M	
Manufacturer: HAOLIYUAN	

Note: Report No.:ATE20131062

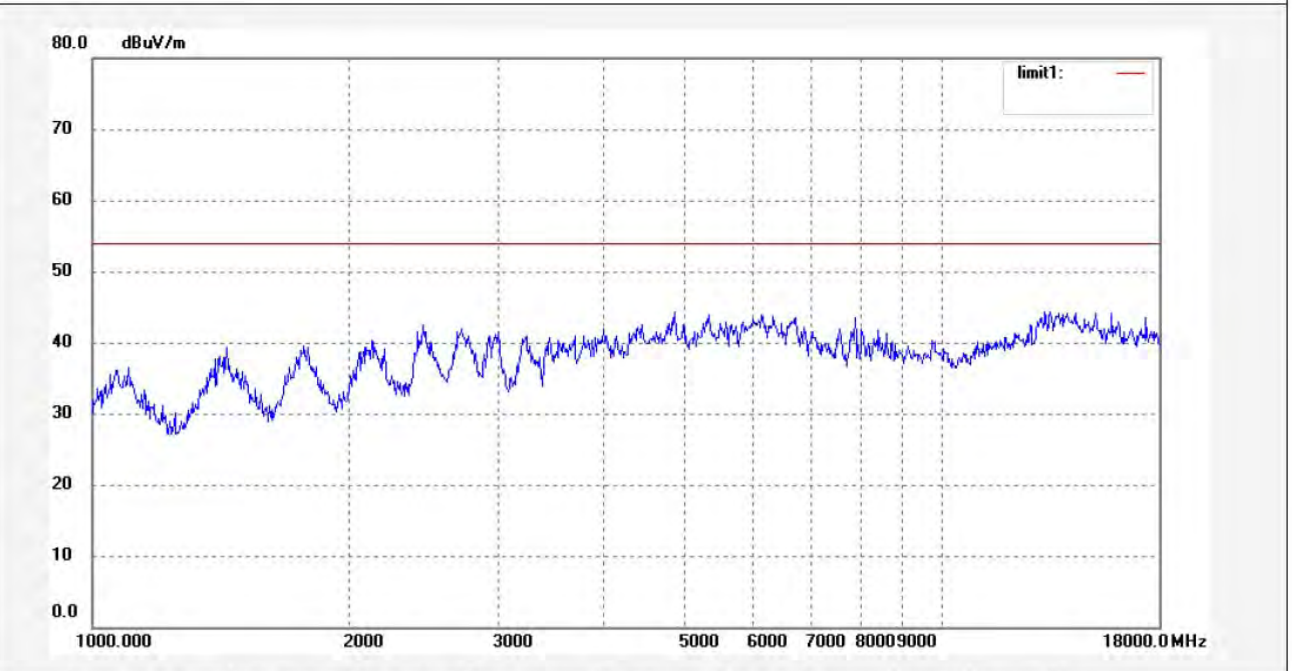

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A.Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: star #3385	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: DC 5V
Test item: Radiation Test	Date: 13/05/31/
Temp.( C)/Hum.(%) 26 C / 60 %	Time: 15/57/02
EUT: Mini Wireless AP Client	Engineer Signature:
Mode: TX Channel 1(802.11b)	Distance: 3m
Model: WA150M	
Manufacturer: HAOLIYUAN	

Note: Report No.:ATE20131062

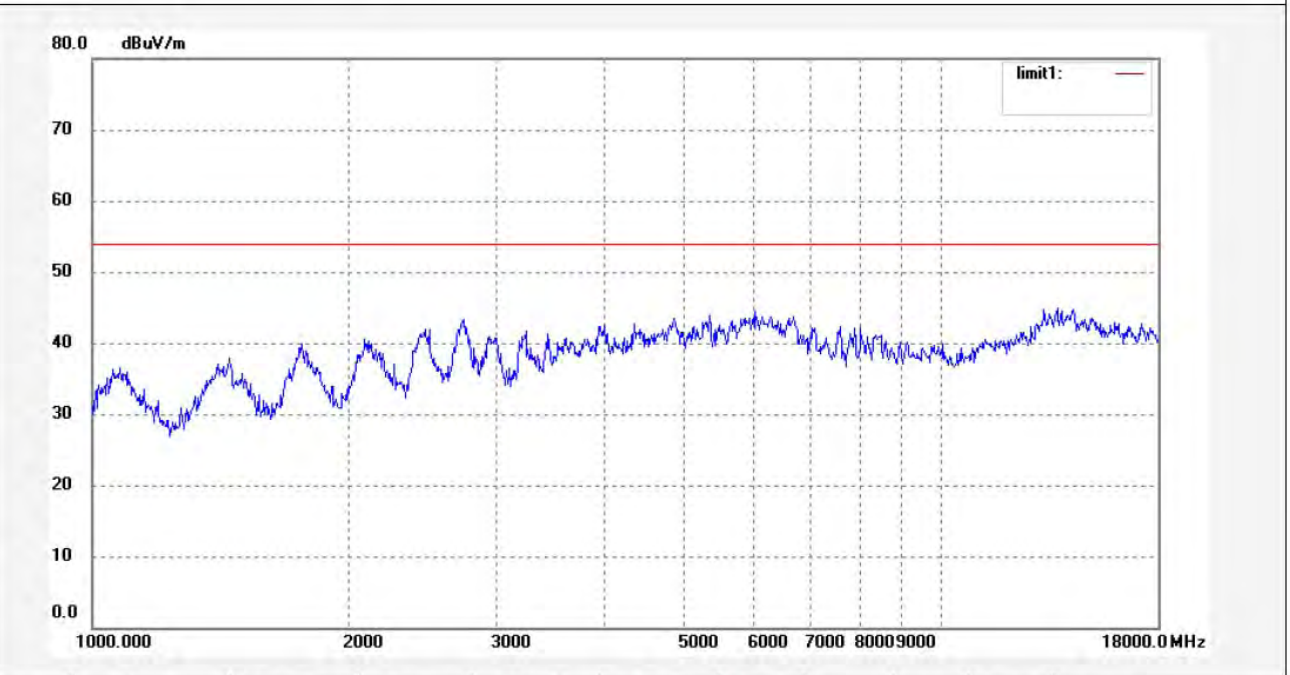

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------






**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: star #3409	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: DC 5V
Test item: Radiation Test	Date: 13/05/31/
Temp.( C)/Hum.(%) 26 C / 60 %	Time: 17/17/32
EUT: Mini Wireless AP Client	Engineer Signature:
Mode: TX Channel 1(802.11b)	Distance: 3m
Model: WA150M	
Manufacturer: HAOLIYUAN	

Note: Report No.:ATE20131062

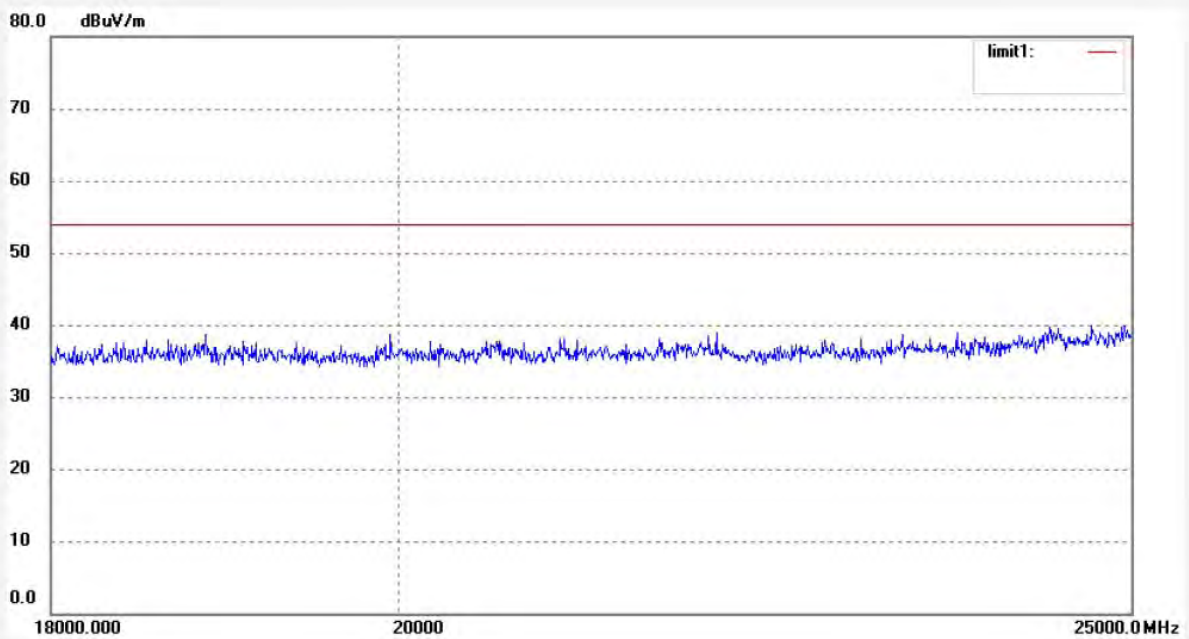

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: star #3410	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: DC 5V
Test item: Radiation Test	Date: 13/05/31/
Temp.( C)/Hum.(%) 26 C / 60 %	Time: 17/20/44
EUT: Mini Wireless AP Client	Engineer Signature:
Mode: TX Channel 1(802.11b)	Distance: 3m
Model: WA150M	
Manufacturer: HAOLIYUAN	

Note: Report No.:ATE20131062

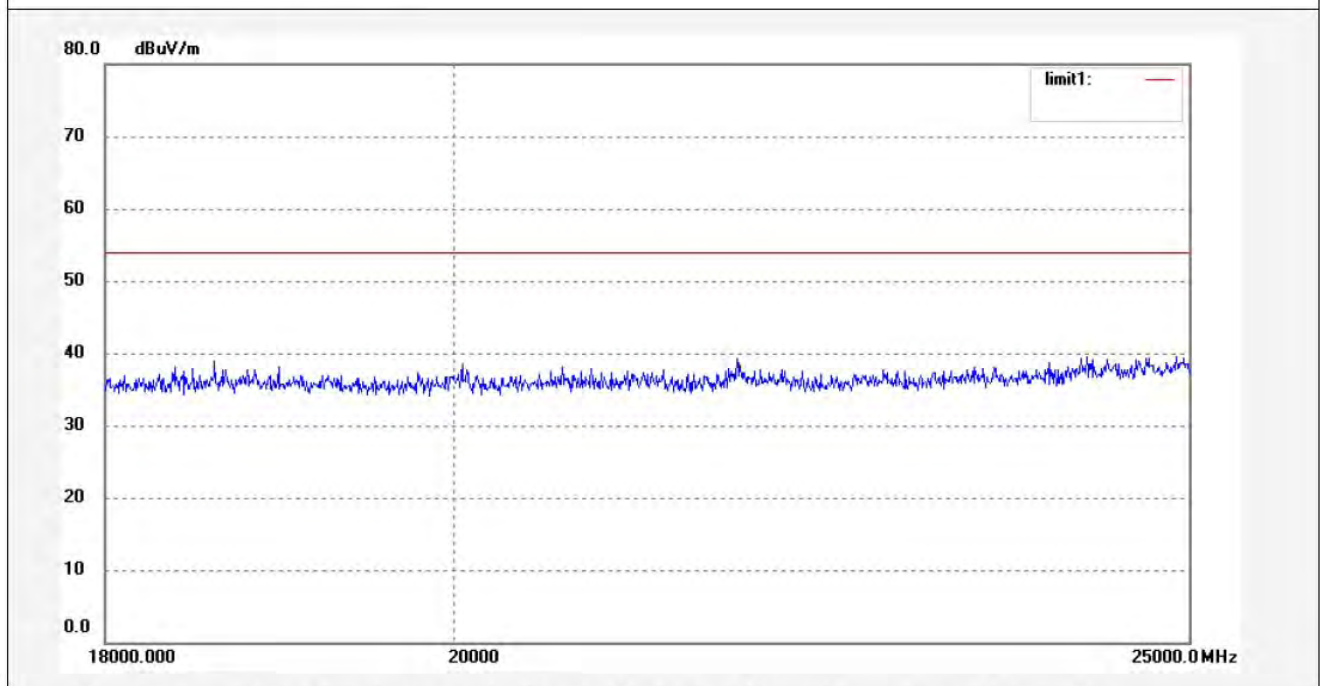

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




**ACCURATE TECHNOLOGY CO., LTD.**  
 F1,Bldg.A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: STAR #870	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: DC 5V
Test item: Radiation Test	Date: 2013/05/29
Temp.( C)/Hum.(%) 26 C / 55 %	Time: 13:42:05
EUT: Mini Wireless AP Client	Engineer Signature: STAR
Mode: TX Channel 6(802.11b)	Distance: 3m
Model: WA150M	
Manufacturer: HAOLIYUAN	

Note: Report No.:ATE20131062

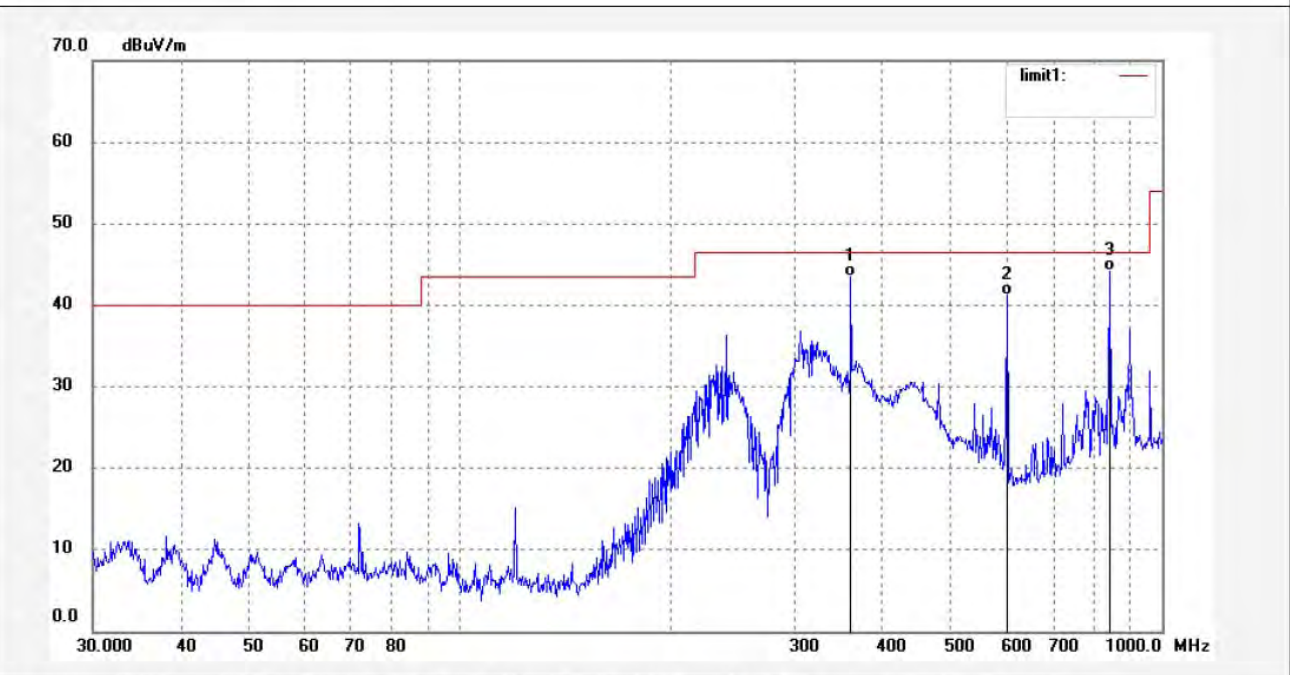

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	360.4476	59.47	-15.92	43.55	46.50	-2.95	QP			
2	601.4265	52.83	-11.65	41.18	46.50	-5.32	QP			
3	842.1295	51.34	-7.10	44.24	46.50	-2.26	QP			






**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: STAR #871	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: DC 5V
Test item: Radiation Test	Date: 2013/05/29
Temp.( C)/Hum.(%) 26 C / 55 %	Time: 13:43:36
EUT: Mini Wireless AP Client	Engineer Signature: STAR
Mode: TX Channel 6(802.11b)	Distance: 3m
Model: WA150M	
Manufacturer: HAOLIYUAN	

Note: Report No.:ATE20131062

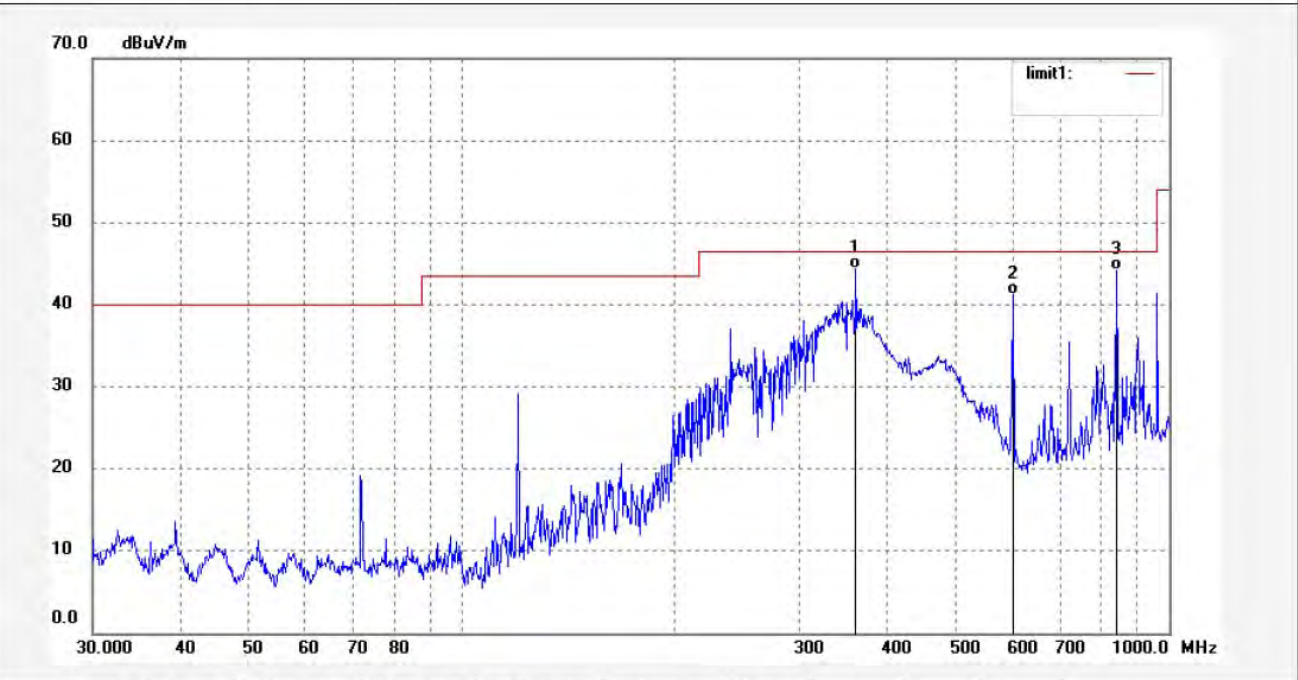

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	360.4476	60.26	-15.92	44.34	46.50	-2.16	QP			
2	601.4265	52.87	-11.65	41.22	46.50	-5.28	QP			
3	842.1295	51.28	-7.10	44.18	46.50	-2.32	QP			




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: star #3387	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: DC 5V
Test item: Radiation Test	Date: 13/05/31/
Temp.( C)/Hum.(%) 26 C / 60 %	Time: 16/05/56
EUT: Mini Wireless AP Client	Engineer Signature:
Mode: TX Channel 6(802.11b)	Distance: 3m
Model: WA150M	
Manufacturer: HAOLIYUAN	

Note: Report No.:ATE20131062

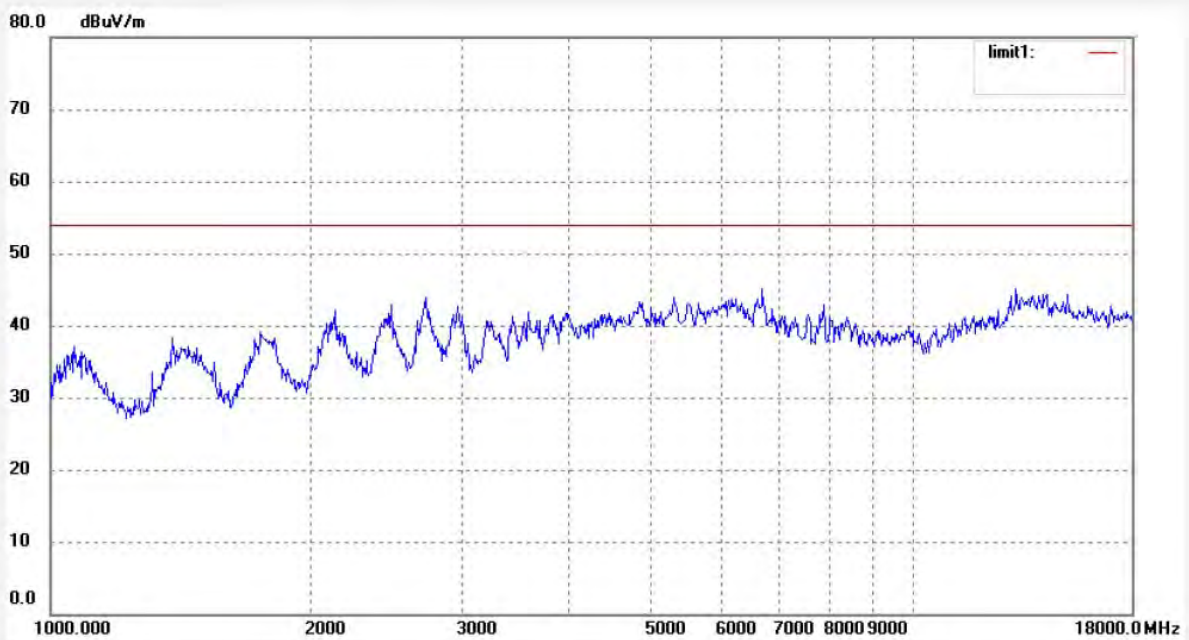

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------






**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: star #3388	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: DC 5V
Test item: Radiation Test	Date: 13/05/31/
Temp.( C)/Hum.(%) 26 C / 60 %	Time: 16/09/20
EUT: Mini Wireless AP Client	Engineer Signature:
Mode: TX Channel 6(802.11b)	Distance: 3m
Model: WA150M	
Manufacturer: HAOLIYUAN	

Note: Report No.:ATE20131062

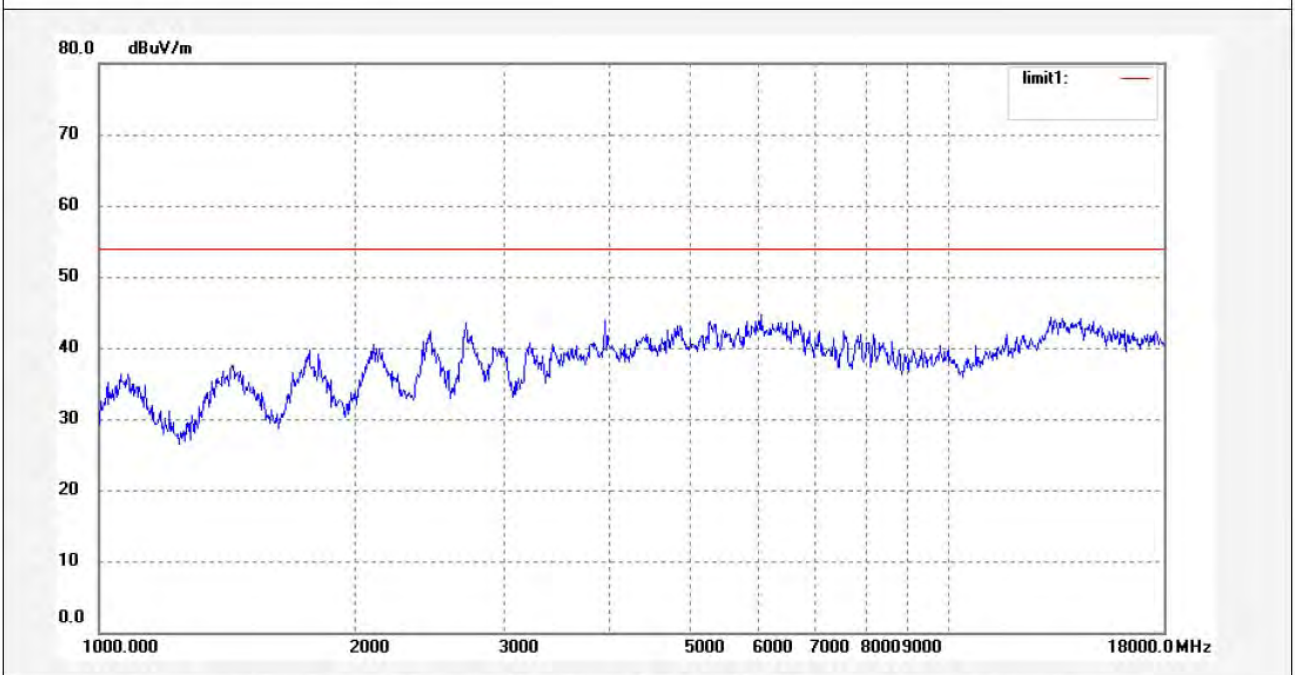

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: star #3411	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: DC 5V
Test item: Radiation Test	Date: 13/05/31/
Temp.( C)/Hum.(%) 26 C / 60 %	Time: 17/23/02
EUT: Mini Wireless AP Client	Engineer Signature:
Mode: TX Channel 6(802.11b)	Distance: 3m
Model: WA150M	
Manufacturer: HAOLIYUAN	

Note: Report No.:ATE20131062

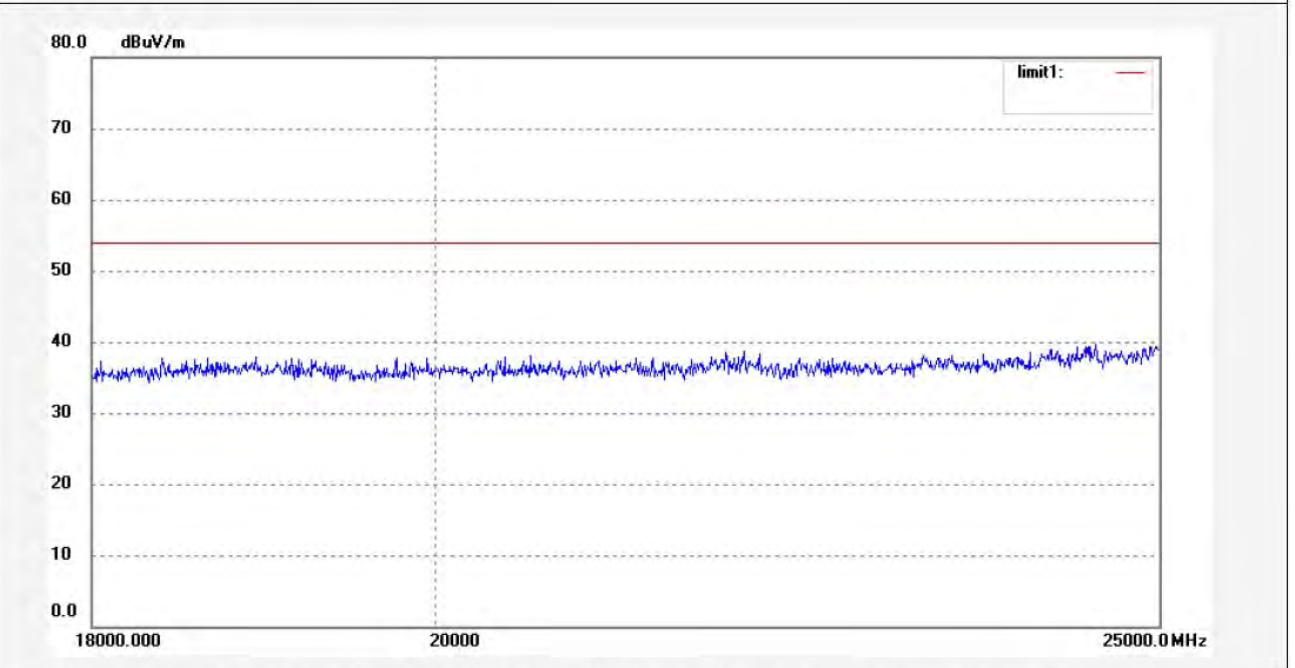

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg.A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: star #3412	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: DC 5V
Test item: Radiation Test	Date: 13/05/31/
Temp.( C)/Hum.(%) 26 C / 60 %	Time: 17/26/09
EUT: Mini Wireless AP Client	Engineer Signature:
Mode: TX Channel 6(802.11b)	Distance: 3m
Model: WA150M	
Manufacturer: HAOLIYUAN	

Note: Report No.:ATE20131062

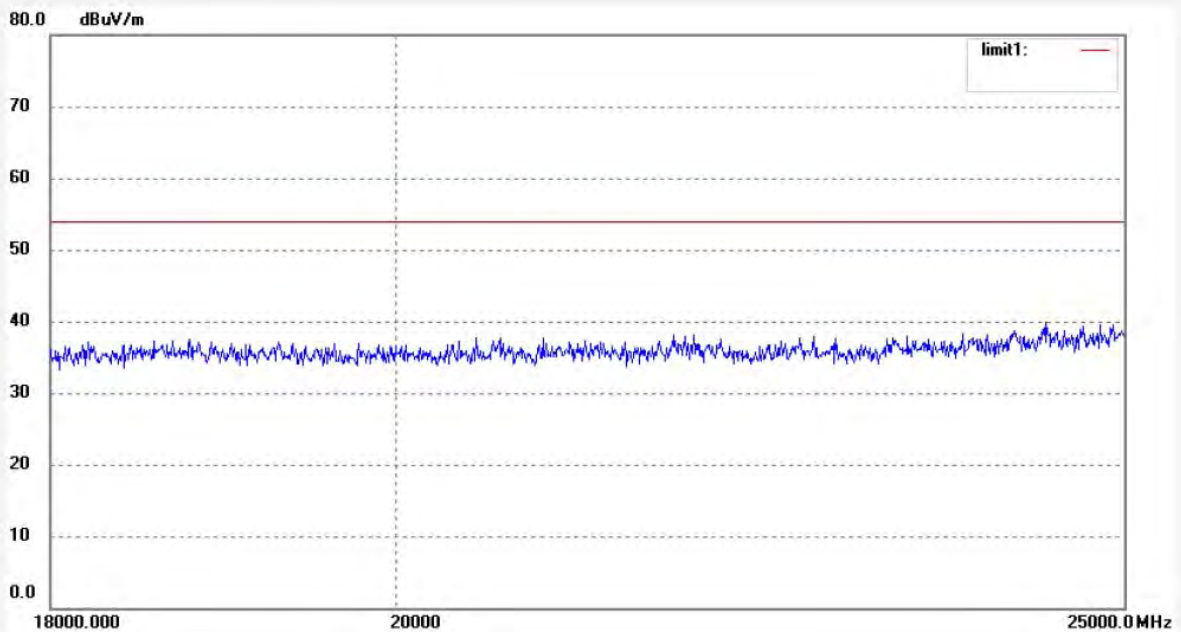

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------






**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: STAR #872	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: DC 5V
Test item: Radiation Test	Date: 2013/05/29
Temp.( C)/Hum.(%) 26 C / 55 %	Time: 13:44:26
EUT: Mini Wireless AP Client	Engineer Signature: STAR
Mode: TX Channel 11(802.11b)	Distance: 3m
Model: WA150M	
Manufacturer: HAOLIYUAN	

Note: Report No.:ATE20131062

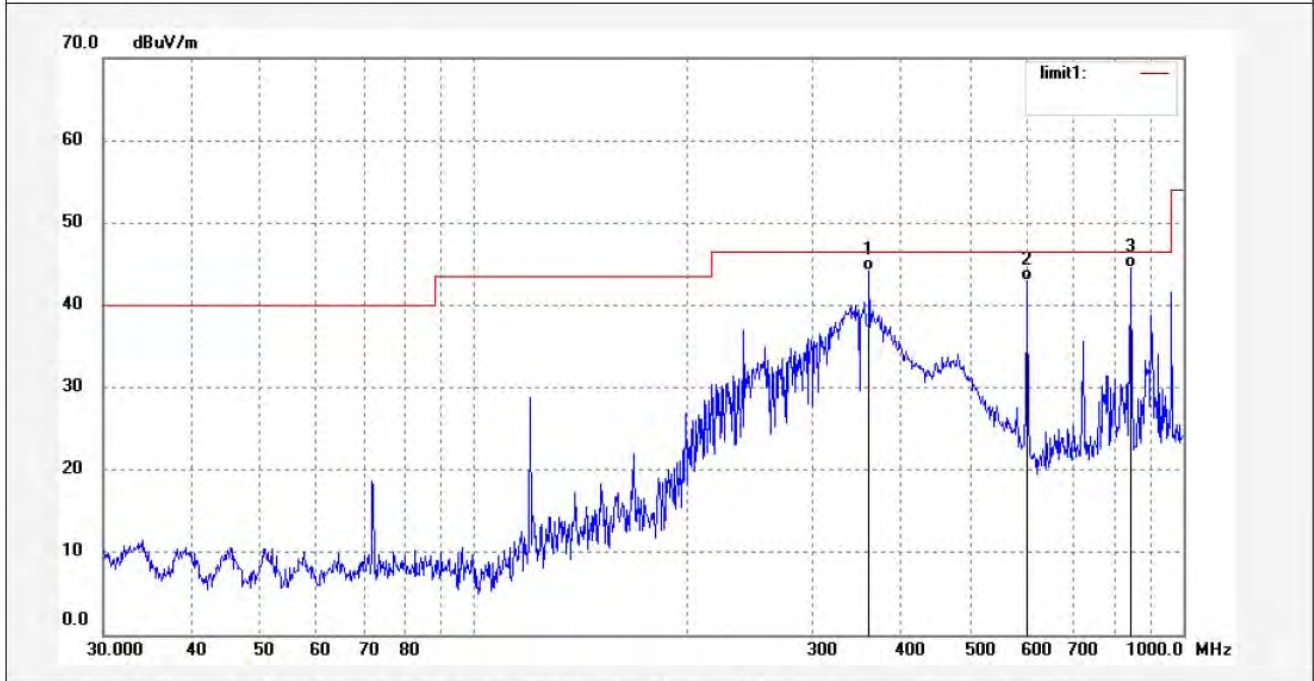

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	360.4476	60.11	-15.92	44.19	46.50	-2.31	QP			
2	601.4265	54.68	-11.65	43.03	46.50	-3.47	QP			
3	842.1295	51.56	-7.10	44.46	46.50	-2.04	QP			



**ACCURATE TECHNOLOGY CO., LTD.**


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: STAR #873  
Standard: FCC Class B 3M Radiated  
Test item: Radiation Test  
Temp.( C)/Hum.(%) 26 C / 55 %  
EUT: Mini Wireless AP Client  
Mode: TX Channel 11(802.11b)  
Model: WA150M  
Manufacturer: HAOLIYUAN

Polarization: Horizontal  
Power Source: DC 5V  
Date: 2013/05/29  
Time: 13:45:07  
Engineer Signature: STAR  
Distance: 3m

Note: Report No.:ATE20131062

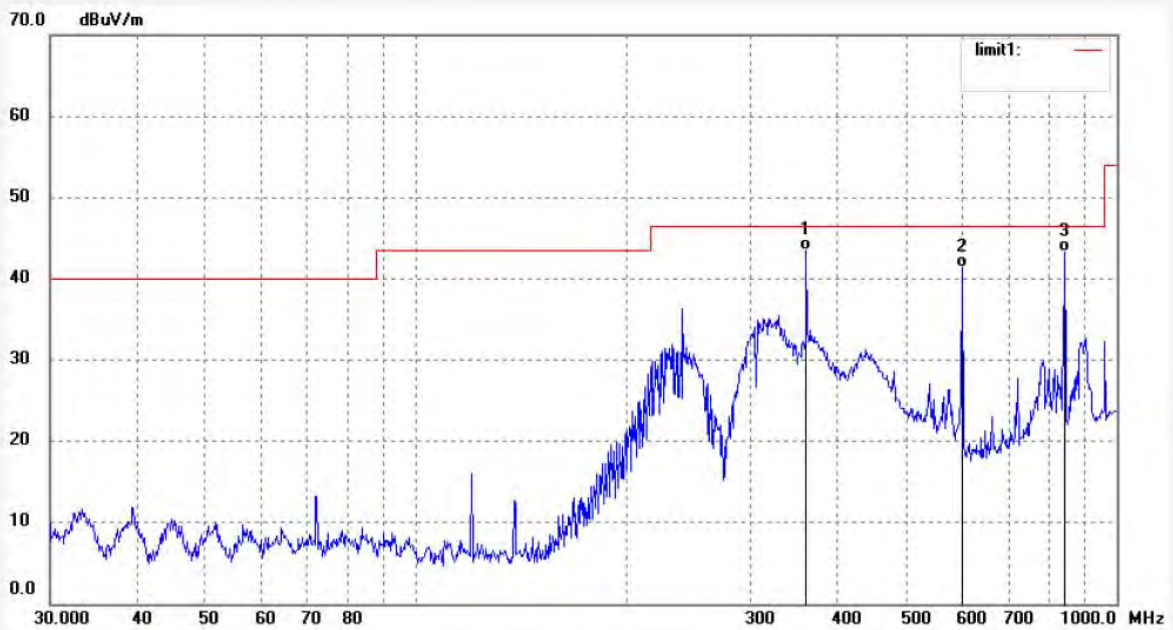

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	360.4476	59.42	-15.92	43.50	46.50	-3.00	QP			
2	601.4265	53.01	-11.65	41.36	46.50	-5.14	QP			
3	842.1296	50.33	-7.10	43.23	46.50	-3.27	QP			




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: star #3389	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: DC 5V
Test item: Radiation Test	Date: 13/05/31/
Temp.( C)/Hum.(%) 26 C / 60 %	Time: 16/11/39
EUT: Mini Wireless AP Client	Engineer Signature:
Mode: TX Channel 11(802.11b)	Distance: 3m
Model: WA150M	
Manufacturer: HAOLIYUAN	

Note: Report No.:ATE20131062

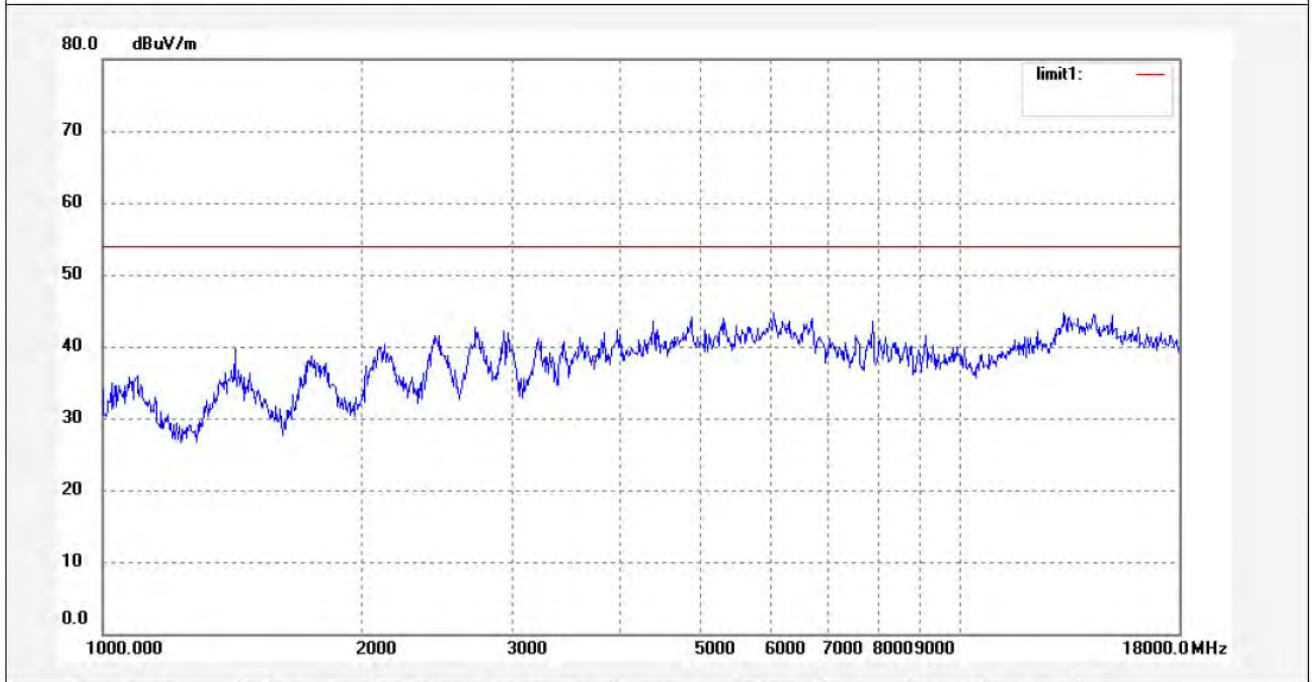

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------






**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: star #3390	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: DC 5V
Test item: Radiation Test	Date: 13/05/31/
Temp.( C)/Hum.(%) 26 C / 60 %	Time: 16/16/58
EUT: Mini Wireless AP Client	Engineer Signature:
Mode: TX Channel 11(802.11b)	Distance: 3m
Model: WA150M	
Manufacturer: HAOLIYUAN	

Note: Report No.:ATE20131062

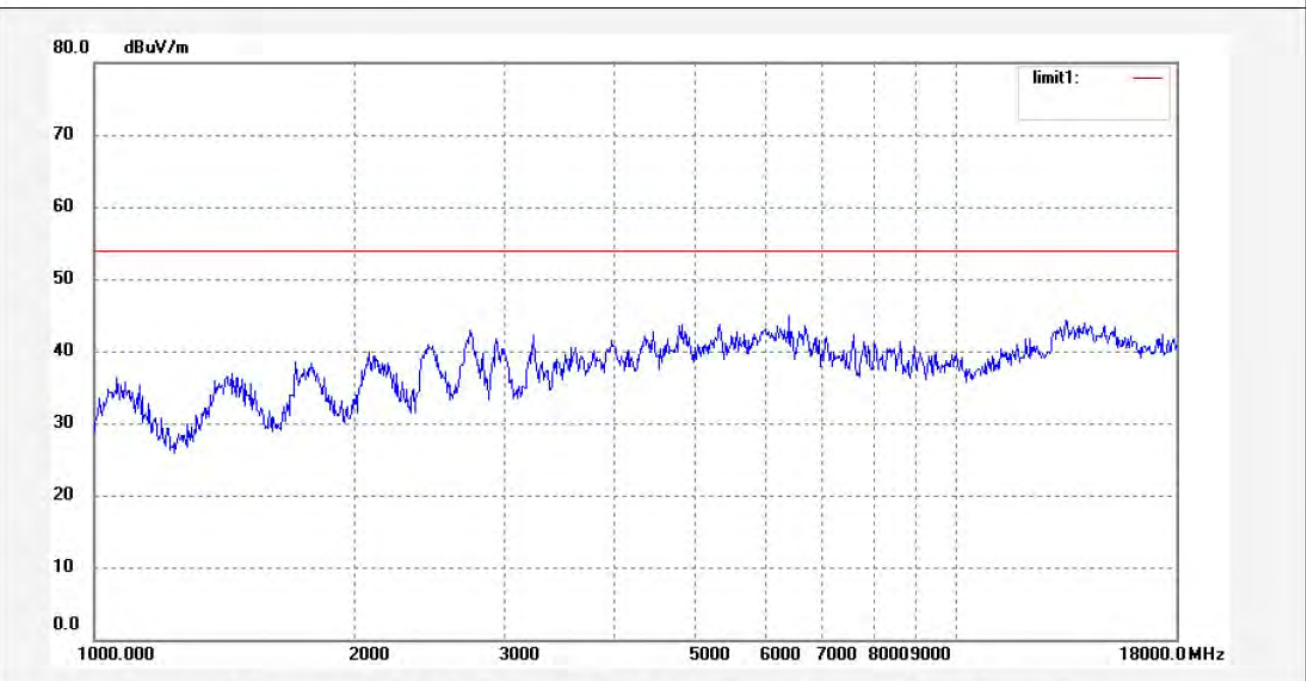

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




**ACCURATE TECHNOLOGY CO., LTD.**  
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: star #3413	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: DC 5V
Test item: Radiation Test	Date: 13/05/31/
Temp.( C)/Hum.(%) 26 C / 60 %	Time: 17/29/33
EUT: Mini Wireless AP Client	Engineer Signature:
Mode: TX Channel 11(802.11b)	Distance: 3m
Model: WA150M	
Manufacturer: HAOLIYUAN	

Note: Report No.:ATE20131062

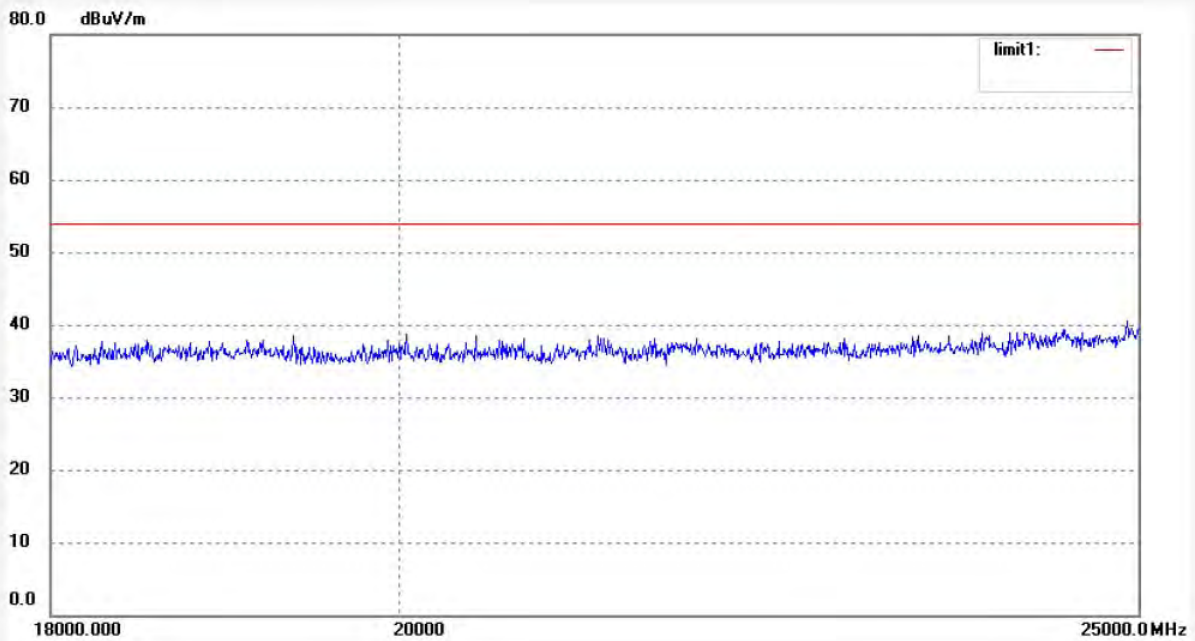

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------






**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: star #3414	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: DC 5V
Test item: Radiation Test	Date: 13/05/31/
Temp.( C)/Hum.(%) 26 C / 60 %	Time: 17/31/54
EUT: Mini Wireless AP Client	Engineer Signature:
Mode: TX Channel 11(802.11b)	Distance: 3m
Model: WA150M	
Manufacturer: HAOLIYUAN	

Note: Report No.:ATE20131062

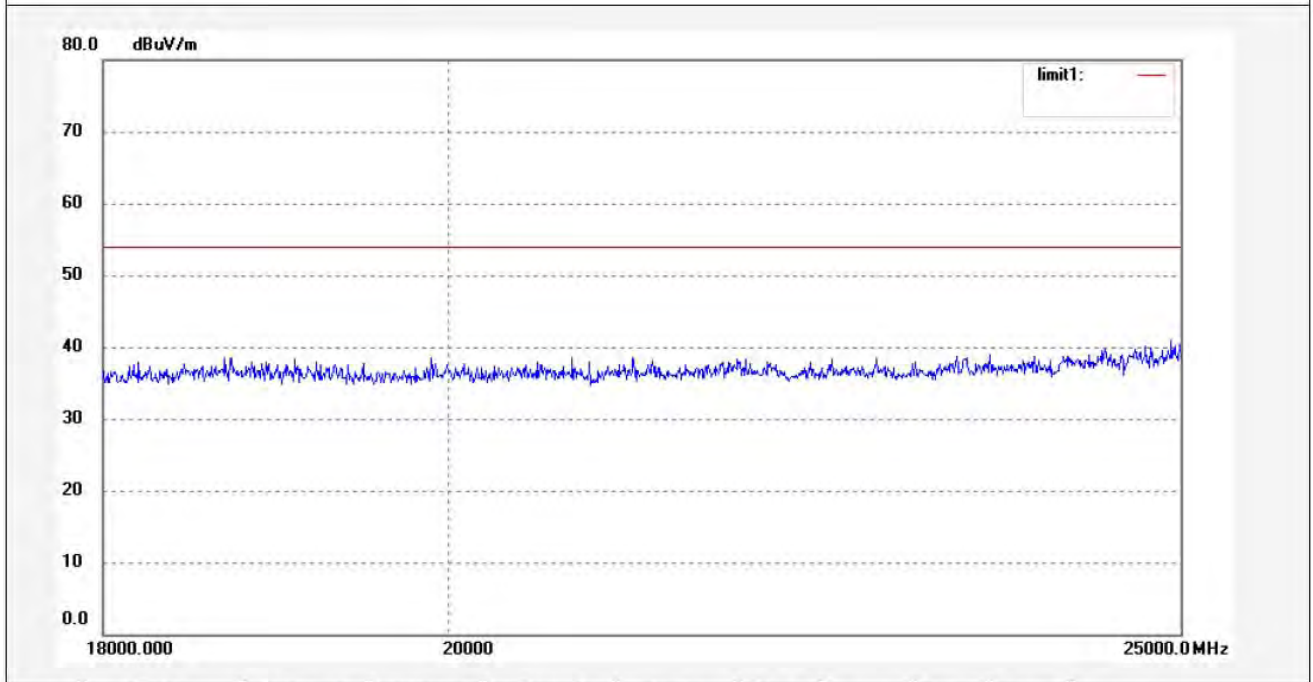

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------



**ACCURATE TECHNOLOGY CO., LTD.**


F1,Bldg.A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: STAR #874  
Standard: FCC Class B 3M Radiated  
Test item: Radiation Test  
Temp.( C)/Hum.(%) 26 C / 55 %  
EUT: Mini Wireless AP Client  
Mode: TX Channel 1(802.11g)  
Model: WA150M  
Manufacturer: HAOLIYUAN

Polarization: Vertical  
Power Source: DC 5V  
Date: 2013/05/29  
Time: 13:48:47  
Engineer Signature: STAR  
Distance: 3m

Note: Report No.:ATE20131062

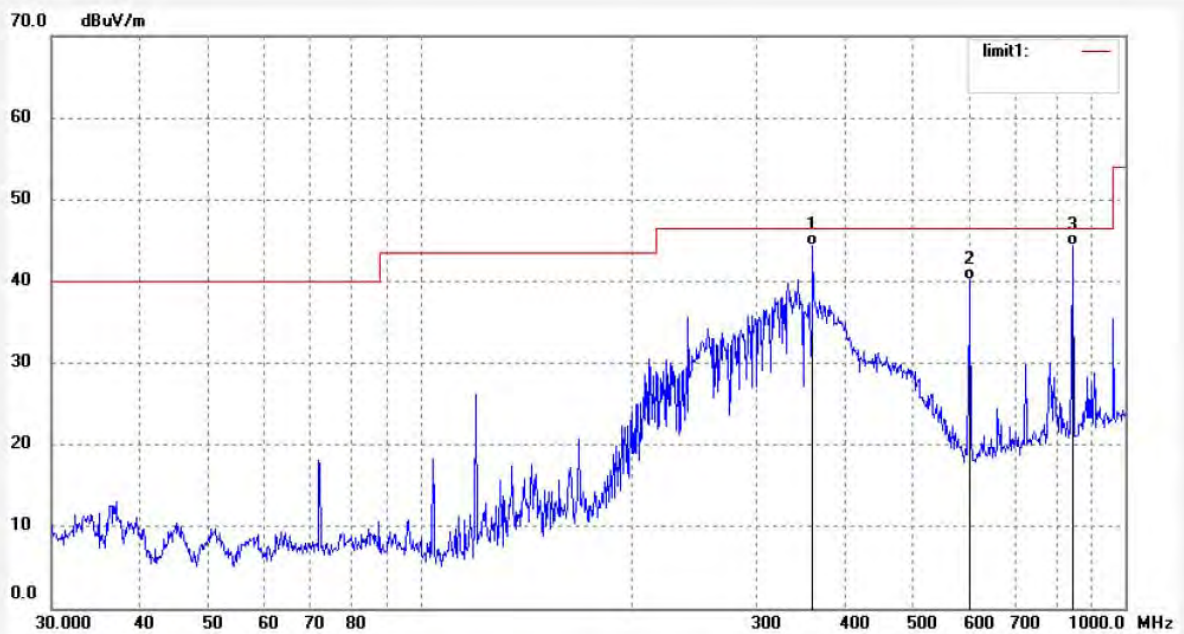

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	360.4476	60.34	-15.92	44.42	46.50	-2.08	QP			
2	601.4265	51.87	-11.65	40.22	46.50	-6.28	QP			
3	842.1295	51.38	-7.10	44.28	46.50	-2.22	QP			




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: STAR #875	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: DC 5V
Test item: Radiation Test	Date: 2013/05/29
Temp.( C)/Hum.(%) 26 C / 55 %	Time: 13:49:29
EUT: Mini Wireless AP Client	Engineer Signature: STAR
Mode: TX Channel 1(802.11g)	Distance: 3m
Model: WA150M	
Manufacturer: HAOLIYUAN	

Note: Report No.:ATE20131062

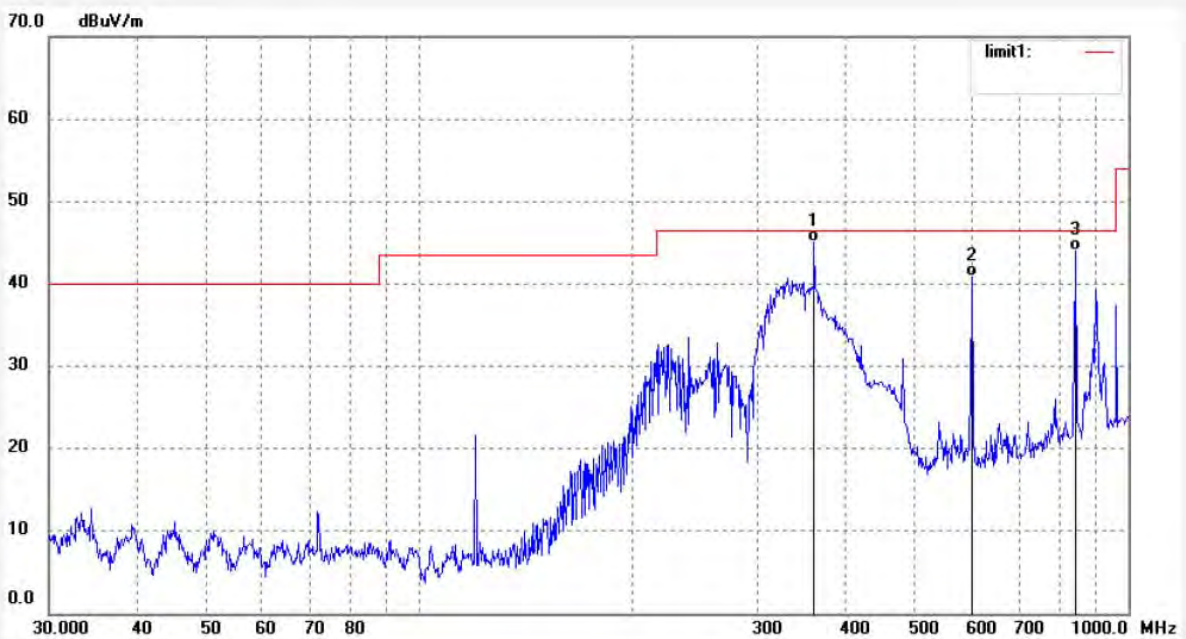

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	360.4476	61.06	-15.92	45.14	46.50	-1.36	QP			
2	601.4265	52.43	-11.65	40.78	46.50	-5.72	QP			
3	842.1296	51.16	-7.10	44.06	46.50	-2.44	QP			






**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: star #3391	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: DC 5V
Test item: Radiation Test	Date: 13/05/31/
Temp.( C)/Hum.(%) 26 C / 60 %	Time: 16/19/18
EUT: Mini Wireless AP Client	Engineer Signature:
Mode: TX Channel 1(802.11g)	Distance: 3m
Model: WA150M	
Manufacturer: HAOLIYUAN	

Note: Report No.:ATE20131062

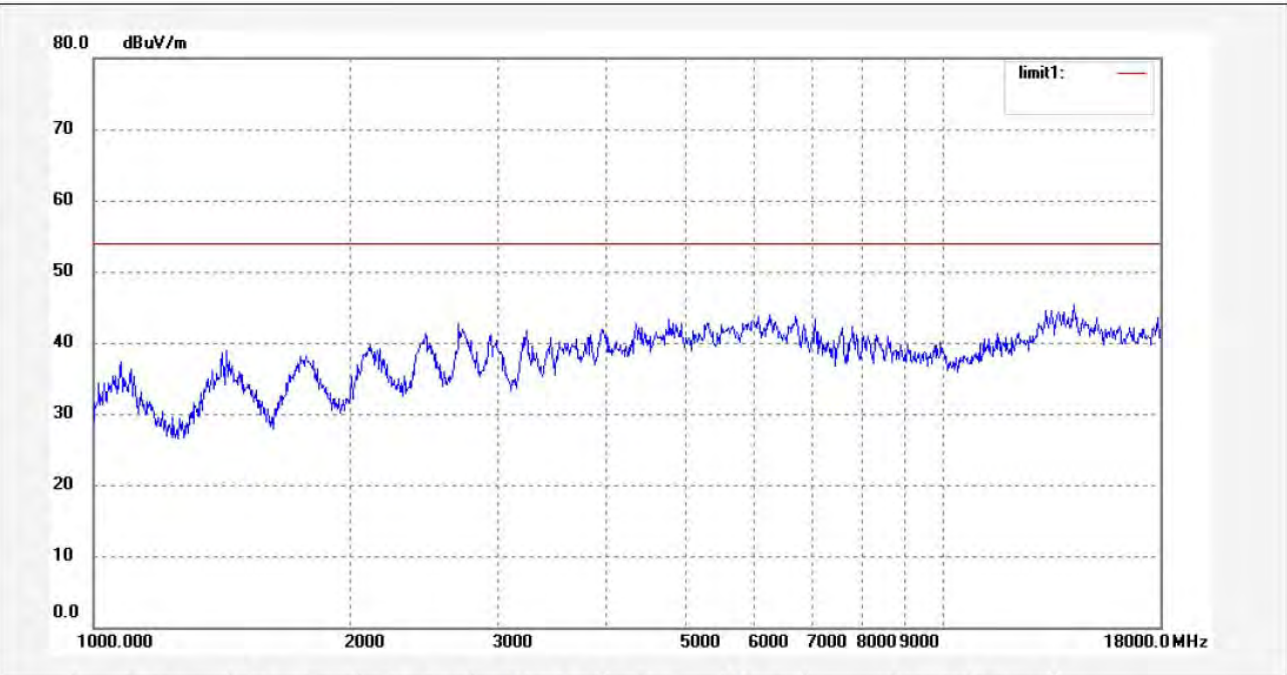

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: star #3392	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: DC 5V
Test item: Radiation Test	Date: 13/05/31/
Temp.( C)/Hum.(%) 26 C / 60 %	Time: 16/21/43
EUT: Mini Wireless AP Client	Engineer Signature:
Mode: TX Channel 1(802.11g)	Distance: 3m
Model: WA150M	
Manufacturer: HAOLIYUAN	

Note: Report No.:ATE20131062

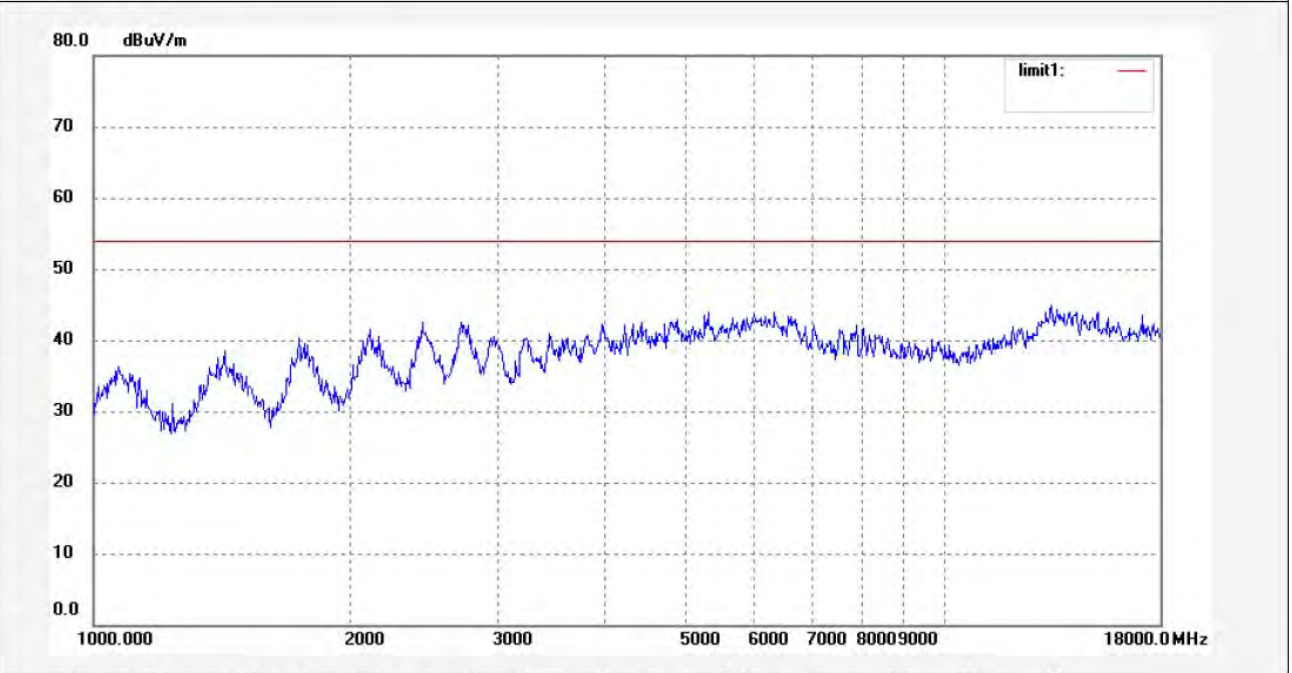

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




**ACCURATE TECHNOLOGY CO., LTD.**  
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: star #3415	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: DC 5V
Test item: Radiation Test	Date: 13/05/31/
Temp.( C)/Hum.(%) 26 C / 60 %	Time: 17/33/08
EUT: Mini Wireless AP Client	Engineer Signature:
Mode: TX Channel 1(802.11g)	Distance: 3m
Model: WA150M	
Manufacturer: HAOLIYUAN	

Note: Report No.:ATE20131062

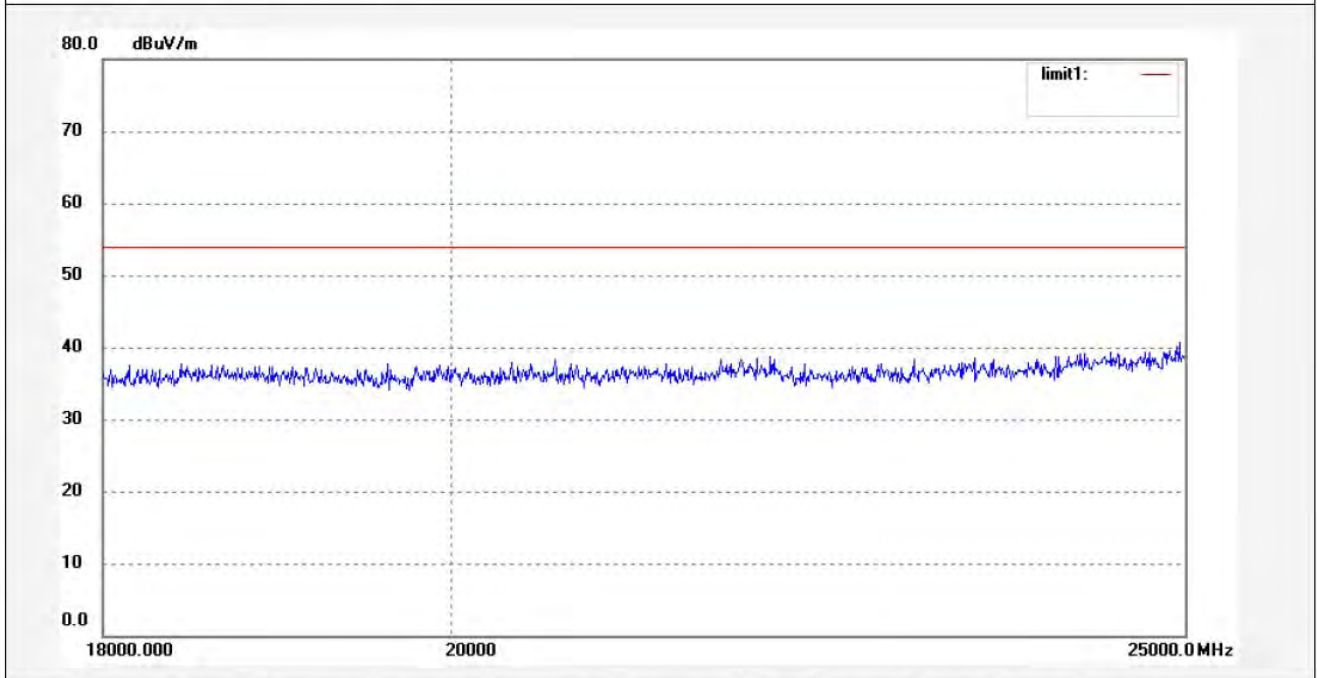

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------






**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: star #3416	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: DC 5V
Test item: Radiation Test	Date: 13/05/31/
Temp.( C)/Hum.(%) 26 C / 60 %	Time: 17/35/21
EUT: Mini Wireless AP Client	Engineer Signature:
Mode: TX Channel 1(802.11g)	Distance: 3m
Model: WA150M	
Manufacturer: HAOLIYUAN	

Note: Report No.:ATE20131062

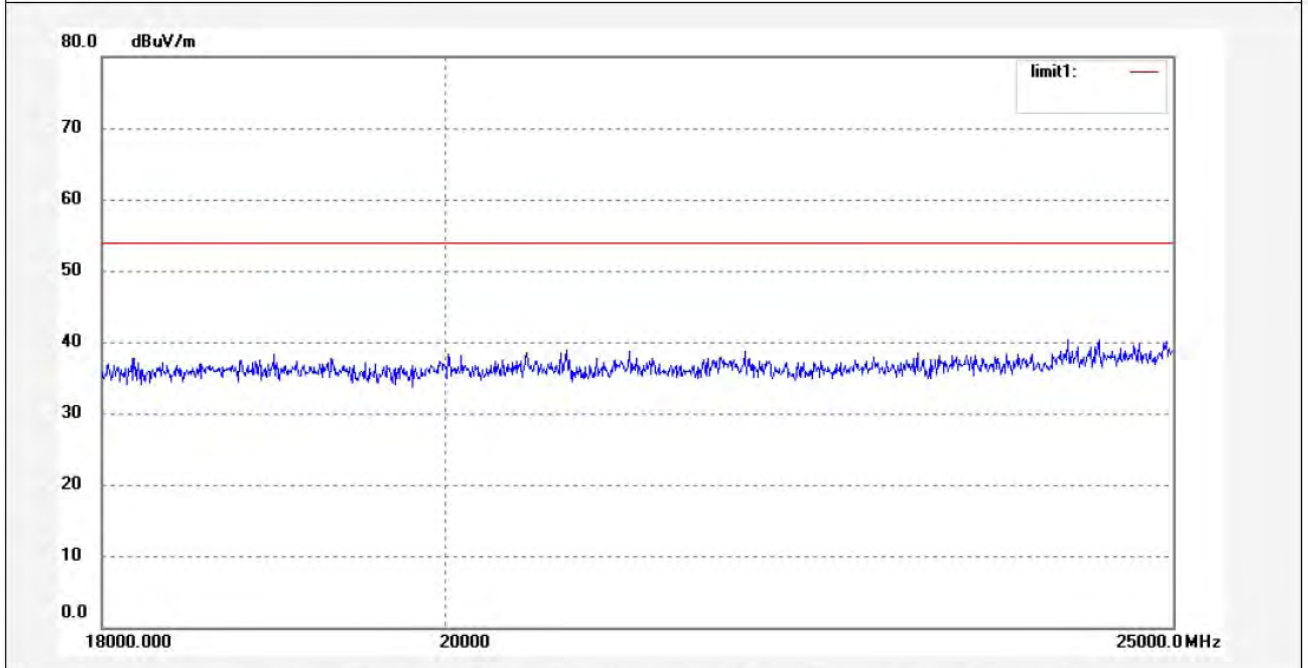

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------



**ACCURATE TECHNOLOGY CO., LTD.**


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: STAR #876  
Standard: FCC Class B 3M Radiated  
Test item: Radiation Test  
Temp.( C)/Hum.(%) 26 C / 55 %  
EUT: Mini Wireless AP Client  
Mode: TX Channel 6(802.11g)  
Model: WA150M  
Manufacturer: HAOLIYUAN

Polarization: Horizontal  
Power Source: DC 5V  
Date: 2013/05/29  
Time: 13:49:59  
Engineer Signature: STAR  
Distance: 3m

Note: Report No.:ATE20131062

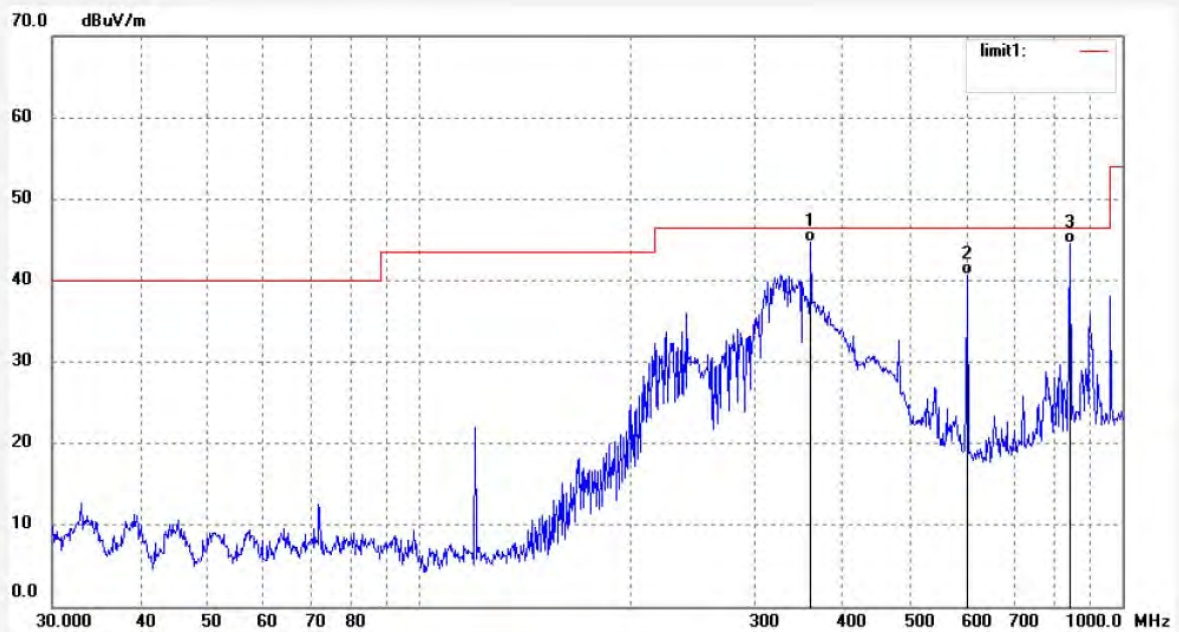

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	360.4476	60.56	-15.92	44.64	46.50	-1.86	QP			
2	601.4265	52.33	-11.65	40.68	46.50	-5.82	QP			
3	842.1295	51.59	-7.10	44.49	46.50	-2.01	QP			






**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: STAR #877	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: DC 5V
Test item: Radiation Test	Date: 2013/05/29
Temp.( C)/Hum.(%) 26 C / 55 %	Time: 13:50:31
EUT: Mini Wireless AP Client	Engineer Signature: STAR
Mode: TX Channel 6(802.11g)	Distance: 3m
Model: WA150M	
Manufacturer: HAOLIYUAN	

Note: Report No.:ATE20131062

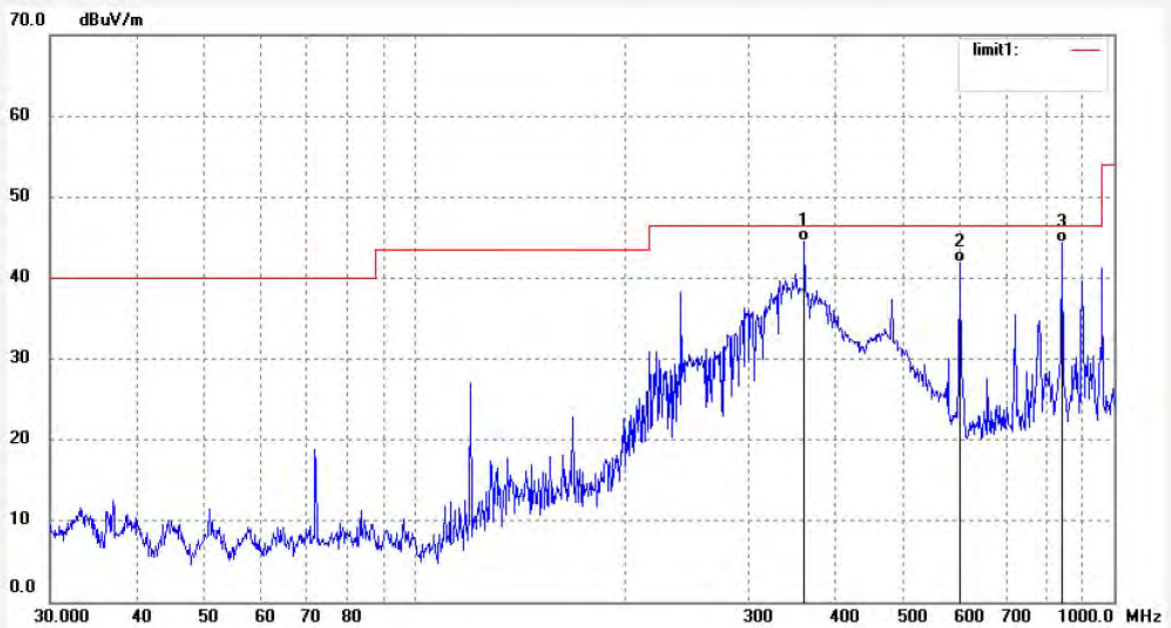

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	360.4476	60.53	-15.92	44.61	46.50	-1.89	QP			
2	601.4265	53.56	-11.65	41.91	46.50	-4.59	QP			
3	842.1295	51.40	-7.10	44.30	46.50	-2.20	QP			




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: star #3393	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: DC 5V
Test item: Radiation Test	Date: 13/05/31/
Temp.( C)/Hum.(%) 26 C / 60 %	Time: 16/25/08
EUT: Mini Wireless AP Client	Engineer Signature:
Mode: TX Channel 6(802.11g)	Distance: 3m
Model: WA150M	
Manufacturer: HAOLIYUAN	

Note: Report No.:ATE20131062

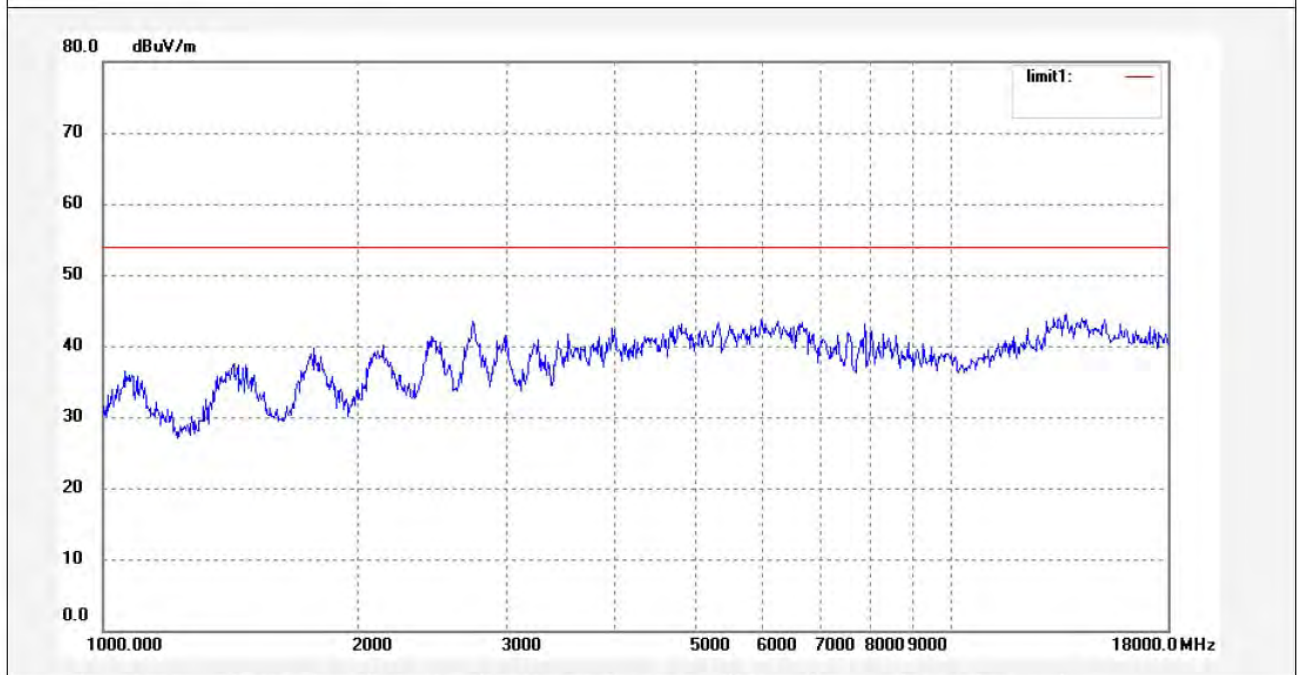

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: star #3394	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: DC 5V
Test item: Radiation Test	Date: 13/05/31/
Temp.( C)/Hum.(%) 26 C / 60 %	Time: 16/28/53
EUT: Mini Wireless AP Client	Engineer Signature:
Mode: TX Channel 6(802.11g)	Distance: 3m
Model: WA150M	
Manufacturer: HAOLIYUAN	

Note: Report No.:ATE20131062

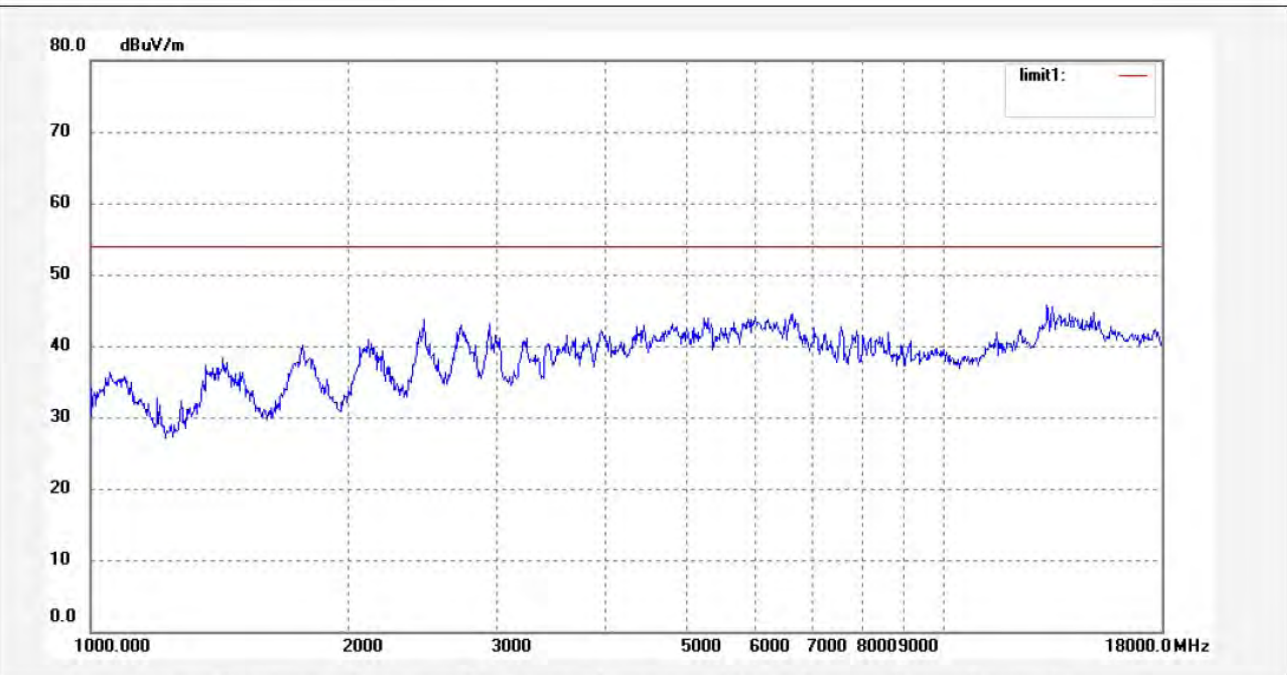

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------






**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: star #3417	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: DC 5V
Test item: Radiation Test	Date: 13/05/31/
Temp.( C)/Hum.(%) 26 C / 60 %	Time: 17/38/43
EUT: Mini Wireless AP Client	Engineer Signature:
Mode: TX Channel 6(802.11g)	Distance: 3m
Model: WA150M	
Manufacturer: HAOLIYUAN	

Note: Report No.:ATE20131062

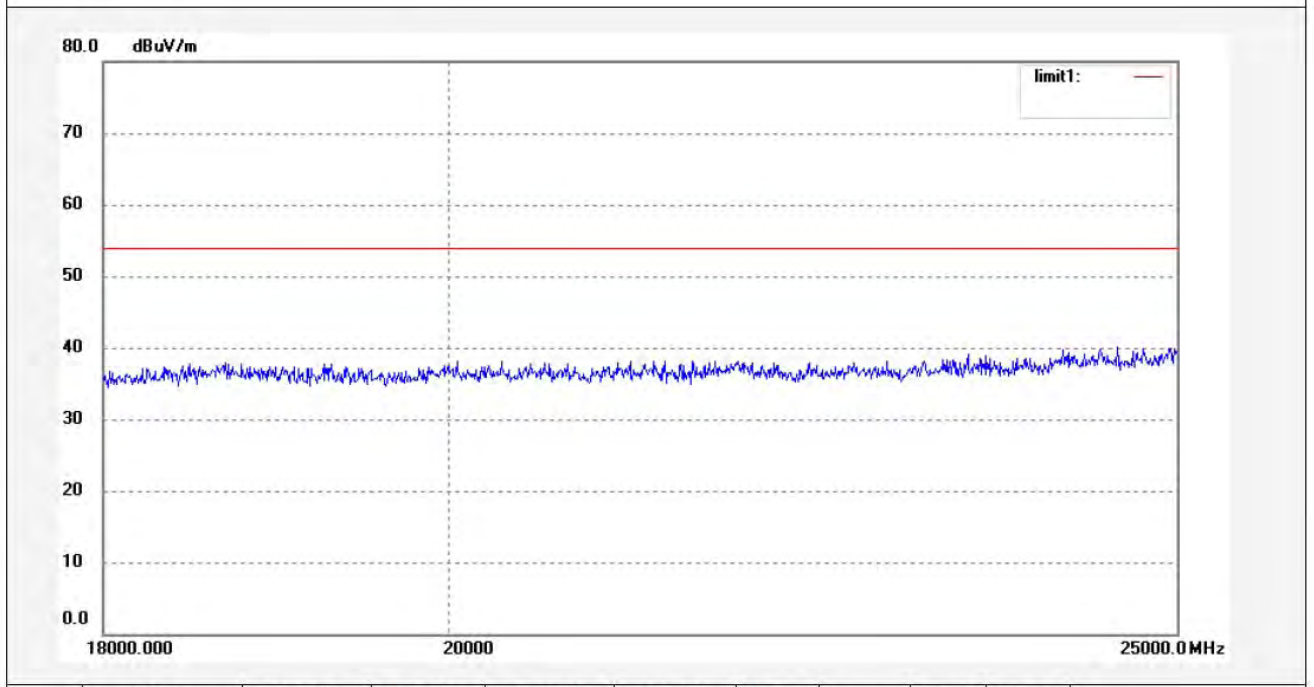

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------



**ACCURATE TECHNOLOGY CO., LTD.**


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: star #3418  
Standard: FCC Class B 3M Radiated  
Test item: Radiation Test  
Temp.( C)/Hum.(%) 26 C / 60 %  
EUT: Mini Wireless AP Client  
Mode: TX Channel 6(802.11g)  
Model: WA150M  
Manufacturer: HAOLIYUAN

Polarization: Vertical  
Power Source: DC 5V  
Date: 13/05/31/  
Time: 17/40/57  
Engineer Signature:  
Distance: 3m

Note: Report No.:ATE20131062

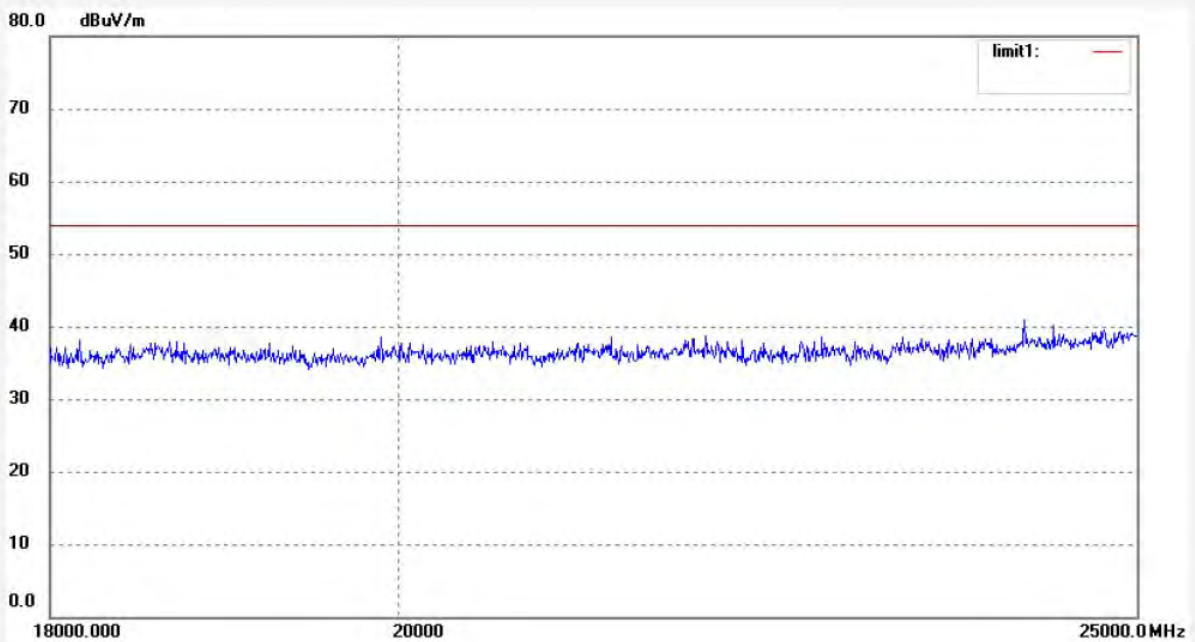

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: STAR #878	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: DC 5V
Test item: Radiation Test	Date: 2013/05/29
Temp.( C)/Hum.(%) 26 C / 55 %	Time: 13:51:58
EUT: Mini Wireless AP Client	Engineer Signature: STAR
Mode: TX Channel 11(802.11g)	Distance: 3m
Model: WA150M	
Manufacturer: HAOLIYUAN	

Note: Report No.:ATE20131062

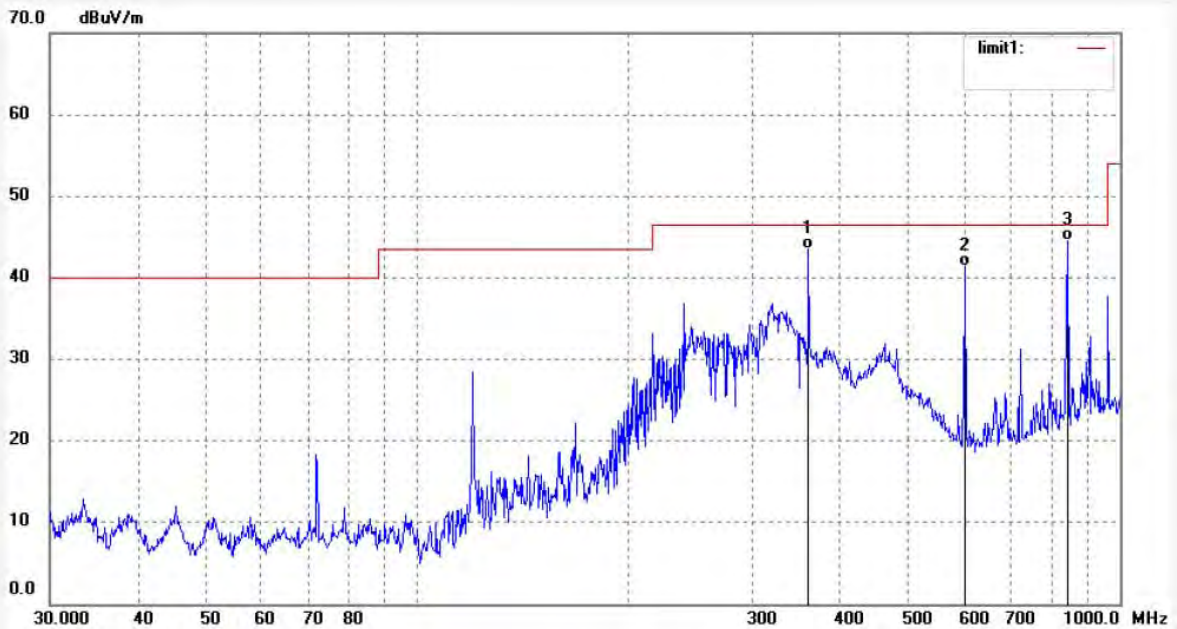

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	360.4476	59.39	-15.92	43.47	46.50	-3.03	QP			
2	601.4265	52.97	-11.65	41.32	46.50	-5.18	QP			
3	842.1295	51.72	-7.10	44.62	46.50	-1.88	QP			





**ACCURATE TECHNOLOGY CO., LTD.**


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: STAR #879  
Standard: FCC Class B 3M Radiated  
Test item: Radiation Test  
Temp.( C)/Hum.(%) 26 C / 55 %  
EUT: Mini Wireless AP Client  
Mode: TX Channel 11(802.11g)  
Model: WA150M  
Manufacturer: HAOLIYUAN

Polarization: Horizontal  
Power Source: DC 5V  
Date: 2013/05/29  
Time: 13:52:33  
Engineer Signature: STAR  
Distance: 3m

Note: Report No.:ATE20131062

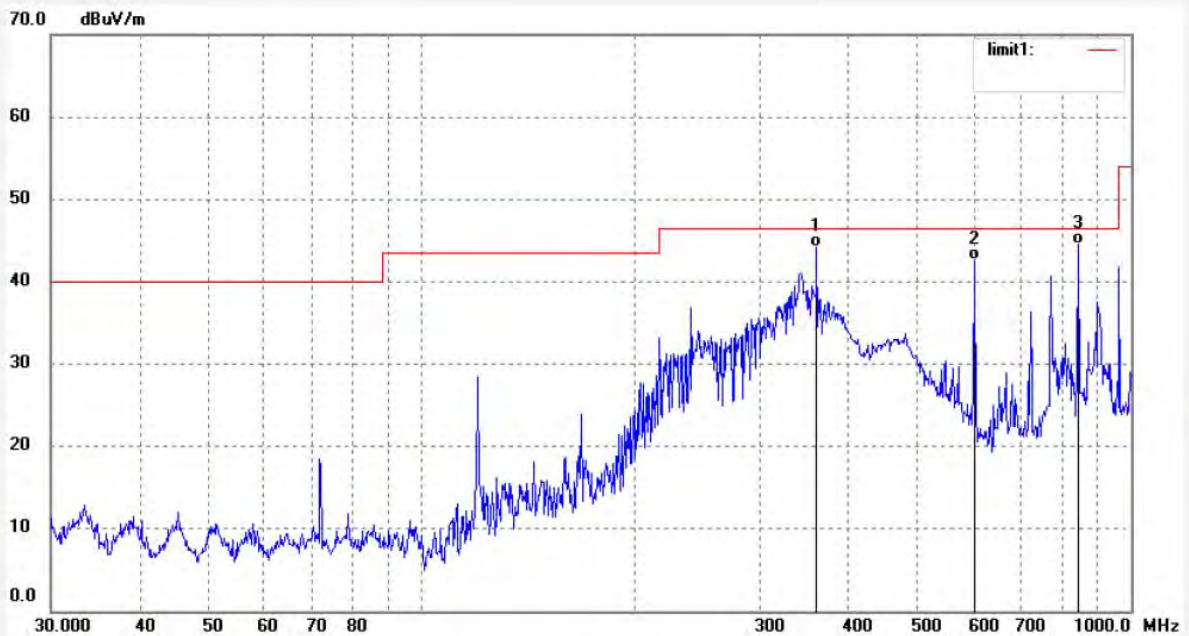

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	360.4476	60.18	-15.92	44.26	46.50	-2.24	QP			
2	601.4265	54.26	-11.65	42.61	46.50	-3.89	QP			
3	842.1295	51.72	-7.10	44.62	46.50	-1.88	QP			




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: star #3395	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: DC 5V
Test item: Radiation Test	Date: 13/05/31/
Temp.( C)/Hum.(%) 26 C / 60 %	Time: 16/31/45
EUT: Mini Wireless AP Client	Engineer Signature:
Mode: TX Channel 11(802.11g)	Distance: 3m
Model: WA150M	
Manufacturer: HAOLIYUAN	

Note: Report No.:ATE20131062

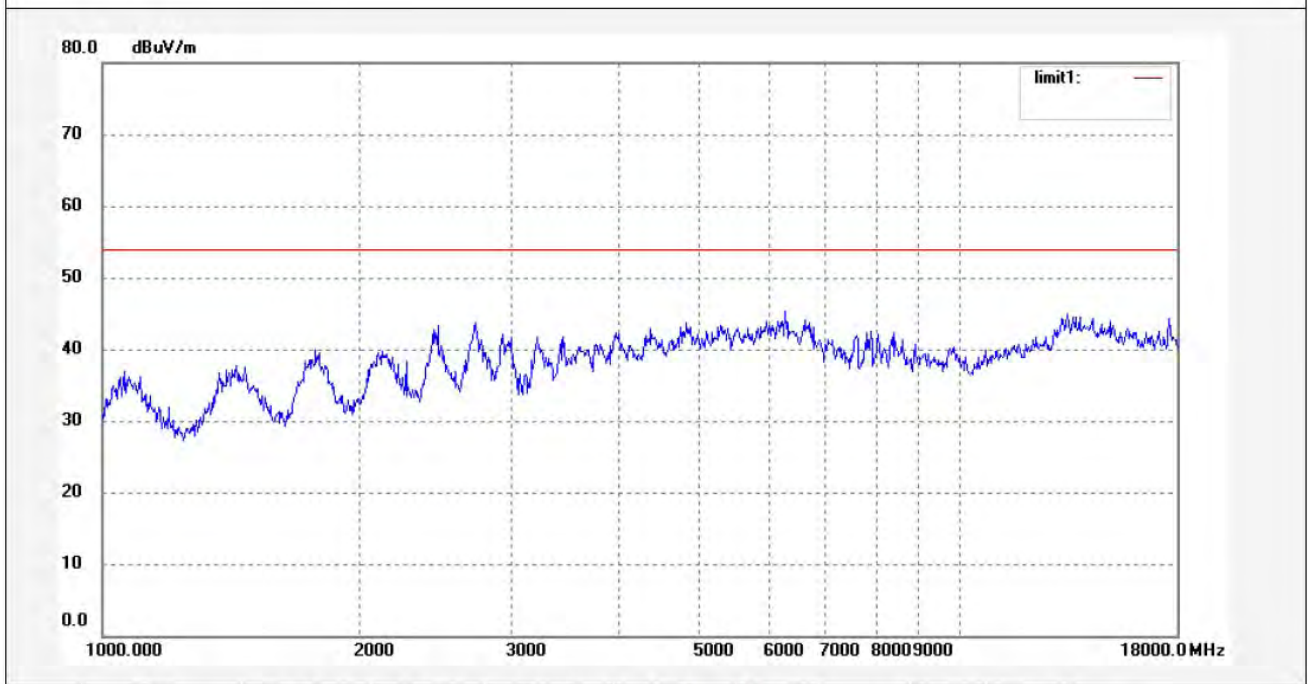

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------






**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: star #3396	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: DC 5V
Test item: Radiation Test	Date: 13/05/31/
Temp.( C)/Hum.(%) 26 C / 60 %	Time: 16/35/05
EUT: Mini Wireless AP Client	Engineer Signature:
Mode: TX Channel 11(802.11g)	Distance: 3m
Model: WA150M	
Manufacturer: HAOLIYUAN	

Note: Report No.:ATE20131062

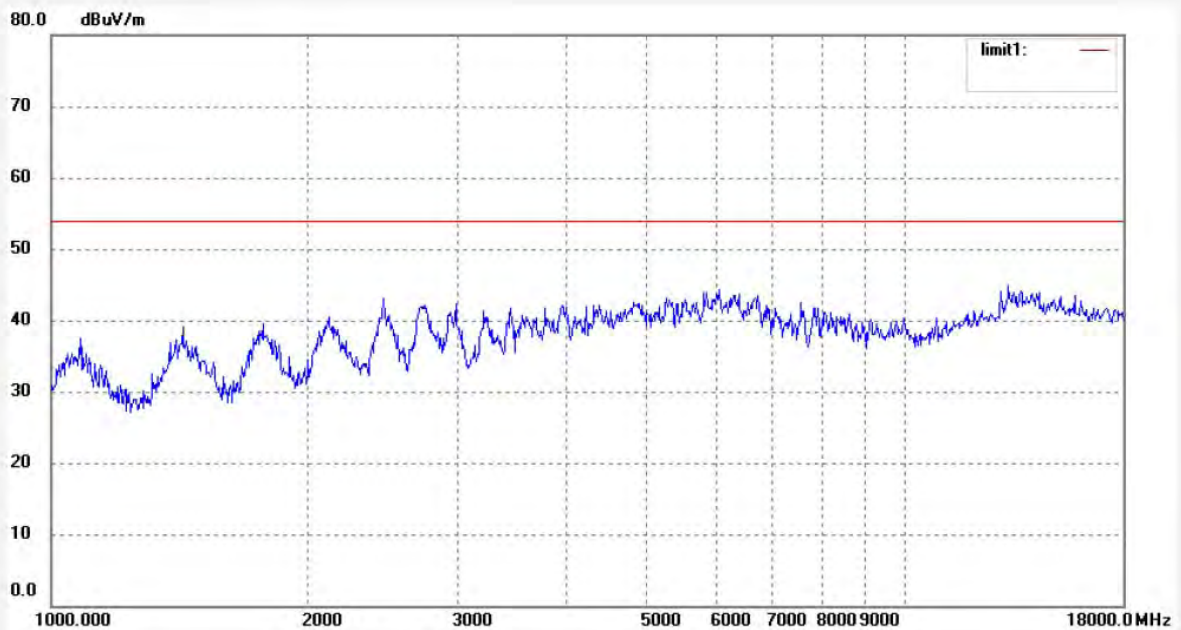

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: star #3419	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: DC 5V
Test item: Radiation Test	Date: 13/05/31/
Temp.( C)/Hum.(%) 26 C / 60 %	Time: 17/43/18
EUT: Mini Wireless AP Client	Engineer Signature:
Mode: TX Channel 11(802.11g)	Distance: 3m
Model: WA150M	
Manufacturer: HAOLIYUAN	

Note: Report No.:ATE20131062

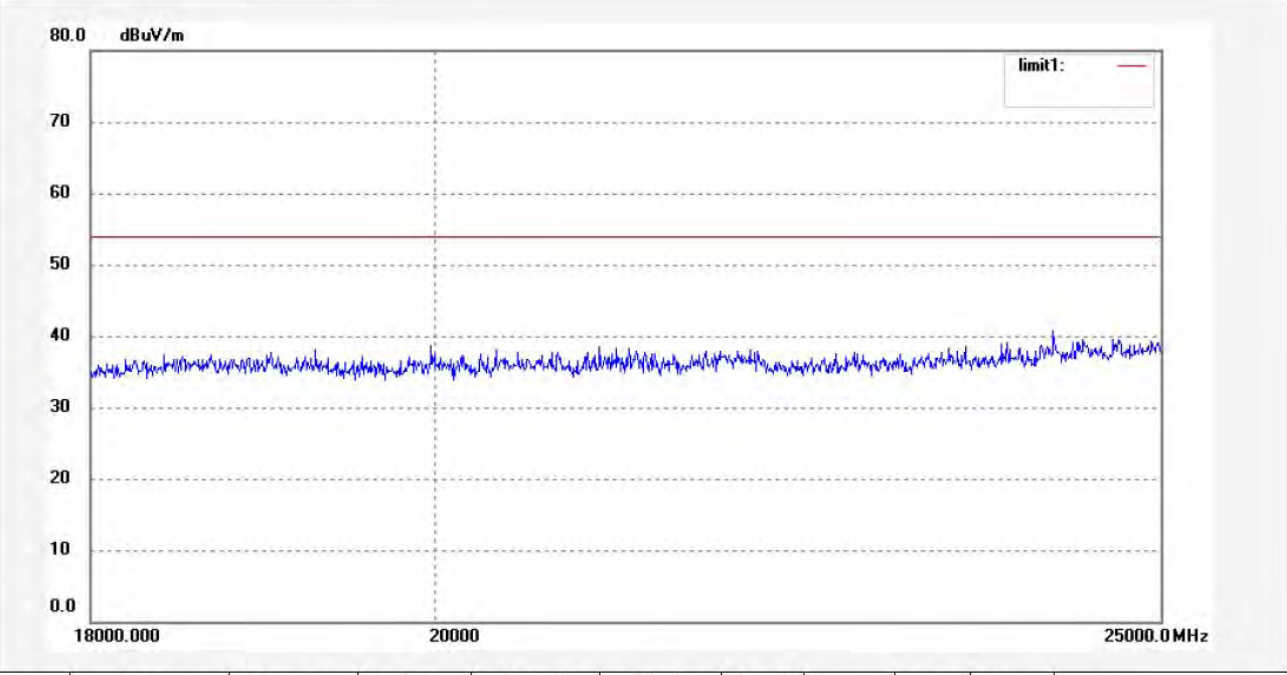

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: star #3420	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: DC 5V
Test item: Radiation Test	Date: 13/05/31/
Temp.( C)/Hum.(%) 26 C / 60 %	Time: 17/46/27
EUT: Mini Wireless AP Client	Engineer Signature:
Mode: TX Channel 11(802.11g)	Distance: 3m
Model: WA150M	
Manufacturer: HAOLIYUAN	

Note: Report No.:ATE20131062

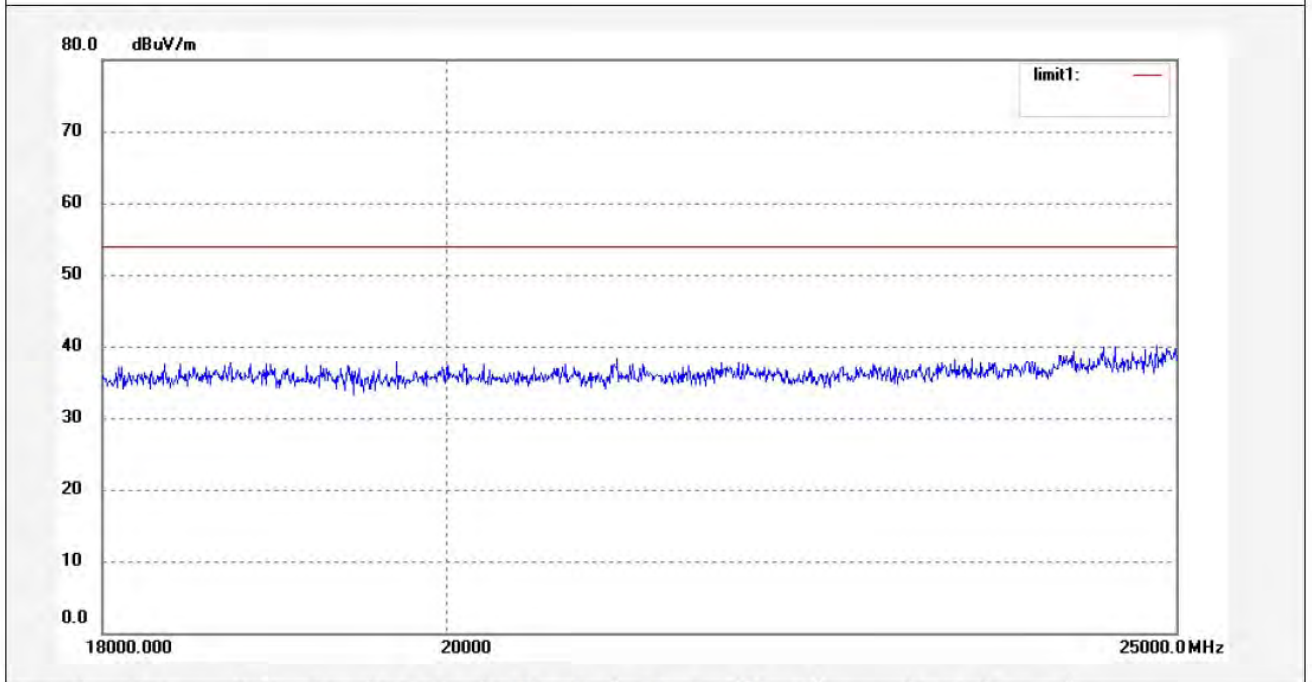

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------






**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: STAR #880	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: DC 5V
Test item: Radiation Test	Date: 2013/05/29
Temp.( C)/Hum.(%) 26 C / 55 %	Time: 13:53:33
EUT: Mini Wireless AP Client	Engineer Signature: STAR
Mode: TX Channel 1(802.11n)20MHz	Distance: 3m
Model: WA150M	
Manufacturer: HAOLIYUAN	

Note: Report No.:ATE20131062

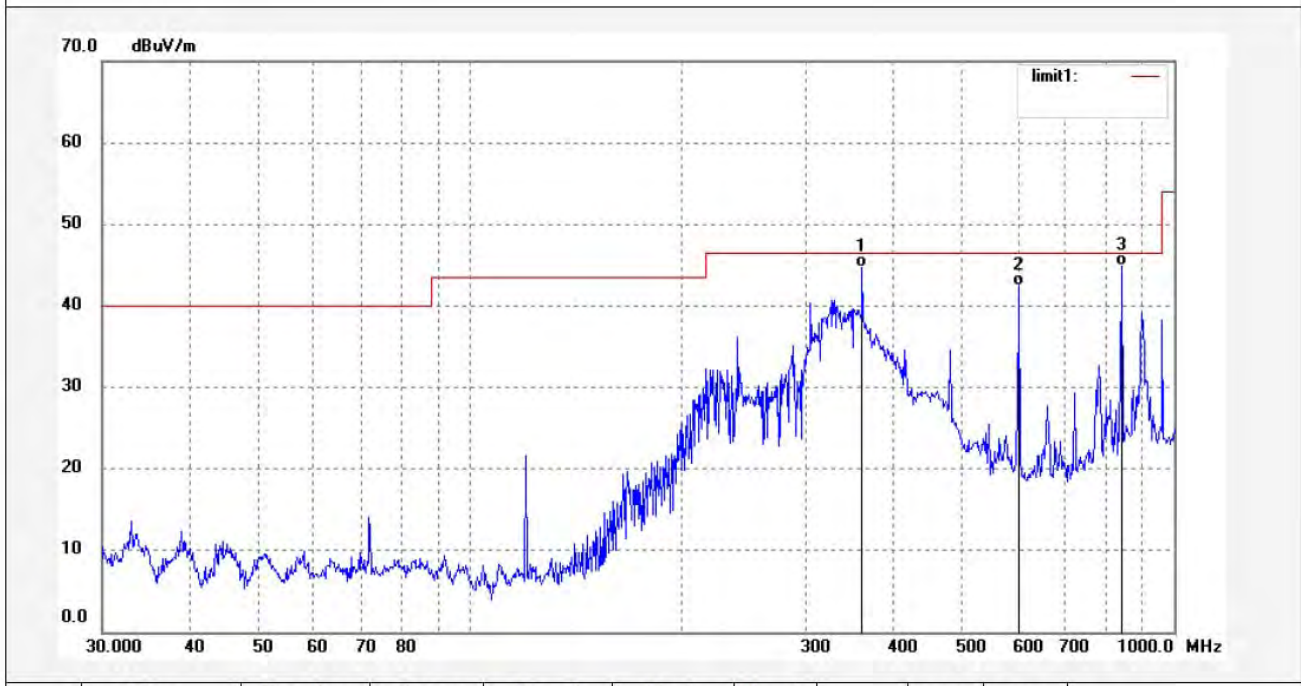

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	360.4476	60.55	-15.92	44.63	46.50	-1.87	QP			
2	601.4265	54.02	-11.65	42.37	46.50	-4.13	QP			
3	842.1296	51.94	-7.10	44.84	46.50	-1.66	QP			






**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: STAR #881	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: DC 5V
Test item: Radiation Test	Date: 2013/05/29
Temp.( C)/Hum.(%) 26 C / 55 %	Time: 13:55:02
EUT: Mini Wireless AP Client	Engineer Signature: STAR
Mode: TX Channel 1(802.11n)20MHz	Distance: 3m
Model: WA150M	
Manufacturer: HAOLIYUAN	

Note: Report No.:ATE20131062

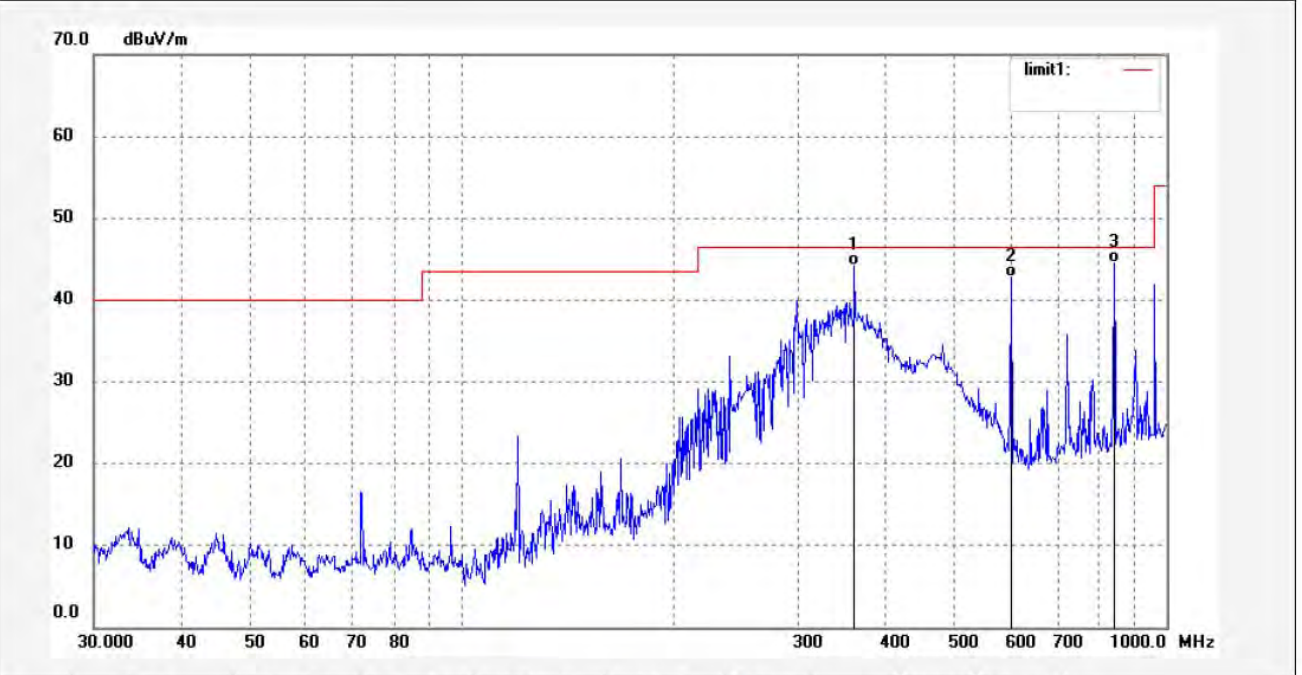

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	360.4476	60.15	-15.92	44.23	46.50	-2.27	QP			
2	601.4265	54.49	-11.65	42.84	46.50	-3.66	QP			
3	842.1295	51.59	-7.10	44.49	46.50	-2.01	QP			




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: star #3397	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: DC 5V
Test item: Radiation Test	Date: 13/05/31/
Temp.( C)/Hum.(%) 26 C / 60 %	Time: 16/39/37
EUT: Mini Wireless AP Client	Engineer Signature:
Mode: TX Channel 1(802.11n)20MHz	Distance: 3m
Model: WA150M	
Manufacturer: HAOLIYUAN	

Note: Report No.:ATE20131062

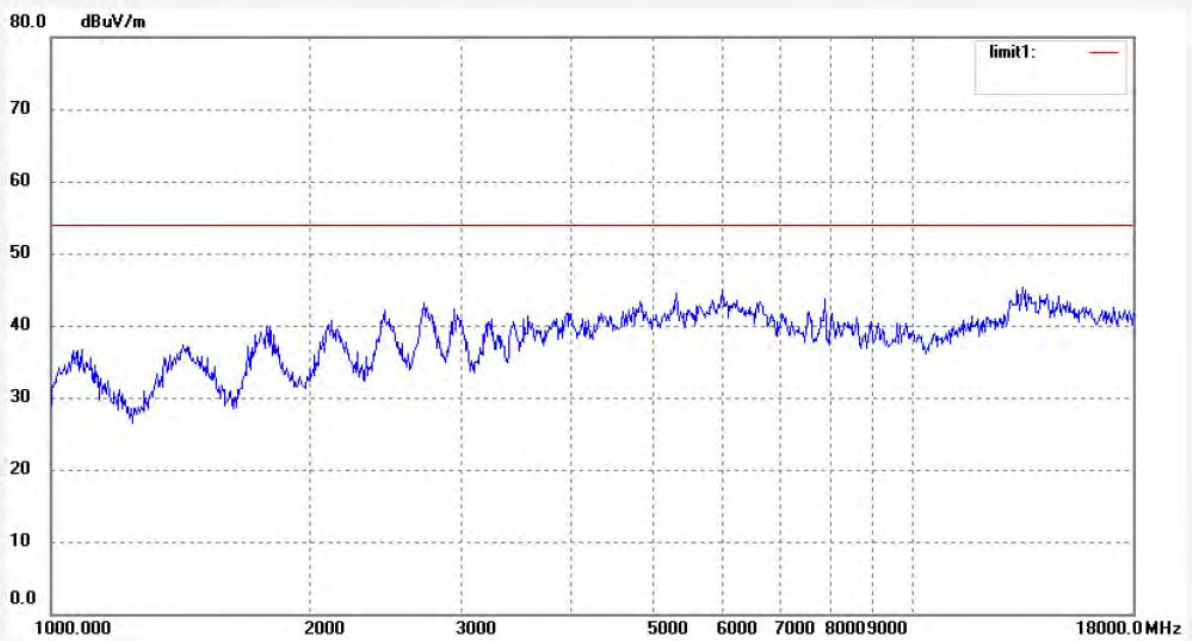

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------



**ACCURATE TECHNOLOGY CO., LTD.**


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: star #3398  
Standard: FCC Class B 3M Radiated  
Test item: Radiation Test  
Temp.( C)/Hum.(%) 26 C / 60 %  
EUT: Mini Wireless AP Client  
Mode: TX Channel 1(802.11n)20MHz  
Model: WA150M  
Manufacturer: HAOLIYUAN

Polarization: Vertical  
Power Source: DC 5V  
Date: 13/05/31/  
Time: 16/42/14  
Engineer Signature:  
Distance: 3m

Note: Report No.:ATE20131062

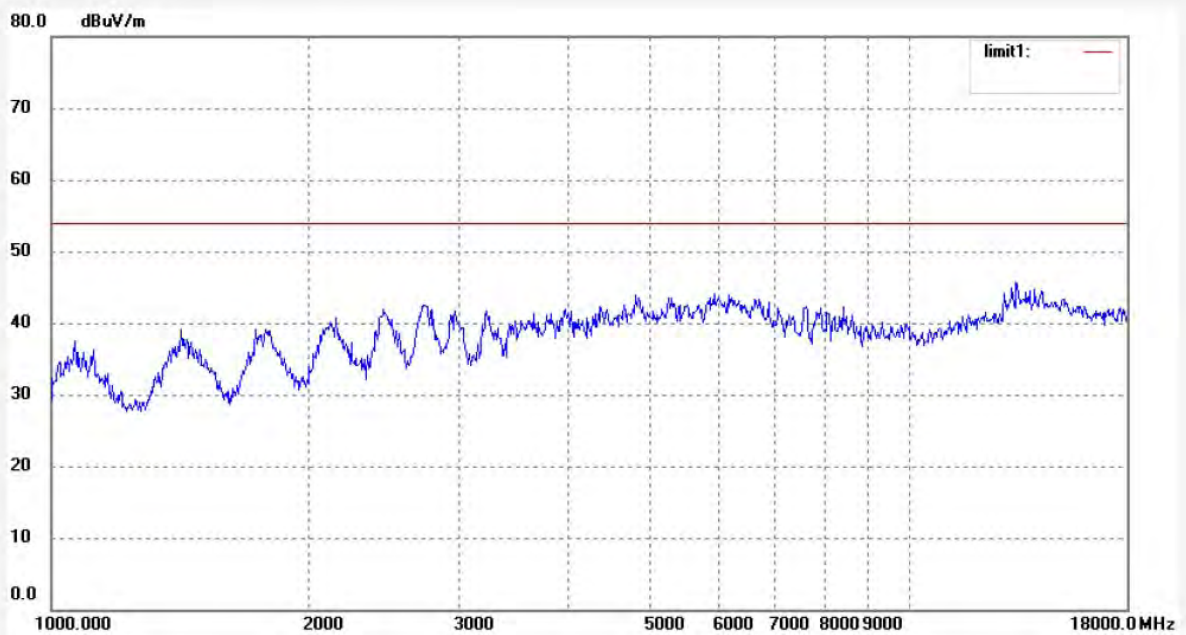

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------






**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: star #3421	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: DC 5V
Test item: Radiation Test	Date: 13/05/31/
Temp.( C)/Hum.(%) 26 C / 60 %	Time: 17/49/06
EUT: Mini Wireless AP Client	Engineer Signature:
Mode: TX Channel 1(802.11n)20MHz	Distance: 3m
Model: WA150M	
Manufacturer: HAOLIYUAN	

Note: Report No.:ATE20131062

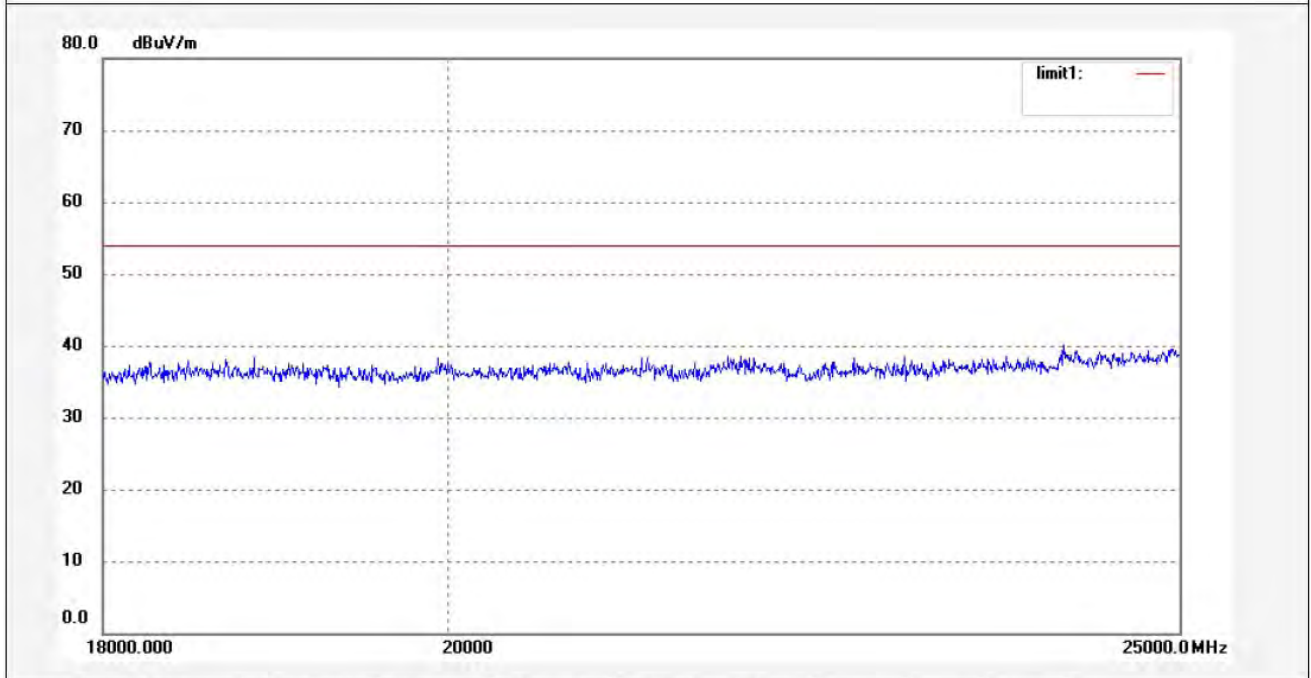

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------






**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: star #3422	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: DC 5V
Test item: Radiation Test	Date: 13/05/31/
Temp.( C)/Hum.(%) 26 C / 60 %	Time: 17/52/18
EUT: Mini Wireless AP Client	Engineer Signature:
Mode: TX Channel 1(802.11n)20MHz	Distance: 3m
Model: WA150M	
Manufacturer: HAOLIYUAN	

Note: Report No.:ATE20131062

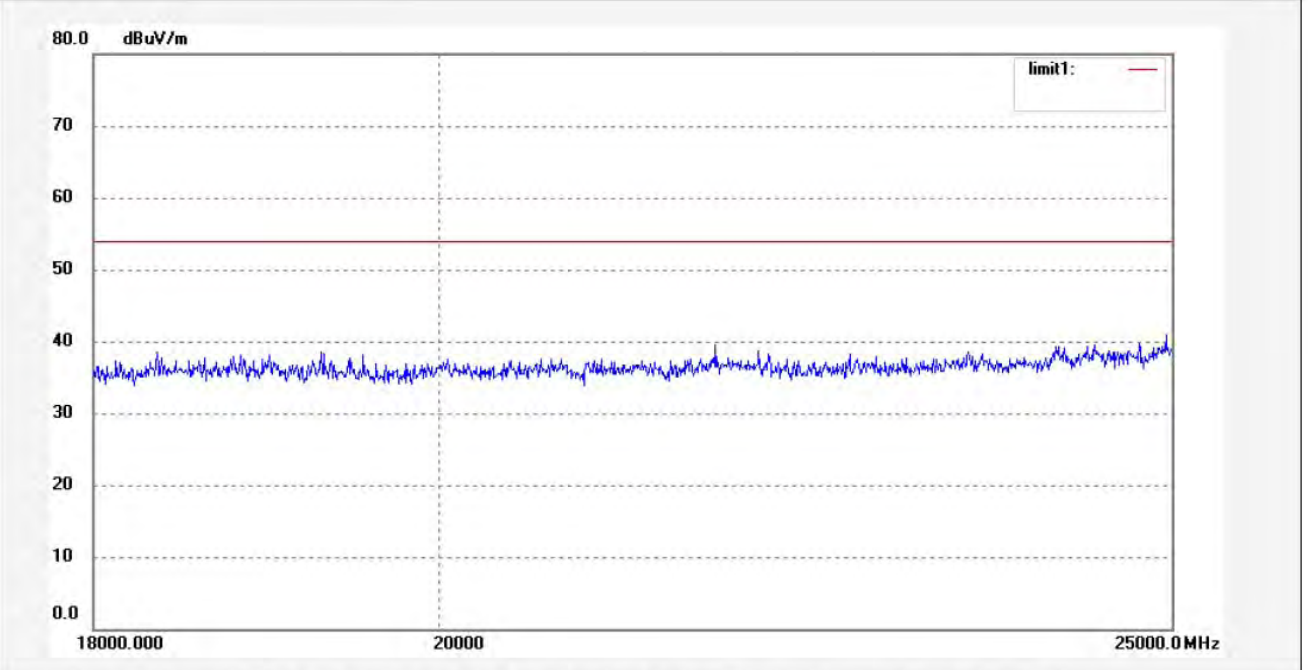

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg.A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: STAR #882	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: DC 5V
Test item: Radiation Test	Date: 2013/05/29
Temp.( C)/Hum.(%) 26 C / 55 %	Time: 13:56:01
EUT: Mini Wireless AP Client	Engineer Signature: STAR
Mode: TX Channel 6(802.11n)20MHz	Distance: 3m
Model: WA150M	
Manufacturer: HAOLIYUAN	

Note: Report No.:ATE20131062

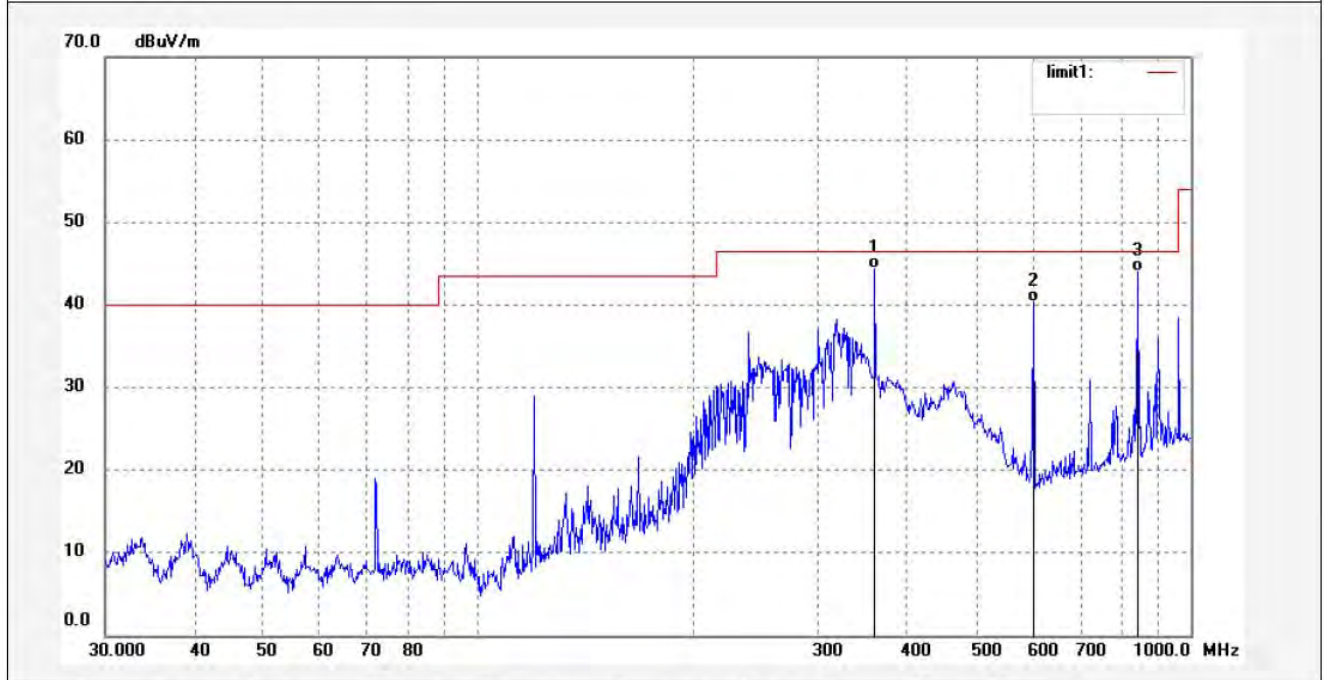

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	360.4476	60.31	-15.92	44.39	46.50	-2.11	QP			
2	601.4265	51.93	-11.65	40.28	46.50	-6.22	QP			
3	842.1296	51.15	-7.10	44.05	46.50	-2.45	QP			