



## 2 Contents

	Page
<b>1 COVER PAGE</b> .....	<b>1</b>
<b>2 CONTENTS</b> .....	<b>2</b>
<b>3 REVISION HISTORY</b> .....	<b>4</b>
<b>4 GENERAL INFORMATION</b> .....	<b>5</b>
4.1 GENERAL DESCRIPTION OF E.U.T. ....	5
4.2 DETAILS OF E.U.T. ....	5
4.3 CHANNEL LIST.....	6
4.4 TEST MODE DESCRIPTION: .....	7
4.5 TEST FACILITY .....	9
<b>5 EQUIPMENT USED DURING TEST</b> .....	<b>10</b>
5.1 EQUIPMENTS LIST .....	10
5.2 DESCRIPTION OF SUPPORT UNITS.....	11
5.3 MEASUREMENT UNCERTAINTY .....	11
5.4 TEST EQUIPMENT CALIBRATION .....	11
<b>6 TEST SUMMARY</b> .....	<b>12</b>
<b>7 RADIATED EMISSIONS</b> .....	<b>13</b>
7.1 EUT OPERATION.....	13
7.2 TEST SETUP .....	14
7.3 SPECTRUM ANALYZER SETUP .....	15
7.4 TEST PROCEDURE.....	16
7.5 CORRECTED AMPLITUDE & MARGIN CALCULATION.....	16
7.6 SUMMARY OF TEST RESULTS.....	17
<b>8 DUTY CYCLE</b> .....	<b>49</b>
8.1 SUMMARY OF TEST RESULTS.....	49
<b>9 BAND EDGE</b> .....	<b>56</b>
9.1 TEST PROCEDURE.....	56
9.2 TEST RESULT.....	57
<b>10 6 DB BANDWIDTH</b> .....	<b>69</b>
10.1 TEST PROCEDURE: .....	69
10.2 TEST RESULT: .....	69
<b>11 26 DB BANDWIDTH AND 99% OCCUPIED BANDWIDTH</b> .....	<b>76</b>
11.1 TEST PROCEDURE: .....	76
11.2 TEST RESULT: .....	76
<b>12 CONDUCTED OUTPUT POWER</b> .....	<b>91</b>
12.1 TEST PROCEDURE: .....	91
12.2 TEST RESULT :.....	91
<b>13 POWER SPECTRAL DENSITY</b> .....	<b>106</b>
13.1 TEST PROCEDURE: .....	106
13.2 TEST RESULT: .....	107
<b>14 FREQUENCY STABILITY</b> .....	<b>122</b>
14.1 TEST PROCEDURE: .....	122
14.2 TEST RESULT: .....	123

<b>15</b>	<b>ANTENNA REQUIREMENT .....</b>	<b>124</b>
<b>16</b>	<b>RF EXPOSURE .....</b>	<b>124</b>
<b>17</b>	<b>PHOTOGRAPHS OF TEST SETUP AND EUT.....</b>	<b>124</b>

### 3 Revision History

Test Report No.	Date of Receipt Sample	Date of Test	Date of Issue	Purpose	Comment	Approved
WTD21D01004878W	2021-01-19	2021-01-19 to 2021-05-13	2021-05-13	Original	-	Replaced
WTD22D06131363W003	2022-06-30	2022-06-30 to 2022-10-17	2022-10-27	Version 1	Updated	Valid

Note: The WTD22D06131363W003 report added a 22m ECO Reel based on the WTD21D01004878W report retested RSE and updated product name.

## 4 General Information

### 4.1 General Description of E.U.T.

Product:	ROCAM Mini HD
Model(s):	ROCAM mini HD-Basis
Model Description:	N/A
Wi-Fi Specification:	2.4G-802.11b/g/n HT20/n HT40 5G-802.11a/ n(HT20/40)/ac(HT20/40/80)
Bluetooth Version:	Bluetooth v4.1 with BLE
Hardware Version:	WG225
Software Version:	14.10.2020
Note:	N/A

### 4.2 Details of E.U.T.

Operation Frequency:	802.11a/ n(HT20/40)/ac(HT20/40/80): 5150MHz to 5250MHz 802.11a/ n(HT20/40)/ac(HT20/40/80): 5725MHz to 5850MHz
Max. RF output power:	U-NII-1: 16.53dBm U-NII-3: 10.66dBm
Type of Modulation:	OFDM
Antenna installation:	internal permanent antenna
Antenna Gain:	U-NII-1: 4dBi U-NII-3: 4dBi
Ratings:	DC 18V

### 4.3 Channel List

U-NII-1 (5.15-5.25GHz)		U-NII-3 (5.725-5.85GHz)	
channel	Frequency(MHz)	channel	Frequency(MHz)
36	5180	149	5745
38	5190	151	5755
40	5200	153	5765
42	5210	155	5775
44	5220	157	5785
46	5230	159	5795
48	5240	161	5805
		165	5825

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

For 802.11a/n(HT20)/ac(HT20):

channel	Frequency(MHz)	channel	Frequency(MHz)
36	5180	149	5745
40	5200	157	5785
48	5240	165	5825

For 802.11 n(HT40)/ac(HT40):

channel	Frequency(MHz)	channel	Frequency(MHz)
38	5190	151	5755
46	5230	159	5795

For 802.11 ac(HT80):

channel	Frequency(MHz)	channel	Frequency(MHz)
42	5210	155	5775

#### 4.4 Test Mode Description

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Transmitting duty cycle is no less 98%.

The software is installed in operation system, named "RFTestTool.apk", Version 1, date 20160518.

Test Items	Mode	Data Rate	Channel	TX/RX
Radiated Emissions	802.11a	6 Mbps	U-NII-1 36/40/48 U-NII-3 149/155/165	TX
	802.11n(HT20)	MCS0	U-NII-1 36/40/48 U-NII-3 149/155/165	TX
	802.11n(HT40)	MCS0	U-NII-1 38/46 U-NII-3 151/159	TX
	802.11ac(HT20)	MCS0	U-NII-1 36/40/48 U-NII-3 149/155/165	TX
	802.11ac(HT40)	MCS0	U-NII-1 38/46 U-NII-3 151/159	TX
	802.11ac(HT80)	MCS0	U-NII-1 42 U-NII-3 155	TX
Duty Cycle	802.11a	6 Mbps	U-NII-1 36/40/48 U-NII-3 149/155/165	TX
	802.11n(HT20)	MCS0	U-NII-1 36/40/48 U-NII-3 149/155/165	TX
	802.11n(HT40)	MCS0	U-NII-1 38/46 U-NII-3 151/159	TX
	802.11ac(HT20)	MCS0	U-NII-1 36/40/48 U-NII-3 149/155/165	TX
	802.11ac(HT40)	MCS0	U-NII-1 38/46 U-NII-3 151/159	TX
	802.11ac(HT80)	MCS0	U-NII-1 42 U-NII-3 155	TX
Band Edge	802.11a	6 Mbps	U-NII-1 36/40/48 U-NII-3 149/155/165	TX
	802.11n(HT20)	MCS0	U-NII-1 36/40/48 U-NII-3 149/155/165	TX
	802.11n(HT40)	MCS0	U-NII-1 38/46 U-NII-3 151/159	TX
	802.11ac(HT20)	MCS0	U-NII-1 36/40/48 U-NII-3 149/155/165	TX
	802.11ac(HT40)	MCS0	U-NII-1 38/46 U-NII-3 151/159	TX

	802.11ac(HT80)	MCS0	U-NII-1 42 U-NII-3 155	TX
6dB Bandwidth	802.11a	6 Mbps	U-NII-1 36/40/48 U-NII-3 149/155/165	TX
	802.11n(HT20)	MCS0	U-NII-1 36/40/48 U-NII-3 149/155/165	TX
	802.11n(HT40)	MCS0	U-NII-1 38/46 U-NII-3 151/159	TX
	802.11ac(HT20)	MCS0	U-NII-1 36/40/48 U-NII-3 149/155/165	TX
	802.11ac(HT40)	MCS0	U-NII-1 38/46 U-NII-3 151/159	TX
	802.11ac(HT80)	MCS0	U-NII-1 42 U-NII-3 155	TX
26dB Bandwidth and 99% Occupied Bandwidth	802.11a	6 Mbps	U-NII-1 36/40/48 U-NII-3 149/155/165	TX
	802.11n(HT20)	MCS0	U-NII-1 36/40/48 U-NII-3 149/155/165	TX
	802.11n(HT40)	MCS0	U-NII-1 38/46 U-NII-3 151/159	TX
	802.11ac(HT20)	MCS0	U-NII-1 36/40/48 U-NII-3 149/155/165	TX
	802.11ac(HT40)	MCS0	U-NII-1 38/46 U-NII-3 151/159	TX
	802.11ac(HT80)	MCS0	U-NII-1 42 U-NII-3 155	TX
Conducted Output Power	802.11a	6 Mbps	U-NII-1 36/40/48 U-NII-3 149/155/165	TX
	802.11n(HT20)	MCS0	U-NII-1 36/40/48 U-NII-3 149/155/165	TX
	802.11n(HT40)	MCS0	U-NII-1 38/46 U-NII-3 151/159	TX
	802.11ac(HT20)	MCS0	U-NII-1 36/40/48 U-NII-3 149/155/165	TX
	802.11ac(HT40)	MCS0	U-NII-1 38/46 U-NII-3 151/159	TX
	802.11ac(HT80)	MCS0	U-NII-1 42 U-NII-3 155	TX
Power Spectral Density	802.11a	6 Mbps	U-NII-1 36/40/48 U-NII-3 149/155/165	TX
	802.11n(HT20)	MCS0	U-NII-1 36/40/48 U-NII-3 149/155/165	TX



	802.11n(HT40)	MCS0	U-NII-1 38/46 U-NII-3 151/159	TX
	802.11ac(HT20)	MCS0	U-NII-1 36/40/48 U-NII-3 149/155/165	TX
	802.11ac(HT40)	MCS0	U-NII-1 38/46 U-NII-3 151/159	TX
	802.11ac(HT80)	MCS0	U-NII-1 42 U-NII-3 155	TX
Frequency Stability	Un-modulation	/	U-NII-1 36/40/48 U-NII-3 149/155/165	TX

#### 4.5 Test Facility

The test facility has a test site registered with the following organizations:

**ISED CAB identifier: CN0013. Test Firm Registration No.: 7760A.**

Waltek Testing Group Co., Ltd. Has been registered and fully described in a report filed with the Industry Canada. The acceptance letter from the Industry Canada is maintained in our files.

Registration number 7760A, October 15, 2016.

**FCC Designation No.: CN1201. Test Firm Registration No.: 523476.**

Waltek Testing Group Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration number 523476, September 10, 2019.

## 5 Equipment Used during Test

### 5.1 Equipments List

3m Semi-anechoic Chamber for Radiation Emissions Test site 1#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1	EMC Analyzer	Agilent	E7405A	MY45114943	2020-04-20 2021-04-19 2022-04-28	2021-04-19 2022-04-18 2023-04-27
2	Active Loop Antenna	Beijing Dazhi	ZN30900A	-	2020-04-20 2021-04-19 2022-04-28	2021-04-19 2022-04-18 2023-04-27
3	Trilog Broadband Antenna	SCHWARZBECK	VULB9163	336	2020-08-22 2021-08-21 2022-08-07	2021-08-21 2022-08-07 2023-08-06
4	Coaxial Cable (below 1GHz)	Top	TYPE16(13M)	-	2020-04-20 2021-04-19 2022-04-28	2021-04-19 2022-04-18 2023-04-27
5	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9120 D	667	2020-04-25 2021-04-24 2022-04-28	2021-04-24 2022-04-23 2023-04-27
6	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9170	335	2020-04-20 2021-04-19 2022-04-28	2021-04-19 2022-04-18 2023-04-27
7	Broadband Preamplifier	COMPLIANCE DIRECTION	PAP-1G18	2004	2020-04-20 2021-04-19 2022-04-28	2021-04-19 2022-04-18 2023-04-27
8	Coaxial Cable (above 1GHz)	Top	1GHz-25GHz	EW02014-7	2020-04-20 2021-04-19 2022-04-28	2021-04-19 2022-04-18 2023-04-27
3m Semi-anechoic Chamber for Radiation Emissions Test site 2#						
Item	Equipment	Manufacturer	Model No.	Serial No	Last Calibration Date	Calibration Due Date
1	Test Receiver	R&S	ESCI	101296	2020-04-20 2021-04-19 2022-04-28	2021-04-19 2022-04-18 2023-04-27
2	Trilog Broadband Antenna	SCHWARZBECK	VULB9160	9160-3325	2020-04-25 2021-04-24 2022-04-28	2021-04-24 2022-04-23 2023-04-27
3	Amplifier	Compliance pirection systems inc	PAP-0203	22024	2020-04-20 2021-04-19 2022-04-28	2021-04-19 2022-04-18 2023-04-27
4	Cable	HUBER+SUHNER	CBL2	525178	2020-04-20 2021-04-19 2022-04-28	2021-04-19 2022-04-18 2023-04-27

RF Conducted Testing						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMC Analyzer (9k~26.5GHz)	Agilent	E7405A	MY45114943	2020-04-20	2021-04-19
2.	Spectrum Analyzer (9k-6GHz)	R&S	FSL6	100959	2020-04-20	2021-04-19
3.	Signal Analyzer (9k~26.5GHz)	Agilent	N9010A	MY50520207	2020-04-20	2021-04-19

## 5.2 Description of Support Units

Equipment	Manufacturer	Model No.	Series No.
/	/	/	/

## 5.3 Measurement Uncertainty

Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-6}$
RF Power	$\pm 1.0$ dB
RF Power Density	$\pm 2.2$ dB
Radiated Spurious Emissions test	$\pm 5.03$ dB (30M~1000MHz)
	$\pm 5.47$ dB (1000M~25000MHz)
Conducted Spurious Emissions test	$\pm 3.64$ dB (AC mains 150KHz~30MHz)

## 5.4 Test Equipment Calibration

All the test equipments used are valid and calibrated by CEPREI Certification Body that address is No.110 Dongguan Zhuang RD. Guangzhou, P.R.China.

## 6 Test Summary

Test Items	Test Requirement	Result
Conducted Emissions	15.207(a)	N/A
Radiated Emissions	15.407(a) 15.205(a) 15.209(a)	PASS
Duty Cycle	KDB 789033	--
6dB Bandwidth	15.407(a)	PASS
26 dB Emission Bandwidth & 99% Occupied Bandwidth	15.407(a)	PASS
Maximum Conducted Output Power	15.407(a)	PASS
Power Spectral Density	15.407(a)	PASS
Restricted bands around fundamental frequency	15.407(a)	PASS
Antenna Requirement	15.203	PASS
Maximum Permissible Exposure (Exposure of Humans to RF Fields)	1.1307(b)(1)	PASS

## 7 Radiated Emissions

Test Requirement: FCC CFR47 Part 15 Section 15.209 & 15.407

Test Method: ANSI C63.10:2013

Test Result: PASS

Measurement Distance: 3m

Limit:

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Distance	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	$2400/F(\text{kHz})$	300	$10000 * 2400/F(\text{kHz})$	$20\log^{(2400/F(\text{kHz}))} + 80$
0.490 ~ 1.705	$24000/F(\text{kHz})$	30	$100 * 24000/F(\text{kHz})$	$20\log^{(24000/F(\text{kHz}))} + 40$
1.705 ~ 30	30	30	$100 * 30$	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

### 7.1 EUT Operation

Operating Environment :

Temperature: 23.5 °C

Humidity: 52.1 % RH

Atmospheric Pressure: 101.2kPa


EUT Operation :

The test was performed in transmitting mode, the test data were shown in the report.


## 7.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.10: 2013.


The test setup for emission measurement below 30MHz.

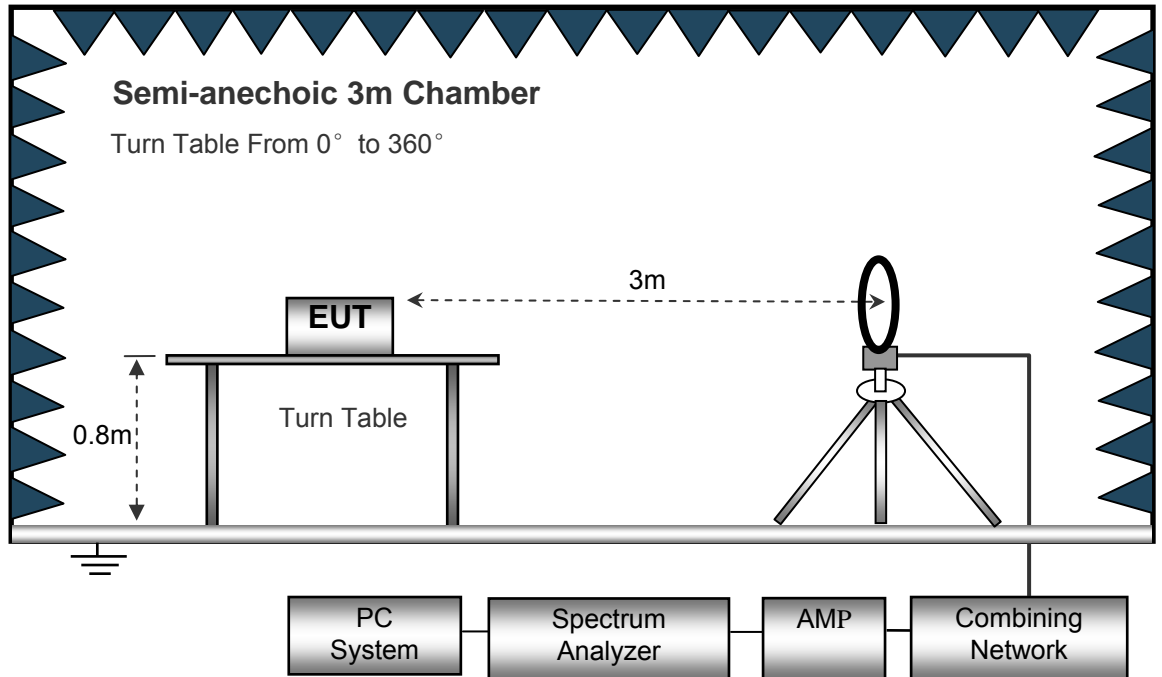

The test setup for emission measurement from 30 MHz to 1 GHz.

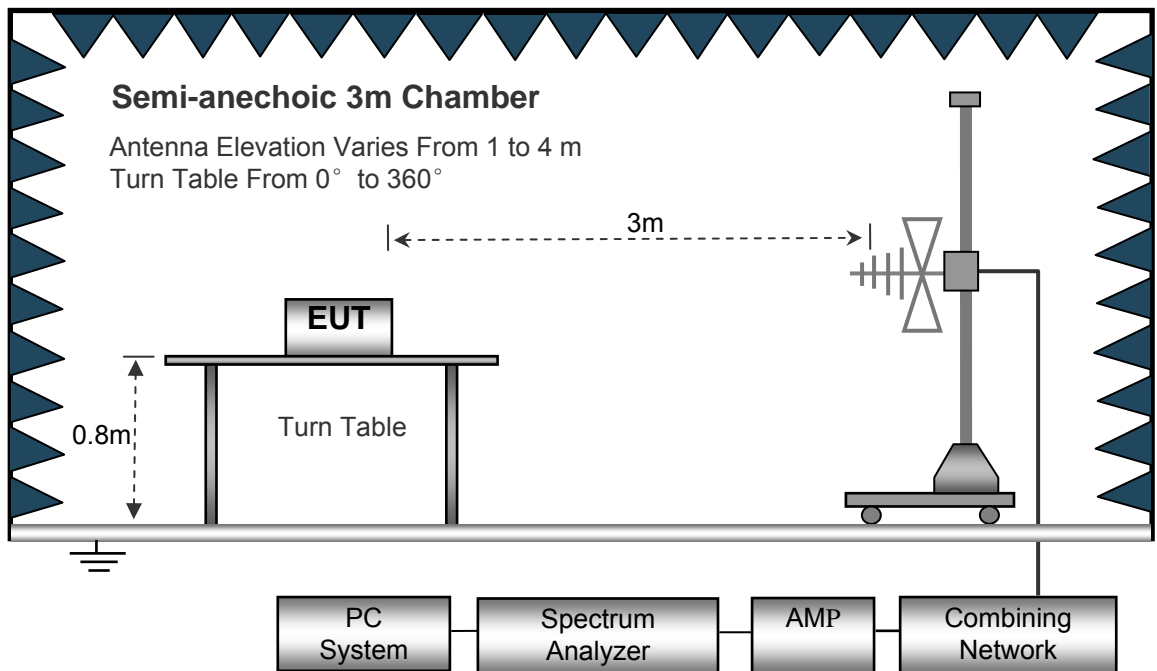

The test setup for emission measurement above 1 GHz.

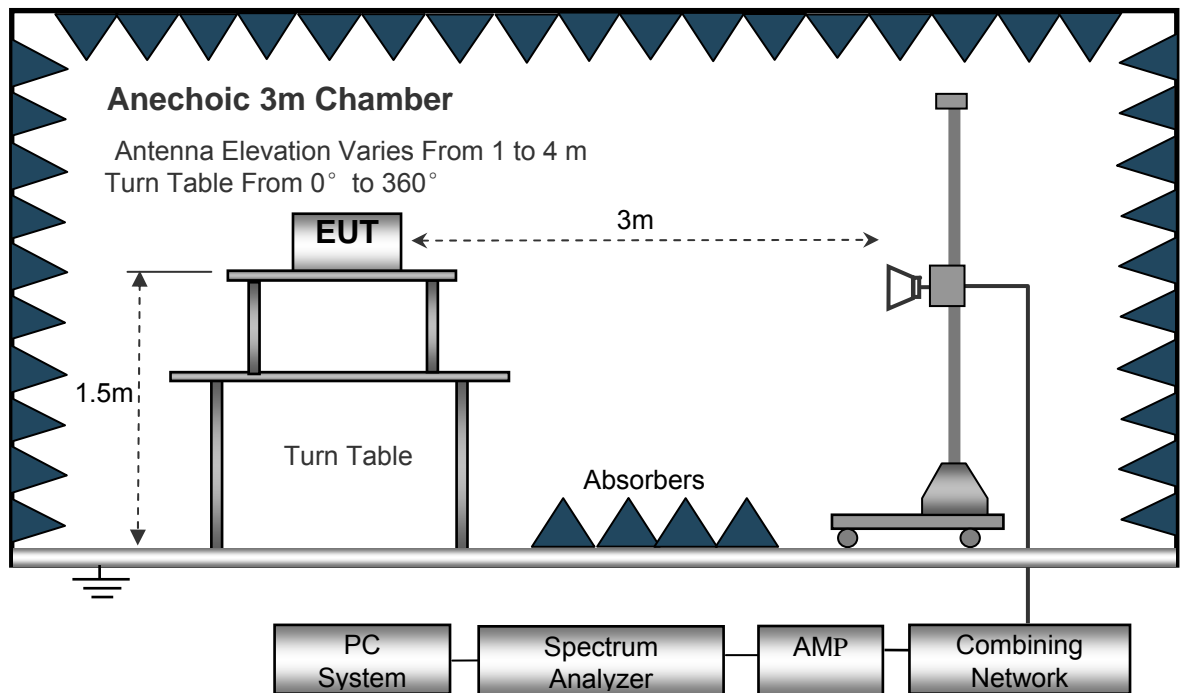

### 7.3 Spectrum Analyzer Setup

Below 30MHz

Sweep Speed ..... Auto  
 IF Bandwidth..... 10kHz  
 Video Bandwidth..... 10kHz  
 Resolution Bandwidth..... 10kHz

30MHz ~ 1GHz

Sweep Speed ..... Auto  
 Detector ..... PK  
 Resolution Bandwidth..... 100kHz  
 Video Bandwidth..... 300kHz

Above 1GHz

Sweep Speed ..... Auto  
 Detector ..... PK  
 Resolution Bandwidth..... 1MHz  
 Video Bandwidth..... 3MHz  
 Detector ..... Ave.  
 Resolution Bandwidth..... 1MHz  
 Video Bandwidth..... 10Hz

## 7.4 Test Procedure

1. The EUT is placed on a turntable, which is 0.8m above ground plane for below 1GHz and 1.5m for above 1GHz.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are performed in X,Y and Z axis positioning(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand),the worst condition was tested putting the eut in X axis,so the worst data were shown as follow.
8. A 2.4GHz high –pass filter is used during radiated emissions above 1GHz measurement.

## 7.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Limit}$$



**7.6 Summary of Test Results****Test Frequency: 9KHz~30MHz**

Frequency	Measurement results dB $\mu$ V @3m	Detector PK/QP	Correct factor dB/m	Extrapolation factor dB	Measurement results (calculated) dB $\mu$ V/m @30m	Limits dB $\mu$ V/m @30m	Margin dB
(MHz)	Measurement results	Detector	Correct factor	Extrapolation factor	Measurement results (calculated)	Limits	Margin
U-NII-1:802.11a 5180MHz							
6.021	25.46	QP	21.84	40.00	7.30	29.54	-22.24
15.731	24.39	QP	21.35	40.00	5.74	29.54	-23.80
25.680	25.45	QP	20.67	40.00	6.12	29.54	-23.42
U-NII-1:802.11n20 5180MHz							
6.021	25.47	QP	21.84	40.00	7.31	29.54	-22.23
15.731	24.49	QP	21.35	40.00	5.84	29.54	-23.70
25.680	25.55	QP	20.67	40.00	6.22	29.54	-23.32
U-NII-1:802.11ac 20 5180MHz							
6.021	25.44	QP	21.84	40.00	7.28	29.54	-22.26
15.731	24.39	QP	21.35	40.00	5.74	29.54	-23.80
25.680	25.56	QP	20.67	40.00	6.23	29.54	-23.31
U-NII-1:802.11n40 5190MHz							
6.021	25.48	QP	21.84	40.00	7.32	29.54	-22.22
15.731	24.34	QP	21.35	40.00	5.69	29.54	-23.85
25.680	25.59	QP	20.67	40.00	6.26	29.54	-23.28
U-NII-1:802.11ac40 5190MHz							
6.021	25.38	QP	21.84	40.00	7.22	29.54	-22.32
15.731	24.46	QP	21.35	40.00	5.81	29.54	-23.73
25.680	25.57	QP	20.67	40.00	6.24	29.54	-23.30
U-NII-1:802.11ac80 5210MHz							
6.021	25.33	QP	21.84	40.00	7.17	29.54	-22.37
15.731	24.41	QP	21.35	40.00	5.76	29.54	-23.78
25.680	25.58	QP	20.67	40.00	6.25	29.54	-23.29

Frequency	Measurement results dB $\mu$ V @3m	Detector PK/QP	Correct factor dB/m	Extrapolation factor dB	Measurement results (calculated) dB $\mu$ V/m @30m	Limits dB $\mu$ V/m @30m	Margin dB
(MHz)	Measurement results	Detector	Correct factor	Extrapolation factor	Measurement results (calculated)	Limits	Margin
U-NII-3 802.11a 5745MHz							
6.021	25.63	QP	21.84	40.00	7.47	29.54	-22.07
15.731	25.19	QP	21.35	40.00	6.54	29.54	-23.00
25.680	25.55	QP	20.67	40.00	6.22	29.54	-23.32
U-NII-3 802.11n20 5745MHz							
6.021	25.61	QP	21.84	40.00	7.45	29.54	-22.09
15.731	25.29	QP	21.35	40.00	6.64	29.54	-22.90
25.680	25.65	QP	20.67	40.00	6.32	29.54	-23.22
U-NII-3 802.11ac 5745MHz							
6.021	25.51	QP	21.84	40.00	7.35	29.54	-22.19
15.731	25.26	QP	21.35	40.00	6.61	29.54	-22.93
25.680	25.68	QP	20.67	40.00	6.35	29.54	-23.19
U-NII-3 802.11n40 5755MHz							
6.021	25.63	QP	21.84	40.00	7.47	29.54	-22.07
15.731	25.16	QP	21.35	40.00	6.51	29.54	-23.03
25.680	25.48	QP	20.67	40.00	6.15	29.54	-23.39
U-NII-3 802.11ac40 5755MHz							
6.021	25.53	QP	21.84	40.00	7.37	29.54	-22.17
15.731	25.37	QP	21.35	40.00	6.72	29.54	-22.82
25.680	25.45	QP	20.67	40.00	6.12	29.54	-23.42
U-NII-3 802.11ac80 5775MHz							
6.021	25.54	QP	21.84	40.00	7.38	29.54	-22.16
15.731	25.38	QP	21.35	40.00	6.73	29.54	-22.81
25.680	25.15	QP	20.67	40.00	5.82	29.54	-23.72

## 22m ECO Reel

Frequency	Measurement results dB $\mu$ V @3m	Detector PK/QP	Correct factor dB/m	Extrapolation factor dB	Measurement results (calculated) dB $\mu$ V/m @30m	Limits dB $\mu$ V/m @30m	Margin dB
(MHz)	Measurement results	Detector	Correct factor	Extrapolation factor	Measurement results (calculated)	Limits	Margin
U-NII-1:802.11a 5180MHz							
6.472	25.17	QP	21.84	40.00	7.01	29.54	-22.53
16.160	25.87	QP	21.35	40.00	7.22	29.54	-22.32
26.339	24.39	QP	20.67	40.00	5.06	29.54	-24.48
U-NII-1:802.11n20 5180MHz							
6.472	25.80	QP	21.84	40.00	7.64	29.54	-21.90
16.160	26.14	QP	21.35	40.00	7.49	29.54	-22.05
26.339	24.78	QP	20.67	40.00	5.45	29.54	-24.09
U-NII-1:802.11ac 20 5180MHz							
6.472	25.68	QP	21.84	40.00	7.52	29.54	-22.02
16.160	26.59	QP	21.35	40.00	7.94	29.54	-21.60
26.339	25.07	QP	20.67	40.00	5.74	29.54	-23.80
U-NII-1:802.11n40 5190MHz							
6.472	25.87	QP	21.84	40.00	7.71	29.54	-21.83
16.160	25.94	QP	21.35	40.00	7.29	29.54	-22.25
26.339	25.20	QP	20.67	40.00	5.87	29.54	-23.67
U-NII-1:802.11ac40 5190MHz							
6.472	25.23	QP	21.84	40.00	7.07	29.54	-22.47
16.160	26.17	QP	21.35	40.00	7.52	29.54	-22.02
26.339	24.67	QP	20.67	40.00	5.34	29.54	-24.20
U-NII-1:802.11ac80 5210MHz							
6.472	25.83	QP	21.84	40.00	7.67	29.54	-21.87
16.160	26.67	QP	21.35	40.00	8.02	29.54	-21.52
26.339	25.00	QP	20.67	40.00	5.67	29.54	-23.87

Frequency	Measurement results dB $\mu$ V @3m	Detector PK/QP	Correct factor dB/m	Extrapolation factor dB	Measurement results (calculated) dB $\mu$ V/m @30m	Limits dB $\mu$ V/m @30m	Margin dB
(MHz)	Measurement results	Detector	Correct factor	Extrapolation factor	Measurement results (calculated)	Limits	Margin
U-NII-3 802.11a 5745MHz							
6.472	25.21	QP	21.84	40.00	7.05	29.54	-22.49
16.160	25.62	QP	21.35	40.00	6.97	29.54	-22.57
26.339	24.85	QP	20.67	40.00	5.52	29.54	-24.02
U-NII-3 802.11n20 5745MHz							
6.472	25.74	QP	21.84	40.00	7.58	29.54	-21.96
16.160	26.72	QP	21.35	40.00	8.07	29.54	-21.47
26.339	25.21	QP	20.67	40.00	5.88	29.54	-23.66
U-NII-3 802.11ac 5745MHz							
6.472	25.16	QP	21.84	40.00	7.00	29.54	-22.54
16.160	26.23	QP	21.35	40.00	7.58	29.54	-21.96
26.339	25.17	QP	20.67	40.00	5.84	29.54	-23.70
U-NII-3 802.11n40 5755MHz							
6.472	25.78	QP	21.84	40.00	7.62	29.54	-21.92
16.160	26.24	QP	21.35	40.00	7.59	29.54	-21.95
26.339	24.45	QP	20.67	40.00	5.12	29.54	-24.42
U-NII-3 802.11ac40 5755MHz							
6.472	25.32	QP	21.84	40.00	7.16	29.54	-22.38
16.160	26.00	QP	21.35	40.00	7.35	29.54	-22.19
26.339	24.89	QP	20.67	40.00	5.56	29.54	-23.98
U-NII-3 802.11ac80 5775MHz							
6.472	25.93	QP	21.84	40.00	7.77	29.54	-21.77
16.160	26.36	QP	21.35	40.00	7.71	29.54	-21.83
26.339	25.01	QP	20.67	40.00	5.68	29.54	-23.86

**Test Frequency : 30MHz ~ 18GHz**

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
802.11a U-NII-1 Low Channel 5180MHz									
223.45	39.96	QP	282	1.5	H	-11.62	28.34	46.00	-17.66
223.45	36.76	QP	278	1.2	V	-11.62	25.14	46.00	-20.86
4536.00	52.70	PK	242	1.8	H	-2.03	50.67	74.00	-23.33
4536.00	50.43	Ave	242	1.8	H	-2.03	48.40	54.00	-5.60
5141.04	54.36	PK	136	1.7	H	-1.02	53.34	74.00	-20.66
5141.04	48.55	Ave	136	1.7	H	-1.02	47.53	54.00	-6.47
10360.00	40.20	PK	345	1.8	H	5.33	45.53	74.00	-28.47
10360.00	36.49	Ave	345	1.8	H	5.33	41.82	54.00	-12.18
802.11a U-NII-1 Middle channel 5200MHz									
223.45	40.75	QP	356	1.6	H	-11.62	29.13	46.00	-16.87
223.45	36.38	QP	308	1.0	V	-11.62	24.76	46.00	-21.24
4526.22	52.88	PK	176	1.7	H	-1.94	50.94	74.00	-23.06
4526.22	49.25	Ave	176	1.7	H	-1.94	47.31	54.00	-6.69
5121.25	55.70	PK	169	1.7	H	-1.06	54.64	74.00	-19.36
5121.25	50.01	Ave	169	1.7	H	-1.06	48.95	54.00	-5.05
10400.00	40.17	PK	43	1.3	H	5.21	45.38	74.00	-28.62
10400.00	35.75	Ave	43	1.3	H	5.21	40.96	54.00	-13.04

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
802.11a U-NII-1 High channel 5240MHz									
223.45	41.07	QP	46	1.7	H	-11.62	29.45	46.00	-16.55
223.45	35.31	QP	239	1.1	V	-11.62	23.69	46.00	-22.31
4505.97	53.66	PK	257	1.7	H	-2.24	51.42	74.00	-22.58
4505.97	50.04	Ave	257	1.7	H	-2.24	47.80	54.00	-6.20
5143.05	55.49	PK	339	2.0	H	-1.09	54.40	74.00	-19.60
5143.05	50.40	Ave	339	2.0	H	-1.09	49.31	54.00	-4.69
10480.00	39.12	PK	47	1.7	H	5.14	44.26	74.00	-29.74
10480.00	36.42	Ave	47	1.7	H	5.14	41.56	54.00	-12.44
802.11a U-NII-3 Low Channel 5745MHz									
223.45	39.51	QP	343	1.8	H	-11.62	27.89	46.00	-18.11
223.45	36.12	QP	51	1.9	V	-11.62	24.50	46.00	-21.50
4534.59	49.34	PK	353	1.4	H	-2.03	47.31	74.00	-26.69
4534.59	45.65	Ave	353	1.4	H	-2.03	43.62	54.00	-10.38
5120.87	54.76	PK	253	2.0	H	-1.02	53.74	74.00	-20.26
5120.87	47.90	Ave	253	2.0	H	-1.02	46.88	54.00	-7.12
11000.00	41.80	PK	187	1.6	H	5.33	47.13	74.00	-26.87
11000.00	38.00	Ave	187	1.6	H	5.33	43.33	54.00	-10.67

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
802.11a U-NII-3 Middle channel 5785MHz									
223.45	38.29	QP	227	1.4	H	-11.62	26.67	46.00	-19.33
223.45	35.41	QP	269	1.9	V	-11.62	23.79	46.00	-22.21
4514.81	48.46	PK	126	1.6	H	-1.94	46.52	74.00	-27.48
4514.81	46.43	Ave	126	1.6	H	-1.94	44.49	54.00	-9.51
5134.07	54.73	PK	134	1.4	H	-1.06	53.67	74.00	-20.33
5134.07	47.58	Ave	134	1.4	H	-1.06	46.52	54.00	-7.48
11200.00	40.84	PK	67	1.9	H	5.21	46.05	74.00	-27.95
11200.00	37.76	Ave	67	1.9	H	5.21	42.97	54.00	-11.03
802.11a U-NII-3 High channel 5825MHz									
223.45	38.35	QP	239	1.4	H	-11.62	26.73	46.00	-19.27
223.45	35.72	QP	88	1.2	V	-11.62	24.10	46.00	-21.90
4505.00	49.63	PK	211	1.4	H	-2.24	47.39	74.00	-26.61
4505.00	46.40	Ave	211	1.4	H	-2.24	44.16	54.00	-9.84
5142.65	55.05	PK	184	1.9	H	-1.09	53.96	74.00	-20.04
5142.65	47.60	Ave	184	1.9	H	-1.09	46.51	54.00	-7.49
11400.00	42.38	PK	268	1.1	H	5.14	47.52	74.00	-26.48
11400.00	36.52	Ave	268	1.1	H	5.14	41.66	54.00	-12.34

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
802.11n(HT20) U-NII-1 Low Channel 5180MHz									
223.45	41.30	QP	196	1.9	H	-11.62	29.68	46.00	-16.32
223.45	37.21	QP	275	1.6	V	-11.62	25.59	46.00	-20.41
4512.70	55.04	PK	300	1.7	H	-2.14	52.90	74.00	-21.10
4512.70	49.82	Ave	300	1.7	H	-2.14	47.68	54.00	-6.32
5127.81	45.90	PK	101	1.4	H	-1.06	44.84	74.00	-29.16
5127.81	41.89	Ave	101	1.4	H	-1.06	40.83	54.00	-13.17
10360.00	41.45	PK	120	1.6	H	5.33	46.78	74.00	-27.22
10360.00	37.49	Ave	120	1.6	H	5.33	42.82	54.00	-11.18
802.11n(HT20) U-NII-1 Middle channel 5200MHz									
223.45	41.86	QP	36	1.9	H	-11.62	30.24	46.00	-15.76
223.45	38.42	QP	2	1.4	V	-11.62	26.80	46.00	-19.20
4503.52	56.23	PK	288	2.0	H	-2.12	54.11	74.00	-19.89
4503.52	51.18	Ave	288	2.0	H	-2.12	49.06	54.00	-4.94
5130.12	45.86	PK	105	1.4	H	-1.06	44.80	74.00	-29.20
5130.12	41.74	Ave	105	1.4	H	-1.06	40.68	54.00	-13.32
10400.00	39.80	PK	95	1.7	H	5.21	45.01	74.00	-28.99
10400.00	37.74	Ave	95	1.7	H	5.21	42.95	54.00	-11.05



Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
802.11n(HT20) U-NII-1 High channel 5240MHz									
223.45	41.45	QP	352	1.2	H	-11.62	29.83	46.00	-16.17
223.45	37.61	QP	331	1.3	V	-11.62	25.99	46.00	-20.01
4515.40	56.53	PK	151	1.3	H	-1.96	54.57	74.00	-19.43
4515.40	51.24	Ave	151	1.3	H	-1.96	49.28	54.00	-4.72
5124.64	47.06	PK	154	1.6	H	-1.06	46.00	74.00	-28.00
5124.64	42.36	Ave	154	1.6	H	-1.06	41.30	54.00	-12.70
10480.00	39.26	PK	83	1.4	H	5.14	44.40	74.00	-29.60
10480.00	37.49	Ave	83	1.4	H	5.14	42.63	54.00	-11.37
802.11n(HT20) U-NII-3 Low Channel 5745MHz									
223.45	42.19	QP	253	1.6	H	-11.62	30.57	46.00	-15.43
223.45	41.74	QP	24	1.9	V	-11.62	30.12	46.00	-15.88
4528.32	43.09	PK	278	1.9	H	-2.03	41.06	74.00	-32.94
4528.32	34.67	Ave	278	1.9	H	-2.03	32.64	54.00	-21.36
5136.61	47.42	PK	224	1.3	H	-1.02	46.40	74.00	-27.60
5136.61	38.06	Ave	224	1.3	H	-1.02	37.04	54.00	-16.96
11000.00	41.07	PK	36	1.1	H	5.33	46.40	74.00	-27.60
11000.00	42.29	Ave	36	1.1	H	5.33	47.62	54.00	-6.38

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
802.11n(HT20) U-NII-3 Middle channel 5785MHz									
223.45	42.04	QP	167	1.5	H	-11.62	30.42	46.00	-15.58
223.45	43.11	QP	103	1.2	V	-11.62	31.49	46.00	-14.51
4515.90	44.49	PK	189	1.3	H	-1.94	42.55	74.00	-31.45
4515.90	35.23	Ave	189	1.3	H	-1.94	33.29	54.00	-20.71
5111.37	48.01	PK	198	1.2	H	-1.06	46.95	74.00	-27.05
5111.37	37.91	Ave	198	1.2	H	-1.06	36.85	54.00	-17.15
11200.00	41.43	PK	124	1.2	H	5.21	46.64	74.00	-27.36
11200.00	31.17	Ave	124	1.2	H	5.21	36.38	54.00	-17.62
802.11n(HT20) U-NII-3 High channel 5825MHz									
223.45	40.59	QP	183	1.8	H	-11.62	28.97	46.00	-17.03
223.45	43.74	QP	27	1.3	V	-11.62	32.12	46.00	-13.88
4529.90	44.17	PK	289	1.4	H	-2.24	41.93	74.00	-32.07
4529.90	36.60	Ave	289	1.4	H	-2.24	34.36	54.00	-19.64
5112.69	47.63	PK	88	1.7	H	-1.09	46.54	74.00	-27.46
5112.69	39.42	Ave	88	1.7	H	-1.09	38.33	54.00	-15.67
11400.00	40.91	PK	326	1.5	H	5.14	46.05	74.00	-27.95
11400.00	33.48	Ave	326	1.5	H	5.14	38.62	54.00	-15.38

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
802.11n(HT40) U-NII-1 Low Channel 5190MHz									
223.45	37.54	QP	138	1.2	H	-11.62	25.92	46.00	-20.08
223.45	50.57	QP	193	1.5	V	-11.62	38.95	46.00	-7.05
4514.52	42.66	PK	152	1.6	H	-1.89	40.77	74.00	-33.23
4514.52	32.66	Ave	152	1.6	H	-1.89	30.77	54.00	-23.23
5111.18	46.07	PK	7	1.6	H	-1.06	45.01	74.00	-28.99
5111.18	37.88	Ave	7	1.6	H	-1.06	36.82	54.00	-17.18
10380.00	38.96	PK	60	1.5	H	5.26	44.22	74.00	-29.78
10380.00	35.23	Ave	60	1.5	H	5.26	40.49	54.00	-13.51
802.11n(HT40) U-NII-1 High channel 5230MHz									
223.45	38.13	QP	220	2.0	H	-11.62	26.51	46.00	-19.49
223.45	49.73	QP	329	2.0	V	-11.62	38.11	46.00	-7.89
4517.03	43.19	PK	149	1.1	H	-1.94	41.25	74.00	-32.75
4517.03	32.47	Ave	149	1.1	H	-1.94	30.53	54.00	-23.47
5147.54	47.97	PK	316	1.2	H	-1.06	46.91	74.00	-27.09
5147.54	38.16	Ave	316	1.2	H	-1.06	37.10	54.00	-16.90
10460.00	39.46	PK	276	1.7	H	5.28	44.74	74.00	-29.26
10480.00	36.07	Ave	276	1.7	H	5.28	41.35	54.00	-12.65

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
802.11n(HT40) U-NII-3 Low Channel 5755MHz									
223.45	46.78	QP	171	1.3	H	-11.62	35.16	46.00	-10.84
223.45	38.54	QP	179	1.9	V	-11.62	26.92	46.00	-19.08
4508.62	39.38	PK	314	1.6	H	-1.89	37.49	74.00	-36.51
4508.62	36.14	Ave	314	1.6	H	-1.89	34.25	54.00	-19.75
5123.39	47.88	PK	278	1.3	H	-1.06	46.82	74.00	-27.18
5123.39	40.82	Ave	278	1.3	H	-1.06	39.76	54.00	-14.24
11020.00	45.85	PK	137	1.0	H	5.26	51.11	74.00	-22.89
11020.00	39.76	Ave	137	1.0	H	5.26	45.02	54.00	-8.98
802.11n(HT40) U-NII-3 High channel 5795MHz									
223.45	45.96	QP	148	1.5	H	-11.62	34.34	46.00	-11.66
223.45	37.62	QP	114	1.7	V	-11.62	26.00	46.00	-20.00
4503.41	39.45	PK	7	1.7	H	-1.94	37.51	74.00	-36.49
4503.41	35.66	Ave	7	1.7	H	-1.94	33.72	54.00	-20.28
5119.15	47.12	PK	218	1.5	H	-1.06	46.06	74.00	-27.94
5119.15	41.59	Ave	218	1.5	H	-1.06	40.53	54.00	-13.47
11100.00	45.93	PK	306	1.0	H	5.28	51.21	74.00	-22.79
11100.00	38.84	Ave	306	1.0	H	5.28	44.12	54.00	-9.88

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
802.11ac(HT20) U-NII-1 Low Channel 5180MHz									
223.45	38.02	QP	238	1.7	H	-11.62	26.40	46.00	-19.60
223.45	48.74	QP	162	1.6	V	-11.62	37.12	46.00	-8.88
4531.24	46.47	PK	153	1.5	H	-1.86	44.61	74.00	-29.39
4531.24	38.39	Ave	153	1.5	H	-1.86	36.53	54.00	-17.47
5125.20	42.88	PK	67	1.5	H	-1.06	41.82	74.00	-32.18
5125.20	38.45	Ave	67	1.5	H	-1.06	37.39	54.00	-16.61
10360.00	45.51	PK	170	1.4	H	5.33	50.84	74.00	-23.16
10360.00	38.73	Ave	170	1.4	H	5.33	44.06	54.00	-9.94
802.11ac(HT20) U-NII-1 Middle channel 5200MHz									
223.45	37.32	QP	44	1.6	H	-11.62	25.70	46.00	-20.30
223.45	49.43	QP	286	1.2	V	-11.62	37.81	46.00	-8.19
4531.84	45.48	PK	307	1.9	H	-1.82	43.66	74.00	-30.34
4531.84	37.79	Ave	307	1.9	H	-1.82	35.97	54.00	-18.03
5116.05	44.20	PK	68	1.4	H	-1.06	43.14	74.00	-30.86
5116.05	38.36	Ave	68	1.4	H	-1.06	37.30	54.00	-16.70
10400.00	40.72	PK	21	1.2	H	5.21	45.93	74.00	-28.07
10400.00	36.91	Ave	21	1.2	H	5.21	42.12	54.00	-11.88

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
802.11ac(HT20) U-NII-1 High channel 5240MHz									
223.45	37.81	QP	162	1.8	H	-11.62	26.19	46.00	-19.81
223.45	49.38	QP	151	1.9	V	-11.62	37.76	46.00	-8.24
4530.49	45.63	PK	155	1.3	H	-1.81	43.82	74.00	-30.18
4530.49	37.31	Ave	155	1.3	H	-1.81	35.50	54.00	-18.50
5121.87	44.18	PK	1	1.8	H	-1.06	43.12	74.00	-30.88
5121.87	37.61	Ave	1	1.8	H	-1.06	36.55	54.00	-17.45
10480.00	40.43	PK	360	1.9	H	5.14	45.57	74.00	-28.43
10480.00	36.46	Ave	360	1.9	H	5.14	41.60	54.00	-12.40
802.11ac(HT20) U-NII-3 Low Channel 5745MHz									
223.45	47.77	QP	260	1.9	H	-11.62	36.15	46.00	-9.85
223.45	43.49	QP	14	1.3	V	-11.62	31.87	46.00	-14.13
4534.54	42.56	PK	105	1.4	H	-2.03	40.53	74.00	-33.47
4534.54	38.65	Ave	105	1.4	H	-2.03	36.62	54.00	-17.38
5115.96	45.96	PK	289	2.0	H	-1.02	44.94	74.00	-29.06
5115.96	38.25	Ave	289	2.0	H	-1.02	37.23	54.00	-16.77
11000.00	41.11	PK	195	1.8	H	5.33	46.44	74.00	-27.56
11000.00	41.31	Ave	195	1.8	H	5.33	46.64	54.00	-7.36

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
802.11ac(HT20) U-NII-3 Middle channel 5785MHz									
223.45	47.83	QP	222	1.1	H	-11.62	36.21	46.00	-9.79
223.45	42.55	QP	193	1.2	V	-11.62	30.93	46.00	-15.07
4533.30	43.14	PK	234	1.5	H	-1.94	41.20	74.00	-32.80
4533.30	39.19	Ave	234	1.5	H	-1.94	37.25	54.00	-16.75
5123.11	45.67	PK	234	1.3	H	-1.06	44.61	74.00	-29.39
5123.11	38.68	Ave	234	1.3	H	-1.06	37.62	54.00	-16.38
11200.00	41.08	PK	205	1.6	H	5.21	46.29	74.00	-27.71
11200.00	40.25	Ave	205	1.6	H	5.21	45.46	54.00	-8.54
802.11ac(HT20) U-NII-3 High channel 5825MHz									
223.45	48.40	QP	192	1.4	H	-11.62	36.78	46.00	-9.22
223.45	43.46	QP	290	1.5	V	-11.62	31.84	46.00	-14.16
4517.08	42.87	PK	98	1.9	H	-2.24	40.63	74.00	-33.37
4517.08	40.18	Ave	98	1.9	H	-2.24	37.94	54.00	-16.06
5134.15	47.55	PK	99	1.0	H	-1.09	46.46	74.00	-27.54
5134.15	39.95	Ave	99	1.0	H	-1.09	38.86	54.00	-15.14
11400.00	40.19	PK	243	2.0	H	5.14	45.33	74.00	-28.67
11400.00	39.88	Ave	243	2.0	H	5.14	45.02	54.00	-8.98

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
802.11ac(HT40) U-NII-1 Low Channel 5190MHz									
223.45	37.54	QP	138	1.2	H	-11.62	25.92	46.00	-20.08
223.45	50.57	QP	193	1.5	V	-11.62	38.95	46.00	-7.05
4514.52	42.66	PK	152	1.6	H	-1.89	40.77	74.00	-33.23
4514.52	32.66	Ave	152	1.6	H	-1.89	30.77	54.00	-23.23
5111.18	46.07	PK	7	1.6	H	-1.06	45.01	74.00	-28.99
5111.18	37.88	Ave	7	1.6	H	-1.06	36.82	54.00	-17.18
10380.00	38.96	PK	60	1.5	H	5.26	44.22	74.00	-29.78
10380.00	35.23	Ave	60	1.5	H	5.26	40.49	54.00	-13.51
802.11ac(HT40) U-NII-1 High channel 5230MHz									
223.45	38.13	QP	220	2.0	H	-11.62	26.51	46.00	-19.49
223.45	49.73	QP	329	2.0	V	-11.62	38.11	46.00	-7.89
4517.03	43.19	PK	149	1.1	H	-1.94	41.25	74.00	-32.75
4517.03	32.47	Ave	149	1.1	H	-1.94	30.53	54.00	-23.47
5147.54	47.97	PK	316	1.2	H	-1.06	46.91	74.00	-27.09
5147.54	38.16	Ave	316	1.2	H	-1.06	37.10	54.00	-16.90
10460.00	39.46	PK	276	1.7	H	5.28	44.74	74.00	-29.26
10480.00	36.07	Ave	276	1.7	H	5.28	41.35	54.00	-12.65



Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
802.11ac(HT40) U-NII-3 Low Channel 5755MHz									
223.45	46.78	QP	171	1.3	H	-11.62	35.16	46.00	-10.84
223.45	38.54	QP	179	1.9	V	-11.62	26.92	46.00	-19.08
4508.62	39.38	PK	314	1.6	H	-1.89	37.49	74.00	-36.51
4508.62	36.14	Ave	314	1.6	H	-1.89	34.25	54.00	-19.75
5123.39	47.88	PK	278	1.3	H	-1.06	46.82	74.00	-27.18
5123.39	40.82	Ave	278	1.3	H	-1.06	39.76	54.00	-14.24
11020.00	45.85	PK	137	1.0	H	5.26	51.11	74.00	-22.89
11020.00	29.76	Ave	137	1.0	H	5.26	35.02	54.00	-18.98
802.11ac(HT40) U-NII-3 High channel 5795MHz									
223.45	45.98	QP	212	1.9	H	-11.62	34.36	46.00	-11.64
223.45	38.52	QP	260	1.0	V	-11.62	26.90	46.00	-19.10
4516.95	39.64	PK	231	1.7	H	-1.94	37.70	74.00	-36.30
4516.95	35.71	Ave	231	1.7	H	-1.94	33.77	54.00	-20.23
5117.67	47.86	PK	188	1.2	H	-1.06	46.80	74.00	-27.20
5117.67	41.09	Ave	188	1.2	H	-1.06	40.03	54.00	-13.97
11340.00	41.75	PK	200	1.7	H	5.28	47.03	74.00	-26.97
11340.00	36.55	Ave	200	1.7	H	5.28	41.83	54.00	-12.17

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
802.11ac(HT80) U-NII-1 Low Channel 5210MHz									
223.45	50.85	QP	309	1.3	H	-11.62	39.23	46.00	-6.77
4519.79	35.91	QP	41	1.3	V	-11.62	24.29	46.00	-21.71
4536.16	24.40	PK	132	1.3	H	-1.88	22.52	74.00	-51.48
4536.16	40.27	Ave	132	1.3	H	-1.88	38.39	54.00	-15.61
5136.38	38.25	PK	260	1.1	H	-1.06	37.19	74.00	-36.81
5136.38	46.94	Ave	260	1.1	H	-1.06	45.88	54.00	-8.12
10420.00	40.09	PK	5	1.1	H	4.65	44.74	74.00	-29.26
10420.00	36.08	Ave	5	1.1	H	4.65	40.73	54.00	-13.27
802.11ac(HT80) U-NII-3 Low Channel 5775MHz									
4536.16	25.16	QP	292	1.4	H	-11.62	13.54	46.00	-32.46
4517.56	40.01	QP	155	1.2	V	-11.62	28.39	46.00	-17.61
4509.97	38.32	PK	263	1.9	H	-1.88	36.44	74.00	-37.56
4509.97	47.04	Ave	263	1.9	H	-1.88	45.16	54.00	-8.84
5118.46	42.09	PK	146	1.7	H	-1.06	41.03	74.00	-32.97
5118.46	35.39	Ave	146	1.7	H	-1.06	34.33	54.00	-19.67
11060.00	45.61	PK	266	1.9	H	4.65	50.26	74.00	-23.74
11060.00	36.89	Ave	266	1.9	H	4.65	41.54	54.00	-12.46

## 22m ECO Reel

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
802.11a U-NII-1 Low Channel 5180MHz									
235.19	41.08	QP	127	1.8	H	-11.62	29.46	46.00	-16.54
235.19	38.61	QP	91	1.1	V	-11.62	26.99	46.00	-19.01
4516.49	54.26	PK	15	1.7	H	-2.03	52.23	74.00	-21.77
4516.49	44.32	Ave	15	1.7	H	-2.03	42.29	54.00	-11.71
5121.77	52.85	PK	181	1.2	H	-1.02	51.83	74.00	-22.17
5121.77	44.35	Ave	181	1.2	H	-1.02	43.33	54.00	-10.67
10360.00	41.40	PK	357	2.0	H	5.33	46.73	74.00	-27.27
10360.00	37.47	Ave	357	2.0	H	5.33	42.80	54.00	-11.20
802.11a U-NII-1 Middle channel 5200MHz									
235.19	41.64	QP	205	1.9	H	-11.62	30.02	46.00	-15.98
235.19	39.07	QP	212	1.0	V	-11.62	27.45	46.00	-18.55
4523.06	55.68	PK	304	1.9	H	-1.94	53.74	74.00	-20.26
4523.06	43.84	Ave	304	1.9	H	-1.94	41.90	54.00	-12.10
5110.58	52.26	PK	85	1.4	H	-1.06	51.20	74.00	-22.80
5110.58	46.13	Ave	85	1.4	H	-1.06	45.07	54.00	-8.93
10400.00	40.00	PK	218	1.9	H	5.21	45.21	74.00	-28.79
10400.00	36.00	Ave	218	1.9	H	5.21	41.21	54.00	-12.79

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
802.11a U-NII-1 High channel 5240MHz									
235.19	42.16	QP	4	1.9	H	-11.62	30.54	46.00	-15.46
235.19	36.91	QP	338	1.2	V	-11.62	25.29	46.00	-20.71
4508.60	52.07	PK	110	1.6	H	-2.24	49.83	74.00	-24.17
4508.60	42.34	Ave	110	1.6	H	-2.24	40.10	54.00	-13.90
5120.15	55.60	PK	207	1.7	H	-1.09	54.51	74.00	-19.49
5120.15	46.73	Ave	207	1.7	H	-1.09	45.64	54.00	-8.36
10480.00	40.74	PK	146	1.1	H	5.14	45.88	74.00	-28.12
10480.00	37.81	Ave	146	1.1	H	5.14	42.95	54.00	-11.05
802.11a U-NII-3 Low Channel 5745MHz									
235.19	41.81	QP	158	1.7	H	-11.62	30.19	46.00	-15.81
235.19	35.83	QP	239	1.6	V	-11.62	24.21	46.00	-21.79
4507.20	53.28	PK	213	1.7	H	-2.06	51.22	74.00	-22.78
4507.20	42.91	Ave	213	1.7	H	-2.06	40.85	54.00	-13.15
5362.53	45.42	PK	139	1.3	H	-1.25	44.17	74.00	-29.83
5362.53	37.24	Ave	139	1.3	H	-1.25	35.99	54.00	-18.01
11490.00	43.05	PK	21	1.9	H	5.93	48.98	74.00	-25.02
11490.00	33.50	Ave	21	1.9	H	5.93	39.43	54.00	-14.57

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
802.11a U-NII-3 Middle channel 5785MHz									
235.19	41.24	QP	181	1.1	H	-11.62	29.62	46.00	-16.38
235.19	40.71	QP	208	1.6	V	-11.62	29.09	46.00	-16.91
4532.51	54.62	PK	142	1.4	H	-2.03	52.59	74.00	-21.41
4532.51	42.53	Ave	142	1.4	H	-2.03	40.50	54.00	-13.50
5388.17	45.34	PK	133	1.1	H	-1.22	44.12	74.00	-29.88
5388.17	37.59	Ave	133	1.1	H	-1.22	36.37	54.00	-17.63
11570.00	42.13	PK	241	1.3	H	5.81	47.94	74.00	-26.06
11570.00	36.16	Ave	241	1.3	H	5.81	41.97	54.00	-12.03
802.11a U-NII-3 High channel 5825MHz									
235.19	40.50	QP	86	2.0	H	-11.62	28.88	46.00	-17.12
235.19	40.26	QP	210	1.3	V	-11.62	28.64	46.00	-17.36
4515.94	54.25	PK	242	1.8	H	-1.84	52.41	74.00	-21.59
4515.94	42.54	Ave	242	1.8	H	-1.84	40.70	54.00	-13.30
5386.84	45.35	PK	176	1.8	H	-1.30	44.05	74.00	-29.95
5386.84	37.54	Ave	176	1.8	H	-1.30	36.24	54.00	-17.76
11650.00	41.85	PK	350	1.1	H	5.84	47.69	74.00	-26.31
11650.00	33.69	Ave	350	1.1	H	5.84	39.53	54.00	-14.47

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
802.11n(HT20) U-NII-1 Low Channel 5180MHz									
235.19	41.93	QP	174	1.7	H	-11.62	30.31	46.00	-15.69
235.19	40.32	QP	114	1.9	V	-11.62	28.70	46.00	-17.30
4506.07	53.39	PK	87	1.7	H	-2.14	51.25	74.00	-22.75
4506.07	41.37	Ave	87	1.7	H	-2.14	39.23	54.00	-14.77
5110.80	46.86	PK	337	1.4	H	-1.06	45.80	74.00	-28.20
5110.80	38.43	Ave	337	1.4	H	-1.06	37.37	54.00	-16.63
10360.00	40.78	PK	335	1.6	H	5.33	46.11	74.00	-27.89
10360.00	38.33	Ave	335	1.6	H	5.33	43.66	54.00	-10.34
802.11n(HT20) U-NII-1 Middle channel 5200MHz									
235.19	41.25	QP	185	1.3	H	-11.62	29.63	46.00	-16.37
235.19	39.38	QP	243	1.9	V	-11.62	27.76	46.00	-18.24
4520.08	52.54	PK	23	1.5	H	-2.12	50.42	74.00	-23.58
4520.08	41.24	Ave	23	1.5	H	-2.12	39.12	54.00	-14.88
5144.50	47.67	PK	32	1.6	H	-1.06	46.61	74.00	-27.39
5144.50	38.48	Ave	32	1.6	H	-1.06	37.42	54.00	-16.58
10400.00	42.96	PK	177	1.1	H	5.21	48.17	74.00	-25.83
10400.00	37.02	Ave	177	1.1	H	5.21	42.23	54.00	-11.77

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
802.11n(HT20) U-NII-1 High channel 5240MHz									
235.19	42.95	QP	232	1.7	H	-11.62	31.33	46.00	-14.67
235.19	39.33	QP	200	1.9	V	-11.62	27.71	46.00	-18.29
4509.35	55.90	PK	358	1.9	H	-1.96	53.94	74.00	-20.06
4509.35	43.84	Ave	358	1.9	H	-1.96	41.88	54.00	-12.12
5127.76	48.36	PK	286	1.0	H	-1.06	47.30	74.00	-26.70
5127.76	38.23	Ave	286	1.0	H	-1.06	37.17	54.00	-16.83
10480.00	42.65	PK	268	1.0	H	5.14	47.79	74.00	-26.21
10480.00	38.04	Ave	268	1.0	H	5.14	43.18	54.00	-10.82
802.11n(HT20) U-NII-3 Low Channel 5745MHz									
235.19	41.47	QP	100	1.3	H	-11.62	29.85	46.00	-16.15
235.19	50.58	QP	94	1.8	V	-11.62	38.96	46.00	-7.04
4523.02	45.75	PK	311	1.7	H	-2.06	43.69	74.00	-30.31
4523.02	47.58	Ave	311	1.7	H	-2.06	45.52	54.00	-8.48
5367.19	46.53	PK	92	1.9	H	-1.25	45.28	74.00	-28.72
5367.19	39.18	Ave	92	1.9	H	-1.25	37.93	54.00	-16.07
11490.00	40.98	PK	169	1.5	H	5.93	46.91	74.00	-27.07
11490.00	36.35	Ave	169	1.5	H	5.93	42.28	54.00	-11.72

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
802.11n(HT20) U-NII-3 Middle channel 5785MHz									
235.19	40.79	QP	254	1.1	H	-11.62	29.17	46.00	-16.83
235.19	44.82	QP	41	1.9	V	-11.62	33.20	46.00	-12.80
4510.64	47.04	PK	10	1.5	H	-2.03	45.01	74.00	-28.99
4510.64	47.43	Ave	10	1.5	H	-2.03	45.40	54.00	-8.60
5387.01	46.23	PK	154	1.2	H	-1.22	45.01	74.00	-28.99
5387.01	39.80	Ave	154	1.2	H	-1.22	38.58	54.00	-15.42
11570.00	40.21	PK	207	1.1	H	5.81	46.02	74.00	-27.97
11570.00	33.31	Ave	207	1.1	H	5.81	39.12	54.00	-14.88
802.11n(HT20) U-NII-3 High channel 5825MHz									
235.19	42.05	QP	51	1.7	H	-11.62	30.43	46.00	-15.57
235.19	43.57	QP	116	1.0	V	-11.62	31.95	46.00	-14.05
4535.31	47.60	PK	321	1.4	H	-1.84	45.76	74.00	-28.24
4535.31	46.87	Ave	321	1.4	H	-1.84	45.03	54.00	-8.97
5351.25	45.56	PK	71	1.8	H	-1.30	44.26	74.00	-29.74
5351.25	38.02	Ave	71	1.8	H	-1.30	36.72	54.00	-17.28
11650.00	35.85	PK	219	1.3	H	5.84	41.69	74.00	-32.31
11650.00	30.64	Ave	219	1.3	H	5.84	36.48	54.00	-17.52



Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
802.11n(HT40) U-NII-1 Low Channel 5190MHz									
235.19	39.04	QP	223	1.9	H	-11.62	27.42	46.00	-18.58
235.19	36.62	QP	76	1.1	V	-11.62	25.00	46.00	-21.00
4515.09	43.94	PK	320	1.4	H	-1.89	42.05	74.00	-31.95
4515.09	34.60	Ave	320	1.4	H	-1.89	32.71	54.00	-21.29
5118.43	45.06	PK	274	1.3	H	-1.06	44.00	74.00	-30.00
5118.43	37.17	Ave	274	1.3	H	-1.06	36.11	54.00	-17.89
10380.00	39.19	PK	146	1.3	H	5.26	44.45	74.00	-29.55
10380.00	34.18	Ave	146	1.3	H	5.26	39.44	54.00	-14.56
802.11n(HT40) U-NII-1 High channel 5230MHz									
235.19	38.21	QP	176	1.7	H	-11.62	26.59	46.00	-19.41
235.19	35.90	QP	172	1.0	V	-11.62	24.28	46.00	-21.72
4537.74	42.95	PK	96	1.7	H	-1.94	41.01	74.00	-32.99
4537.74	35.48	Ave	96	1.7	H	-1.94	33.54	54.00	-20.46
5135.41	45.31	PK	80	1.4	H	-1.06	44.25	74.00	-29.75
5135.41	36.51	Ave	80	1.4	H	-1.06	35.45	54.00	-18.55
10460.00	42.08	PK	254	1.2	H	5.28	47.36	74.00	-26.64
10480.00	36.24	Ave	254	1.2	H	5.28	41.52	54.00	-12.48

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
802.11n(HT40) U-NII-3 Low Channel 5755MHz									
235.19	41.06	QP	200	1.6	H	-11.62	29.44	46.00	-16.56
235.19	39.22	QP	279	1.6	V	-11.62	27.60	46.00	-18.40
4514.93	42.54	PK	293	1.2	H	-1.96	40.58	74.00	-33.42
4514.93	33.95	Ave	293	1.2	H	-1.96	31.99	54.00	-22.01
5383.94	46.56	PK	109	1.9	H	-1.01	45.55	74.00	-28.45
5383.94	37.26	Ave	109	1.9	H	-1.01	36.25	54.00	-17.75
11510.00	40.51	PK	295	1.4	H	5.88	46.39	74.00	-27.61
11510.00	35.18	Ave	295	1.4	H	5.88	41.06	54.00	-12.94
802.11n(HT40) U-NII-3 High channel 5795MHz									
235.19	40.86	QP	124	1.8	H	-11.62	29.24	46.00	-16.76
235.19	40.11	QP	169	1.8	V	-11.62	28.49	46.00	-17.51
4535.55	43.01	PK	14	1.8	H	-1.92	41.09	74.00	-32.91
4535.55	34.44	Ave	14	1.8	H	-1.92	32.52	54.00	-21.48
5351.57	45.34	PK	81	1.6	H	-1.04	44.30	74.00	-29.70
5351.57	39.32	Ave	81	1.6	H	-1.04	38.28	54.00	-15.72
11590.00	41.24	PK	341	1.3	H	5.63	46.87	74.00	-27.13
11590.00	36.68	Ave	341	1.3	H	5.63	42.31	54.00	-11.69

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
802.11ac(HT20) U-NII-1 Low Channel 5180MHz									
235.19	37.46	QP	340	1.3	H	-11.62	25.84	46.00	-20.16
235.19	39.60	QP	12	1.3	V	-11.62	27.98	46.00	-18.02
4508.02	45.14	PK	345	1.1	H	-1.86	43.28	74.00	-30.72
4508.02	38.99	Ave	345	1.1	H	-1.86	37.13	54.00	-16.87
5124.32	38.14	PK	197	1.4	H	-1.06	37.08	74.00	-36.92
5124.32	40.13	Ave	197	1.4	H	-1.06	39.07	54.00	-14.93
10360.00	45.48	PK	166	1.2	H	5.33	50.81	74.00	-23.19
10360.00	39.65	Ave	166	1.2	H	5.33	44.98	54.00	-9.02
802.11ac(HT20) U-NII-1 Middle channel 5200MHz									
235.19	37.97	QP	56	1.6	H	-11.62	26.35	46.00	-19.65
235.19	40.43	QP	356	1.8	V	-11.62	28.81	46.00	-17.19
4503.24	44.82	PK	85	1.4	H	-1.82	43.00	74.00	-31.00
4503.24	38.63	Ave	85	1.4	H	-1.82	36.81	54.00	-17.19
5114.24	39.68	PK	231	1.2	H	-1.06	38.62	74.00	-35.38
5114.24	41.59	Ave	231	1.2	H	-1.06	40.53	54.00	-13.47
10400.00	41.62	PK	247	1.9	H	5.21	46.83	74.00	-27.17
10400.00	38.09	Ave	247	1.9	H	5.21	43.30	54.00	-10.70

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
802.11ac(HT20) U-NII-1 High channel 5240MHz									
235.19	38.09	QP	279	1.9	H	-11.62	26.47	46.00	-19.53
235.19	40.78	QP	335	1.1	V	-11.62	29.16	46.00	-16.84
4528.82	45.03	PK	108	1.9	H	-1.81	43.22	74.00	-30.78
4528.82	37.66	Ave	108	1.9	H	-1.81	35.85	54.00	-18.15
5142.66	39.08	PK	312	1.8	H	-1.06	38.02	74.00	-35.98
5142.66	42.44	Ave	312	1.8	H	-1.06	41.38	54.00	-12.62
10480.00	41.66	PK	60	1.9	H	5.14	46.80	74.00	-27.20
10480.00	37.65	Ave	60	1.9	H	5.14	42.79	54.00	-11.21
802.11ac(HT20) U-NII-3 Low Channel 5745MHz									
235.19	41.07	QP	93	1.6	H	-11.62	29.45	46.00	-16.55
235.19	40.42	QP	33	1.1	V	-11.62	28.80	46.00	-17.20
4531.65	41.48	PK	212	1.8	H	-1.92	39.56	74.00	-34.44
4531.65	33.92	Ave	212	1.8	H	-1.92	32.00	54.00	-22.00
5384.84	45.16	PK	102	1.1	H	-1.03	44.13	74.00	-29.87
5384.84	39.89	Ave	102	1.1	H	-1.03	38.86	54.00	-15.14
11490.00	40.87	PK	25	1.2	H	5.93	46.80	74.00	-27.20
11490.00	36.10	Ave	25	1.2	H	5.93	42.03	54.00	-11.97

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
802.11ac(HT20) U-NII-3 Middle channel 5785MHz									
235.19	40.70	QP	198	1.1	H	-11.62	29.08	46.00	-16.92
235.19	40.68	QP	90	1.3	V	-11.62	29.06	46.00	-16.94
4512.31	41.80	PK	60	1.2	H	-1.97	39.83	74.00	-34.17
4512.31	33.35	Ave	60	1.2	H	-1.97	31.38	54.00	-22.62
5379.16	46.98	PK	181	1.7	H	-1.05	45.93	74.00	-28.07
5379.16	39.02	Ave	181	1.7	H	-1.05	37.97	54.00	-16.03
11570.00	41.78	PK	195	1.7	H	5.81	47.59	74.00	-26.41
11570.00	36.69	Ave	195	1.7	H	5.81	42.50	54.00	-11.50
802.11ac(HT20) U-NII-3 High channel 5825MHz									
235.19	39.88	QP	147	1.3	H	-11.62	28.26	46.00	-17.74
235.19	38.13	QP	257	1.2	V	-11.62	26.51	46.00	-19.49
4504.84	42.41	PK	79	1.3	H	-1.88	40.53	74.00	-33.47
4504.84	37.92	Ave	79	1.3	H	-1.88	36.04	54.00	-17.96
5364.02	46.34	PK	138	1.2	H	-1.06	45.28	74.00	-28.72
5364.02	37.58	Ave	138	1.2	H	-1.06	36.52	54.00	-17.48
11650.00	41.51	PK	260	2.0	H	5.84	47.35	74.00	-26.65
11650.00	37.20	Ave	260	2.0	H	5.84	43.04	54.00	-10.96

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
802.11ac(HT40) U-NII-1 Low Channel 5190MHz									
235.19	38.47	QP	86	1.8	H	-11.62	26.85	46.00	-19.15
235.19	37.81	QP	128	1.5	V	-11.62	26.19	46.00	-19.81
4501.89	38.57	PK	232	1.4	H	-1.91	36.66	74.00	-37.34
4501.89	32.31	Ave	232	1.4	H	-1.91	30.40	54.00	-23.60
5125.08	46.77	PK	80	2.0	H	-1.06	45.71	74.00	-28.29
5125.08	37.03	Ave	80	2.0	H	-1.06	35.97	54.00	-18.03
10380.00	39.97	PK	61	1.9	H	5.26	45.23	74.00	-28.77
10380.00	35.27	Ave	61	1.9	H	5.26	40.53	54.00	-13.47
802.11ac(HT40) U-NII-1 High channel 5230MHz									
235.19	38.54	QP	62	1.3	H	-11.62	26.92	46.00	-19.08
235.19	36.94	QP	248	1.2	V	-11.62	25.32	46.00	-20.68
4534.10	37.80	PK	0	1.1	H	-1.93	35.87	74.00	-38.13
4534.10	31.96	Ave	0	1.1	H	-1.93	30.03	54.00	-23.97
5134.07	48.01	PK	161	1.1	H	-1.06	46.95	74.00	-27.05
5134.07	38.36	Ave	161	1.1	H	-1.06	37.30	54.00	-16.70
10460.00	41.37	PK	221	1.5	H	5.28	46.65	74.00	-27.35
10480.00	37.54	Ave	221	1.5	H	5.28	42.82	54.00	-11.18

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
802.11ac(HT40) U-NII-3 Low Channel 5755MHz									
235.19	41.75	QP	247	1.6	H	-11.62	30.13	46.00	-15.87
235.19	38.72	QP	329	1.6	V	-11.62	27.10	46.00	-18.90
4500.64	34.50	PK	235	1.2	H	-1.92	32.58	74.00	-41.42
4500.64	24.27	Ave	235	1.2	H	-1.92	22.35	54.00	-31.65
5383.43	45.32	PK	146	1.1	H	-1.07	44.25	74.00	-29.75
5383.43	37.83	Ave	146	1.1	H	-1.07	36.76	54.00	-17.24
11510.00	40.57	PK	181	1.8	H	5.88	46.45	74.00	-27.55
11510.00	36.67	Ave	181	1.8	H	5.88	42.55	54.00	-11.45
802.11ac(HT40) U-NII-3 High channel 5795MHz									
235.19	40.97	QP	51	1.9	H	-11.62	29.35	46.00	-16.65
235.19	38.40	QP	234	1.2	V	-11.62	26.78	46.00	-19.22
4511.21	33.76	PK	281	1.0	H	-1.86	31.90	74.00	-42.10
4511.21	23.98	Ave	281	1.0	H	-1.86	22.12	54.00	-31.88
5365.90	45.27	PK	57	1.9	H	-1.03	44.24	74.00	-29.76
5365.90	38.91	Ave	57	1.9	H	-1.03	37.88	54.00	-16.12
11590.00	41.50	PK	148	1.2	H	5.63	47.13	74.00	-26.87
11590.00	33.93	Ave	148	1.2	H	5.63	49.56	54.00	-14.44

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
802.11ac(HT80) U-NII-1 Low Channel 5210MHz									
235.19	44.25	QP	345	1.5	H	-11.62	32.63	46.00	-13.37
4536.58	32.69	QP	336	1.0	V	-11.62	21.07	46.00	-24.93
4537.41	30.90	PK	24	1.5	H	-1.88	29.02	74.00	-44.98
4537.41	43.39	Ave	24	1.5	H	-1.88	41.51	54.00	-12.49
5144.85	36.26	PK	108	1.7	H	-1.06	35.20	74.00	-38.80
5144.85	47.66	Ave	108	1.7	H	-1.06	46.60	54.00	-7.40
10420.00	42.64	PK	231	1.2	H	4.65	47.29	74.00	-26.71
10420.00	37.49	Ave	231	1.2	H	4.65	42.14	54.00	-11.86
802.11ac(HT80) U-NII-3 Low Channel 5775MHz									
4527.73	38.02	QP	11	1.6	H	-11.62	26.40	46.00	-19.60
4521.35	32.13	QP	356	1.6	V	-11.62	20.51	46.00	-25.49
4512.02	42.99	PK	244	1.6	H	-1.88	41.11	74.00	-32.89
4512.02	36.81	Ave	244	1.6	H	-1.88	34.93	54.00	-19.07
5132.83	45.69	PK	344	1.7	H	-1.06	44.63	74.00	-29.37
5132.83	42.59	Ave	344	1.7	H	-1.06	41.53	54.00	-12.47
10580.00	36.44	PK	32	1.4	H	4.65	41.09	74.00	-32.91
10580.00	46.58	Ave	32	1.4	H	4.65	51.23	54.00	-2.77

**Test Frequency: 18GHz~40GHz**

The measurements were more than 20 dB below the limit and not reported.



## 8 Duty cycle


Test Requirement:	47 CFR Part 15C 15.407 KDB789033 D02 General U-NII Test Procedures New Rules v02r01, Section (B)
Test Method:	ANSI C63.10: 2013
Test Limit:	N/A
Test Result:	PASS
Remark:	Through Pre-scan, and found 802.11a at lowest channel is the worst case. Only the worst case is recorded in the report.

### 8.1 Summary of Test Results


802.11a mode			
channel	On time(ms)	Period(ms)	Duty Cycle(%)
36	100	100	100
149	100	100	100
802.11n(HT20) mode			
channel	On time(ms)	Period(ms)	Duty Cycle(%)
36	100	100	100
149	100	100	100
802.11n(HT40) mode			
channel	On time(ms)	Period(ms)	Duty Cycle(%)
38	100	100	100
151	100	100	100
802.11ac(HT20) mode			
channel	On time(ms)	Period(ms)	Duty Cycle(%)
36	100	100	100
149	100	100	100
802.11ac(HT40) mode			
channel	On time(ms)	Period(ms)	Duty Cycle(%)
38	100	100	100
151	100	100	100
802.11ac(HT80) mode			
channel	On time(ms)	Period(ms)	Duty Cycle(%)
42	100	100	100
155	100	100	100

Test result plots shown as follows:


802.11a U-NII-1 Low channel

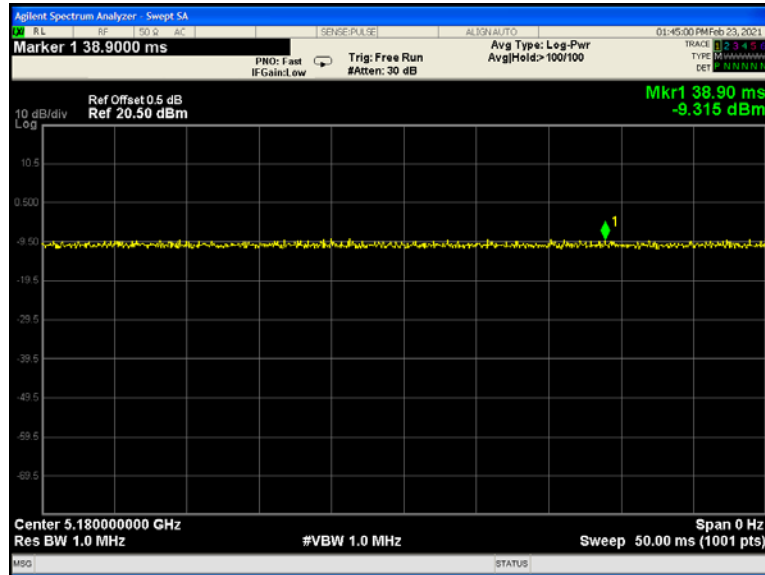


802.11n(HT20) U-NII-1 Low channel

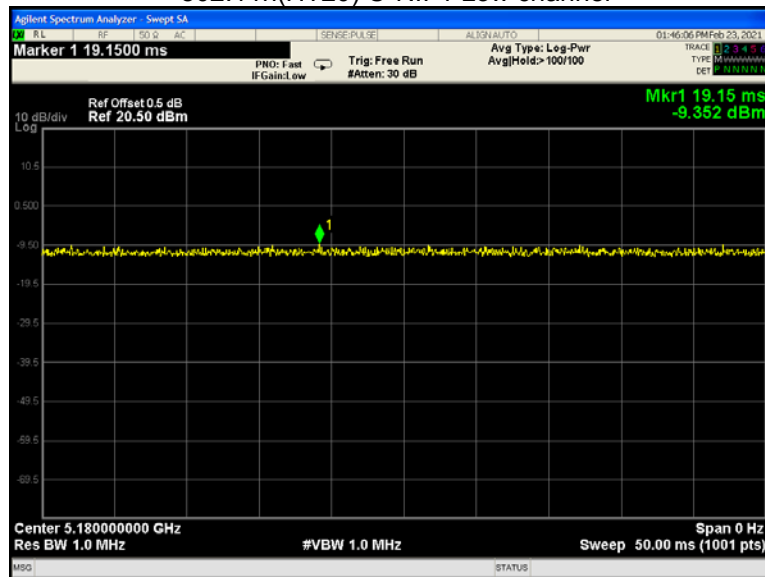


### 802.11n(HT40) U-NII-1 Low channel

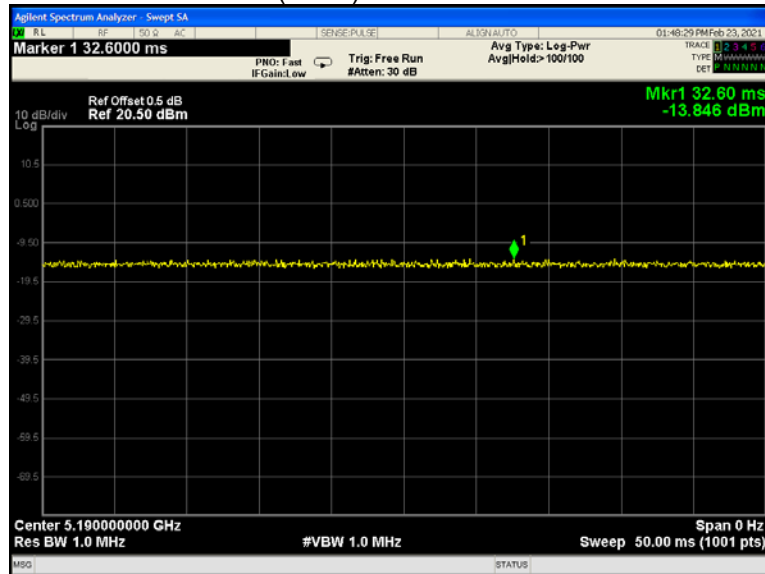


### 802.11ac(HT20) U-NII-1 Low channel

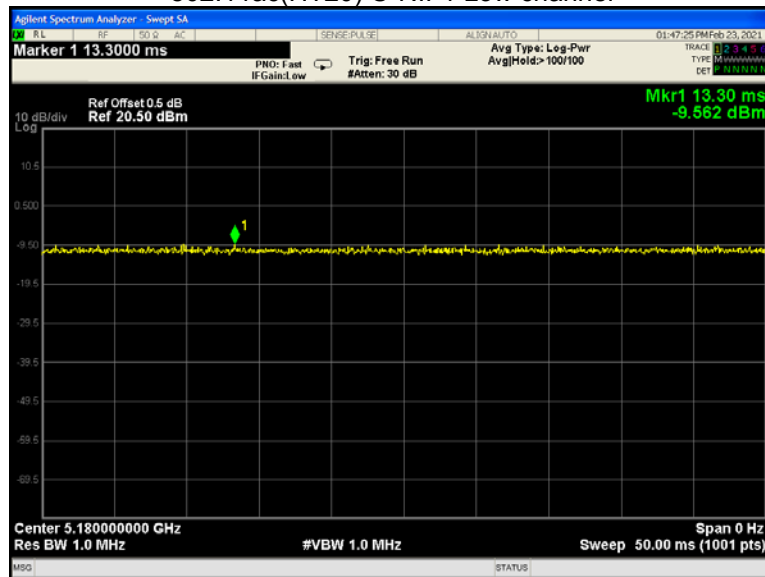


### 802.11ac(HT40) U-NII-1 Low channel

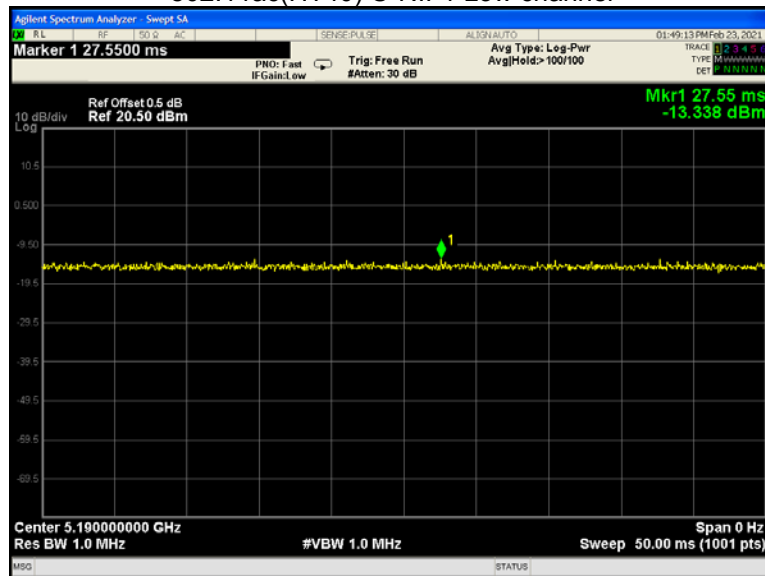


### 802.11ac(HT80) U-NII-1 Low channel

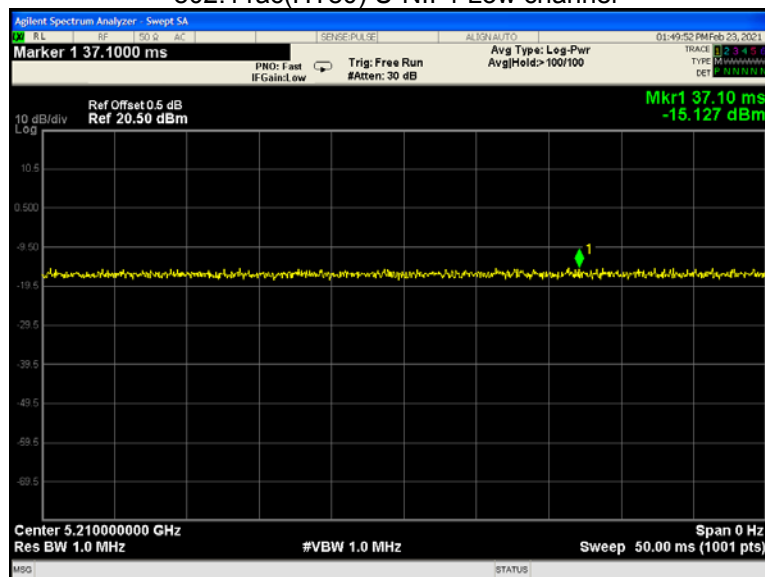


### 802.11a U-NII-3 Low channel

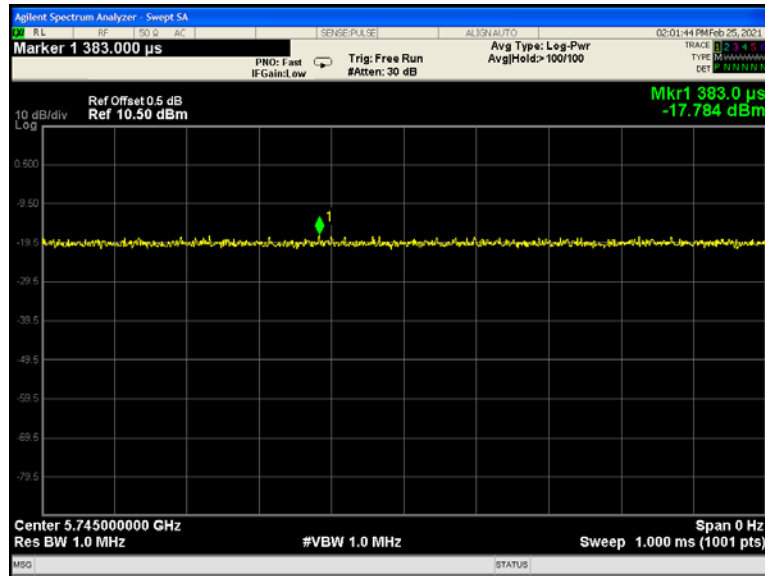


### 802.11n(HT20) U-NII-3 Low channel

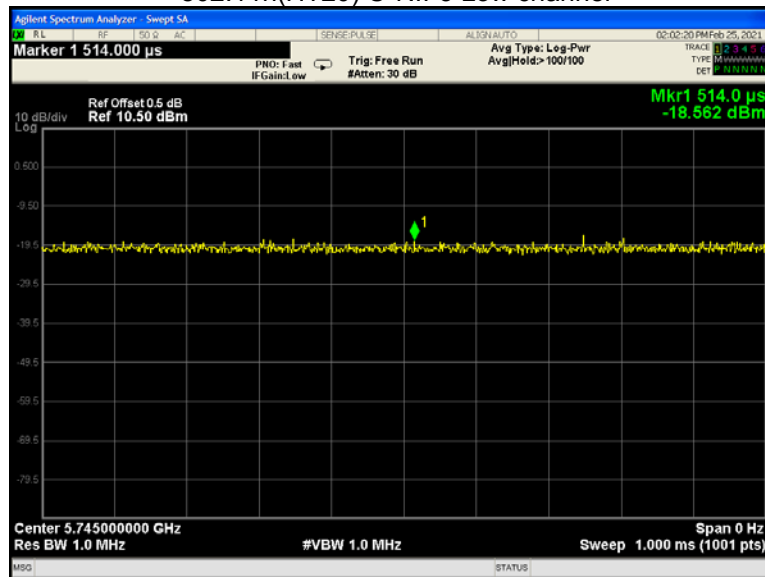


802.11n(HT40) U-NII-3 Low channel

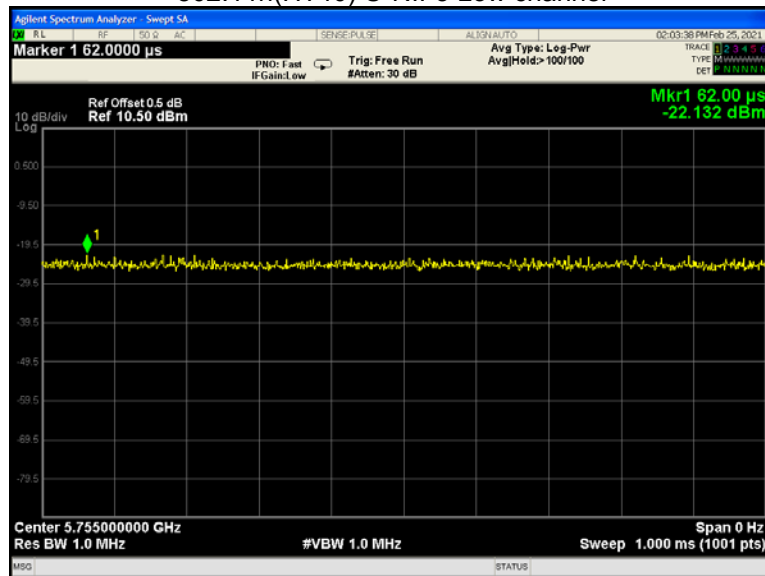


802.11ac(HT20) U-NII-3 Low channel

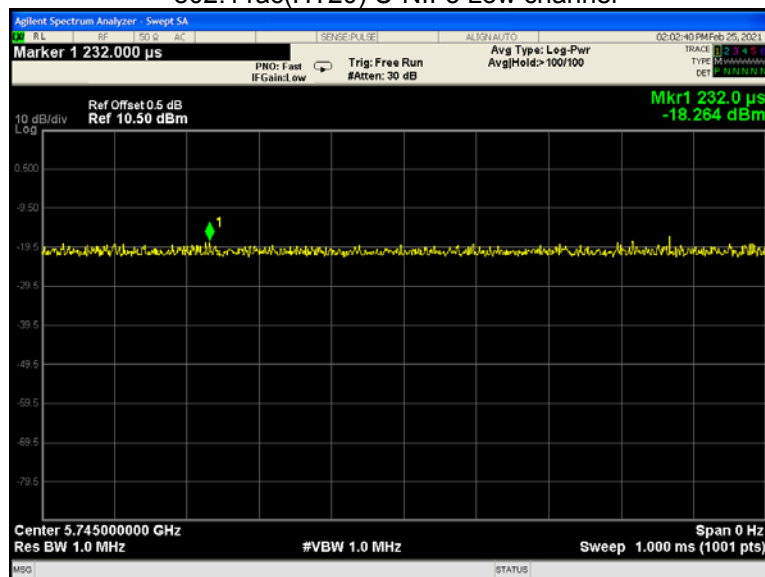

802.11ac(HT40) U-NII-3 Low channel

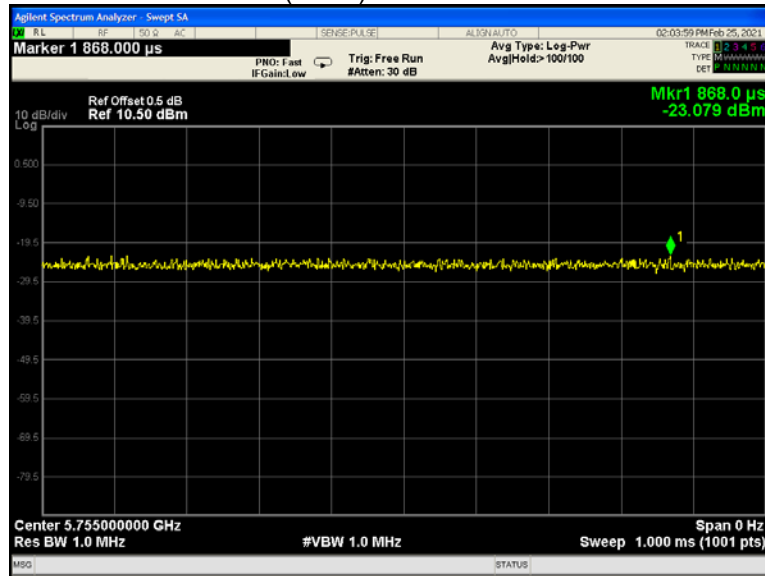

802.11ac(HT80) U-NII-3 Low channel

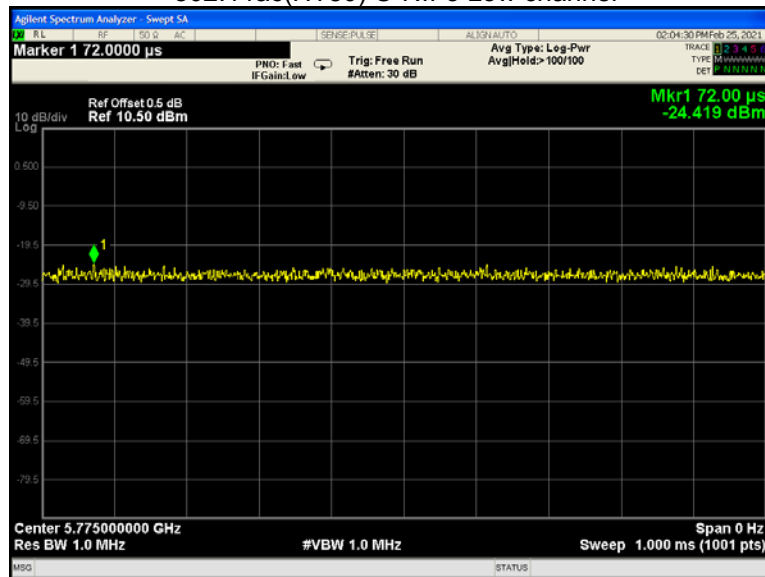

## 9 Band Edge

Test Requirement:	FCC CFR47 Part 15 Section 15.407
Test Method:	ANSI C63.10 2013
Test Limit:	(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of $-27\text{dBm/MHz}$ . (2) For transmitters operating in the 5.725-5.85 GHz band: All emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of $-17\text{dBm/MHz}$ ; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of $-27\text{dBm/MHz}$ .
Test Result:	PASS

### 9.1 Test Produce


1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.




## 9.2 Test Result

Test result plots shown as follows:


802.11a U-NII-1 Band edge-left side

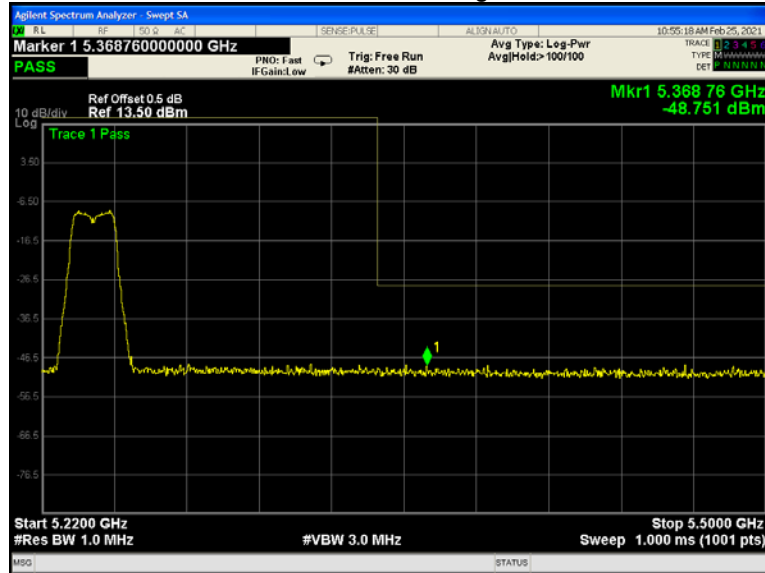


802.11a U-NII-1 Band edge-right side

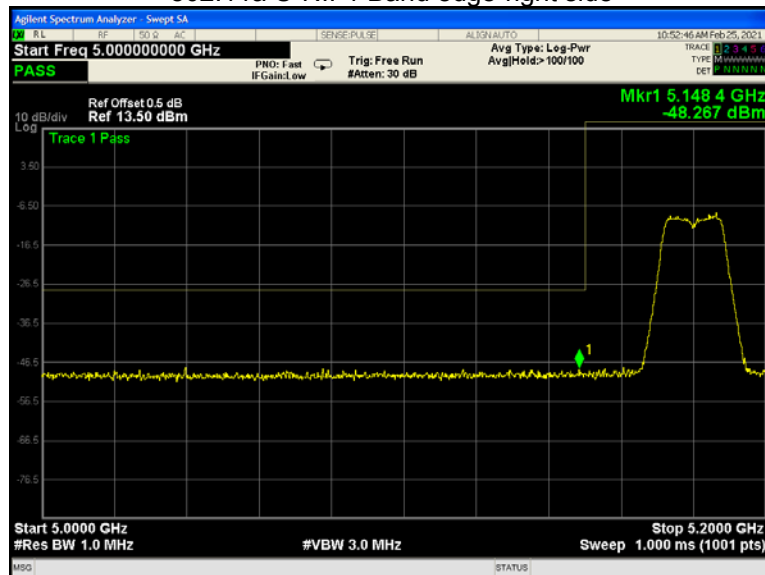


802.11a U-NII-3 Band edge-left side

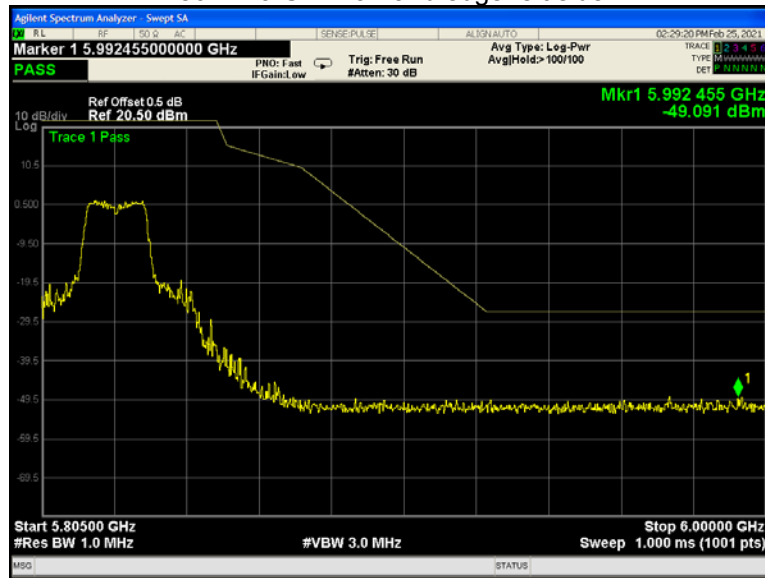


802.11a U-NII-3 Band edge-right side

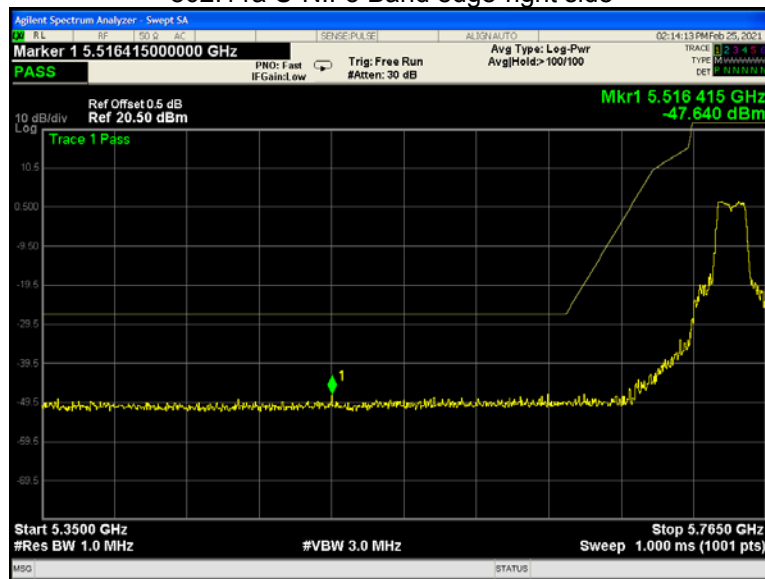


### 802.11n(HT20) U-NII-1 Band edge-left side

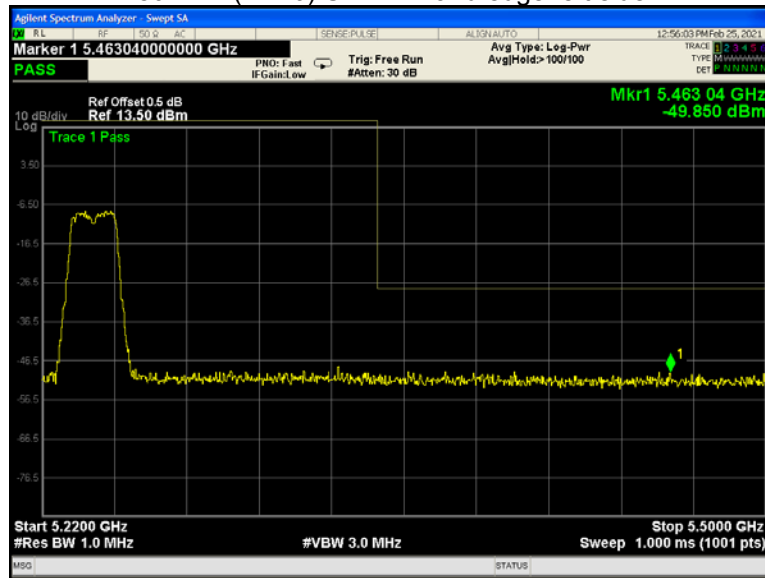


### 802.11n(HT20) U-NII-1 Band edge-right side

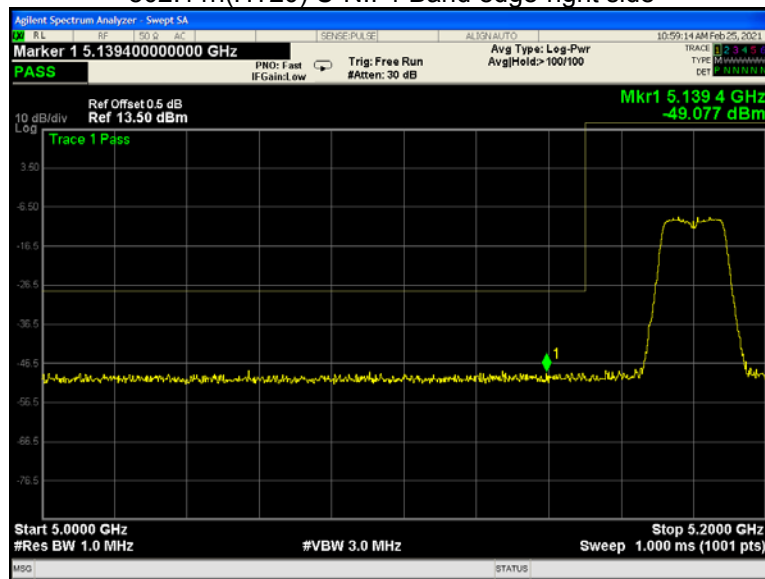


### 802.11n(HT20) U-NII-3 Band edge-left side

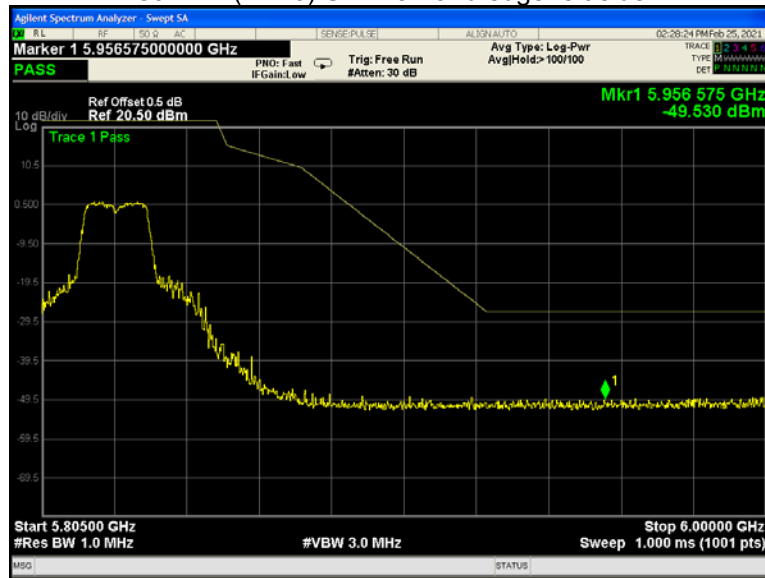


### 802.11n(HT20) U-NII-3 Band edge-right side

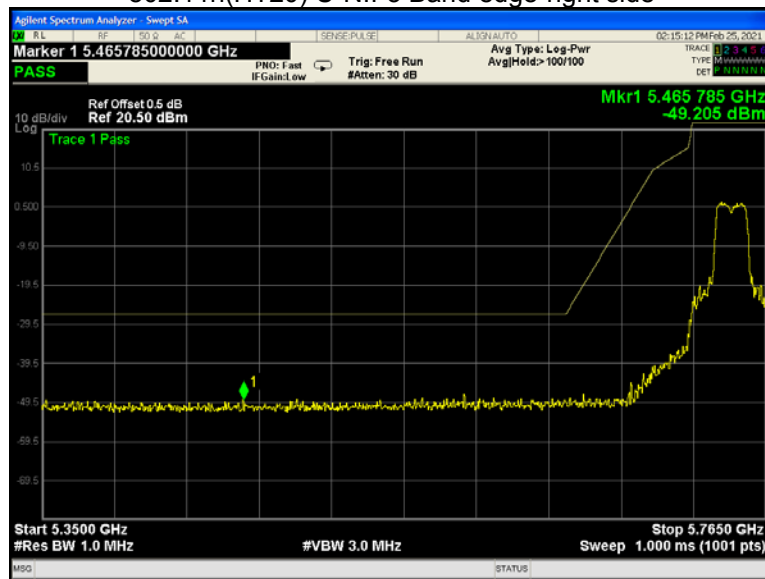


802.11n(HT40) U-NII-1 Band edge-left side

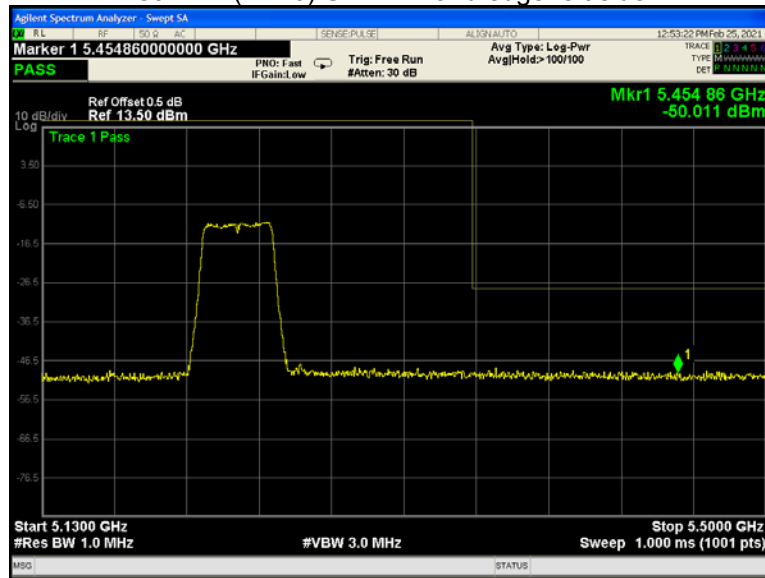


802.11n(HT40) U-NII-1 Band edge-right side

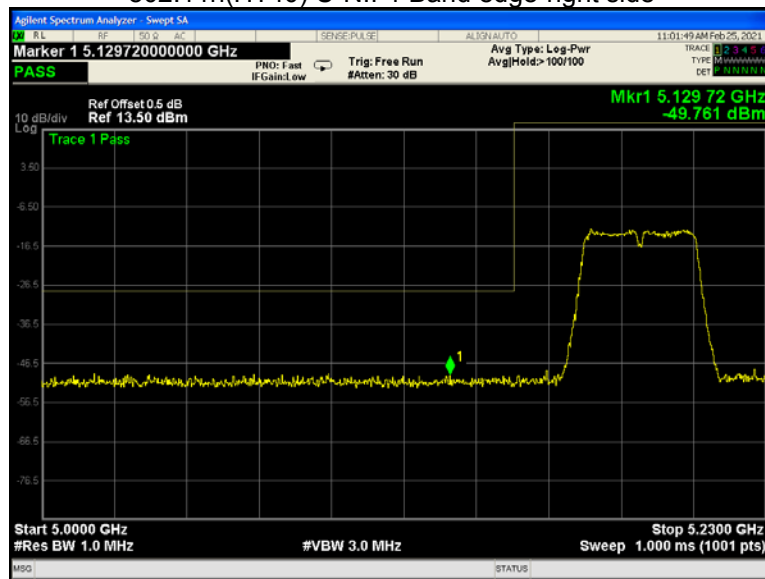


### 802.11n(HT40) U-NII-3 Band edge-left side

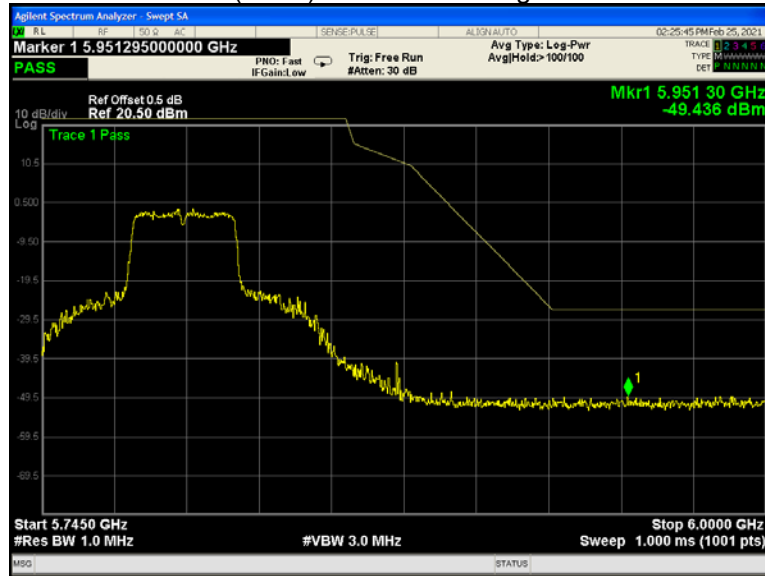


### 802.11n(HT40) U-NII-3 Band edge-right side

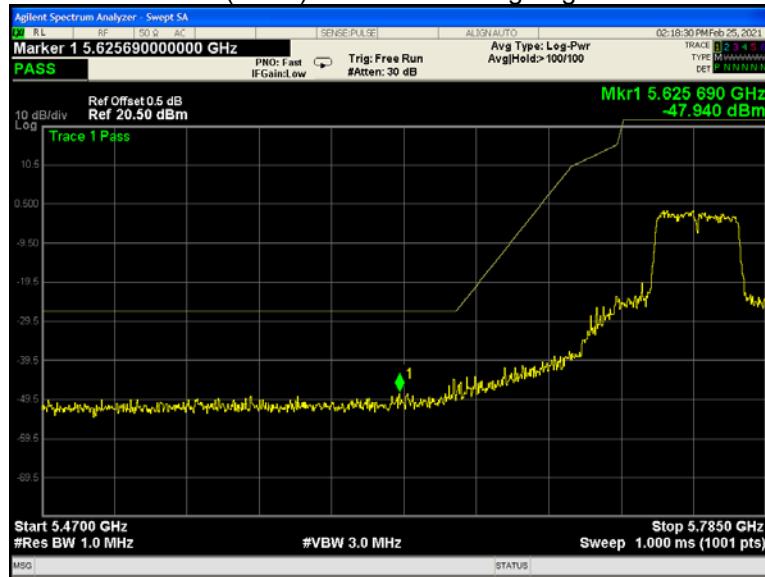


### 802.11ac(HT20) U-NII-1 Band edge-left side

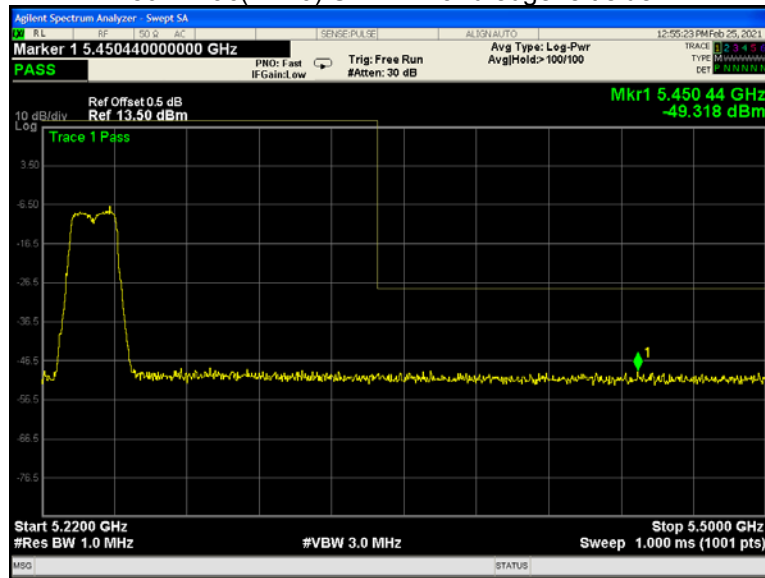


### 802.11ac(HT20) U-NII-1 Band edge-right side

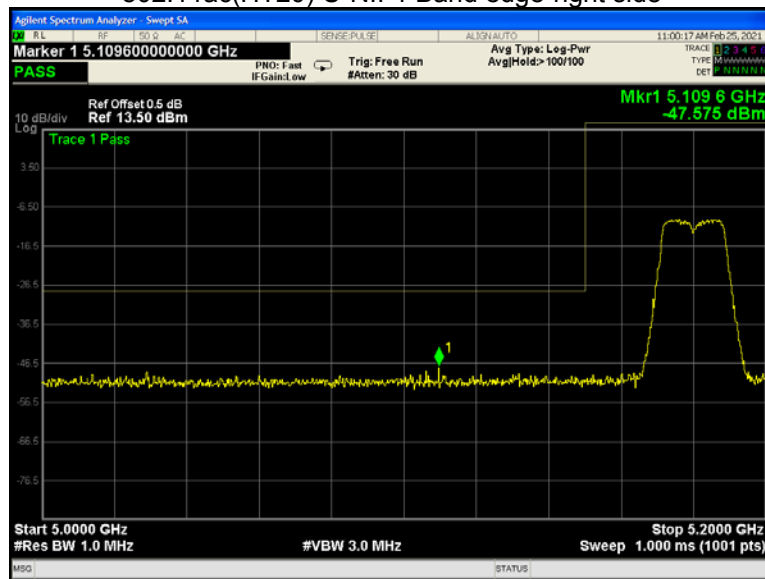

802.11ac(HT20) U-NII-3 Band edge-left side

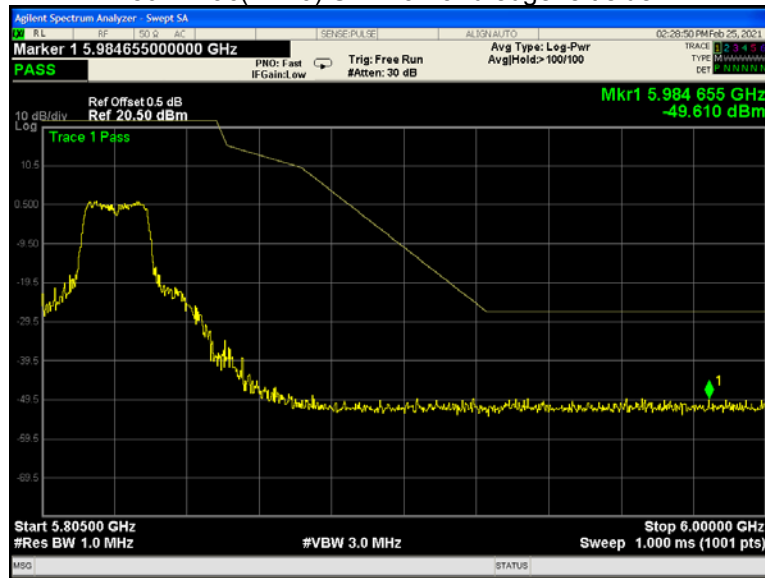


802.11ac(HT20) U-NII-3 Band edge-right side

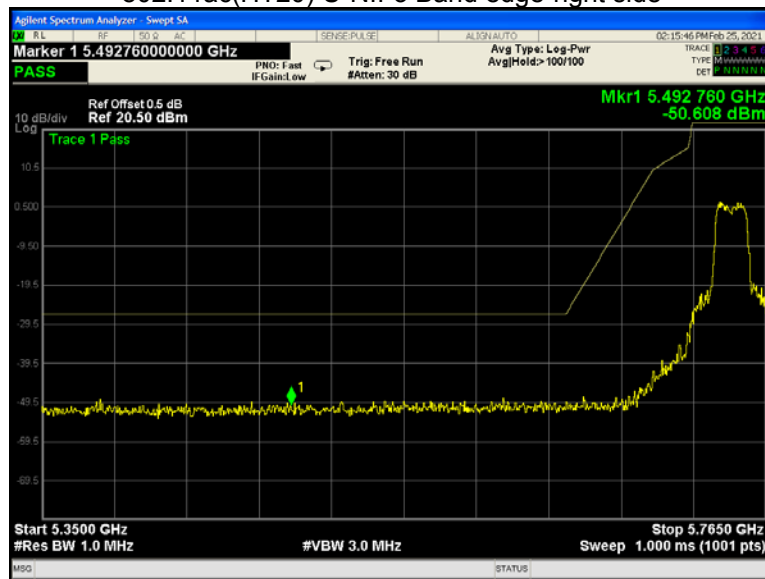





### 802.11ac(HT40) U-NII-1 Band edge-left side

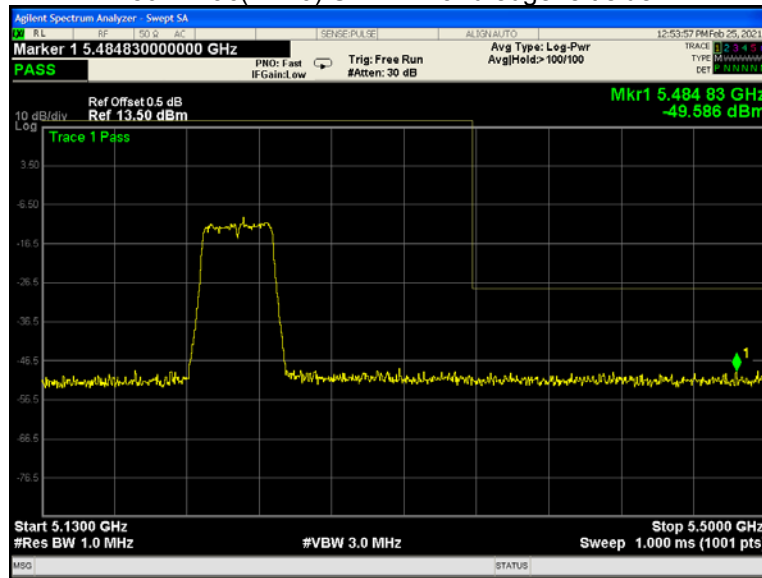


### 802.11ac(HT40) U-NII-1 Band edge-right side

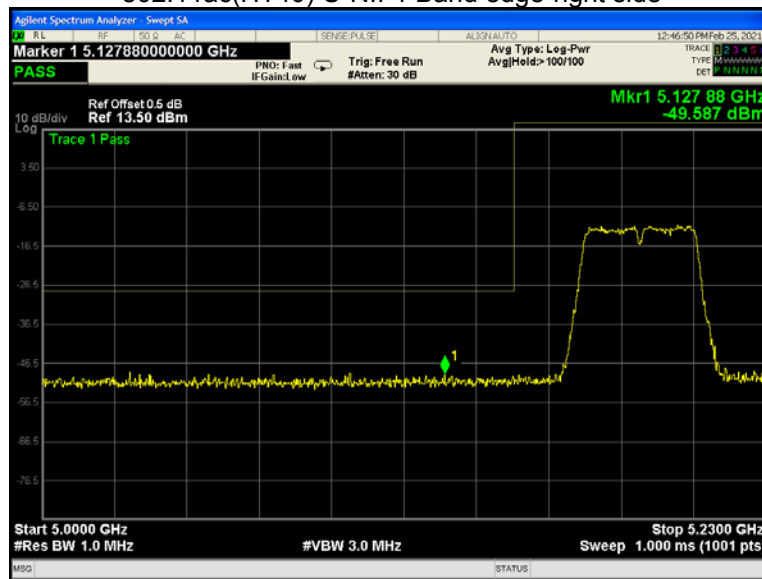


### 802.11ac(HT40) U-NII-3 Band edge-left side

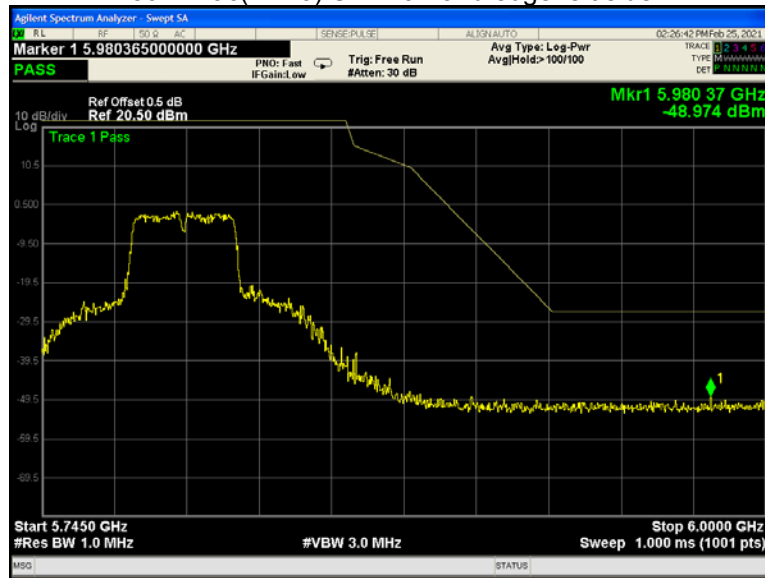


### 802.11ac(HT40) U-NII-3 Band edge-right side

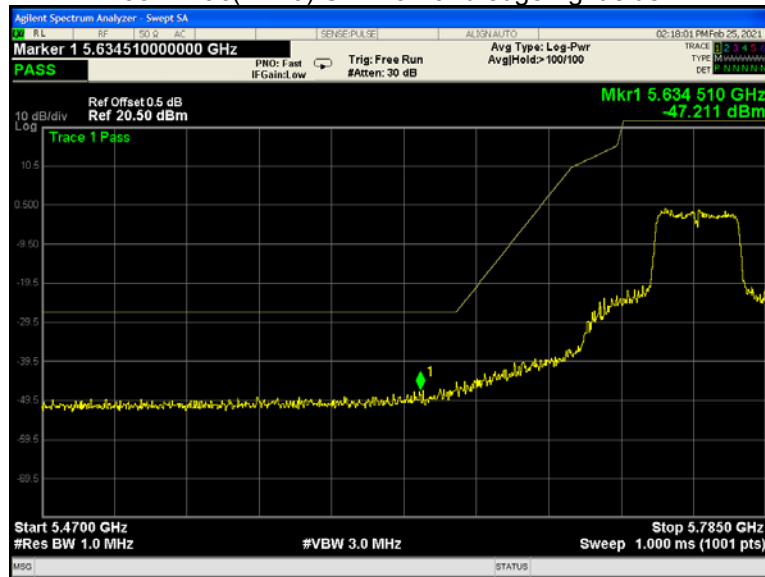


### 802.11ac(HT80) U-NII-1 Band edge-left side

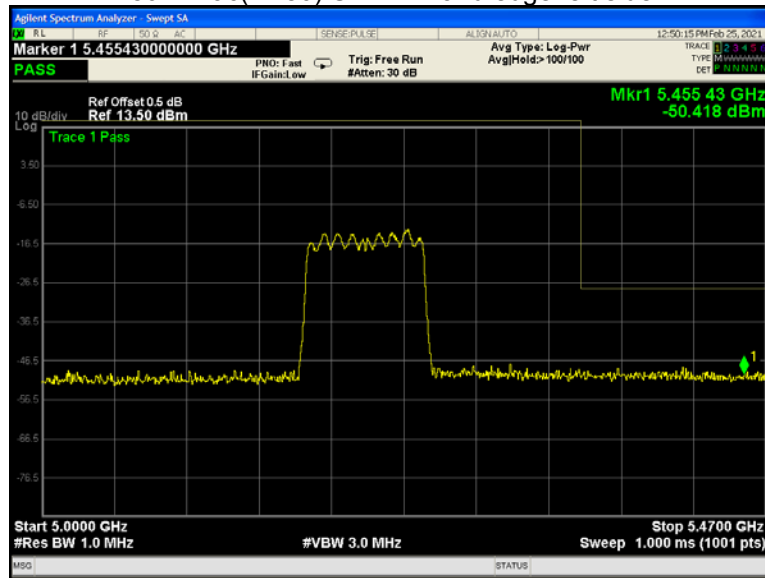


### 802.11ac(HT80) U-NII-1 Band edge-right side

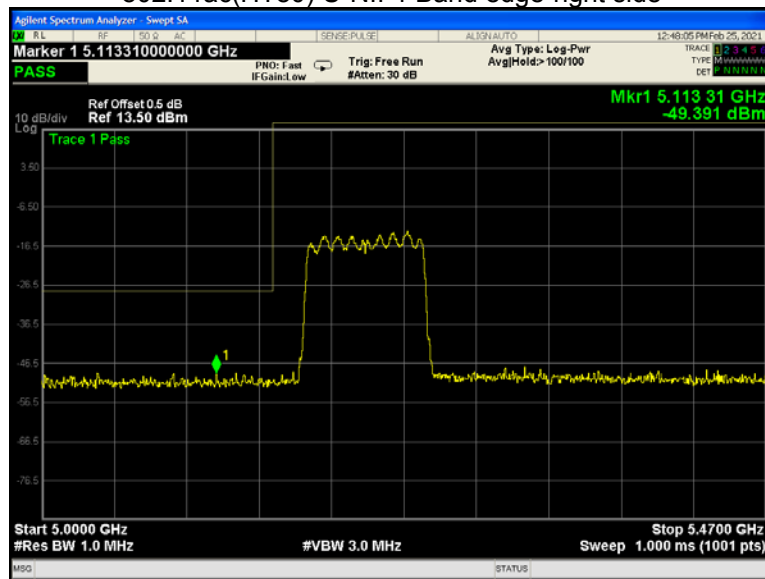

802.11ac(HT80) U-NII-3 Band edge-left side

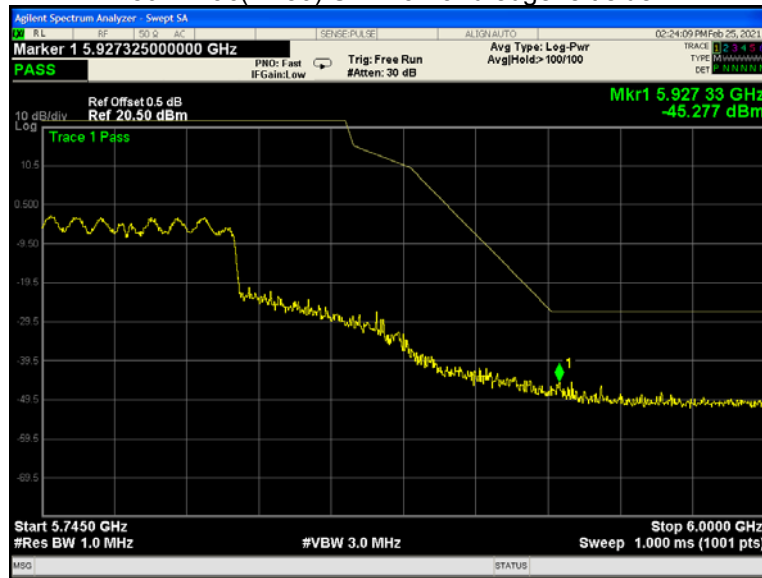

802.11ac(HT80) U-NII-3 Band edge-right side

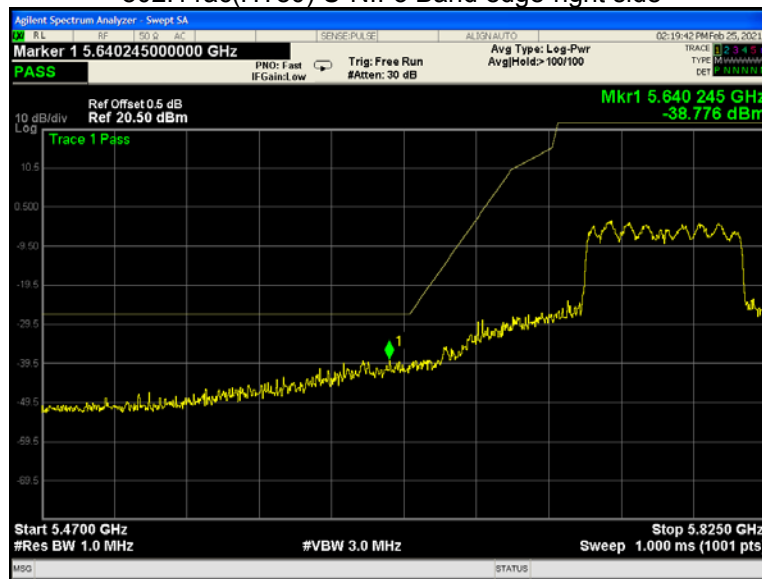

## 10 6 dB Bandwidth

Test Requirement:	FCC CFR47 Part 15 Section 15.407(e) KDB662911 D01 Multiple Transmitter Output v02r01
Test Method:	KDB789033 D02 General U-NII Test Procedures New Rules v02r01 Section C
Test Limit:	≥ 500 kHz
Test Result:	PASS

### 10.1 Test Procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz

### 10.2 Test Result

Band	Operation mode	6 dB Bandwidth (MHz)		
		Low	Middle	High
U-NII-3	802.11a	16.26	16.32	16.32
	802.11n(HT20)	/	16.89	17.07
	802.11n(HT40)	/	/	35.58
	802.11ac(HT20)	17.46	17.52	17.25
	802.11ac(HT40)	35.52	/	35.82
	802.11ac(HT80)	/	/	75.12

Test result plots shown as follows:


802.11a U-NII-3 Low channel

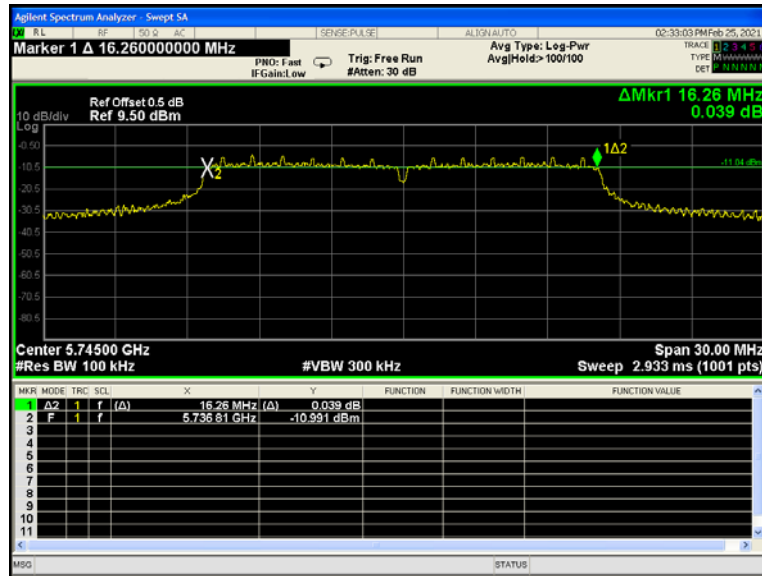


802.11a U-NII-3 Middle channel




802.11a U-NII-3 High channel

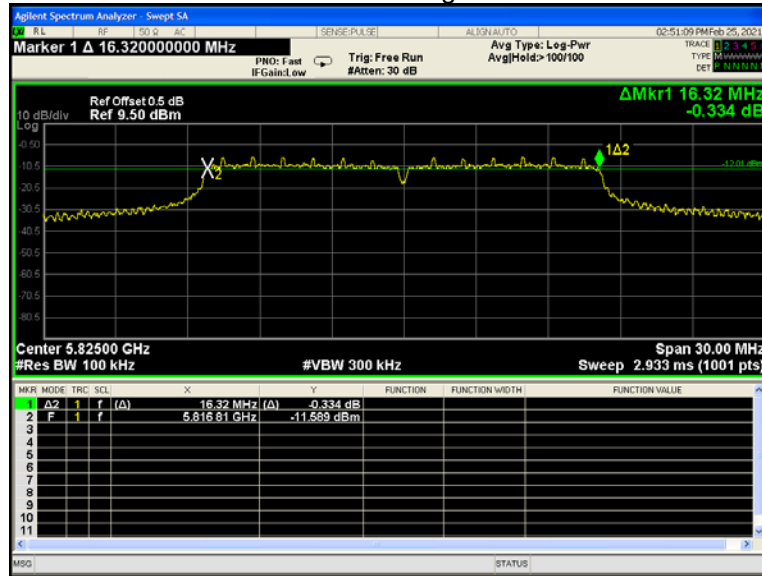


802.11n(HT20) U-NII-3 Middle channel

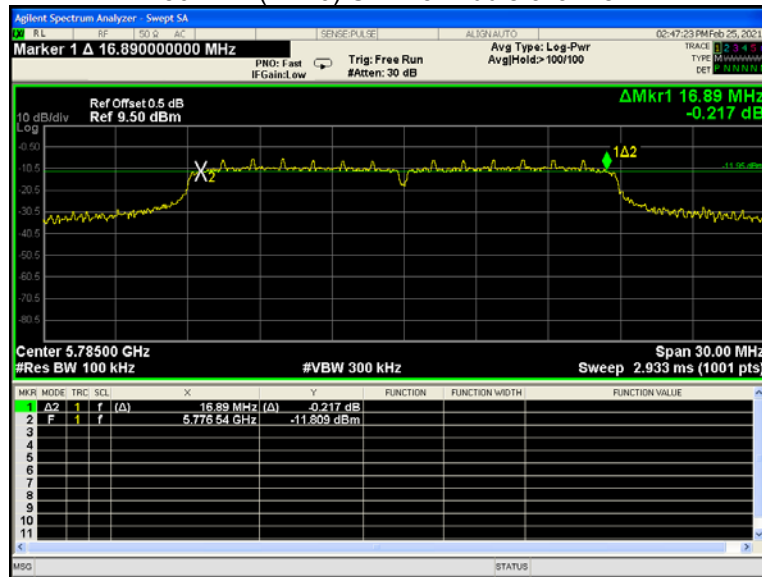

802.11n(HT20) U-NII-3 High channel

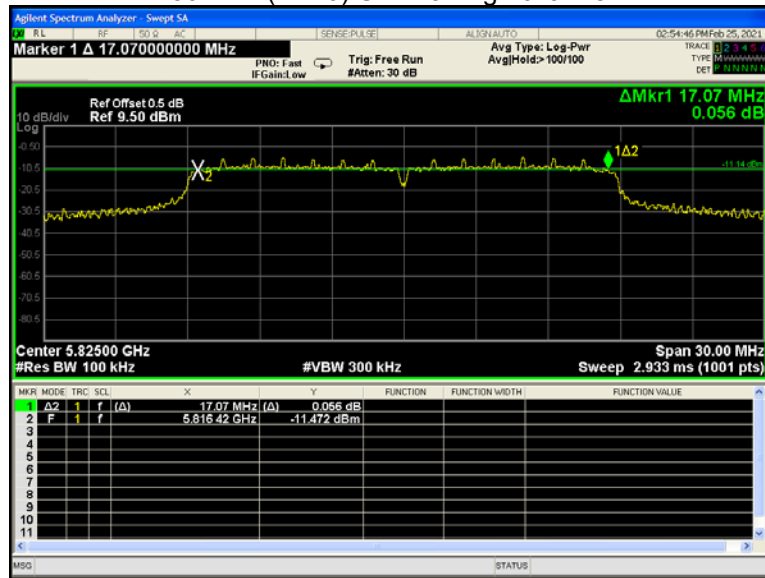


802.11n(HT40) U-NII-3 High channel

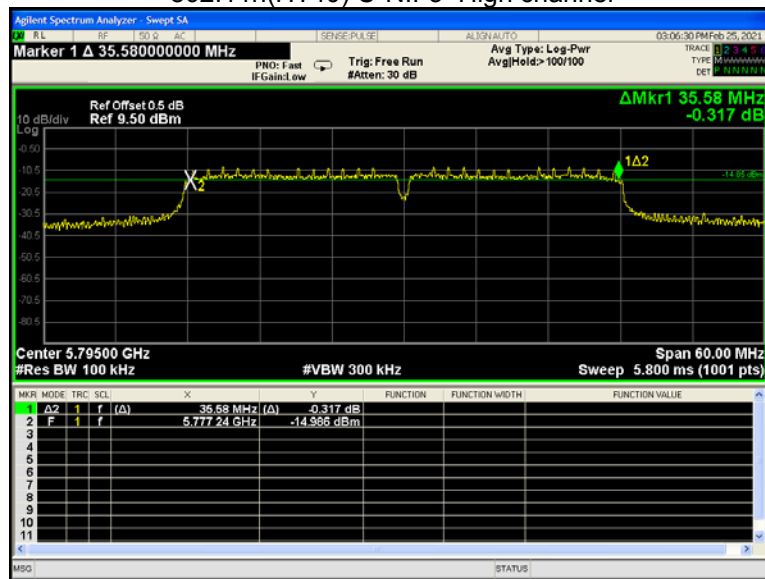





802.11ac(HT20) U-NII-3 Low channel

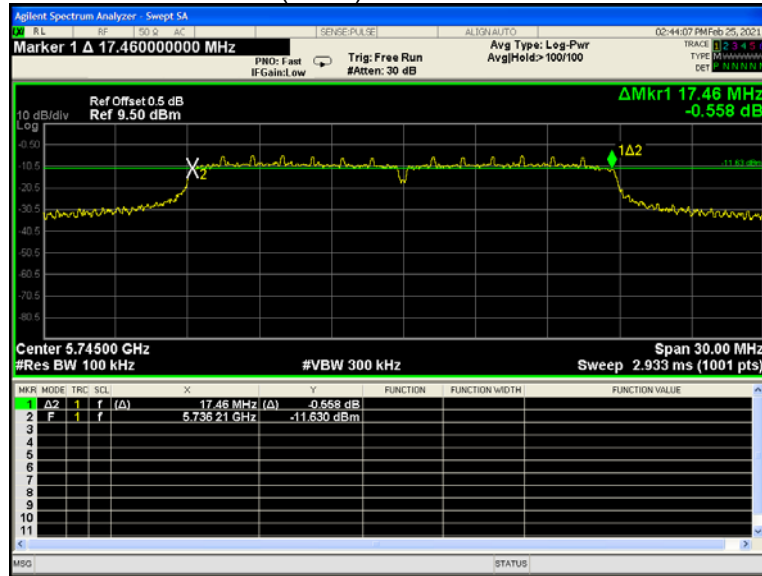

802.11ac(HT20) U-NII-3 Middle channel

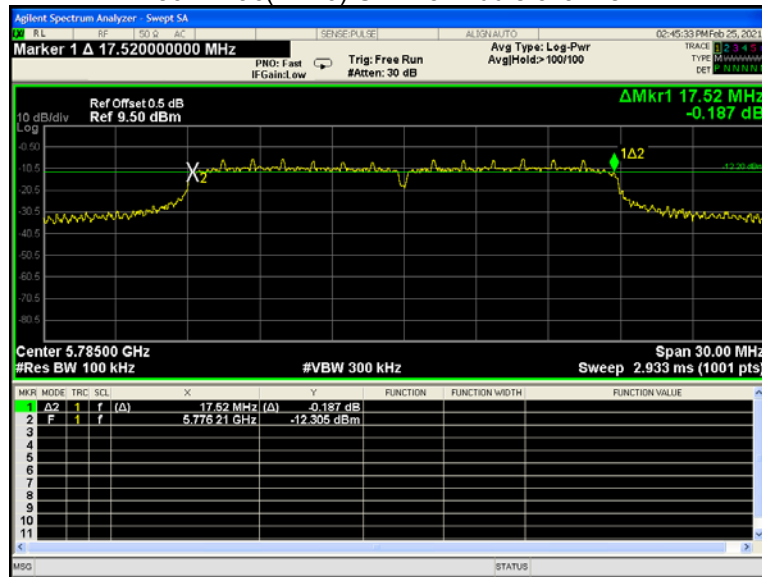

802.11ac(HT20) U-NII-3 High channel

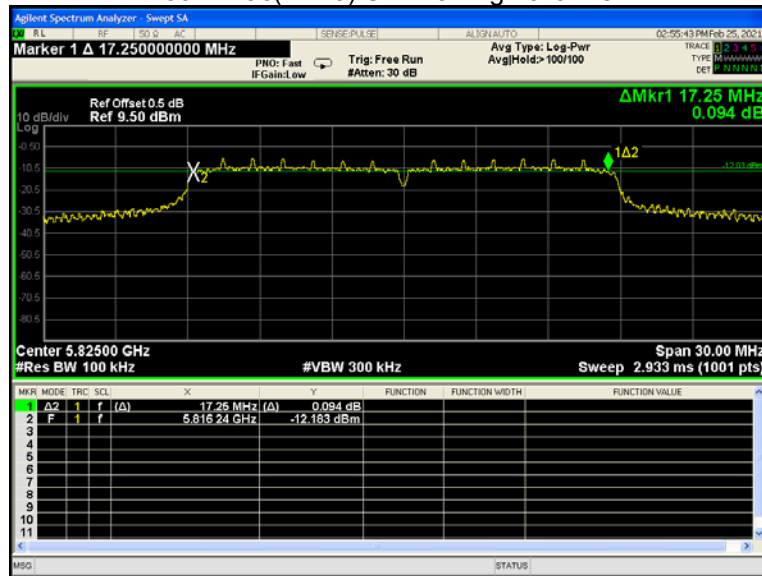


802.11ac(HT40) U-NII-3 Low channel



802.11ac(HT40) U-NII-3 High channel



802.11ac(HT80) U-NII-3 Low channel

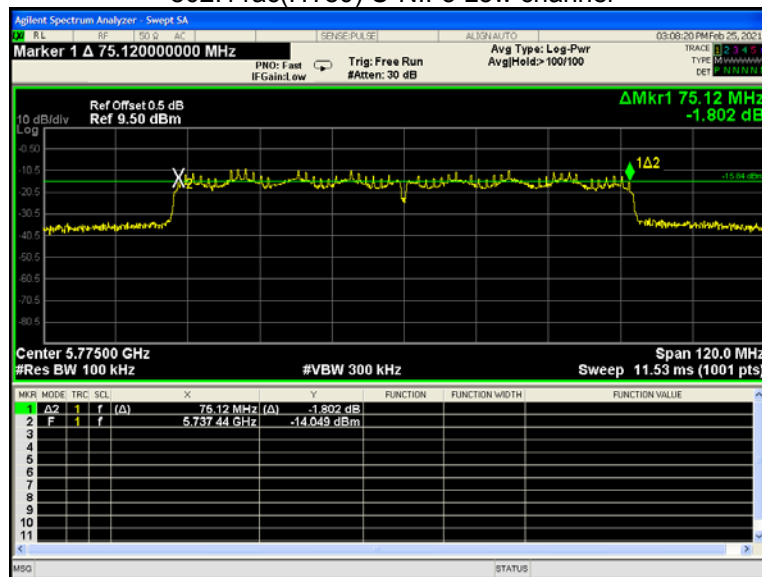

## 11 26 dB Bandwidth and 99% Occupied Bandwidth

Test Requirement:	47 CFR Part 15C Section 15.407 (a) KDB662911 D01 Multiple Transmitter Output v02r01
Test Method:	KDB789033 D02 General U-NII Test Procedures New Rules v02r01 Section D
Test Limit:	No restriction limits
Test Result:	PASS

### 11.1 Test Procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 1% to 5% of the OBW, VBW = 3x RBW

### 11.2 Test Result


Band	Operation mode	26 dB Bandwidth (MHz)			99% Bandwidth (MHz)		
		Low	Middle	High	Low	Middle	High
U-NII-1	802.11a	21.13	21.23	20.82	16.609	16.615	16.584
	802.11n(HT20)	21.18	21.04	21.32	17.632	17.638	17.650
	802.11n(HT40)	41.93	/	41.92	36.153	/	36.162
	802.11ac(HT20)	21.37	20.96	21.50	17.660	17.640	17.648
	802.11ac(HT40)	41.22	/	41.76	36.127	/	36.181
	802.11ac(HT80)	80.51	/	/	75.084	/	/
U-NII-3	802.11a	19.75	19.79	19.53	16.467	16.440	16.456
	802.11n(HT20)	21.23	21.17	21.44	17.659	17.677	17.684
	802.11n(HT40)	41.86	/	42.59	36.246	/	36.250
	802.11ac(HT20)	21.44	21.23	20.80	17.664	17.654	17.651
	802.11ac(HT40)	42.60	/	42.00	36.224	/	36.201
	802.11ac(HT80)	81.19	/	/	75.369	/	/

Test result plots shown as follows:


802.11a U-NII-1 Low channel

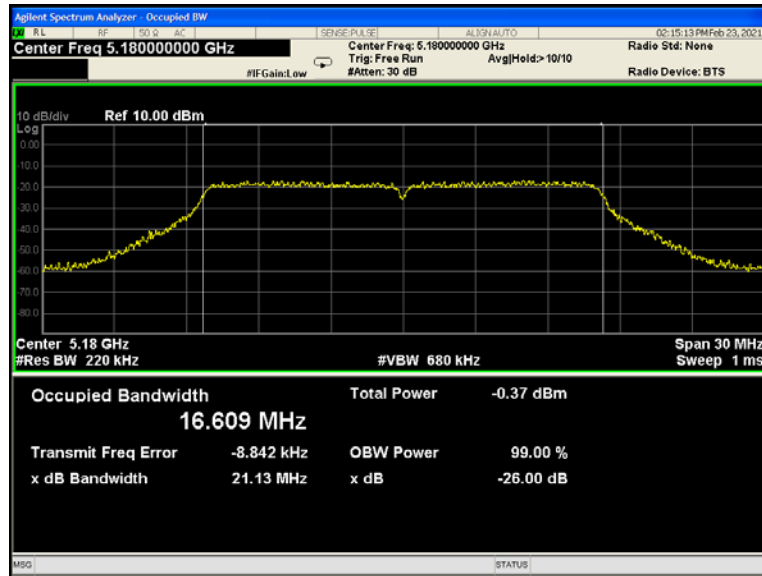


802.11a U-NII-1 Middle channel

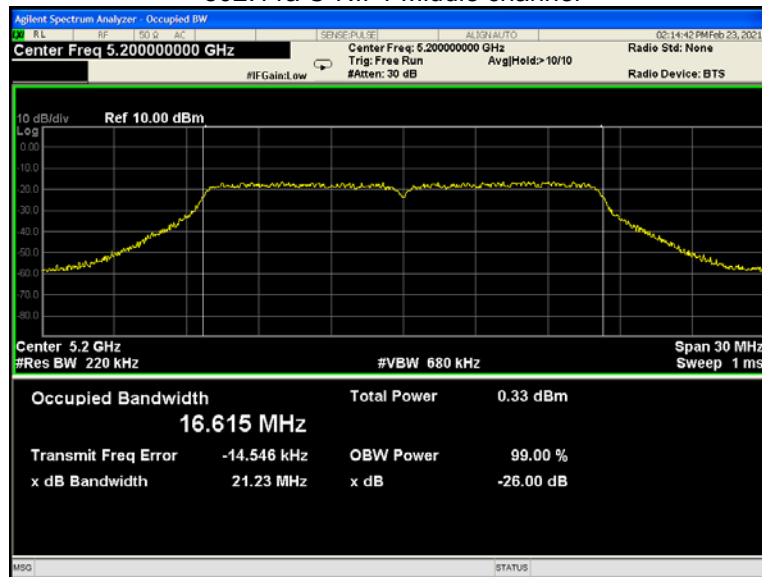


802.11a U-NII-1 High channel

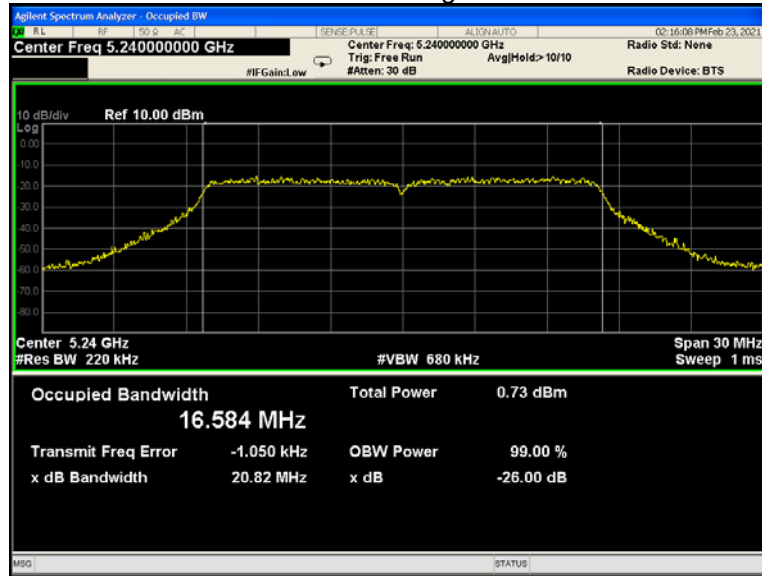


802.11n(HT20) U-NII-1 Low channel

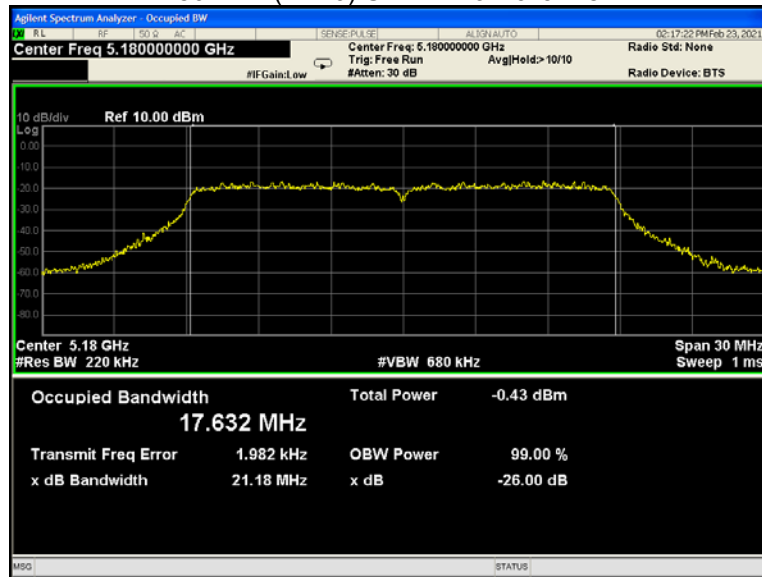


802.11n(HT20) U-NII-1 Middle channel

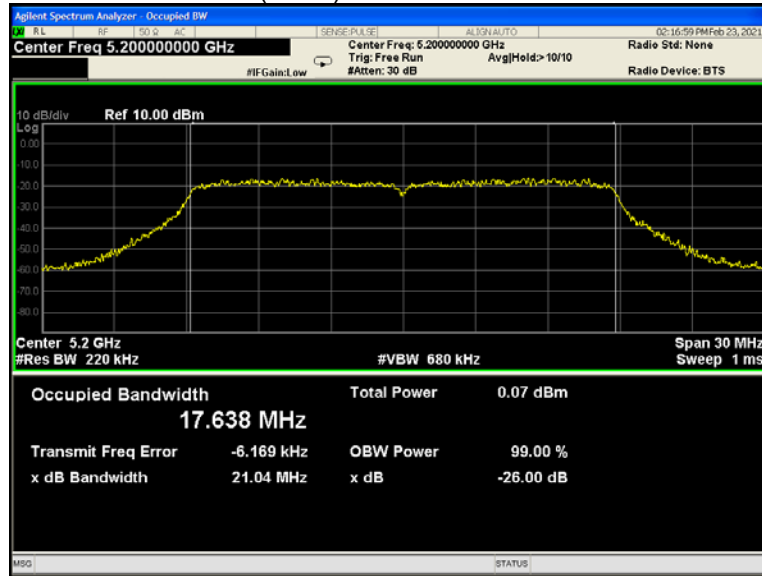


802.11n(HT20) U-NII-1 High channel

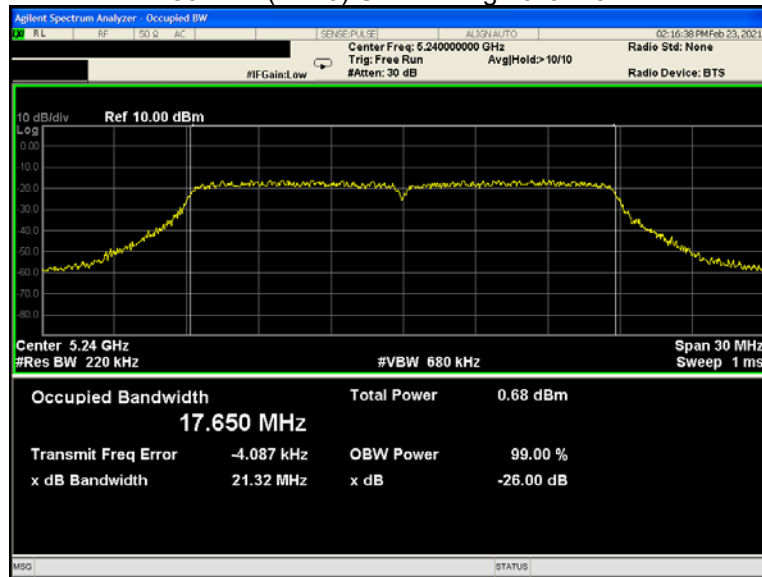

802.11n(HT40) U-NII-1 Low channel

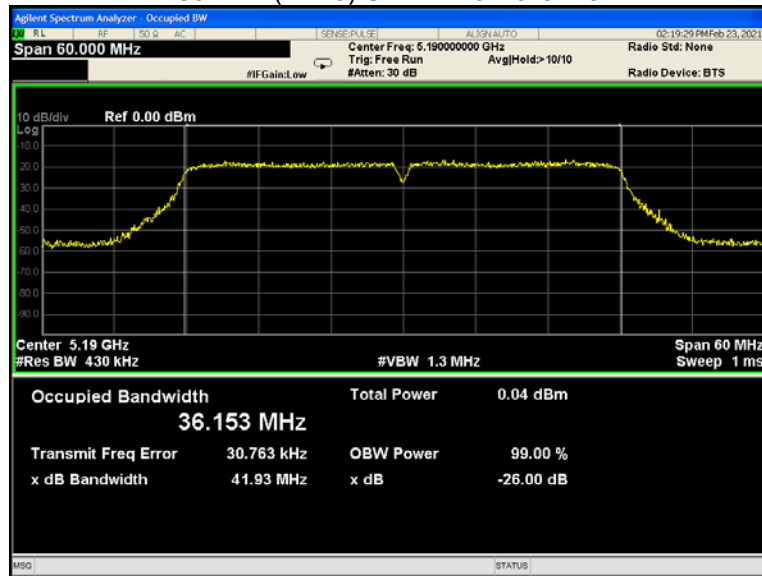


802.11n(HT40) U-NII-1 High channel

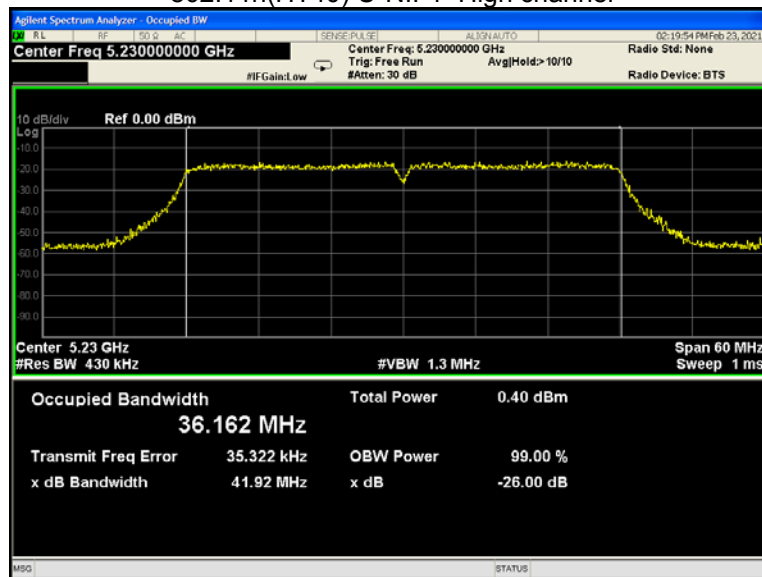





802.11ac(HT20) U-NII-1 Low channel

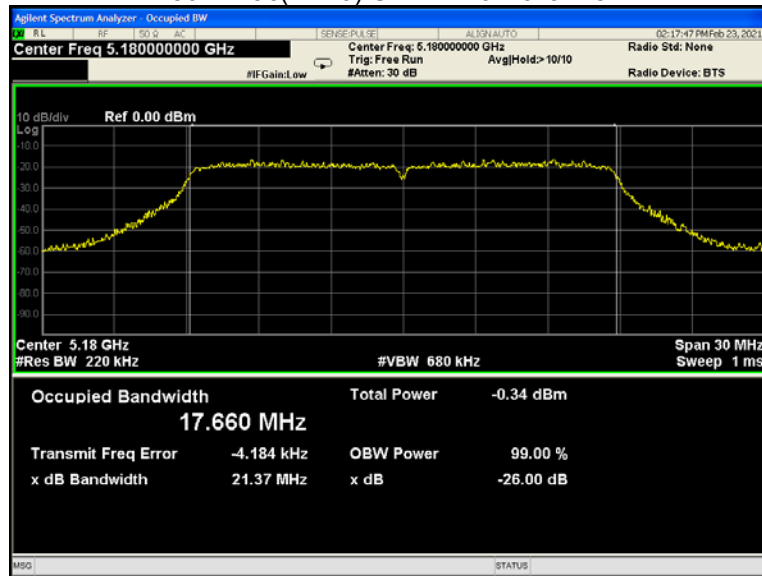


802.11ac(HT20) U-NII-1 Middle channel

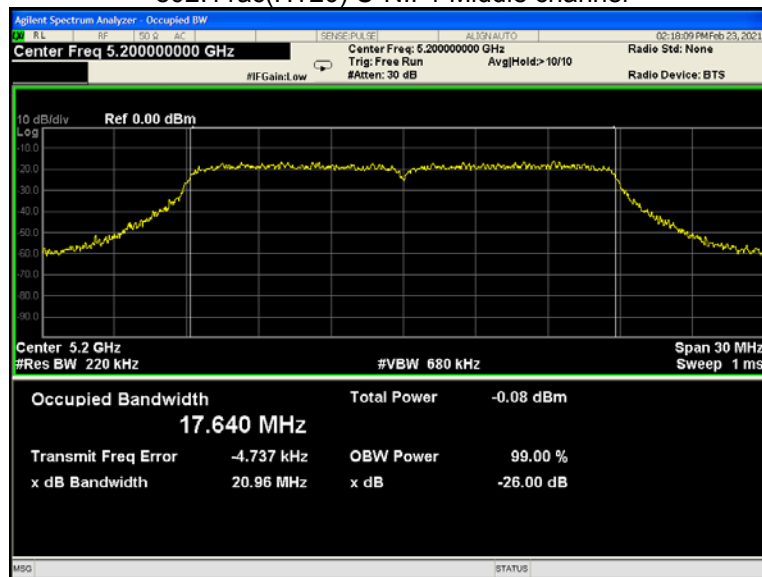


802.11ac(HT20) U-NII-1 High channel

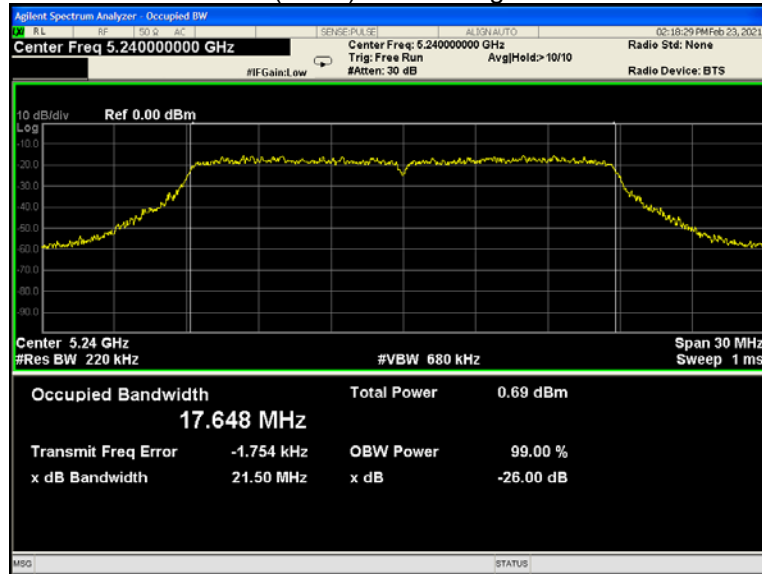


802.11ac(HT40) U-NII-1 Low channel

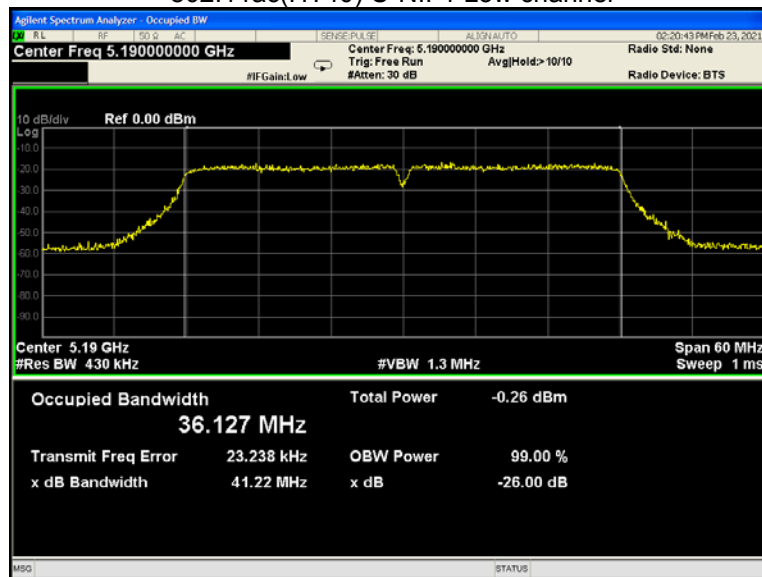


802.11 ac(HT40) U-NII-1 High channel

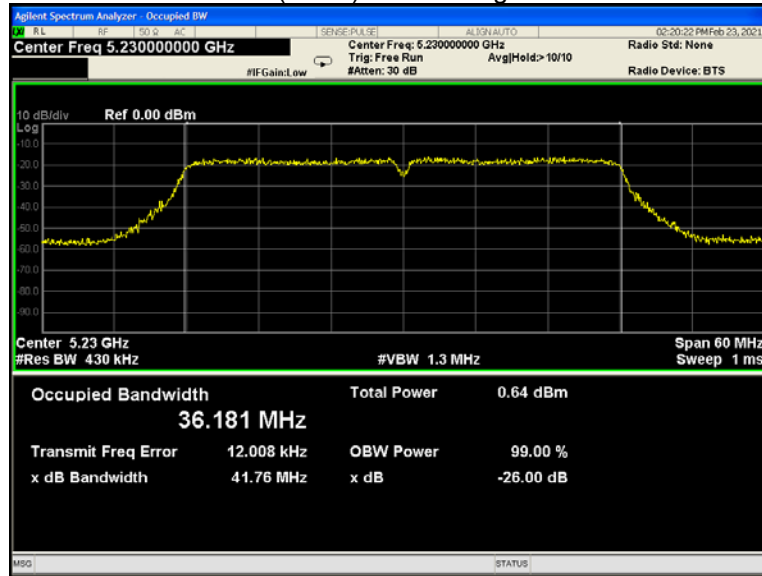


802.11ac(HT80) U-NII-1 Low channel

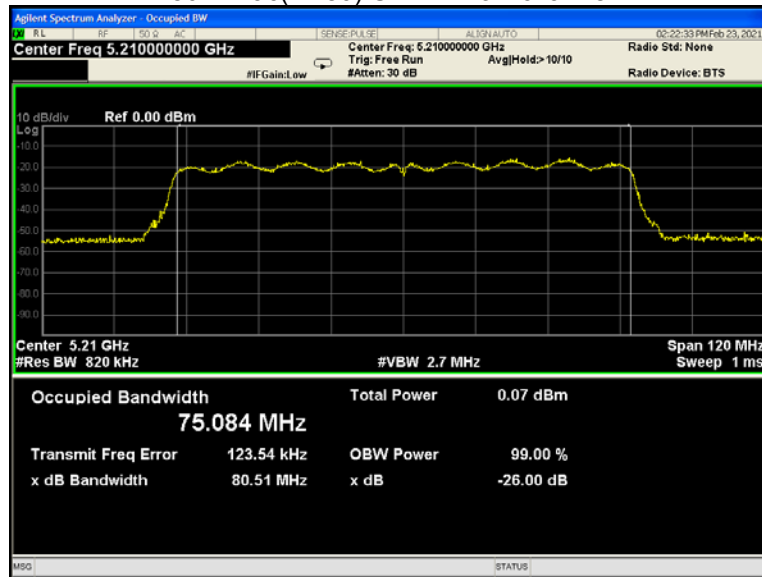


802.11a U-NII-3 Low channel

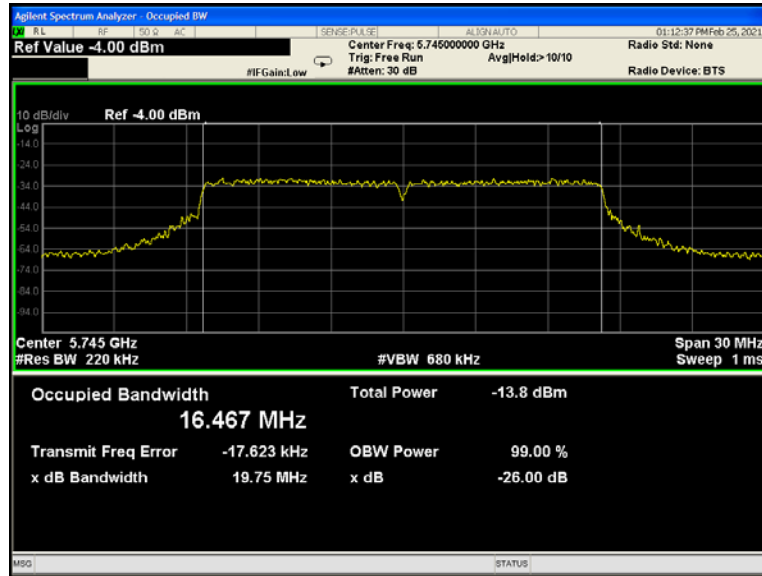


802.11a U-NII-3 Middle channel

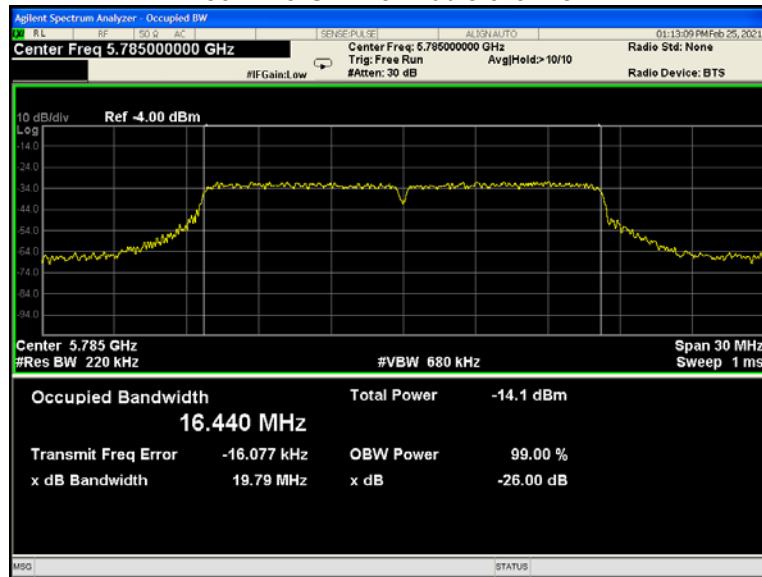


802.11a U-NII-3 High channel

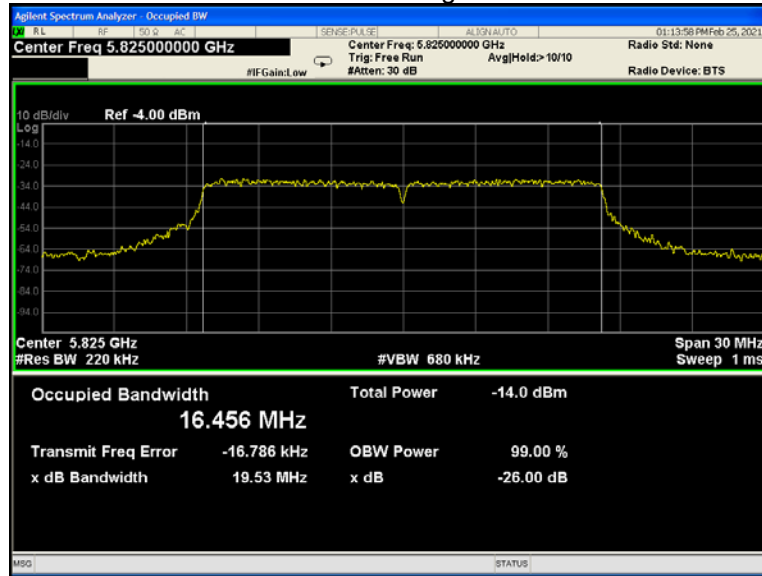


802.11n(HT20) U-NII-3 Low channel

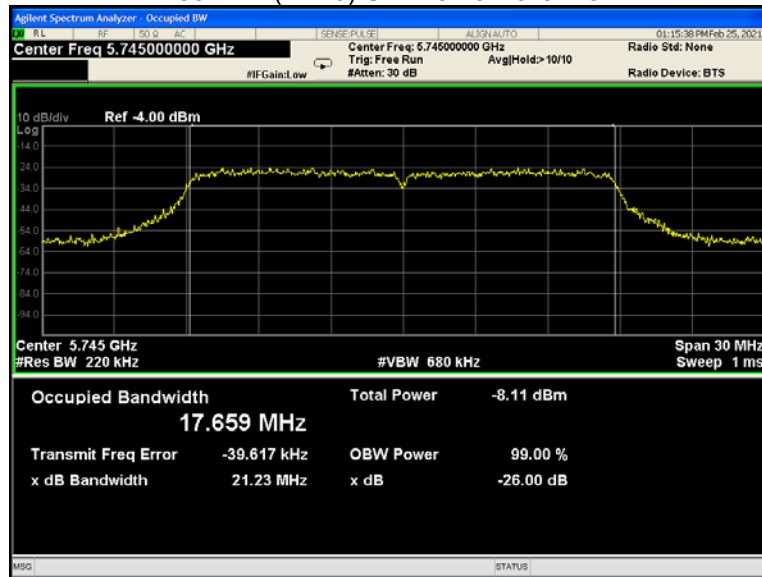


802.11n(HT20) U-NII-3 Middle channel

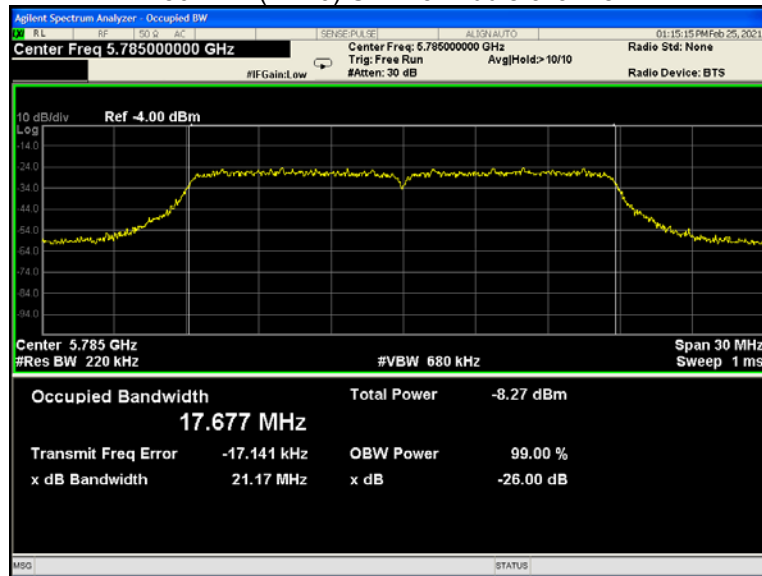


802.11n(HT20) U-NII-3 High channel

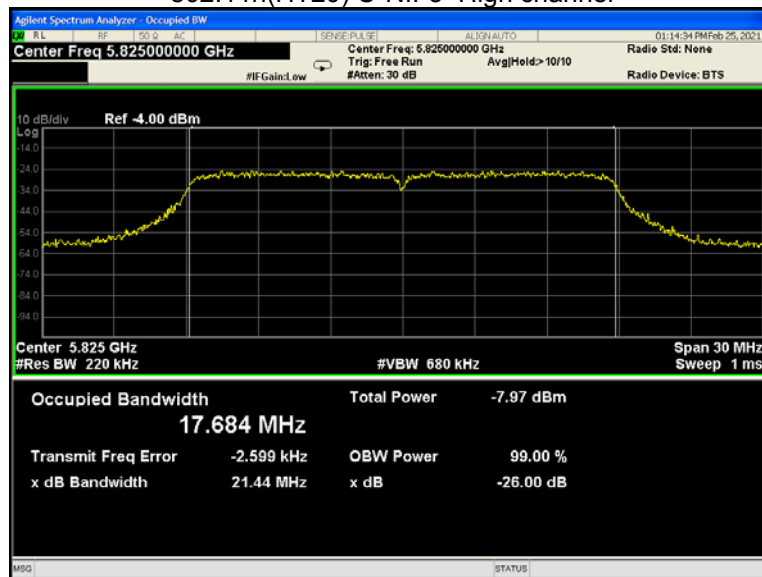


802.11n(HT40) U-NII-3 Low channel

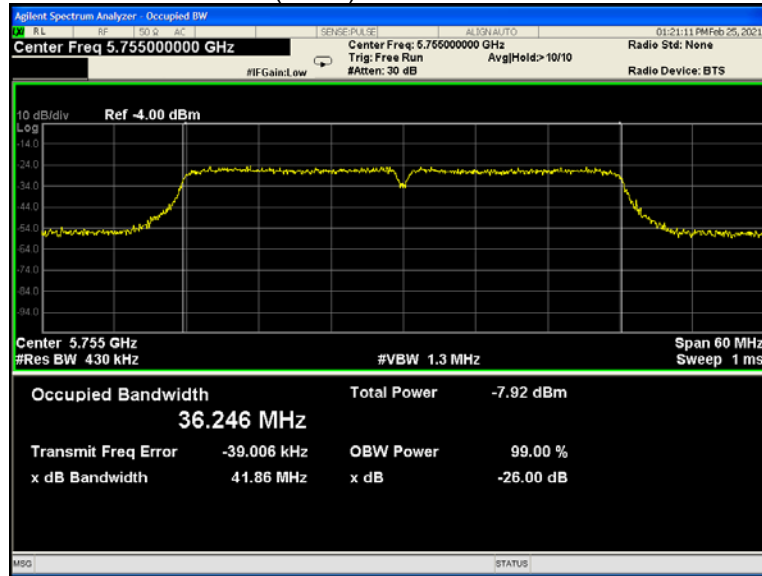


802.11n(HT40) U-NII-3 High channel

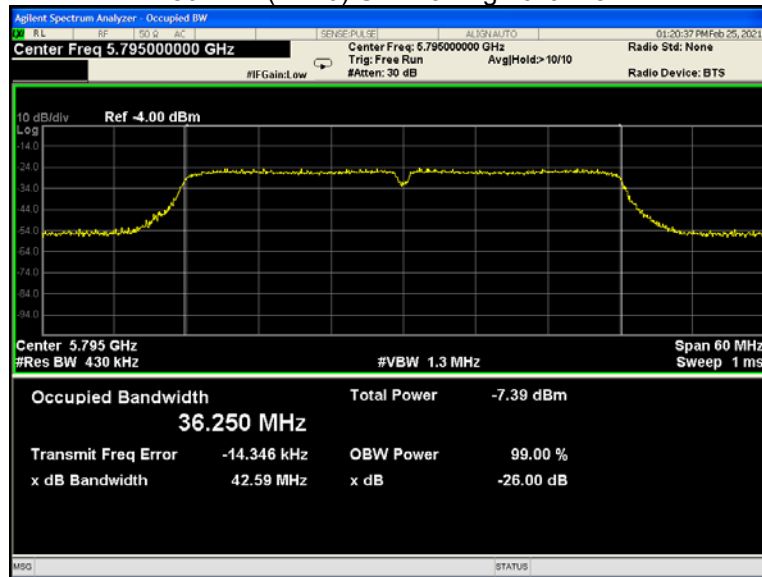

802.11ac(HT20) U-NII-3 Low channel

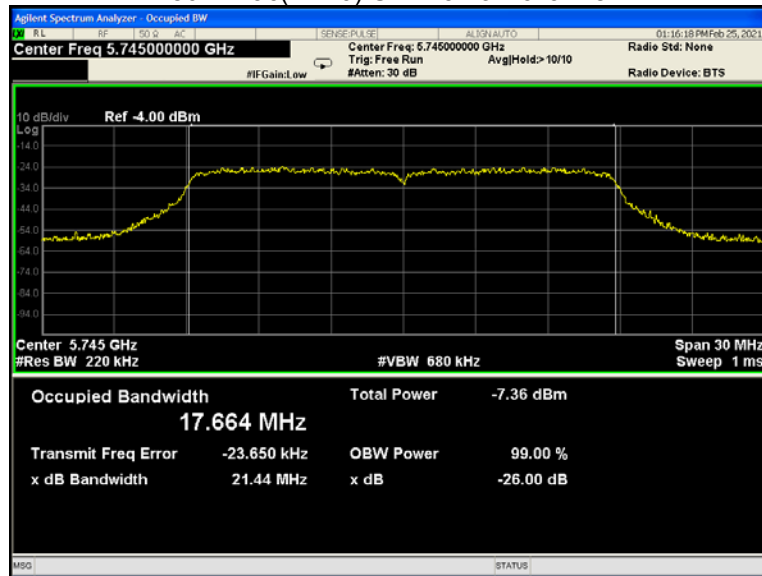


802.11ac(HT20) U-NII-3 Middle channel

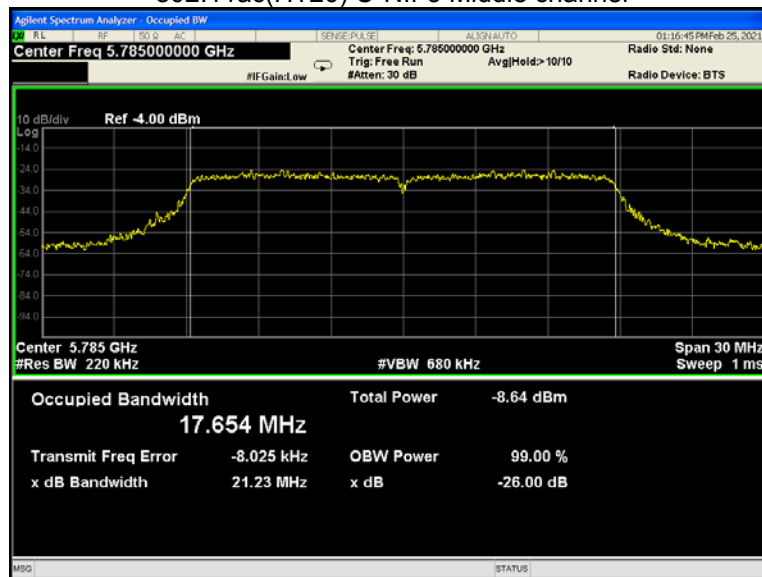





802.11ac(HT20) U-NII-3 High channel

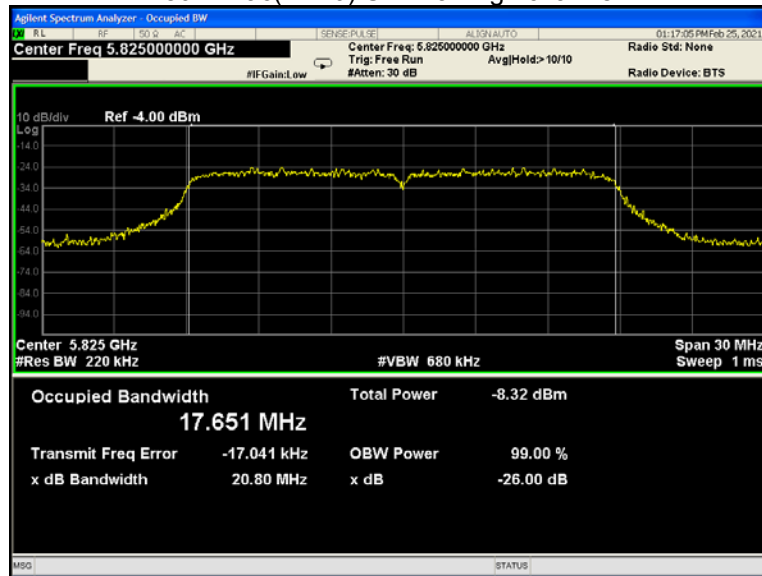


802.11ac(HT40) U-NII-3 Low channel

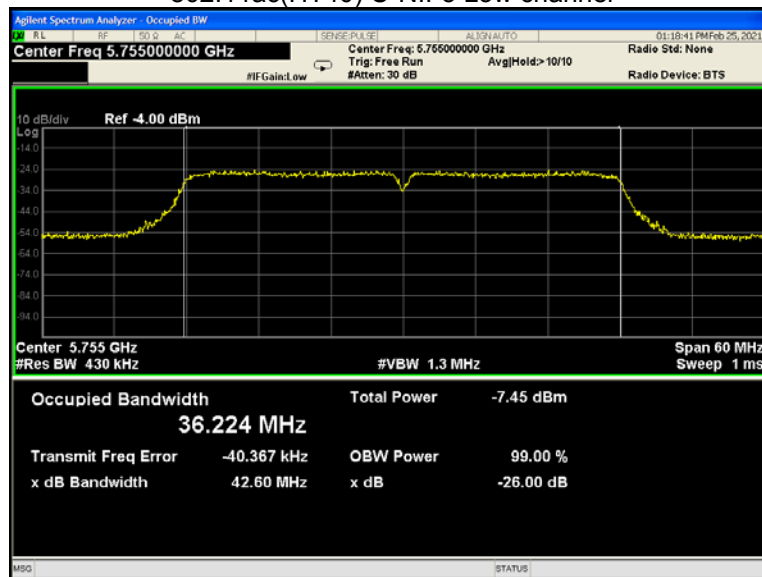

802.11n(HT40) U-NII-3 High channel

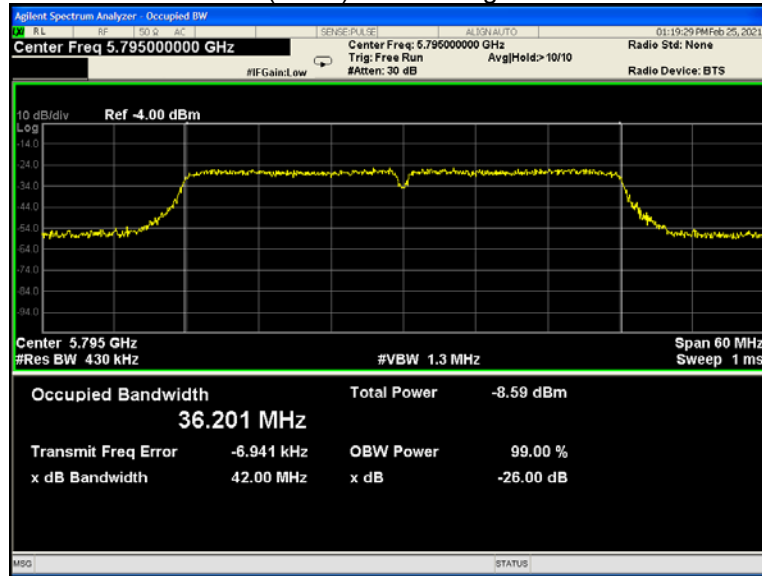

802.11ac(HT80) U-NII-3 Low channel

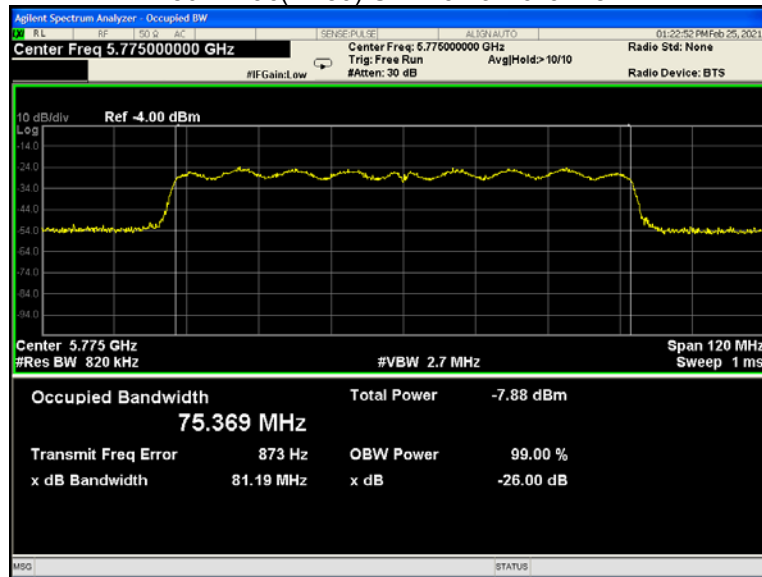

## 12 Conducted Output Power

Test Requirement:	FCC CFR47 Part 15 Section 15.407(a) KDB662911 D01 Multiple Transmitter Output v02r01
Test Method:	KDB789033 D02 General U-NII Test Procedures New Rules v02r01 Section E
Test Limit:	U-NII-1 250mW(24dBm) U-NII-3 1W(30dBm)
Test Result:	PASS Conducted output power= measurement power+10log(1/x)
Remark:	X is duty cycle=1, so 10log(1/1)=0 Conducted output power= measurement power

### 12.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 1 MHz. VBW = 3 MHz. Sweep = auto; Detector Function = Peak, Set the span to fully encompass the DTS bandwidth.
3. Keep the EUT in transmitting at lowest, medium and highest channel individually. Record the max value.


### 12.2 Test Result

Band	Operation mode	Conducted Output Power (dBm)		
		Low	Middle	High
U-NII-1	802.11a	15.71	15.50	15.76
	802.11n(HT20)	15.67	15.70	15.48
	802.11n(HT40)	16.50	/	16.19
	802.11ac(HT20)	15.76	15.38	15.33
	802.11ac(HT40)	16.03	/	15.59
	802.11ac(HT80)	<b>16.53</b>	/	/
U-NII-3	802.11a	<b>10.66</b>	9.96	9.64
	802.11n(HT20)	10.38	9.49	9.48
	802.11n(HT40)	10.29	/	9.58
	802.11ac(HT20)	10.15	9.64	9.57
	802.11ac(HT40)	10.18	/	9.80
	802.11ac(HT80)	9.96	/	/


\* All transmit signals are completely uncorrelated with each other, Directional gain =  $G_{ANT}$  which is less than 6dBi. So the limit does not be reduced.

Test result plots shown as follows:


802.11a U-NII-1 Low channel

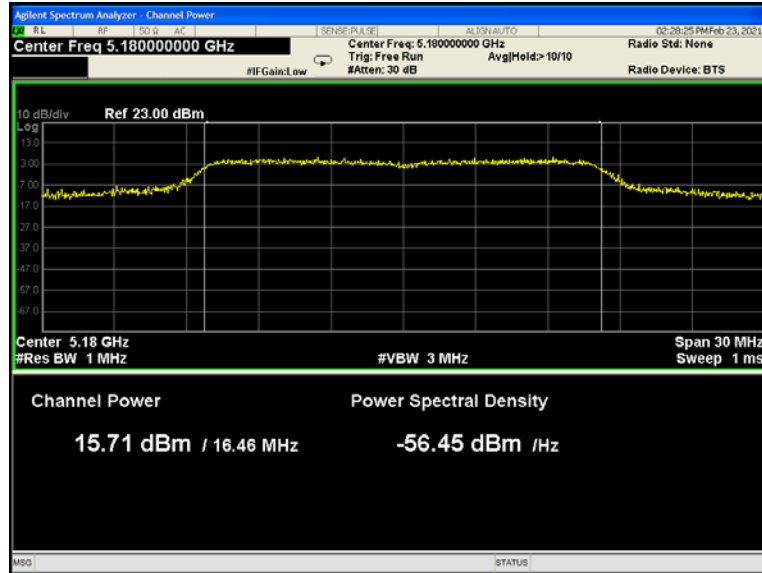

802.11a U-NII-1 Middle channel

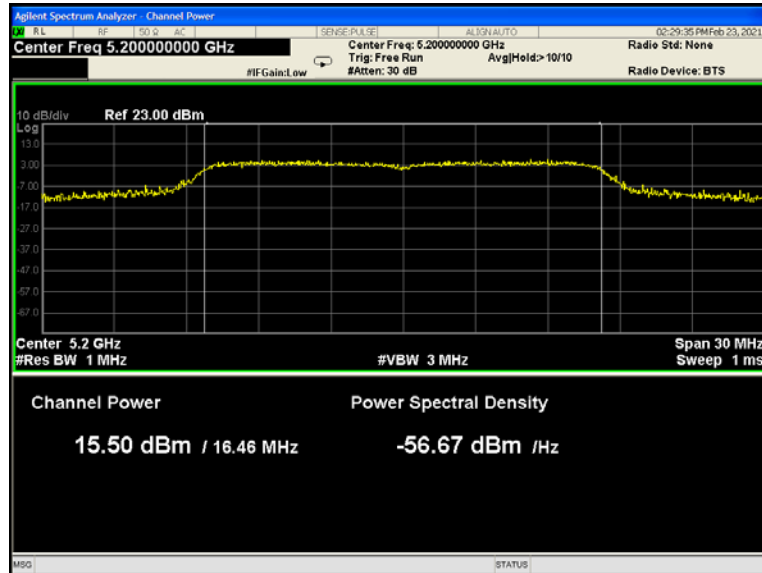

### 802.11a U-NII-1 High channel

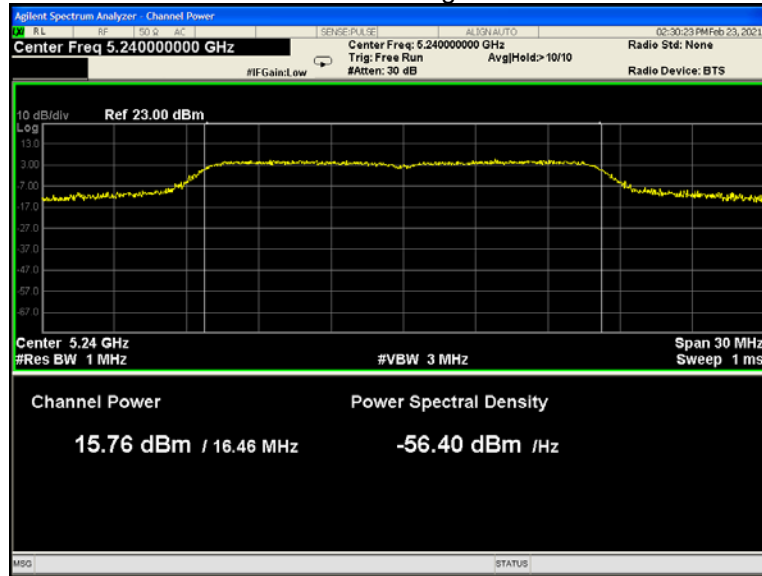

### 802.11n(HT20) U-NII-1 Low channel

