

**ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT  
INTENTIONAL RADIATOR CERTIFICATION TO  
FCC PART 15 SUBPART C REQUIREMENT**

*OF*

**Goji play**

**MODEL No.: MAB0726H**

**BRAND NAME: Blue Goji**

**FCC ID: 2AADEMAB0726H**

**REPORT NO: KAD130517053E**

**ISSUE DATE: June 06, 2013**

*Prepared for*

**BLUE GOJI CORP.**

**2933 Bunker Hill Lane Suite 100 Santa Clara, CA 95054, USA**

*Prepared by*

**DONGGUAN EMTEK CO., LTD.**

**No.281, Guantai Road, Nancheng District,  
Dongguan, Guangdong, China**

**TEL: 86-769-22807078**

**FAX: 86-769-22807079**

## VERIFICATION OF COMPLIANCE

Applicant:	BLUE GOJI CORP. 2933 Bunker Hill Lane Suite 100 Santa Clara, CA 95054, USA
Manufacturer:	BLUE GOJI CORP. 2933 Bunker Hill Lane Suite 100 Santa Clara, CA 95054, USA
Product Description:	Goji play
Brand Name:	Blue Goji
Model Number:	MAB0726H
Serial Number:	N/A
File Number:	KAD130517053E
Date of Test:	May 17, 2013 to June 06, 2013

### We hereby certify that:

The above equipment was tested by DONGGUAN EMTEK CO., LTD. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4 (2009) and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 15.247.

The test results of this report relate only to the tested sample identified in this report.

**Approved By**



**Sam Lv / Q.A. Manager**  
**DONGGUAN EMTEK CO., LTD.**

## Table of Contents

<b>1. GENERAL INFORMATION .....</b>	<b>5</b>
1.1 PRODUCT DESCRIPTION.....	5
1.2 RELATED SUBMITTAL(S) / GRANT (S).....	5
1.3 TEST METHODOLOGY .....	5
1.4 SPECIAL ACCESSORIES.....	5
1.5 EQUIPMENT MODIFICATIONS .....	5
1.6 TEST FACILITY .....	6
<b>2. SYSTEM TEST CONFIGURATION .....</b>	<b>7</b>
2.1 EUT CONFIGURATION.....	7
2.2 EUT EXERCISE .....	7
2.3 TEST PROCEDURE .....	7
2.4 LIMITATION .....	7
2.5 CONFIGURATION OF TESTED SYSTEM .....	11
<b>3. SUMMARY OF TEST RESULTS.....</b>	<b>12</b>
<b>4. DESCRIPTION OF TEST MODES.....</b>	<b>12</b>
<b>5. CONDUCTED EMISSIONS TEST .....</b>	<b>13</b>
5.1 MEASUREMENT PROCEDURE: .....	13
5.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	13
5.3 MEASUREMENT EQUIPMENT USED:.....	13
5.4 MEASUREMENT RESULT: .....	13
5.5 CONDUCTED MEASUREMENT PHOTOS: .....	13
<b>6. RADIATED EMISSION TEST .....</b>	<b>14</b>
6.1 MEASUREMENT PROCEDURE .....	14
6.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	15
6.3 MEASUREMENT EQUIPMENT USED:.....	16
6.4 MEASUREMENT RESULT.....	16
6.5 RADIATED MEASUREMENT PHOTOS: .....	23
<b>7. CHANNEL SEPARATION TEST .....</b>	<b>24</b>
7.1 MEASUREMENT PROCEDURE .....	24
7.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	24
7.3 MEASUREMENT EQUIPMENT USED:.....	24
7.4 MEASUREMENT RESULTS:.....	24
<b>8. 20DB BANDWIDTH TEST .....</b>	<b>27</b>
8.1 MEASUREMENT PROCEDURE .....	27
8.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	27
8.3 MEASUREMENT EQUIPMENT USED:.....	27
8.4 MEASUREMENT RESULTS:.....	27

<b>9.</b>	<b>QUANTITY OF HOPPING CHANNEL TEST .....</b>	<b>30</b>
9.1	MEASUREMENT PROCEDURE .....	30
9.2	TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	30
9.3	MEASUREMENT EQUIPMENT USED:.....	30
9.4	MEASUREMENT RESULTS:.....	30
<b>10.</b>	<b>TIME OF OCCUPANCY (DWELL TIME) TEST .....</b>	<b>31</b>
10.1	TEST DESCRIPTION.....	31
10.2	TEST REQUIREMENTS / LIMITS .....	31
10.3	TEST PROTOCOL .....	31
10.4	TEST RESULT: DWELL TIME .....	31
<b>11.</b>	<b>MAXIMUM PEAK OUTPUT POWER TEST .....</b>	<b>33</b>
11.1	MEASUREMENT PROCEDURE .....	33
11.2	TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) .....	33
11.3	MEASUREMENT EQUIPMENT USED:.....	33
11.4	MEASUREMENT RESULTS: .....	33
<b>12.</b>	<b>BAND EDGE TEST .....</b>	<b>36</b>
12.1	MEASUREMENT PROCEDURE .....	36
12.2	TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) .....	36
12.3	MEASUREMENT EQUIPMENT USED:.....	36
12.4	MEASUREMENT RESULTS: .....	36
<b>13.</b>	<b>ANTENNA APPLICATION .....</b>	<b>38</b>
13.1	ANTENNA REQUIREMENT .....	38
13.2	RESULT.....	38
<b>14.</b>	<b>RF EXPOSURE EVALUATION.....</b>	<b>39</b>
14.1	FRIIS TRANSMISSION FORMULA: $P_D=(P_{OUT}*G)/(4*\pi*R^2)$ .....	39
14.2	RESULT.....	39

APPENDIX I (PHOTOS OF EUT) (5PAGES)

## **1. GENERAL INFORMATION**

### **1.1 Product Description**

The BLUE GOJI CORP. Model: MAB0726H (referred to as the EUT in this report) The EUT is a short range, lower power, designed as an Input Device. It is designed by way of utilizing the GFSK modulation achieves the system operating.

A major technical descriptions of EUT is described as following:

- A). Operation Frequency: 2410-2470MHz
- B). Modulation: MSK
- C). Number of Channel: 75
- D). Channel space: 810.9KHz
- E). Antenna Type: single-ended monopole PCB antenna
- F). Antenna GAIN: 0dBi
- G). Power Supply: DC 1.8-3.6V

### **1.2 Related Submittal(s) / Grant (s)**

This submittal(s) (test report) is intended for FCC ID: 2AADEMAB0726H filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules.

### **1.3 Test Methodology**

Both conducted and radiated testing were performed according to the procedures in ANSI C63.4 (2009). Radiated testing was performed at an antenna to EUT distance 3 meters.

### **1.4 Special Accessories**

Not available for this EUT intended for grant.

### **1.5 Equipment Modifications**

Not available for this EUT intended for grant.

## 1.6 Test Facility

### Site Description

EMC Lab. : Accredited by FCC, Aug. 18, 2011  
The Certificate Number is 247565.

Accredited by Industry Canada, January 13, 2011  
The Certificate Registration Number. is 46405-9444

Name of Firm : DONGGUAN EMTEK CO., LTD.

Site Location : No.281, Guantai Road, Nancheng District,  
Dongguan, Guangdong, China

## 2. System Test Configuration

### 2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

### 2.2 EUT Exercise

The Transmitter was operated in the normal operating mode. the Tx frequency was fixed which was for the purpose of the measurements.

### 2.3 Test Procedure

#### 2.3.1 Conducted Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4-2009. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-Peak and average detector mode.

#### 2.3.2 Radiated Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plane. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter(EUT) was rotated through three orthogonal axes according to the requirements in Section 13.1.4.1 of ANSI C63.4-2009.

### 2.4 Limitation

#### (1) Channel Separation test

FCC Part 15, Subpart C Section 15.247(a)(1). Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25kHz or the 20 Bandwidth of the hopping channel, whichever is greater.

Frequency Range (MHz)	Limit(kHz)
902-928	>25kHz
2400-2483.5	>25kHz
5725-5850	>25kHz

## (2) 20dB Bandwidth

Frequency Range(MHz)	Quantity of Hopping Channel	Limit(kHz)			
		50	25	15	75
902-928		<250	>250	NA	NA
2400-2483.5		NA	NA	>1000	<1000

## (3) Quantity of Hopping Channel

FCC Part 15, Subpart C Section 15.247

Frequency Range (MHz)	Limit(Quantity of Hopping Channel)			
	20dB bandwidth <250kHz	20dB bandwidth >250kHz	20dB bandwidth <1MHz	20dB bandwidth >1MHz
902-928	50	25	NA	NA
2400-2483.5	NA	NA	15	15
5725-5850	NA	NA	75	NA

## (4) Time of Occupancy(Dwell Time)

FCC Part 15, Subpart C Section 15.247

Frequency Range (MHz)	LIMIT(rms)		
	20dB bandwidth <250kHz(50Channel)	20dB bandwidth >250kHz(25Channel)	20dB bandwidth <1MHz(75Channel)
902-928	400(20S)	400(10S)	NA
2400-2483.5	NA	NA	400(30S)
5725-5850	NA	NA	400(30S)

**Note:** The “( )” is all channel's average time of occupancy.

## (5) Maximum Peak Output Power

FCC Part 15, Subpart C Section 15.247

Frequency Range (MHz)	Quantity of Hopping Channel	LIMIT(W)			
		50	25	15	75
902-928		1(30dBm)	0.125(21dBm)	NA	NA
2400-2483.5		NA	NA	0.125(21dBm)	1(30dBm)
5725-5850		NA	NA	NA	1(30dBm)



## (6) Band edge

FCC Part15, Subpart C Section 15.247, In any 100kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, attenuation below the general limits specified in section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in section 15.205(a), must also comply with the radiated emission limits specified in section 15.209(a).

Operating Frequency Range(MHz)	Spurious emission frequency	Peak power ratio to emission(dBc)	Limit Emission level(dBuV/m)
902-928	<902	>20	NA
	>928	>20	NA
	960-1240	NA	54
2400-2483.5	<2400	>20	NA
	>2483.5-2500	NA	54
5725-5850	<5350-5460	NA	54
	<5725	>20	NA
	>5850	>20	NA

## (7) Conducted Emission

Frequency(MHz)	Quasi-peak	Average
0.15-0.5	66-56	56-46
0.5-5.0	56	46
5.0-30.0	60	50

### Note:

1. The lower limit shall apply at the transition frequencies
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

## (8) Radiated Emission

FCC Part 15, Subpart C Section 15.209 limit of radiated emission for frequency below 1000GHz. The emissions from an intentional radiator shall not exceed the field strength level specified in the following table:

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3

Harmonic emissions limits comply with below 54 dBuV/m at 3m. Other emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or comply with the radiated emissions limits specified in section 15.209(a) limit in the table below has to be followed.

Note:

(1) The tighter limit applies at the band edges.

(2) Emission level (dBuV/m)=20log Emission level (uV/m).

## FCC Part 15, Section 15.35(b) limit of radiated emission for frequency above 1000MHz

Frequency(MHz)	Class A(dBμV/m)(at 3m)		Class B(dBμV/m)(at 3m)	
	PEAK	AVERAGE	PEAK	AVERAGE
Above 1000	80.0	60.0	74.0	54.0

FCC Part 15, Subpart C Section 15.249. The field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Frequency(MHz)	Filed Strength of Fundamental(at 3m)		Filed Strength of Harmonics(at 3m)	
	PEAK	AVERAGE	PEAK	AVERAGE
902-928	114	94	74.0	54.0
2400-2483.5	114	94	74.0	54.0
5725-5875	114	94	74.0	54.0
24000-24250	128	108	88.0	68.0

## FCC Part15 (15.249) , Subpart C

Limit	Frequency Range (MHz)
Field strength of fundamental 50000uV/m (94 dBV/m) @ 3 m	2400-2483.5
Field strength of harmonics 500uV/m (54 dBV/m) @ 3 m	Above 2483.5

## 2.5 Configuration of Tested System

**Fig. 2-1 Configuration of Tested System**



**Table 2-1 Equipment Used in Tested System**

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.	Note
1.	Goji play	N/A	MAB0726H	2AADEMAB0726H	N/A	<b>EUT</b>

**Note:**

- (1) Unless otherwise denoted as EUT in 『Remark』 column , device(s) used in tested system is a support equipment.
- (2) Three orthogonal panels X, Y, Z of EUT are tested. And the test result of the EUT's combinations.

### 3. Summary of Test Results

FCC Rules	Description Of Test	Result
§15.247(a)(1)	Channel Separation test	Compliant
§15.247(a)(1)	20dB Bandwidth	Compliant
§15.247(a)(1)(iii)	Quantity of Hopping Channel	Compliant
§15.247(a)(1)(iii)	Time of Occupancy(Dwell Time)	Compliant
§15.247(b)	Max Peak output Power test	Compliant
§15.247(d)	Band edge test	Compliant
§15.207	AC Power Conducted Emission	N/A
§15.247(d),§15.209	Radiated Emission	Compliant
§15.203	Antenna Requirement	Compliant

### 4. Description of test modes

The EUT (MAB0726H) has been tested under normal operating condition.

This EUT is a FHSS system, we use blue test to control the EUT with parallel port, Let EUT hopping on and transmit at every channel with highest power, Only output power use conducted method, others are using radiated method. After sirfdemo 330R1 send the command to EUT, it can be removed, and the EUT keep hopping. 75 Channels are provided by EUT. The 3 channels of lower, medium and higher were chosen for test.


Channel	Frequency(MHz)
1	2410
40	2441
75	2470

## 5. Conducted Emissions Test

### 5.1 Measurement Procedure:

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured was complete.

### 5.2 Test SET-UP (Block Diagram of Configuration)

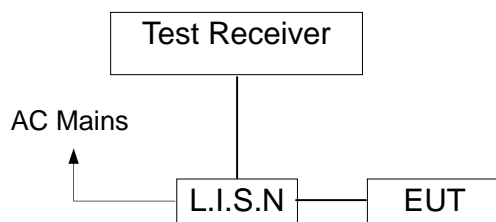

### 5.3 Measurement Equipment Used:

Conducted Emission Test Site # 4					
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Test Receiver	Rohde & Schwarz	ESCS30	100018	05/03/2013	05/23/2014
L.I.S.N	Rohde & Schwarz	ENV216	100017	05/25/2013	05/25/2014
RF Switching Unit	CDS	RSU-M2	38401	05/25/2013	05/25/2014

### 5.4 Measurement Result:

N/A.

### 5.5 Conducted Measurement Photos:

N/A.


## **6. Radiated Emission Test**

### **6.1 Measurement Procedure**


1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measured were complete.

## 6.2 Test SET-UP (Block Diagram of Configuration)


(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

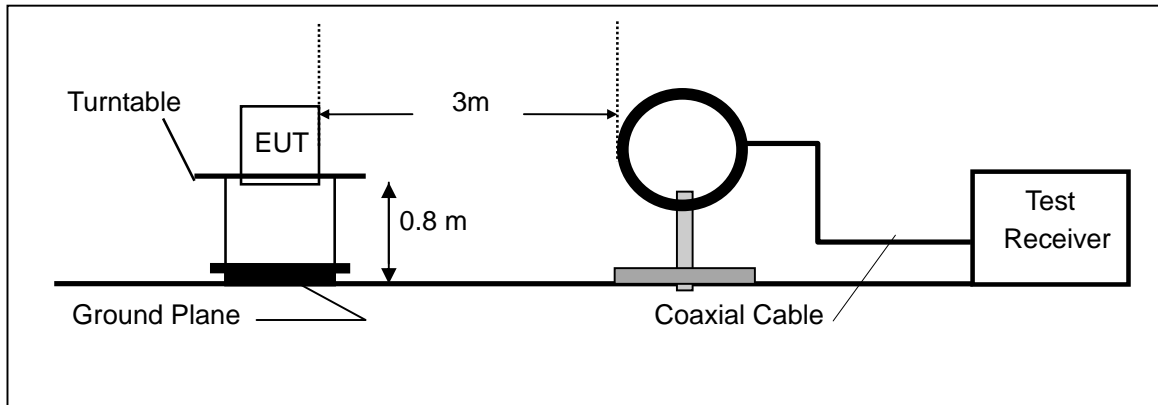

(B) Radiated Emission Test Set-Up, Frequency Below 1000MHz

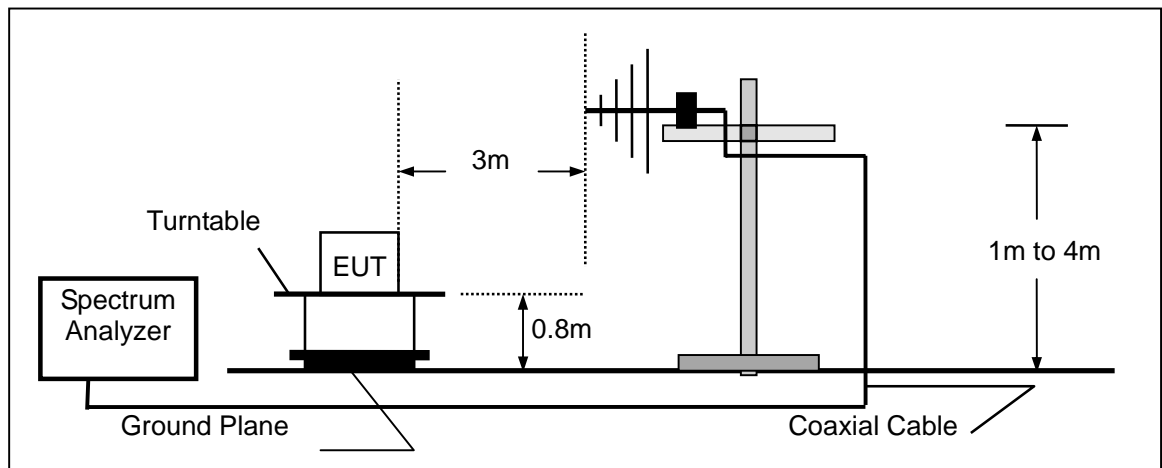

(C) Radiated Emission Test Set-Up, Frequency above 1000MHz

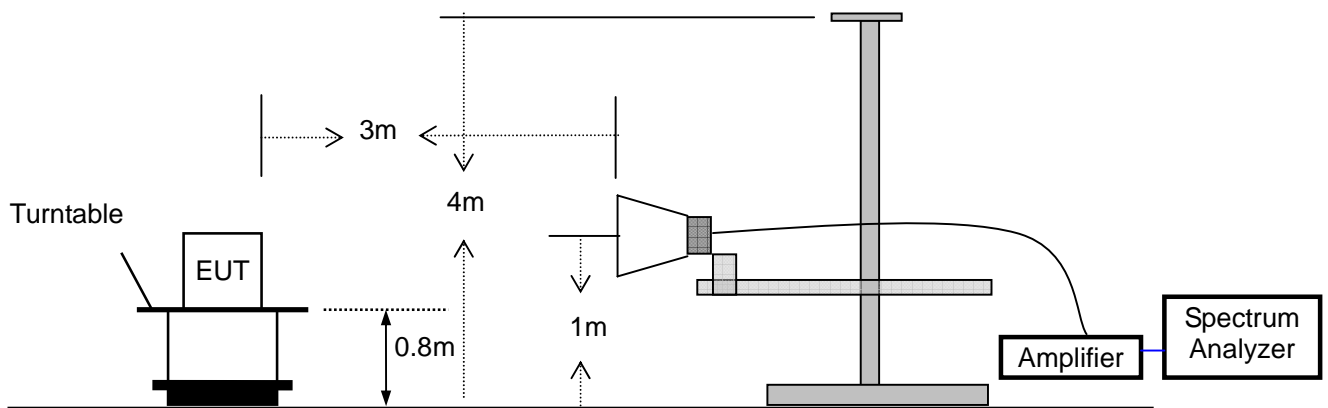

### 6.3 Measurement Equipment Used:

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
EMI Test Receiver	Rohde & Schwarz	ESU	1302.6005.26	06/15/2013	06/15/2014
Pre-Amplifier	HP	8447D	2944A07999	06/02/2013	06/02/2014
Bilog Antenna	Schwarzbeck	VULB9163	142	06/03/2013	06/03/2014
Loop Antenna	ARA	PLA-1030/B	1029	06/03/2013	06/03/2014
Horn Antenna	Schwarzbeck	BBHA9170	BBHA9170399	06/04/2013	06/04/2014
Horn Antenna	Schwarzbeck	BBHA 9120	D143	06/04/2013	06/04/2014
Cable	Schwarzbeck	AK9513	ACRX1	06/15/2013	06/15/2014
Cable	Schwarzbeck	N/A	FP2RX2	06/15/2013	06/15/2014
Cable	Schwarzbeck	AK9513	CRPX1	06/15/2013	06/15/2014
Cable	Schwarzbeck	AK9513	CRRX2	06/15/2013	06/15/2014

### 6.4 Measurement Result

Operation Mode: TX                      Test Date : June 2, 2013  
Frequency Range: 9KHz~30MHz      Temperature : 28℃  
Test Result: PASS                      Humidity : 65 %  
Measured Distance: 3m                Test By: WOLF

Freq.	Ant.Pol.	Emission Level	Limit 3m	Over
(MHz)	H/V	(dBuV/m)	(dBuV/m)	(dB)
--	--	--	--	--

Note: the amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.



Operation Mode: TX Mode (CH1: 2410MHz) Test Date : June 01, 2013  
Frequency Range: 30~1000MHz Temperature : 22 °C  
Test Result: PASS Humidity : 50 %  
Measured 3m Test By: Andy  
Distance:

Freq. (MHz)	Ant.Pol. H/V	Emission Level (dBuV/m)	Limit 3m (dBuV/m)	Margin (dB)	Note
32.910	V	22.93	40.00	-17.07	PK
36.790	V	22.21	40.00	-17.79	PK
41.640	V	17.52	40.00	-22.48	PK
55.220	V	13.83	40.00	-26.17	PK
102.750	V	13.75	43.50	-29.75	PK
118.270	V	12.53	43.50	-30.97	PK
45.520	H	15.07	40.00	-24.93	PK
59.100	H	13.25	40.00	-26.75	PK
67.830	H	14.01	40.00	-25.99	PK
91.110	H	13.10	43.50	-30.40	PK
98.870	H	14.09	43.50	-29.41	PK
108.570	H	12.72	43.50	-30.78	PK

**Note:** (1) All Readings are Peak Value.  
(2) Emission Level= Reading Level+Probe Factor +Cable Loss  
(3) The average measurement was not performed when the peak measured data under the limit of average detection.

Operation Mode: TX Mode (CH40: 2441MHz) Test Date : June 01, 2013  
Frequency Range: 30~1000MHz Temperature : 22 °C  
Test Result: PASS Humidity : 50 %  
Measured 3m Test By: Andy  
Distance:

Freq. (MHz)	Ant.Pol. H/V	Emission Level (dBuV/m)	Limit 3m (dBuV/m)	Margin (dB)	Note
32.340	V	22.55	40.00	-17.45	PK
35.770	V	22.54	40.00	-17.46	PK
41.230	V	16.54	40.00	-23.46	PK
55.550	V	13.86	40.00	-26.14	PK
112.350	V	13.78	43.50	-29.72	PK
113.440	V	12.34	43.50	-31.16	PK
44.530	H	13.07	40.00	-26.93	PK
54.320	H	13.75	40.00	-26.25	PK
67.850	H	14.22	40.00	-25.78	PK
93.210	H	13.14	43.50	-30.36	PK
98.330	H	14.56	43.50	-28.94	PK
101.640	H	13.75	43.50	-29.75	PK

**Note:** (1) All Readings are Peak Value.  
(2) Emission Level= Reading Level+Probe Factor +Cable Loss  
(3) The average measurement was not performed when the peak measured data under the limit of average detection.

Operation Mode: TX Mode (CH75: 2470MHz) Test Date : June 01, 2013  
Frequency Range: 30~1000MHz Temperature : 22 °C  
Test Result: PASS Humidity : 50 %  
Measured 3m Test By: Andy  
Distance:

Freq. (MHz)	Ant.Pol. H/V	Emission Level (dBUV/m)	Limit 3m (dBUV/m)	Margin (dB)	Note
32.210	V	22.42	40.00	-17.58	PK
34.590	V	21.21	40.00	-18.79	PK
41.640	V	17.33	40.00	-22.67	PK
55.530	V	12.84	40.00	-27.16	PK
112.440	V	13.33	43.50	-30.17	PK
118.530	V	12.54	43.50	-30.96	PK
45.320	H	15.44	40.00	-24.56	PK
52.140	H	13.23	40.00	-26.77	PK
67.440	H	14.43	40.00	-25.57	PK
91.120	H	12.53	43.50	-30.97	PK
98.120	H	14.55	43.50	-28.95	PK
102.540	H	12.21	43.50	-31.29	PK

**Note:** (1) All Readings are Peak Value.  
(2) Emission Level= Reading Level+Probe Factor +Cable Loss  
(3) The average measurement was not performed when the peak measured data under the limit of average detection.

Operation Mode: TX Mode (CH1: 2410MHz) Test Date : June 01, 2013  
Frequency Range: 1-25GHz Temperature : 22 °C  
Test Result: PASS Humidity : 50 %  
Measured 3m Test By: Andy  
Distance:

Freq. (MHz)	Ant.Pol. H/V	Emission Level (dBUV/m)		Limit 3m(dBUV/m)		Margin(dB)	
		PK	AV	PK	AV	PK	AV
2400	V	60.12	45.33	74	54	-13.88	-8.67
4804	V	52.42	42.44	74	54	-21.58	-11.56
7206	V	53.53	40.22	74	54	-20.47	-13.78
9608	V	49.16	41.25	74	54	-24.84	-12.75
12010	V	52.25	42.32	74	54	-21.75	-11.68
2400	H	62.44	45.13	74	54	-11.56	-8.87
4804	H	54.34	42.27	74	54	-19.66	-11.73
7206	H	52.55	41.32	74	54	-21.45	-12.68
9608	H	56.42	41.53	74	54	-17.58	-12.47
12010	H	52.12	42.32	74	54	-21.88	-11.68

Other harmonics emissions are lower than 20dB below the allowable limit.

**Note:** (1) All Readings are Peak Value and AV.  
(2) Emission Level= Reading Level+ Probe Factor +Cable Loss.  
(3) The average measurement was not performed when the peak measured data under the limit of average detection.

Operation Mode: TX Mode (CH40: 2441MHz) Test Date : June 01, 2013  
Frequency Range: 1-25GHz Temperature : 22 °C  
Test Result: PASS Humidity : 50 %  
Measured 3m Test By: Andy  
Distance:

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Margin(dB)	
		PK	AV	PK	AV	PK	AV
4882	V	61.13	41.23	74	54	-12.87	-12.77
7323	V	52.74	44.34	74	54	-21.26	-9.66
9764	V	51.14	42.32	74	54	-22.86	-11.68
12205	V	56.44	43.54	74	54	-17.56	-10.46
4882	H	62.32	46.42	74	54	-11.68	-7.58
7323	H	55.14	41.74	74	54	-18.86	-12.26
9764	H	54.32	41.23	74	54	-19.68	-12.77
12205	H	52.52	43.54	74	54	-21.48	-10.46

Other harmonics emissions are lower than 20dB below the allowable limit.

**Note:** (1) All Readings are Peak Value and AV.  
(2) Emission Level= Reading Level+Probe Factor +Cable Loss  
(3) The average measurement was not performed when the peak measured data under the limit of average detection.



Operation Mode: TX Mode (CH75: 2470MHz) Test Date : June 01, 2013  
Frequency Range: 1-25GHz Temperature : 22 °C  
Test Result: PASS Humidity : 50 %  
Measured 3m Test By: Andy  
Distance:

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Margin(dB)	
		PK	AV	PK	AV	PK	AV
2483.5	V	61.32	43.54	74	54	-12.68	-10.46
4960	V	53.44	43.55	74	54	-20.56	-10.45
7440	V	55.33	42.34	74	54	-18.67	-11.66
9920	V	51.58	41.25	74	54	-22.42	-12.75
12400	V	55.77	43.45	74	54	-18.23	-10.55
2483.5	H	61.56	45.88	74	54	-12.44	-8.12
4960	H	56.84	40.56	74	54	-17.16	-13.44
7440	H	55.36	40.65	74	54	-18.64	-13.35
9920	H	53.44	44.77	74	54	-20.56	-9.23
12400	H	59.26	43.65	74	54	-14.74	-10.35

**Other harmonics emissions are lower than 20dB below the allowable limit.**

**Note:** (1) All Readings are Peak Value and AV.  
(2) Emission Level= Reading Level+Probe Factor +Cable Loss  
(3) The average measurement was not performed when the peak measured data under the limit of average detection.

## 6.5 Radiated Measurement Photos:

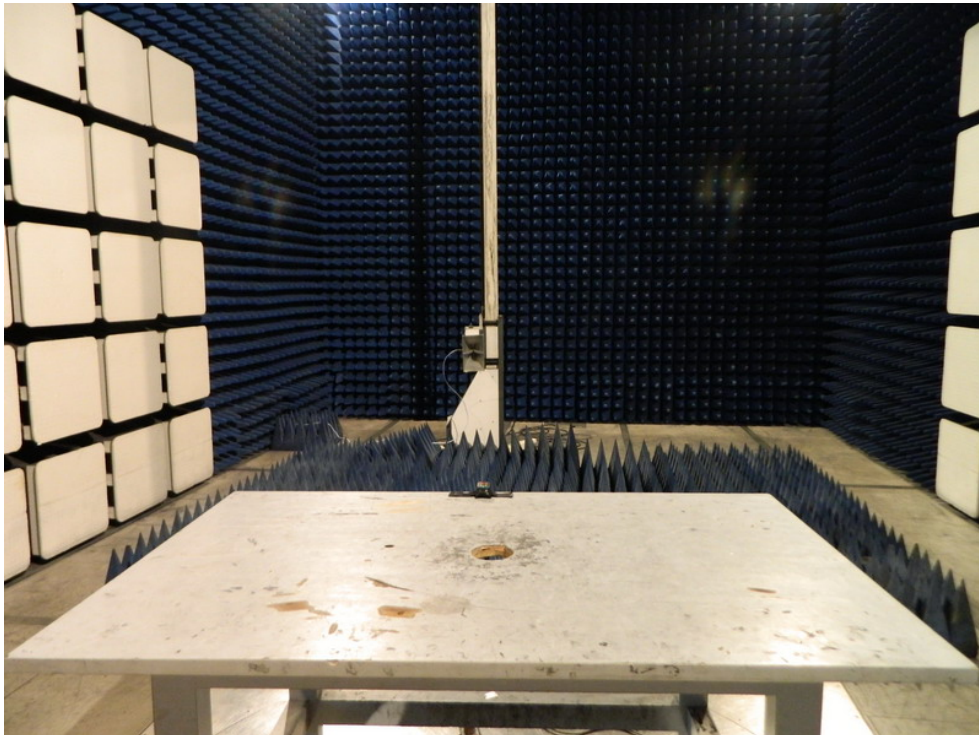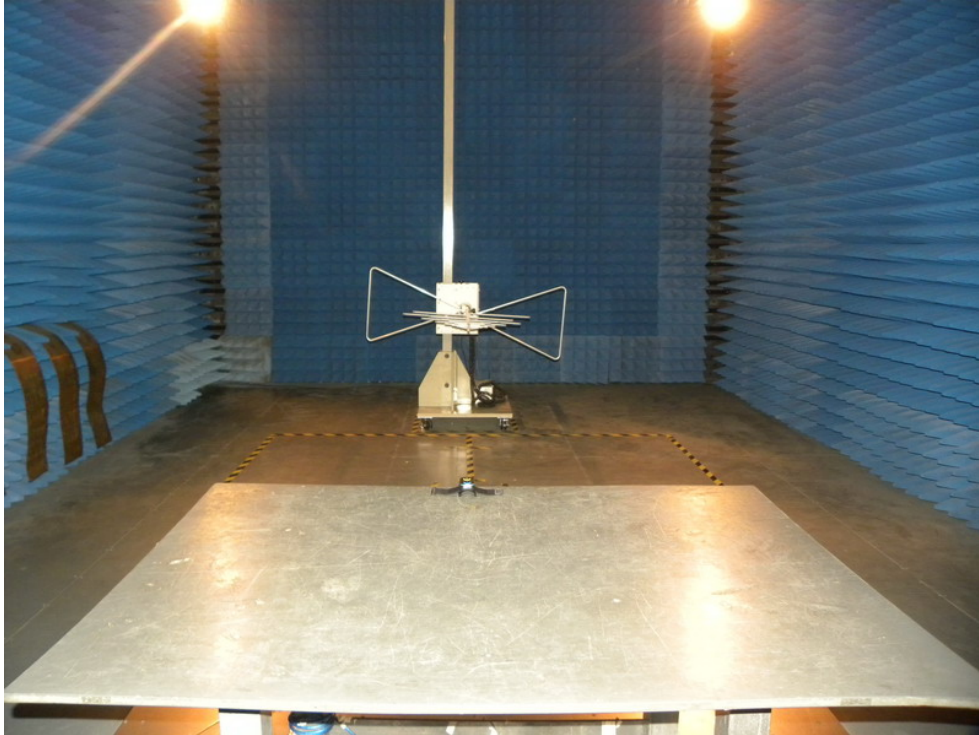




## 7. Channel Separation test

### 7.1 Measurement Procedure

The EUT was operating in hopping mode or could be controlled its channel. Printed out the test result from the spectrum by hard copy function.

### 7.2 Test SET-UP (Block Diagram of Configuration)



### 7.3 Measurement Equipment Used:

Same as 5.3 Radiated Emission Measurement.

### 7.4 Measurement Results:


Refer to attached data chart.

Spectrum Detector:	PK	Test Date :	June 04, 2013
Test By:	Andy	Temperature :	22 °C
Test Result:	PASS	Humidity :	52 %

Channel number	Channel frequency (MHz)	Separation Read Value (KHz)	Separation Limit (KHz)
1	2410	1000	>933.496
40	2441	1000	>937.691
75	2470	1000	>937.690




## CH1 2410

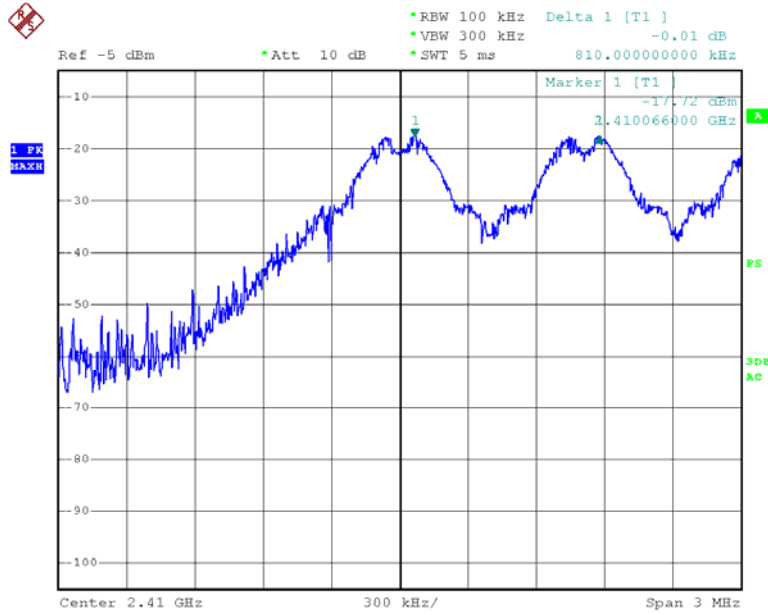


Date: 4.JUN.2013 19:19:22

## CH40 2441

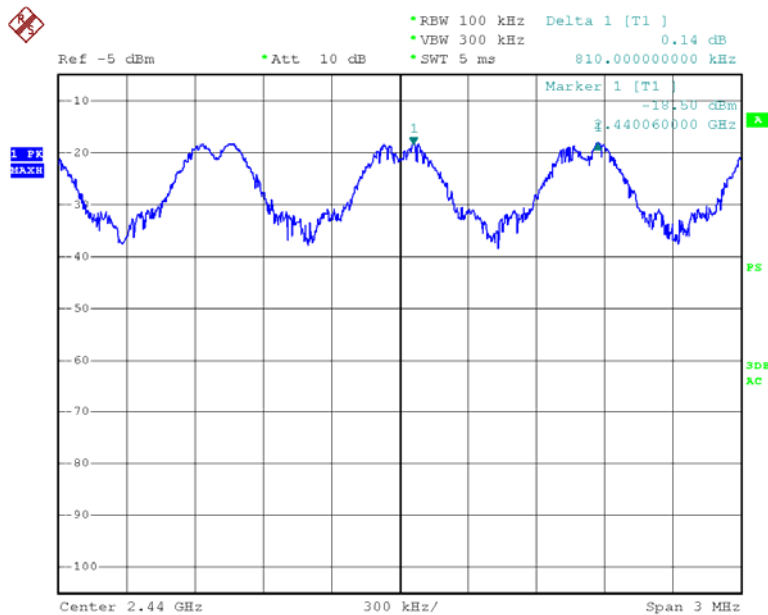

Date: 4.JUN.2013 19:33:02

CH75 2470

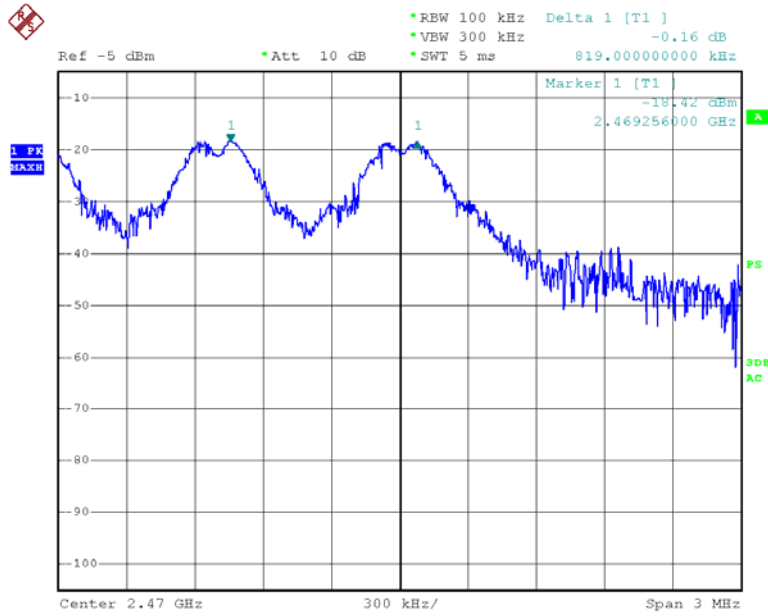


Date: 4.JUN.2013 19:59:44

## 8. 20dB Bandwidth test

### 8.1 Measurement Procedure

The EUT was operating in hopping mode or could be controlled its channel. Printed out the test result from the spectrum by hard copy function.

### 8.2 Test SET-UP (Block Diagram of Configuration)



### 8.3 Measurement Equipment Used:

Same as 5.3 Radiated Emission Measurement.


### 8.4 Measurement Results:

Refer to attached data chart.


Spectrum Detector:	PK	Test Date :	June 05, 2013
Test By:	Andy	Temperature :	22 °C
Test Result:	PASS	Humidity :	52 %

Channel number	Channel frequency (MHz)	20dB Down BW(kHz)
1	2410	750.194
40	2441	746.535
75	2470	784.807


CH1 2410

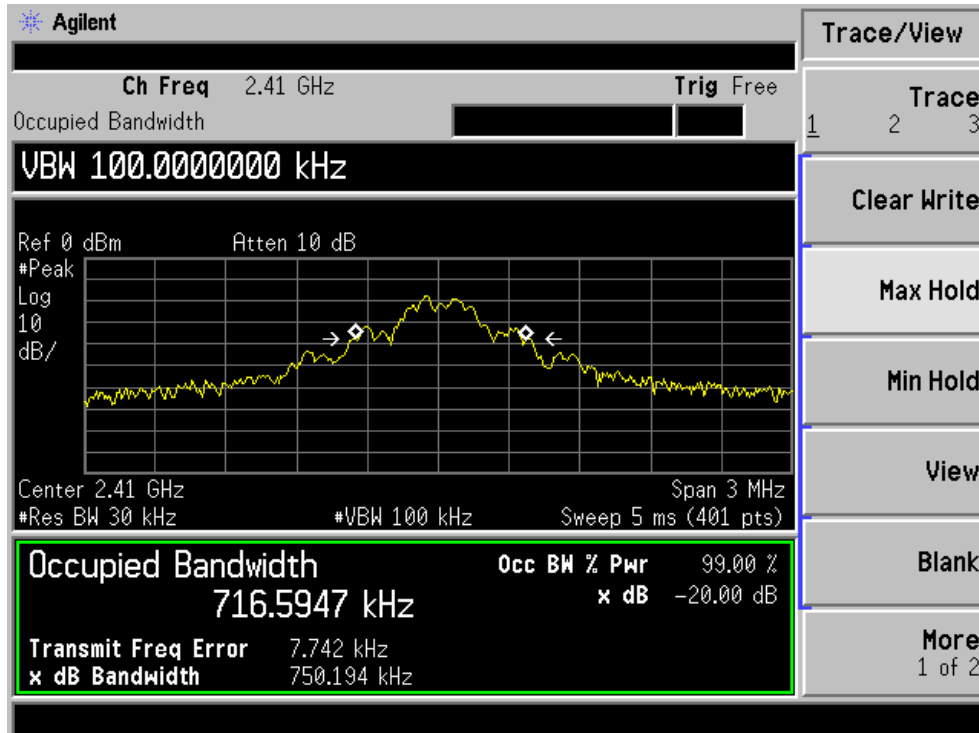

CH40 2441

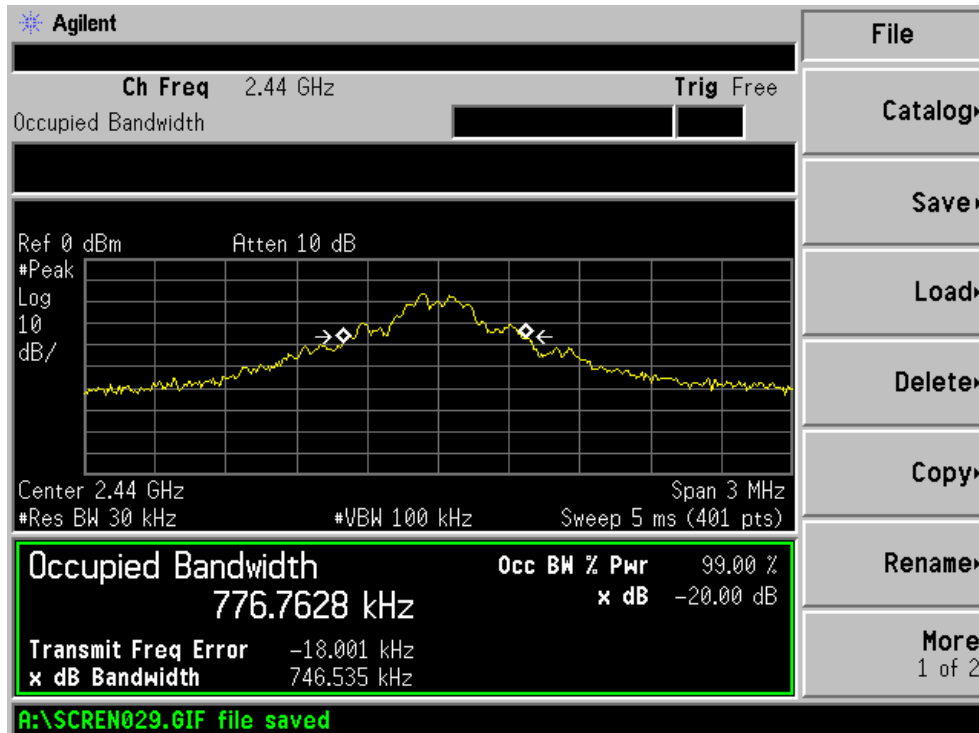

CH75 2470

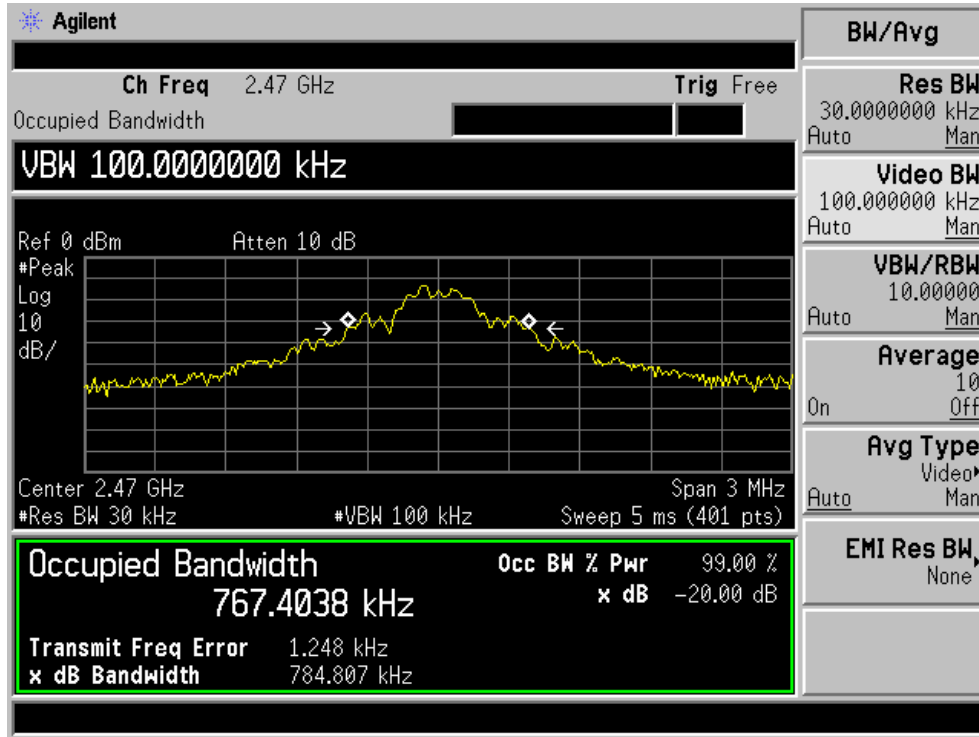


## 9. Quantity of Hopping Channel Test

### 9.1 Measurement Procedure

The EUT was operating in hopping mode or could be controlled its channel. Printed out the test result from the spectrum by hard copy function.

### 9.2 Test SET-UP (Block Diagram of Configuration)



### 9.3 Measurement Equipment Used:


Same as 5.3 Radiated Emission Measurement.

### 9.4 Measurement Results:

Refer to attached data chart.

Spectrum Detector:	PK	Test Date :	June 05, 2013
Test By:	Andy	Temperature :	22 °C
Test Result:	PASS	Humidity :	52 %

Hopping Channel Frequency Range	Quantity of Hopping Channel	Quantity of Hopping Channel
2410-2470	75	> 15

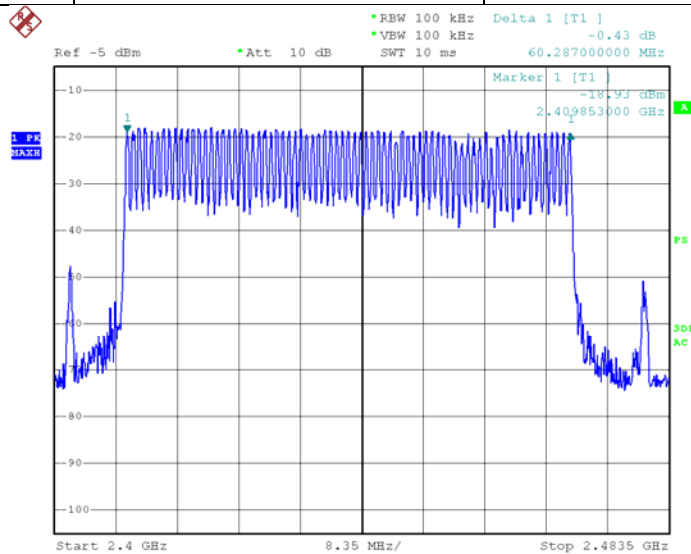

Date: 5.JUN.2013 00:15:24

## 10. Time of Occupancy (Dwell Time) test

### 10.1 Test Description

The Equipment Under Test (EUT) was set up to perform the dwell time measurements. The EUT was connected to the spectrum analyzer via a short coax cable. The dwell time is calculated by:

$\text{Dwell time} = \text{time slot length} * \text{hop rate} / \text{number of hopping channels} * 30\text{s}$

with:

- hop rate =  $20 * \text{hopping channels} * 0.4 / 0.35$

$20 * \text{hopping channels} * 0.4 / 0.35$

- number of hopping channels = 75

-  $30\text{s} = 0.4 \text{ seconds multiplied by the number of hopping channels} = 0.4 \text{ s} * 75$

The highest value of the dwell time is reported.

### 10.2 Test Requirements / Limits

FCC Part 15, Subpart C, §15.247 (a) (1) (iii)


Frequency hopping systems in the 2410-2470 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Since the Bluetooth technology uses 75 channels this period is calculated to be 30seconds. Refer to attached data chart.

### 10.3 Test Protocol

Packet type	Time slot length(ms)	Dwell time	Dwell time(ms)
2440	0.350	$20 * 75 * 0.4 / 1 * 0.35$	210

### 10.4 Test result: Dwell time

PASS.

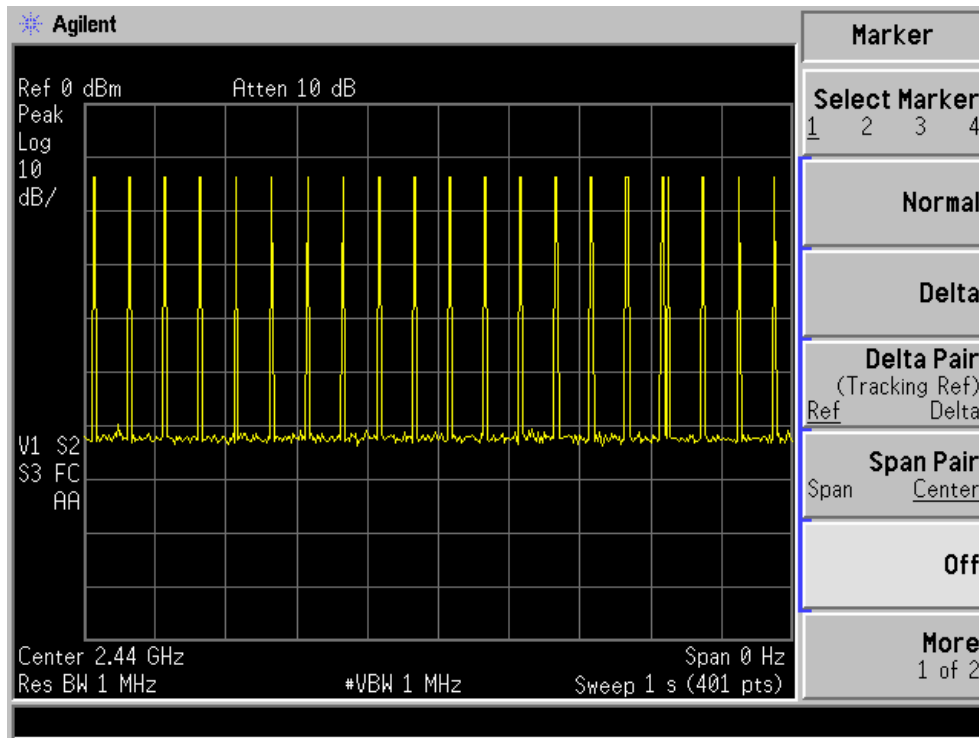




## 11. MAXIMUM PEAK OUTPUT POWER TEST

### 11.1 Measurement Procedure

- Check the calibration of the measuring instrument(SA) using either an internal calibrator or a known signal from an external generator.
- Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- The center frequency of the spectrum analyzer is set to the fundamental frequency and using proper RBW and VBW setting.
- Measure the captured power within the band and recording the plot.
- Repeat above procedures until all frequencies required were complete.

### 11.2 Test SET-UP (Block Diagram of Configuration)



### 11.3 Measurement Equipment Used:

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Spectrum Analyzer	Rohde & Schwarz	FSP7	839511/010	05/29/2013	05/29/2014


### 11.4 Measurement Results:

Refer to attached data chart.


Spectrum Detector:	PK	Test Date :	June 06, 2013
Test By:	Andy	Temperature :	22 °C
Test Result:	PASS	Humidity :	52 %

Channel number	Channel Frequency (MHz)	Peak Power output(mW)	Peak Power output(dBm)	Peak Power Limit(mW)	Pass/Fail
1	2410.00	0.053	-12.77	125	PASS
40	2441.00	0.037	-14.34	125	PASS
75	2470.00	0.051	-12.93	125	PASS


CH1 2410

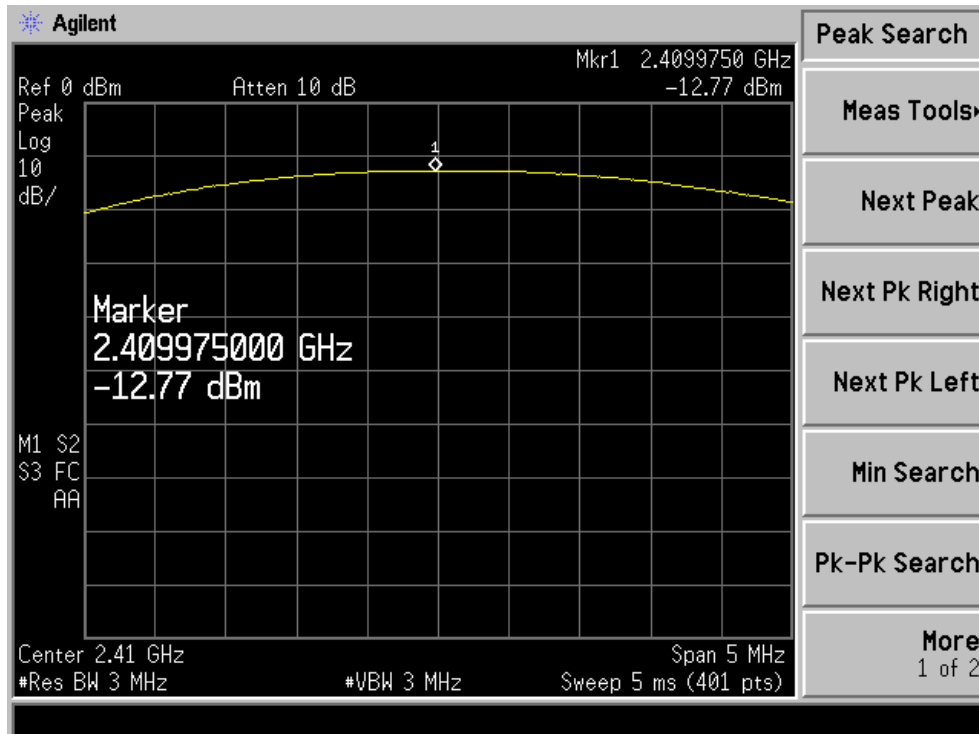

CH40 2441

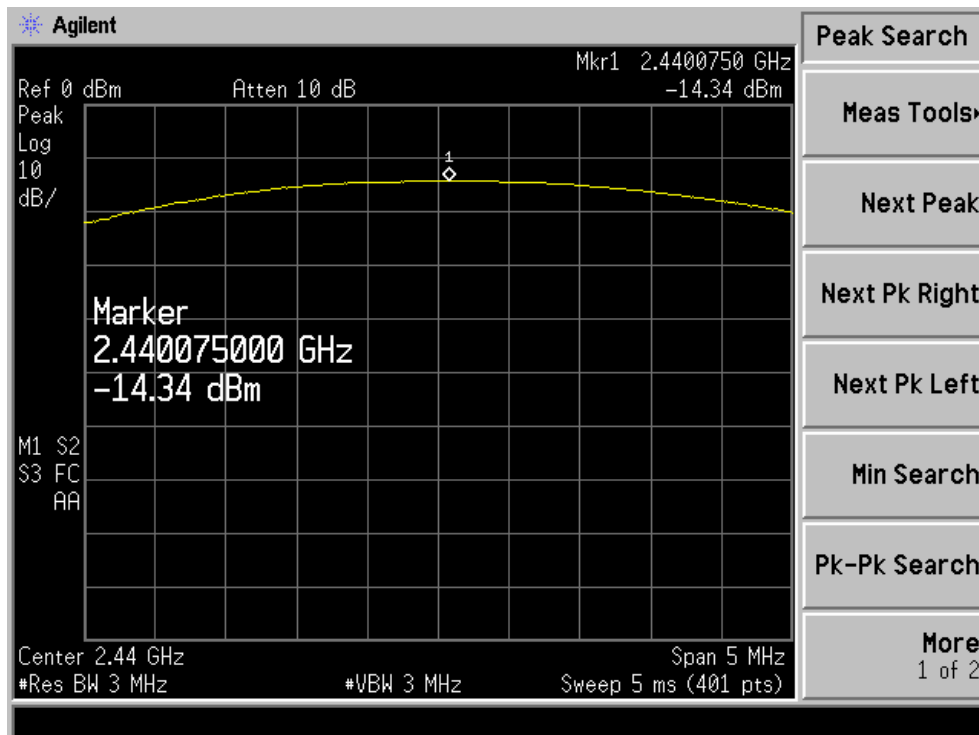

CH75 2470

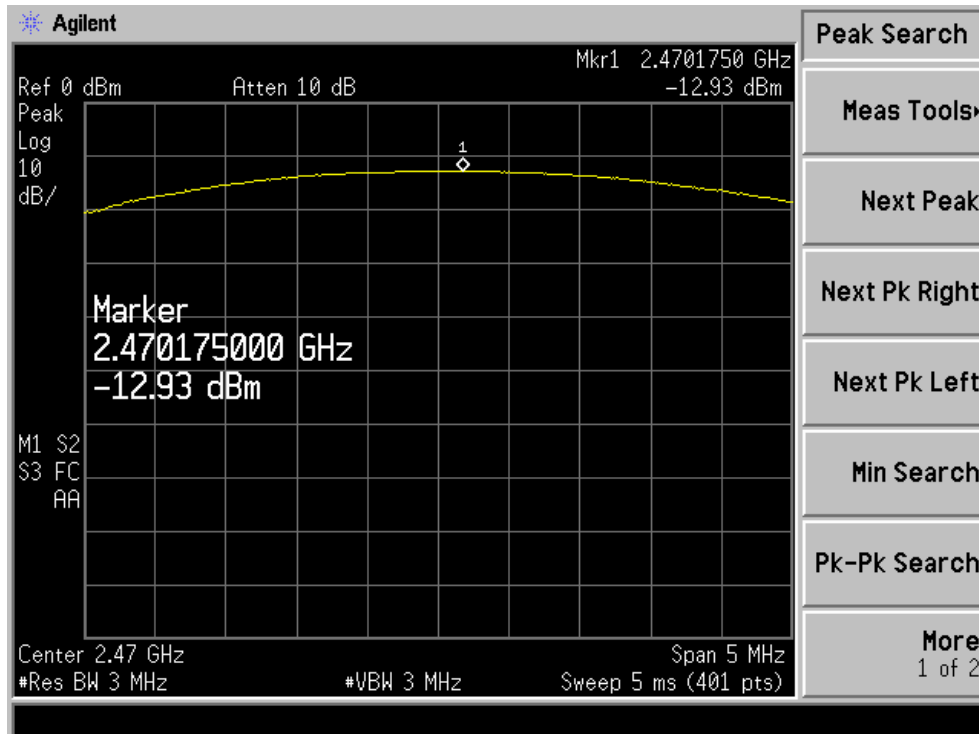

## 12. Band EDGE test

### 12.1 Measurement Procedure

1. The EUT was Operating in hopping mode or could be controlled its channel. Printed out test result from the spectrum by hard copy function.
2. The EUT was placed on a turn table which is 0.8m above ground plane.
3. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
4. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
5. Repeat above procedures until all frequency measured were complete.

### 12.2 Test SET-UP (Block Diagram of Configuration)

Same as 5.2 Radiated Emission Set-up.

### 12.3 Measurement Equipment Used:

Same as 5.3 Radiated Emission Measurement.



### 12.4 Measurement Results:

Refer to attached data chart.

Spectrum Detector:	PK	Test Date :	June 06, 2013
Test By:	Andy	Temperature :	22 °C
Test Result:	PASS	Humidity :	52 %

#### 1. Radiated emission test

Frequency (MHz)	Antenna polarization (H/V)	Emission (dBuV/m)		Band edge Limit (dBuV/m)	
		PK	AV	PK	AV
<2400	V	65.52	46.64	74.00	54.00
>2483.5	V	68.37	48.06	74.00	54.00

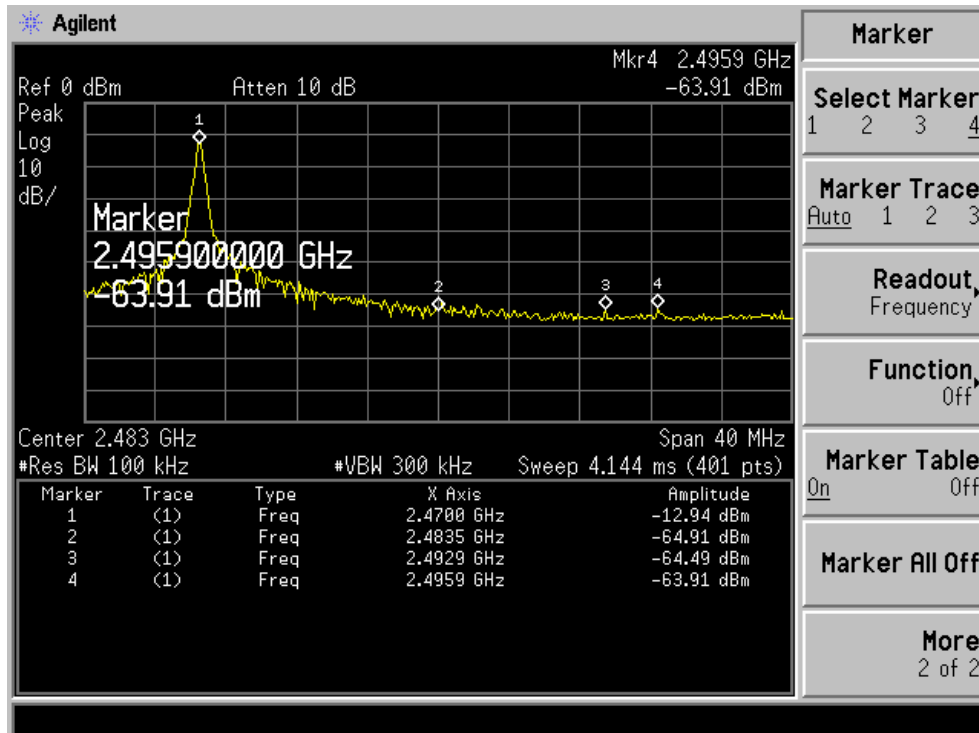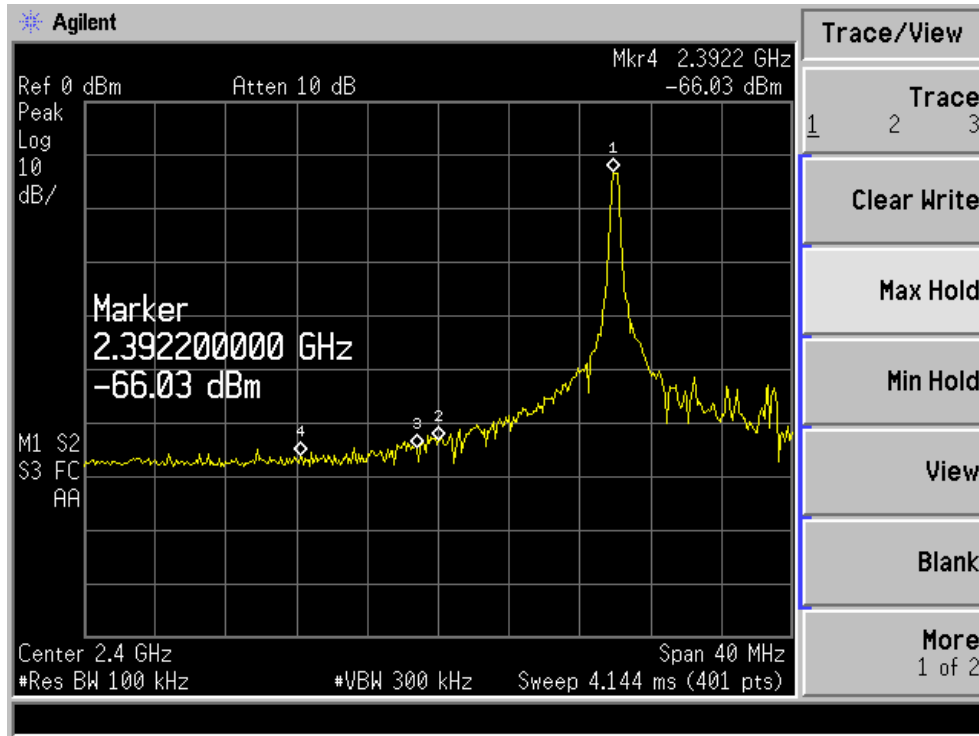

## **13. Antenna Application**

### **13.1 Antenna requirement**

The EUT'S antenna is met the requirement of FCC part 15C section 15.203 and 15.240.

FCC part 15C section 15.247 requirements:

Systems operating in the 2410-2470MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum peak output power of the intentional radiator is reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

### **13.2 Result**

The EUT's antenna is an internal PCB antenna and integrated on PCB, The antenna's gain is 0dBi and meets the requirement.

## 14. RF EXPOSURE EVALUATION

According to FCC 1.1310: The criteria listed in the following table shall be used to evaluate the environment impact of human exposure to radio frequency(RF) Radiation as specified in §1.1307(b)

Limits for Maximum Permissible Exposure(MPE)

Frequency Range(MHz)	Electric Field Strength(V/m)	Magnetic Field Strength(A/m)	Power Density(mW/cm <sup>2</sup> )	Average Time
<b>(A) Limits for Occupational/Control Exposures</b>				
<b>300-1500</b>	--	--	<b>F/300</b>	<b>6</b>
<b>1500-100000</b>	--	--	<b>5</b>	<b>6</b>
<b>(B) Limits for General Population/Uncontrol Exposures</b>				
<b>300-1500</b>	--	--	<b>F/1500</b>	<b>6</b>
<b>1500-100000</b>	--	--	<b>1</b>	<b>30</b>

### 14.1 Friis transmission formula: $P_d = (P_{out} * G) / (4 * \pi * R^2)$

Where

$P_d$ = Power density in mW/cm<sup>2</sup>

$P_{out}$ =output power to antenna in Mw

$G$ = gain of antenna in linear scale

$\pi$ =3.1416

$R$ = distance between observation point and center of the radiator in cm

$P_d$  the limit of MPE, 1mW/cm<sup>2</sup>. If we know the maximum gain of the antenna and total power input to the antenna, through the calculation, we will know the distance where the MPE limit is reached.

### 14.2 Result.

RF EXPOSURE EVALUATION does not apply to this low-power device.

# APPENDIX I (Photos of EUT)















