

TEST REPORT

Reference No..... : WTH22X06122763W001
FCC ID : 2AADR-HSG1415
Applicant : Hannstar Display Corp.
Address : 4F., No.15.Ln.168,Xingshan Rd., Neihu Dist.,Taipei City 11469,Taiwan
Manufacturer : The same as Applicant
Address : The same as Applicant
Product Name : Tablet
Model No..... : HSG1415
Standards : FCC Part 15.407
Date of Receipt sample : 2022-06-17
Date of Test..... : 2022-06-17 to 2022-06-30
Date of Issue : 2022-06-30
Test Report Form No. : WTX_Part 15_407W
Test Result..... : Pass

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of approver.

Prepared By:


Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road,
Block 70 Bao'an District, Shenzhen, Guangdong, China

Tel.: +86-755-33663308 Fax.: +86-755-33663309 Email: sem@waltek.com.cn

Tested by:

Approved by:



Mike Shi



Silin Chen

TABLE OF CONTENTS

1. GENERAL INFORMATION.....	5
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	5
1.2 TEST STANDARDS.....	6
1.3 TEST METHODOLOGY.....	6
1.4 TABLE FOR PARAMETERS OF TEST SOFTWARE SETTING	6
1.5 EUT OPERATING DURING TEST	7
1.6 TEST FACILITY	7
1.7 EUT SETUP AND TEST MODE.....	8
1.8 MEASUREMENT UNCERTAINTY	9
1.9 TEST EQUIPMENT LIST AND DETAILS	10
2. SUMMARY OF TEST RESULTS	12
3. ANTENNA REQUIREMENT	13
3.1 STANDARD APPLICABLE.....	13
3.2 EVALUATION INFORMATION	13
4. AUTOMATICALLY DISCONTINUE TRANSMISSION	14
4.1 STANDARD APPLICABLE.....	14
4.2 SUMMARY OF TEST RESULTS	14
5. POWER SPECTRAL DENSITY	15
5.1 STANDARD APPLICABLE.....	15
5.2 TEST PROCEDURE.....	15
5.3 SUMMARY OF TEST RESULTS/PLOTS	16
6. EMISSION BANDWIDTH AND OCCUPIED BANDWIDTH.....	17
6.1 STANDARD APPLICABLE.....	17
6.2 TEST PROCEDURE.....	17
6.3 SUMMARY OF TEST RESULTS/PLOTS	19
7. MAXIMUM CONDUCTED OUTPUT POWER.....	20
7.1 STANDARD APPLICABLE.....	20
7.2 TEST PROCEDURE.....	20
7.3 SUMMARY OF TEST RESULTS/PLOTS	21
8. RADIATED SPURIOUS EMISSIONS.....	22
8.1 STANDARD APPLICABLE.....	22
8.2 TEST PROCEDURE.....	22
8.3 TEST RECEIVER SETUP	24
8.4 CORRECTED AMPLITUDE & MARGIN CALCULATION.....	24
8.5 SUMMARY OF TEST RESULTS/PLOTS	24
9. FREQUENCY STABILITY	46
9.1 STANDARD APPLICABLE.....	46
9.2 TEST PROCEDURE.....	46
9.3 SUMMARY OF TEST RESULTS/PLOTS	46
10. CONDUCTED EMISSIONS	47
10.1 TEST PROCEDURE.....	47
10.2 BASIC TEST SETUP BLOCK DIAGRAM.....	47
10.3 TEST RECEIVER SETUP	47
10.4 SUMMARY OF TEST RESULTS/PLOTS	47
APPENDIX SUMMARY	50
APPENDIX A.....	51
APPENDIX B.....	59
APPENDIX C.....	72
APPENDIX D.....	79

APPENDIX PHOTOGRAPHS.....80

Report version

Version No.	Date of issue	Description
Rev.00	2022-06-30	Original
/	/	/

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

General Description of EUT	
Product Name:	Tablet
Trade Name:	Hannspree
Model No.:	HSG1415
Adding Model(s):	HSG1415+
Rated Voltage:	Charging Port: DC5V Battery: DC3.7V
Battery Capacity:	5000mAh
Power Adapter:	MODEL: FJ-SW126K0502000UN INPUT: AC100-240V, 50/60Hz 0.4A MAX OUTPUT: DC5V, 2.0A 10.0W
<i>Note: The test data is gathered from a production sample, provided by the manufacturer. The appearance of others models listed in the report is different from main-test model HSG1415, but the circuit and the electronic construction do not change, declared by the manufacturer.</i>	

Technical Characteristics of EUT	
Support Standards:	802.11a, 802.11n(HT20), 802.11n-HT40, 802.11ac-VHT80
Frequency Range:	5150-5250MHz, 5725-5850MHz
RF Output Power:	10.95dBm (Conducted)
Type of Modulation:	BPSK, QPSK, 16QAM, 64QAM, 256QAM
Quantity of Channels:	15
Type of Antenna:	FPC Antenna
Antenna Gain:	2dBi
<i>Note: The Antenna Gain is provided by the customer and can affect the validity of results.</i>	

1.2 Test Standards

The tests were performed according to following standards:

FCC Rules Part 15.407: General technical requirements.

ANSI C63.10-2013: American National Standard for Testing Unlicensed Wireless Devices.

KDB789033 D02 v02r01: Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-Nii) Devices Part 15, Subparte.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, KDB789033 D02 v02r01. The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted accordingly in reference to the Operating Instructions.

1.4 Table for parameters of Test Software setting

Enter “3646631+=” into the calculator to enter the engineer mode, you can start to test. During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Mode	Test Frequency (MHz)												
	NCB: 20MHz												
	5180	5200	5240	5260	5300	5320	5500	5580	5700	5720	5745	5785	5825
802.11a 6Mbps	13	13	13	/	/	/	/	/	/	/	13	13	13
802.11n-HT20 MCS0	13	13	13	/	/	/	/	/	/	/	13	13	13
Mode	NCB: 40MHz												
	5190	5230	5270	5310	5510	5550	5670	5710	5755	5795			
802.11n-HT40 MCS0	13	13	/	/	/	/	/	/	13	13			
Mode	NCB: 80MHz												
	5210		5290		5530		5610		5690		5775		
802.11ac-VH80 MCS0/Nss2	13		/		/		/		/		13		

1.5 EUT Operating during test

EUT was programmed to be in continuously transmitting mode. During the test, EUT operation to normal function and programs under Android were executed.

1.6 Test Facility

Address of the test laboratory

Laboratory: Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road, Block 70 Bao'an District, Shenzhen, Guangdong, China

FCC – Registration No.: 125990

Waltek Testing Group (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. The Designation Number is CN5010, and Test Firm Registration Number is 125990.

Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Waltek Testing Group (Shenzhen) Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

1.7 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, with a duty cycle equal to 100%, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	802.11a	5180MHz,5200MHz,5240MHz, 5745MHz, 5785MHz,5825MHz
TM2	802.11n-HT20	5180MHz,5200MHz,5240MHz, 5745MHz, 5785MHz,5825MHz
TM3	802.11n-HT40	5190MHz,5230MHz, 5755MHz,5795MHz
TM4	802.11ac-VH80	5210MHz ,5775MHz
Note: 802.11ac-VHT20, 802.11ac-VHT40 covered by 802.11n-HT20 and 802.11n-HT40.		

Test Conditions	
Temperature:	22~25 °C
Relative Humidity:	45~55 %.
ATM Pressure:	1019 mbar

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
DC CABLE	1.5	Unshielded	Without Ferrite

Special Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
Mini-HDMI	1.0	Shielded	With Ferrite

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
/	/	/	/

1.8 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
RF Output Power	Conducted	$\pm 0.42\text{dB}$
Occupied Bandwidth	Conducted	$\pm 1.5\%$
Power Spectral Density	Conducted	$\pm 1.8\text{dB}$
Conducted Spurious Emission	Conducted	$\pm 2.17\text{dB}$
Conducted Emissions	Conducted	9-150kHz $\pm 3.74\text{dB}$
		0.15-30MHz $\pm 3.34\text{dB}$
Transmitter Spurious Emissions	Radiated	30-200MHz $\pm 4.52\text{dB}$
		0.2-1GHz $\pm 5.56\text{dB}$
		1-6GHz $\pm 3.84\text{dB}$
		6-18GHz $\pm 3.92\text{dB}$

1.9 Test Equipment List and Details

No.	Description	Manufacturer	Model	Serial No.	Cal Date	Due. Date
SEMT-1075	Communication Tester	Rohde & Schwarz	CMW500	148650	2022-03-22	2023-03-21
SEMT-1063	GSM Tester	Rohde & Schwarz	CMU200	114403	2022-03-22	2023-03-21
SEMT-1072	Spectrum Analyzer	Agilent	E4407B	MY41440400	2022-03-25	2023-03-24
SEMT-1079	Spectrum Analyzer	Agilent	N9020A	US47140102	2022-03-22	2023-03-21
SEMT-1080	Signal Generator	Agilent	83752A	3610A01453	2022-03-22	2023-03-21
SEMT-1081	Vector Signal Generator	Agilent	N5182A	MY47070202	2022-03-22	2023-03-21
SEMT-1028	Power Divider	Weinschel	1506A	PM204	2022-03-22	2023-03-21
SEMT-C001	Cable	Zheng DI	LL142-07-07-10M(A)	/	/	/
SEMT-C002	Cable	Zheng DI	ZT40-2.92J-2.92J-6M	/	/	/
SEMT-C003	Cable	Zheng DI	ZT40-2.92J-2.92J-2.5M	/	/	/
SEMT-C004	Cable	Zheng DI	2M0RFC	/	/	/
SEMT-C005	Cable	Zheng DI	1M0RFC	/	/	/
SEMT-C006	Cable	Zheng DI	1M0RFC	/	/	/
☒ Chamber A: Below 1GHz						
SEMT-1031	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2022-03-22	2023-03-21
SEMT-1007	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2022-03-22	2023-03-21
SEMT-1008	Amplifier	Agilent	8447F	3113A06717	2022-01-07	2023-01-06
SEMT-1069	Loop Antenna	Schwarz beck	FMZB 1516	9773	2021-03-20	2023-03-19
SEMT-1068	Broadband Antenna	Schwarz beck	VULB9163	9163-333	2021-03-20	2023-03-19
☒ Chamber A: Above 1GHz						
SEMT-1031	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2022-03-22	2023-03-21
SEMT-1007	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2022-03-22	2023-03-21
SEMT-1043	Amplifier	C&D	PAP-1G18	2002	2022-03-22	2023-03-21
SEMT-1042	Horn Antenna	ETS	3117	00086197	2021-03-19	2023-03-18
SEMT-1121	Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170582	2021-04-27	2023-04-26
SEMT-1216	Pre-amplifier	Schwarzbeck	BBV 9721	9721-031	2022-03-25	2023-03-24

SEMT-1163	Spectrum Analyzer	Rohde & Schwarz	FSP40	100612	2022-03-22	2023-03-21
☐ Chamber B:Below 1GHz						
SEMT-1068	Trilog Broadband Antenna	Schwarz beck	VULB9163(B)	9163-635	2021-04-09	2023-04-08
SEMT-1067	Amplifier	Agilent	8447D	2944A10179	2022-03-22	2023-03-21
SEMT-1066	EMI Test Receiver	Rohde & Schwarz	ESPI	101391	2022-03-22	2023-03-21
☐ Chamber C:Below 1GHz						
SEMT-1319	EMI Test Receiver	Rohde & Schwarz	ESIB 26	100401	2022-01-07	2023-01-06
SEMT-1343	Trilog Broadband Antenna	Schwarz beck	VULB 9168	1194	2021-05-28	2023-05-27
SEMT-1333	Amplifier	HP	8447F	2944A03869	2022-03-22	2023-03-21
☒ Conducted Room 1#						
SEMT-1001	EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2022-03-21	2023-03-20
SEMT-1002	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2022-03-25	2023-03-24
SEMT-1003	AC LISN	Schwarz beck	NSLK8126	8126-224	2022-03-22	2023-03-21
☐ Conducted Room 2#						
SEMT-1334	EMI Test Receiver	Rohde & Schwarz	ESPI	101259	2022-03-22	2023-03-21
SEMT-1336	LISN	Rohde & Schwarz	ENV 216	100097	2022-03-22	2023-03-21

Software List			
Description	Manufacturer	Model	Version
EMI Test Software (Radiated Emission)*	Farad	EZ-EMC	RA-03A1
EMI Test Software (Conducted Emission)*	Farad	EZ-EMC	RA-03A1

*Remark: indicates software version used in the compliance certification testing.

2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test Item	Result
§15.203; §15.405	Antenna Requirement	Compliant
15.407 (c)	Automatically Discontinue Transmission	Compliant
§15.207; §15.407(b)(6)	Conducted Emission	Compliant
§15.407(a)(1),(2)	Power Spectral Density	Compliant
§15.407(e)	Emission Bandwidth and Occupied Bandwidth	Compliant
§15.407(a)(1),(2)	Maximum Conducted Output Power	Compliant
§15.407(b)(1),(2),(3),(4)	Undesirable emission	Compliant
§15.205; §15.407(b)(1),(2),(3)	Radiated Emission	Compliant
§15.407(g)	Frequency Stability	Compliant
§15.407(h)	Dynamic Frequency Selection (DFS)	Compliant

N/A: Not applicable.

3. Antenna Requirement

3.1 Standard Applicable

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

3.2 Evaluation Information

This product has an FPC Antenna, fulfill the requirement of this section.

4. Automatically Discontinue Transmission

4.1 Standard Applicable

According to FCC Part 15.407(c), the device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization to describe how this requirement is met.

4.2 Summary of Test Results

While the EUT is not transmitting any information, the EUT can automatically discontinue transmission and become standby mode for power saving. The EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.

5. Power Spectral Density

5.1 Standard Applicable

Section 15.407(a) Power limits:

(1) For the band 5.15-5.25GHz.

(iv) For mobile and portable client devices in the 5.15-5.25GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250mW provided the maximum antenna gain does not exceed 6dBi. In addition, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

(2) For the 5.25-5.35GHz and 5.47-5.725GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250mW or $11 \text{ dBm} + 10 \log B$, where B is the 26dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

(3) For the band 5.725-5.85GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30dBm in any 500kHz band. If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

5.2 Test Procedure

According to 789033 D02 v02r01 General UNII Test Procedures New Rules v02, the following is the measurement procedure.

For devices operating in the bands 5.15-5.25GHz, 5.25-5.35GHz, and 5.47-5.725GHz, the above procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference bandwidth specified in § 15.407(a)(5). For devices operating in the band 5.725-5.85GHz, the rules specify a measurement bandwidth of 500kHz. Many spectrum analyzers do not have 500kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1 MHz, or 500kHz, “provided that the measured power is integrated over the full reference bandwidth” to show the total power over the specified measurement bandwidth (i.e., 1MHz, or 500kHz). If

measurements are performed using a reduced resolution bandwidth ($< 1\text{MHz}$, or $< 500\text{kHz}$) and integrated over 1 MHz, or 500kHz bandwidth, the following adjustments to the procedures apply:

- a) Set $\text{RBW} \geq 1/T$, where T is defined in section II.B.1.a).
- b) Set $\text{VBW} \geq 3 \text{ RBW}$.
- c) If measurement bandwidth of Maximum PSD is specified in 500kHz, add $10\log(500\text{kHz}/\text{RBW})$ to the measured result, whereas RBW ($< 500\text{kHz}$) is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
- d) If measurement bandwidth of Maximum PSD is specified in 1 MHz, add $10\log(1\text{MHz}/\text{RBW})$ to the measured result, whereas RBW ($< 1\text{MHz}$) is the reduced resolution bandwidth of spectrum analyzer set during measurement.
- e) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

Note: As a practical matter, it is recommended to use reduced RBW of 100kHz for the sections 5.c) and 5.d) above, since RBW=100kHz is available on nearly all spectrum analyzers.

5.3 Summary of Test Results/Plots

Please refer to Appendix A

6. Emission Bandwidth and Occupied Bandwidth

6.1 Standard Applicable

According to 15.407(a) and (e):

(1) For the band 5.15-5.25GHz.

(iv) For mobile and portable client devices in the 5.15-5.25GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

(2) For the 5.25-5.35GHz and 5.47-5.725GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250mW or $11\text{dBm} + 10 \log B$, where B is the 26dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

(3) For the band 5.725-5.85GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30dBm in any 500kHz band. If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(e) Within the 5.725-5.85GHz band, the minimum 6dB bandwidth of U-NII devices shall be at least 500kHz.

6.2 Test Procedure

According to 789033 D02 v02r0r section C&D, the following is the measurement procedure.

1. Emission Bandwidth (EBW)

- a) Set RBW = approximately 1% of the emission bandwidth.
- b) Set the VBW > RBW.
- c) Detector = Peak.

- d) Trace mode = max hold.
- e) Measure the maximum width of the emission that is 26dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

2. Minimum Emission Bandwidth for the band 5.725-5.85GHz

Section 15.407(e) specifies the minimum 6 dB emission bandwidth of at least 500KHz for the band 5.715-5.85 GHz. The following procedure shall be used for measuring this bandwidth:

- a) Set RBW = 100kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times \text{RBW}$.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6dB relative to the maximum level measured in the fundamental emission.

Note: The automatic bandwidth measurement capability of a spectrum analyzer or EMI receiver may be employed if it implements the functionality described above.

D. 99 Percent Occupied Bandwidth

The 99-percent occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5 % of the total mean power of the given emission. Measurement of the 99-percent occupied bandwidth is required only as a condition for using the optional band-edge measurement techniques described in section II.G.3.d). Measurements of 99-percent occupied bandwidth may also optionally be used in lieu of the EBW to 789033 D02 v02r01 General UNII Test Procedures New Rules v01 define the minimum frequency range over which the spectrum is integrated when measuring maximum conducted output power as described in section II.E. However, the EBW must be measured to determine bandwidth dependent limits on maximum conducted output power in accordance with 15.407(a).

The following procedure shall be used for measuring (99 %) power bandwidth:

- 1. Set center frequency to the nominal EUT channel center frequency.
- 2. Set span = 1.5 times to 5.0 times the OBW.
- 3. Set RBW = 1 % to 5 % of the OBW
- 4. Set VBW $\geq 3 * \text{RBW}$
- 5. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
- 6. Use the 99 % power bandwidth function of the instrument (if available).
- 7. If the instrument does not have a 99 % power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 % of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5 % of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.

6.3 Summary of Test Results/Plots

Please refer to Appendix B

7. Maximum Conducted Output Power

7.1 Standard Applicable

Section 15.407(a) Power limits:

(1) For the band 5.15-5.25GHz.

(iv) For mobile and portable client devices in the 5.15-5.25GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

(2) For the 5.25-5.35GHz and 5.47-5.725GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250mW or $11\text{dBm} + 10 \log B$, where B is the 26dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

(3) For the band 5.725-5.85GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30dBm in any 500kHz band. If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

7.2 Test Procedure

According to KDB789033 D02 v02r01 section E, the following is the measurement procedure.

- (i) Set span to encompass the entire emission bandwidth (EBW) (or, alternatively, the entire 99% occupied bandwidth) of the signal.
- (ii) Set RBW = 1MHz.
- (iii) Set VBW $\geq$ 3MHz.
- (iv) Number of points in sweep $\geq$ 2 Span / RBW. (This ensures that bin-to-bin spacing is $\leq$ RBW/2, so that narrowband signals are not lost between frequency bins.)

- (v) Sweep time = auto.
- (vi) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.
- (vii) If transmit duty cycle < 98 percent, use a video trigger with the trigger level set to enable triggering only on full power pulses. Transmitter must operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle $\geq$ 98 percent, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to “free run”.
- (viii) Trace average at least 100 traces in power averaging (i.e., RMS) mode.
- (ix) Compute power by integrating the spectrum across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal using the instrument’s band power measurement function with band limits set equal to the EBW (or occupied bandwidth) band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at 1MHz intervals extending across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the spectrum.

7.3 Summary of Test Results/Plots

Please refer to Appendix C

8. Radiated Spurious Emissions

8.1 Standard Applicable

According to §15.407(b), undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15-5.25GHz band: All emissions outside of the 5.15-5.35GHz band shall not exceed an e.i.r.p. of -27dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35GHz band: All emissions outside of the 5.15-5.35GHz band shall not exceed an e.i.r.p. of -27dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725GHz band: All emissions outside of the 5.47-5.725GHz band shall not exceed an e.i.r.p. of -27dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85GHz band:
 - (i) All emissions shall be limited to a level of -27dBm/MHz at 75MHz or more above or below the band edge increasing linearly to 10dBm/MHz at 25MHz above or below the band edge, and from 25MHz above or below the band edge increasing linearly to a level of 15.6dBm/MHz at 5MHz above or below the band edge, and from 5MHz above or below the band edge increasing linearly to a level of 27dBm/MHz at the band edge.

According to §15.407(b)(6), Unwanted emissions below 1GHz must comply with the general field strength limits set forth in §15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in §15.207.

According to §15.407(b)(7), The provisions of §15.205 apply to intentional radiators operating under this section.
789033 D02 v02r01 General UNII Test Procedures New Rules v01

If radiated measurements are performed, field strength is then converted to EIRP as follows:

$$\text{EIRP} = ((E \cdot d)^2) / 30$$

where:

- E is the field strength in V/m;
- d is the measurement distance in meters;
- EIRP is the equivalent isotropically radiated power in watts.


8.2 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.205 15.407(b)(6) and FCC Part 15.209 Limit..


The external I/O cables were draped along the test table and formed a bundle 30 to 40cm long in the middle.

The spacing between the peripherals was 10cm.


The test setup for emission measurement below 30MHz.

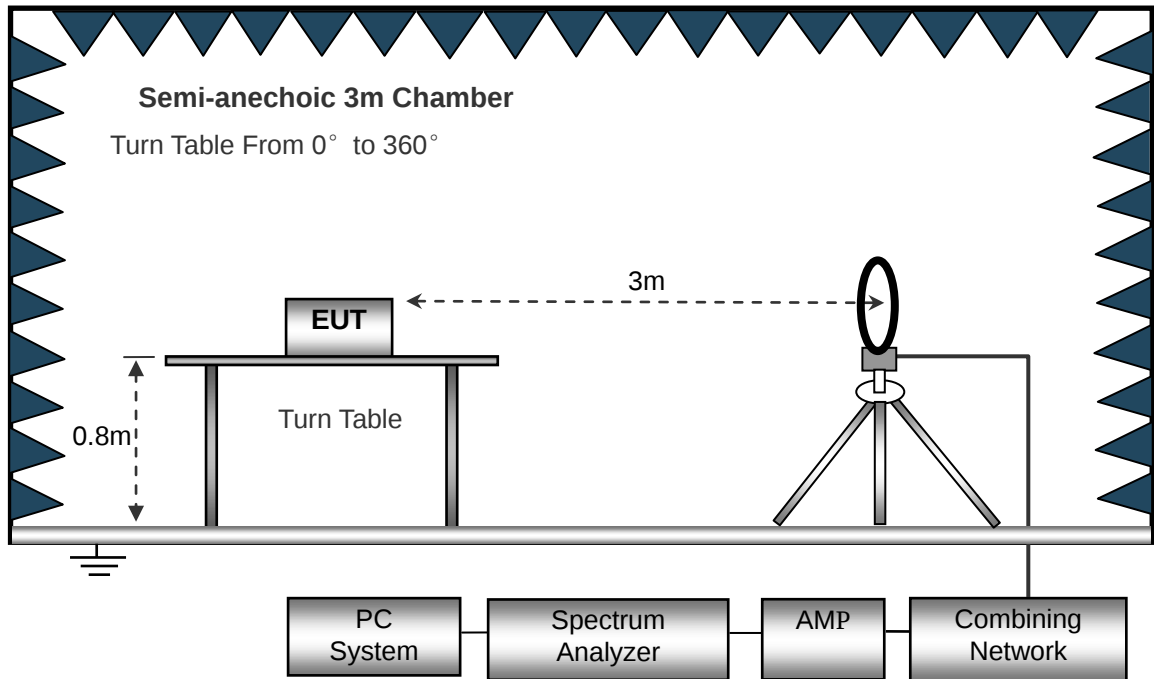

The test setup for emission measurement from 30MHz to 1GHz.

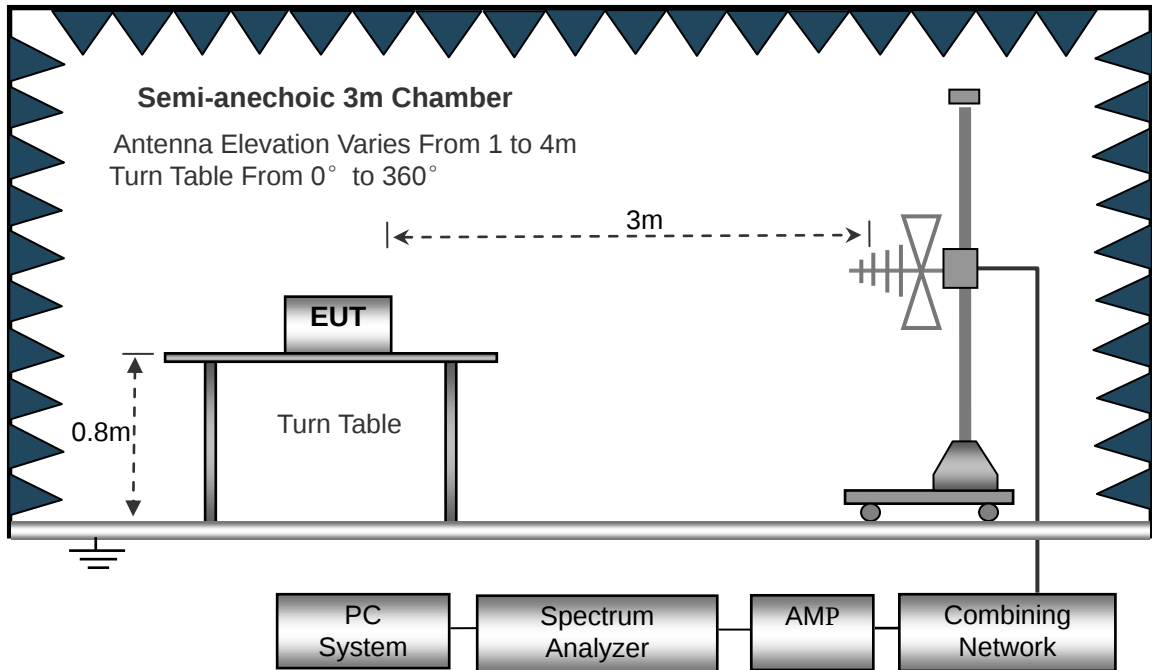

The test setup for emission measurement above 1GHz.

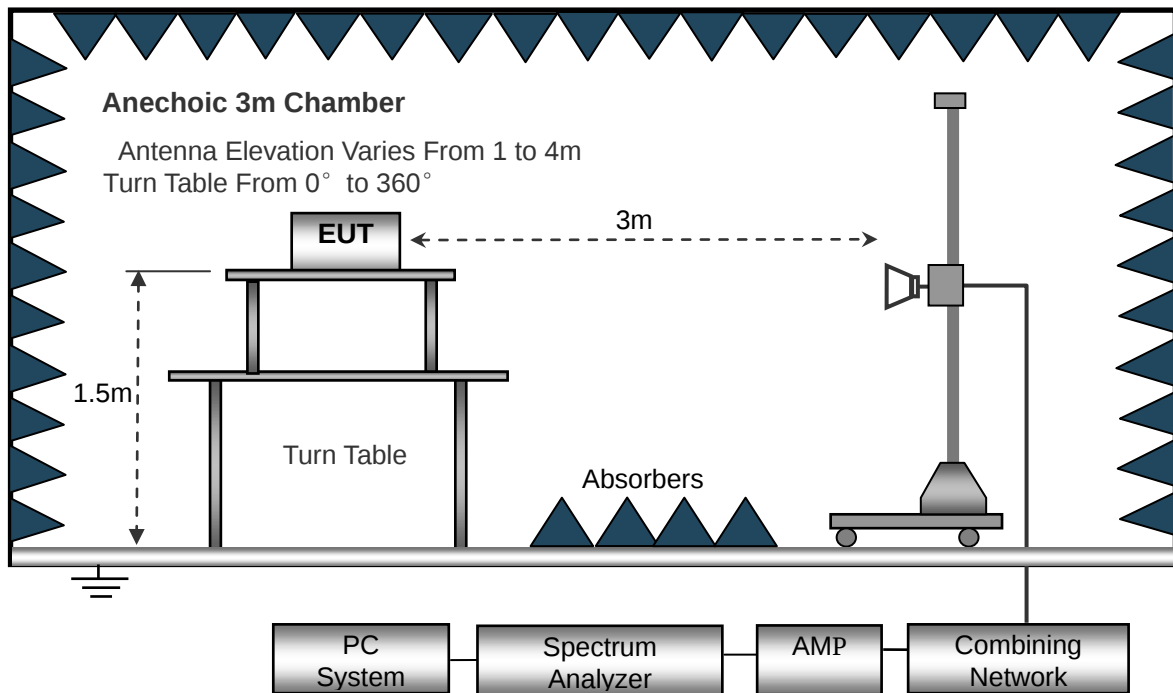

8.3 Test Receiver Setup

During the radiated emission test for above 1GHz, the test receiver was set with the following configurations:

For peak detector:

RBW = 1000kHz, VBW = 3000kHz, Sweep Time = Auto

For average detector:

RBW = 1000kHz, VBW = 10Hz, Sweep Time = Auto

8.4 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Ant. Factor} + \text{Cable Loss} - \text{Ampl. Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dBμV means the emission is 6dBμV below the maximum limit for Class B. The equation for margin calculation is as follows:


$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15 Limit}$$

8.5 Summary of Test Results/Plots

Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.


- Spurious Emission From 30MHz to 1GHz
- 5150-5250MHz

802.11a(Worst case)			
Test Channel	5180MHz	Polarity:	Horizontal

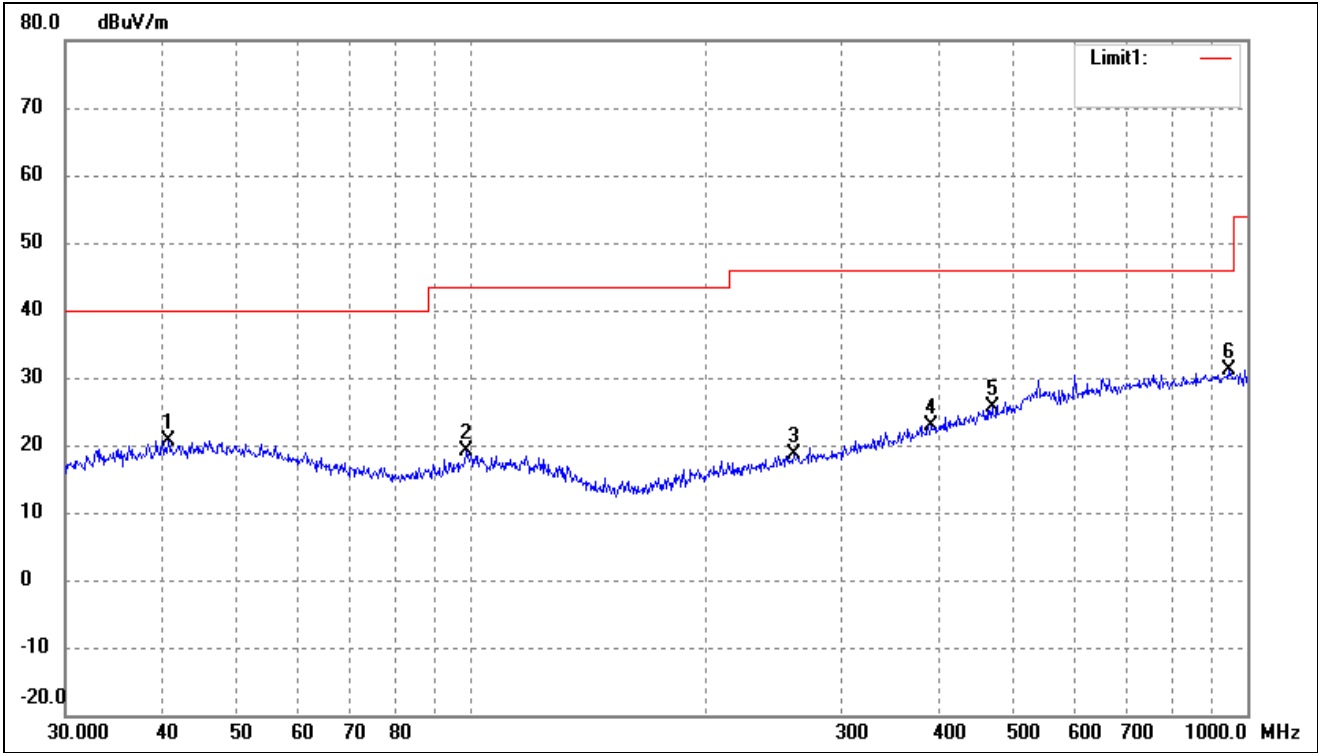


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	40.7016	27.69	-7.00	20.69	40.00	-19.31	-	-	peak
2	98.4866	28.07	-9.01	19.06	43.50	-24.44	-	-	peak
3	260.1444	26.70	-8.04	18.66	46.00	-27.34	-	-	peak
4	390.7226	27.09	-4.18	22.91	46.00	-23.09	-	-	peak
5	468.8762	27.83	-2.09	25.74	46.00	-20.26	-	-	peak
6	945.4399	28.58	2.60	31.18	46.00	-14.82	-	-	peak

802.11a(Worst case)			
Test Channel	5180MHz	Polarity:	Vertical

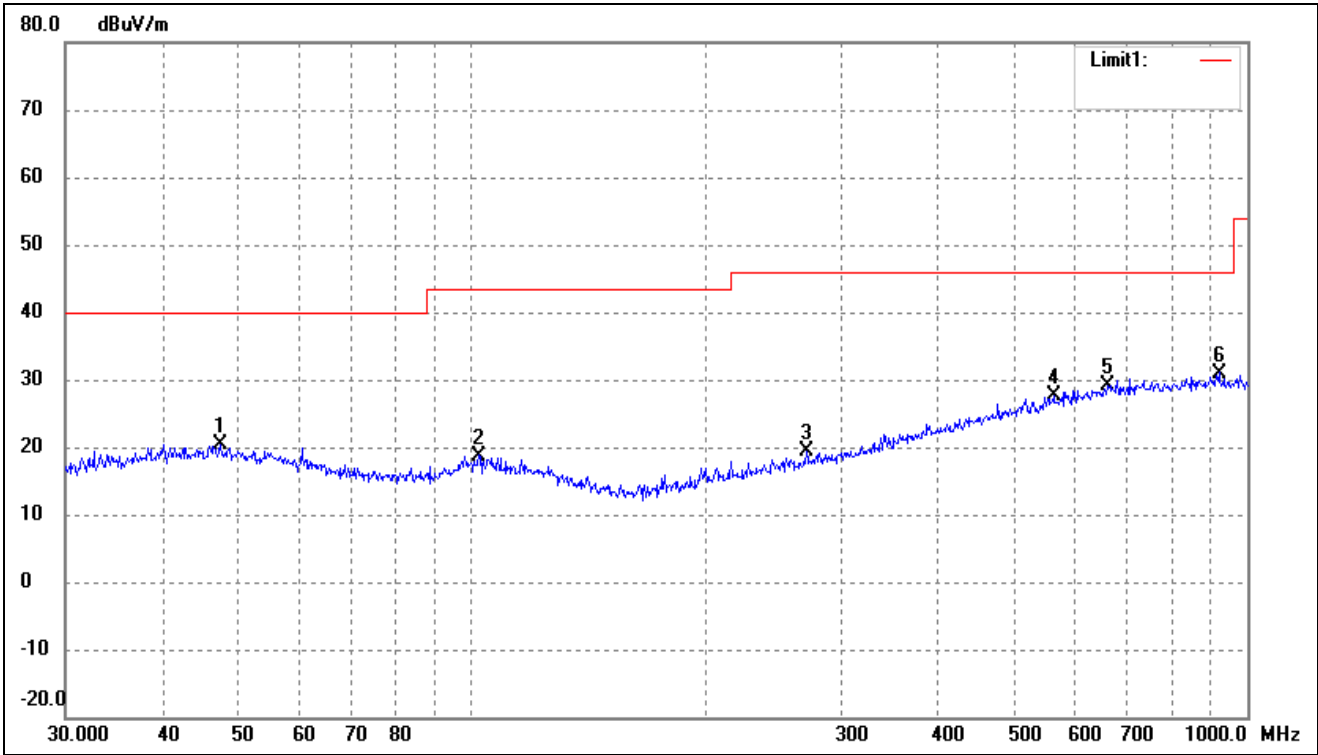


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	47.4918	27.45	-6.97	20.48	40.00	-19.52	-	-	peak
2	102.3597	27.52	-8.77	18.75	43.50	-24.75	-	-	peak
3	270.3748	27.25	-7.76	19.49	46.00	-26.51	-	-	peak
4	562.6624	27.98	-0.25	27.73	46.00	-18.27	-	-	peak
5	661.1505	28.05	1.04	29.09	46.00	-16.91	-	-	peak
6	919.2866	28.31	2.69	31.00	46.00	-15.00	-	-	peak

802.11a(Worst case)			
Test Channel	5200MHz	Polarity:	Horizontal

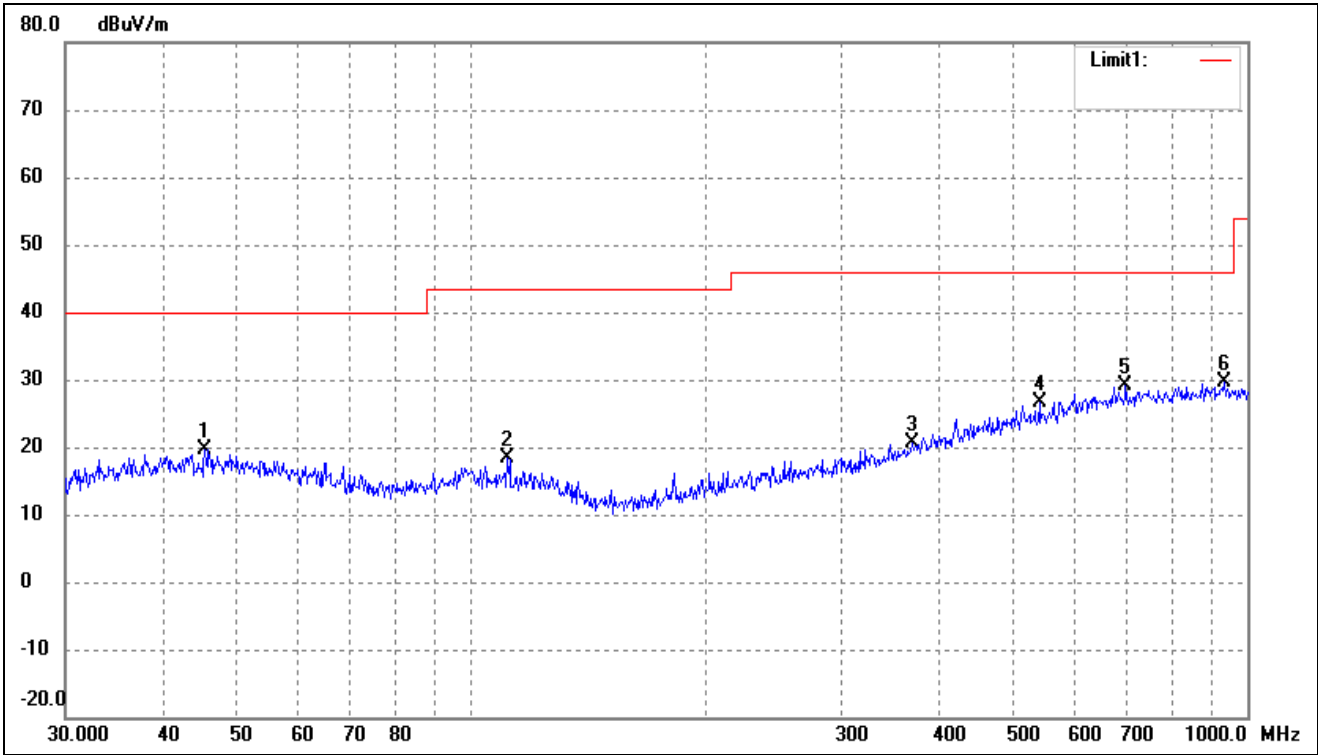


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	45.3755	26.55	-6.97	19.58	40.00	-20.42	-	-	peak
2	111.3468	27.45	-8.97	18.48	43.50	-25.02	-	-	peak
3	370.7023	25.32	-4.78	20.54	46.00	-25.46	-	-	peak
4	539.4775	27.27	-0.65	26.62	46.00	-19.38	-	-	peak
5	696.8567	27.70	1.40	29.10	46.00	-16.90	-	-	peak
6	932.2715	27.01	2.64	29.65	46.00	-16.35	-	-	peak

802.11a(Worst case)			
Test Channel	5200MHz	Polarity:	Vertical

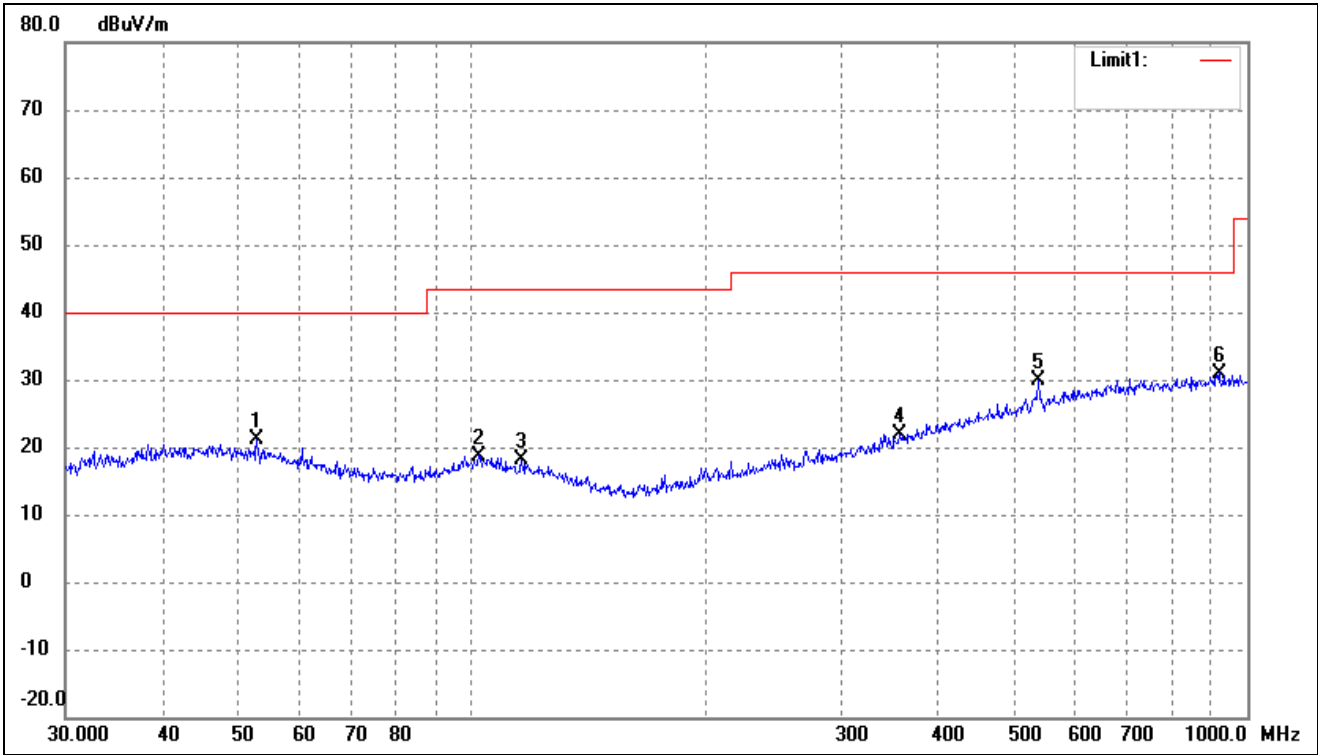


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	52.9453	28.59	-7.39	21.20	40.00	-18.80	-	-	peak
2	102.3597	27.52	-8.77	18.75	43.50	-24.75	-	-	peak
3	116.1321	27.40	-9.31	18.09	43.50	-25.41	-	-	peak
4	356.6758	27.13	-5.20	21.93	46.00	-24.07	-	-	peak
5	537.5891	30.48	-0.67	29.81	46.00	-16.19	-	-	peak
6	919.2866	28.31	2.69	31.00	46.00	-15.00	-	-	peak

802.11a(Worst case)			
Test Channel	5240MHz	Polarity:	Horizontal

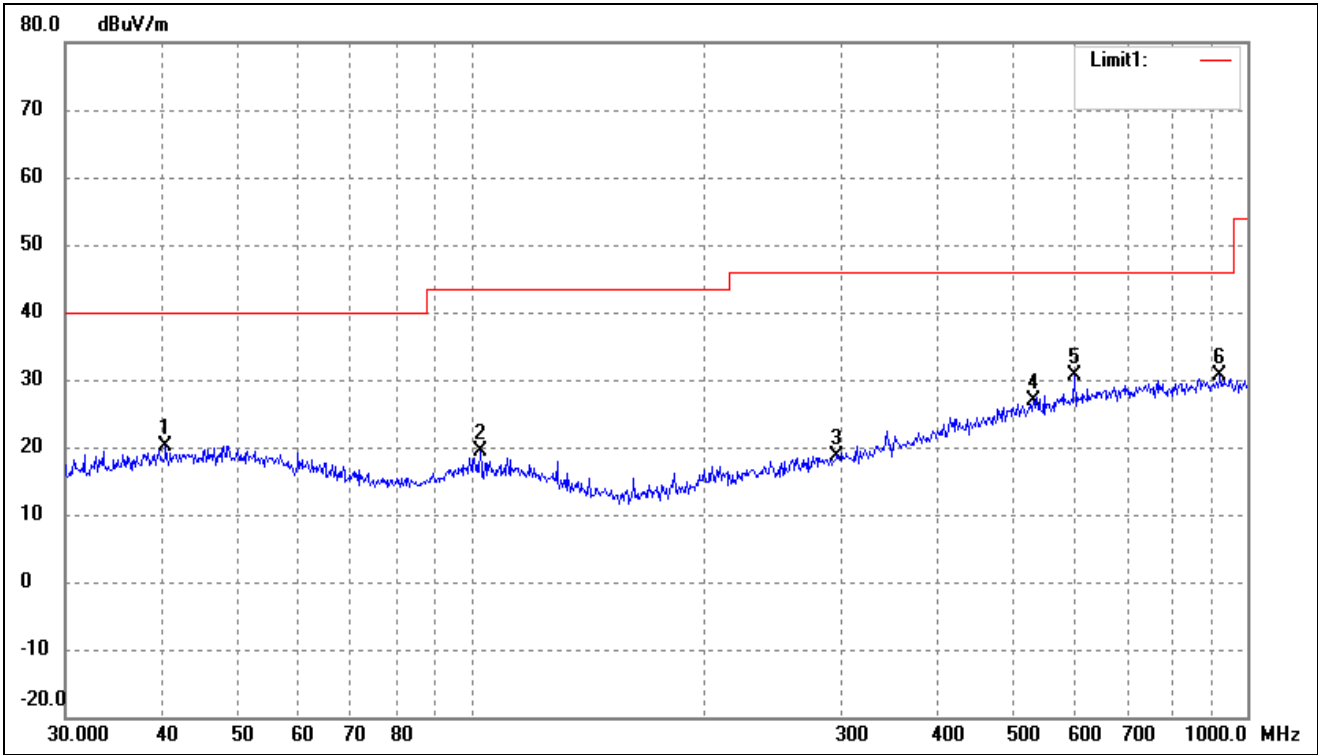

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	40.4172	27.01	-6.99	20.02	40.00	-19.98	-	-	peak
2	102.7192	28.04	-8.77	19.27	43.50	-24.23	-	-	peak
3	296.1836	25.81	-7.06	18.75	46.00	-27.25	-	-	peak
4	530.1014	27.62	-0.80	26.82	46.00	-19.18	-	-	peak
5	599.3213	30.16	0.36	30.52	46.00	-15.48	-	-	peak
6	922.5157	27.92	2.67	30.59	46.00	-15.41	-	-	peak


802.11a(Worst case)			
Test Channel	5240MHz	Polarity:	Vertical

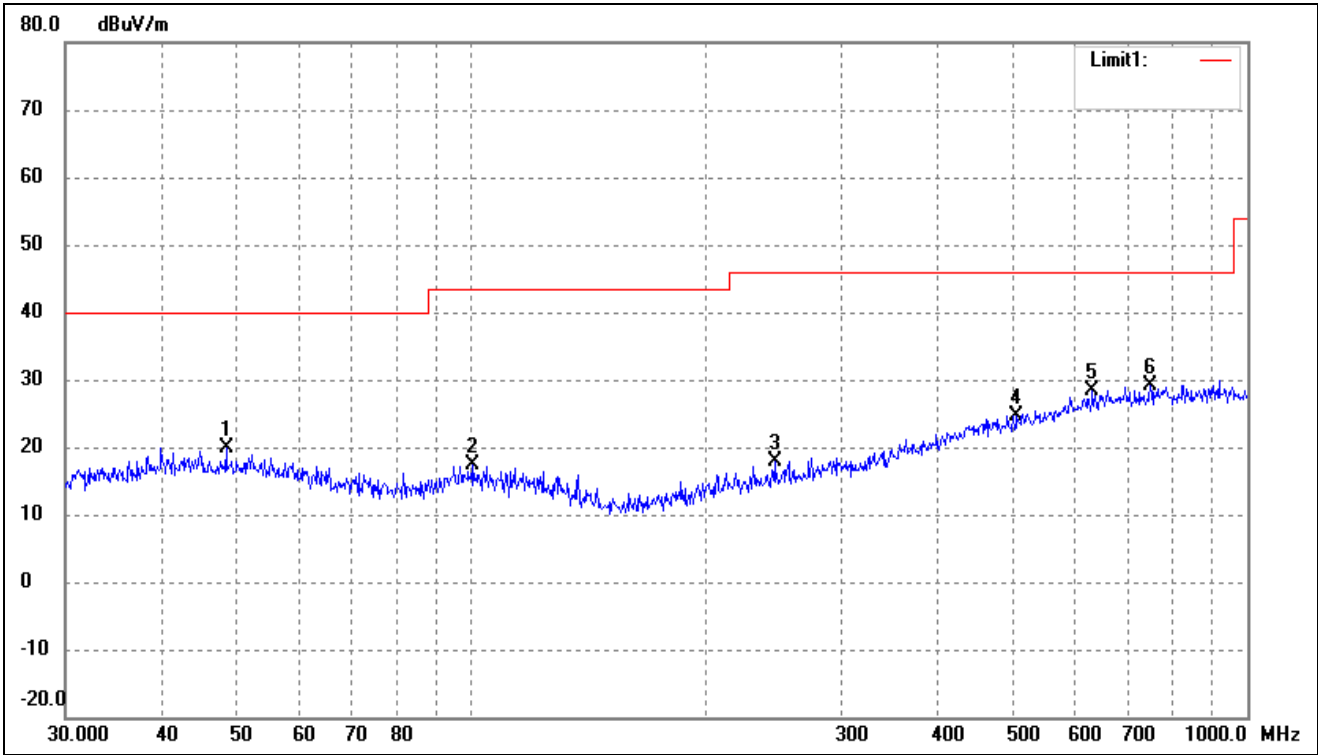

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	48.3318	26.89	-6.96	19.93	40.00	-20.07	-	-	peak
2	100.5806	26.04	-8.73	17.31	43.50	-26.19	-	-	peak
3	245.9509	26.21	-8.43	17.78	46.00	-28.22	-	-	peak
4	504.7062	25.85	-1.22	24.63	46.00	-21.37	-	-	peak
5	631.6884	27.73	0.72	28.45	46.00	-17.55	-	-	peak
6	750.1083	27.36	1.76	29.12	46.00	-16.88	-	-	peak


➤ 5725-5850MHz

802.11a(worst case)			
Test Channel	5745MHz	Polarity:	Horizontal

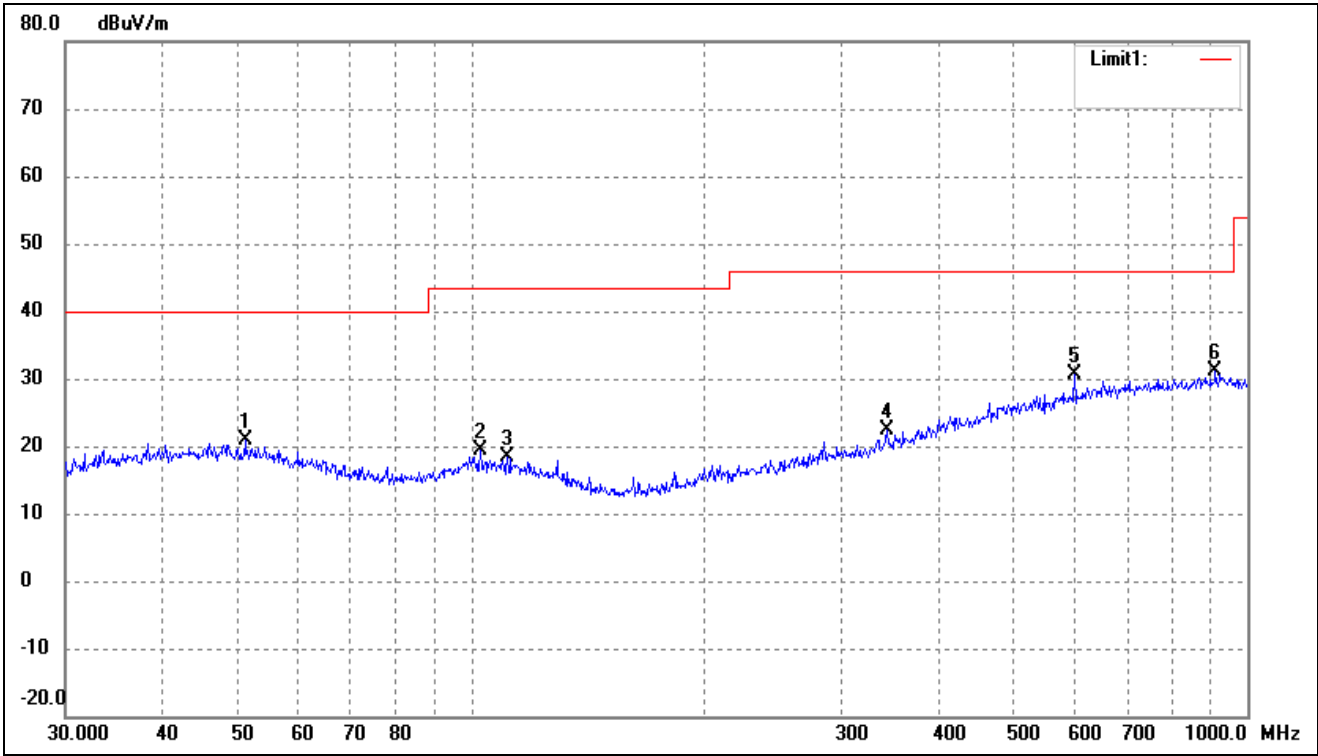


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	51.1209	28.01	-7.12	20.89	40.00	-19.11	-	-	peak
2	102.7192	28.04	-8.77	19.27	43.50	-24.23	-	-	peak
3	111.3468	27.45	-8.97	18.48	43.50	-25.02	-	-	peak
4	343.1800	27.99	-5.62	22.37	46.00	-23.63	-	-	peak
5	599.3213	30.16	0.36	30.52	46.00	-15.48	-	-	peak
6	909.6667	28.35	2.72	31.07	46.00	-14.93	-	-	peak

802.11a(worst case)			
Test Channel	5745MHz	Polarity:	Vertical

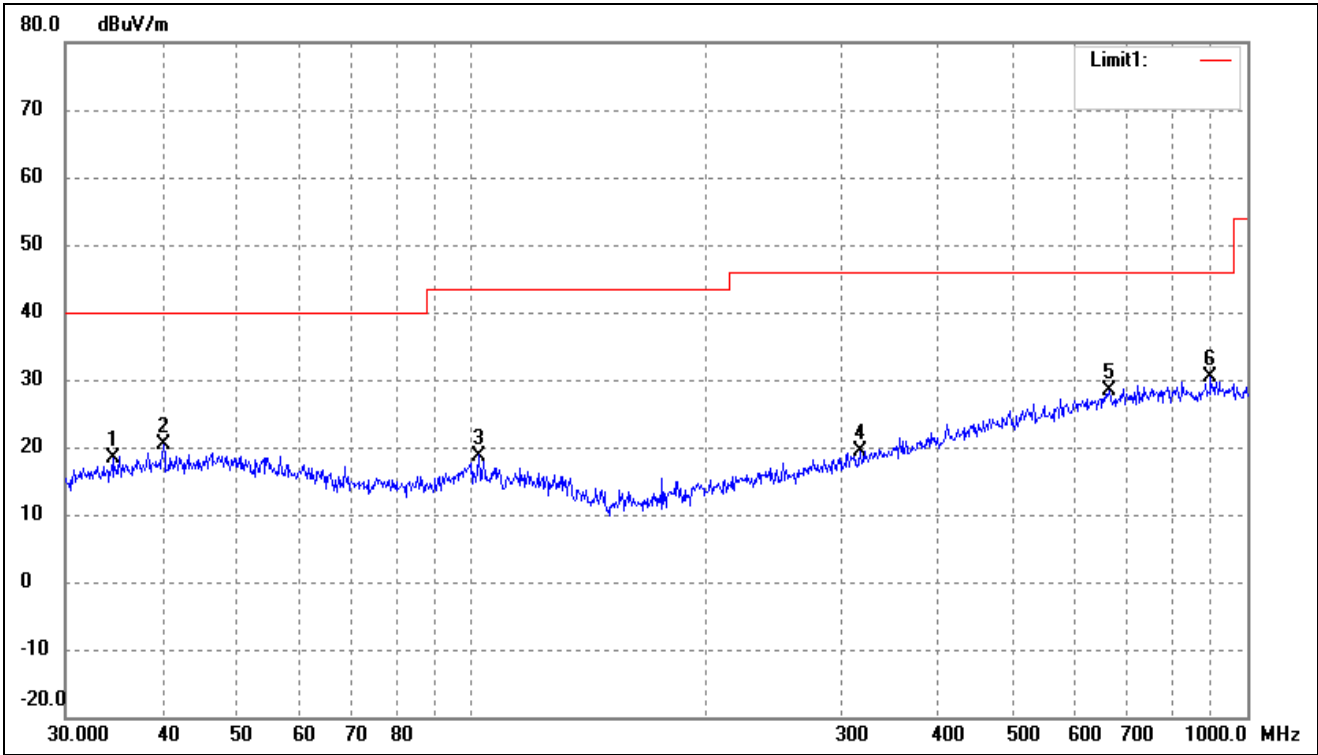


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	34.5173	26.83	-8.34	18.49	40.00	-21.51	-	-	peak
2	40.1347	27.40	-7.00	20.40	40.00	-19.60	-	-	peak
3	102.3597	27.52	-8.77	18.75	43.50	-24.75	-	-	peak
4	316.5890	25.91	-6.44	19.47	46.00	-26.53	-	-	peak
5	663.4729	27.23	1.06	28.29	46.00	-17.71	-	-	peak
6	896.9965	27.65	2.73	30.38	46.00	-15.62	-	-	peak

802.11a(worst case)			
Test Channel	5785MHz	Polarity:	Horizontal

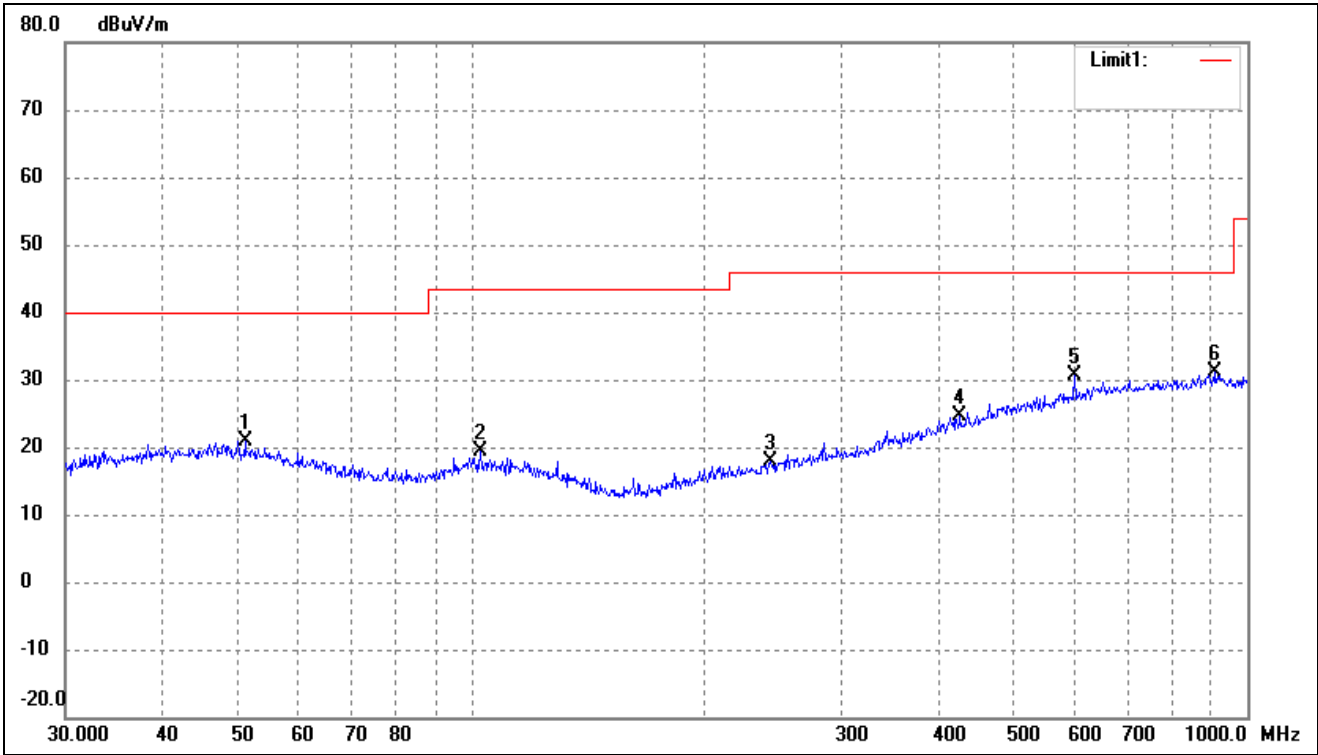


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	51.1209	28.01	-7.12	20.89	40.00	-19.11	-	-	peak
2	102.7192	28.04	-8.77	19.27	43.50	-24.23	-	-	peak
3	243.3772	26.33	-8.50	17.83	46.00	-28.17	-	-	peak
4	426.5210	27.80	-3.18	24.62	46.00	-21.38	-	-	peak
5	599.3213	30.36	0.36	30.72	46.00	-15.28	-	-	peak
6	909.6667	28.35	2.72	31.07	46.00	-14.93	-	-	peak

802.11a(worst case)			
Test Channel	5785MHz	Polarity:	Vertical

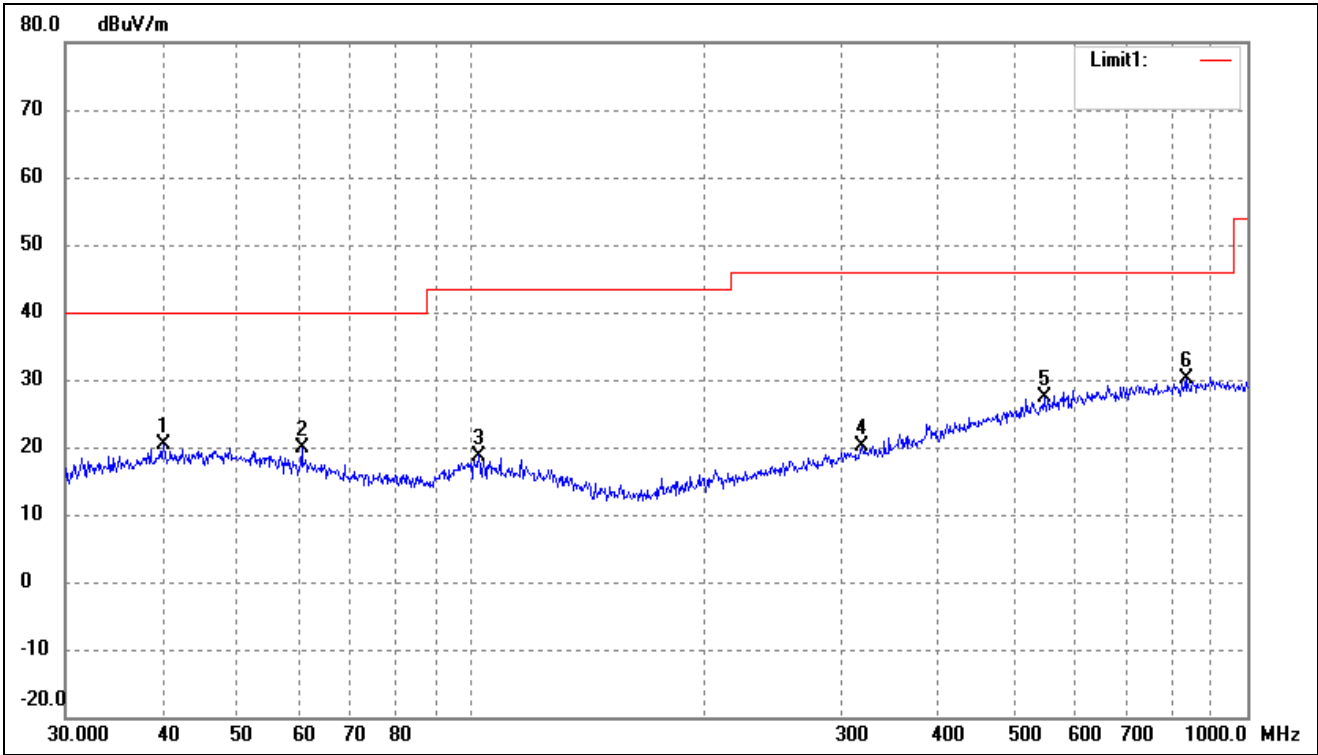


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	40.1347	27.40	-7.00	20.40	40.00	-19.60	-	-	peak
2	60.4919	28.29	-8.51	19.78	40.00	-20.22	-	-	peak
3	102.3597	27.52	-8.77	18.75	43.50	-24.75	-	-	peak
4	318.8170	26.42	-6.37	20.05	46.00	-25.95	-	-	peak
5	547.0977	27.83	-0.52	27.31	46.00	-18.69	-	-	peak
6	833.3171	27.76	2.29	30.05	46.00	-15.95	-	-	peak

802.11a(worst case)			
Test Channel	5825MHz	Polarity:	Horizontal

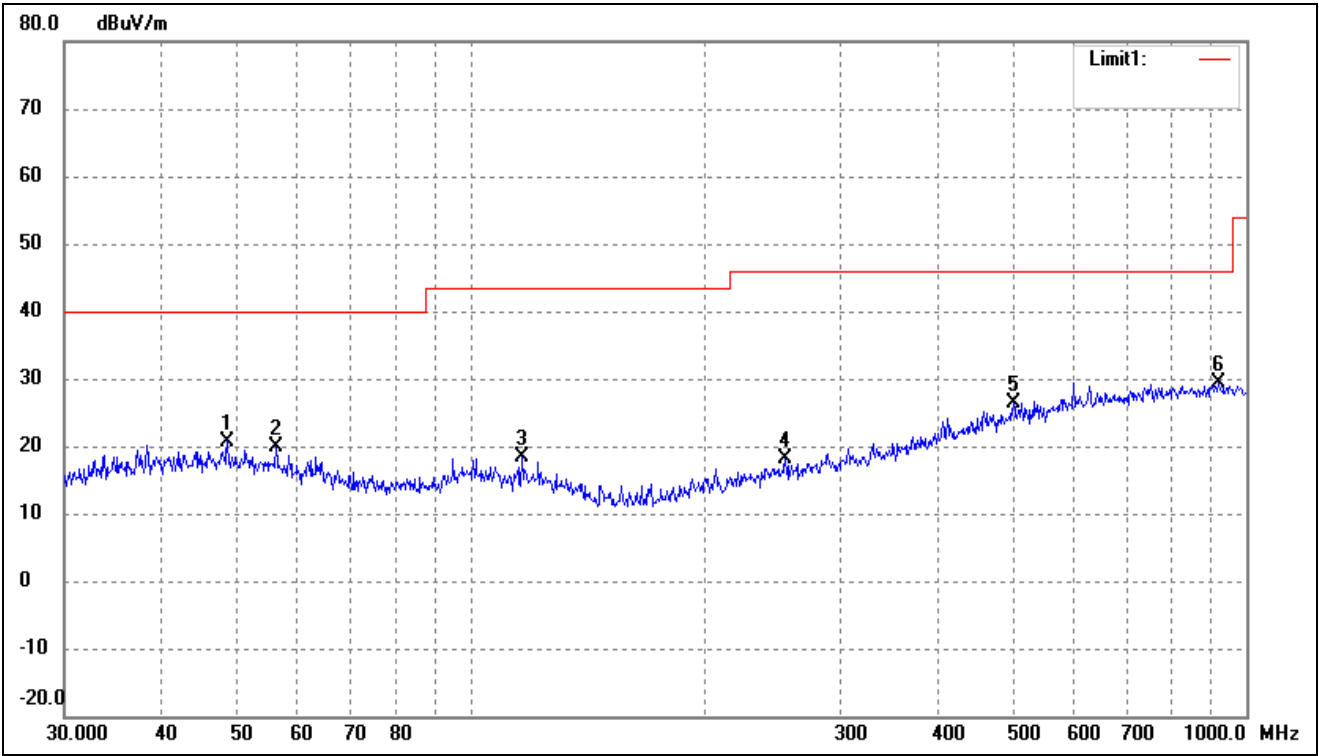

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	48.6719	27.72	-6.97	20.75	40.00	-19.25	-	-	peak
2	56.1974	27.77	-7.88	19.89	40.00	-20.11	-	-	peak
3	116.5401	27.70	-9.34	18.36	43.50	-25.14	-	-	peak
4	254.7284	26.36	-8.19	18.17	46.00	-27.83	-	-	peak
5	501.1790	27.71	-1.28	26.43	46.00	-19.57	-	-	peak
6	919.2866	26.73	2.69	29.42	46.00	-16.58	-	-	peak

802.11a(worst case)			
Test Channel	5825MHz	Polarity:	Vertical

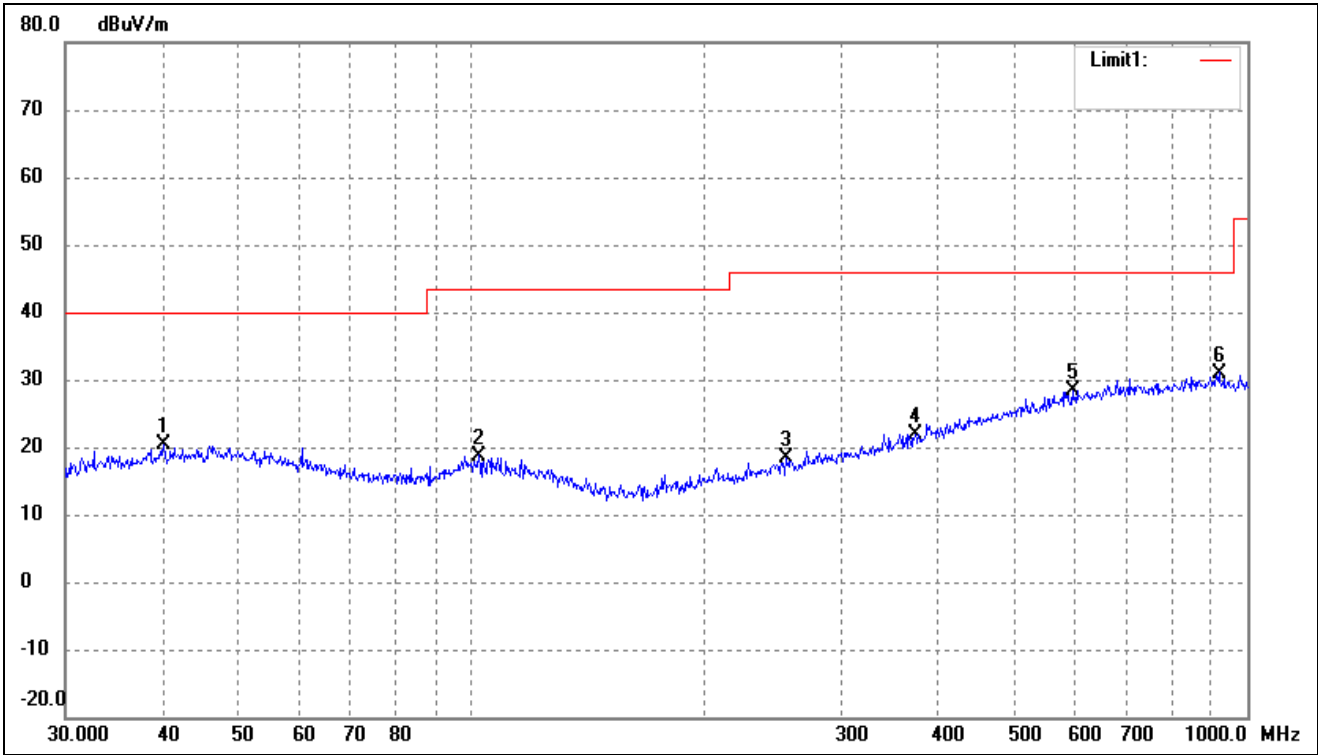


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	40.1347	27.40	-7.00	20.40	40.00	-19.60	-	-	peak
2	102.3597	27.52	-8.77	18.75	43.50	-24.75	-	-	peak
3	254.7284	26.50	-8.19	18.31	46.00	-27.69	-	-	peak
4	373.3112	26.62	-4.69	21.93	46.00	-24.07	-	-	peak
5	595.1329	28.13	0.29	28.42	46.00	-17.58	-	-	peak
6	919.2866	28.31	2.69	31.00	46.00	-15.00	-	-	peak

Remark: ‘-’Means’ the test Degree and Height are not recorded by the test software and only show the worst case in the test report.


➤ Spurious Emission above 1GHz

802.11a- Restricted Bandedge (worst case)			
Test Channel	band 4.50-5.15GHz	Polarity:	Horizontal (worst case)

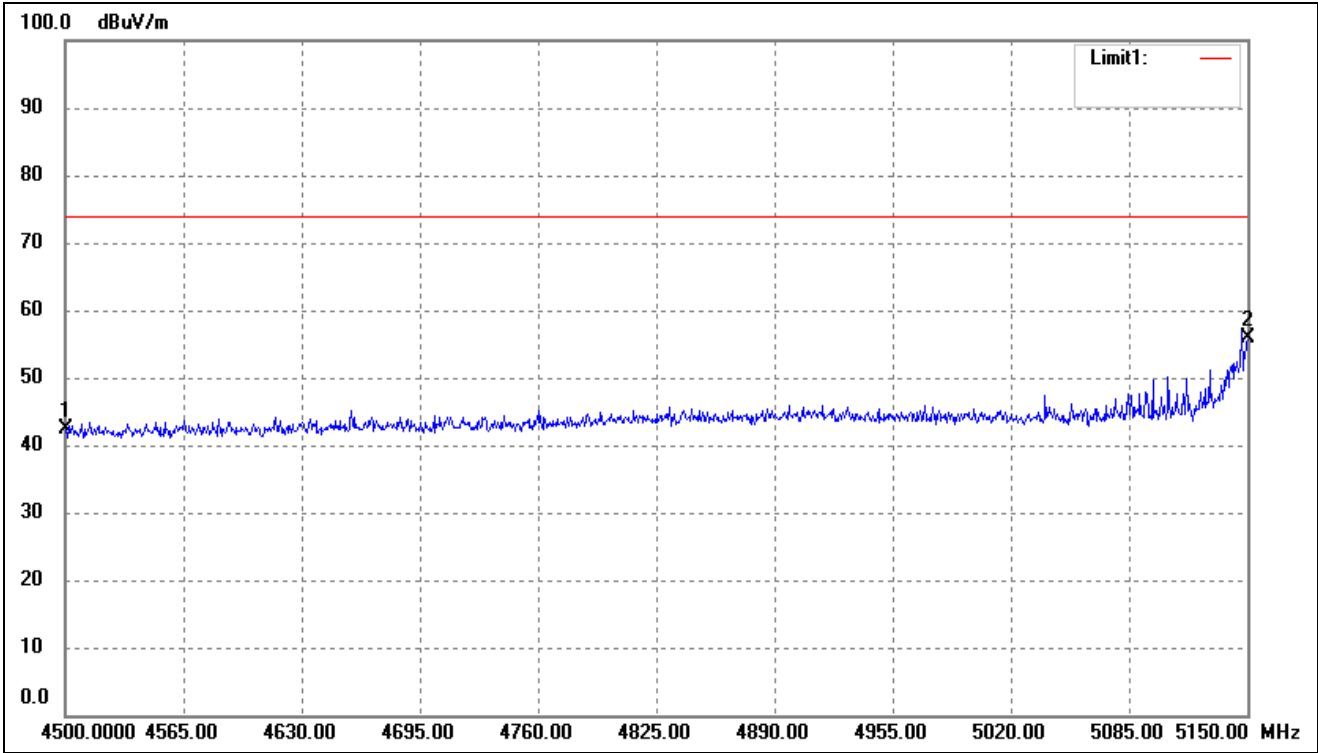

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	4500.000	49.36	-6.92	42.44	74.00	-31.56	-	-	peak
2	5150.000	61.15	-5.33	55.82	74.00	-18.18	-	-	peak

802.11a- Restricted Bandedge (worst case)			
Test Channel	band 4.50-5.15GHz	Polarity:	Horizontal (worst case)

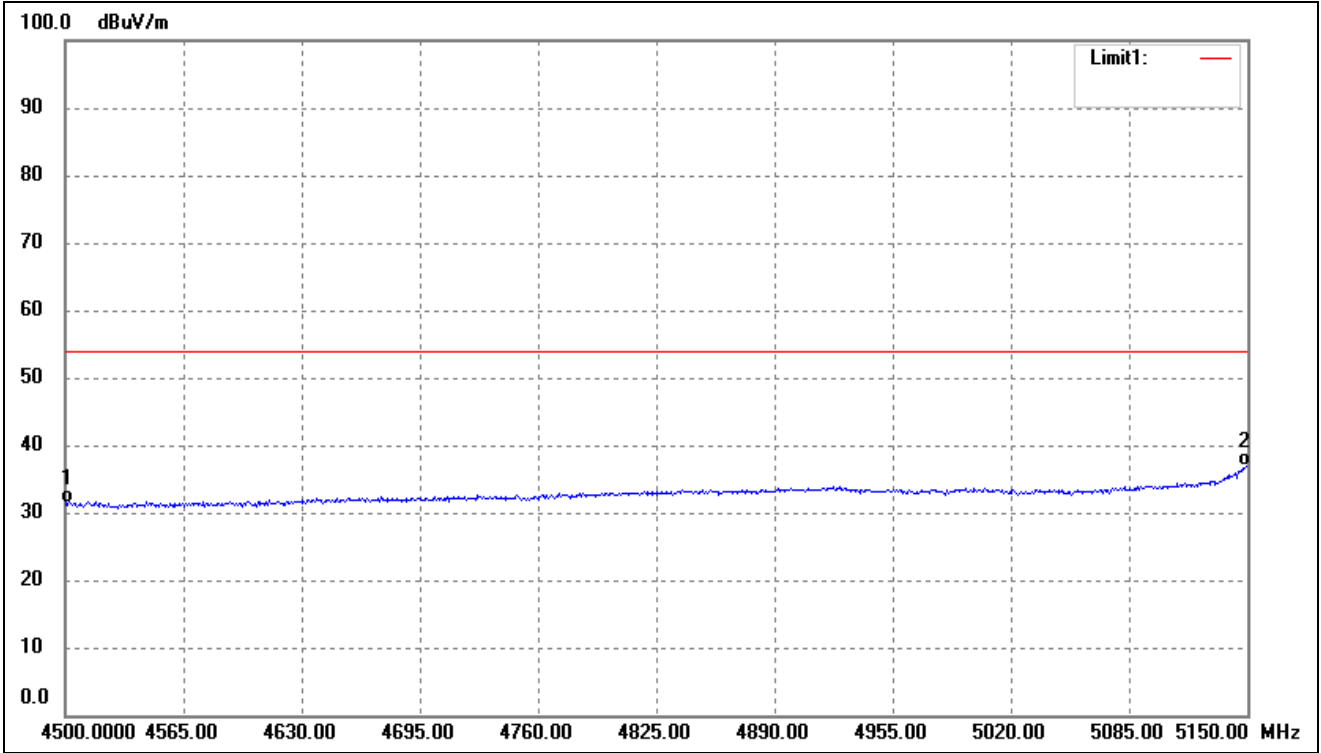

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	4500.000	38.42	-6.92	31.50	54.00	-22.50	-	-	AVG
2	5150.000	42.14	-5.33	36.81	54.00	-17.19	-	-	AVG

Note: The Restricted Bandedge was tested in Horizontal /Vertical and the worst case position data was reported.

Remark: ‘-’Means’ the test Degree and Height is not recorded by the test software and only show the worst case in the test report.

- For the frequency band 5.15-5.25GHz, 5.725-5.850GHz (802.11a)
- Harmonics And Spurious Emissions

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5180MHz)							
10360	61.22	7.11	68.33	74	-5.67	H	PK
15540	37.63	8.22	45.85	54	-8.15	H	AV
10360	58.34	7.11	65.45	74	-8.55	V	PK
15540	37.84	8.22	46.06	54	-7.94	V	AV
Middle Channel (5200MHz)							
10400	56.86	7.22	64.08	74	-9.92	H	PK
15600	33.99	8.67	42.66	54	-11.34	H	AV
10400	57.09	7.22	64.31	74	-9.69	V	PK
15600	37.68	8.67	46.35	54	-7.65	V	AV
High Channel (5240MHz)							
10480	58.20	7.69	65.89	74	-8.11	H	PK
15720	36.37	8.93	45.30	54	-8.70	H	AV
10480	58.41	7.69	66.10	74	-7.90	V	PK
15720	38.97	8.93	47.90	54	-6.10	V	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5745MHz)							
10520	55.51	9.45	64.96	74	-9.04	H	PK
15780	37.03	10.36	47.39	54	-6.61	H	AV
10520	54.77	9.45	64.22	74	-9.78	V	PK
15780	34.46	10.36	44.82	54	-9.18	V	AV
Middle Channel (5785MHz)							
10560	59.13	9.62	68.75	74	-5.25	H	PK
15840	34.62	10.67	45.29	54	-8.71	H	AV
10560	55.94	9.62	65.56	74	-8.44	V	PK
15840	34.84	10.67	45.51	54	-8.49	V	AV
High Channel (5825MHz)							
10640	57.63	9.84	67.47	74	-6.53	H	PK
15960	32.41	10.95	43.36	54	-10.64	H	AV
10640	54.08	9.84	63.92	74	-10.08	V	PK
15960	36.67	10.95	47.62	54	-6.38	V	AV

➤ Out of Band edge for 5150-5250MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-37.04	-27
Highest	Above 5350	-43.17	-27
Note: the data just list the worst cases			

➤ Out of Band edge for 5725-5850MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5715	-35.75	-27
	5715 to 5725	-39.28	-17
Highest	5850 to 5860	-41.65	-17
	Above 5860	-43.09	-27
Note: the data just list the worst cases			

- For the frequency band 5.15-5.25GHz, 5.725-5.850GHz (802.11n HT20)
- Harmonics And Spurious Emissions

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5180MHz)							
10360	57.08	7.11	64.19	74	-9.81	H	PK
15540	39.81	8.22	48.03	54	-5.97	H	AV
10360	60.78	7.11	67.89	74	-6.11	V	PK
15540	40.39	8.22	48.61	54	-5.39	V	AV
Middle Channel (5200MHz)							
10400	59.04	7.22	66.26	74	-7.74	H	PK
15600	34.12	8.67	42.79	54	-11.21	H	AV
10400	56.94	7.22	64.16	74	-9.84	V	PK
15600	34.63	8.67	43.30	54	-10.70	V	AV
High Channel (5240MHz)							
10480	54.33	7.69	62.02	74	-11.98	H	PK
15720	39.04	8.93	47.97	54	-6.03	H	AV
10480	58.78	7.69	66.47	74	-7.53	V	PK
15720	37.26	8.93	46.19	54	-7.81	V	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5745MHz)							
11490	58.93	9.45	68.38	74	-5.62	H	PK
17235	34.84	10.36	45.20	54	-8.80	H	AV
11490	58.15	9.45	67.60	74	-6.40	V	PK
17235	35.25	10.36	45.61	54	-8.39	V	AV
Middle Channel (5785MHz)							
11570	56.84	9.62	66.46	74	-7.54	H	PK
17355	35.15	10.67	45.82	54	-8.18	H	AV
11570	54.21	9.62	63.83	74	-10.17	V	PK
17355	37.00	10.67	47.67	54	-6.33	V	AV
High Channel (5825MHz)							
11650	57.79	9.84	67.63	74	-6.37	H	PK
17475	33.56	10.95	44.51	54	-9.49	H	AV
11650	53.72	9.84	63.56	74	-10.44	V	PK
17475	36.03	10.95	46.98	54	-7.02	V	AV

➤ Out of Band edge 5150-5250MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-30.82	-27
Highest	Above 5350	-39.40	-27
Note: the data just list the worst cases			

➤ Out of Band edge for 5725-5850MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5715	-46.27	-27
	5715 to 5725	-33.25	-17
Highest	5850 to 5860	-34.77	-17
	Above 5860	-40.82	-27
Note: the data just list the worst cases			

Note: this EUT was tested in the low, high channel and the worst case position data was reported.

- For the frequency band 5.15-5.25GHz, 5.725-5.850GHz (802.11n HT40)
- Harmonics And Spurious Emissions

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5190MHz)							
10380	56.42	7.25	63.67	74	-10.33	H	PK
15570	37.28	8.33	45.61	54	-8.39	H	AV
10380	56.11	7.25	63.36	74	-10.64	V	PK
15570	36.47	8.33	44.80	54	-9.20	V	AV
High Channel (5230MHz)							
10460	58.56	7.54	66.10	74	-7.90	H	PK
15690	36.59	8.86	45.45	54	-8.55	H	AV
10460	58.83	7.54	66.37	74	-7.63	V	PK
15690	35.27	8.86	44.13	54	-9.87	V	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5755MHz)							
11510	56.00	9.65	65.65	74	-8.35	H	PK
17265	35.30	10.87	46.17	54	-7.83	H	AV
11510	55.12	9.65	64.77	74	-9.23	V	PK
17265	31.93	10.87	42.80	54	-11.20	V	AV
High Channel (5795MHz)							
11590	53.79	9.81	63.60	74	-10.40	H	PK
17385	33.32	10.89	44.21	54	-9.79	H	AV
11590	53.78	9.81	63.59	74	-10.41	V	PK
17385	34.90	10.89	45.79	54	-8.21	V	AV

➤ Out of Band edge for 5150-5250MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-38.30	-27
Highest	Above 5350	-43.10	-27
Note: the data just list the worst cases			

➤ Out of Band edge for 5725-5850MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5715	-43.15	-27
	5715 to 5725	-38.97	-17
Highest	5850 to 5860	-47.11	-17
	Above 5860	-38.90	-27
Note: the data just list the worst cases			

- For the frequency band 5.15-5.25GHz, 5.725-5.850GHz (802.11ac VH80)
- Harmonics And Spurious Emissions

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
5210MHz							
10420	54.59	7.58	62.17	74	-11.83	H	PK
10420	34.96	8.67	43.63	54	-10.37	H	AV
10420	57.83	7.58	65.41	74	-8.59	H	PK
10420	34.34	8.67	43.01	54	-10.99	H	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
5775MHz							
11550	55.50	9.87	65.37	74	-8.63	H	PK
11550	34.08	11.02	45.10	54	-8.90	H	AV
11550	56.08	9.87	65.95	74	-8.05	V	PK
11550	32.37	11.02	43.39	54	-10.61	V	AV

- Out of Band edge for 5150-5250MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-40.65	-27
Highest	Above 5350	-44.49	-27
Note: the data just list the worst cases			

- Out of Band edge for 5725-5850MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5715	-40.58	-27
	5715 to 5725	-39.40	-17
Highest	5850 to 5860	-44.13	-17
	Above 5860	-42.38	-27
Note: the data just list the worst cases			

Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics, other than listed in the table above are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

9. Frequency Stability

9.1 Standard Applicable

According to §15.407(g), manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the users manual.

9.2 Test Procedure

According to §2.1055, the following test procedure was performed.

The Frequency Stability is measured directly with a Frequency Domain Analyzer. Frequency Deviation in ppm is calculated from the measured peak to peak value.

The Carrier Frequency Stability over Power Supply Voltage and over Temperature is measured with a Frequency Domain Analyzer in histogram mode.

9.3 Summary of Test Results/Plots

Please refer to Appendix D

10. Conducted Emissions


10.1 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40cm long in the middle.

The spacing between the peripherals was 10cm.

10.2 Basic Test Setup Block Diagram

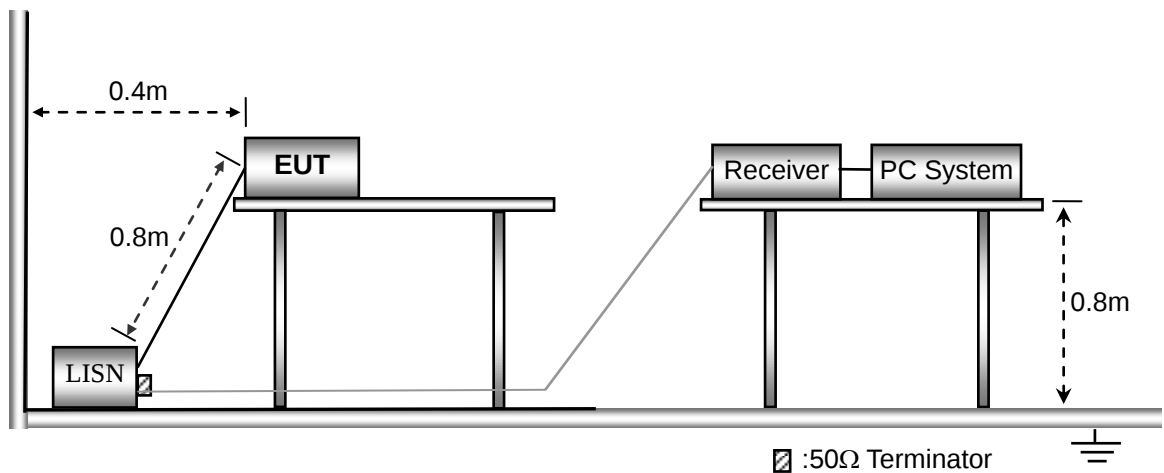


10.3 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:

Start Frequency	150kHz
Stop Frequency	30MHz
Sweep Speed	Auto
IF Bandwidth.....	10kHz
Quasi-Peak Adapter Bandwidth	9kHz
Quasi-Peak Adapter Mode	Normal


10.4 Summary of Test Results/Plots

Test Mode	Communication	AC120V 60Hz	Polarity:	Neutral
-----------	---------------	-------------	-----------	---------

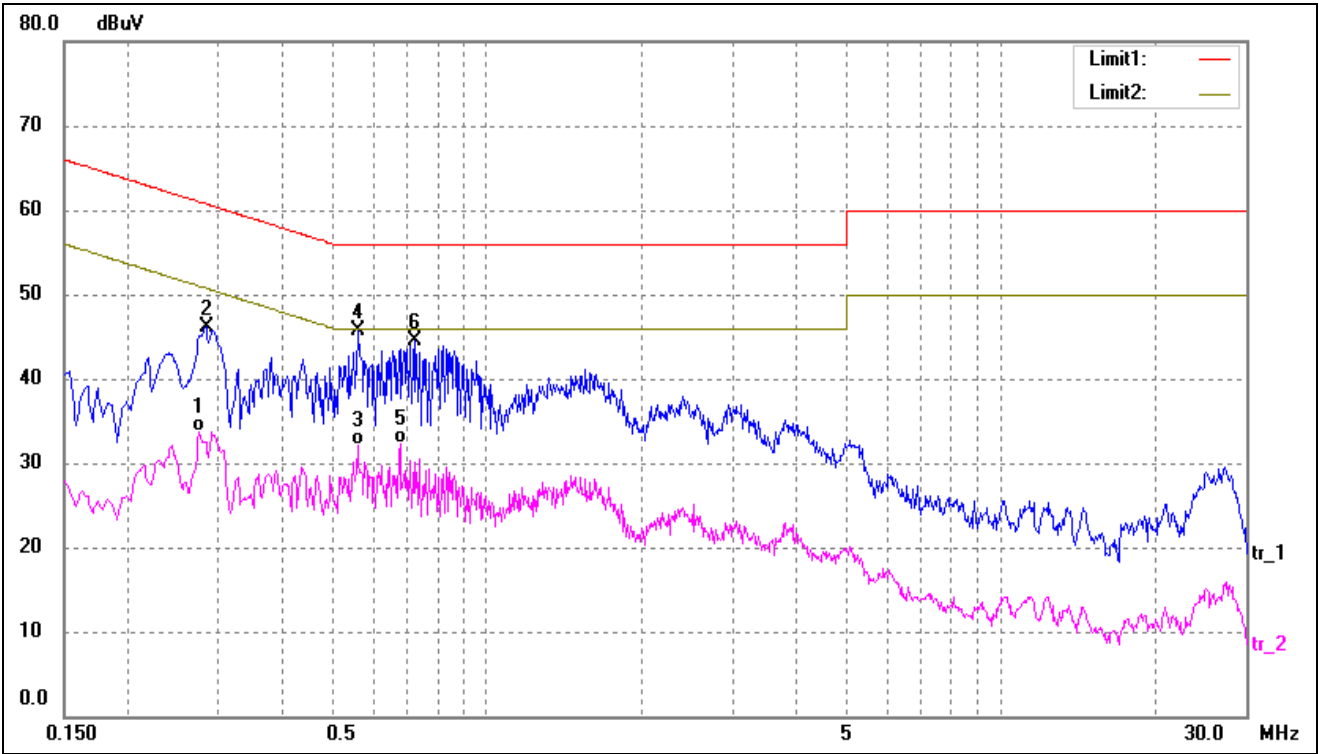

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.2740	23.39	10.35	33.74	50.99	-17.25	AVG
2	0.2819	35.79	10.34	46.13	60.76	-14.63	peak
3	0.5580	21.76	10.29	32.05	46.00	-13.95	AVG
4*	0.5620	35.32	10.30	45.62	56.00	-10.38	peak
5	0.6780	21.96	10.37	32.33	46.00	-13.67	AVG
6	0.7220	34.08	10.39	44.47	56.00	-11.53	peak

Test Mode	Communication	AC120V 60Hz	Polarity:	Line
-----------	---------------	-------------	-----------	------

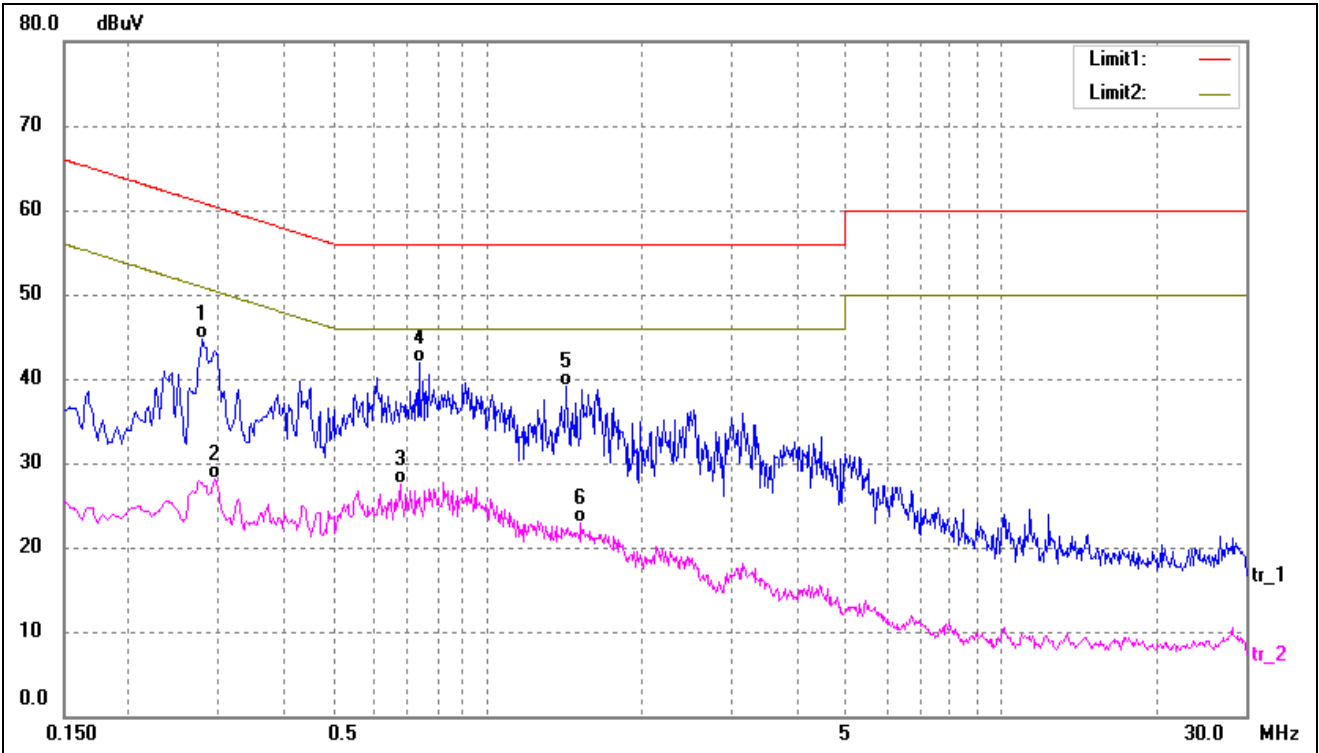

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.2779	34.38	10.34	44.72	60.88	-16.16	QP
2	0.2940	17.79	10.34	28.13	50.41	-22.28	AVG
3	0.6780	17.05	10.37	27.42	46.00	-18.58	AVG
4*	0.7380	31.49	10.40	41.89	56.00	-14.11	QP
5	1.4220	28.70	10.38	39.08	56.00	-16.92	QP
6	1.5260	12.49	10.33	22.82	46.00	-23.18	AVG

APPENDIX SUMMARY

Project No.	WTH22X06122763W	Test Engineer	BAIdi
Start date	2022/6/22	Finish date	2022/6/24
Temperature	23℃	Humidity	55%
RF specifications	5G-WIFI		

APPENDIX	Description of Test Item	Result
A	Power Spectral Density	Compliant
B	Emission Bandwidth and Occupied Bandwidth	Compliant
C	Maximum Conducted Output Power	Compliant
D	Frequency Stability	Compliant

APPENDIX A

Power Spectral Density			
U-NII-1:5150-5250MHz			
Operating mode	Test Channel	Power Spectral Density dBm/MHz	Limit (dBm/MHz)
802.11a	5180	6.636	11
	5200	6.532	11
	5240	5.586	11
802.11n-HT20	5180	5.535	11
	5200	5.808	11
	5240	5.800	11
802.11n-HT40	5190	2.44	11
	5230	2.346	11
802.11ac-HT80	5210	0.67	11

U-NII-3: 5725-5850MHz					
Operating mode	Test Channel	Power Spectral Density dBm/300kHz	Factor	Power Spectral Density* dBm/500kHz	Limit dBm/500kHz
802.11a	5745	4.868	2.22	7.088	30
	5785	3.893	2.22	6.113	30
	5825	3.786	2.22	6.006	30
802.11n-HT20	5745	4.700	2.22	6.92	30
	5785	5.653	2.22	7.873	30
	5825	4.330	2.22	6.55	30
802.11n HT40	5755	2.049	2.22	4.269	30
	5795	2.093	2.22	4.313	30
802.11ac VH80	5775	-1.068	2.22	1.152	30
*Note: Maximum PSD=PSD(dBm/300kHz)+10log(500kHz/300kHz)=2.22					

5150-5250MHz

802.11a-Low	Agilent R T Ref 20 dBm Atten 30 dB Mkr1 5.17804 GHz 6.636 dBm #Avg Log 10 dB/ Offst 1 dB M1 S2 S3 FC AA Center 5.18 GHz Span 40 MHz #Res BW 1 MHz #VBW 3 MHz Sweep 20 ms (1001 pts) Peak Search Meas Tools ▶ Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2
802.11a-Middle	Agilent R T Ref 20 dBm Atten 30 dB Mkr1 5.20080 GHz 6.532 dBm #Avg Log 10 dB/ Offst 1 dB M1 S2 S3 FC AA Marker 5.200800000 GHz 6.532 dBm Center 5.2 GHz Span 40 MHz #Res BW 1 MHz #VBW 3 MHz Sweep 20 ms (1001 pts) Peak Search Meas Tools ▶ Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2
802.11a-High	Agilent R T Ref 20 dBm Atten 30 dB Mkr1 5.24204 GHz 5.586 dBm #Avg Log 10 dB/ Offst 1 dB M1 S2 S3 FC AA Marker 5.242040000 GHz 5.586 dBm Center 5.24 GHz Span 40 MHz #Res BW 1 MHz #VBW 3 MHz Sweep 20 ms (1001 pts) Peak Search Meas Tools ▶ Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2

802.11n-HT20-Low	Agilent Ref 20 dBm Atten 30 dB Mkr1 5.18088 GHz 5.535 dBm #Avg Log 10 dB/ Offst 1 dB M1 S2 S3 FC AA Marker 5.180880000 GHz 5.535 dBm Center 5.18 GHz #Res BW 1 MHz #VBW 3 MHz Sweep 20 ms (1001 pts) Span 40 MHz Peak Search Meas Tools ▶ Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2
802.11n-HT20-Middle	Agilent Ref 20 dBm Atten 30 dB Mkr1 5.19852 GHz 5.808 dBm #Avg Log 10 dB/ Offst 1 dB M1 S2 S3 FC AA Marker 5.198520000 GHz 5.808 dBm Center 5.2 GHz #Res BW 1 MHz #VBW 3 MHz Sweep 20 ms (1001 pts) Span 40 MHz Peak Search Meas Tools ▶ Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2
802.11n-HT20-High	Agilent Ref 20 dBm Atten 30 dB Mkr1 5.23872 GHz 5.8 dBm #Avg Log 10 dB/ Offst 1 dB M1 S2 S3 FC AA Marker 5.238720000 GHz 5.8 dBm Center 5.24 GHz #Res BW 1 MHz #VBW 3 MHz Sweep 20 ms (1001 pts) Span 40 MHz Peak Search Meas Tools ▶ Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2

802.11n-HT40-Low	Agilent Ref 20 dBm Atten 30 dB Mkr1 5.18664 GHz 2.44 dBm #Avg Log 10 dB/ Offset 1 dB M1 S2 S3 FC AA Marker 5.186640000 GHz 2.44 dBm Center 5.19 GHz Res BW 1 MHz VBW 3 MHz Sweep 20 ms (1001 pts) Span 80 MHz Peak Search Meas Tools Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2
802.11n-HT40-High	Agilent Ref 20 dBm Atten 30 dB Mkr1 5.23128 GHz 2.346 dBm #Avg Log 10 dB/ Offset 1 dB M1 S2 S3 FC AA Marker 5.231280000 GHz 2.346 dBm Center 5.23 GHz Res BW 1 MHz VBW 3 MHz Sweep 20 ms (1001 pts) Span 80 MHz Peak Search Meas Tools Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2
802.11ac-HT80-Low	Agilent Ref 20 dBm Atten 30 dB Mkr1 5.20504 GHz 0.67 dBm #Avg Log 10 dB/ Offset 1 dB M1 S2 S3 FC AA Marker 5.205040000 GHz 0.67 dBm Center 5.21 GHz Res BW 1 MHz VBW 3 MHz Sweep 20 ms (1001 pts) Span 160 MHz Peak Search Meas Tools Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2

5725-5850MHz

802.11a-Low	Agilent Ref 20 dBm Atten 30 dB Mkr1 5.74264 GHz 4.868 dBm #Avg Log 10 dB/ Offst 1 dB M1 S2 S3 FC AA Marker 5.742640000 GHz 4.868 dBm Center 5.745 GHz #Res BW 1 MHz VBW 3 MHz Sweep 20 ms (1001 pts) Span 40 MHz Peak Search Meas Tools Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2
802.11a-Middle	Agilent Ref 20 dBm Atten 30 dB Mkr1 5.78472 GHz 3.893 dBm #Avg Log 10 dB/ Offst 1 dB M1 S2 S3 FC AA Marker 5.784720000 GHz 3.893 dBm Center 5.785 GHz #Res BW 1 MHz VBW 3 MHz Sweep 20 ms (1001 pts) Span 40 MHz Peak Search Meas Tools Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2
802.11a-High	Agilent Ref 20 dBm Atten 30 dB Mkr1 5.82664 GHz 3.786 dBm #Avg Log 10 dB/ Offst 1 dB M1 S2 S3 FC AA Marker 5.826640000 GHz 3.786 dBm Center 5.825 GHz #Res BW 1 MHz VBW 3 MHz Sweep 20 ms (1001 pts) Span 40 MHz Peak Search Meas Tools Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2

802.11n-HT20-Low	Agilent Ref 20 dBm Atten 30 dB Mkr1 5.74360 GHz 4.7 dBm #Avg Log 10 dB/ Offst 1 dB M1 S2 S3 FC AA Marker 5.74360000 GHz 4.7 dBm Center 5.745 GHz #Res BW 1 MHz VBW 3 MHz Sweep 20 ms (1001 pts) Span 40 MHz Peak Search Meas Tools Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2
802.11n-HT20-Middle	Agilent Ref 20 dBm Atten 30 dB Mkr1 5.78700 GHz 5.653 dBm #Avg Log 10 dB/ Offst 1 dB M1 S2 S3 FC AA Marker 5.78700000 GHz 5.653 dBm Center 5.785 GHz #Res BW 1 MHz VBW 3 MHz Sweep 20 ms (1001 pts) Span 40 MHz Peak Search Meas Tools Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2
802.11n-HT20-High	Agilent Ref 20 dBm Atten 30 dB Mkr1 5.82712 GHz 4.33 dBm #Avg Log 10 dB/ Offst 1 dB M1 S2 S3 FC AA Marker 5.82712000 GHz 4.33 dBm Center 5.825 GHz #Res BW 1 MHz VBW 3 MHz Sweep 20 ms (1001 pts) Span 40 MHz Peak Search Meas Tools Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2

802.11n-HT40-Low	Agilent Ref 20 dBm Atten 30 dB Mkr1 5.75316 GHz 2.049 dBm #Avg Log 10 dB/ Offset 1 dB M1 S2 S3 FC AA Marker 5.753160000 GHz 2.049 dBm Center 5.755 GHz #Res BW 1 MHz VBW 3 MHz Sweep 20 ms (1001 pts) Span 80 MHz Peak Search Meas Tools ▶ Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2
802.11n-HT40-High	Agilent Ref 20 dBm Atten 30 dB Mkr1 5.79996 GHz 2.093 dBm #Avg Log 10 dB/ Offset 1 dB M1 S2 S3 FC AA Marker 5.799960000 GHz 2.093 dBm Center 5.795 GHz #Res BW 1 MHz VBW 3 MHz Sweep 20 ms (1001 pts) Span 80 MHz Peak Search Meas Tools ▶ Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2
802.11ac-HT80-Low	Agilent Ref 20 dBm Atten 30 dB Mkr1 5.77820 GHz -1.068 dBm #Avg Log 10 dB/ Offset 1 dB M1 S2 S3 FC AA Marker 5.77820 GHz -1.068 dBm Center 5.775 GHz Res BW 1 MHz VBW 3 MHz Sweep 20 ms (1001 pts) Span 160 MHz Peak Search Meas Tools ▶ Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2

APPENDIX B

Emission Bandwidth and Occupied Bandwidth

U-NII-1:5150-5250MHz				
Test Mode	Test Channel MHz	26 dB Bandwidth MHz	99% Bandwidth MHz	Limit MHz
802.11a	5180	20.214	16.7386	Pass
	5200	20.281	16.8210	Pass
	5240	20.221	16.6589	Pass
802.11n-HT20	5180	20.787	17.8212	Pass
	5200	20.665	17.7138	Pass
	5240	20.310	17.6781	Pass
802.11n-HT40	5190	40.420	35.9420	Pass
	5230	40.067	36.3513	Pass
802.11ac-HT80	5210	80.037	75.2079	Pass

U-NII-3: 5725-5850MHz				
Test Mode	Test Channel MHz	6 dB Bandwidth MHz	99% Bandwidth MHz	Limit MHz
802.11a	5745	16.339	16.7413	≥500
	5785	16.337	16.6233	≥500
	5825	16.332	16.6231	≥500
802.11n-HT20	5745	17.594	17.7296	≥500
	5785	17.579	17.7097	≥500
	5825	17.549	17.6878	≥500
802.11n-HT40	5755	36.097	36.4537	≥500
	5795	36.119	36.5815	≥500
802.11ac VH80	5775	76.209	75.1378	≥500

5150-5250MHz

802.11a-Low	Agilent Ch Freq 5.18 GHz Trig Free Occupied Bandwidth x dB -26.00 dB Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offst 1 dB Center 5.18 GHz #Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts) Span 40 MHz Occupied Bandwidth 16.7386 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB Transmit Freq Error 21.406 kHz x dB Bandwidth 20.214 MHz Trace/View Trace 1 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2
802.11a-Middle	Agilent Ch Freq 5.2 GHz Trig Free Occupied Bandwidth Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offst 1 dB Center 5.2 GHz #Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts) Span 40 MHz Occupied Bandwidth 16.8210 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB Transmit Freq Error 14.459 kHz x dB Bandwidth 20.281 MHz Trace/View Trace 1 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2
802.11a-High	Agilent Ch Freq 5.24 GHz Trig Free Occupied Bandwidth Center 5.240000000 GHz Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offst 1 dB Center 5.24 GHz #Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts) Span 40 MHz Occupied Bandwidth 16.6589 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB Transmit Freq Error -6.411 kHz x dB Bandwidth 20.221 MHz Trace/View Trace 1 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2

802.11n-HT20-Low	Agilent Ch Freq 5.18 GHz Trig Free Occupied Bandwidth Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offst 1 dB Center 5.18 GHz #Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts) Span 40 MHz Occupied Bandwidth 17.8212 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB Transmit Freq Error 10.912 kHz x dB Bandwidth 20.787 MHz Trace/View Trace 1 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2
802.11n-HT20-Middle	Agilent Ch Freq 5.2 GHz Trig Free Occupied Bandwidth Center 5.20000000 GHz Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offst 1 dB Center 5.2 GHz #Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts) Span 40 MHz Occupied Bandwidth 17.7138 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB Transmit Freq Error 22.454 kHz x dB Bandwidth 20.665 MHz Trace/View Trace 1 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2
802.11n-HT20-High	Agilent Ch Freq 5.24 GHz Trig Free Occupied Bandwidth Center 5.24000000 GHz Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offst 1 dB Center 5.24 GHz #Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts) Span 40 MHz Occupied Bandwidth 17.6781 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB Transmit Freq Error 6.405 kHz x dB Bandwidth 20.310 MHz Trace/View Trace 1 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2

802.11n-HT40-Low	Agilent Ch Freq 5.19 GHz Trig Free Occupied Bandwidth Span 80.00000000 MHz Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offst 1 dB Center 5.19 GHz #Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts) Span 80 MHz Occupied Bandwidth 35.9420 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB Transmit Freq Error 19.311 kHz x dB Bandwidth 40.420 MHz Trace/View Trace 1 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2
802.11n-HT40-High	Agilent Ch Freq 5.23 GHz Trig Free Occupied Bandwidth Center 5.230000000 GHz Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offst 1 dB Center 5.23 GHz #Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts) Span 80 MHz Occupied Bandwidth 35.9005 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB Transmit Freq Error 12.574 kHz x dB Bandwidth 40.067 MHz Trace/View Trace 1 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2
802.11ac-HT80-Low	Agilent Ch Freq 5.21 GHz Trig Free Occupied Bandwidth Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offst 1 dB Center 5.21 GHz #Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts) Span 160 MHz Occupied Bandwidth 75.2079 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB Transmit Freq Error 34.795 kHz x dB Bandwidth 80.037 MHz Trace/View Trace 1 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2

5725-5850MHz

802.11a-Low	Agilent Ch Freq 5.745 GHz Occupied Bandwidth Center 5.74500000 GHz Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offst 1 dB Center 5.745 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts) Span 40 MHz Occupied Bandwidth 16.3562 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error -9.760 kHz x dB Bandwidth 16.339 MHz Trace/View Trace Clear Write Max Hold Min Hold View Blank More
802.11a-Middle	Agilent Ch Freq 5.785 GHz Occupied Bandwidth Center 5.78500000 GHz Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offst 1 dB Center 5.785 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts) Span 40 MHz Occupied Bandwidth 16.3391 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error -5.637 kHz x dB Bandwidth 16.337 MHz Trace/View Trace Clear Write Max Hold Min Hold View Blank More
802.11a-High	Agilent Ch Freq 5.825 GHz Occupied Bandwidth Center 5.82500000 GHz Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offst 1 dB Center 5.825 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts) Span 40 MHz Occupied Bandwidth 16.3402 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error -18.951 kHz x dB Bandwidth 16.332 MHz Trace/View Trace Clear Write Max Hold Min Hold View Blank More

802.11n-HT20-Low	Agilent Ch Freq 5.745 GHz Trig Free Occupied Bandwidth Span 40.00000000 MHz Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offst 1 dB Center 5.745 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts) Span 40 MHz Occupied Bandwidth 17.5371 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error -5.769 kHz x dB Bandwidth 17.594 MHz Trace/View 1 Trace 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2
802.11n-HT20-Middle	Agilent Ch Freq 5.785 GHz Trig Free Occupied Bandwidth Center 5.78500000 GHz Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offst 1 dB Center 5.785 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts) Span 40 MHz Occupied Bandwidth 17.5326 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error -2.376 kHz x dB Bandwidth 17.579 MHz Trace/View 1 Trace 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2
802.11n-HT20-High	Agilent Ch Freq 5.825 GHz Trig Free Occupied Bandwidth Center 5.82500000 GHz Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offst 1 dB Center 5.825 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts) Span 40 MHz Occupied Bandwidth 17.5331 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error -6.665 kHz x dB Bandwidth 17.549 MHz Trace/View 1 Trace 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2

802.11n-HT40-Low	Agilent Ch Freq 5.755 GHz Trig Free Occupied Bandwidth Span 80.00000000 MHz Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offst 1 dB Center 5.755 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts) Span 80 MHz Occupied Bandwidth 35.8707 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error -47.334 kHz x dB Bandwidth 36.097 MHz Trace/View 1 Trace 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2
802.11n-HT40-High	Agilent Ch Freq 5.795 GHz Trig Free Occupied Bandwidth Center 5.79500000 GHz Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offst 1 dB Center 5.795 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts) Span 80 MHz Occupied Bandwidth 35.8638 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error -37.998 kHz x dB Bandwidth 36.119 MHz Trace/View 1 Trace 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2
802.11ac-HT80-Low	Agilent Ch Freq 5.775 GHz Trig Free Occupied Bandwidth VBW 300.0000000 kHz Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offst 1 dB Center 5.775 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 16.58 ms (1001 pts) Span 160 MHz Occupied Bandwidth 75.2057 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error -130.230 kHz x dB Bandwidth 76.209 MHz Trace/View 1 Trace 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2

99% Bandwidth MHz
5150-5250MHz

802.11a-Low	Agilent Ch Freq 5.18 GHz Occupied Bandwidth x dB -26.00 dB Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offset 1 dB Center 5.18 GHz #Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts) Span 40 MHz Occupied Bandwidth 16.7386 MHz Transmit Freq Error 21.406 kHz x dB Bandwidth 20.214 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB Trace/View Trace Clear Write Max Hold Min Hold View Blank More
802.11a-Middle	Agilent Ch Freq 5.2 GHz Occupied Bandwidth Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offset 1 dB Center 5.2 GHz #Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts) Span 40 MHz Occupied Bandwidth 16.8210 MHz Transmit Freq Error 14.459 kHz x dB Bandwidth 20.281 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB Trace/View Trace Clear Write Max Hold Min Hold View Blank More
802.11a-High	Agilent Ch Freq 5.24 GHz Occupied Bandwidth Center 5.240000000 GHz Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offset 1 dB Center 5.24 GHz #Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts) Span 40 MHz Occupied Bandwidth 16.6589 MHz Transmit Freq Error -6.411 kHz x dB Bandwidth 20.221 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB Trace/View Trace Clear Write Max Hold Min Hold View Blank More

802.11n-HT20-Low	Agilent Ch Freq 5.18 GHz Trig Free Occupied Bandwidth Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offst 1 dB Center 5.18 GHz #Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts) Span 40 MHz Occupied Bandwidth 17.8212 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB Transmit Freq Error 10.912 kHz x dB Bandwidth 20.787 MHz Trace/View Trace 1 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2
802.11n-HT20-Middle	Agilent Ch Freq 5.2 GHz Trig Free Occupied Bandwidth Center 5.20000000 GHz Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offst 1 dB Center 5.2 GHz #Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts) Span 40 MHz Occupied Bandwidth 17.7138 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB Transmit Freq Error 22.454 kHz x dB Bandwidth 20.665 MHz Trace/View Trace 1 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2
802.11n-HT20-High	Agilent Ch Freq 5.24 GHz Trig Free Occupied Bandwidth Center 5.24000000 GHz Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offst 1 dB Center 5.24 GHz #Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts) Span 40 MHz Occupied Bandwidth 17.6781 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB Transmit Freq Error 6.405 kHz x dB Bandwidth 20.310 MHz Trace/View Trace 1 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2

802.11n-HT40-Low	Agilent Ch Freq 5.19 GHz Trig Free Occupied Bandwidth Span 80.00000000 MHz Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offst 1 dB Center 5.19 GHz #Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts) Span 80 MHz Occupied Bandwidth 35.9420 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB Transmit Freq Error 19.311 kHz x dB Bandwidth 40.420 MHz Trace/View Trace 1 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2
802.11n-HT40-High	Agilent Ch Freq 5.23 GHz Trig Free Occupied Bandwidth Center 5.230000000 GHz Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offst 1 dB Center 5.23 GHz Res BW 1 MHz VBW 3 MHz Sweep 10 ms (1001 pts) Span 80 MHz Occupied Bandwidth 36.3513 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB Transmit Freq Error 89.367 kHz x dB Bandwidth 41.344 MHz Trace/View Trace 1 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2
802.11ac-HT80-Low	Agilent Ch Freq 5.21 GHz Trig Free Occupied Bandwidth Span 160 MHz Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offst 1 dB Center 5.21 GHz #Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts) Span 160 MHz Occupied Bandwidth 75.2079 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB Transmit Freq Error 34.795 kHz x dB Bandwidth 80.037 MHz Trace/View Trace 1 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2

5725-5850MHz

802.11a-Low	Agilent R T Ch Freq 5.745 GHz Trig Free Occupied Bandwidth Center 5.74500000 GHz Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offst 1 dB Center 5.745 GHz #Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts) Span 40 MHz Occupied Bandwidth 16.7413 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB Transmit Freq Error -22.089 kHz x dB Bandwidth 20.365 MHz Trace/View Trace 1 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2
802.11a-Middle	Agilent R T Ch Freq 5.785 GHz Trig Free Occupied Bandwidth Center 5.78500000 GHz Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offst 1 dB Center 5.785 GHz #Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts) Span 40 MHz Occupied Bandwidth 16.6233 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB Transmit Freq Error -9.740 kHz x dB Bandwidth 20.031 MHz Trace/View Trace 1 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2
802.11a-High	Agilent R T Ch Freq 5.825 GHz Trig Free Occupied Bandwidth Center 5.82500000 GHz Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offst 1 dB Center 5.825 GHz #Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts) Span 40 MHz Occupied Bandwidth 16.6231 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB Transmit Freq Error 11.912 kHz x dB Bandwidth 20.123 MHz Trace/View Trace 1 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2

802.11n-HT20-Low	Agilent Ch Freq 5.745 GHz Trig Free Occupied Bandwidth Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offst 1 dB Center 5.745 GHz #Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts) Span 40 MHz Occupied Bandwidth 17.7296 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB Transmit Freq Error -4.431 kHz x dB Bandwidth 20.547 MHz Trace/View Trace 1 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2
802.11n-HT20-Middle	Agilent Ch Freq 5.785 GHz Trig Free Occupied Bandwidth Center 5.78500000 GHz Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offst 1 dB Center 5.785 GHz #Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts) Span 40 MHz Occupied Bandwidth 17.7097 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB Transmit Freq Error -4.473 kHz x dB Bandwidth 20.513 MHz Trace/View Trace 1 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2
802.11n-HT20-High	Agilent Ch Freq 5.825 GHz Trig Free Occupied Bandwidth Center 5.82500000 GHz Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offst 1 dB Center 5.825 GHz #Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts) Span 40 MHz Occupied Bandwidth 17.6878 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB Transmit Freq Error -8.784 kHz x dB Bandwidth 20.461 MHz Trace/View Trace 1 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2

802.11n-HT40-Low	Agilent R T Ch Freq 5.755 GHz Trig Free Occupied Bandwidth Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offst 1 dB Center 5.755 GHz Res BW 1 MHz VBW 3 MHz Sweep 10 ms (1001 pts) Span 80 MHz Occupied Bandwidth 36.4537 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB Transmit Freq Error -45.114 kHz x dB Bandwidth 41.625 MHz Trace/View 1 Trace 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2
802.11n-HT40-High	Agilent R T Ch Freq 5.795 GHz Trig Free Occupied Bandwidth Center 5.79500000 GHz Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offst 1 dB Center 5.795 GHz Res BW 1 MHz VBW 3 MHz Sweep 10 ms (1001 pts) Span 80 MHz Occupied Bandwidth 36.5815 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB Transmit Freq Error -21.232 kHz x dB Bandwidth 41.759 MHz Trace/View 1 Trace 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2
802.11ac-HT80-Low	Agilent R T Ch Freq 5.775 GHz Trig Free Occupied Bandwidth Span 160.0000000 MHz Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offst 1 dB Center 5.775 GHz Res BW 1 MHz VBW 3 MHz Sweep 10 ms (1001 pts) Span 160 MHz Occupied Bandwidth 75.1378 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB Transmit Freq Error -65.484 kHz x dB Bandwidth 81.116 MHz Trace/View 1 Trace 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2



APPENDIX C

Maximum Conducted Output Power



U-NII-1:5150-5250MHz			
Test mode	Frequency MHz	Output Power dBm	Limit dBm
802.11a	5180	10.34	23.98
	5200	10.61	23.98
	5240	10.77	23.98
802.11n-HT20	5180	10.20	23.98
	5200	10.49	23.98
	5240	10.95	23.98
802.11n-HT40	5190	10.26	23.98
	5230	10.77	23.98
802.11ac VH80	5210	10.45	23.98

U-NII-3: 5725-5850MHz			
Test mode	Frequency MHz	Output Power dBm	Limit dBm
802.11a	5745	9.67	30.00
	5785	8.79	30.00
	5825	8.60	30.00
802.11n-HT20	5745	8.73	30.00
	5785	8.58	30.00
	5825	8.39	30.00
802.11n-HT40	5755	8.88	30.00
	5795	8.57	30.00
802.11ac VH80	5775	9.03	30.00



5150-5250MHz

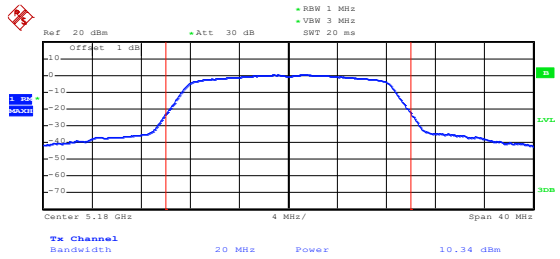




Date: 30.JUN.2022 19:48:46


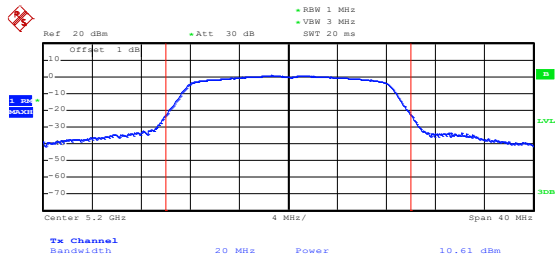



Date: 30.JUN.2022 19:49:48


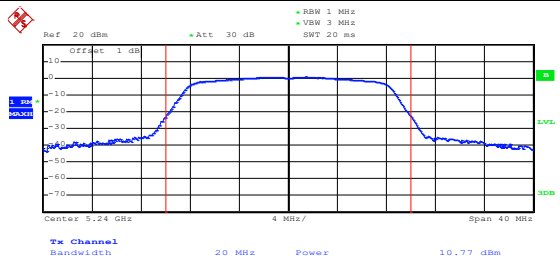






Date: 30.JUN.2022 19:50:28

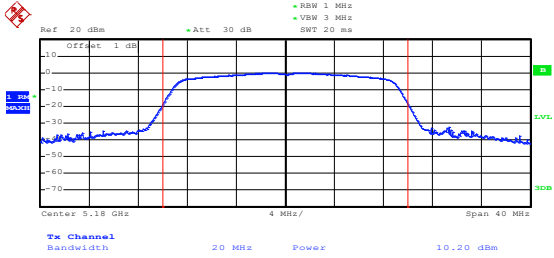
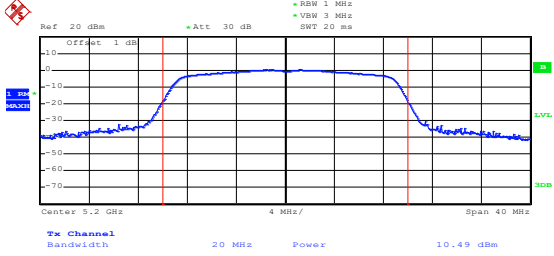
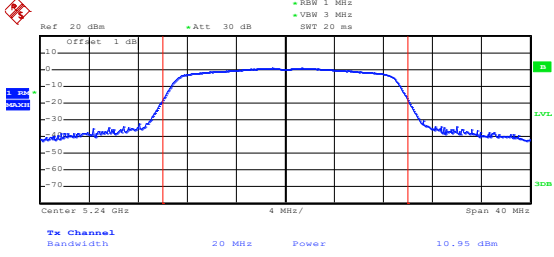
802.11n-HT20-Low	 Date: 30.JUN.2022 19:51:31
802.11n-HT20-Middle	 Date: 30.JUN.2022 19:51:47
802.11n-HT20-High	 Date: 30.JUN.2022 19:52:02

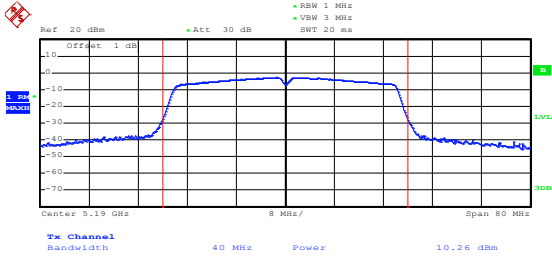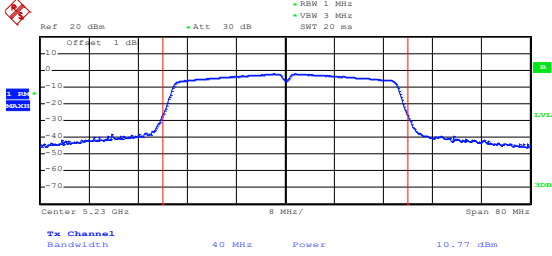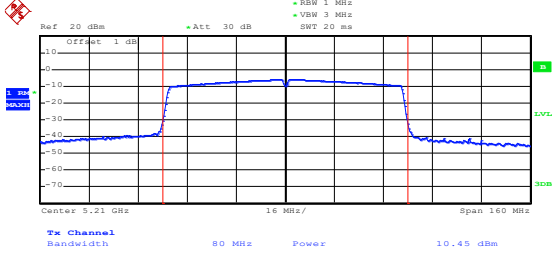802.11n-HT40-Low	 Date: 30.JUN.2022 19:52:49
802.11n-HT40-High	 Date: 30.JUN.2022 19:53:13
802.11ac-HT80-Low	 Date: 30.JUN.2022 19:53:59

5725-5850MHz

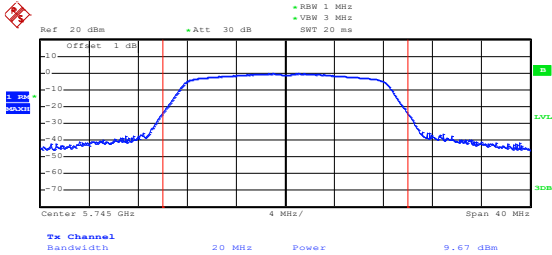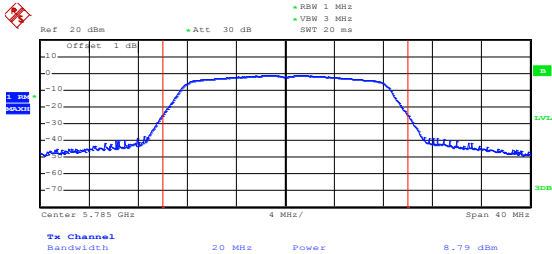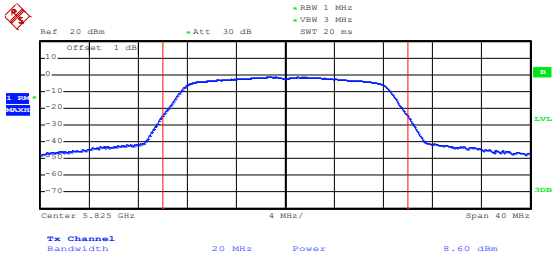802.11a-Low	 Date: 30.JUN.2022 19:58:04
802.11a-Middle	 Date: 30.JUN.2022 19:58:22
802.11a-High	 Date: 30.JUN.2022 19:59:44

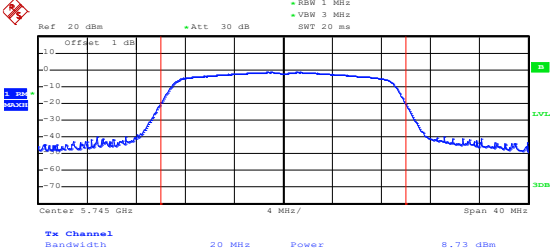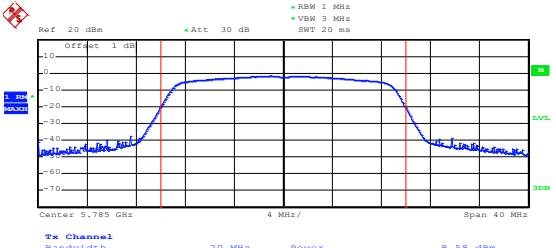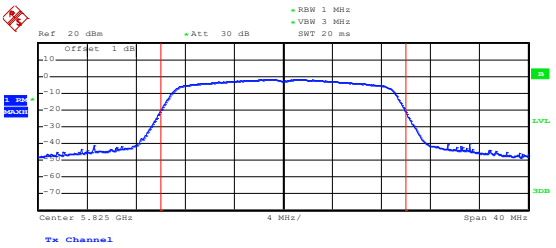802.11n-HT20-Low	 Date: 30.JUN.2022 20:00:24
802.11n-HT20-Middle	 Date: 30.JUN.2022 20:00:40
802.11n-HT20-High	 Date: 30.JUN.2022 20:00:55

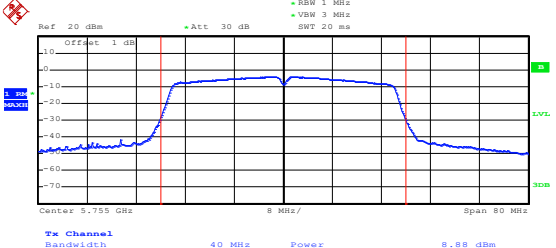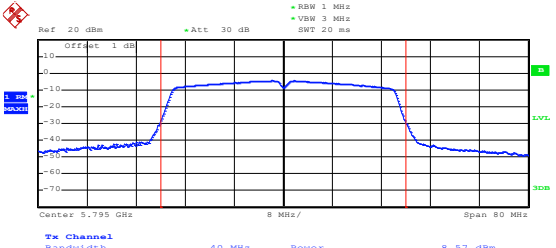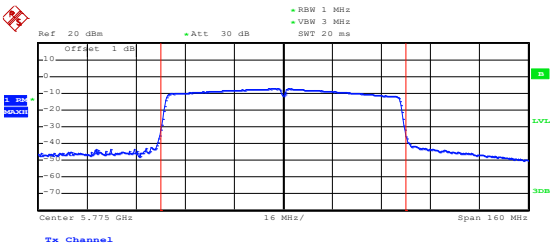802.11n-HT40-Low	 Ref: 20 dBm Offset: 1 dB Att: 30 dB RBW: 1 MHz VBW: 3 MHz SWT: 20 ms Center: 5.755 GHz Span: 80 MHz Tx Channel Bandwidth: 40 MHz Power: 8.88 dBm Date: 30.JUN.2022 20:01:29
802.11n-HT40-High	 Ref: 20 dBm Offset: 1 dB Att: 30 dB RBW: 1 MHz VBW: 3 MHz SWT: 20 ms Center: 5.795 GHz Span: 80 MHz Tx Channel Bandwidth: 40 MHz Power: 8.57 dBm Date: 30.JUN.2022 20:04:20
802.11ac-HT80-Low	 Ref: 20 dBm Offset: 1 dB Att: 30 dB RBW: 1 MHz VBW: 3 MHz SWT: 20 ms Center: 5.775 GHz Span: 160 MHz Tx Channel Bandwidth: 80 MHz Power: 9.03 dBm Date: 30.JUN.2022 19:57:01

APPENDIX D

Frequency Stability

U-NII-1:5150-5250MHz worst case at 802.11a middle channel				
Voltage(%)	Power(VDC)	TEMP(°C)	Freq.Dev(Hz)	Deviation
100%	3.7	-30	3007	0.5784
100%		-20	3007	0.5782
100%		-10	3008	0.5784
100%		0	3003	0.5774
100%		+10	3006	0.5781
100%		+20	3003	0.5776
100%		+30	3003	0.5776
100%		+40	3010	0.5788
100%		+50	3010	0.5788
Low Battery power	3.4	+20	3005	0.5779
High Battery power	4.2	+20	3008	0.5784

U-NII-1:5725-5850MHz worst case at 802.11a middle channel				
Voltage(%)	Power(VDC)	TEMP(°C)	Freq.Dev(Hz)	Deviation
100%	3.7	-30	3004	0.5202
100%		-20	3008	0.5208
100%		-10	3003	0.5200
100%		0	3009	0.5210
100%		+10	3002	0.5199
100%		+20	3005	0.5203
100%		+30	3005	0.5203
100%		+40	3006	0.5205
100%		+50	3003	0.5200
Low Battery power	3.4	+20	3009	0.5211
High Battery power	4.2	+20	3007	0.5208

APPENDIX PHOTOGRAPHS

Please refer to “ANNEX”

******* END OF REPORT *******