


6.6.2 Radiated Emission Method

Test Requirement:	FCC Part 15 C Section 15.209 and 15.205														
Test Method:	ANSI C63.4: 2003														
Test Frequency Range:	2.3GHz to 2.5GHz														
Test site:	Measurement Distance: 3m														
Receiver setup:	<table border="1"> <thead> <tr> <th>Frequency</th> <th>Detector</th> <th>RBW</th> <th>VBW</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td rowspan="2">Above 1GHz</td> <td>Peak</td> <td>1MHz</td> <td>3MHz</td> <td>Peak Value</td> </tr> <tr> <td>Peak</td> <td>1MHz</td> <td>10Hz</td> <td>Average Value</td> </tr> </tbody> </table>	Frequency	Detector	RBW	VBW	Remark	Above 1GHz	Peak	1MHz	3MHz	Peak Value	Peak	1MHz	10Hz	Average Value
Frequency	Detector	RBW	VBW	Remark											
Above 1GHz	Peak	1MHz	3MHz	Peak Value											
	Peak	1MHz	10Hz	Average Value											
Limit:	<table border="1"> <thead> <tr> <th>Frequency</th> <th>Limit (dBuV/m @3m)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td rowspan="2">Above 1GHz</td> <td>54.00</td> <td>Average Value</td> </tr> <tr> <td>74.00</td> <td>Peak Value</td> </tr> </tbody> </table>	Frequency	Limit (dBuV/m @3m)	Remark	Above 1GHz	54.00	Average Value	74.00	Peak Value						
Frequency	Limit (dBuV/m @3m)	Remark													
Above 1GHz	54.00	Average Value													
	74.00	Peak Value													
Test Procedure:	<ol style="list-style-type: none"> The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. 														
Test setup:															
Test Instruments:	Refer to section 5.6 for details														
Test mode:	Refer to section 5.3 for details														
Test results:	Passed														

802.11b

Test channel: Lowest

Horizontal:

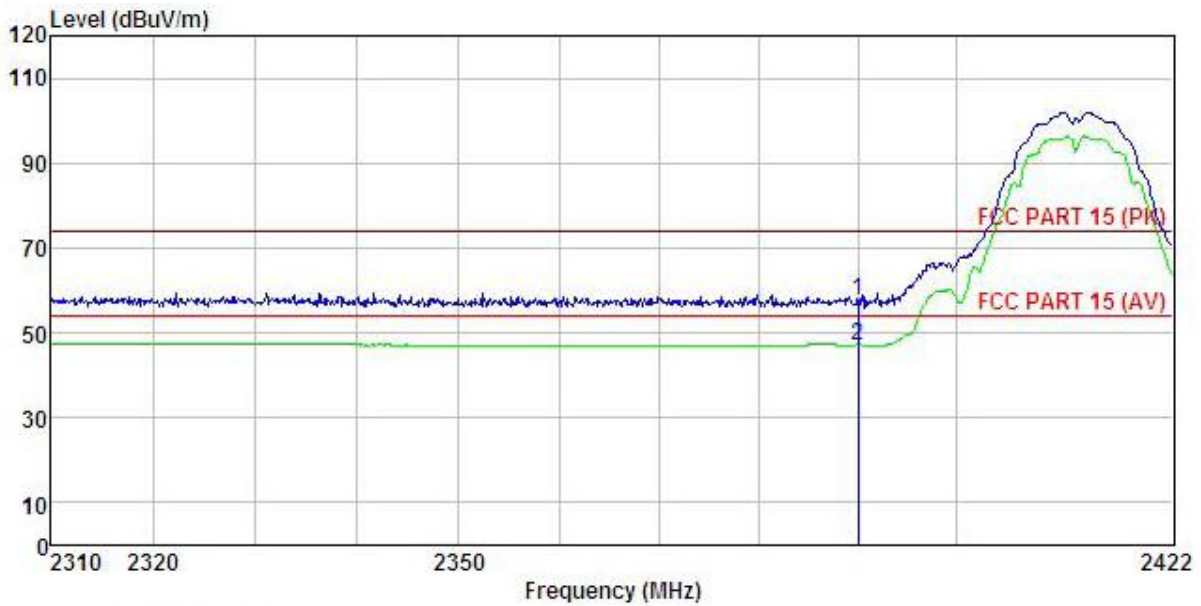


```

Site       : 3m chamber
Condition  : FCC PART 15 (PK) 3m BBHA9120(1G18) HORIZONTAL
EUT        : Smart phone
Model      : CAPHG22-01
Test mode  : Wifi-TX(B-L) Mode
Power Rating : AC 120V/60Hz
Environment : Temp:25.5°C Humi:55%
Test Engineer: MT
REMARK     :
    
```

	Freq	ReadAntenna		Cable Preamp		Level	Limit	Over	Remark
		Level	Factor	Loss	Factor				
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2390.000	24.38	27.58	5.67	0.00	57.63	74.00	-16.37	Peak
2	2390.000	13.90	27.58	5.67	0.00	47.15	54.00	-6.85	Average

Vertical:

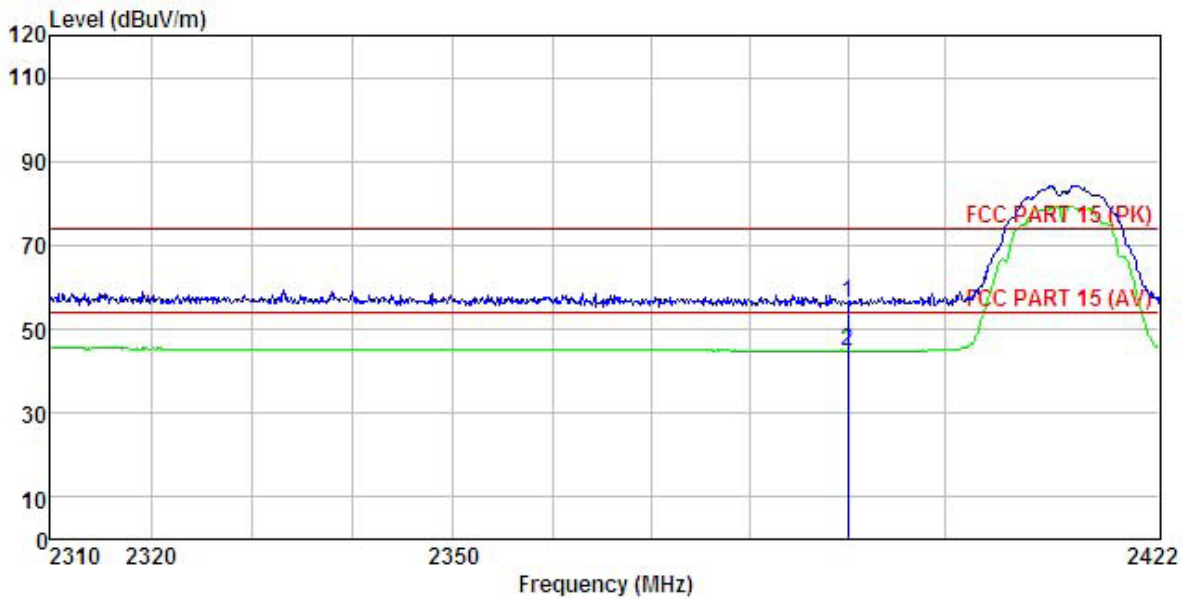


Site : 3m chamber
 Condition : FCC PART 15 (PK) 3m BBHA9120(1G18) VERTICAL
 EUT : Smart phone
 Model : CAPHG22-01
 Test mode : Wifi-TX(B-L) Mode
 Power Rating : AC 120V/60Hz
 Environment : Temp:25.5°C Humi:55%
 Test Engineer:
 REMARK :

	Read	Antenna	Cable	Preamp	Level	Limit	Over	
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2390.000	22.90	27.58	5.67	0.00	56.15	74.00	-17.85 Peak
2	2390.000	11.67	27.58	5.67	0.00	44.92	54.00	-9.08 Average

Test channel: Highest


Horizontal:

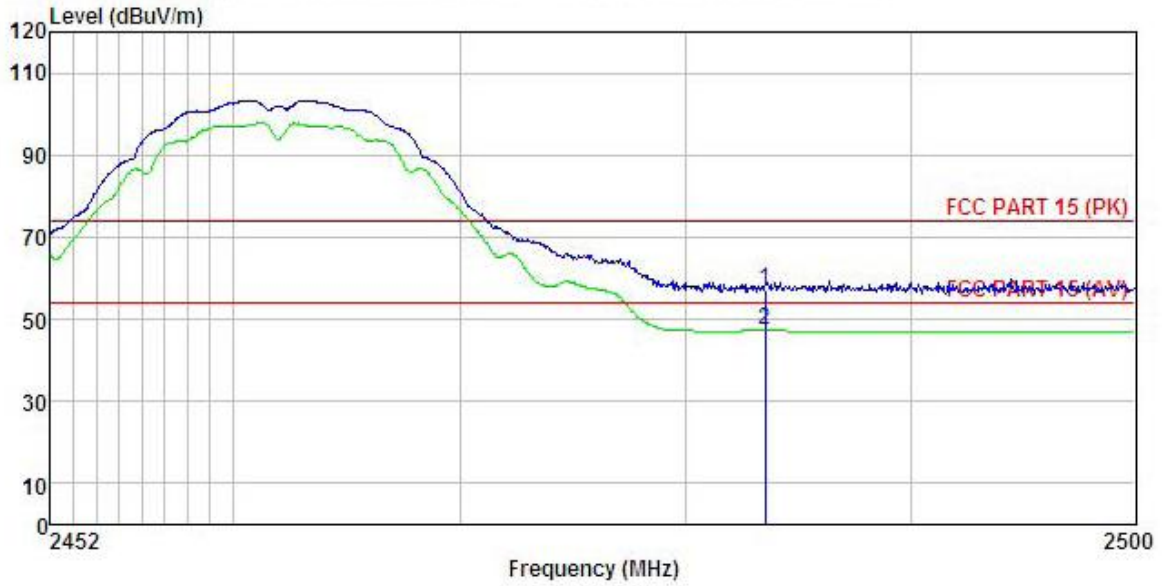

Site : 3m chamber
 Condition : FCC PART 15 (PK) 3m BBHA9120(1G18) HORIZONTAL
 EUT : Smart phone
 Model : CAPHG22-01
 Test mode : Wifi-TX(B-H) Mode
 Power Rating : AC 120V/60Hz
 Environment : Temp:25.5°C Humi:55%
 Test Engineer: MT
 REMARK :

	Freq	Read	Antenna	Cable	Preamp	Limit	Over	
	MHz	Level	Factor	Loss	Factor	Line	Limit	Remark
		dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	2483.500	24.03	27.52	5.70	0.00	57.25	74.00	-16.75 Peak
2	2483.500	14.16	27.52	5.70	0.00	47.38	54.00	-6.62 Average

Vertical:

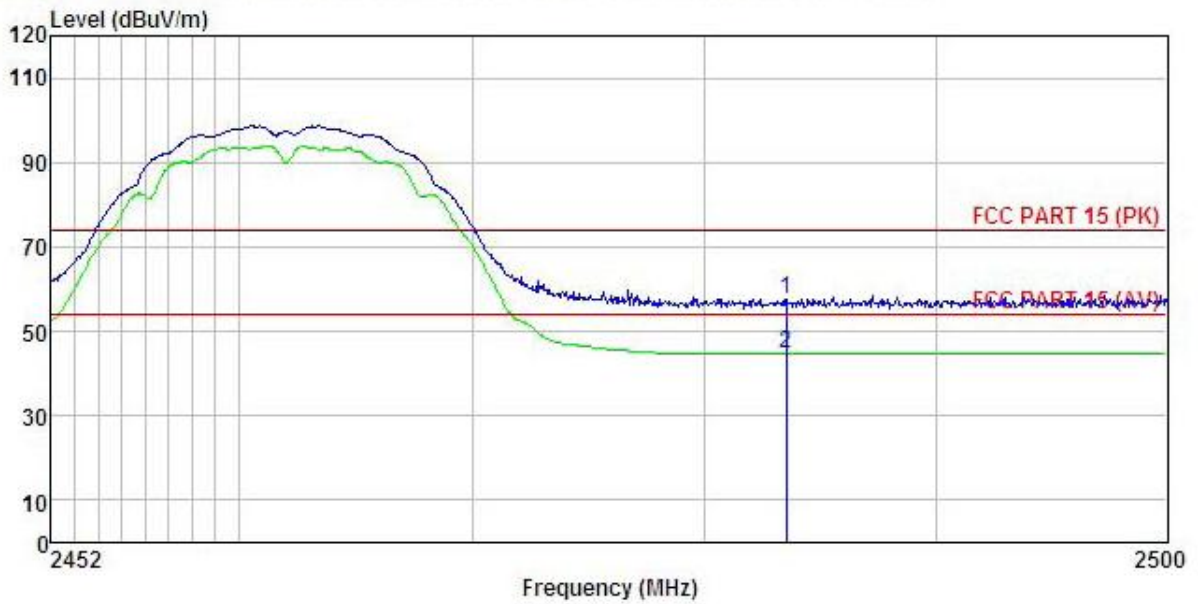


Site : 3m chamber
 Condition : FCC PART 15 (PK) 3m BBHA9120(1G18) VERTICAL
 EUT : Smart phone
 Model : CAPHG22-01
 Test mode : Wifi-TX (B-H) Mode
 Power Rating : AC 120V/60Hz
 Environment : Temp:25.5°C Humi:55%
 Test Engineer:
 REMARK :

	ReadAntenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss	Factor	Line	Limit	Remark	
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2483.500	24.29	27.52	5.70	0.00	57.51	74.00	-16.49 Peak
2	2483.500	11.64	27.52	5.70	0.00	44.86	54.00	-9.14 Average

802.11g


Test channel: Lowest
Horizontal:

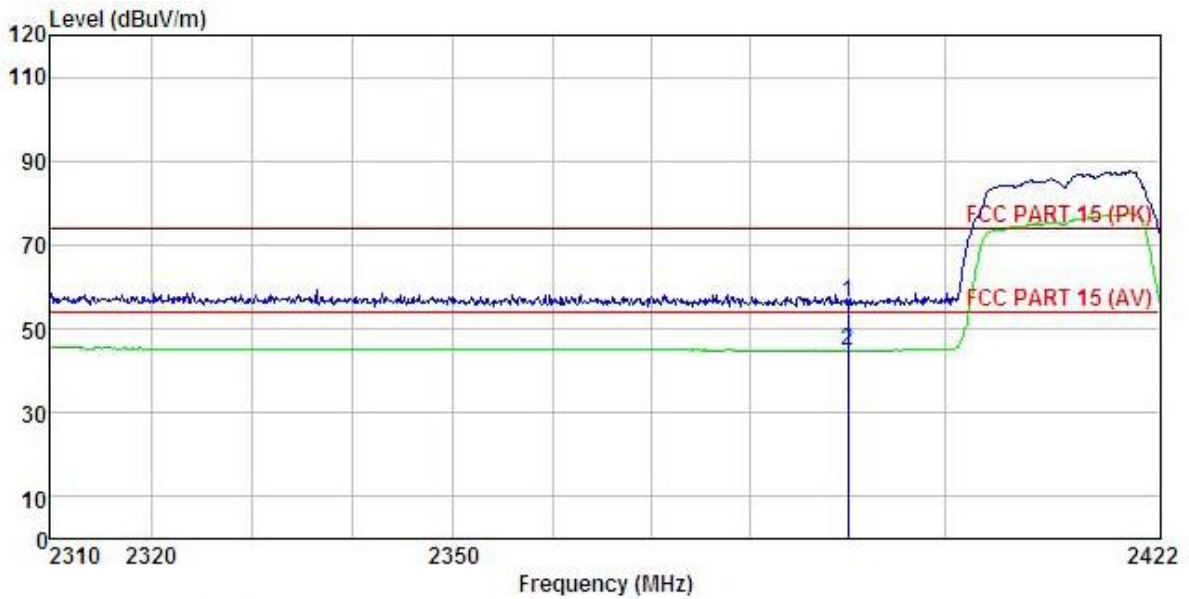

Site : 3m chamber
 Condition : FCC PART 15 (PK) 3m BBHA9120(1G18) HORIZONTAL
 EUT : Smart phone
 Model : CAPHG22-01
 Test mode : Wifi-TX (G-L) Mode
 Power Rating : AC 120V/60Hz
 Environment : Temp:25.5°C Humi:55%
 Test Engineer:
 REMARK :

	Freq	ReadLevel	Antenna Factor	Cable Loss	Preamp	Level	Limit	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2390.000	22.85	27.58	5.67	0.00	56.10	74.00	-17.90	Peak
2	2390.000	11.68	27.58	5.67	0.00	44.93	54.00	-9.07	Average


Vertical:

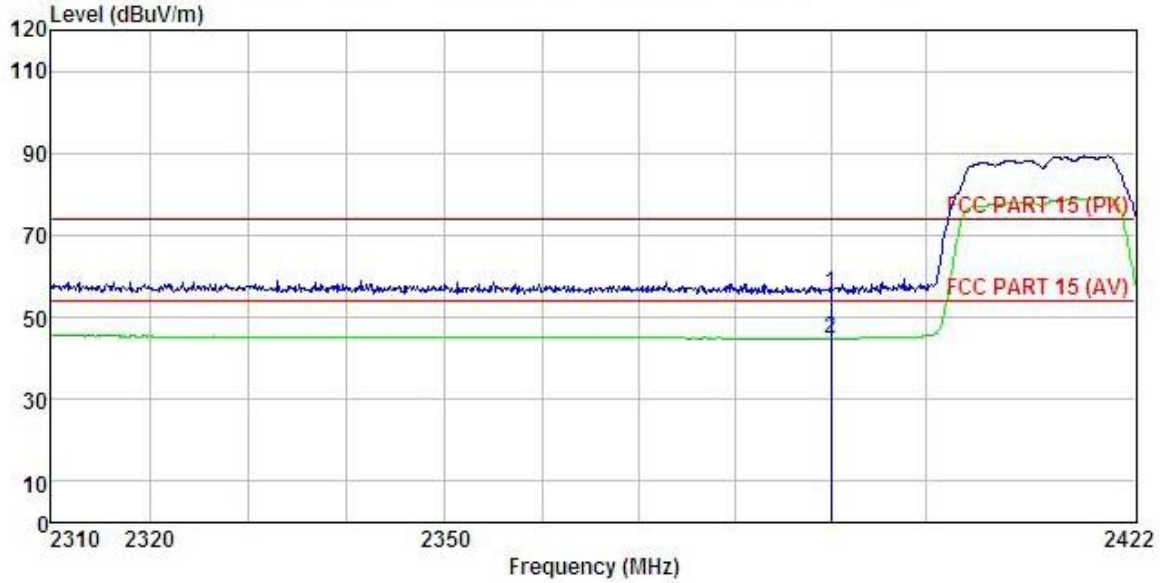

Site : 3m chamber
 Condition : FCC PART 15 (PK) 3m BBHA9120(1G18) VERTICAL
 EUT : Smart phone
 Model : CAPHG22-01
 Test mode : Wifi-TX(G-L) Mode
 Power Rating : AC 120V/60Hz
 Environment : Temp:25.5°C Humi:55%
 Test Engineer:
 REMARK :

	ReadAntenna	Cable	Preamp		Limit	Over		
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2390.000	22.73	27.58	5.67	0.00	55.98	74.00	-18.02 Peak
2	2390.000	11.68	27.58	5.67	0.00	44.93	54.00	-9.07 Average


Test channel: Highest
Horizontal:

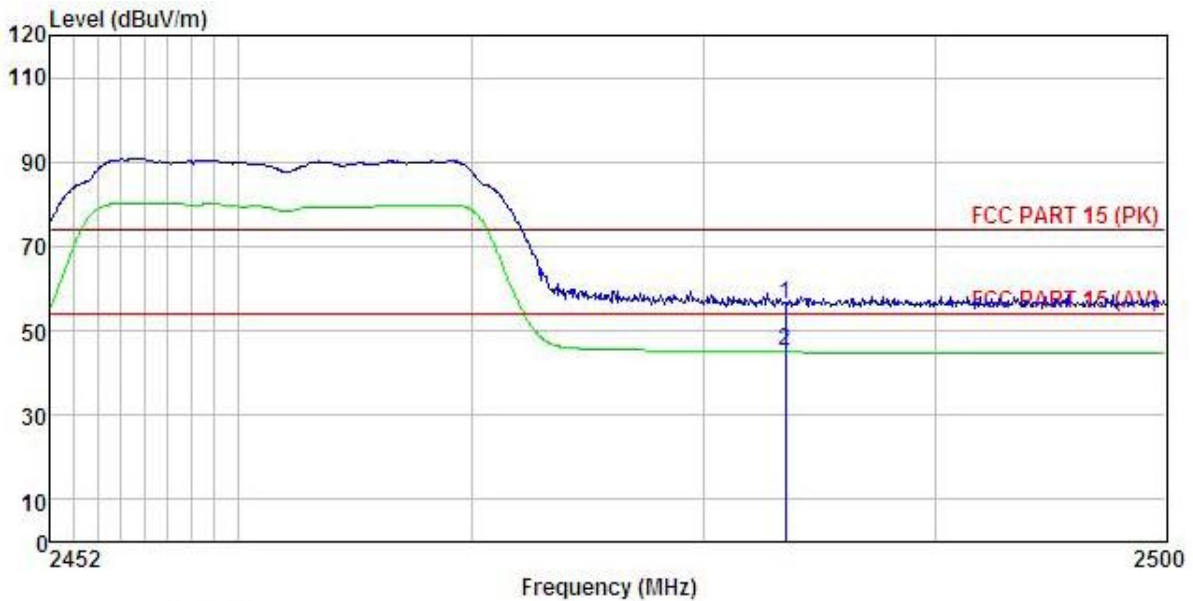

Site : 3m chamber
 Condition : FCC PART 15 (PK) 3m BBHA9120(1G18) HORIZONTAL
 EUT : Smart phone
 Model : CAPHG22-01
 Test mode : Wifi-TX (G-H) Mode
 Power Rating : AC 120V/60Hz
 Environment : Temp:25.5°C Humi:55%
 Test Engineer:
 REMARK :

	Read	Antenna	Cable	Preamp	Level	Limit	Over		
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark	
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	2483.500	22.95	27.52	5.70	0.00	56.17	74.00	-17.83	Peak
2	2483.500	11.73	27.52	5.70	0.00	44.95	54.00	-9.05	Average

Vertical:

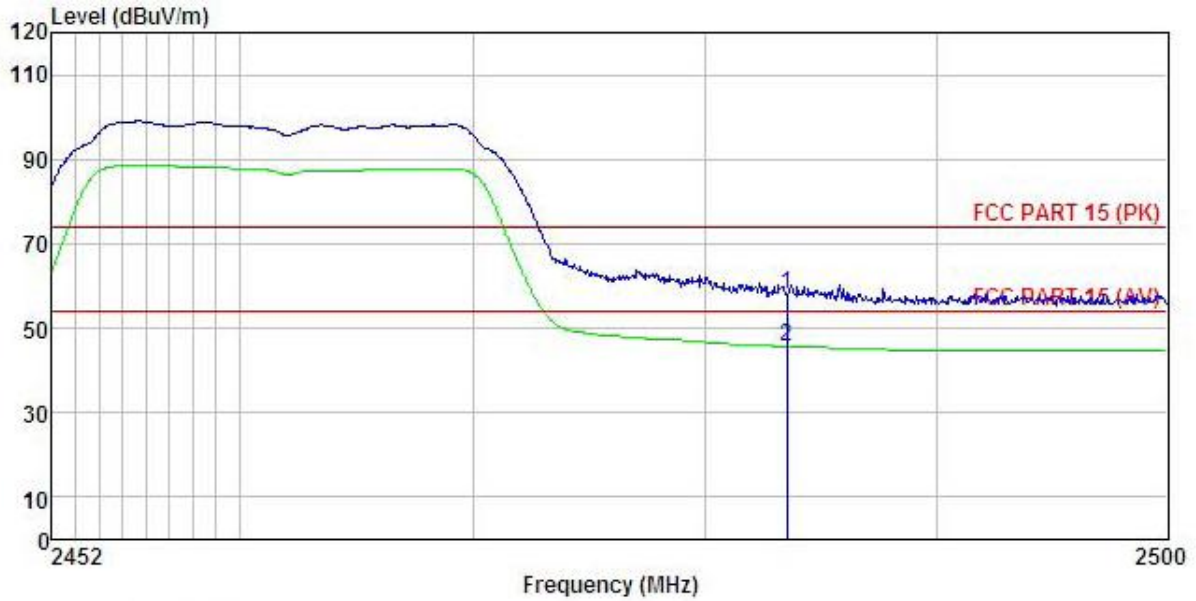


Site : 3m chamber
 Condition : FCC PART 15 (PK) 3m BBHA9120(1G18) VERTICAL
 EUT : Smart phone
 Model : CAPHG22-01
 Test mode : Wifi-TX(G-H) Mode
 Power Rating : AC 120V/60Hz
 Environment : Temp:25.5°C Humi:55%
 Test Engineer:
 REMARK :

	Freq	ReadAntenna		Cable Preamp		Level	Limit	Over	Remark
		Level	Factor	Loss	Factor				
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2483.500	24.99	27.52	5.70	0.00	58.21	74.00	-15.79	Peak
2	2483.500	12.51	27.52	5.70	0.00	45.73	54.00	-8.27	Average

802.11n (H20)


Test channel: Lowest
Horizontal:

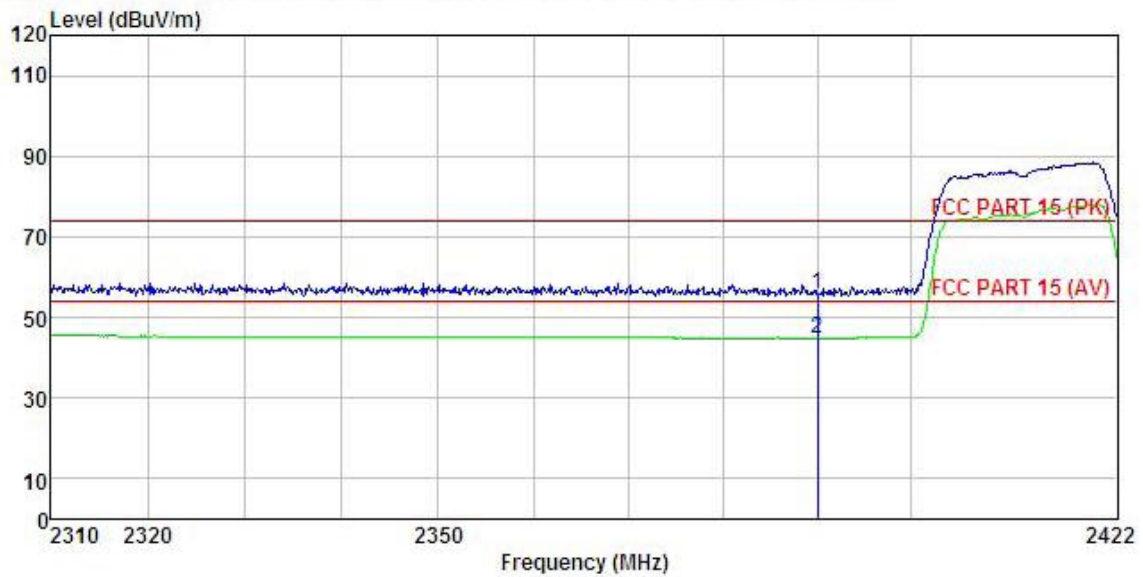

Site : 3m chamber
 Condition : FCC PART 15 (PK) 3m BBHA9120(1G18) HORIZONTAL
 EUT : Smart phone
 Model : CAPHG22-01
 Test mode : Wifi-TX (N20-L) Mode
 Power Rating : AC 120V/60Hz
 Environment : Temp:25.5°C Humi:55%
 Test Engineer:
 REMARK :

	Freq	ReadAntenna Level	Antenna Factor	Cable Loss	Preamplifier Factor	Level	Limit	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2390.000	22.73	27.58	5.67	0.00	55.98	74.00	-18.02	Peak
2	2390.000	11.63	27.58	5.67	0.00	44.88	54.00	-9.12	Average


Vertical:

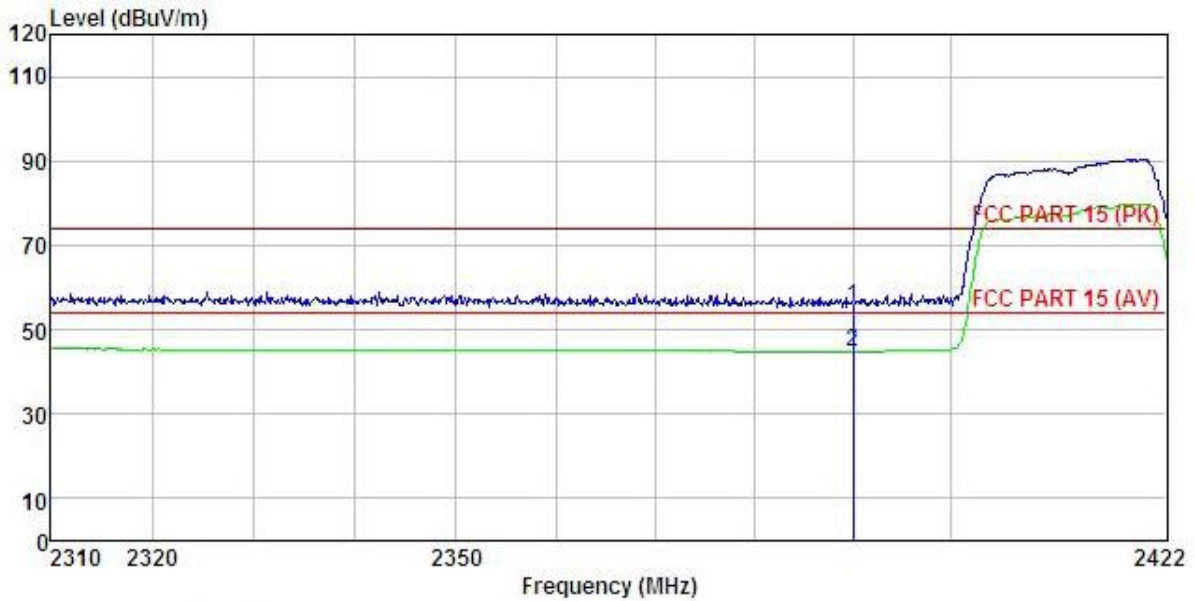

Site : 3m chamber
 Condition : FCC PART 15 (PK) 3m BBHA9120(1G18) VERTICAL
 EUT : Smart phone
 Model : CAPHG22-01
 Test mode : Wifi-TX(N20-L) Mode
 Power Rating : AC 120V/60Hz
 Environment : Temp:25.5°C Humi:55%
 Test Engineer:
 REMARK :

	Freq	ReadLevel	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2390.000	22.29	27.58	5.67	0.00	55.54	74.00	-18.46	Peak
2	2390.000	11.64	27.58	5.67	0.00	44.89	54.00	-9.11	Average


Test channel: Highest
Horizontal:

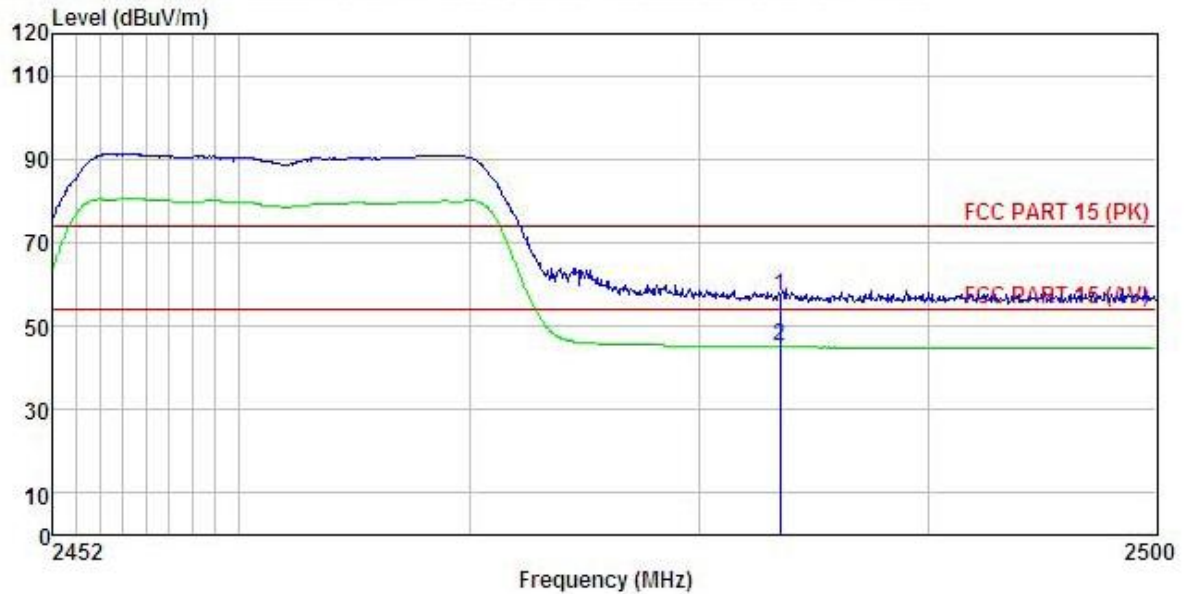

Site : 3m chamber
 Condition : FCC PART 15 (PK) 3m BBHA9120(1G18) HORIZONTAL
 EUT : Smart phone
 Model : CAPHG22-01
 Test mode : Wifi-TX(N20-H) Mode
 Power Rating : AC 120V/60Hz
 Environment : Temp:25.5°C Humi:55%
 Test Engineer:
 REMARK :

	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit	Over	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2483.500	23.83	27.52	5.70	0.00	57.05	74.00	-16.95	Peak
2	2483.500	11.85	27.52	5.70	0.00	45.07	54.00	-8.93	Average

Vertical:

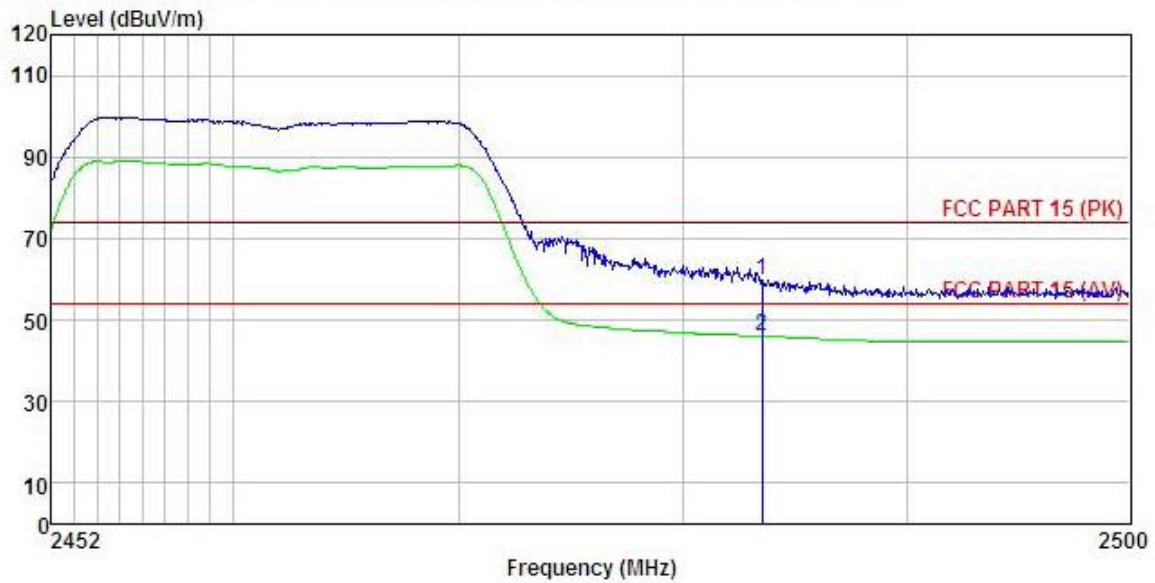


Site : 3m chamber
 Condition : FCC PART 15 (PK) 3m BBHA9120(1G18) VERTICAL
 EUT : Smart phone
 Model : CAPHG22-01
 Test mode : Wifi-TX(N20-H) Mode
 Power Rating : AC 120V/60Hz
 Environment : Temp:25.5°C Humi:55%
 Test Engineer:
 REMARK :

	Read	Antenna	Cable	Preamp	Level	Limit	Over	
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2483.500	26.73	27.52	5.70	0.00	59.95	74.00	-14.05 Peak
2	2483.500	12.82	27.52	5.70	0.00	46.04	54.00	-7.96 Average

802.11n (H40)


Test channel: Lowest
Horizontal:

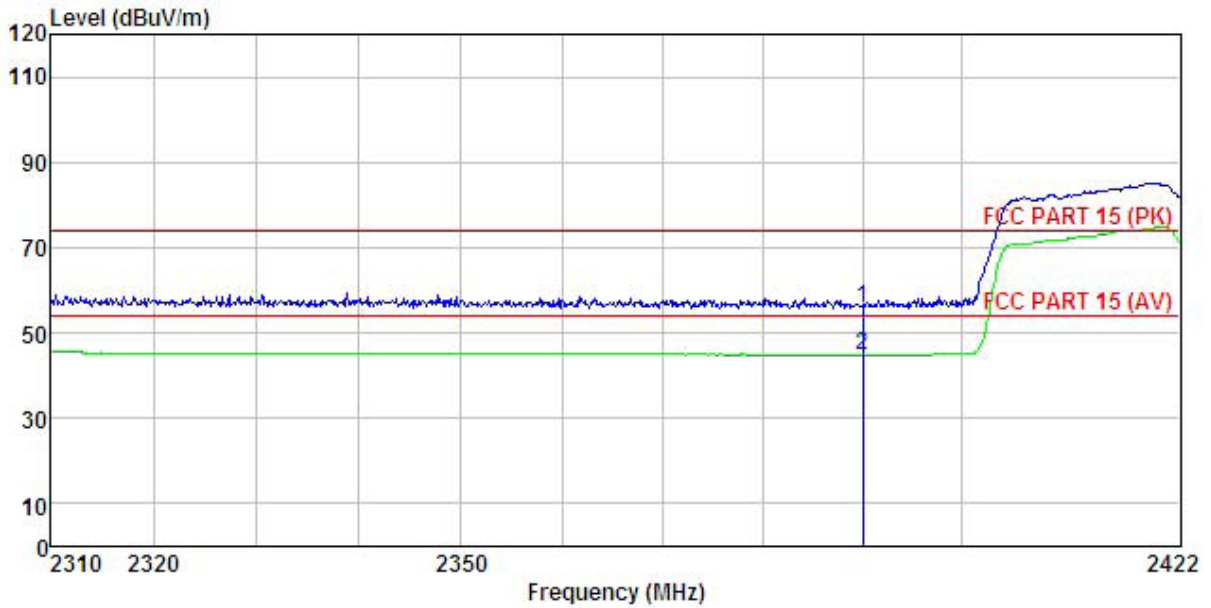

Site : 3m chamber
 Condition : FCC PART 15 (PK) 3m BBHA9120(1G18) HORIZONTAL
 EUT : Smart phone
 Model : CAPHG22-01
 Test mode : Wifi-TX (N40-L) Mode
 Power Rating : AC 120V/60Hz
 Environment : Temp:25.5°C Humi:55%
 Test Engineer:
 REMARK :

	ReadAntenna	Cable	Preamp	Limit	Over		
Freq	Level	Factor	Loss	Factor	Level	Line	Limit Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	2390.000	22.55	27.58	5.67	0.00	55.80	74.00 -18.20 Peak
2	2390.000	11.64	27.58	5.67	0.00	44.89	54.00 -9.11 Average


Vertical:

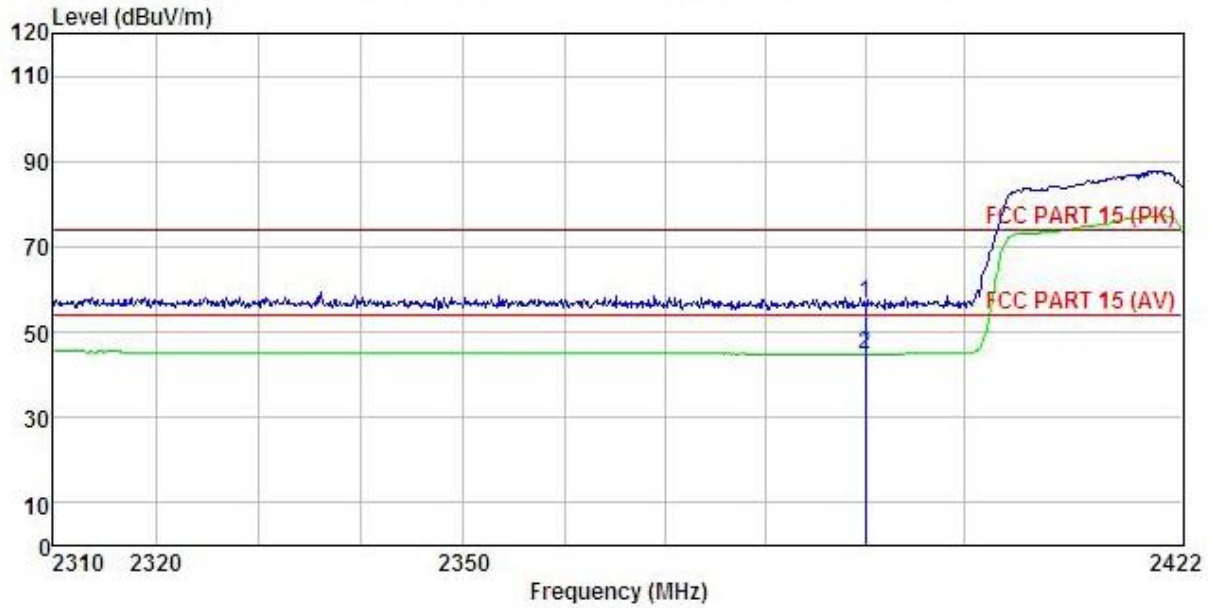

Site : 3m chamber
 Condition : FCC PART 15 (PK) 3m BBHA9120(1G18) VERTICAL
 EUT : Smart phone
 Model : CAPHG22-01
 Test mode : Wifi-TX (N40-L) Mode
 Power Rating : AC 120V/60Hz
 Environment : Temp:25.5°C Humi:55%
 Test Engineer:
 REMARK :

	ReadAntenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
-----	-----	-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2390.000	23.25	27.58	5.67	0.00	56.50	74.00	-17.50 Peak
2	2390.000	11.63	27.58	5.67	0.00	44.88	54.00	-9.12 Average


Test channel: Highest
Horizontal:

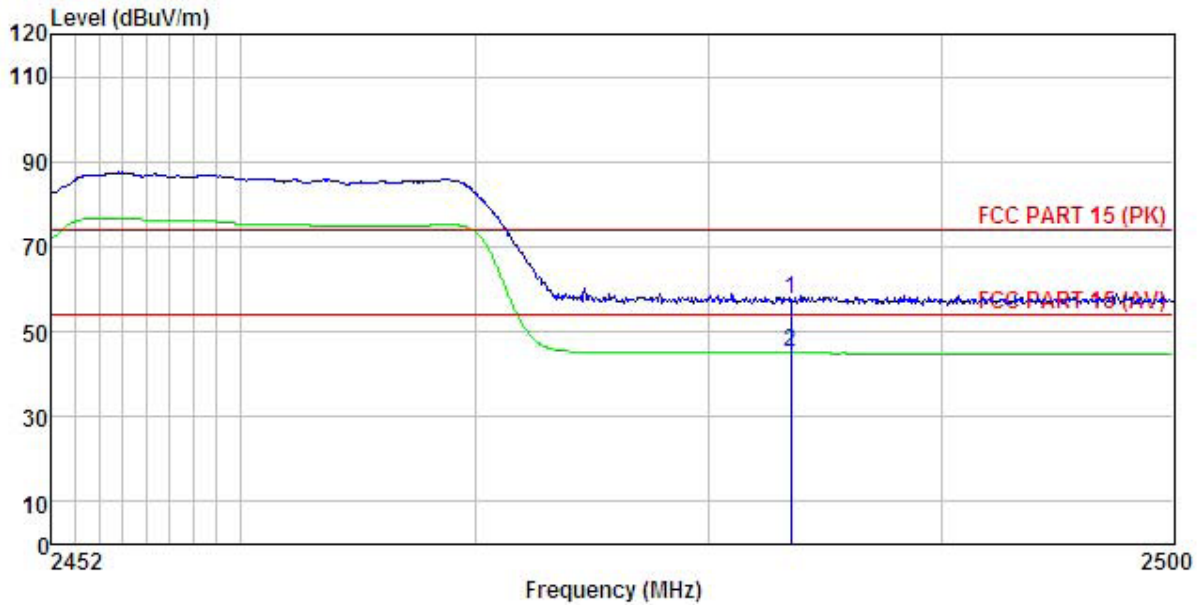

Site : 3m chamber
 Condition : FCC PART 15 (PK) 3m BBHA9120(1G18) HORIZONTAL
 EUT : Smart phone
 Model : CAPHG22-01
 Test mode : Wifi-TX(N40-H) Mode
 Power Rating : AC 120V/60Hz
 Environment : Temp:25.5°C Humi:55%
 Test Engineer:
 REMARK :

	Read	Antenna	Cable	Preamp	Limit	Over	
Freq	Level	Factor	Loss	Factor	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	2483.500	24.39	27.52	5.70	0.00	57.61	74.00 -16.39 Peak
2	2483.500	11.75	27.52	5.70	0.00	44.97	54.00 -9.03 Average

Vertical:

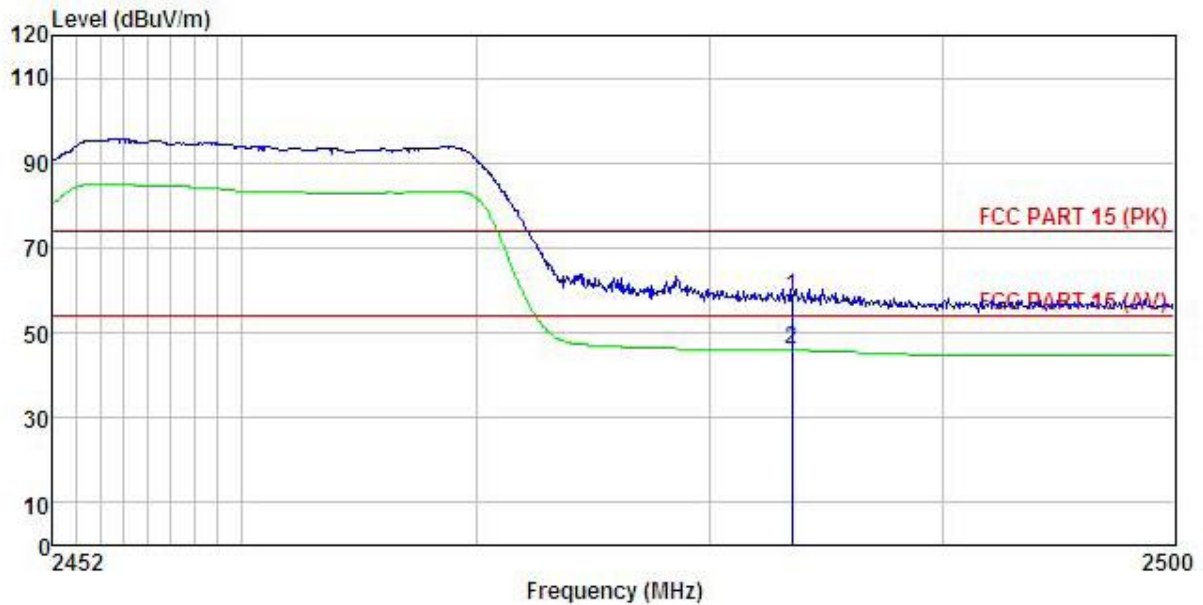

Site : 3m chamber
 Condition : FCC PART 15 (PK) 3m BBHA9120(1G18) VERTICAL
 EUT : Smart phone
 Model : CAPHG22-01
 Test mode : Wifi-TX(N40-H) Mode
 Power Rating : AC 120V/60Hz
 Environment : Temp:25.5°C Humi:55%
 Test Engineer:
 REMARK :


	Read	Antenna	Cable	Preamp	Level	Limit	Over	
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2483.500	25.15	27.52	5.70	0.00	58.37	74.00	-15.63 Peak
2	2483.500	12.66	27.52	5.70	0.00	45.88	54.00	-8.12 Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

6.7 Spurious Emission


6.7.1 Conducted Emission Method

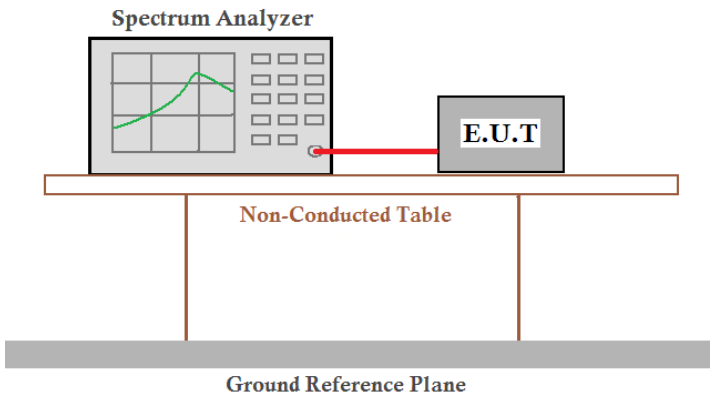Test Requirement:	FCC Part 15 C Section 15.247 (d)
Test Method:	ANSI C63.4:2003 and KDB558074
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test setup:	 <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both are placed on a Non-Conducted Table, which is supported by a Ground Reference Plane.</p>
Test Instruments:	Refer to section 5.6 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed

Test plot as follows:

Test mode: 802.11b


Lowest channel

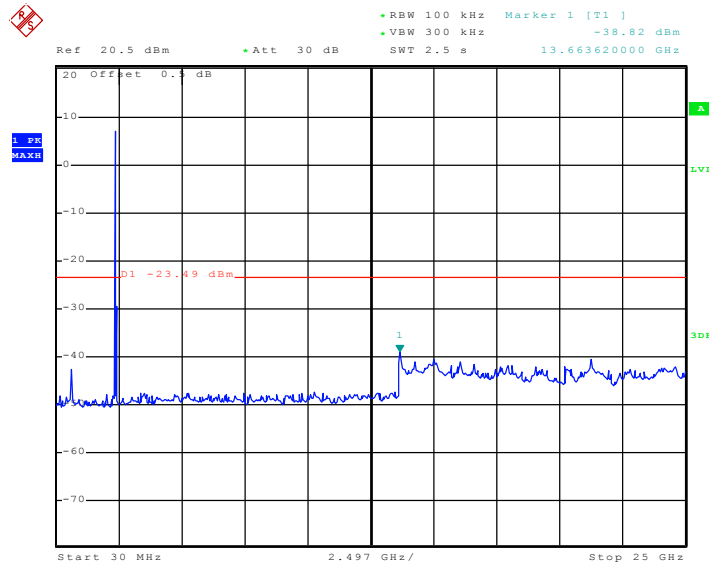

Date: 8..JAN.2015 12:52:25

30MHz~25GHz


Middle channel

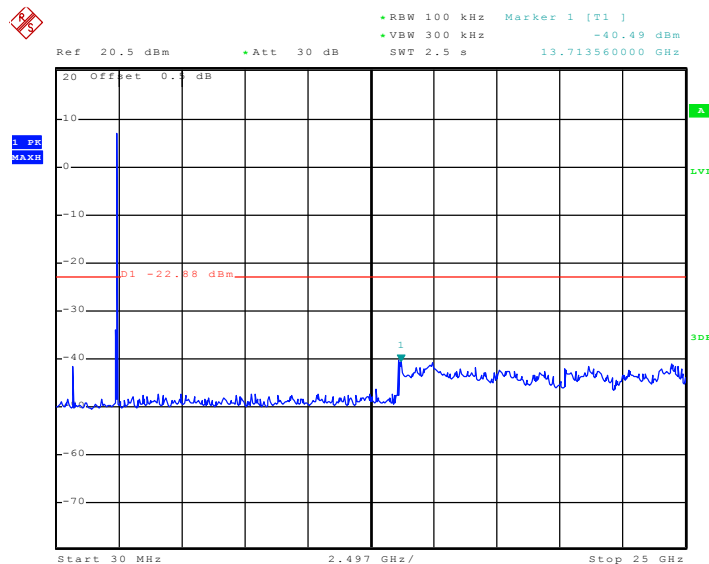

Date: 8..JAN.2015 12:53:07

30MHz~25GHz

Highest channel

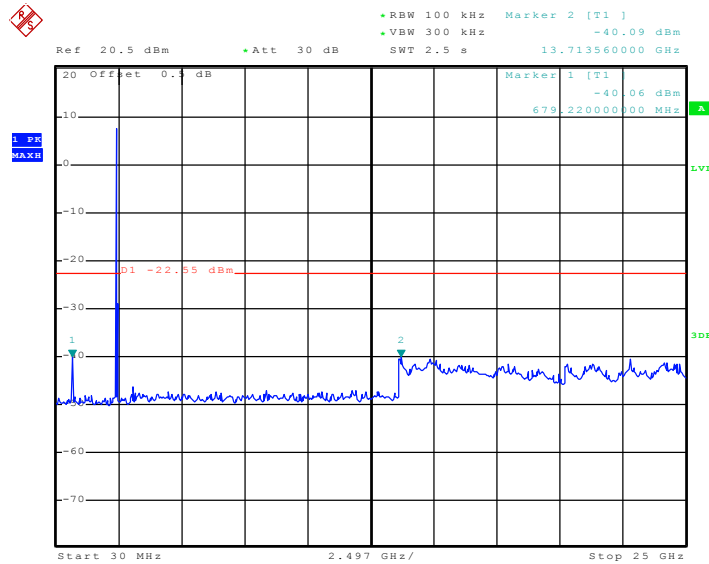


Date: 8.JAN.2015 12:54:12

30MHz~25GHz

Test mode: 802.11g


Lowest channel

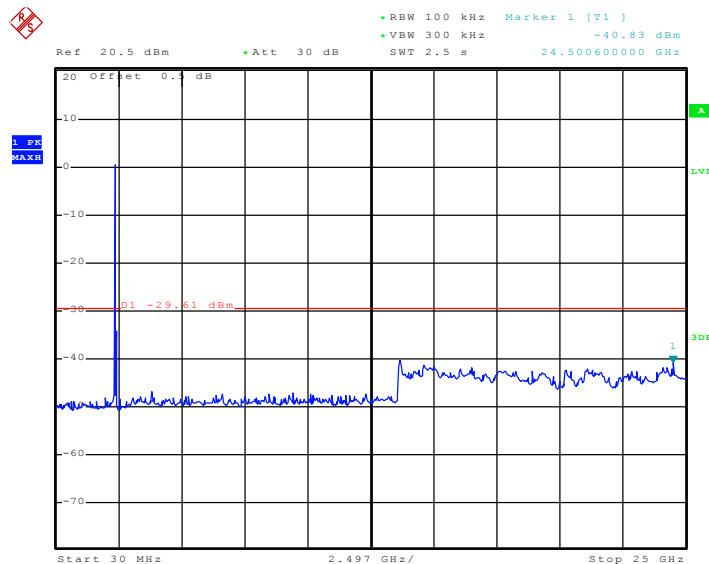

Date: 8.JAN.2015 12:54:56

30MHz~25GHz


Middle channel

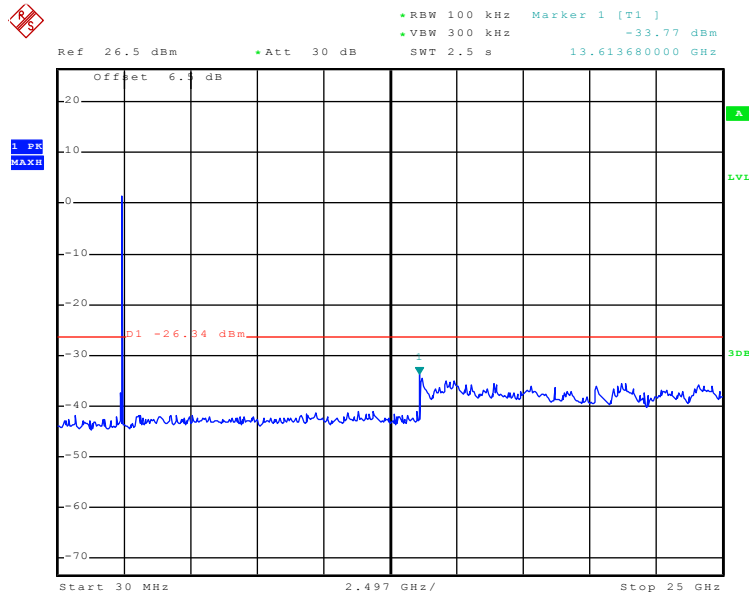

Date: 23.DEC.2014 18:49:57

30MHz~25GHz

Highest channel

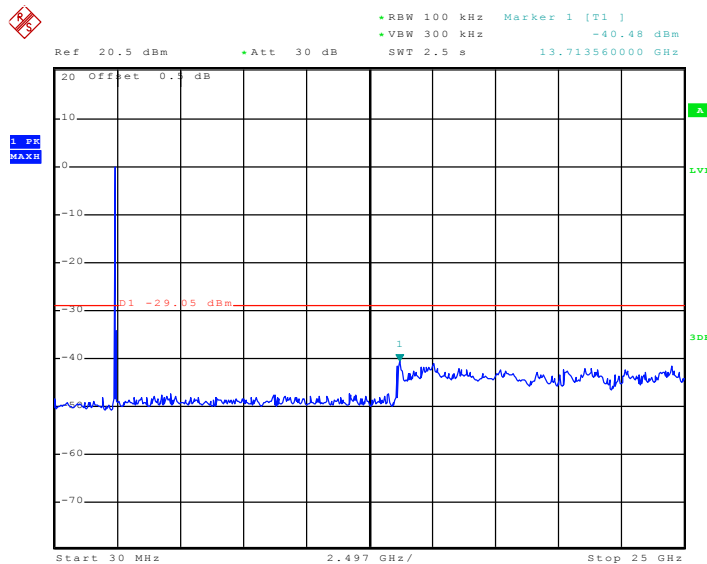


Date: 8.JAN.2015 12:55:56

30MHz~25GHz

Test mode: 802.11n(H20)


Lowest channel

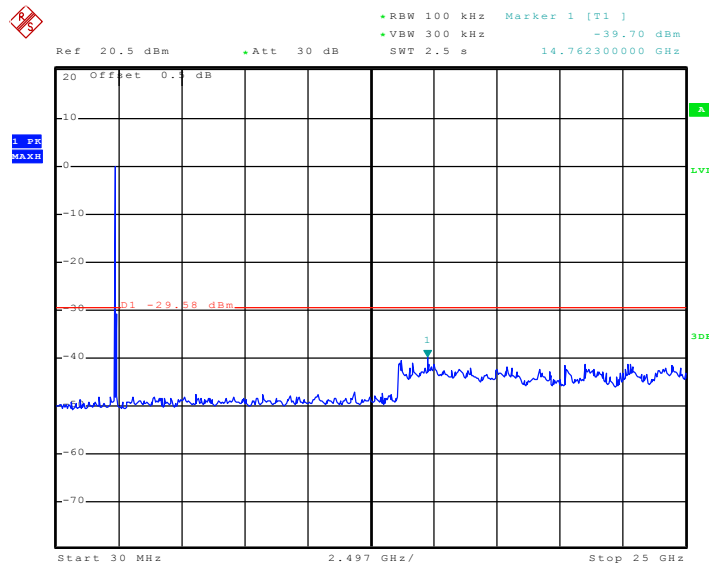

Date: 8..JAN.2015 12:56:38

30MHz~25GHz


Middle channel

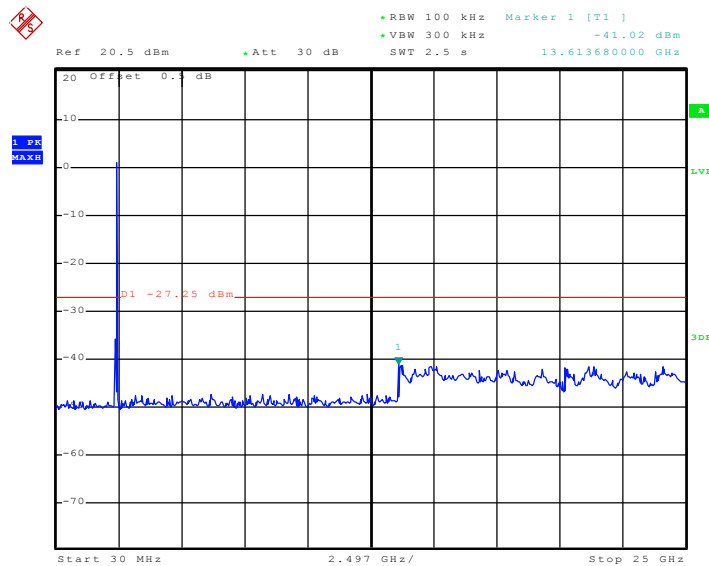

Date: 8..JAN.2015 12:57:13

30MHz~25GHz

Highest channel

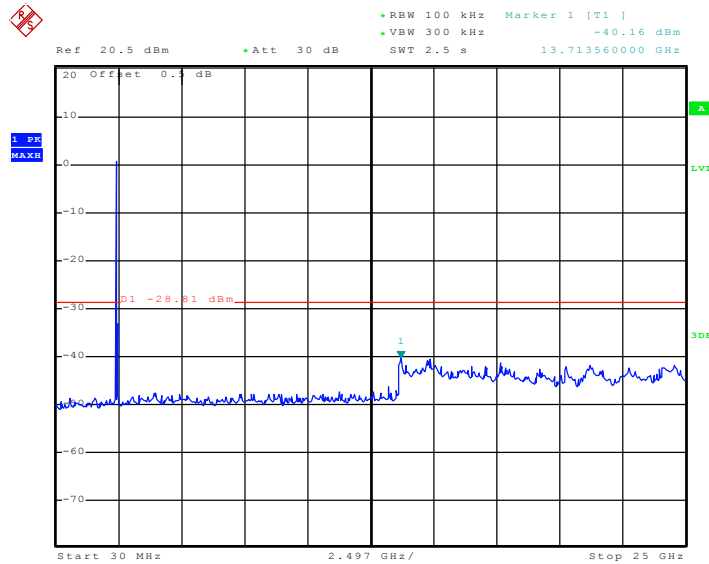


Date: 8.JAN.2015 12:57:45

30MHz~25GHz

Test mode: 802.11n(H40)


Lowest channel

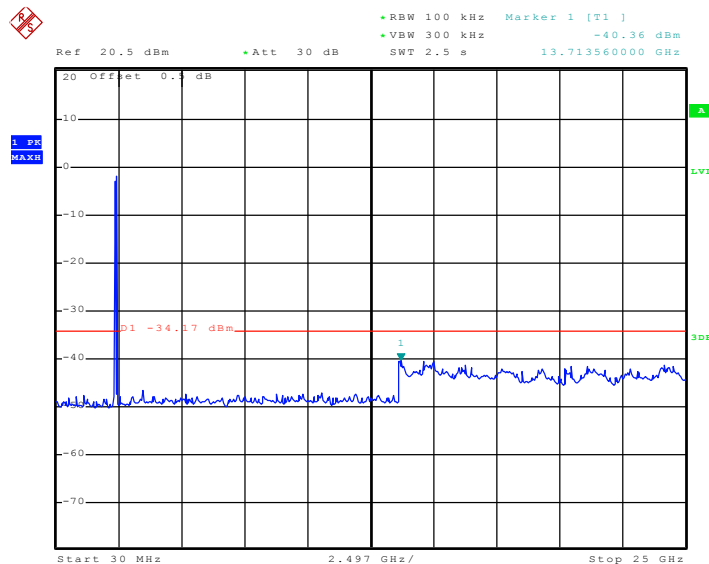

Date: 8.JAN.2015 12:58:33

30MHz~25GHz


Middle channel

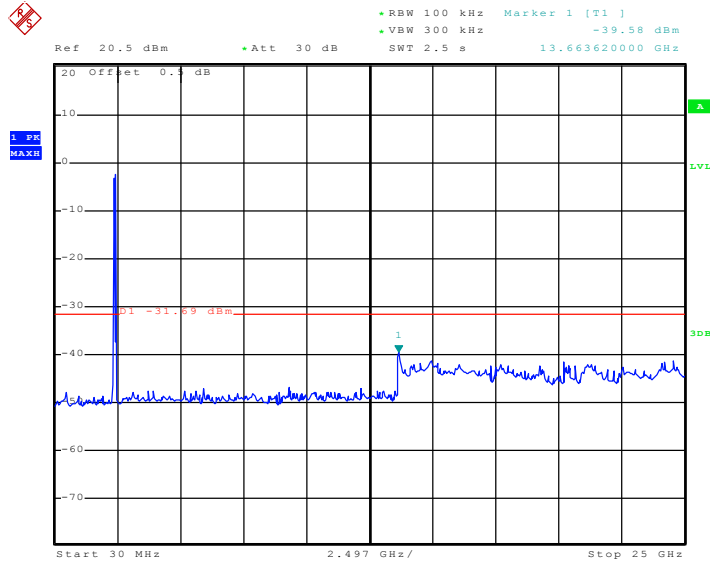

Date: 8.JAN.2015 12:59:03

30MHz~25GHz

Highest channel


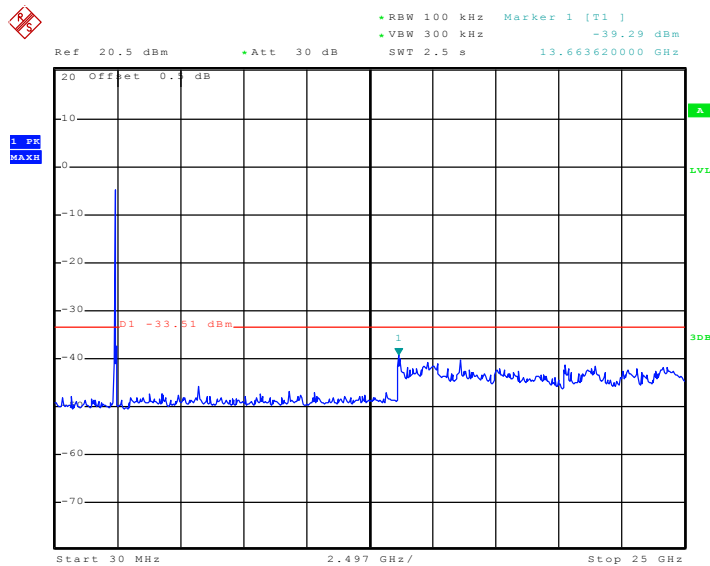


Date: 8.JAN.2015 12:59:37

30MHz~25GHz


6.7.2 Radiated Emission Method

Test Requirement:	FCC Part 15 C Section 15.209 and 15.205				
Test Method:	ANSI C63.4:2003				
Test Frequency Range:	9KHz to 25GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Remark
	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
		Peak	1MHz	10Hz	Average Value
Limit:	Frequency	Limit (dBuV/m @3m)		Remark	
	30MHz-88MHz	40.0		Quasi-peak Value	
	88MHz-216MHz	43.5		Quasi-peak Value	
	216MHz-960MHz	46.0		Quasi-peak Value	
	960MHz-1GHz	54.0		Quasi-peak Value	
	Above 1GHz	54.0		Average Value	
		74.0		Peak Value	
Test Procedure:	<ol style="list-style-type: none"> 1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. 				
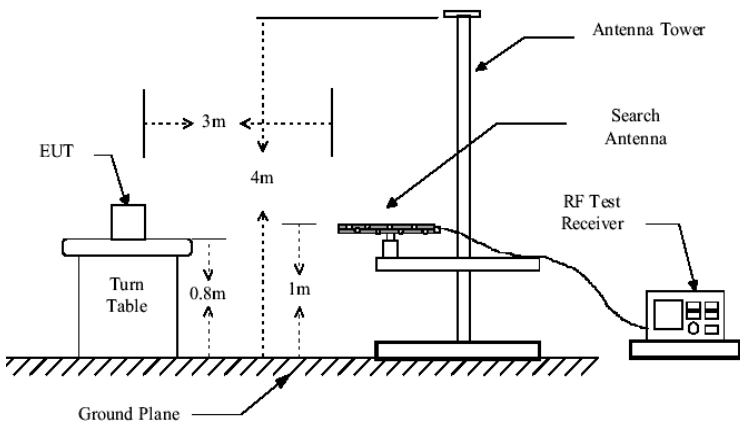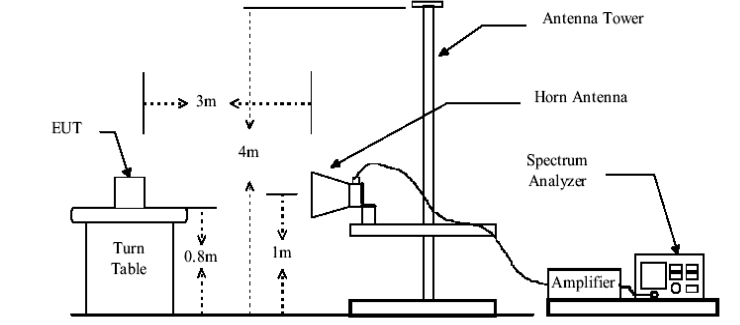
<p>Test setup:</p>	<p>Below 1GHz</p>  <p>Above 1GHz</p> 
<p>Test Instruments:</p>	<p>Refer to section 5.6 for details</p>
<p>Test mode:</p>	<p>Refer to section 5.3 for details</p>
<p>Test results:</p>	<p>Passed</p>
<p>Remark:</p>	<ol style="list-style-type: none"> 1. Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis is the worst case. 2. 9 kHz to 30MHz is too low, so only shows the data of above 30MHz in this report.

Below 1GHz


Horizontal :

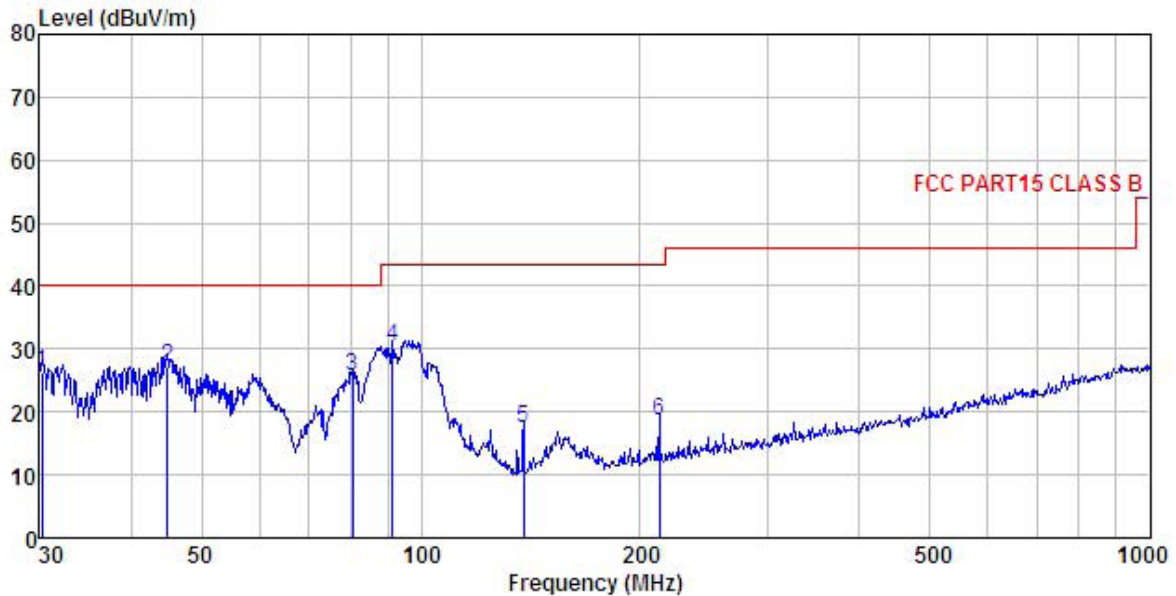

Site : 3m chamber
 Condition : FCC PART15 CLASS B 3m VULB9163(30M1G) HORIZONTAL
 EUT : Smart phone
 Model : CAPHG22-01
 Test mode : WIFI Mode
 Power Rating : AC120V/60Hz
 Environment : Temp:25.5°C Humi:55%
 Test Engineer:
 REMARK :

	Freq	ReadAntenna	Cable	Preamp	Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line		
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m		
1	30.211	43.49	12.33	0.43	29.98	26.27	40.00	-13.73	QP
2	44.901	42.90	13.55	0.56	29.86	27.15	40.00	-12.85	QP
3	80.644	45.52	8.84	0.85	29.64	25.57	40.00	-14.43	QP
4	91.495	46.83	12.24	0.92	29.56	30.43	43.50	-13.07	QP
5	138.387	37.22	8.30	1.25	29.28	17.49	43.50	-26.01	QP
6	212.270	35.11	10.93	1.44	28.75	18.73	43.50	-24.77	QP

Vertical :

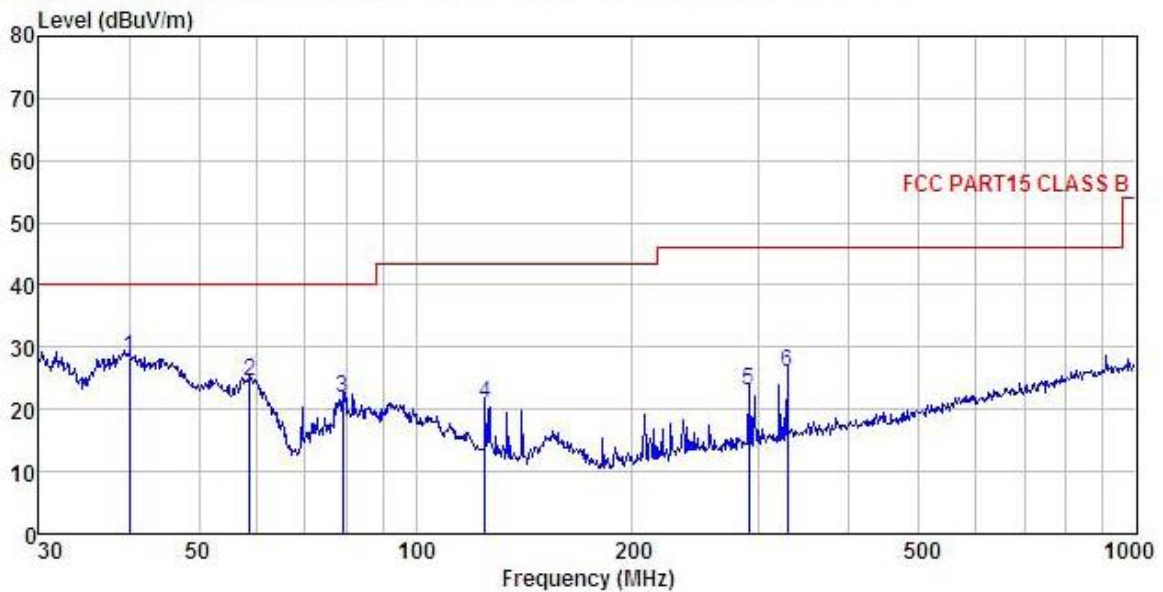

Site : 3m chamber
 Condition : FCC PART15 CLASS B 3m VULB9163(30M1G) VERTICAL
 EUT : Smart phone
 Model : CAPHG22-01
 Test mode : WIFI Mode
 Power Rating : AC120V/60Hz
 Environment : Temp:25.5°C Humi:55%
 Test Engineer:
 REMARK :

	ReadAntenna	Cable	Preamp		Limit	Over	
Freq	Level	Factor	Loss	Factor	Level	Line	Limit
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	39.994	44.26	13.58	0.52	29.90	28.46	40.00 -11.54 QP
2	58.819	40.71	12.77	0.68	29.78	24.38	40.00 -15.62 QP
3	79.243	42.21	8.43	0.85	29.65	21.84	40.00 -18.16 QP
4	125.007	39.43	9.70	1.16	29.36	20.93	43.50 -22.57 QP
5	290.017	36.98	12.86	1.74	28.47	23.11	46.00 -22.89 QP
6	327.887	38.82	13.66	1.87	28.51	25.84	46.00 -20.16 QP

Above 1GHz

Test mode: 802.11b			Test channel: Lowest			Remark: Peak		
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polar.
4824.00	46.19	31.53	8.90	40.24	46.38	74.00	-27.62	Vertical
4824.00	46.76	31.53	8.90	40.24	46.95	74.00	-27.05	Horizontal
Test mode: 802.11b			Test channel: Lowest			Remark: Average		
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polar.
4824.00	36.03	31.53	8.90	40.24	36.22	54.00	-17.78	Vertical
4824.00	36.19	31.53	8.90	40.24	36.38	54.00	-17.62	Horizontal

Test mode: 802.11b			Test channel: Middle			Remark: Peak		
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polar.
4874.00	46.19	31.58	8.98	40.15	46.60	74.00	-27.40	Vertical
4874.00	45.75	31.58	8.98	40.15	46.16	74.00	-27.84	Horizontal
Test mode: 802.11b			Test channel: Middle			Remark: Average		
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polar.
4874.00	36.46	31.58	8.98	40.15	36.87	54.00	-17.13	Vertical
4874.00	35.57	31.58	8.98	40.15	35.98	54.00	-18.02	Horizontal

Test mode: 802.11b			Test channel: Highest			Remark: Peak		
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polar.
4924.00	45.29	31.69	9.08	40.03	46.03	74.00	-27.97	Vertical
4924.00	46.10	31.69	9.08	40.03	46.84	74.00	-27.16	Horizontal
Test mode: 802.11b			Test channel: Highest			Remark: Average		
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polar.
4924.00	35.24	31.69	9.08	40.03	35.98	54.00	-18.02	Vertical
4924.00	36.01	31.69	9.08	40.03	36.75	54.00	-17.25	Horizontal

Remark:

1. *Final Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor*
2. *The emission levels of other frequencies are very lower than the limit and not show in test report.*

Test mode: 802.11g			Test channel: Lowest			Remark: Peak		
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV)	Limit Line (dBuV/m)	Over Limit (dB)	Polar.
4824.00	45.40	31.53	8.90	40.24	45.59	74.00	-28.41	Vertical
4824.00	44.69	31.53	8.90	40.24	44.88	74.00	-29.12	Horizontal
Test mode: 802.11g			Test channel: Lowest			Remark: Average		
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV)	Limit Line (dBuV/m)	Over Limit (dB)	Polar.
4824.00	35.32	31.53	8.90	40.24	35.51	54.00	-18.49	Vertical
4824.00	34.57	31.53	8.90	40.24	34.76	54.00	-19.24	Horizontal

Test mode: 802.11g			Test channel: Middle			Remark: Peak		
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV)	Limit Line (dBuV/m)	Over Limit (dB)	Polar.
4874.00	45.52	31.58	8.98	40.15	45.93	74.00	-28.07	Vertical
4874.00	45.45	31.58	8.98	40.15	45.86	74.00	-28.14	Horizontal
Test mode: 802.11g			Test channel: Middle			Remark: Average		
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV)	Limit Line (dBuV/m)	Over Limit (dB)	Polar.
4874.00	35.47	31.58	8.98	40.15	35.88	54.00	-18.12	Vertical
4874.00	35.36	31.58	8.98	40.15	35.77	54.00	-18.23	Horizontal

Test mode: 802.11g			Test channel: Highest			Remark: Peak		
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polar.
4924.00	46.46	31.69	9.08	40.03	47.20	74.00	-26.80	Vertical
4924.00	46.39	31.69	9.08	40.03	47.13	74.00	-26.87	Horizontal
Test mode: 802.11g			Test channel: Highest			Remark: Average		
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polar.
4924.00	36.22	31.69	9.08	40.03	36.96	54.00	-17.04	Vertical
4924.00	36.35	31.69	9.08	40.03	37.09	54.00	-16.91	Horizontal

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

Test mode: 802.11n(H20)			Test channel: Lowest			Remark: Peak		
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polar.
4824.00	46.17	31.53	8.90	40.24	46.36	74.00	-27.64	Vertical
4824.00	46.59	31.53	8.90	40.24	46.78	74.00	-27.22	Horizontal
Test mode: 802.11n(H20)			Test channel: Lowest			Remark: Average		
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polar.
4824.00	35.86	31.53	8.90	40.24	36.05	54.00	-17.95	Vertical
4824.00	35.96	31.53	8.90	40.24	36.15	54.00	-17.85	Horizontal

Test mode: 802.11n(H20)			Test channel: Middle			Remark: Peak		
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polar.
4874.00	45.78	31.58	8.98	40.15	46.19	74.00	-27.81	Vertical
4874.00	46.17	31.58	8.98	40.15	46.58	74.00	-27.42	Horizontal
Test mode: 802.11n(H20)			Test channel: Middle			Remark: Average		
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polar.
4874.00	35.54	31.58	8.98	40.15	35.95	54.00	-18.05	Vertical
4874.00	36.63	31.58	8.98	40.15	37.04	54.00	-16.96	Horizontal

Test mode: 802.11n(H20)			Test channel: Highest			Remark: Peak		
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polar.
4924.00	45.87	31.69	9.08	40.03	46.61	74.00	-27.39	Vertical
4924.00	46.24	31.69	9.08	40.03	46.98	74.00	-27.02	Horizontal
Test mode: 802.11n(H20)			Test channel: Highest			Remark: Average		
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polar.
4924.00	34.16	31.69	9.08	40.03	34.90	54.00	-19.10	Vertical
4924.00	36.26	31.69	9.08	40.03	37.00	54.00	-17.00	Horizontal

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

Test mode: 802.11n(H40)			Test channel: Lowest			Remark: Peak		
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polar.
4844.00	45.46	31.53	8.90	40.24	45.65	74.00	-28.35	Vertical
4844.00	46.01	31.53	8.90	40.24	46.20	74.00	-27.80	Horizontal
Test mode: 802.11n(H40)			Test channel: Lowest			Remark: Average		
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polar.
4844.00	35.47	31.53	8.90	40.24	35.66	54.00	-18.34	Vertical
4844.00	36.19	31.53	8.90	40.24	36.38	54.00	-17.62	Horizontal

Test mode: 802.11n(H40)			Test channel: Middle			Remark: Peak		
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polar.
4874.00	45.78	31.58	8.98	40.15	46.19	74.00	-27.81	Vertical
4874.00	45.35	31.58	8.98	40.15	45.76	74.00	-28.24	Horizontal
Test mode: 802.11n(H40)			Test channel: Middle			Remark: Average		
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polar.
4874.00	35.46	31.58	8.98	40.15	35.87	54.00	-18.13	Vertical
4874.00	35.67	31.58	8.98	40.15	36.08	54.00	-17.92	Horizontal

Test mode: 802.11n(H40)			Test channel: Highest			Remark: Peak		
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polar.
4904.00	47.00	31.69	9.08	40.03	47.74	74.00	-26.26	Vertical
4904.00	46.07	31.69	9.08	40.03	46.81	74.00	-27.19	Horizontal
Test mode: 802.11n(H40)			Test channel: Highest			Remark: Average		
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polar.
4904.00	37.26	31.69	9.08	40.03	38.00	54.00	-16.00	Vertical
4904.00	36.34	31.69	9.08	40.03	37.08	54.00	-16.92	Horizontal

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.