

FCC 47 CFR PART 15 SUBPART C**TEST REPORT****For****Product Name: ClickShare CSE-200****Brand Name: Barco****Model No.: R9861520****Series Model.: N/A****FCC ID: 2AAED-R9861520****IC: 9393B-R9861520****Test Report Number:****C151211R01-RPW****Issued for****Barco NV****President Kennedypark 35, 8500 Kortrijk, Belgium****Issued by****Compliance Certification Services Inc.****Kun shan Laboratory****No.10 Weiye Rd., Innovation park, Eco&Tec,
Development Zone, Kunshan City, Jiangsu, China****TEL: 86-512-57355888****FAX: 86-512-57370818**

TESTING CERT #2541.01

Note: This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by A2LA or any government agencies. The test results in the report only apply to the tested sample.

TABLE OF CONTENTS

1.	TEST RESULT CERTIFICATION.....	3
2.	EUT DESCRIPTION.....	4
3.	TEST METHODOLOGY	5
3.1.	EUT CONFIGURATION	5
3.2.	EUT EXERCISE	5
3.3.	GENERAL TEST PROCEDURES.....	5
3.4.	FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS.....	6
3.5.	DESCRIPTION OF TEST MODES.....	7
3.6.	ANTENNA DESCRIPTION	7
4.	INSTRUMENT CALIBRATION.....	7
4.1.	MEASURING INSTRUMENT CALIBRATION	8
5.	FACILITIES AND ACCREDITATIONS	10
5.1.	FACILITIES	10
5.2.	EQUIPMENT.....	10
5.3.	LABORATORY ACCREDITATIONS AND LISTING	10
5.4.	TABLE OF ACCREDITATIONS AND LISTINGS	11
6.	SETUP OF EQUIPMENT UNDER TEST	12
6.1.	SETUP CONFIGURATION OF EUT	12
6.2.	SUPPORT EQUIPMENT.....	12
4.	FCC PART 15.247 REQUIREMENTS.....	13
4.1.	6DB BANDWIDTH	13
4.2.	99% BANDWIDTH MEASUREMENT.....	24
4.3.	PEAK POWER	35
4.4.	PEAK POWER SPECTRAL DENSITY	37
4.5.	SPURIOUS EMISSIONS	48
4.6.	RADIATED EMISSIONS	82
4.7.	POWERLINE CONDUCTED EMISSIONS	97

1. TEST RESULT CERTIFICATION

Product Name:	ClickShare CSE-200
Trade Name:	Barco
Model Name.:	R9861520
Series Model:	N/A
Applicant Discrepancy:	Initial
Device Category:	Portable device
Date of Test:	December 20, 2015 ~ January 10, 2016
Applicant:	Barco NV President Kennedypark 35, 8500 Kortrijk, Belgium
Manufacturer:	Barco NV President Kennedypark 35, 8500 Kortrijk, Belgium
Application Type:	Certification

APPLICABLE STANDARDS

STANDARD	TEST RESULT
FCC 47 CFR Part 15 Subpart C	No non-compliance noted
Canada RSS-247 Issue 1	No non-compliance noted
Canada RSS-Gen Issue 4	No non-compliance noted

We hereby certify that:

The above equipment was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10: 2013 and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 15.207, 15.209, 15.247.

The test results of this report relate only to the tested sample EUT identified in this report.

Approved by:

Jeff.Fang
RF Manager
Compliance Certification Service Inc.

Tested by:

Lily.Wang
Test Engineer
Compliance Certification Service Inc.

2. EUT DESCRIPTION

Product Name:	ClickShare CSE-200
Brand Name:	Barco
Model Name:	R9861520
Series Model:	N/A
Model Discrepancy:	N/A
Power Adapter:	Brand Name: GLOBTEK Model :GT-46180-1812 Input: 100-240V~0.6A 50-60Hz Output: DC12V 1.5A
Frequency Range:	2.4G:2412MHz-2462MHz
Transmit Power:	IEEE 802.11b mode: 18.02 dBm IEEE 802.11g mode: 21.85 dBm IEEE 802.11n HT20 mode: 22.06 dBm
Modulation Technique:	IEEE802.11b mode: DSSS (1,2,5.5 and 11 Mbps) IEEE802.11g mode: DSSS /OFDM (6,9,12,18,24,36,48 and 54 Mbps) IEEE802.11n HT20 mode: OFDM (MCS0~MCS7)
Number of Channels:	IEEE 802.11b/g/n HT20 mode: 11 Channels
Antenna Specification:	dipole antenna 0 for 2.4GHz Gain 2.0dBi dipole antenna 1 for 2.4GHz Gain 2.0dBi

Remark:

1.The sample selected for test was engineering sample that approximated to production product and was provided by manufacturer.

2.This submittal(s) (test report) is intended for **FCC ID: 2AAED-R9861520** filing to comply with Section 15.207, 15.209 and 15.247 of the FCC Part 15, Subpart C Rules.

3.This submittal(s) (test report) is intended for **IC: 9393B-R9861520** filing to comply with Canada RSS-247 Issue 1 and Canada RSS-Gen Issue 4 Rules.

3. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.10 2013 and FCC CFR 47 15.207, 15.209 and 15.247.

3.1.EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

3.2.EUT EXERCISE

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

3.3.GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.10 2013 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

Under 1GHz

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 13.1.4.1 of ANSI C63.10:2013.

Above 1GHz

The EUT is placed on a turn table, which is 1.5 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 13.1.4.1 of ANSI C63.10:2013.

3.4.FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS

Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41			

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

3.5.DESCRPTION OF TEST MODES

The EUT transmitting and receiving with two antennas working at b/g/n mode, Both chain0 and chain1 could be used as transmit/receiving antenna, so 2x2 configuration was used for all testing in this report.

The worst-case data rates:

IEEE802.11b mode:

Channel Low (2412MHz)

Channel Mid (2437MHz)

Channel High (2462MHz) with 1Mbps data rate was chosen for full testing.

IEEE802.11g mode:

Channel Low (2412MHz)

Channel Mid (2437MHz)

Channel High (2462MHz) with 24Mbps data rate was chosen for full testing.

IEEE 802.11n HT20 MHz Channel mode:

Channel Low (2412MHz)

Channel Mid (2437MHz)


Channel High (2462MHz) with MCS0 data rate was chosen for full testing.

3.6.ANTENNA DESCRIPTION

an intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached or an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section”

* the antenna of this EUT is a unique(dipole Antenna for 2.4G WiFi).

* the EUT complies with the requirement of 15.203.

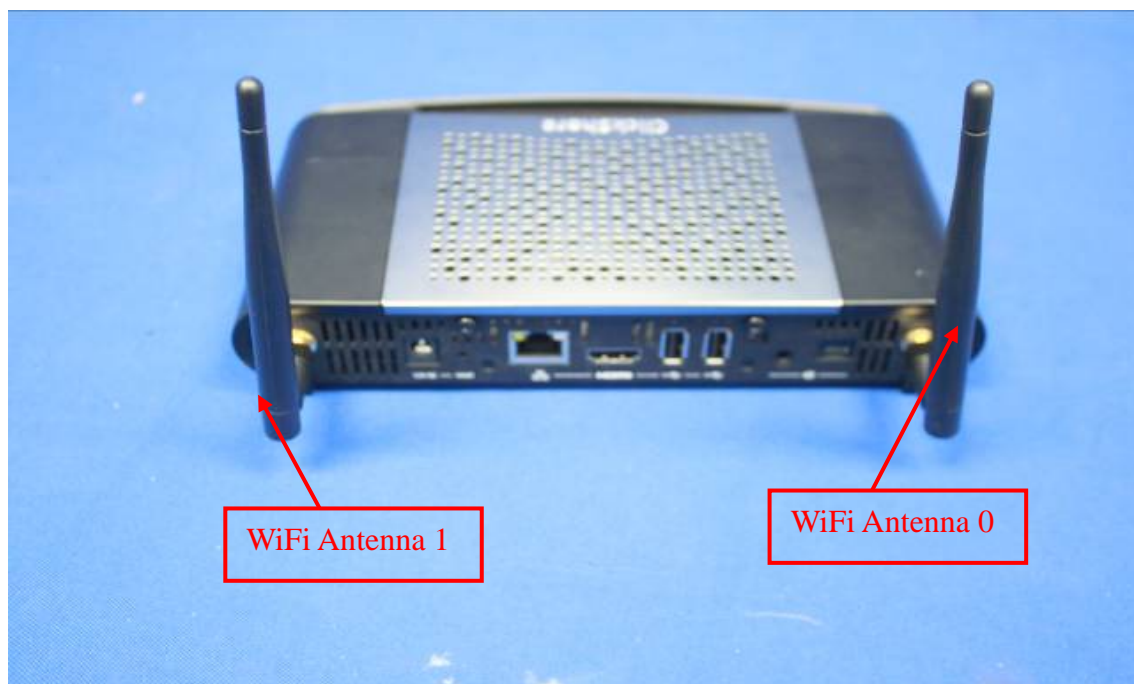

4. INSTRUMENT CALIBRATION

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

Equipment Used for Emissions Measurement

Conducted Emissions Test Site					
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due
Spectrum Analyzer	Agilent	E4446A	MY44020154	2015-4-9	2016-4-8
DETECTOR NEGATIVE	Agilent	8473B	MY42240176	2015-5-11	2016-5-10
OSCILLOSCOPE	Agilent	DSO6104A	MY44002585	2015-3-16	2016-3-15
Power Sensor	Anritsu	MA2411A	0917072	2015-4-24	2016-4-23
Power Meter	Agilent	U2021XA	MY53120005	2015-4-24	2016-4-23
Power SPLITTER	Mini-Circuits	ZN2PD-9G	SF078500430	N.C.R	N.C.R
DC Power Supply	AGILENT	E3632A	MY50340053	N.C.R	N.C.R
Temp. / Humidity Chamber	TERCHY	MHK-120AK	X30109	2015-1-22	2016-1-21
Test Software			EZ-EMC		

977 Chamber					
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due
Spectrum Analyzer	Agilent	E4446A	MY44020154	2015-4-9	2016-4-8
EMI Test Receiver	R&S	ESCI	101378	2015-1-22	2016-1-21
Pre-Amplifier	MINI	ZFL-1000VH2	d041703	2015-1-22	2016-1-21
Pre-Amplifier	Miteq	JS41-00101800-32-10P	1675713	2015-1-22	2016-1-21
Bilog Antenna	Sunol	JB1	A062604	2015-3-6	2016-3-5
Horn-antenna	SCHWARZBECK	BBHA9120D	D:266	2015-3-7	2016-3-6
Turn Table	CT	CT123	4165	N.C.R	N.C.R
Antenna Tower	CT	CTERG23	3256	N.C.R	N.C.R
Controller	CT	CT100	95637	N.C.R	N.C.R
Test Software			EZ-EMC		

Conducted Emission					
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due
EMI TEST RECEIVER	R&S	ESCI	100781	2015-3-16	2016-3-15
V (V-LISN)	SCHWARZBECK	NNLK 8129	8129-143	N.C.R	N.C.R
LISN (EUT)	FCC	FCC-LISN-50/250-50-2-02	05012	2015-3-16	2016-3-15
Pulse LIMITER	R&S	ESH3-Z2	100524	2015-9-24	2016-9-23
Test Software			EZ-EMC		

Remark: The measurement uncertainty is less than +/- 2.81dB, which is evaluated as per the NAMAS NIS 81 and CISPR/A/291/CDV.

Expanded Uncertainty (95% CONFIDENCE INTERVAL): K=2

5. FACILITIES AND ACCREDITATIONS

5.1.FACILITIES

All measurement facilities used to collect the measurement data are located at CCS China Kunshan Lab at 10#Weiye Rd, Innovation Park Eco. & Tec. Development Zone

Kunshan city JiangSu, (215300), CHINA.

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.10 2013 and CISPR Publication 22.

5.2.EQUIPMENT

Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.



Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

5.3.LABORATORY ACCREDITATIONS AND LISTING

The test facilities used to perform radiated and conducted emissions tests are accredited by American Association for Laboratory Accreditation Program for the specific scope accreditation under Lab Code: 200581-0 to perform Electromagnetic Interference tests according to FCC Part 15 and CISPR 22 requirements. In addition, the test facilities are listed with Industry Canada, Certification and Engineering Bureau, 2324E-1 for 10m chamber 10m, 2324E-2 for 10m chamber 3m; the test facilities are listed with USA, Certification and Engineering Bureau, 424105 for 10m chamber 10m, 238958 for 10m chamber 3m.

5.4.TABLE OF ACCREDITATIONS AND LISTINGS

Country	Agency	Scope of Accreditation	Logo
USA	A2LA	47 CFR FCC Part 15/18 (using ANSI C63.10 :2013); VCCI V3; CNS 13438; CNS 13439; CNS 13803; CISPR 11; EN 55011; CISPR 13; EN 55013; CISPR 22:2005; CISPR 22:1997 +A1 :2000+A2 :2002; EN 55022:2006; EN55022 :1998 +A1 :2001+A2 :2003; EN 61000-6-3 (excluding discontinuous interference); EN 61000-6-4; AS/NZS CISPR 22; CAN/CSA-CEI/IEC CISPR 22; EN 61000-3-2; EN 61000-3-3; EN550024; EN 61000-4-2; EN 61000-4-3; EN61000-4-4; EN 61000-4-5; EN 61000-4-6; IEC 61000-4-8; EN 61000-4-11; IEC61000-3-2; IEC61000-3-3; IEC 61000-4-2; IEC 61000-4-3; IEC 61000-4-4; IEC 61000-4-5; IEC 61000-4-6; IEC 61000-4-8; IEC 61000-4-11; EN 300 220-3; EN 300 328; EN 300 330-2; EN 300 440-1; EN 300-440-2; EN 300 893; EN 301 489-01; EN 301 489-3; EN 301 489-07; EN 301 489-17; 47 CFR FCC Part 15, 22, 24	
USA	FCC	3/10 meter Sites to perform FCC Part 15/18 measurements	 93105, 90471
Japan	VCCI	3/10 meter Sites and conducted test sites to perform radiated/conducted measurements	VCCI R-1600 C-1707 G-216

** No part of this report may be used to claim or imply product endorsement by A2LA or any agency of the US Government.*

6. SETUP OF EQUIPMENT UNDER TEST

6.1.SETUP CONFIGURATION OF EUT

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

6.2.SUPPORT EQUIPMENT

No.	Device Type	Brand	Model	Series No.	FCC ID
1.	Notebook	DELL	E5430	CN8YYW1	N/A

Remark:

- 2. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.*
- 3. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.*


4. FCC PART 15.247 REQUIREMENTS

4.1.6DB BANDWIDTH

LIMIT

According to §15.247(a)(2), systems using digital modulation techniques may operate in the 902 - 928 MHz, and 2400 - 2483.5 MHz bands, and 5725 - 5850 MHz bands. The minimum 6dB bandwidth shall be at least 500kHz.

Test Configuration

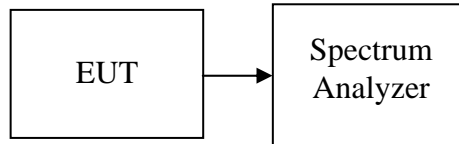

TEST PROCEDURE

The transmitter output is connected to the spectrum analyzer. The RBW is set to 1% to 3% of the selected span. The VBW is set to 3 times the RBW. The sweep time is occupied.

TEST RESULTS

No non-compliance noted

Test Data

IEEE 802.11b mode /Chain 0

Channel	Frequency (MHz)	Bandwidth (MHz)	Limit (kHz)	Result
Low	2412	10.155	>500	PASS
Mid	2437	10.119		PASS
High	2462	10.119		PASS

IEEE 802.11b mode /Chain 1

Channel	Frequency (MHz)	Bandwidth (MHz)	Limit (kHz)	Result
Low	2412	10.152	>500	PASS
Mid	2437	10.019		PASS
High	2462	10.134		PASS

IEEE 802.11g mode /Chain 0

Channel	Frequency (MHz)	Bandwidth (MHz)	Limit (kHz)	Result
Low	2412	16.401	>500	PASS
Mid	2437	16.402		PASS
High	2462	16.402		PASS

IEEE 802.11g mode /Chain 1

Channel	Frequency (MHz)	Bandwidth (MHz)	Limit (kHz)	Result
Low	2412	16.396	>500	PASS
Mid	2437	16.377		PASS
High	2462	16.388		PASS

IEEE 802.11n HT20 mode / Chain 0

Channel	Frequency (MHz)	Bandwidth (MHz)	Limit (kHz)	Result
Low	2412	17.543	>500	PASS
Mid	2437	17.360		PASS
High	2462	17.554		PASS

IEEE 802.11n HT20 mode / Chain 1

Channel	Frequency (MHz)	Bandwidth (MHz)	Limit (kHz)	Result
Low	2412	17.579	>500	PASS
Mid	2437	17.333		PASS
High	2462	17.358		PASS


Test Plot

IEEE 802.11b MODE /Chain 0

6dB Bandwidth (CH Low)

Agilent

R T

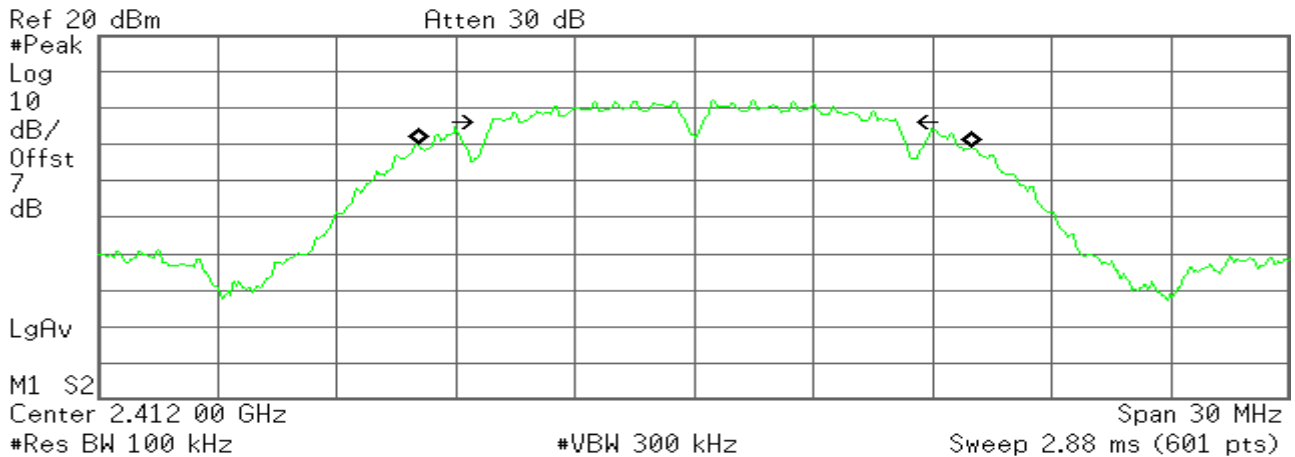

Occupied Bandwidth
13.9618 MHz


Occ BW % Pwr 99.00 %
x dB -6.00 dB

Transmit Freq Error 14.689 kHz
x dB Bandwidth 10.155 MHz

6dB Bandwidth (CH Mid)

Agilent

R T

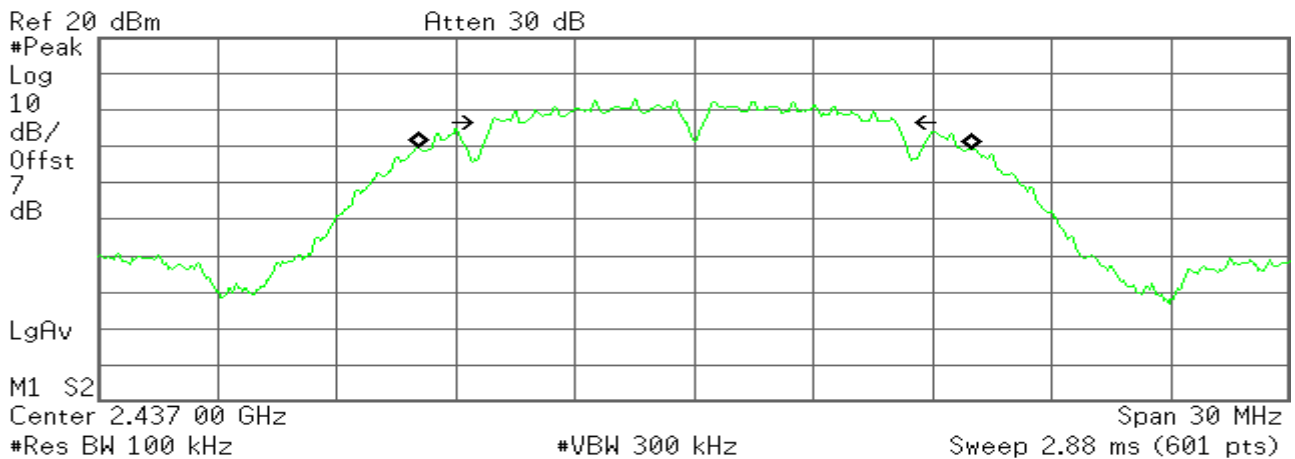

Occupied Bandwidth
13.9444 MHz


Occ BW % Pwr 99.00 %
x dB -6.00 dB

Transmit Freq Error 31.279 kHz
x dB Bandwidth 10.119 MHz

6dB Bandwidth (CH High)

Agilent

R T

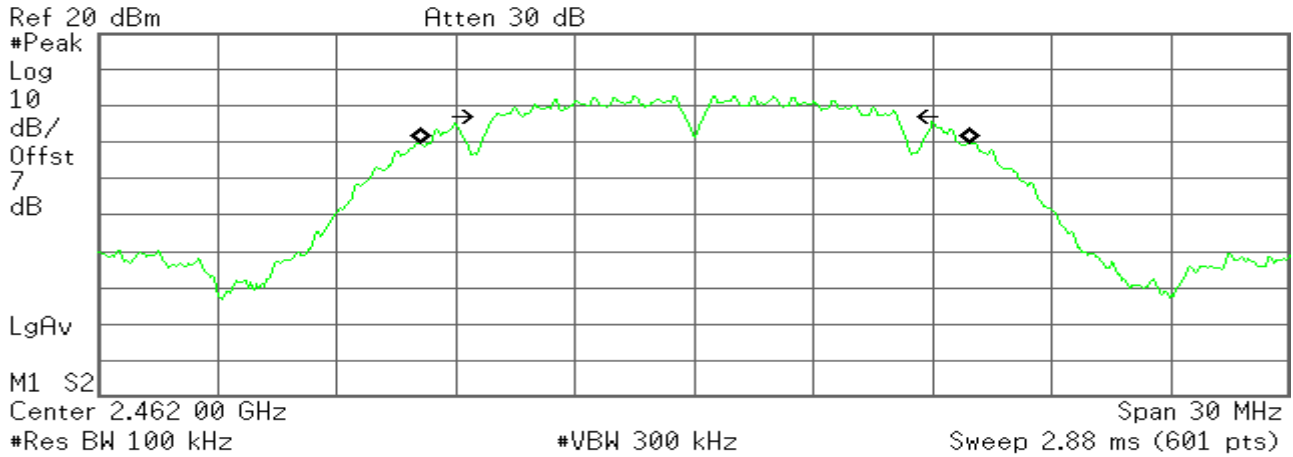

Occupied Bandwidth
13.8752 MHz

Occ BW % Pwr 99.00 %
x dB -6.00 dB


Transmit Freq Error 19.261 kHz
x dB Bandwidth 10.119 MHz

IEEE 802.11b MODE /Chain 1

6dB Bandwidth (CH Low)

Agilent

R T

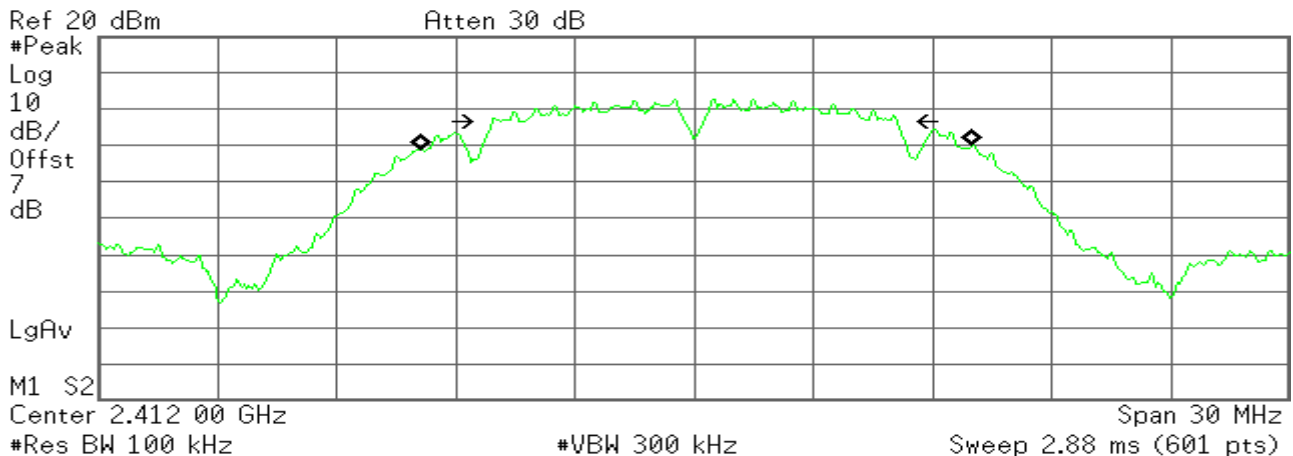

Occupied Bandwidth
13.9102 MHz


Occ BW % Pwr 99.00 %
x dB -6.00 dB

Transmit Freq Error 56.174 kHz
x dB Bandwidth 10.152 MHz

6dB Bandwidth (CH Mid)

Agilent

R T

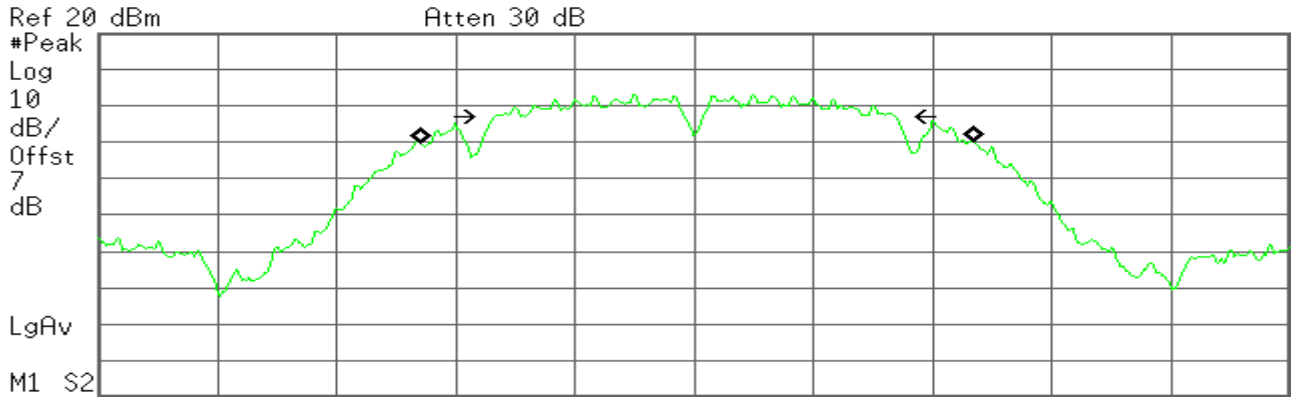

Ref 20 dBm Atten 30 dB
 #Peak Log 10 dB/ Offst 7 dB
 LgAv
 M1 S2
 Center 2.437 00 GHz Span 30 MHz
 #Res BW 100 kHz #VBW 300 kHz Sweep 2.88 ms (601 pts)

Occupied Bandwidth
13.9395 MHz


Occ BW % Pwr 99.00 %
x dB -6.00 dB

Transmit Freq Error 57.054 kHz
x dB Bandwidth 10.019 MHz

6dB Bandwidth (CH High)

Agilent

R T

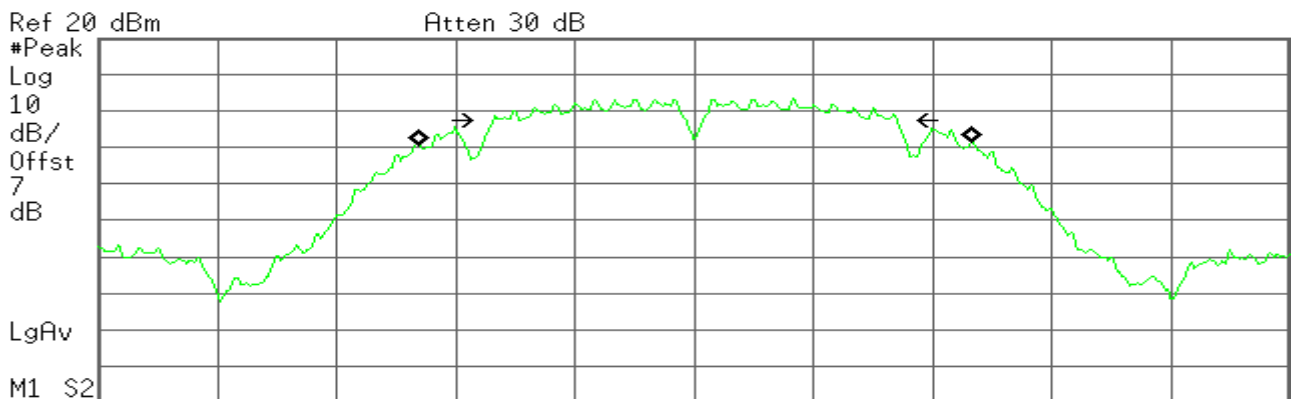

Ref 20 dBm Atten 30 dB
 #Peak Log 10 dB/ Offst 7 dB
 LgAv
 M1 S2
 Center 2.462 00 GHz Span 30 MHz
 #Res BW 100 kHz #VBW 300 kHz Sweep 2.88 ms (601 pts)

Occupied Bandwidth
13.9435 MHz

Occ BW % Pwr 99.00 %
x dB -6.00 dB


Transmit Freq Error 43.685 kHz
x dB Bandwidth 10.134 MHz

IEEE 802.11g MODE /Chain 0

6dB Bandwidth (CH Low)

Agilent

R T

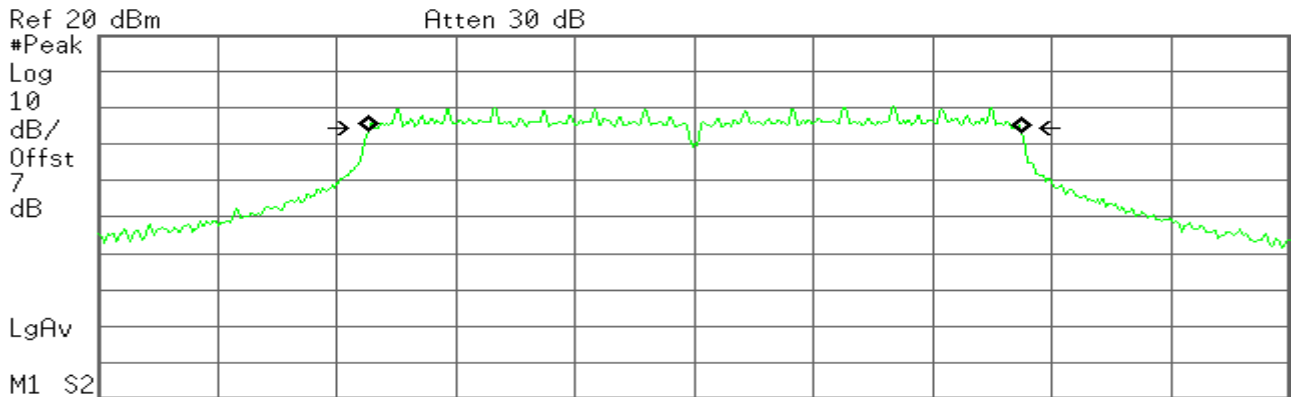

Ref 20 dBm Atten 30 dB
 #Peak Log 10 dB/ Offst 7 dB
 LgAv
 M1 S2
 Center 2.412 00 GHz Span 30 MHz
 #Res BW 100 kHz #VBW 300 kHz Sweep 2.88 ms (601 pts)

Occupied Bandwidth
16.4585 MHz


Occ BW % Pwr 99.00 %
x dB -6.00 dB

Transmit Freq Error 8.233 kHz
x dB Bandwidth 16.401 MHz

6dB Bandwidth (CH Mid)

Agilent

R T

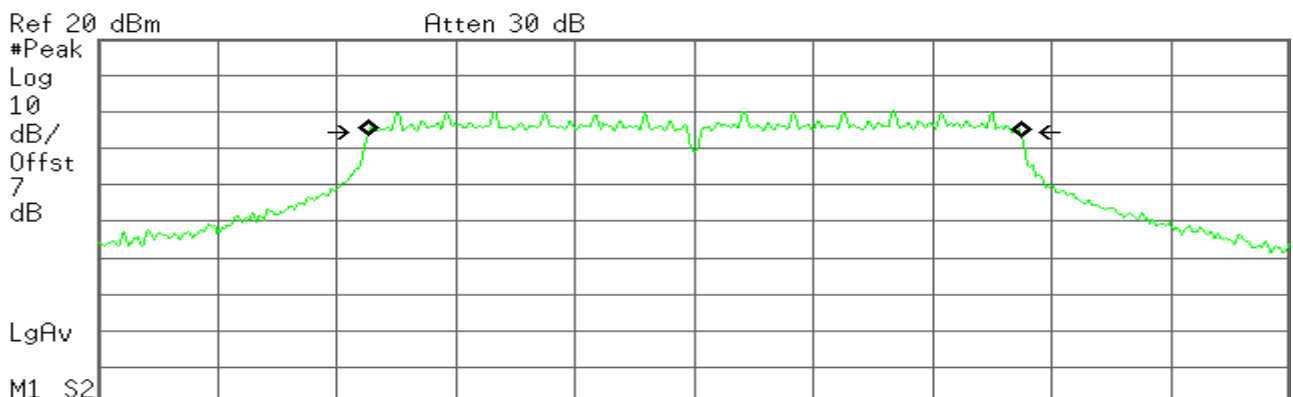

Ref 20 dBm Atten 30 dB
 #Peak Log 10 dB/ Offst 7 dB
 LgAv
 M1 S2
 Center 2.437 00 GHz Span 30 MHz
 #Res BW 100 kHz #VBW 300 kHz Sweep 2.88 ms (601 pts)

Occupied Bandwidth
16.4522 MHz


Occ BW % Pwr 99.00 %
x dB -6.00 dB

Transmit Freq Error 12.355 kHz
x dB Bandwidth 16.402 MHz

6dB Bandwidth (CH High)

Agilent

R T

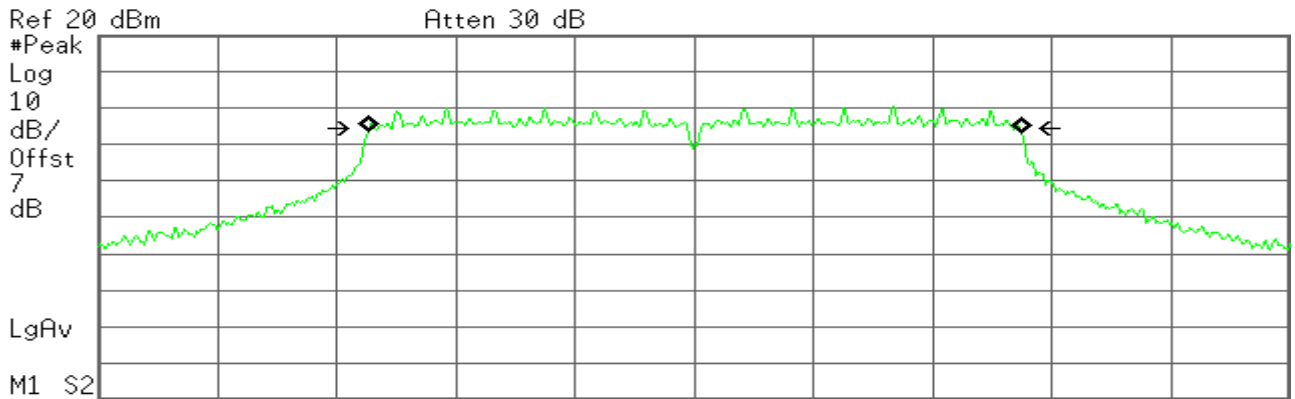

Center 2.462 00 GHz Span 30 MHz
#Res BW 100 kHz #VBW 300 kHz Sweep 2.88 ms (601 pts)

Occupied Bandwidth
16.4480 MHz

Occ BW % Pwr 99.00 %
x dB -6.00 dB


Transmit Freq Error 12.456 kHz
x dB Bandwidth 16.402 MHz

IEEE 802.11g MODE /Chain 1

6dB Bandwidth (CH Low)

Agilent

R T

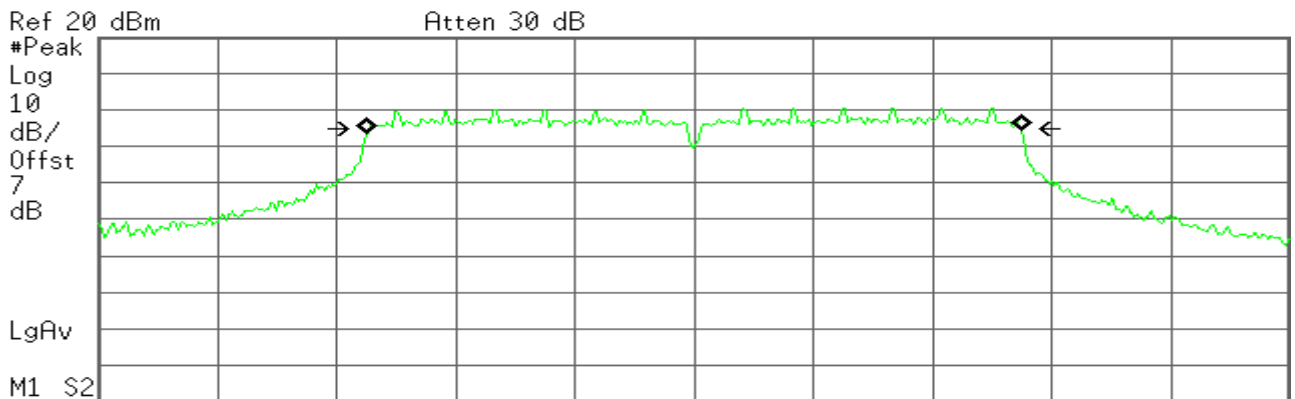

Center 2.412 00 GHz Span 30 MHz
#Res BW 100 kHz #VBW 300 kHz Sweep 2.88 ms (601 pts)

Occupied Bandwidth
16.4568 MHz


Occ BW % Pwr 99.00 %
x dB -6.00 dB

Transmit Freq Error -1.138 kHz
x dB Bandwidth 16.396 MHz

6dB Bandwidth (CH Mid)

Agilent

R T

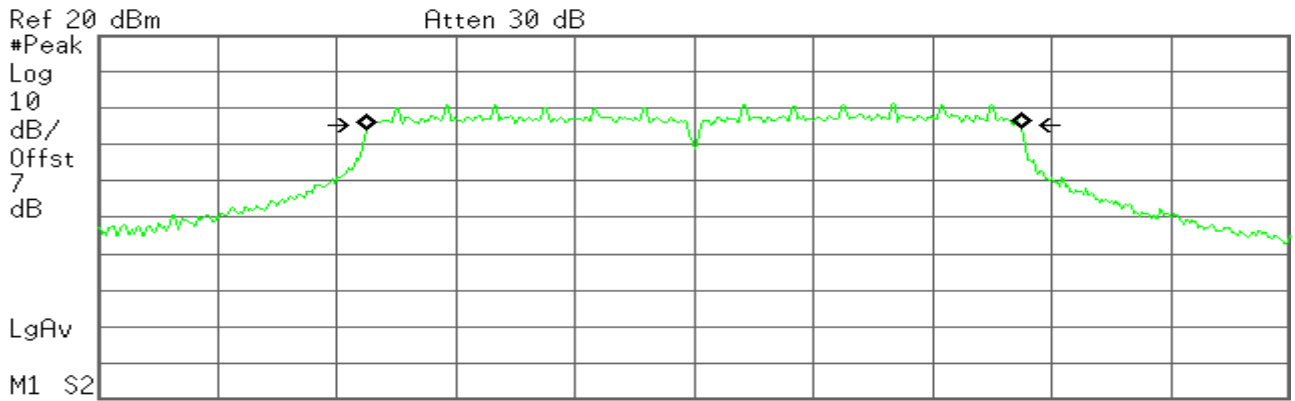

Ref 20 dBm Atten 30 dB
 #Peak Log 10 dB/ Offst 7 dB
 Center 2.437 00 GHz Span 30 MHz
 #Res BW 100 kHz #VBW 300 kHz Sweep 2.88 ms (601 pts)

Occupied Bandwidth
16.4671 MHz


Occ BW % Pwr 99.00 %
x dB -6.00 dB

Transmit Freq Error -2.212 kHz
x dB Bandwidth 16.377 MHz

6dB Bandwidth (CH High)

Agilent

R T

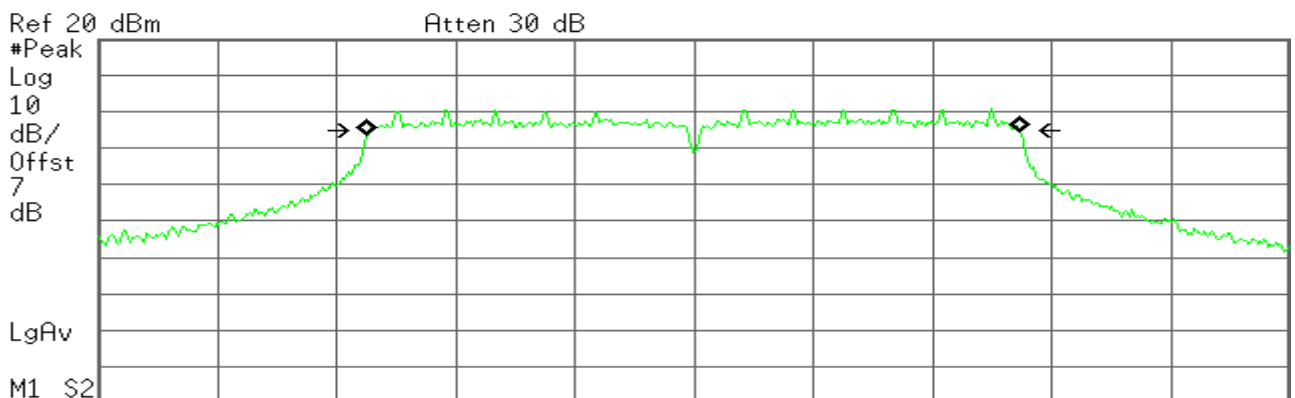

Ref 20 dBm Atten 30 dB
 #Peak Log 10 dB/ Offst 7 dB
 Start 2.447 00 GHz Stop 2.477 00 GHz
 #Res BW 100 kHz #VBW 300 kHz Sweep 2.88 ms (601 pts)

Occupied Bandwidth
16.4486 MHz

Occ BW % Pwr 99.00 %
x dB -6.00 dB


Transmit Freq Error -1.797 kHz
x dB Bandwidth 16.388 MHz

IEEE 802.11n HT20 mode / Chain 0

6dB Bandwidth (CH Low)

Agilent

R T

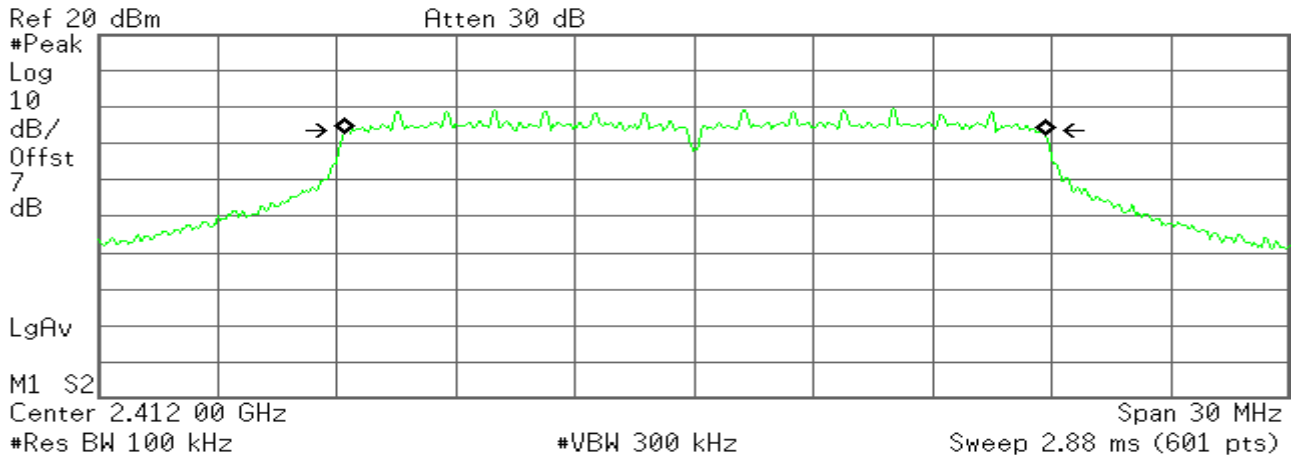

Occupied Bandwidth
17.6426 MHz


Occ BW % Pwr 99.00 %
x dB -6.00 dB

Transmit Freq Error 11.095 kHz
x dB Bandwidth 17.543 MHz

6dB Bandwidth (CH Mid)

Agilent

R T

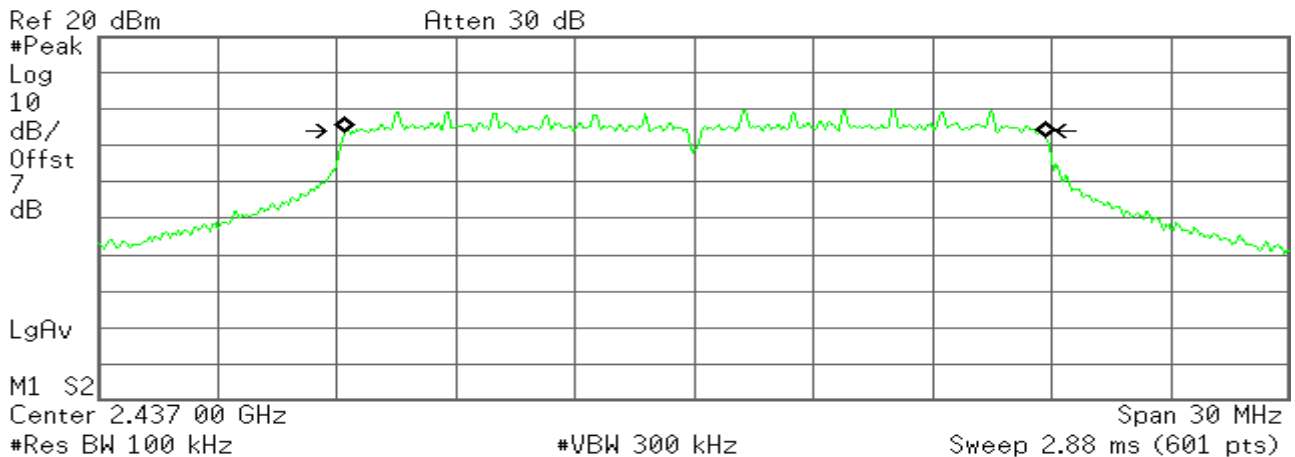

Occupied Bandwidth
17.6332 MHz


Occ BW % Pwr 99.00 %
x dB -6.00 dB

Transmit Freq Error 16.274 kHz
x dB Bandwidth 17.360 MHz

6dB Bandwidth (CH High)

Agilent

R T

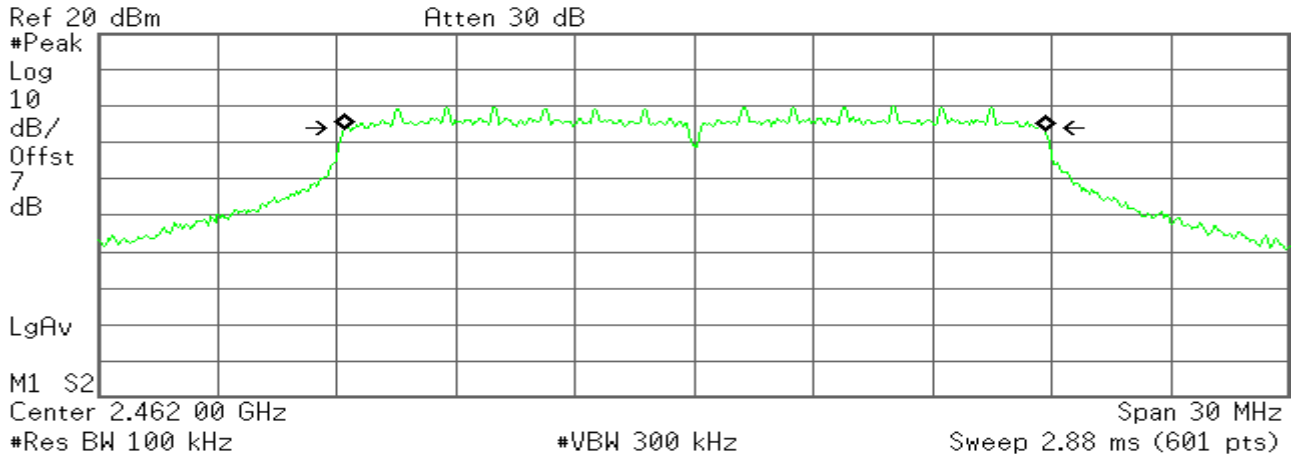

Occupied Bandwidth
17.6383 MHz

Occ BW % Pwr 99.00 %
x dB -6.00 dB


Transmit Freq Error 8.031 kHz
x dB Bandwidth 17.554 MHz

IEEE 802.11n HT20 mode / Chain 1

6dB Bandwidth (CH Low)

Agilent

R T

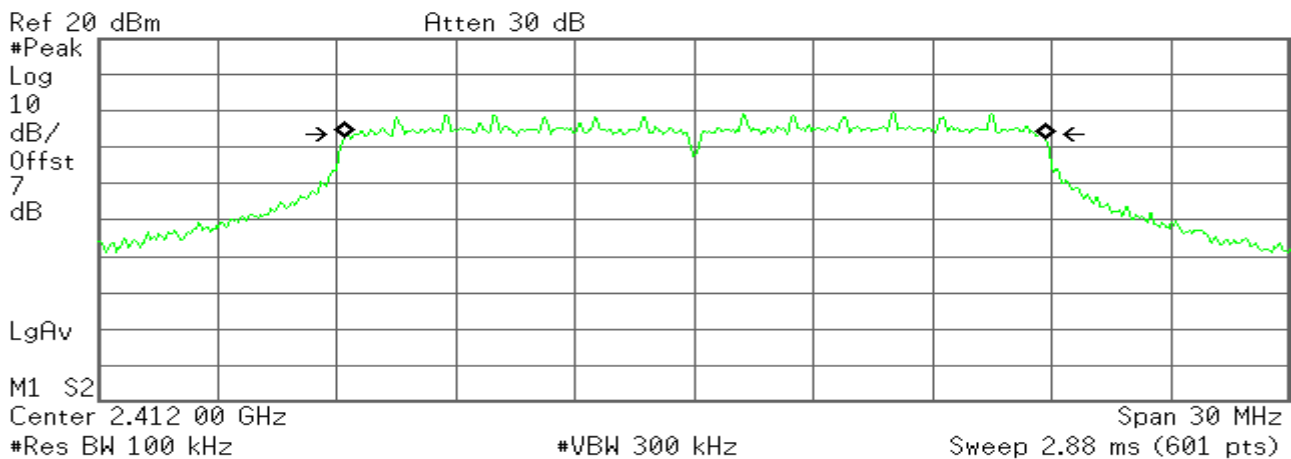

Occupied Bandwidth
17.6474 MHz


Occ BW % Pwr 99.00 %
x dB -6.00 dB

Transmit Freq Error 15.956 kHz
x dB Bandwidth 17.579 MHz

6dB Bandwidth (CH Mid)

Agilent

R T

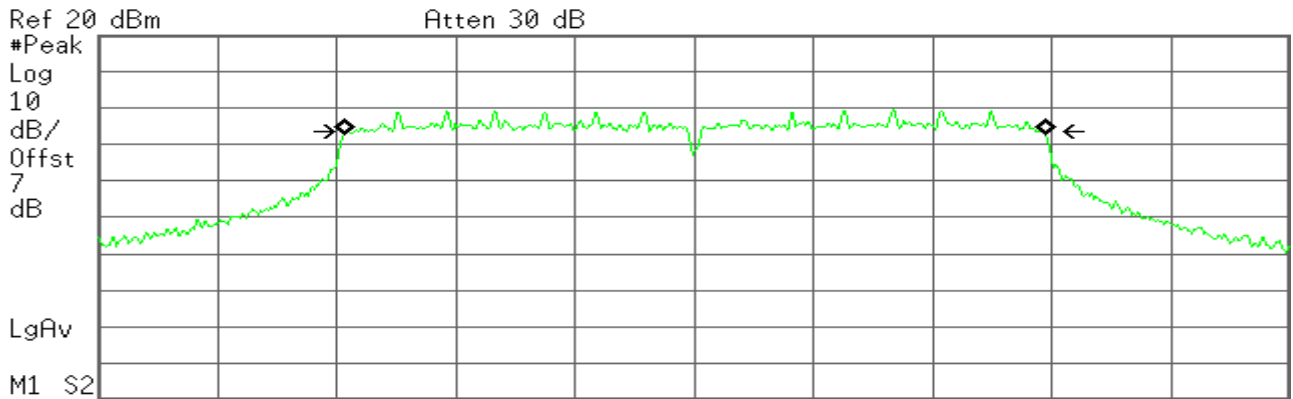

Ref 20 dBm Atten 30 dB
 #Peak Log 10 dB/ Offst 7 dB
 LgAv
 M1 S2
 Center 2.437 00 GHz Span 30 MHz
 #Res BW 100 kHz #VBW 300 kHz Sweep 2.88 ms (601 pts)

Occupied Bandwidth
17.6532 MHz


Occ BW % Pwr 99.00 %
x dB -6.00 dB

Transmit Freq Error 17.493 kHz
x dB Bandwidth 17.333 MHz

6dB Bandwidth (CH High)

Agilent

R T

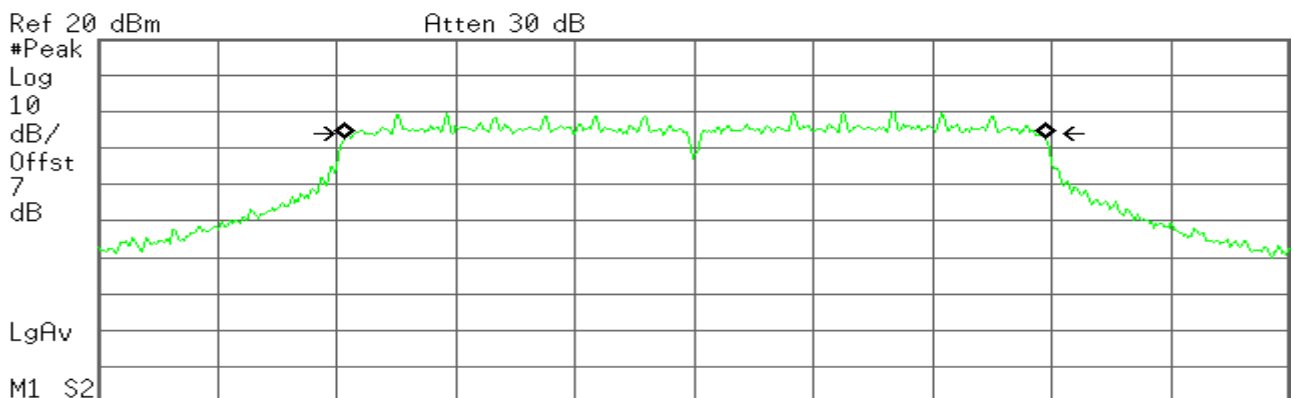

Ref 20 dBm Atten 30 dB
 #Peak Log 10 dB/ Offst 7 dB
 LgAv
 M1 S2
 Center 2.462 00 GHz Span 30 MHz
 #Res BW 100 kHz #VBW 300 kHz Sweep 2.88 ms (601 pts)

Occupied Bandwidth
17.6554 MHz

Occ BW % Pwr 99.00 %
x dB -6.00 dB


Transmit Freq Error 11.146 kHz
x dB Bandwidth 17.358 MHz

4.2.99% BANDWIDTH MEASUREMENT

LIMIT

None; for reporting purposes only
RSS-Gen 4.6.1

Test Configuration

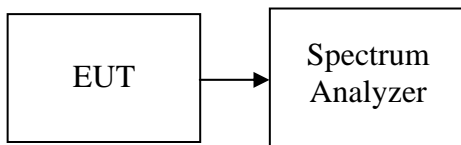

TEST PROCEDURE

The transmitter output is connected to the spectrum analyzer. The RBW is set to close to 1% of the selected span as is possible without being below 1%.The VBW is set to 3 times the RBW. The sweep time is coupled. The spectrum analyzer internal 99% bandwidth function is utilized.

TEST RESULTS

No non-compliance noted

Test Data

IEEE 802.11b mode / Chain 0

Channel	Frequency (MHz)	Bandwidth (MHz)
Low	2412	13.9592
Mid	2437	13.9538
High	2462	13.9468

IEEE 802.11b mode / Chain 1

Channel	Frequency (MHz)	Bandwidth (MHz)
Low	2412	13.9562
Mid	2437	13.9563
High	2462	13.9437

IEEE 802.11g mode / Chain 0

Channel	Frequency (MHz)	Bandwidth (MHz)
Low	2412	16.7670
Mid	2437	16.7606
High	2462	16.7751



IEEE 802.11g mode / Chain 1

Channel	Frequency (MHz)	Bandwidth (MHz)
Low	2412	16.9008
Mid	2437	16.9563
High	2462	16.8993

IEEE 802.11n HT20 mode / Chain 0

Channel	Frequency (MHz)	Bandwidth (MHz)
Low	2412	17.9812
Mid	2437	17.9696
High	2462	17.9679

IEEE 802.11 n HT20 / Chain 1

Channel	Frequency (MHz)	Bandwidth (MHz)
Low	2412	18.0111
Mid	2437	18.0017
High	2462	18.0049


Test Plot

IEEE 802.11b MODE/chain 0

99% Bandwidth (CH Low)

Agilent

R T

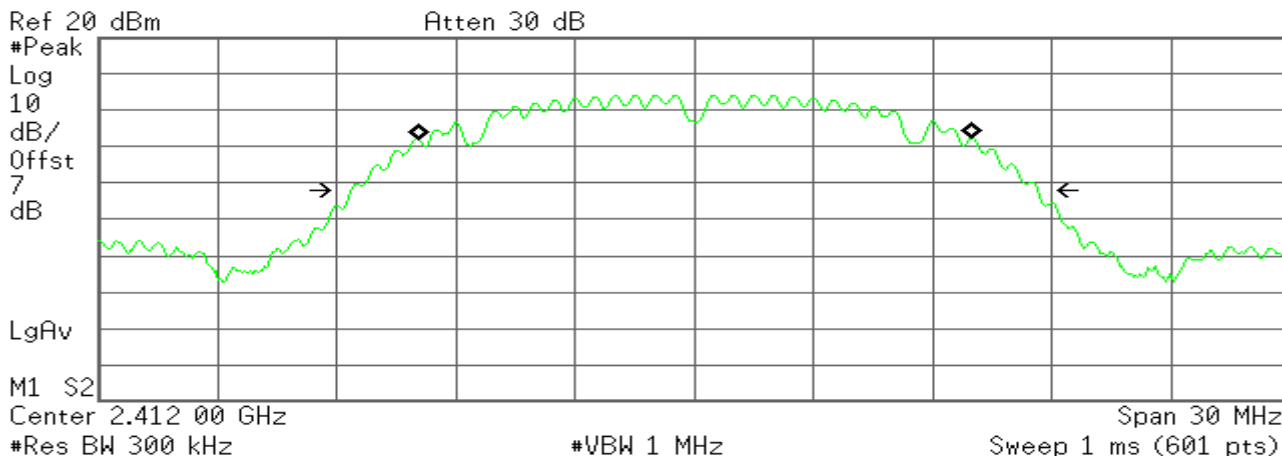

Occupied Bandwidth
13.9592 MHz


Occ BW % Pwr 99.00 %
x dB -26.00 dB

Transmit Freq Error 18.420 kHz
x dB Bandwidth 17.296 MHz

99% Bandwidth (CH Mid)

Agilent

R T

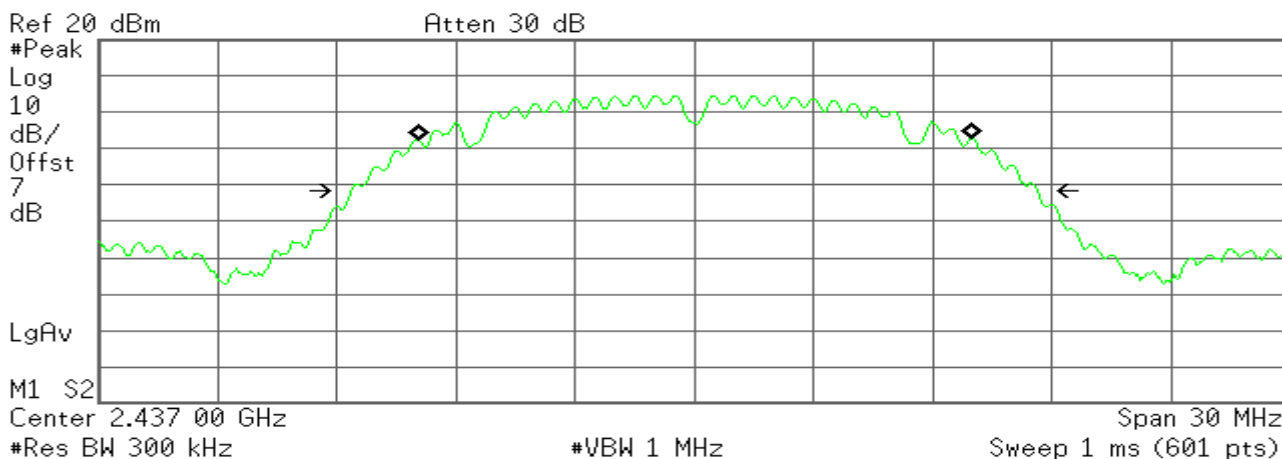

Occupied Bandwidth
13.9538 MHz


Occ BW % Pwr 99.00 %
x dB -26.00 dB

Transmit Freq Error 17.109 kHz
x dB Bandwidth 17.286 MHz

99% Bandwidth (CH High)

Agilent

R T

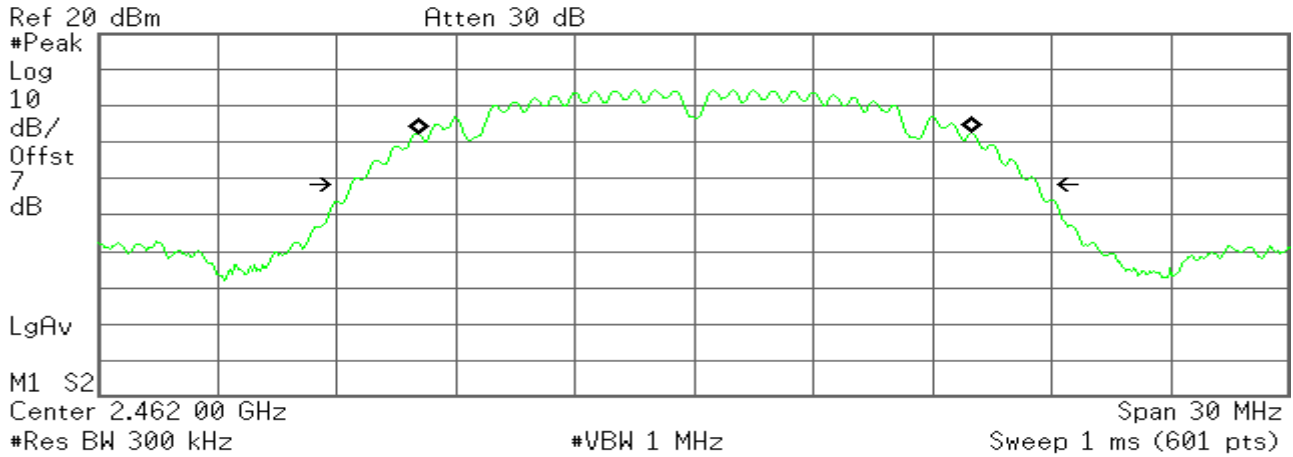

Occupied Bandwidth
13.9468 MHz

Occ BW % Pwr 99.00 %
x dB -26.00 dB


Transmit Freq Error 12.059 kHz
x dB Bandwidth 17.295 MHz

IEEE 802.11b MODE/chain 1

99% Bandwidth (CH Low)

Agilent

R T

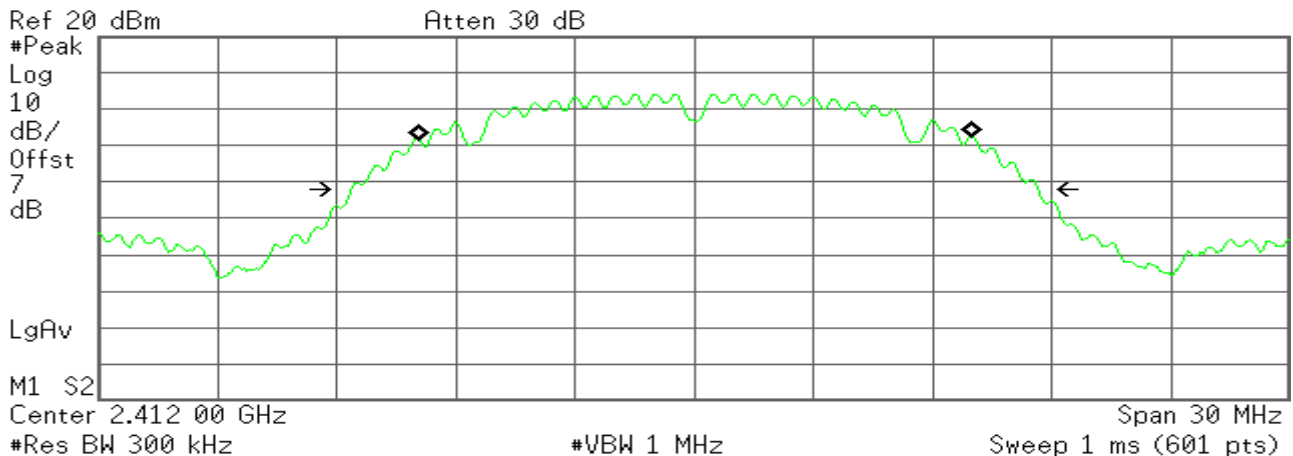

Occupied Bandwidth
13.9562 MHz


Occ BW % Pwr 99.00 %
x dB -26.00 dB

Transmit Freq Error 38.292 kHz
x dB Bandwidth 17.312 MHz

99% Bandwidth (CH Mid)

Agilent

R T

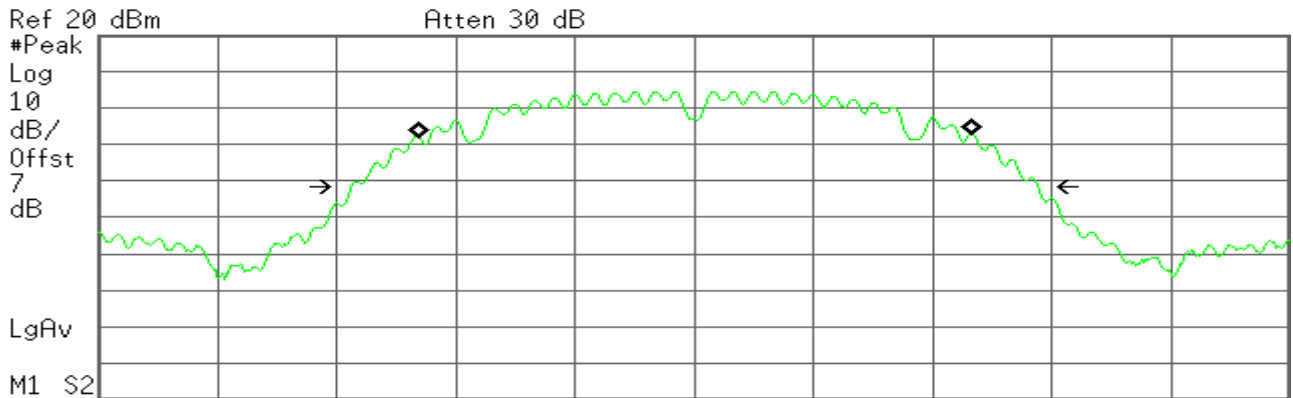

Ref 20 dBm Atten 30 dB
 #Peak Log 10 dB/ Offst 7 dB
 M1 S2 Center 2.437 00 GHz Span 30 MHz
 #Res BW 300 kHz #VBW 1 MHz Sweep 1 ms (601 pts)

Occupied Bandwidth
13.9563 MHz


Occ BW % Pwr 99.00 %
x dB -26.00 dB

Transmit Freq Error 41.173 kHz
x dB Bandwidth 17.293 MHz

99% Bandwidth (CH High)

Agilent

R T

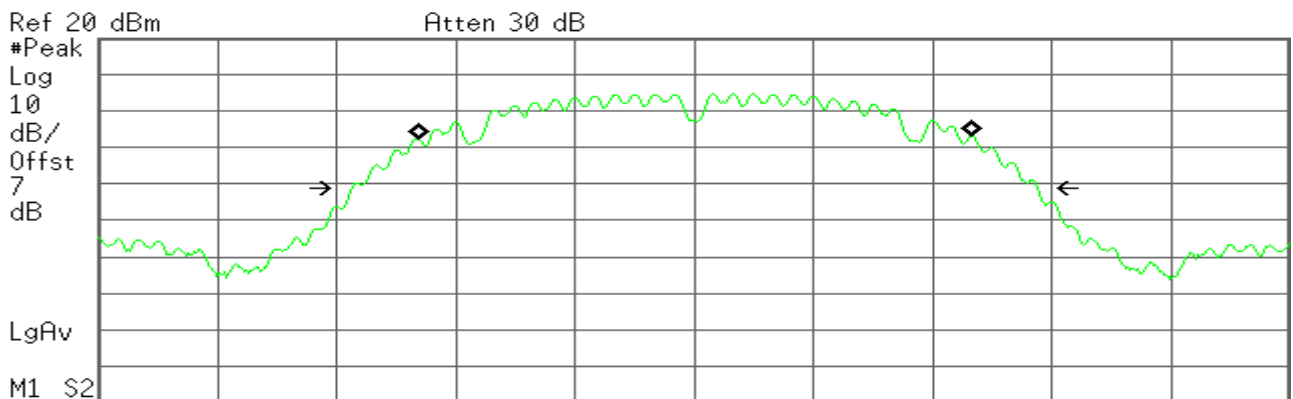

Ref 20 dBm Atten 30 dB
 #Peak Log 10 dB/ Offst 7 dB
 M1 S2 Center 2.462 00 GHz Span 30 MHz
 #Res BW 300 kHz #VBW 1 MHz Sweep 1 ms (601 pts)

Occupied Bandwidth
13.9437 MHz

Occ BW % Pwr 99.00 %
x dB -26.00 dB


Transmit Freq Error 38.673 kHz
x dB Bandwidth 17.290 MHz

IEEE 802.11g MODE/chain 0

99% Bandwidth (CH Low)

Agilent

R T

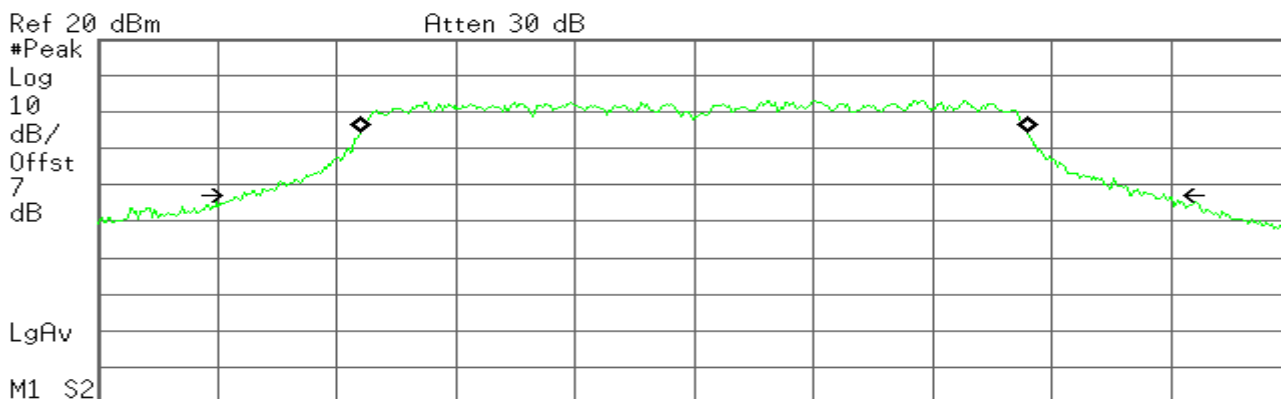

Ref 20 dBm Atten 30 dB
 #Peak Log 10 dB/ Offst 7 dB
 LgAv
 M1 S2
 Center 2.412 00 GHz Span 30 MHz
 #Res BW 300 kHz #VBW 1 MHz Sweep 1 ms (601 pts)

Occupied Bandwidth
16.7670 MHz


Occ BW % Pwr 99.00 %
x dB -26.00 dB

Transmit Freq Error 5.069 kHz
x dB Bandwidth 23.118 MHz

99% Bandwidth (CH Mid)

Agilent

R T

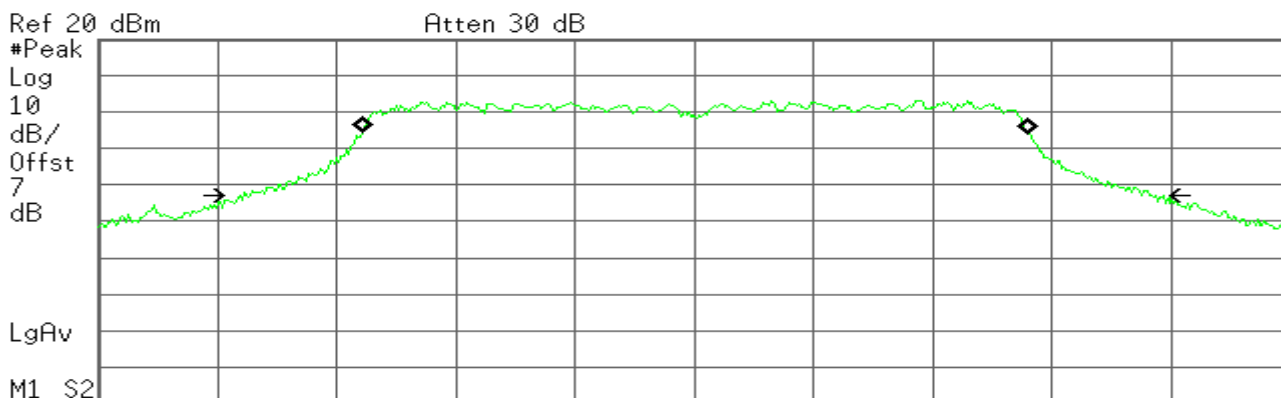

Ref 20 dBm Atten 30 dB
 #Peak Log 10 dB/ Offst 7 dB
 LgAv
 M1 S2
 Center 2.437 00 GHz Span 30 MHz
 #Res BW 300 kHz #VBW 1 MHz Sweep 1 ms (601 pts)

Occupied Bandwidth
16.7606 MHz


Occ BW % Pwr 99.00 %
x dB -26.00 dB

Transmit Freq Error 17.016 kHz
x dB Bandwidth 22.598 MHz

99% Bandwidth (CH High)

Agilent

R T

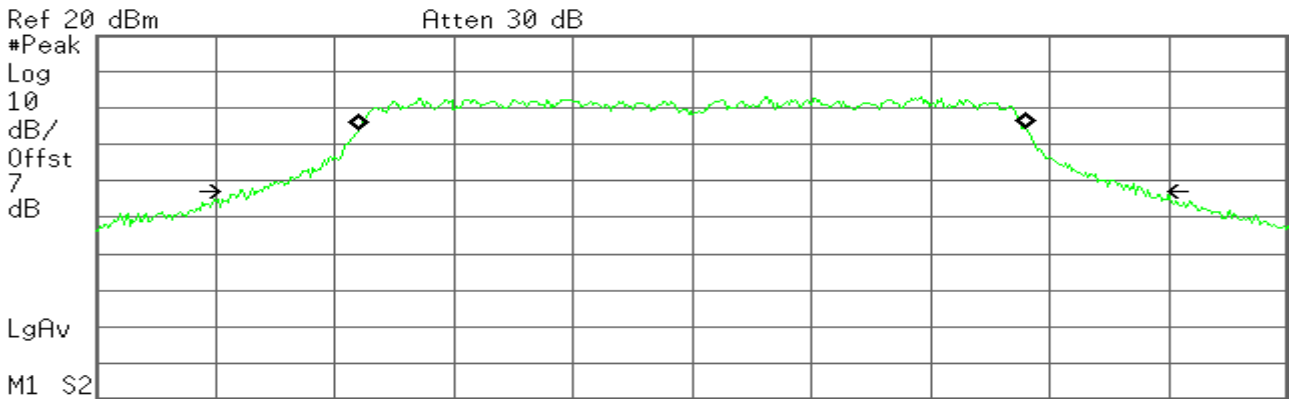

Occupied Bandwidth
16.7751 MHz

Occ BW % Pwr 99.00 %
x dB -26.00 dB


Transmit Freq Error 6.932 kHz
x dB Bandwidth 22.692 MHz

IEEE 802.11g MODE/chain 1

99% Bandwidth (CH Low)

Agilent

R T

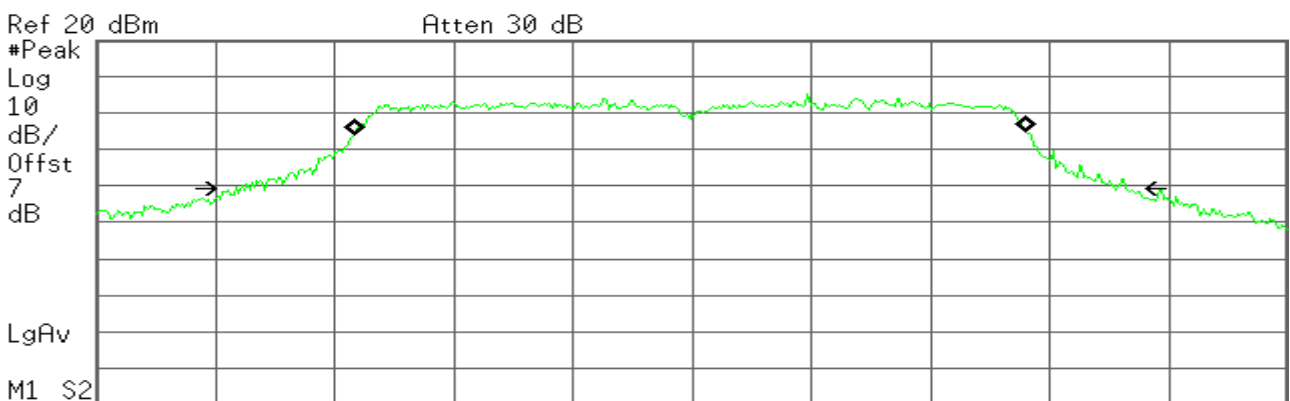

Occupied Bandwidth
16.9008 MHz


Occ BW % Pwr 99.00 %
x dB -26.00 dB

Transmit Freq Error -50.287 kHz
x dB Bandwidth 22.414 MHz

99% Bandwidth (CH Mid)

Agilent

R T

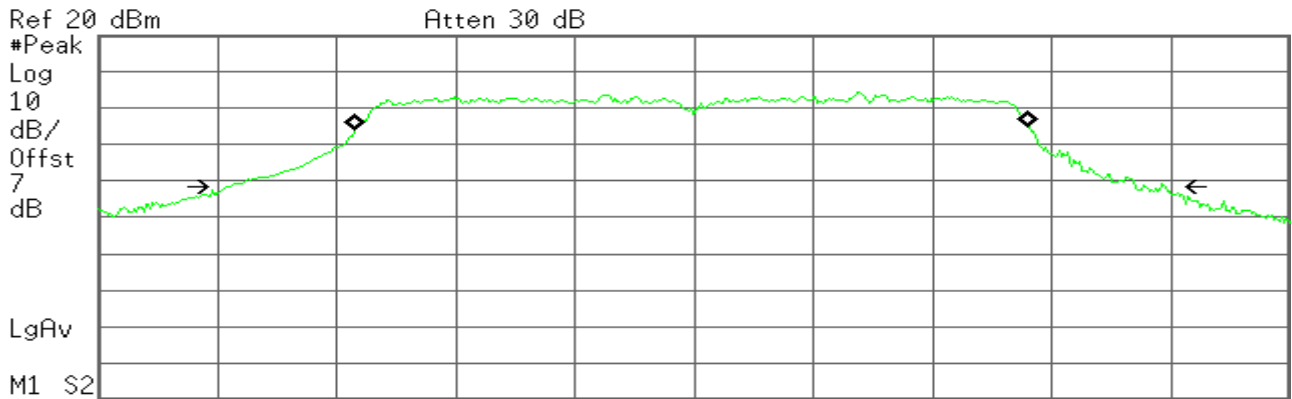

Center 2.437 00 GHz

Span 30 MHz

#Res BW 300 kHz

#VBW 1 MHz

Sweep 1 ms (601 pts)

Occupied Bandwidth
16.9563 MHz


Occ BW % Pwr 99.00 %
x dB -26.00 dB

Transmit Freq Error -60.968 kHz
x dB Bandwidth 23.534 MHz

99% Bandwidth (CH High)

Agilent

R T

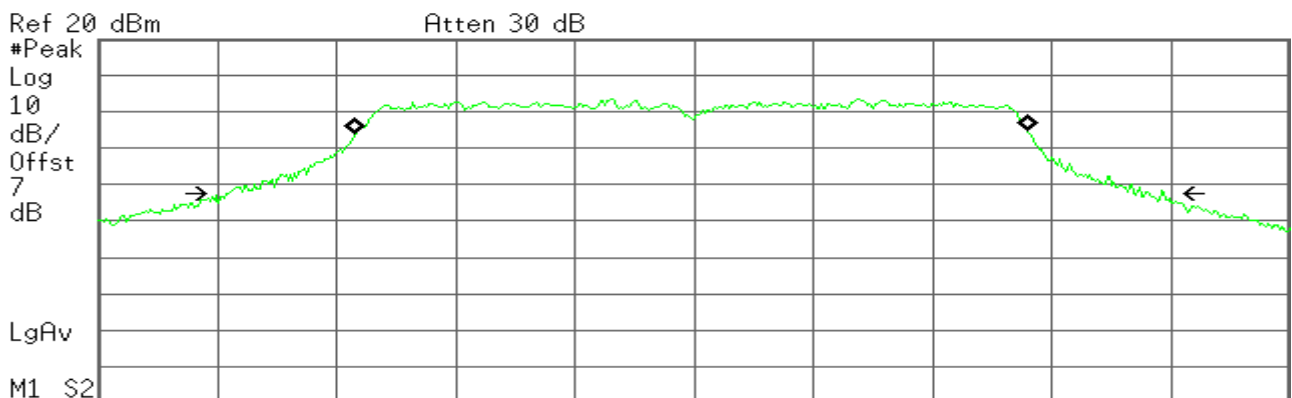

Center 2.462 00 GHz

Span 30 MHz

#Res BW 300 kHz

#VBW 1 MHz

Sweep 1 ms (601 pts)

Occupied Bandwidth
16.8993 MHz

Occ BW % Pwr 99.00 %
x dB -26.00 dB


Transmit Freq Error -68.052 kHz
x dB Bandwidth 23.529 MHz

IEEE 802.11n HT20 mode/chain 0

99% Bandwidth (CH Low)

Agilent

R T

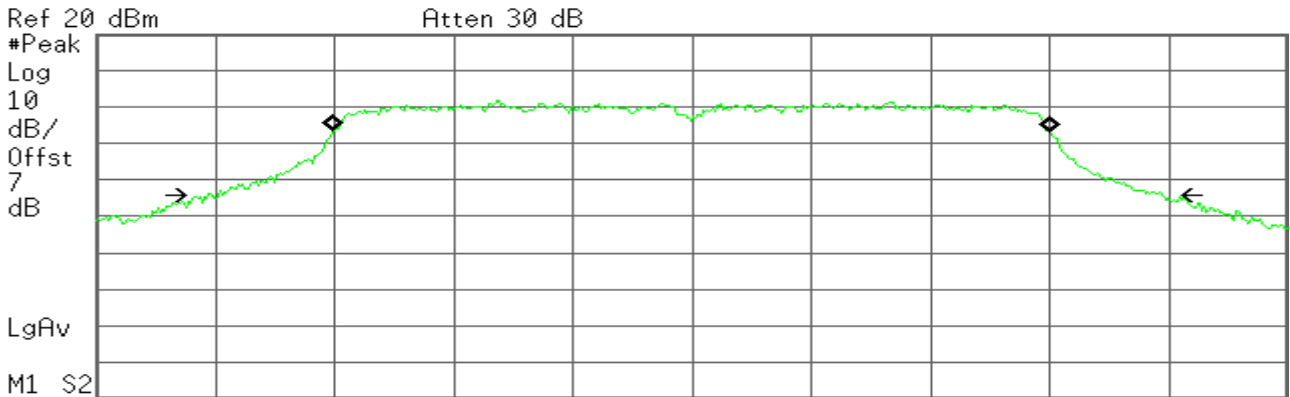

Center 2.412 00 GHz Span 30 MHz
 #Res BW 300 kHz #VBW 1 MHz Sweep 1 ms (601 pts)

Occupied Bandwidth
17.9812 MHz


Occ BW % Pwr 99.00 %
x dB -26.00 dB

Transmit Freq Error -16.490 kHz
x dB Bandwidth 24.230 MHz

99% Bandwidth (CH Mid)

Agilent

R T

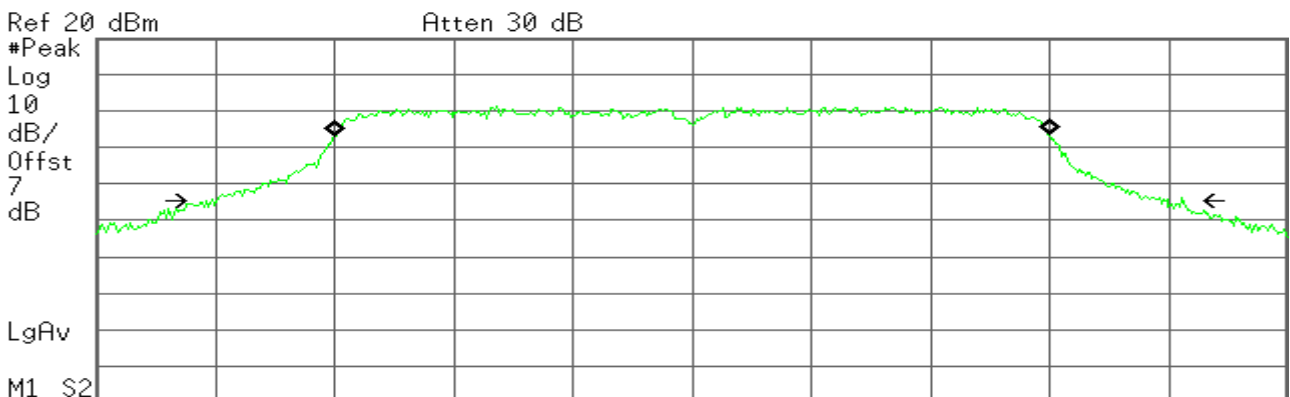

Center 2.437 00 GHz Span 30 MHz
 #Res BW 300 kHz #VBW 1 MHz Sweep 1 ms (601 pts)

Occupied Bandwidth
17.9696 MHz


Occ BW % Pwr 99.00 %
x dB -26.00 dB

Transmit Freq Error -4.671 kHz
x dB Bandwidth 24.466 MHz

99% Bandwidth (CH High)

Agilent

R T

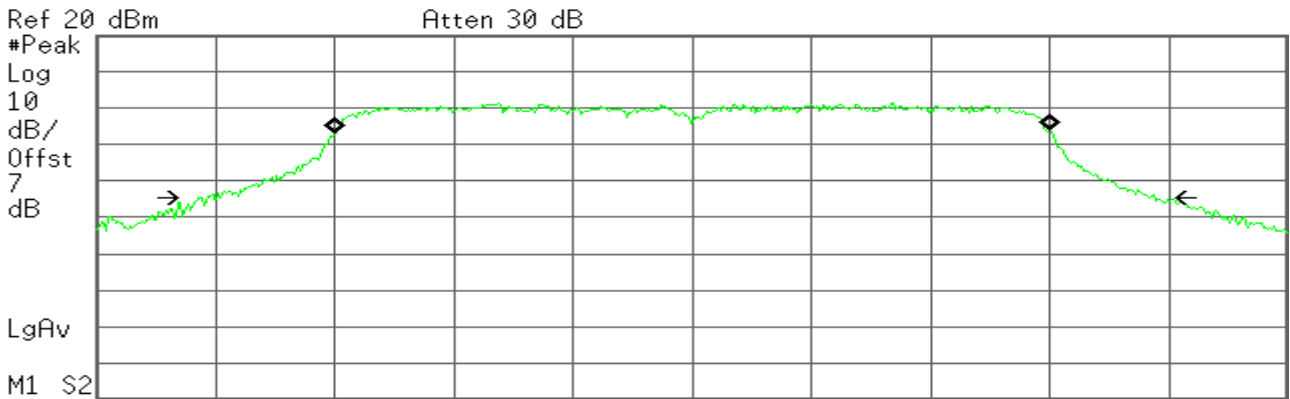

Ref 20 dBm Atten 30 dB
 #Peak Log 10 dB/ Offst 7 dB
 M1 S2 Center 2.462 00 GHz Span 30 MHz
 #Res BW 300 kHz #VBW 1 MHz Sweep 1 ms (601 pts)

Occupied Bandwidth
17.9679 MHz

Occ BW % Pwr 99.00 %
x dB -26.00 dB


Transmit Freq Error -1.518 kHz
x dB Bandwidth 24.032 MHz

IEEE 802.11n HT20 mode/chain 1

99% Bandwidth (CH Low)

Agilent

R T

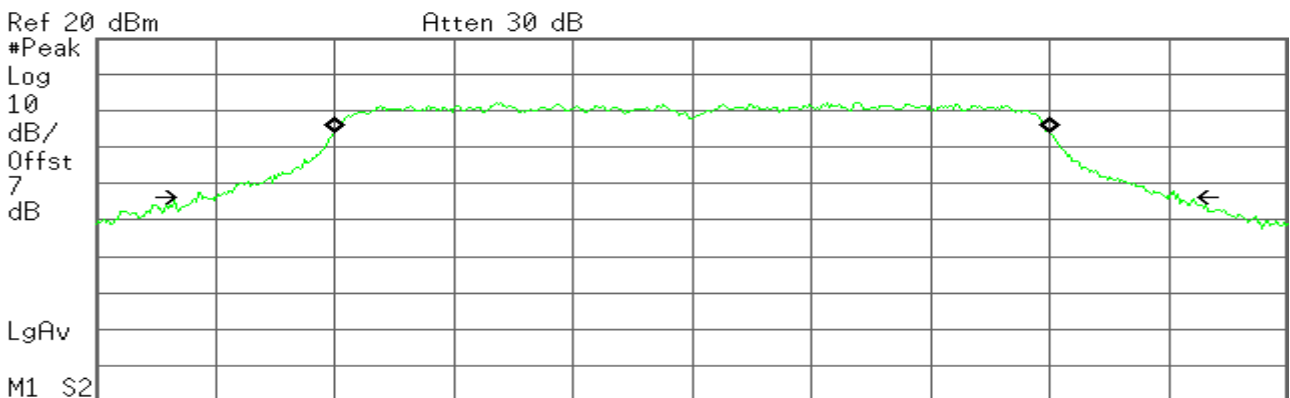

Ref 20 dBm Atten 30 dB
 #Peak Log 10 dB/ Offst 7 dB
 M1 S2 Center 2.412 00 GHz Span 30 MHz
 #Res BW 300 kHz #VBW 1 MHz Sweep 1 ms (601 pts)

Occupied Bandwidth
18.0111 MHz


Occ BW % Pwr 99.00 %
x dB -26.00 dB

Transmit Freq Error 1.838 kHz
x dB Bandwidth 24.733 MHz

99% Bandwidth (CH Mid)

Agilent

R T

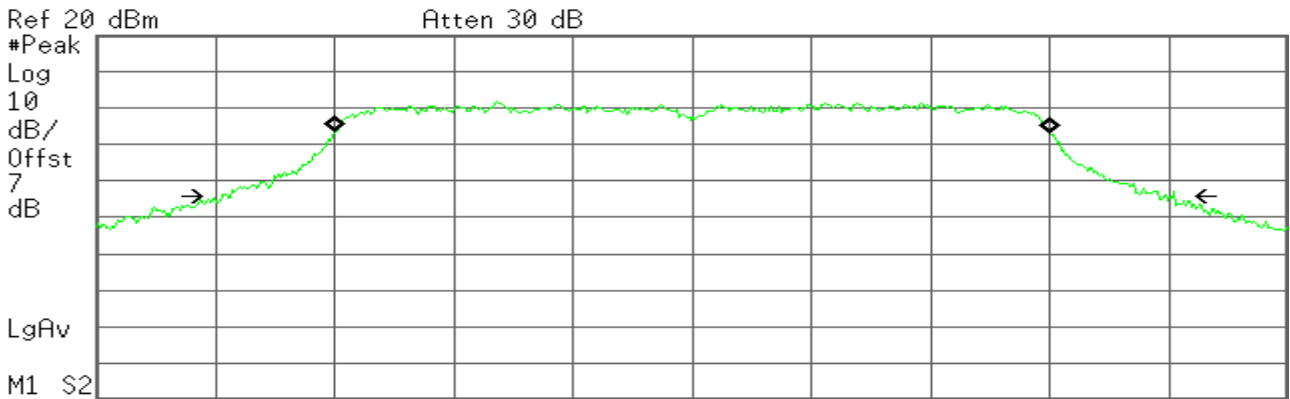

Center 2.437 00 GHz Span 30 MHz
 #Res BW 300 kHz #VBW 1 MHz Sweep 1 ms (601 pts)

Occupied Bandwidth
18.0017 MHz


Occ BW % Pwr 99.00 %
x dB -26.00 dB

Transmit Freq Error 7.432 kHz
x dB Bandwidth 23.857 MHz

99% Bandwidth (CH High)

Agilent

R T

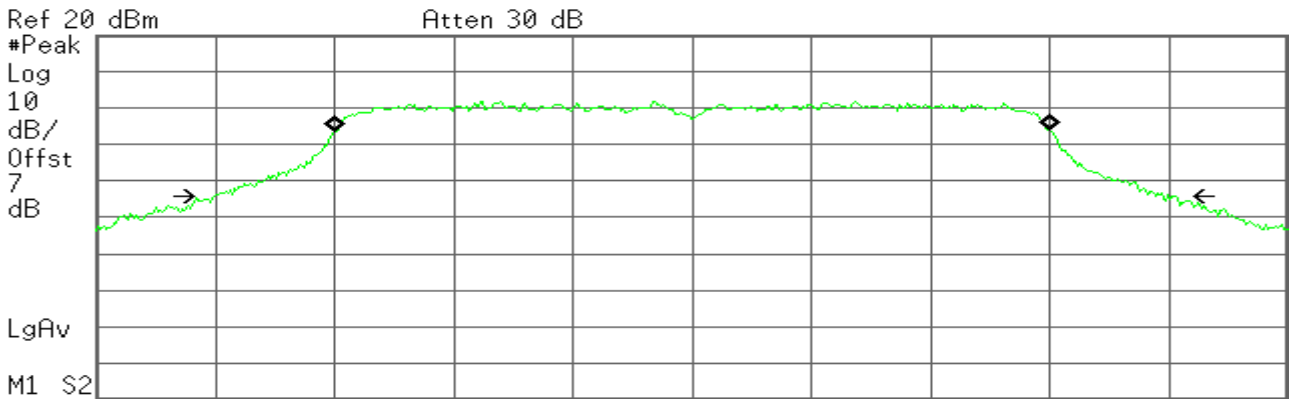

Center 2.462 00 GHz Span 30 MHz
 #Res BW 300 kHz #VBW 1 MHz Sweep 1 ms (601 pts)

Occupied Bandwidth
18.0049 MHz

Occ BW % Pwr 99.00 %
x dB -26.00 dB

Transmit Freq Error 8.815 kHz
x dB Bandwidth 24.141 MHz

4.3. PEAK POWER


LIMIT

The maximum peak output power of the intentional radiator shall not exceed the following:

1. According to §15.247(b)(3), for systems using digital modulation in the bands of 902-928 MHz, and 2400-2483.5 MHz: 1 Watt.

2. According to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Test Configuration

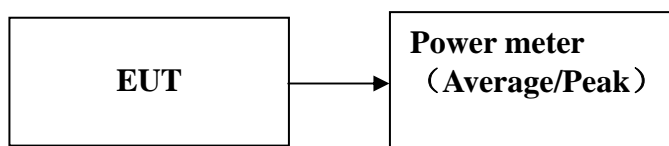

TEST PROCEDURE

1. The EUT transmitter output is connected to the Power meter.
The Power meter is set to the peak power detection.
2. The testing follows the Measurement Procedure FCC KDB No. 558074 D01 DTS Meas.
3. Guidance v03r03. 9.1.2 PKPM1 Peak power meter method.

TEST RESULTS

No non-compliance noted

Test Data

Test mode: IEEE 802.11b mode

Channel	Frequency (MHz)	Chain 0 Output Power (dBm)	Chain 1 Output Power (dBm)	Total Maximum Conducted Output Power (dBm)	Limit (dBm)
Low	2412	14.55	14.54	17.56	30.00
Mid	2437	14.81	14.74	17.79	30.00
High	2462	14.59	15.41	18.03	30.00

Test mode: IEEE 802.11g mode

Channel	Frequency (MHz)	Chain 0 Output Power (dBm)	Chain 1 Output Power (dBm)	Total Maximum Conducted Output Power (dBm)	Limit (dBm)
Low	2412	21.87	23.21	25.60	30.00
Mid	2437	21.77	22.89	25.38	30.00
High	2462	21.98	23.24	25.67	30.00

Test mode: IEEE 802.11n HT20 mode

Channel	Frequency (MHz)	Chain 0 Output Power (dBm)	Chain 1 Output Power (dBm)	Total Maximum Conducted Output Power (dBm)	Limit (dBm)
Low	2412	20.25	21.51	23.94	30.00
Mid	2437	20.05	21.21	23.68	30.00
High	2462	20.74	22.21	24.55	30.00


Remark: Total Output Power (dBm) = $10 * \text{LOG}(10^{(\text{Chain 0 Output Power} / 10)} + 10^{(\text{Chain 1 Output Power} / 10)})$

4.4. PEAK POWER SPECTRAL DENSITY

LIMIT

1. According to §15.247(e), for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.
2. According to §15.247(f), the digital modulation operation of the hybrid system, with the frequency hopping turned off, shall comply with the power density requirements of paragraph (d) of this section.

Test Configuration

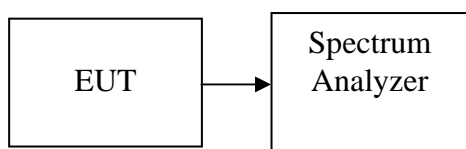

TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
2. Set the spectrum analyzer as RBW = 3 kHz, VBW = 10 kHz, Span = 1.5 times the DTS bandwidth, Sweep = auto
3. Record the max reading.
4. Repeat the above procedure until the measurements for all frequencies are completed.

TEST RESULTS

No non-compliance noted

Test Data**Test mode: IEEE 802.11b mode**

Channel	Frequency (MHz)	Chain 0 PPSD (dBm)	Chain 1 PPSD (dBm)	Total PPSD (dBm)	Limit (dBm)	Result
Low	2412	-9.87	-10.28	-7.06	8.00	PASS
Mid	2437	-10.52	-11.45	-7.95	8.00	PASS
High	2462	-10.12	-12.16	-8.01	8.00	PASS

Test mode: IEEE 802.11g mode

Channel	Frequency (MHz)	Chain 0 PPSD (dBm)	Chain 1 PPSD (dBm)	Total PPSD (dBm)	Limit (dBm)	Result
Low	2412	-14.26	-14.92	-11.57	8.00	PASS
Mid	2437	-14.61	-14.33	-11.46	8.00	PASS
High	2462	-15.37	-14.44	-11.87	8.00	PASS

Test mode: IEEE 802.11n HT20 mode

Channel	Frequency (MHz)	Chain 0 PPSD (dBm)	Chain 1 PPSD (dBm)	Total PPSD (dBm)	Limit (dBm)	Result
Low	2412	-14.85	-15.88	-12.32	8.00	PASS
Mid	2437	-15.36	-16.37	-12.83	8.00	PASS
High	2462	-16.16	-15.37	-12.74	8.00	PASS

Remark: Total PPSD (dBm) = $10 * \text{LOG}(10^{(\text{Chain 0 PPSD} / 10)} + 10^{(\text{Chain 1 PPSD} / 10)})$

Test Plot


IEEE 802.11b mode/Chain 0

PPSD (CH Low)

Agilent

R T

Mkr1 2.412 812 GHz
-9.87 dBm

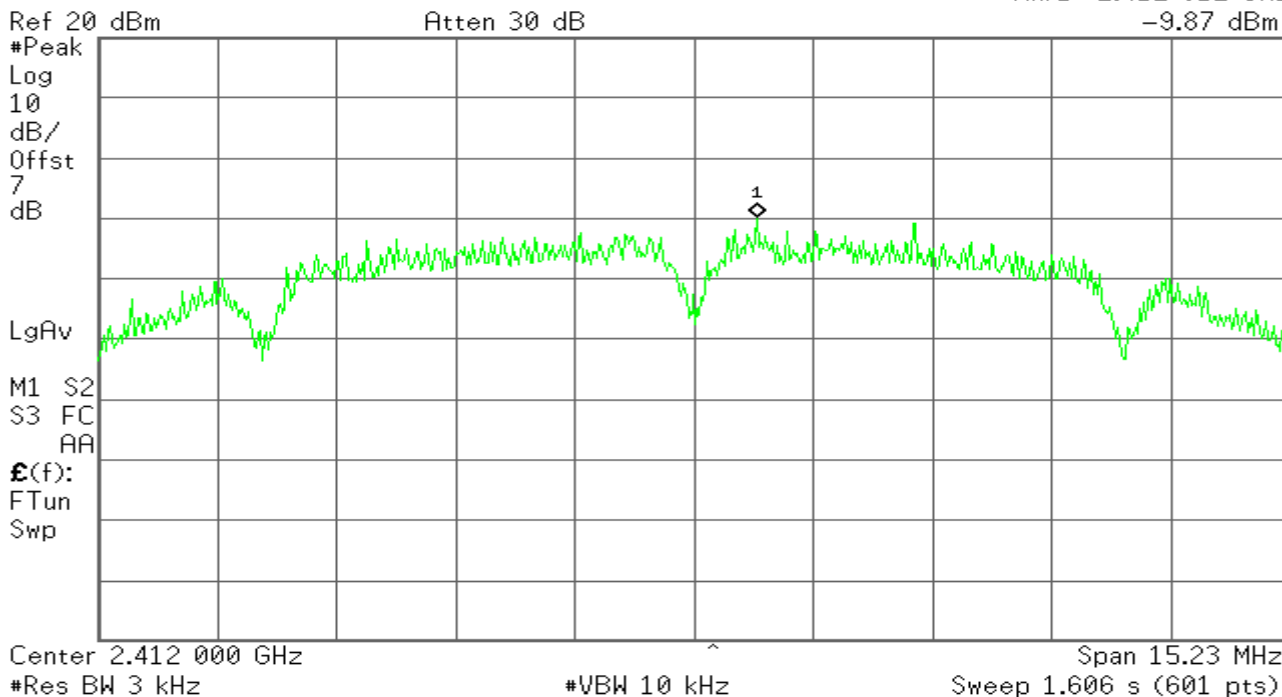


PPSD(CH Mid)

Agilent

R T

Mkr1 2.434 817 GHz
-10.52 dBm

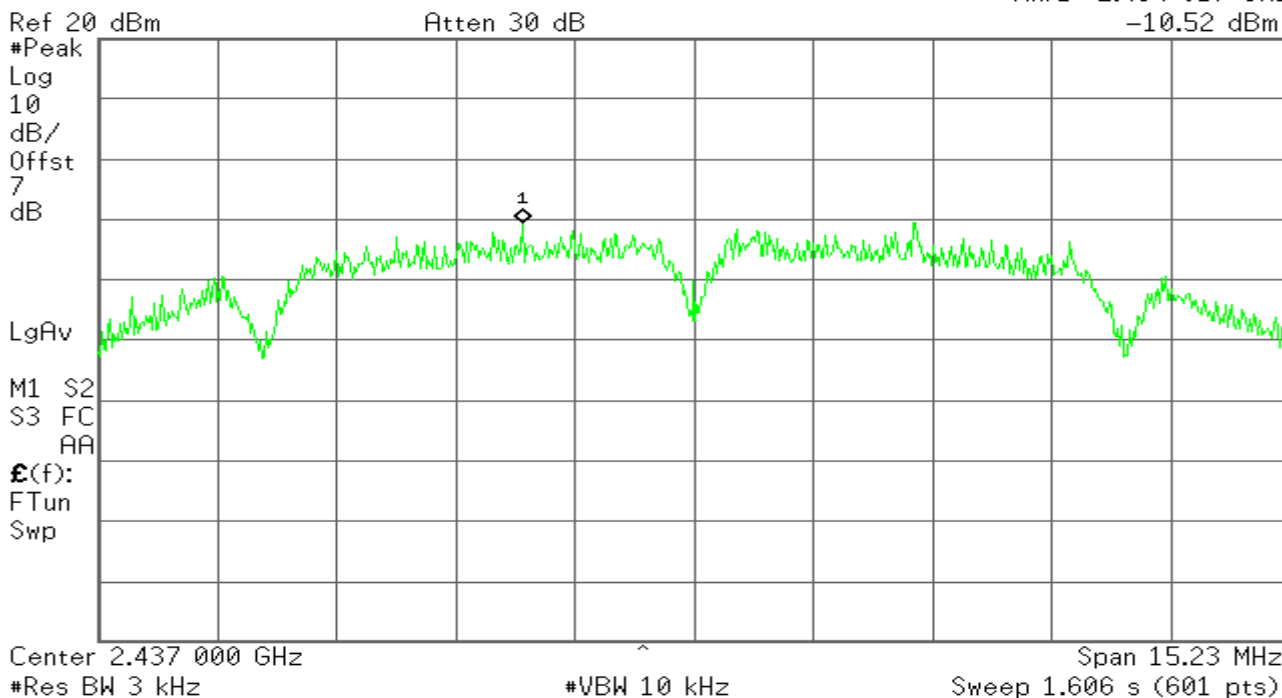

PPSD (CH High)

Agilent

R T

Mkr1 2.461 188 GHz
-10.12 dBm

Ref 20 dBm


Atten 30 dB

#Peak
Log
10
dB/
Offst
7
dB

LgAv

M1 S2
S3 FC
AA

£(f):
FTun
Swp

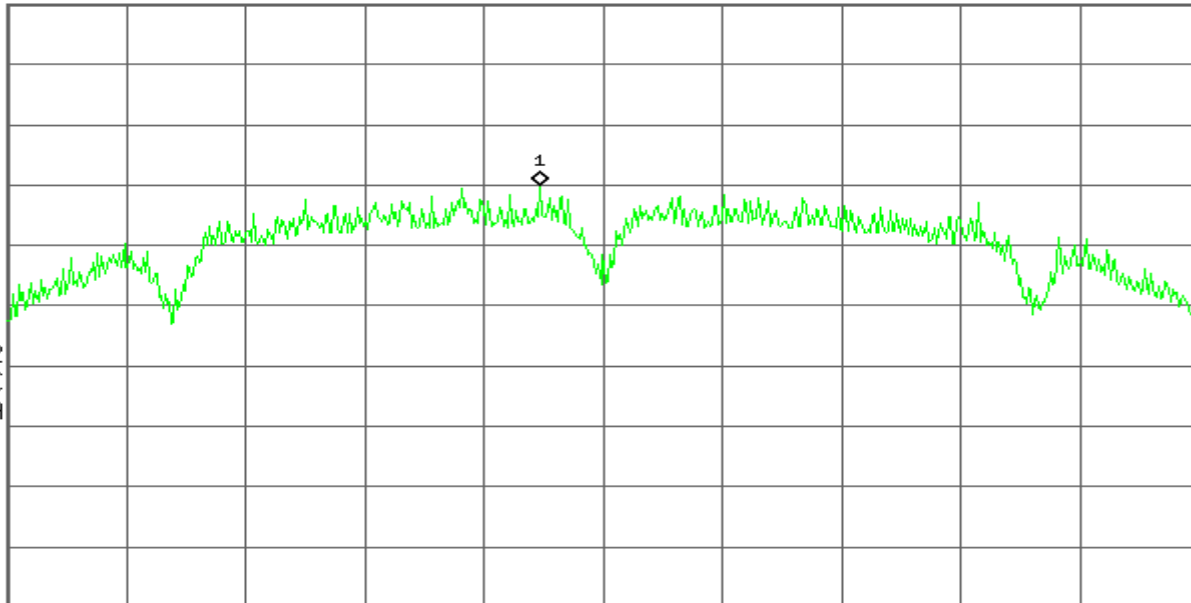

Center 2.462 000 GHz

#Res BW 3 kHz

#VBW 10 kHz

Span 15.23 MHz

Sweep 1.606 s (601 pts)

IEEE 802.11b mode/Chain 1

PPSD (CH Low)

Agilent

R T

Mkr1 2.413 802 GHz
-10.28 dBm

Ref 20 dBm


Atten 30 dB

#Peak
Log
10
dB/
Offst
7
dB

LgAv

M1 S2
S3 FC
AA

£(f):
FTun
Swp

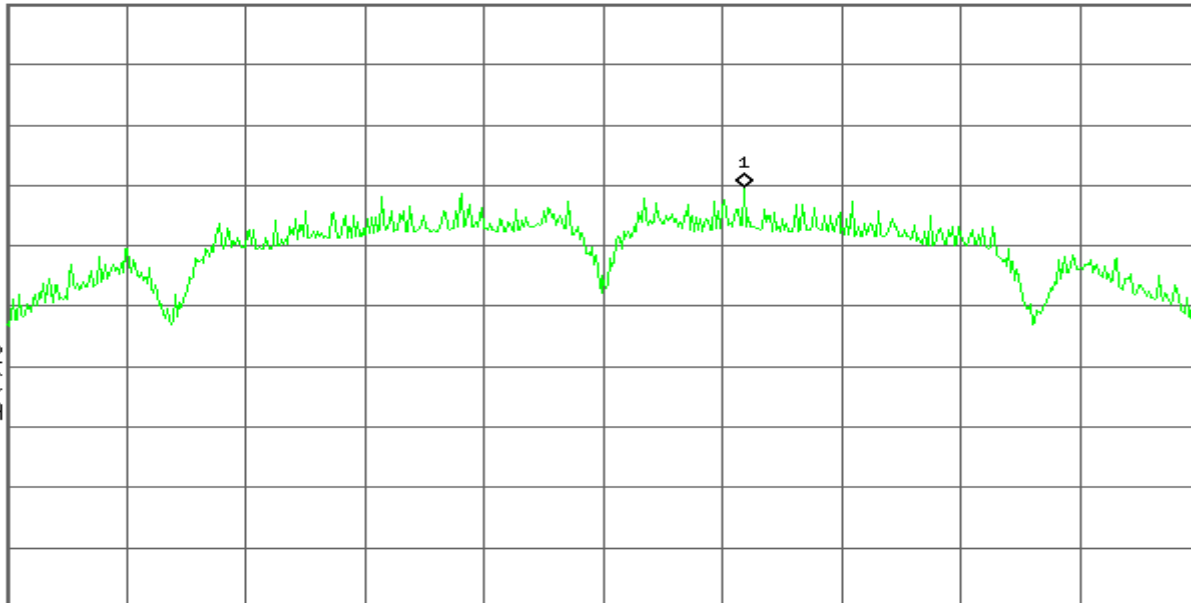

Center 2.412 000 GHz

#Res BW 3 kHz

#VBW 10 kHz

Span 15.23 MHz

Sweep 1.606 s (601 pts)

PPSD (CH Mid)

Agilent

R T

Mkr1 2.439 183 GHz
-11.45 dBm

Ref 20 dBm


Atten 30 dB

#Peak
Log
10
dB/
Offst
7
dB

LgAv

M1 S2
S3 FC
AA

£(f):
FTun
Swp

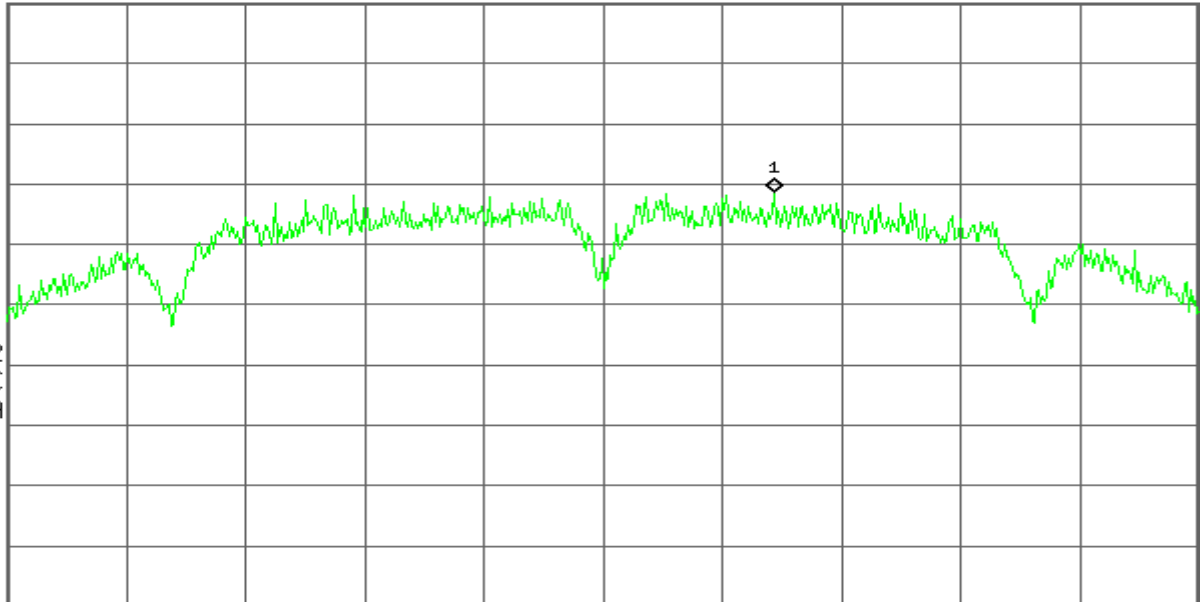

Center 2.437 000 GHz

#Res BW 3 kHz

#VBW 10 kHz

Span 15.23 MHz
Sweep 1.606 s (601 pts)

PSD (CH High)

Agilent

R T

Mkr1 2.462 838 GHz
-12.16 dBm

Ref 20 dBm


Atten 30 dB

#Peak
Log
10
dB/
Offst
7
dB

LgAv

M1 S2
S3 FC
AA

£(f):
FTun
Swp

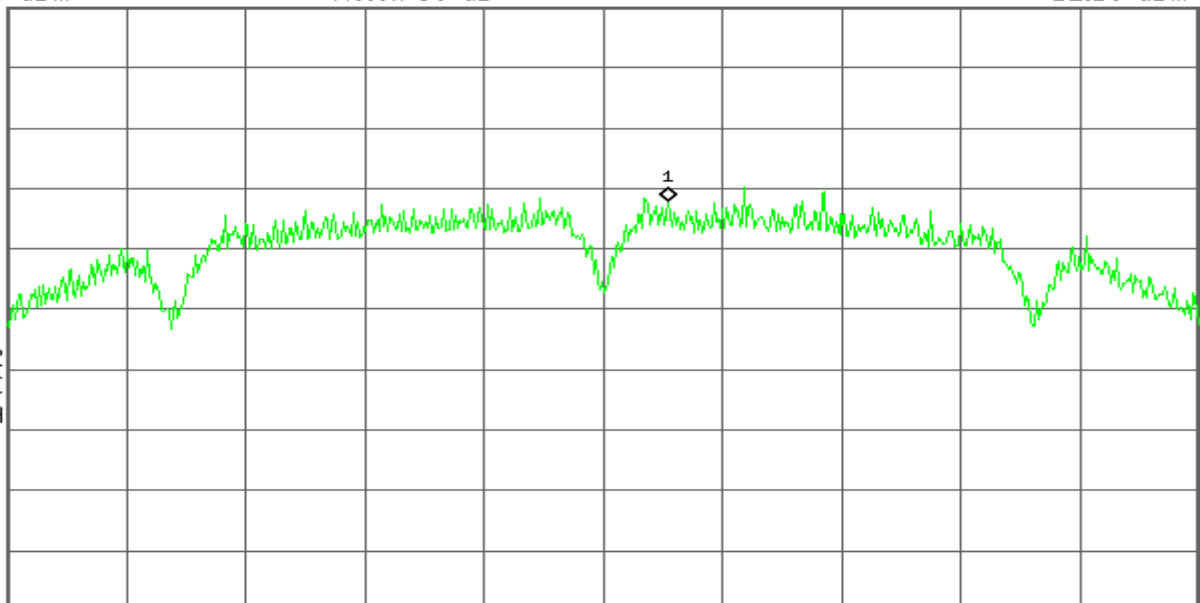

Center 2.462 000 GHz

#Res BW 3 kHz

#VBW 10 kHz

Span 15.23 MHz
Sweep 1.606 s (601 pts)

IEEE 802.11g mode/Chain 0

PPSD (CH Low)

Agilent

R T

Mkr1 2.406 38 GHz
-14.26 dBm

Ref 20 dBm


Atten 30 dB

#Peak
Log
10
dB/
Offst
7
dB

LgAv

M1 S2
S3 FC
AA

£(f):
FTun
Swp

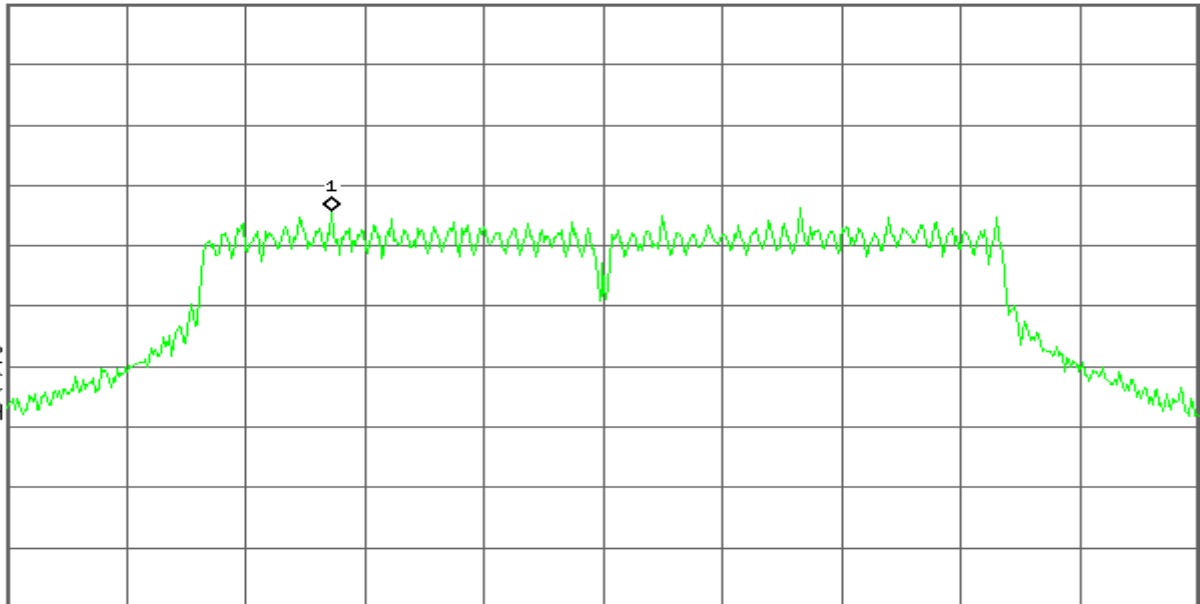

Center 2.412 00 GHz

#VBW 10 kHz

Span 24.6 MHz
Sweep 2.594 s (601 pts)

PPSD (CH Mid)

Agilent

R T

Mkr1 2.432 00 GHz
-14.61 dBm

Ref 20 dBm


Atten 30 dB

#Peak
Log
10
dB/
Offst
7
dB

LgAv

M1 S2
S3 FC
AA

£(f):
FTun
Swp

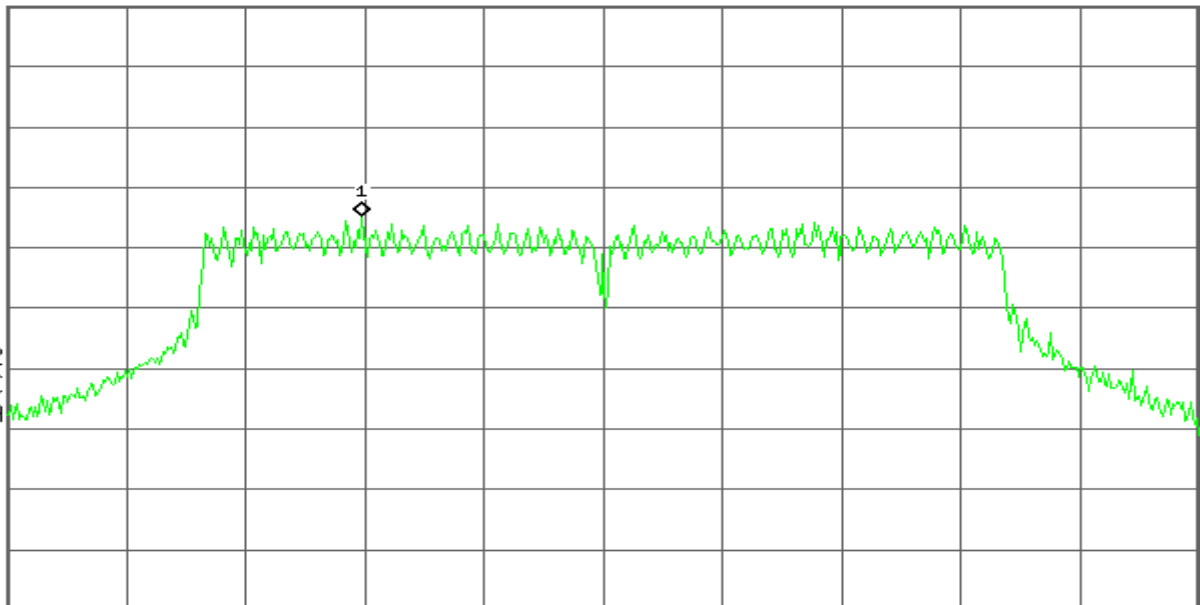

Center 2.437 00 GHz

#VBW 10 kHz

Span 24.6 MHz
Sweep 2.594 s (601 pts)

PPSD (CH High)

Agilent

R T

Mkr1 2.467 95 GHz
-15.37 dBm

Ref 20 dBm


Atten 30 dB

#Peak
Log
10
dB/
Offst
7
dB

LgAv

M1 S2
S3 FC
AA

f(f):
FTun
Swp

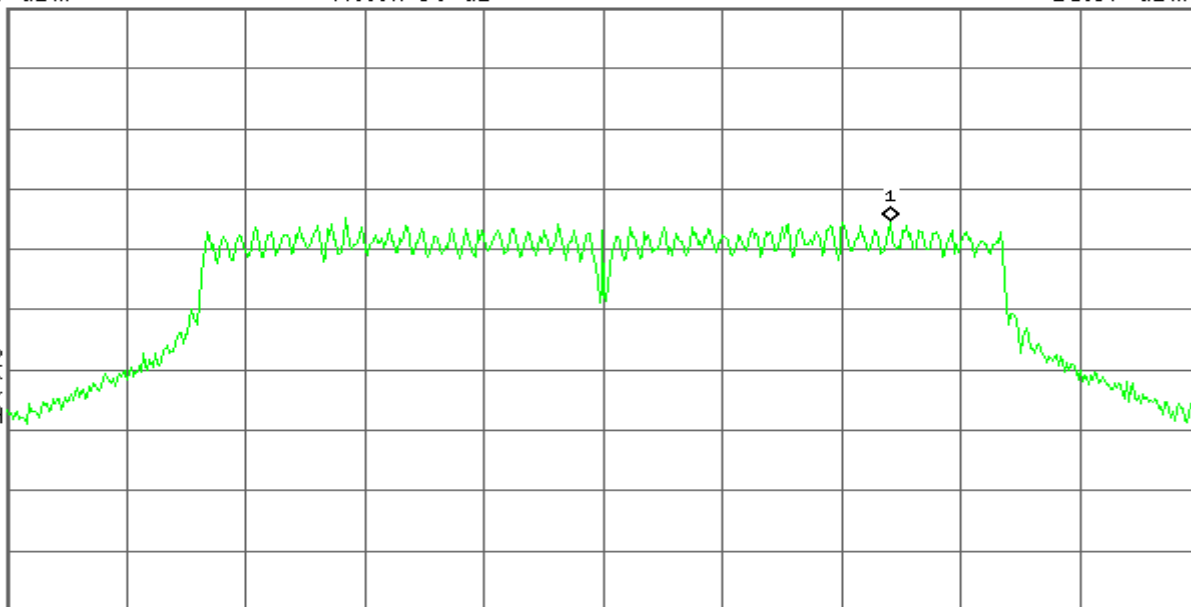

Center 2.462 00 GHz

#Res BW 3 kHz

#VBW 10 kHz

Span 24.6 MHz
Sweep 2.594 s (601 pts)

IEEE 802.11g mode/Chain 1

PPSD (CH Low)

Agilent

R T

Mkr1 2.406 68 GHz
-14.92 dBm

Ref 20 dBm


Atten 30 dB

#Peak
Log
10
dB/
Offst
7
dB

LgAv

M1 S2
S3 FC
AA

f(f):
FTun
Swp

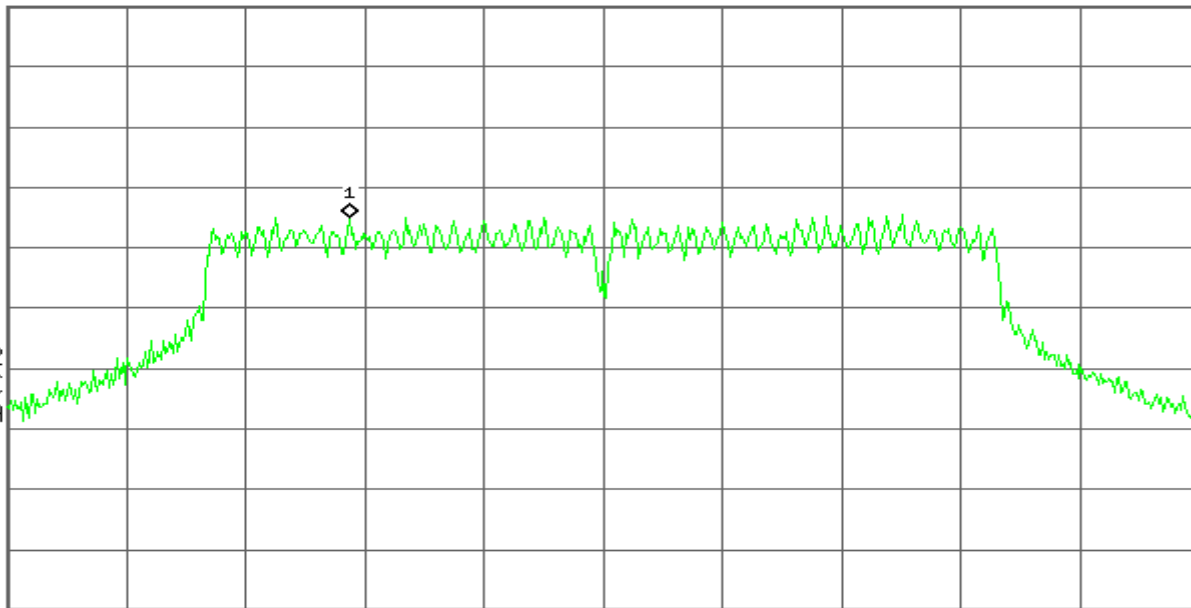

Center 2.412 00 GHz

#Res BW 3 kHz

#VBW 10 kHz

Span 24.95 MHz
Sweep 2.631 s (601 pts)

PPSD (CH Mid)

Agilent

R T

Mkr1 2.438 87 GHz
-14.33 dBm

Ref 20 dBm


Atten 30 dB

#Peak
Log
10
dB/
Offst
7
dB

LgAv

M1 S2
S3 FC
AA

f(f):
FTun
Swp

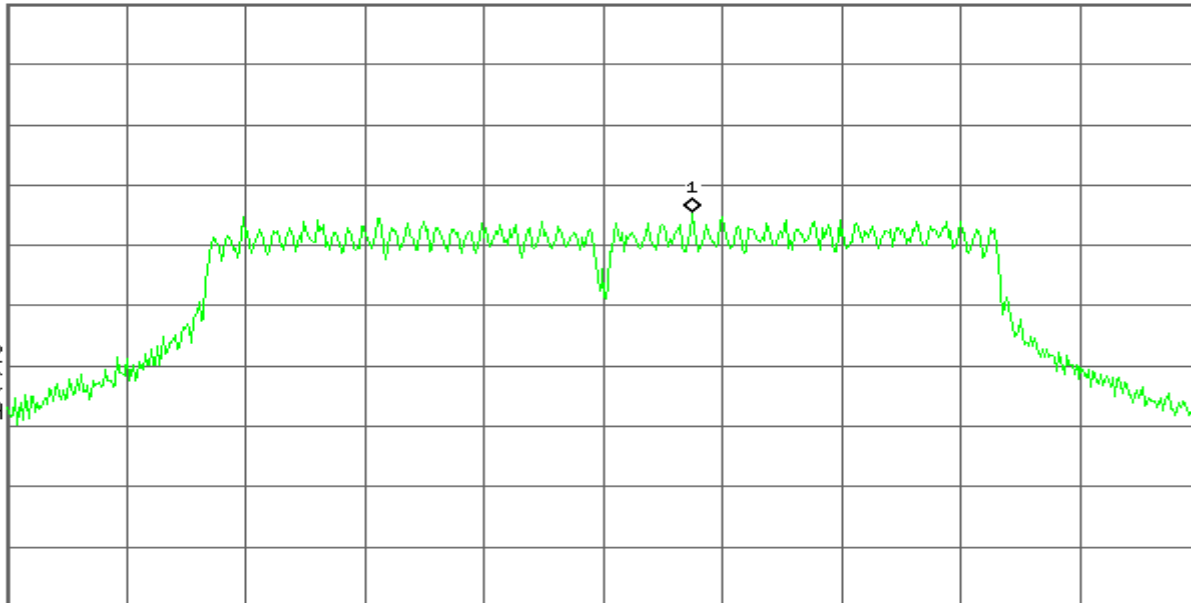

Center 2.437 00 GHz

#Res BW 3 kHz

#VBW 10 kHz

Span 24.95 MHz

Sweep 2.631 s (601 pts)

PPSD (CH High)

Agilent

R T

Mkr1 2.456 97 GHz
-14.44 dBm

Ref 20 dBm


Atten 30 dB

#Peak
Log
10
dB/
Offst
7
dB

LgAv

M1 S2
S3 FC
AA

f(f):
FTun
Swp

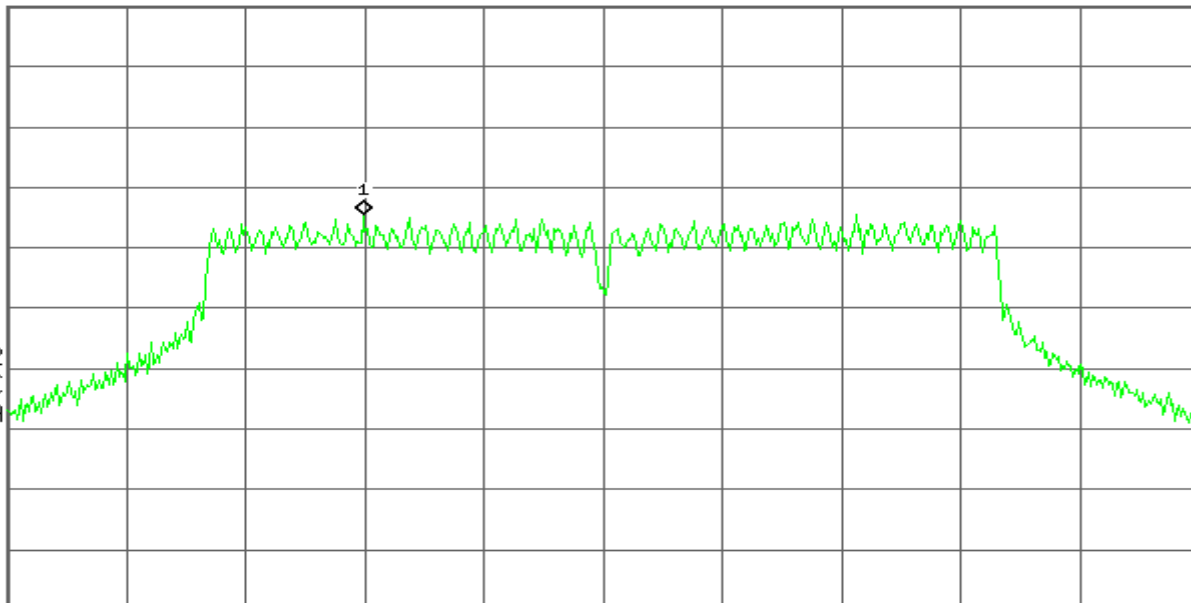

Center 2.462 00 GHz

#Res BW 3 kHz

#VBW 10 kHz

Span 24.95 MHz

Sweep 2.631 s (601 pts)

IEEE 802.11n HT20 mode / Chain 0

PPSD (CH Low)

Agilent

R T

Mkr1 2.416 96 GHz
-14.85 dBm

Ref 20 dBm


Atten 30 dB

#Peak
Log
10
dB/
Offst
7
dB

LgAv

M1 S2
S3 FC
AA

£(f):
FTun
Swp

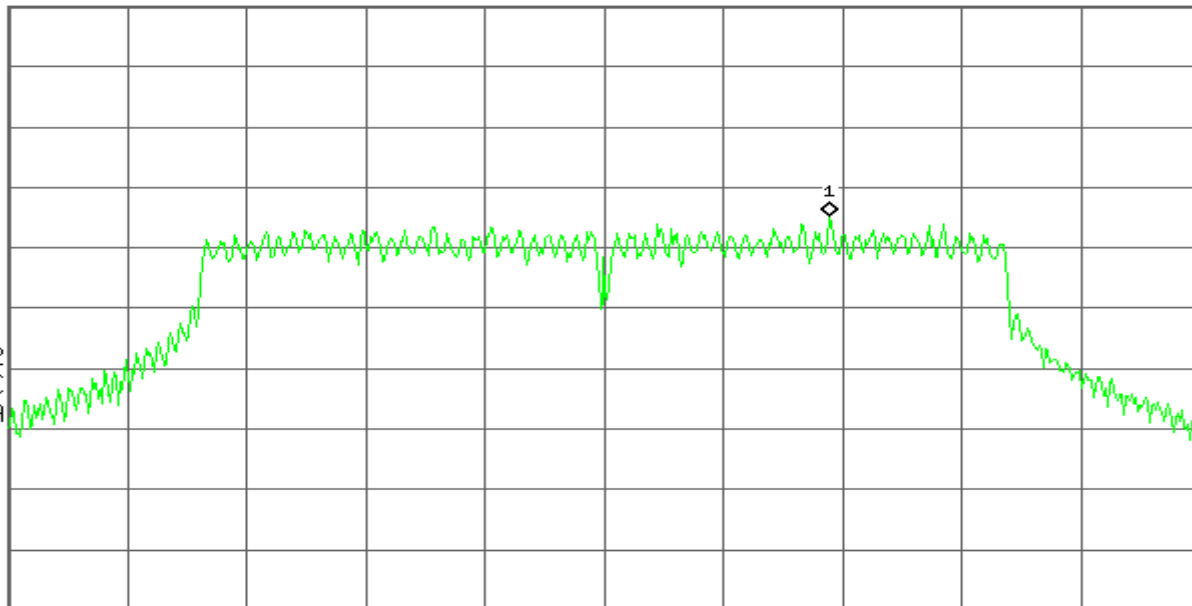

Center 2.412 00 GHz

#Res BW 3 kHz

#VBW 10 kHz

Span 26.33 MHz

Sweep 2.776 s (601 pts)

PPSD (CH Mid)

Agilent

R T

Mkr1 2.441 96 GHz
-15.36 dBm

Ref 20 dBm


Atten 30 dB

#Peak
Log
10
dB/
Offst
7
dB

LgAv

M1 S2
S3 FC
AA

£(f):
FTun
Swp

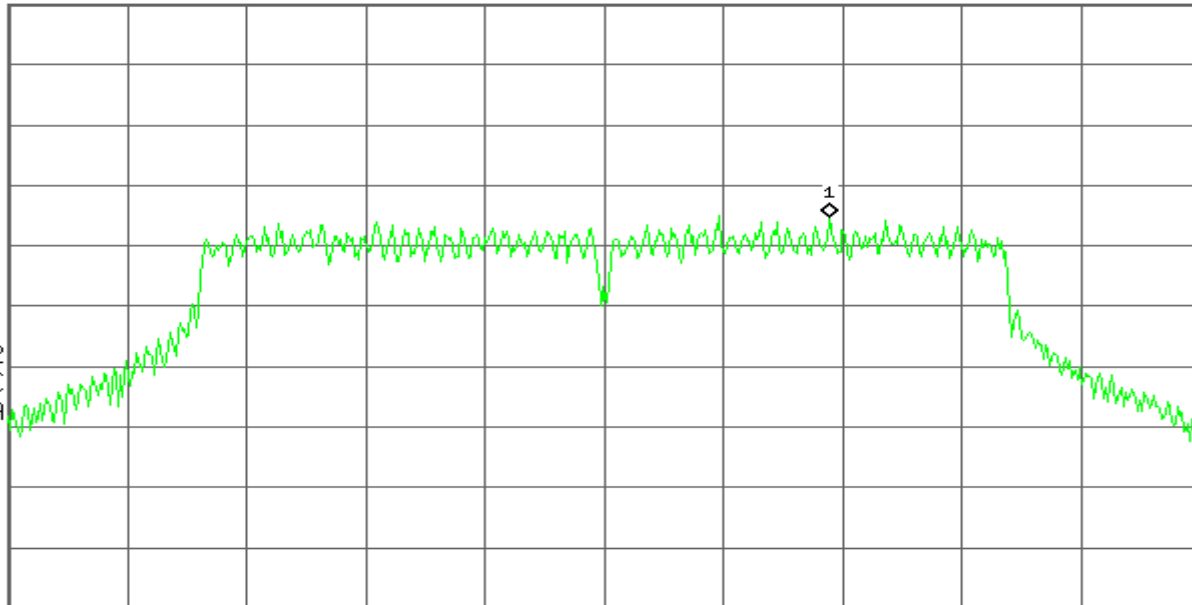

Center 2.437 00 GHz

#Res BW 3 kHz

#VBW 10 kHz

Span 26.33 MHz

Sweep 2.776 s (601 pts)

PPSD (CH High)

Agilent

R T

Mkr1 2.467 05 GHz
-16.16 dBm

Ref 20 dBm


Atten 30 dB

#Peak
Log
10
dB/
Offst
7
dB

LgAv

M1 S2
S3 FC
AA

f(f):
FTun
Swp

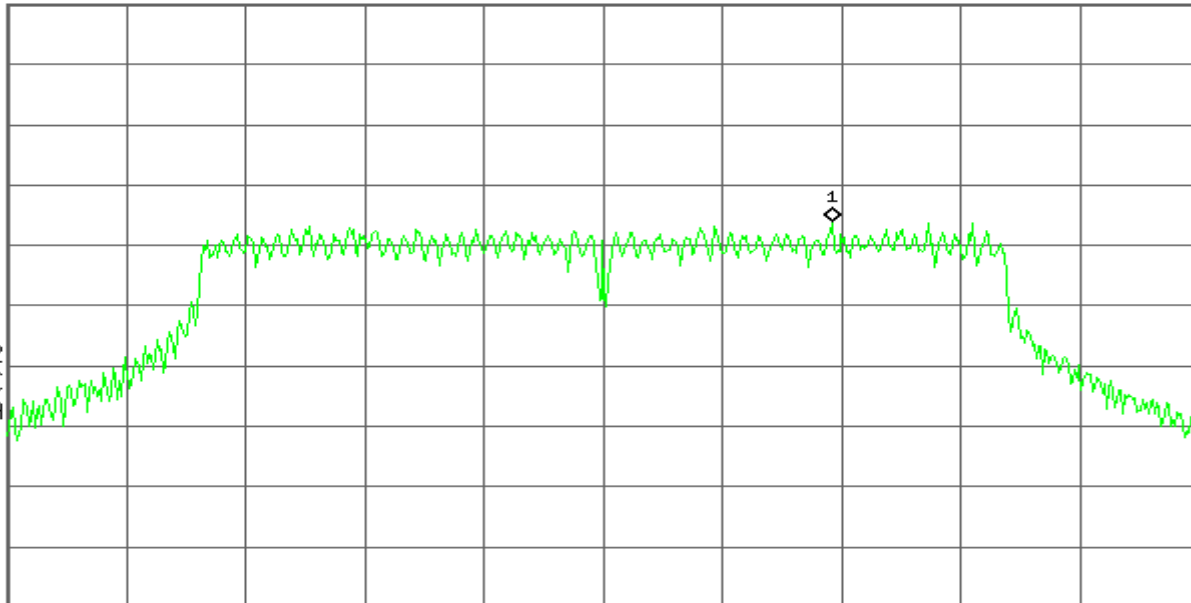

Center 2.462 00 GHz^

#Res BW 3 kHz

#VBW 10 kHz

Span 26.33 MHz

Sweep 2.776 s (601 pts)

IEEE 802.11n HT20 mode / Chain 1

PPSD (CH Low)

Agilent

R T

Mkr1 2.406 99 GHz
-15.88 dBm

Ref 20 dBm


Atten 30 dB

#Peak
Log
10
dB/
Offst
7
dB

LgAv

M1 S2
S3 FC
AA

f(f):
FTun
Swp

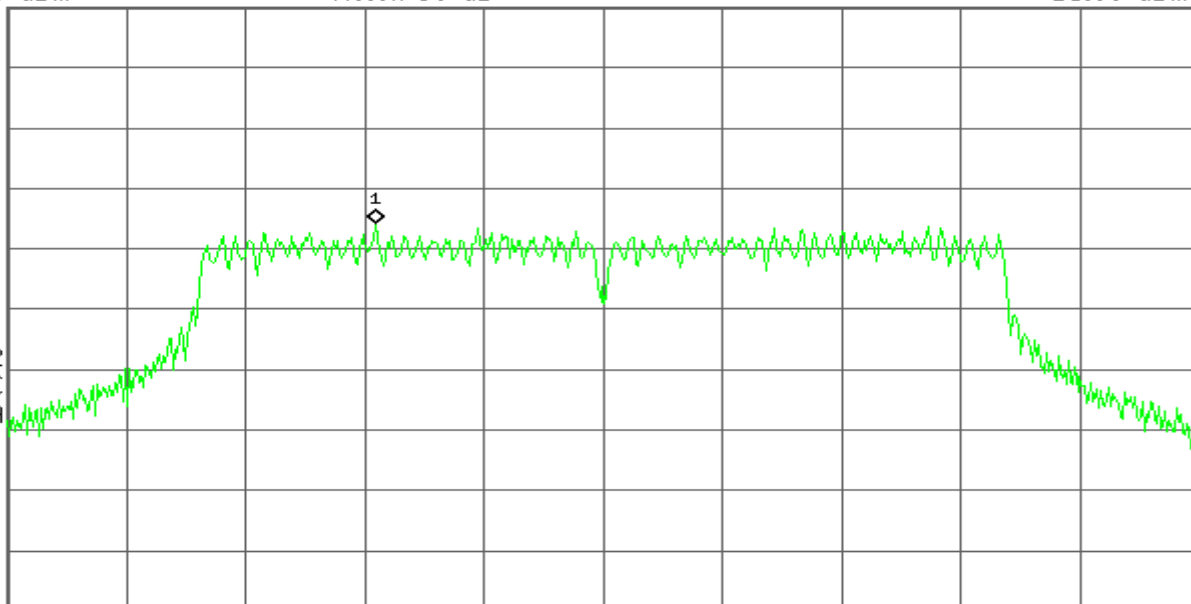

Center 2.412 00 GHz

#Res BW 3 kHz

#VBW 10 kHz

Span 26.37 MHz

Sweep 2.78 s (601 pts)

PPSD (CH Mid)

Agilent

R T

Mkr1 2.444 52 GHz
-16.37 dBm

Ref 20 dBm


Atten 30 dB

#Peak
Log
10
dB/
Offst
7
dB

LgAv

M1 S2
S3 FC
AA

£(f):
FTun
Swp

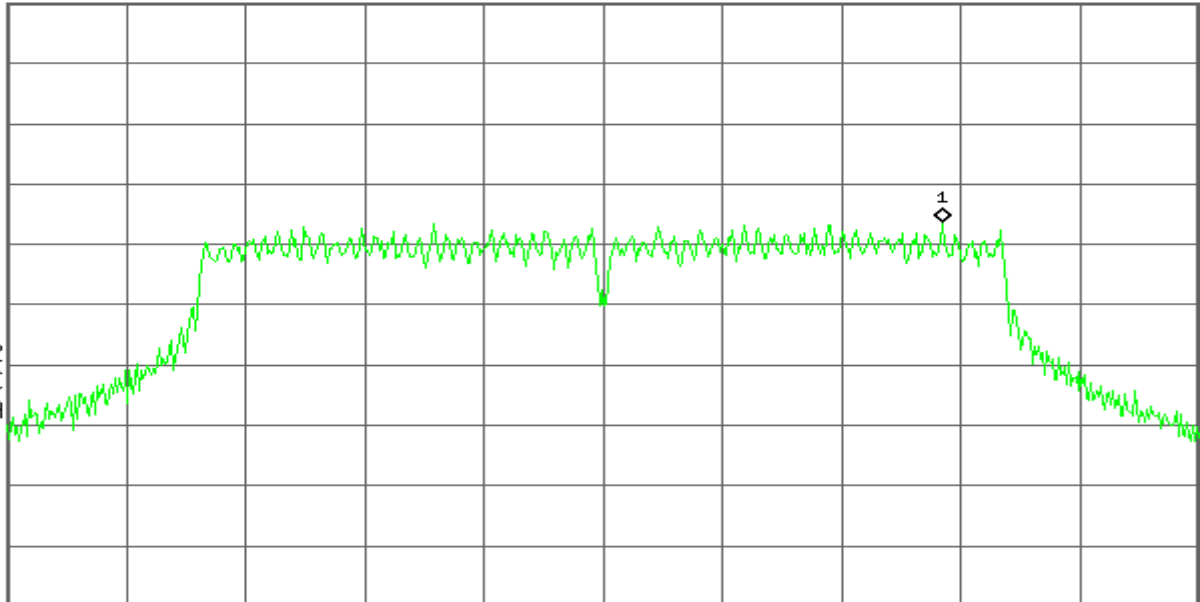

Center 2.437 00 GHz

#Res BW 3 kHz

#VBW 10 kHz

Span 26.37 MHz
Sweep 2.78 s (601 pts)

PPSD (CH High)

Agilent

R T

Mkr1 2.456 99 GHz
-15.37 dBm

Ref 20 dBm


Atten 30 dB

#Peak
Log
10
dB/
Offst
7
dB

LgAv

M1 S2
S3 FC
AA

£(f):
FTun
Swp

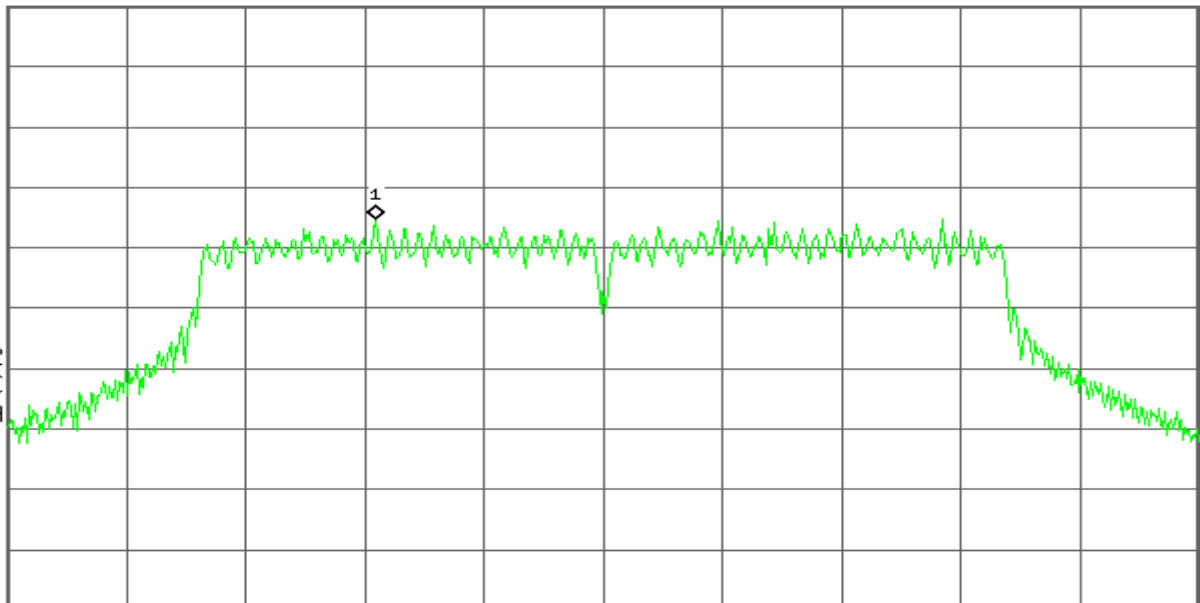

Center 2.462 00 GHz

#Res BW 3 kHz

#VBW 10 kHz

Span 26.37 MHz
Sweep 2.78 s (601 pts)


4.5.SPURIOUS EMISSIONS

Conducted Measurement

LIMIT

According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

Test Configuration

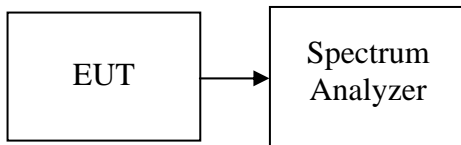

TEST PROCEDURE

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.

Measurements are made over the 30MHz to 40GHz range with the transmitter set to the lowest, middle, and highest channels.

TEST RESULTS

No non-compliance noted

Test Plot

OUT-OF-BAND SPURIOUS EMISSIONS-CONDUCTED MEASUREMENT


IEEE 802.11b mode/Chain 0

CH Low

Agilent

R T

Mkr1 2.413 498 GHz
2.98 dBm

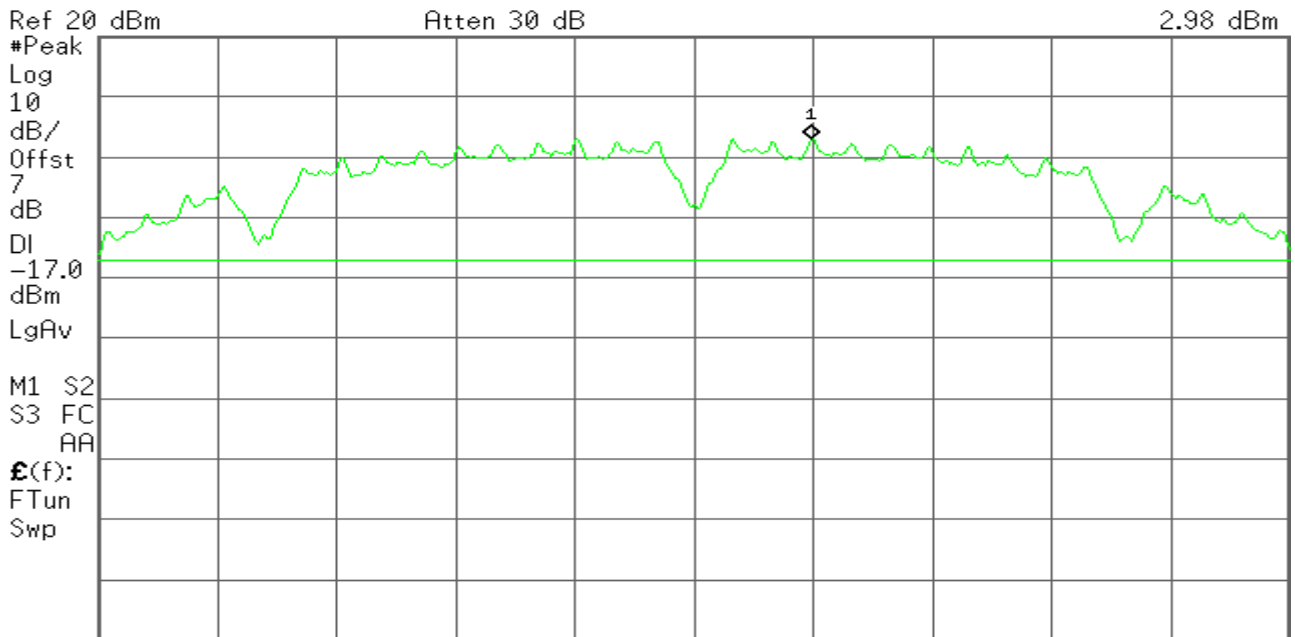


Center 2.412 000 GHz Span 15.23 MHz
#Res BW 100 kHz #VBW 300 kHz Sweep 1.48 ms (601 pts)

Agilent

R T

Mkr1 2.400 000 GHz
-48.80 dBm

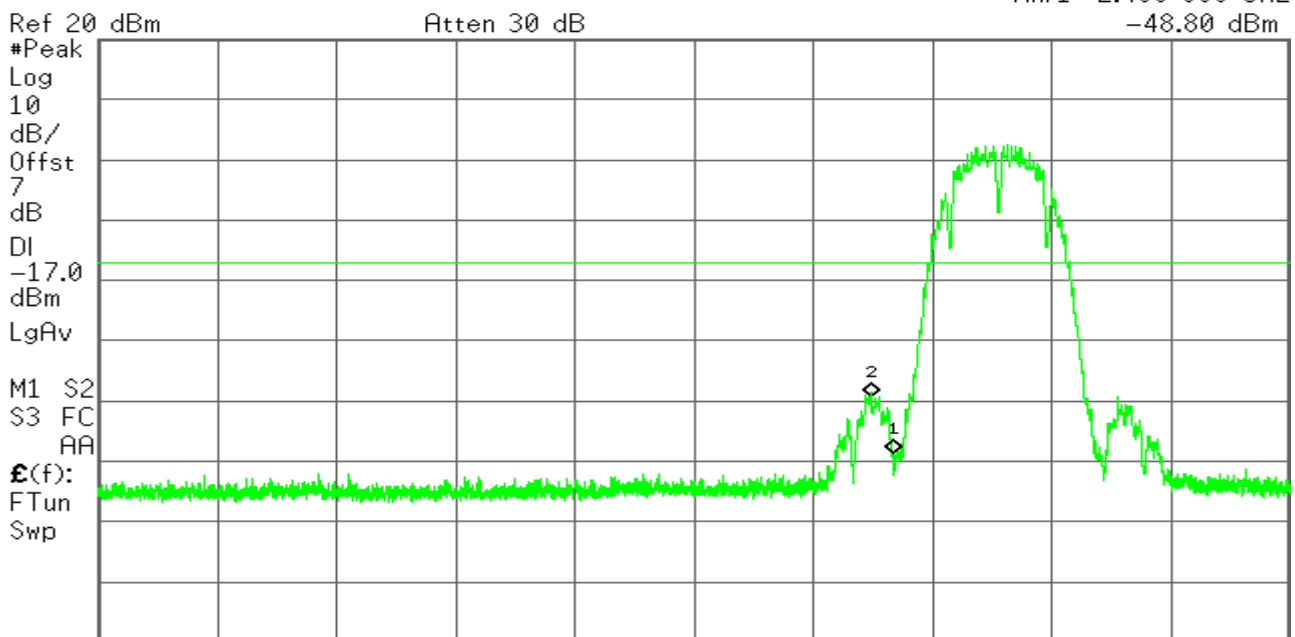


Start 2.310 000 GHz Stop 2.445 000 GHz
#Res BW 100 kHz #VBW 300 kHz Sweep 13.11 ms (8192 pts)

Agilent

R T

Mkr1 1.608 0 GHz
-52.07 dBm

Ref 20 dBm Atten 30 dB

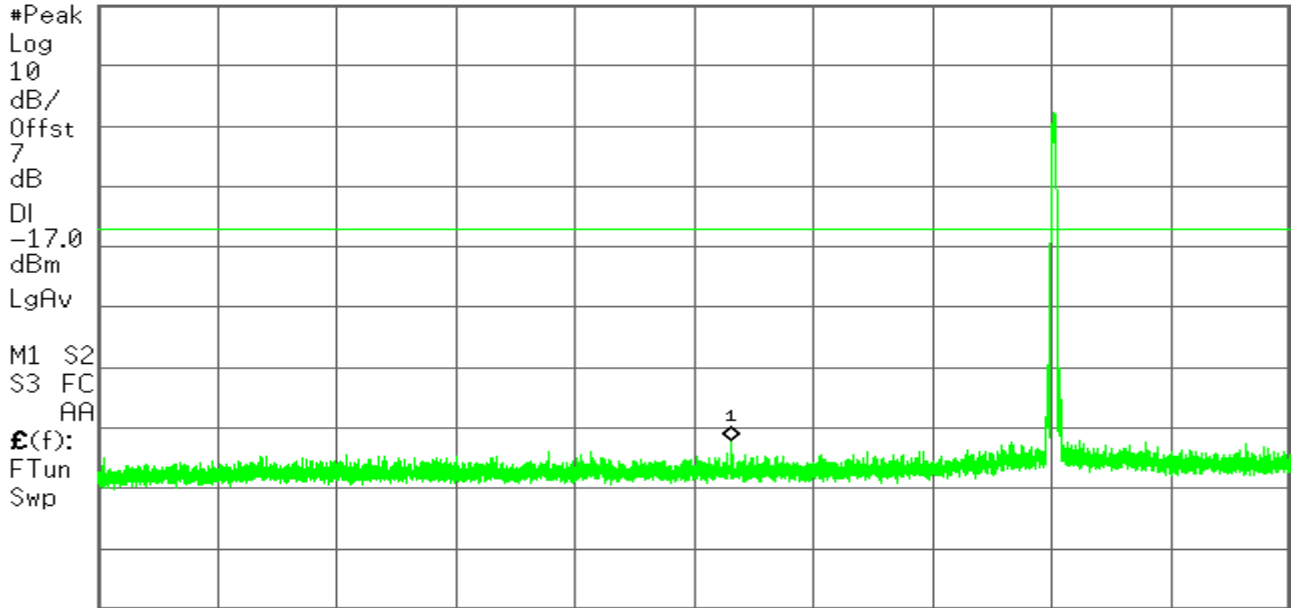


Start 30.0 MHz Stop 3.000 0 GHz
#Res BW 100 kHz #VBW 300 kHz Sweep 284 ms (8192 pts)

Agilent

R T

Mkr1 24.121 1 GHz
-42.63 dBm

Ref 20 dBm Atten 30 dB

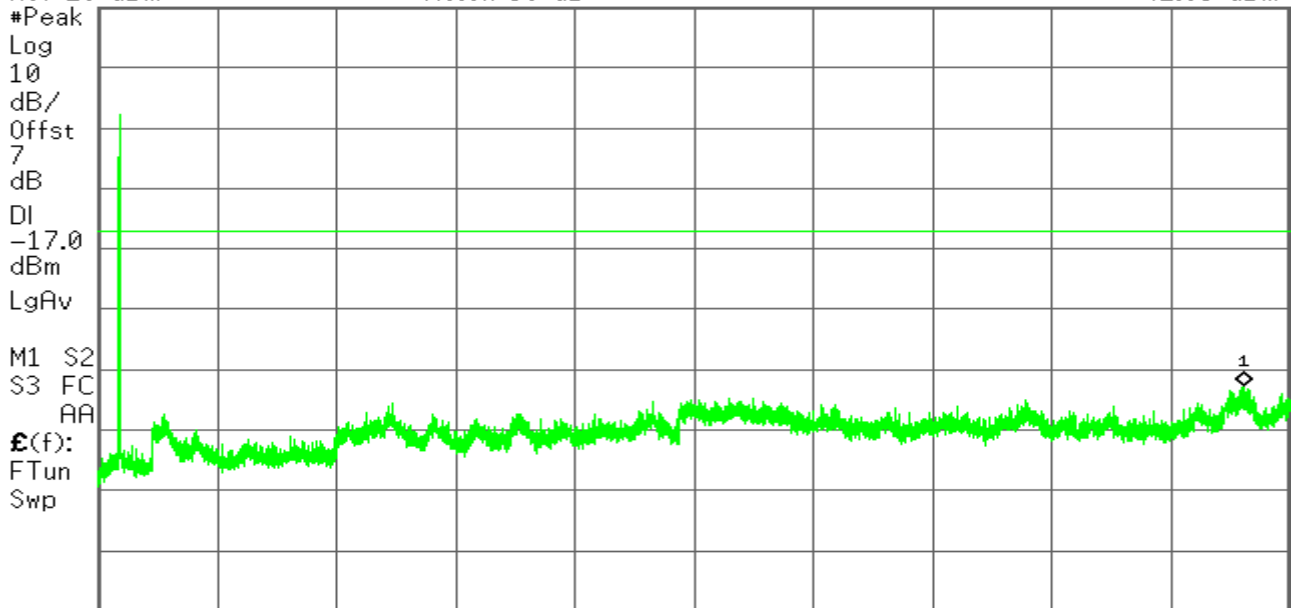


Start 2.000 0 GHz Stop 25.000 0 GHz
#Res BW 100 kHz #VBW 300 kHz Sweep 2.198 s (8192 pts)

CH Mid

Agilent

R T

Mkr1 2.438 498 GHz
3.30 dBm

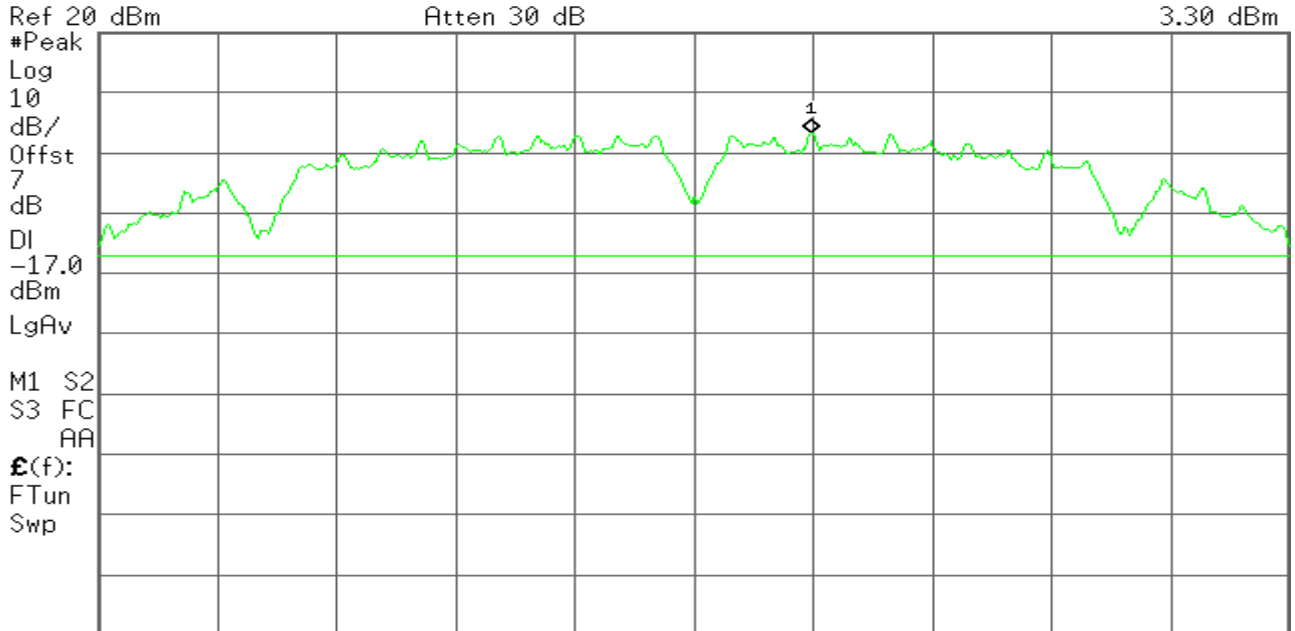


#Res BW 100 kHz #VBW 300 kHz Sweep 1.48 ms (601 pts)

Agilent

R T

Mkr1 1.624 7 GHz
-53.08 dBm

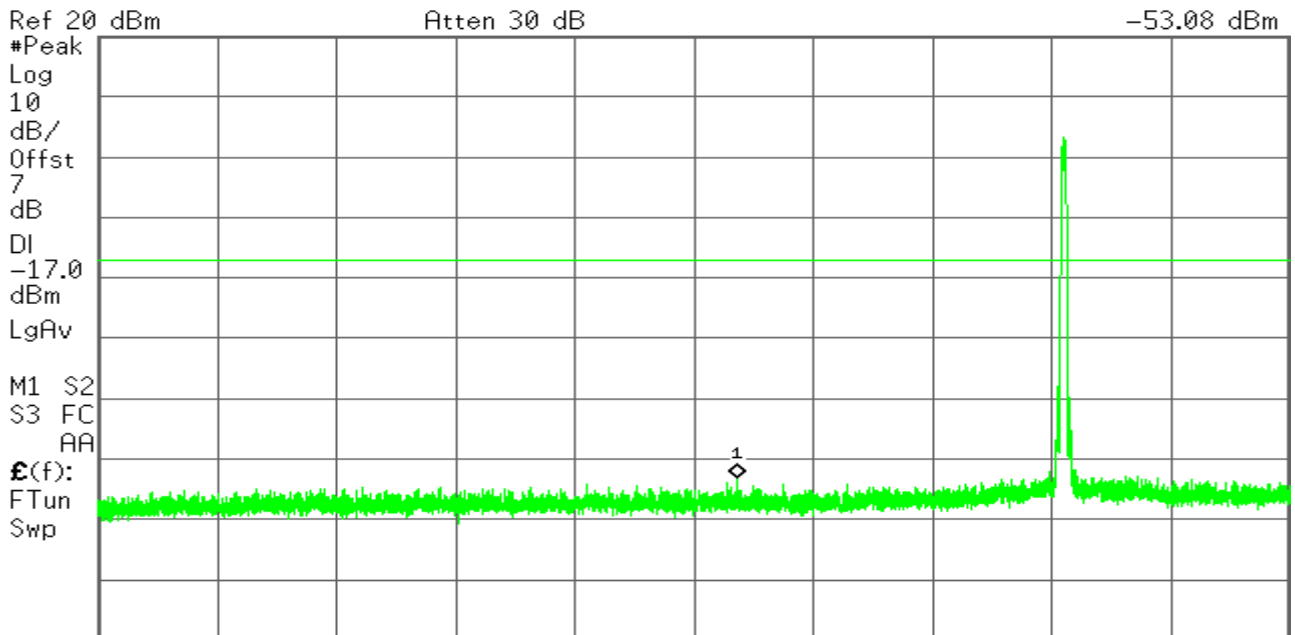


#Res BW 100 kHz #VBW 300 kHz Sweep 284 ms (8192 pts)

Agilent

R T

Mkr1 24.056 5 GHz
-42.70 dBm

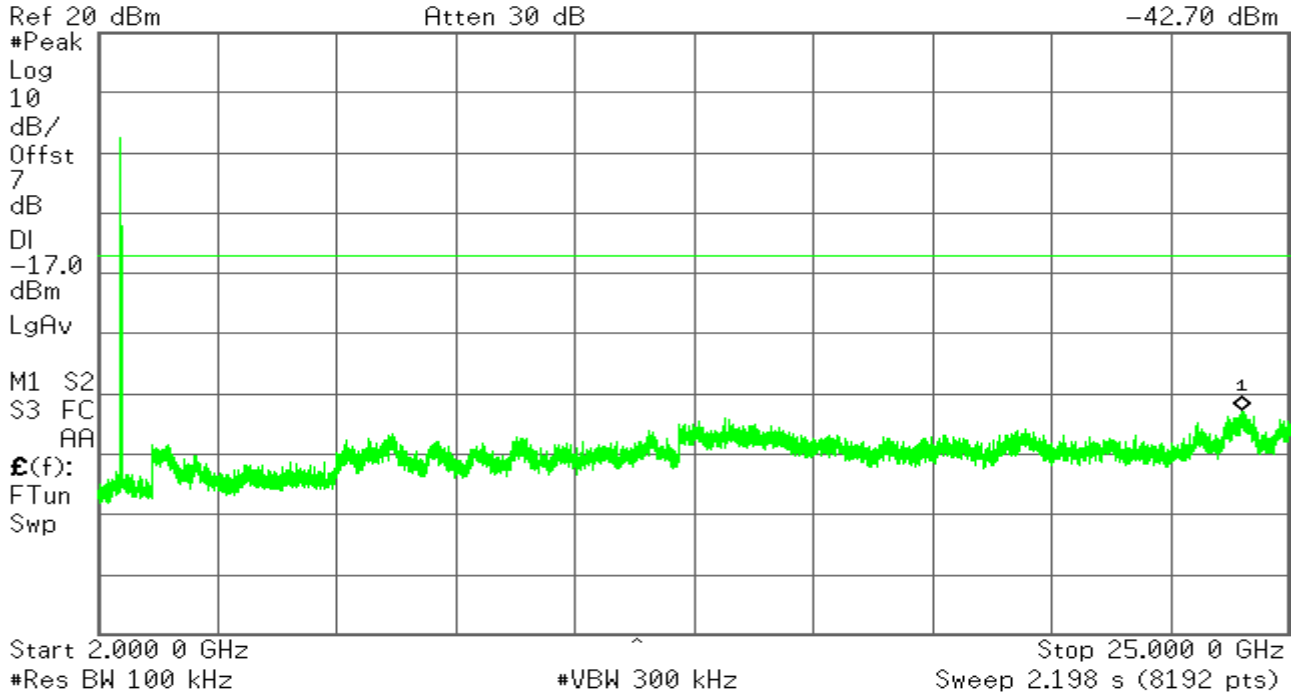


CH High

Agilent

R T

Mkr1 2.463 472 GHz
3.27 dBm

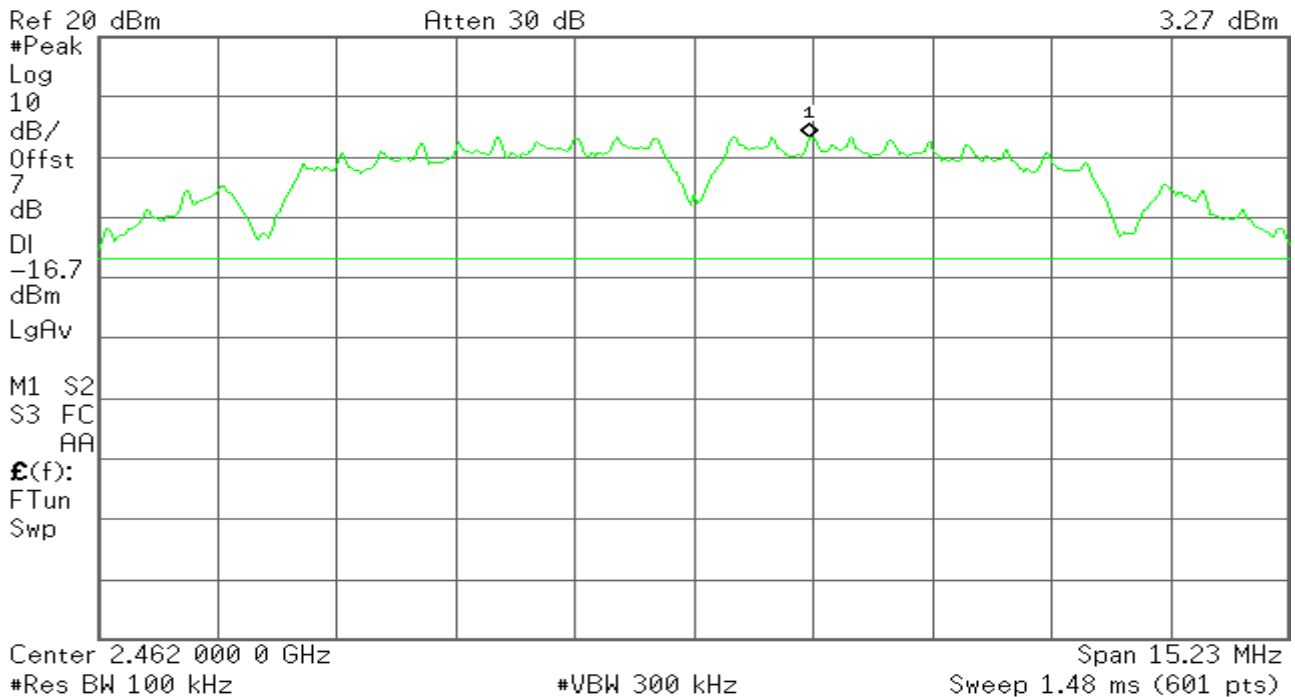


Agilent

R T

Mkr1 2.483 500 GHz
-53.63 dBm

Ref 20 dBm Atten 30 dB

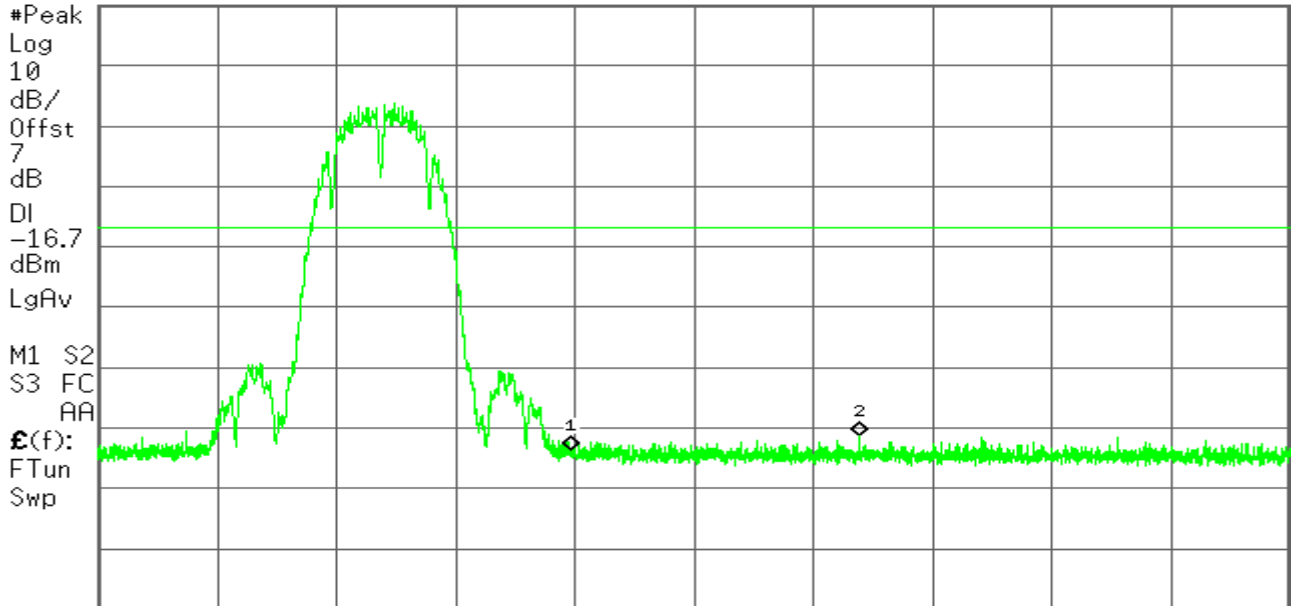


Start 2.430 000 GHz Stop 2.565 000 GHz
#Res BW 100 kHz #VBW 300 kHz Sweep 13.11 ms (8192 pts)

Agilent

R T

Mkr1 1.641 4 GHz
-52.46 dBm

Ref 20 dBm Atten 30 dB

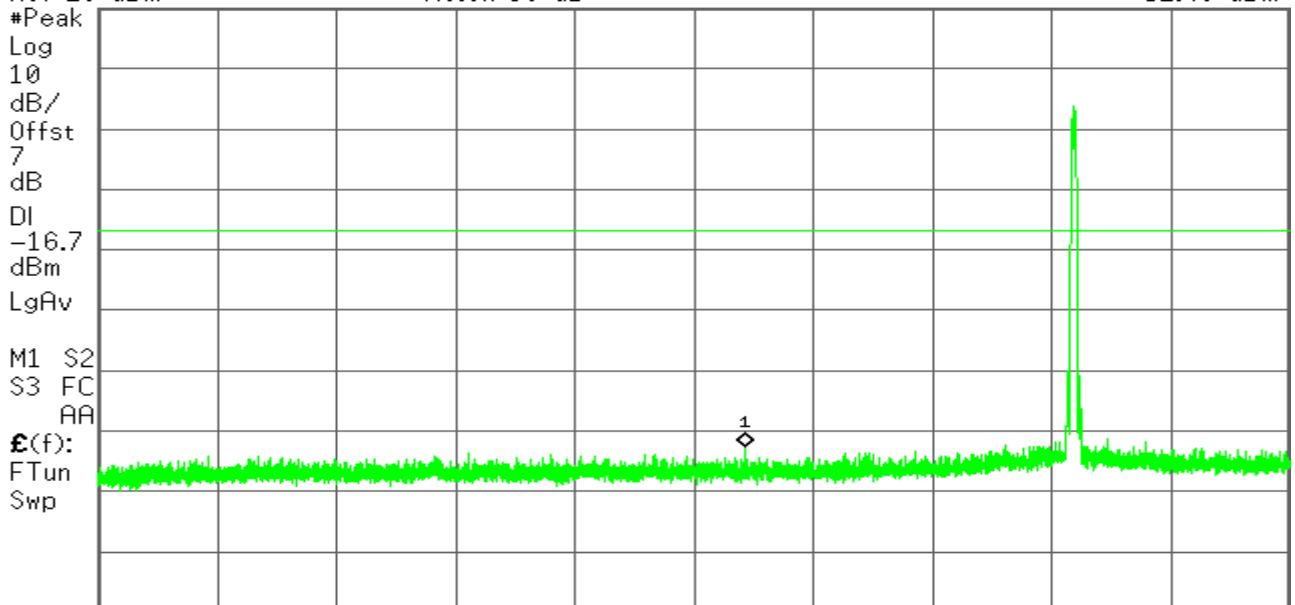


Start 30.0 MHz Stop 3.000 0 GHz
#Res BW 100 kHz #VBW 300 kHz Sweep 284 ms (8192 pts)

Agilent

R T

Mkr1 23.997 6 GHz
-42.71 dBm

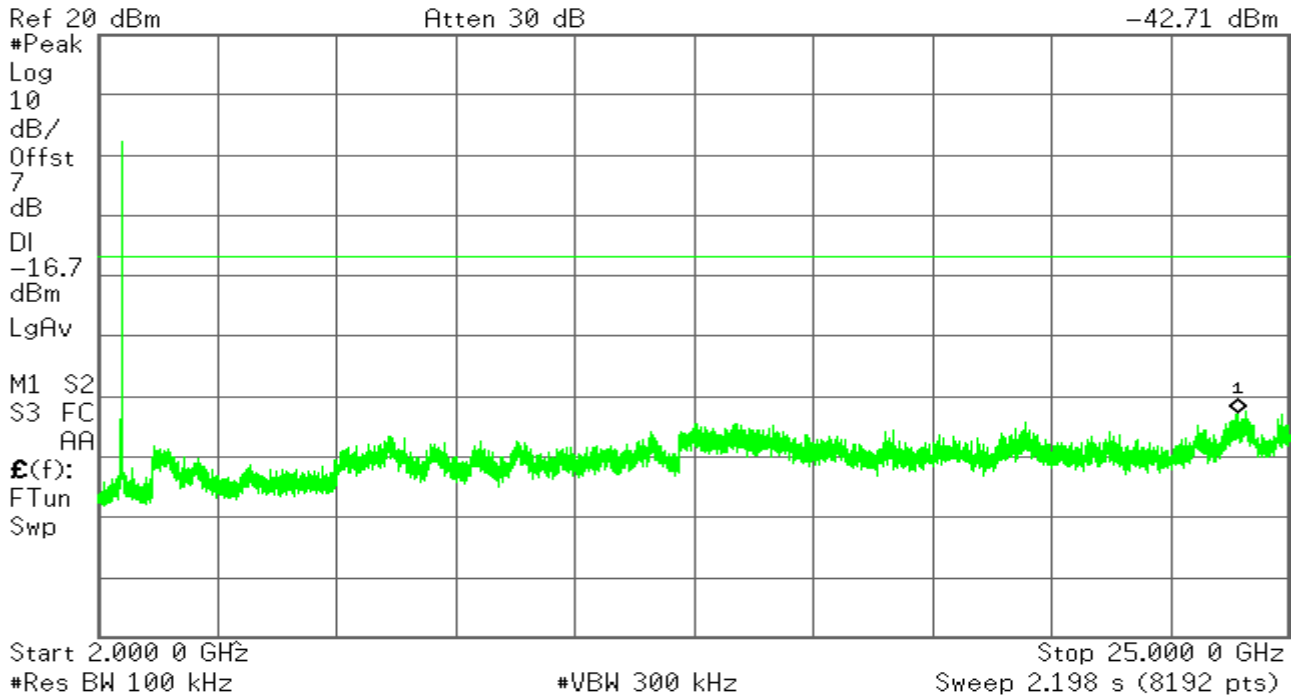


IEEE 802.11b mode/Chain 1

CH Low

Agilent

R T

Mkr1 2.412 990 GHz
2.63 dBm

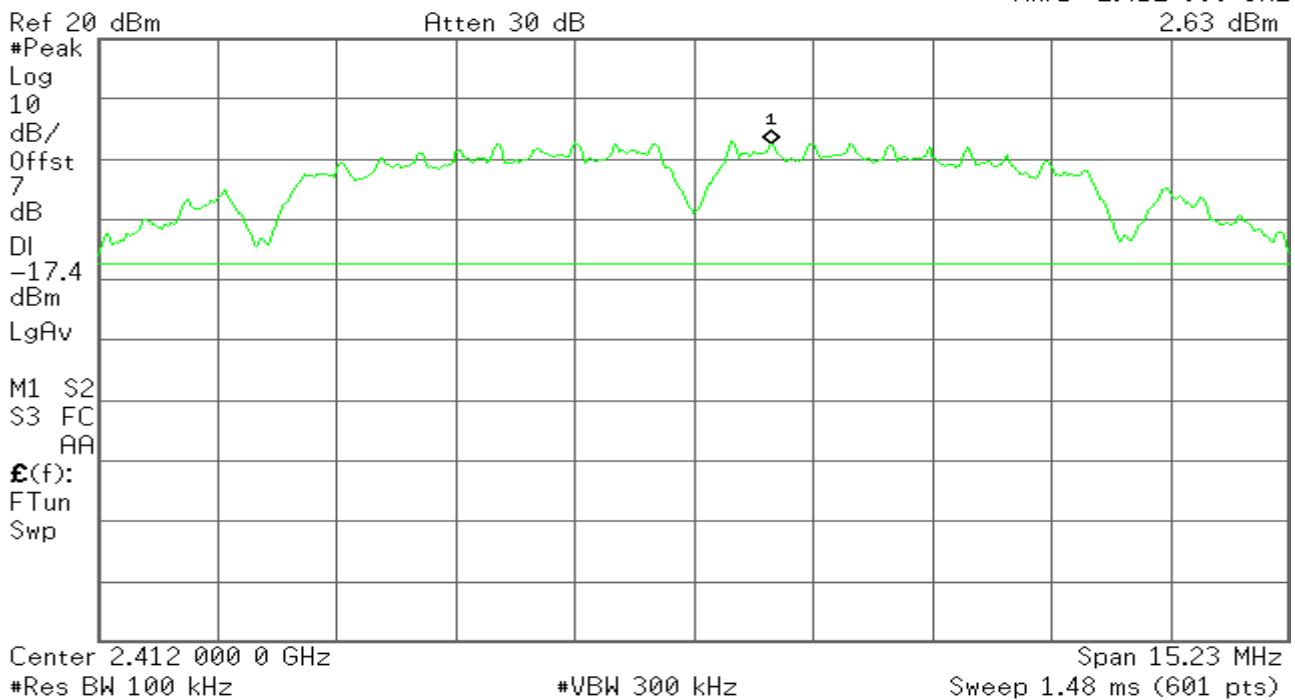

Agilent

R T

Ref 20 dBm


Atten 30 dB

Mkr1 2.400 000 GHz
-50.27 dBm

#Peak
Log
10
dB/
Offst
7
dB
DI
-17.4
dBm
LgAv

M1 S2
S3 FC
AA

£(f):
FTun
Swp

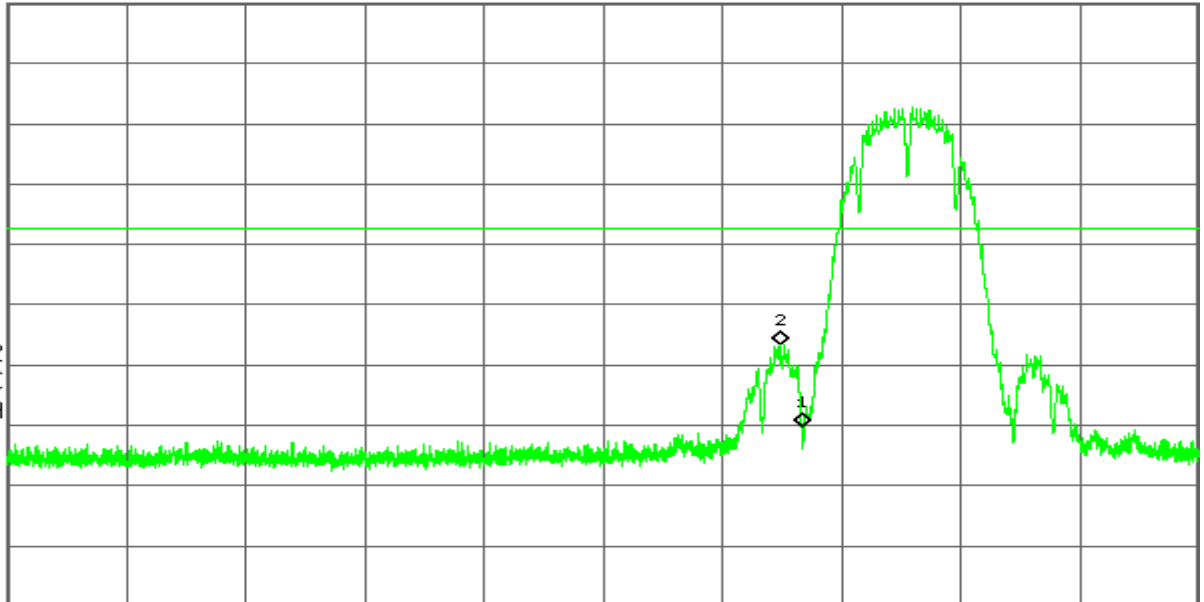

Start 2.310 000 GHz

Stop 2.445 000 GHz

#Res BW 100 kHz

#VBW 300 kHz

Sweep 13.11 ms (8192 pts)

Agilent

R T

Ref 20 dBm


Atten 30 dB

Mkr1 2.588 8 GHz
-51.08 dBm

#Peak
Log
10
dB/
Offst
7
dB
DI
-17.4
dBm
LgAv

M1 S2
S3 FC
AA

£(f):
FTun
Swp

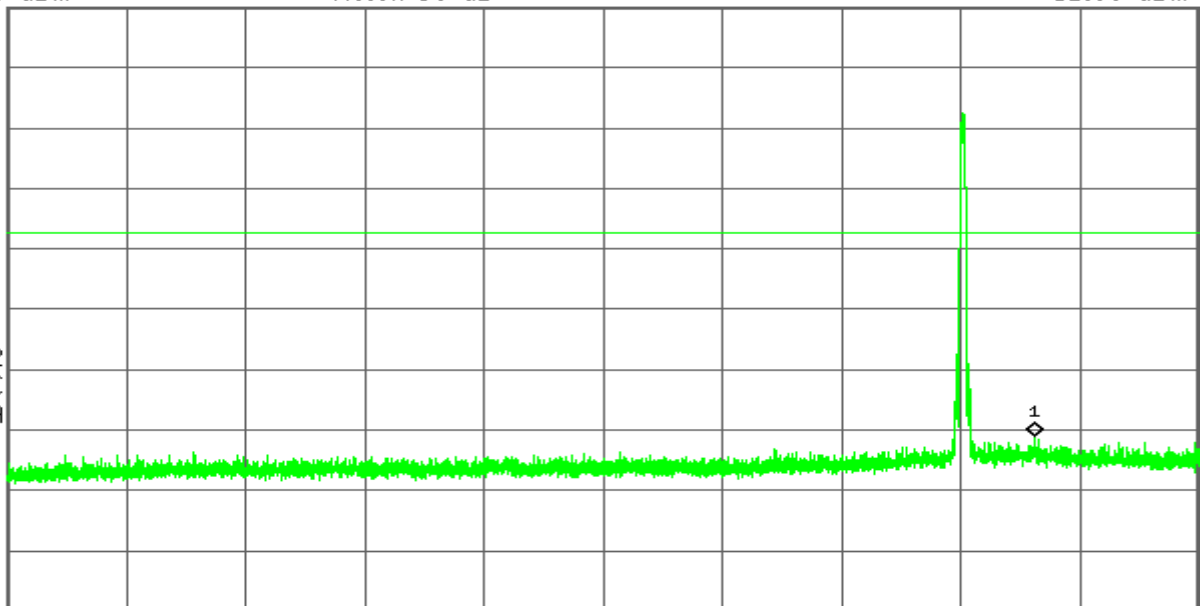

Start 30.0 MHz

Stop 3.000 0 GHz

#Res BW 100 kHz


#VBW 300 kHz

Sweep 284 ms (8192 pts)

Agilent

R T

Mkr1 24.146 4 GHz
-41.87 dBm

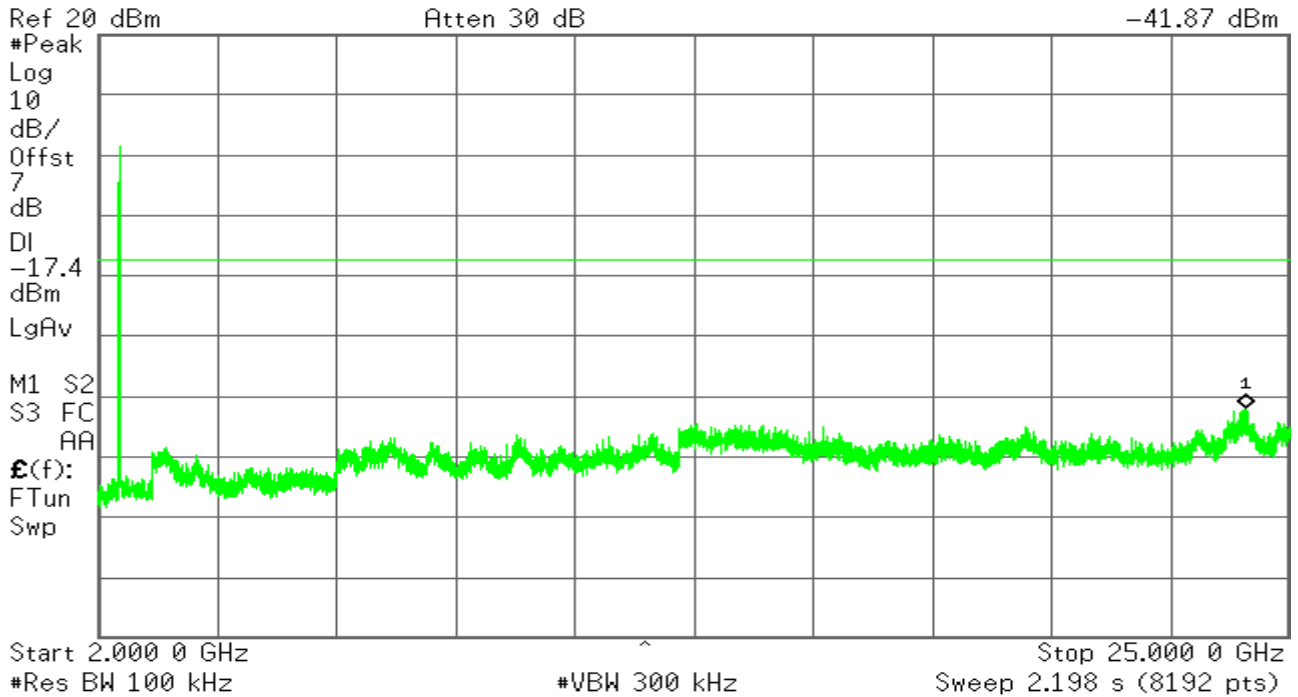


CH Mid

Agilent


R T

Mkr1 2.438 497 GHz
3.63 dBm

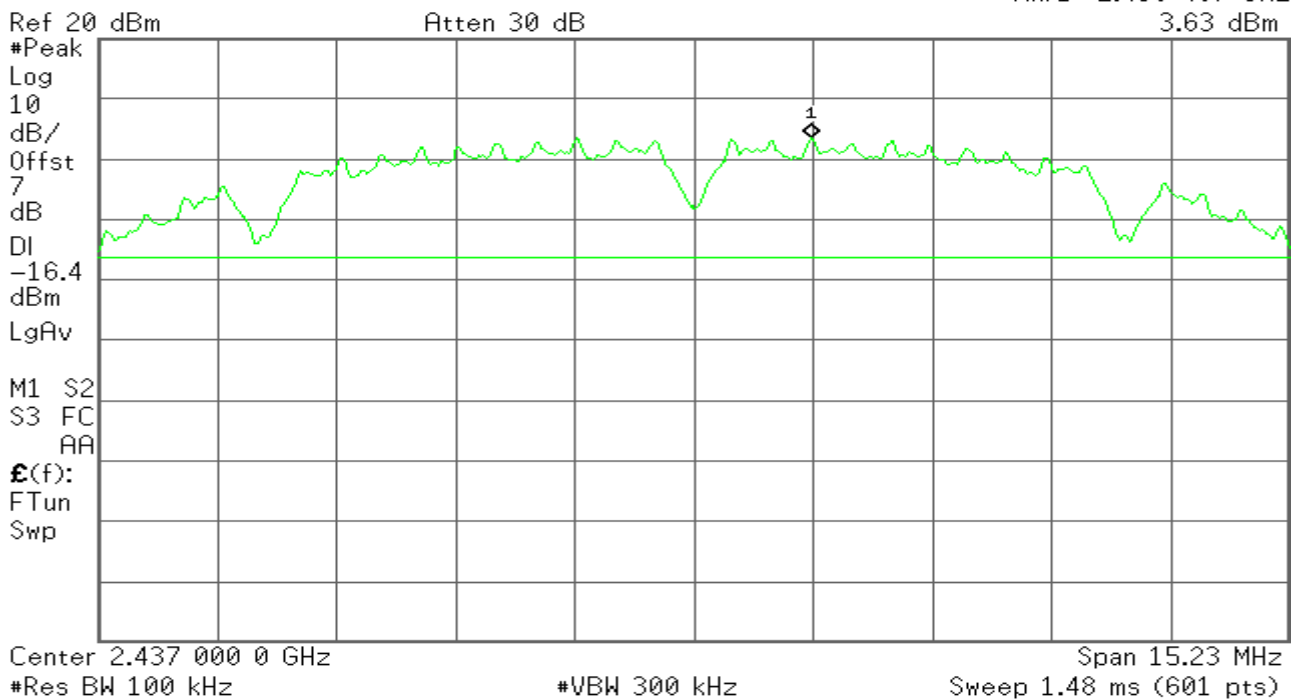

Agilent

R T

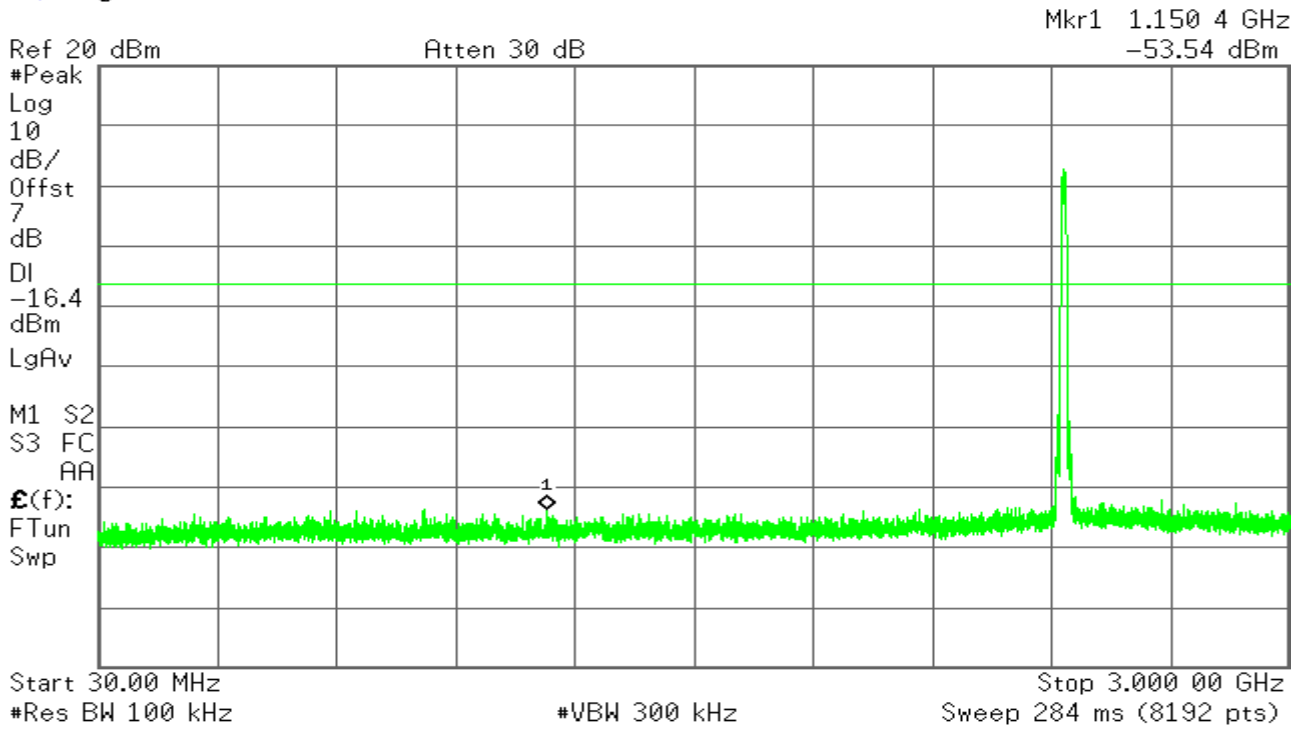

Agilent

R T



CH High

Agilent

R T

Mkr1 2.463 497 GHz
3.82 dBm

Ref 20 dBm

Atten 30 dB

#Peak

Log

10

dB/

Offst

7

dB

DI

-16.2

dBm

LgAv

M1 S2


S3 FC

AA

£(f):

FTun

Swp

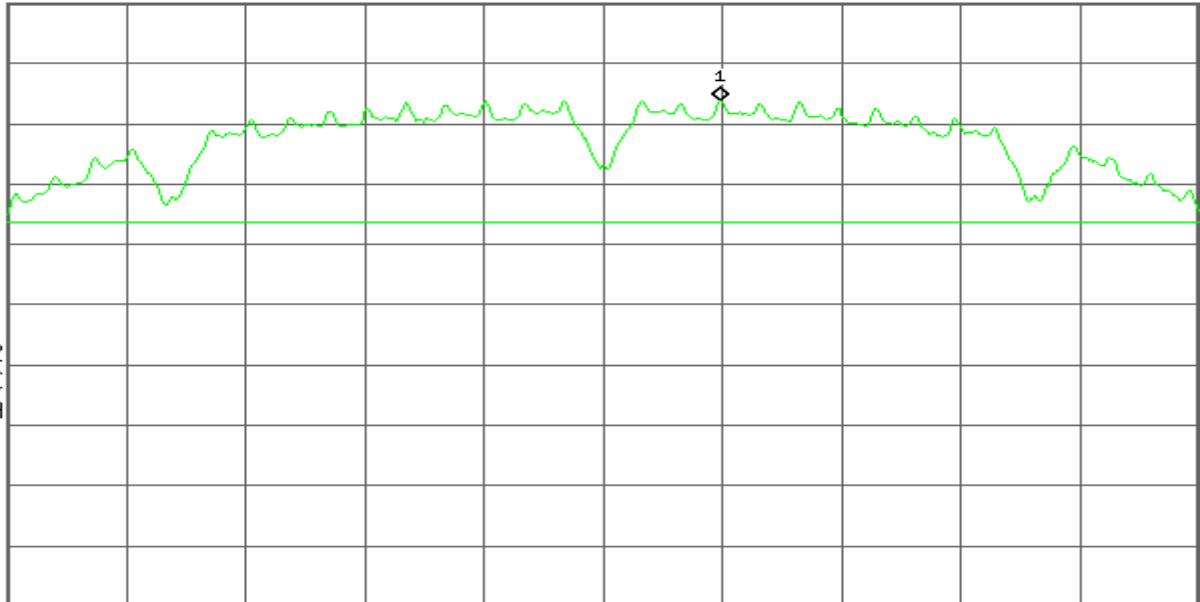

Center 2.462 000 0 GHz

Span 15.23 MHz

#Res BW 100 kHz

#VBW 300 kHz

Sweep 1.48 ms (601 pts)

Agilent

R T

Mkr1 2.483 500 GHz
-52.54 dBm

Ref 20 dBm

Atten 30 dB

#Peak

Log

10

dB/

Offst

7

dB

DI

-16.2

dBm

LgAv

M1 S2


S3 FC

AA

£(f):

FTun

Swp

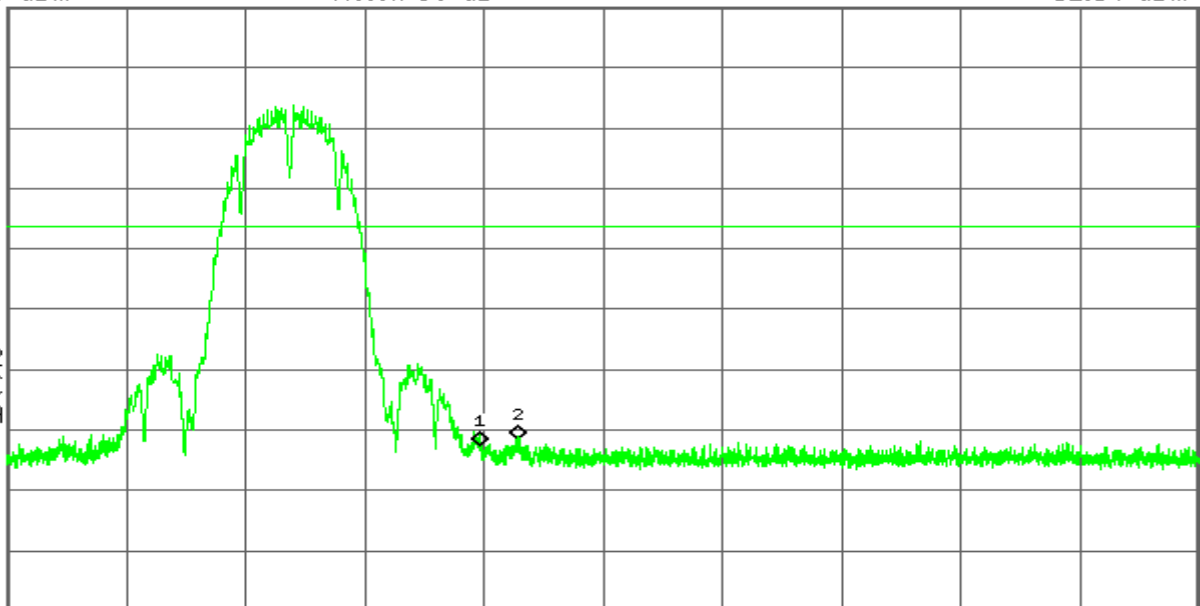

Start 2.430 000 GHz

Stop 2.565 000 GHz

#Res BW 100 kHz

#VBW 300 kHz

Sweep 13.11 ms (8192 pts)

Agilent

R T

Mkr1 2.304 9 GHz
-52.65 dBm

Ref 20 dBm

Atten 30 dB

#Peak

Log

10

dB/

Offst

7

dB

DI

-16.2

dBm

LgAv

M1 S2


S3 FC

RA

$\mathcal{E}(f)$:

FTun

Swp

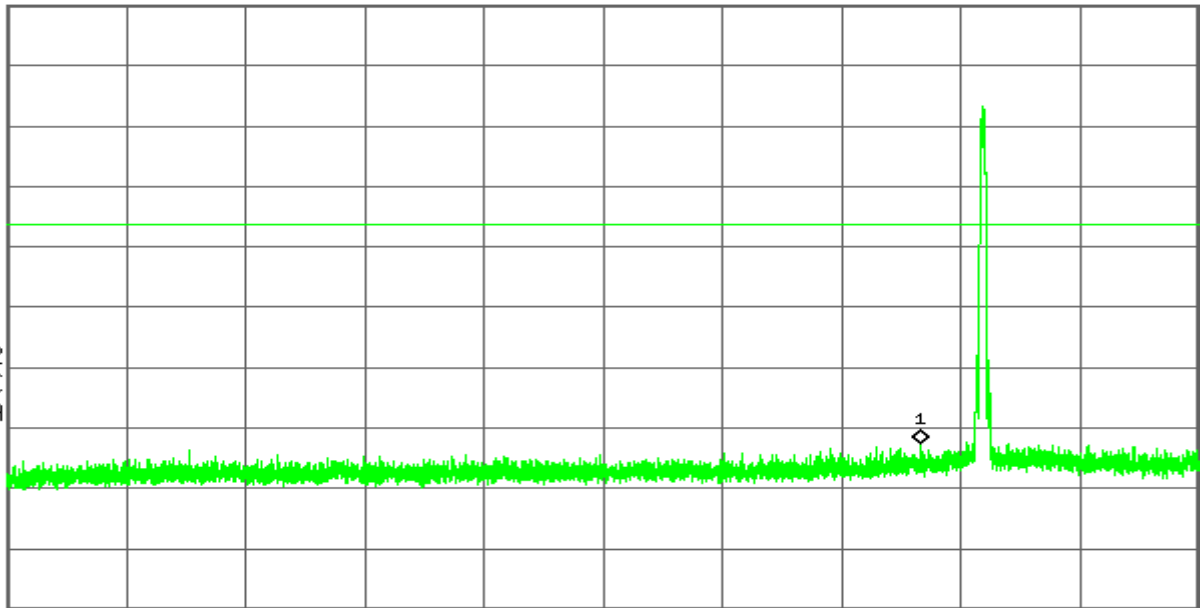

Start 30.0 MHz

#Res BW 100 kHz

#VBW 300 kHz

Stop 3.000 0 GHz

Sweep 284 ms (8192 pts)

Agilent

R T

Mkr1 23.848 7 GHz
-43.26 dBm

Ref 20 dBm

Atten 30 dB

#Peak

Log

10

dB/

Offst

7

dB

DI

-16.2

dBm

LgAv

M1 S2


S3 FC

RA

$\mathcal{E}(f)$:

FTun

Swp

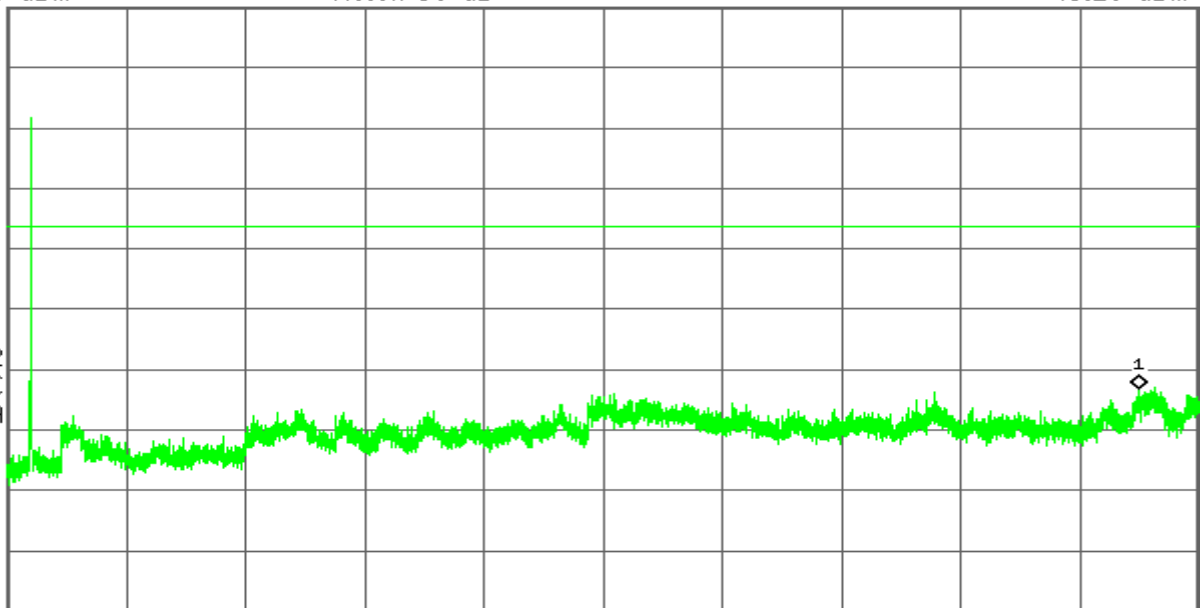

Start 2.000 0 GHz

#Res BW 100 kHz

#VBW 300 kHz

Stop 25.000 0 GHz

Sweep 2.198 s (8192 pts)

IEEE 802.11g mode/Chain 0

CH Low

Agilent

R T

Mkr1 2.417 00 GHz
0.46 dBm

Ref 20 dBm

Atten 30 dB

#Peak

Log

10

dB/

Offst

7

dB

DI

-19.5

dBm

LgAv

M1 S2


S3 FC

AA

£(f):

FTun

Swp

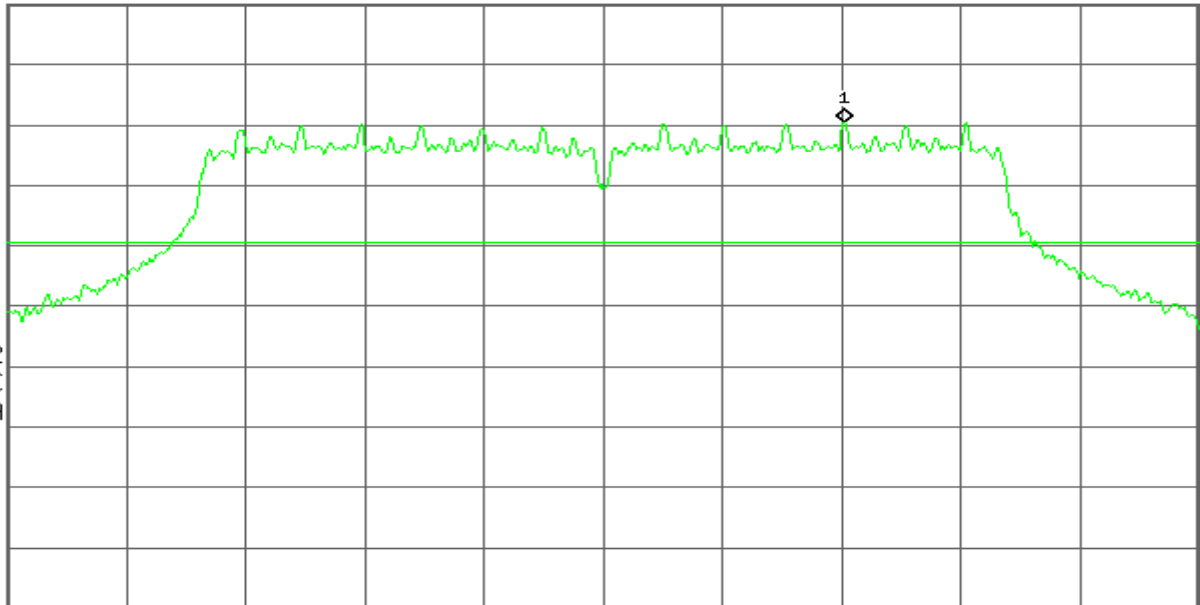

Center 2.412 000 GHz

Span 24.6 MHz

#Res BW 100 kHz

#VBW 300 kHz

Sweep 2.36 ms (601 pts)

Agilent

R T

Mkr1 2.400 000 GHz
-32.59 dBm

Ref 20 dBm

Atten 30 dB

#Peak

Log

10

dB/

Offst

7

dB

DI

-19.5

dBm

LgAv

M1 S2


S3 FC

AA

£(f):

FTun

Swp

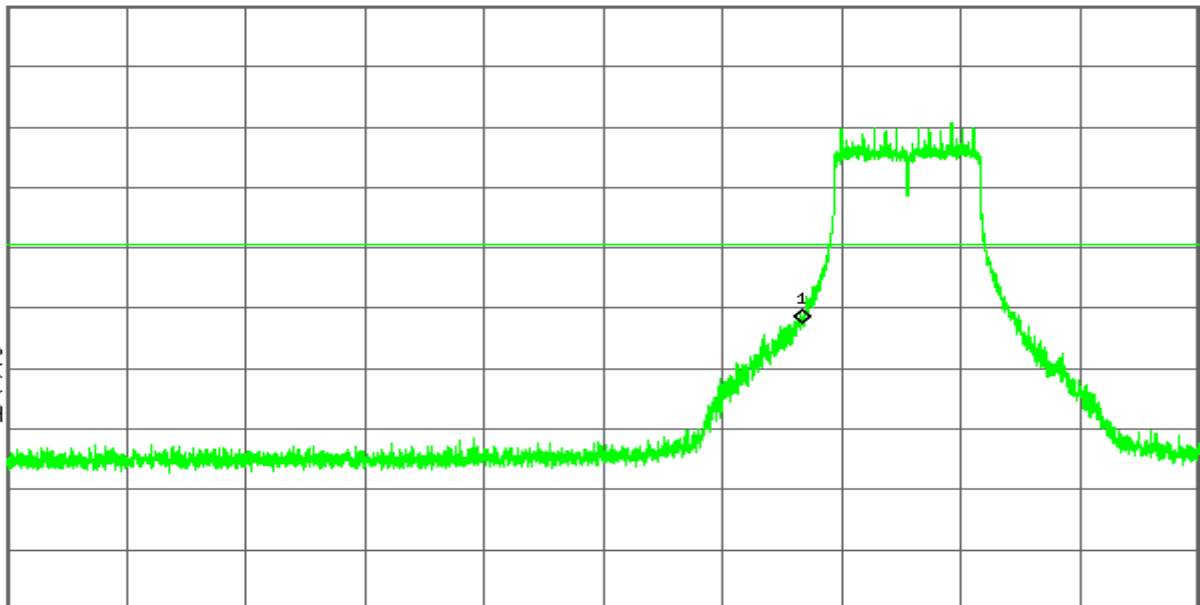

Start 2.310 000 GHz

Stop 2.445 000 GHz


#Res BW 100 kHz

#VBW 300 kHz

Sweep 13.11 ms (8192 pts)


Agilent

R T

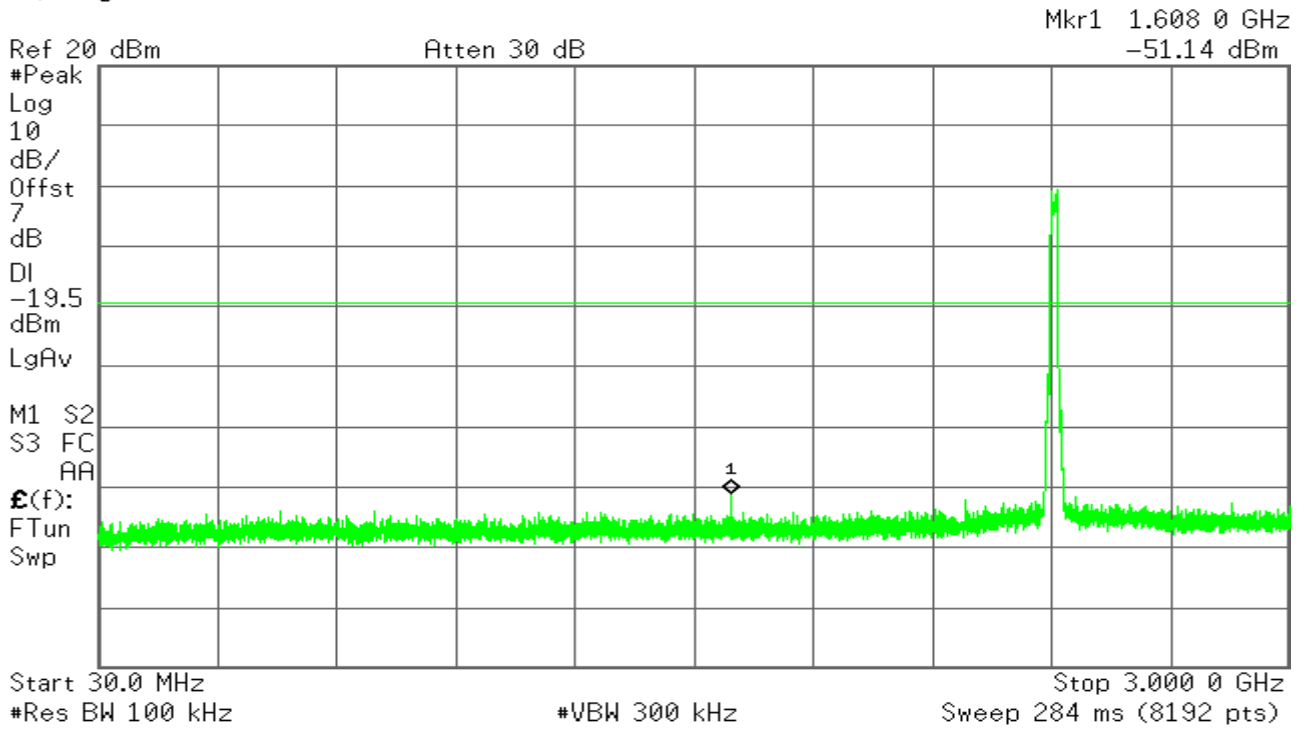

Agilent

R T

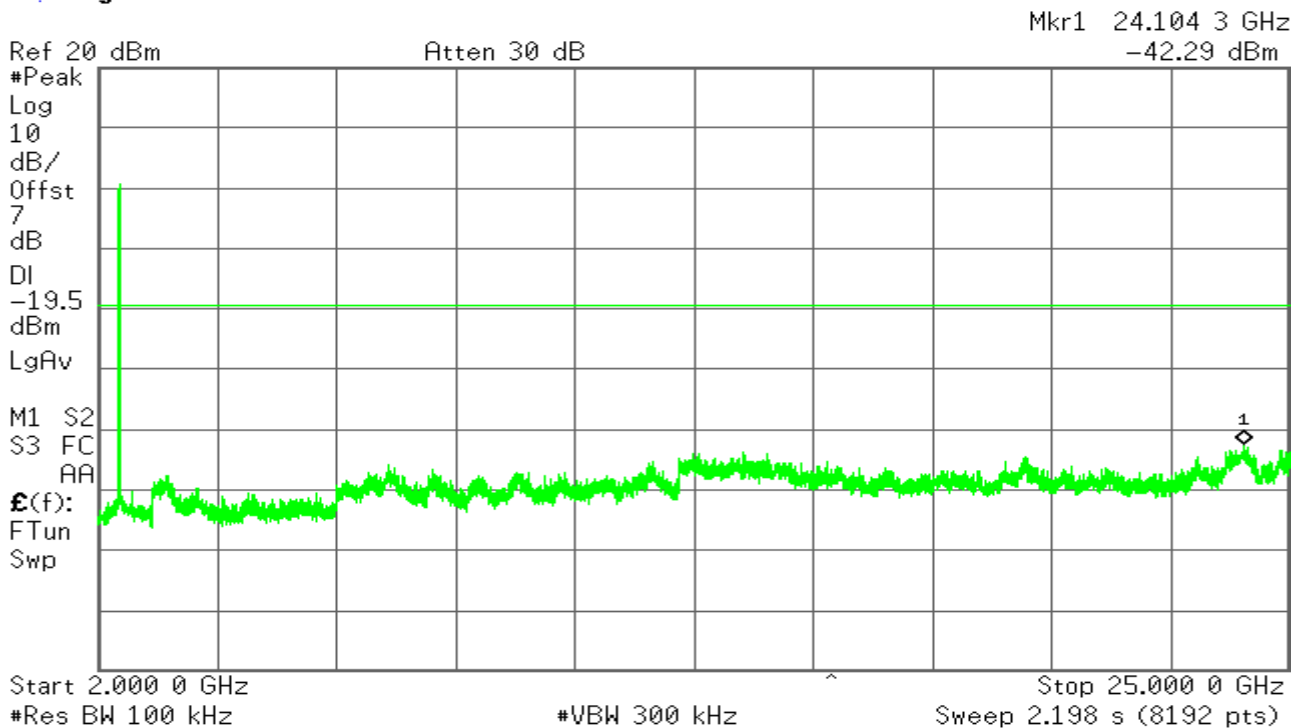

CH Mid

 **Agilent**

R T

Mkr1 2.442 00 GHz
1.12 dBm

Ref 20 dBm

Atten 30 dB

#Peak

Log

10

dB/

Offst

7

dB

DI

-18.9

dBm

LgAv

M1 S2


S3 FC

AA

$\mathcal{E}(f)$:

FTun

Swp

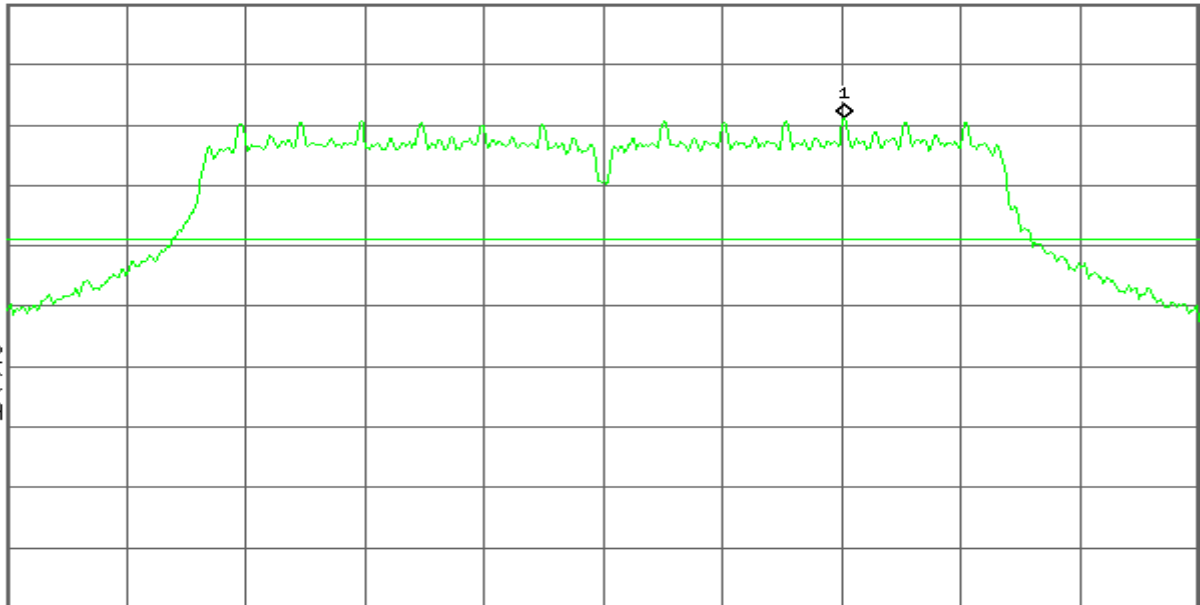

Center 2.437 000 GHz

Span 24.6 MHz

#Res BW 100 kHz

#VBW 300 kHz

Sweep 2.36 ms (601 pts)

 **Agilent**

R T

Mkr1 1.624 7 GHz
-51.43 dBm

Ref 20 dBm

Atten 30 dB

#Peak

Log

10

dB/

Offst

7

dB

DI

-18.9

dBm

LgAv

M1 S2


S3 FC

AA

$\mathcal{E}(f)$:

FTun

Swp

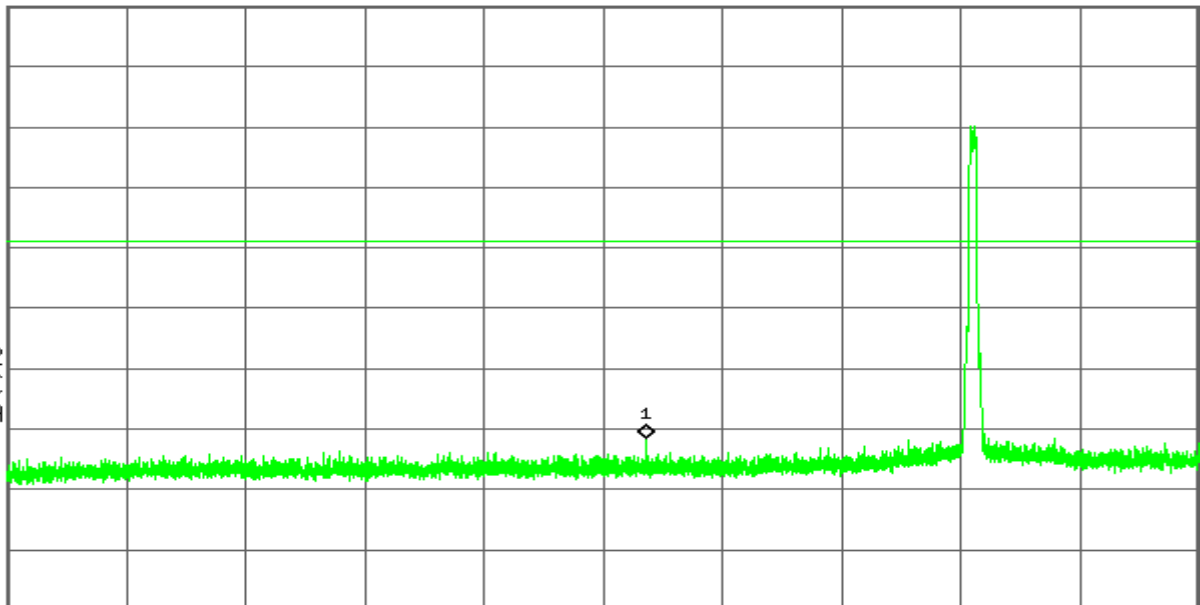

Start 30.00 MHz

Stop 3.000 00 GHz

#Res BW 100 kHz

#VBW 300 kHz

Sweep 284 ms (8192 pts)

Agilent


R T

Ref 20 dBm

Atten 30 dB

Mkr1 24.233 4 GHz
-43.09 dBm

#Peak
Log
10
dB/
Offst
7
dB
DI
-18.9
dBm
LgAv
M1 S2
S3 FC
AA
£(f):
FTun
Swp

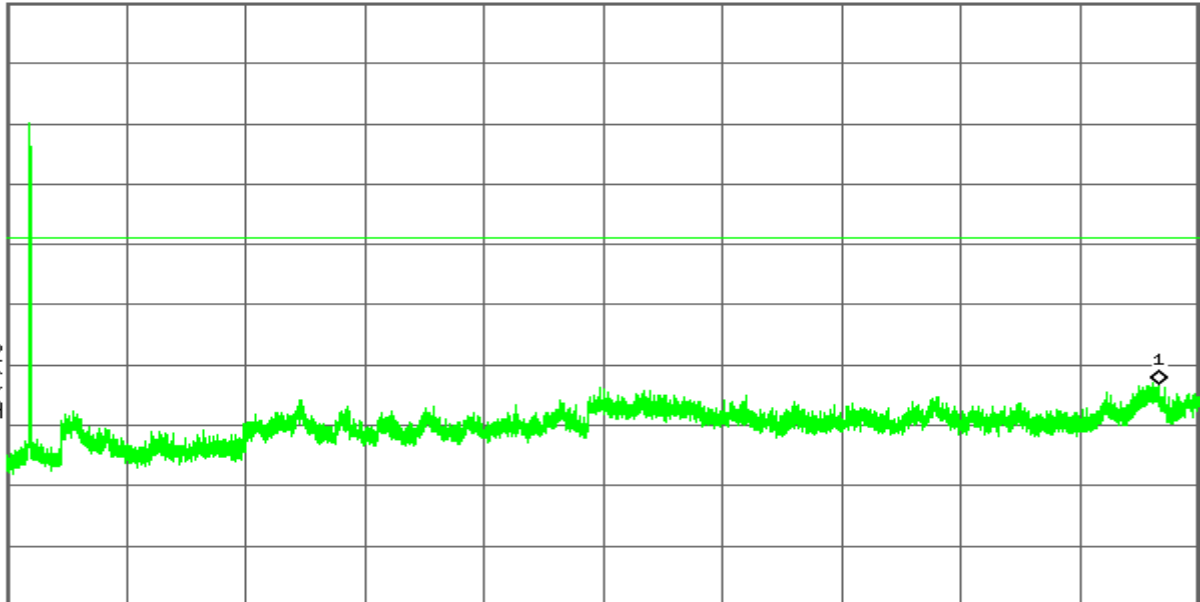

Start 2.000 0 GHz
#Res BW 100 kHz

#VBW 300 kHz

Stop 25.000 0 GHz
Sweep 2.198 s (8192 pts)

CH High

Agilent


R T

Ref 20 dBm

Atten 30 dB

Mkr1 2.467 00 GHz
1.12 dBm

#Peak
Log
10
dB/
Offst
7
dB
DI
-18.9
dBm
LgAv
M1 S2
S3 FC
AA
£(f):
FTun
Swp

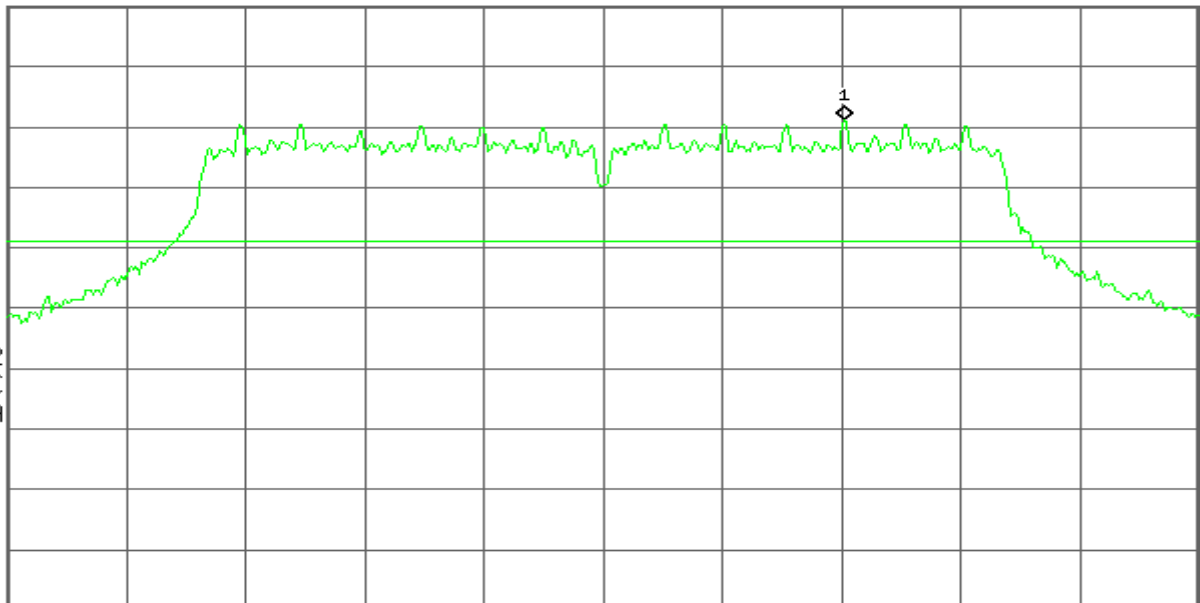

Center 2.462 000 GHz
#Res BW 100 kHz

#VBW 300 kHz

Span 24.6 MHz
Sweep 2.36 ms (601 pts)


Agilent

R T

Mkr1 2.483 500 GHz
-47.83 dBm

Ref 20 dBm Atten 30 dB

#Peak
Log
10
dB/
Offst
7
dB
DI
-18.9
dBm
LgAv
M1 S2
S3 FC
AA
E(f):
FTun
Swp

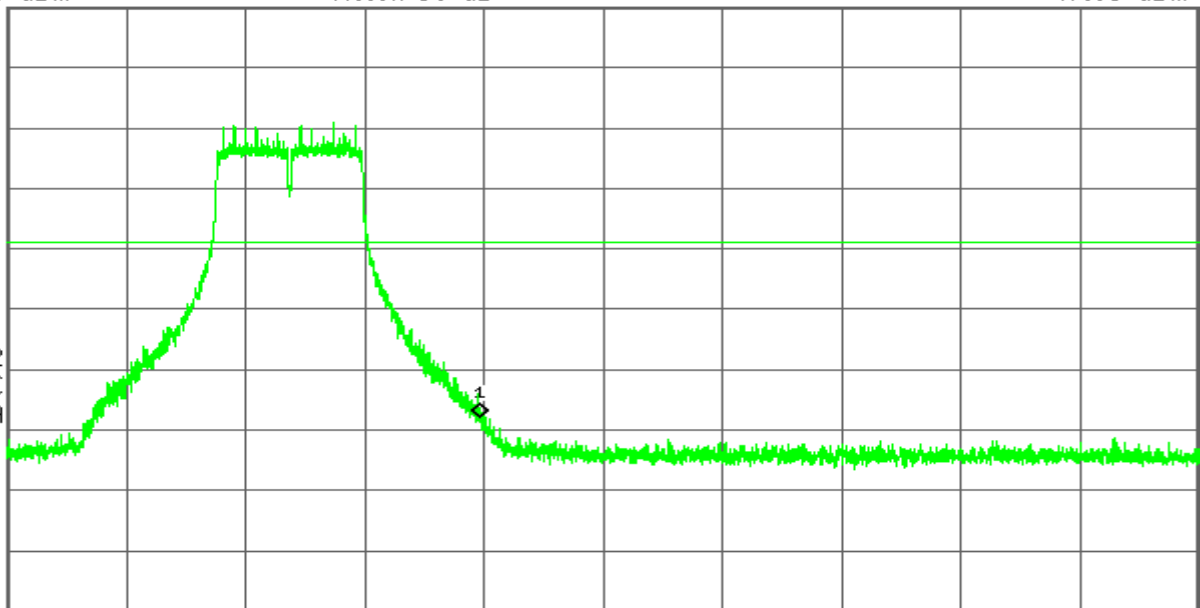

Start 2.430 000 GHz

Stop 2.565 000 GHz

#Res BW 100 kHz

#VBW 300 kHz

Sweep 13.11 ms (8192 pts)


Agilent

R T

Mkr1 1.641 4 GHz
-51.80 dBm

Ref 20 dBm Atten 30 dB

#Peak
Log
10
dB/
Offst
7
dB
DI
-18.9
dBm
LgAv
M1 S2
S3 FC
AA
E(f):
FTun
Swp

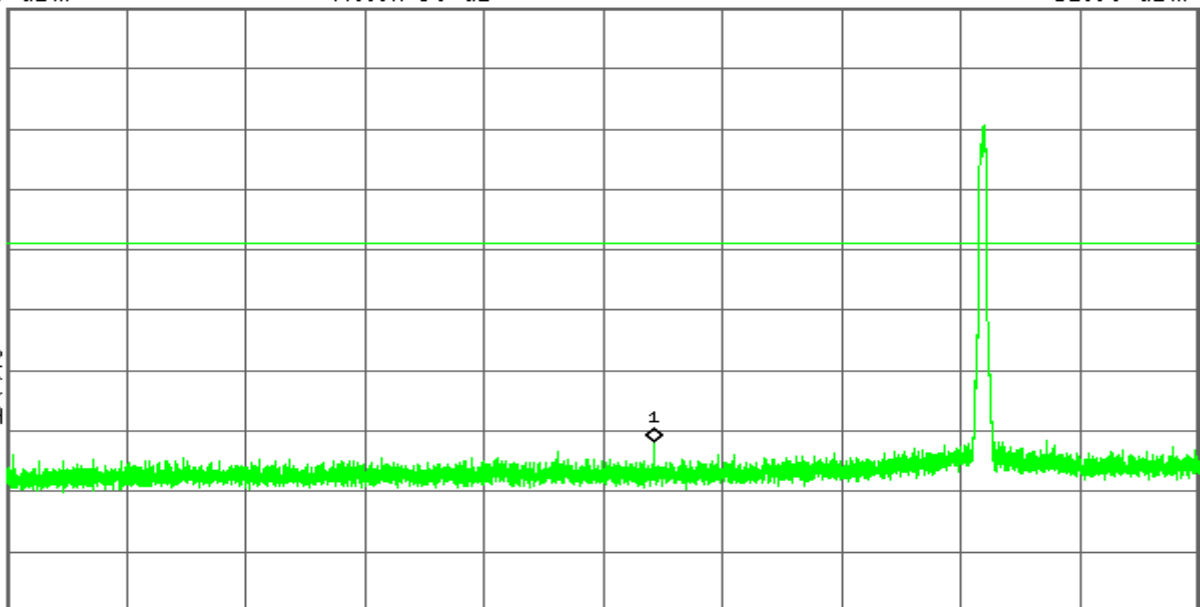

Start 30.0 MHz

Stop 3.000 0 GHz

#Res BW 100 kHz


#VBW 300 kHz

Sweep 284 ms (8192 pts)

Agilent

R T

Mkr1 24.109 9 GHz
-42.76 dBm

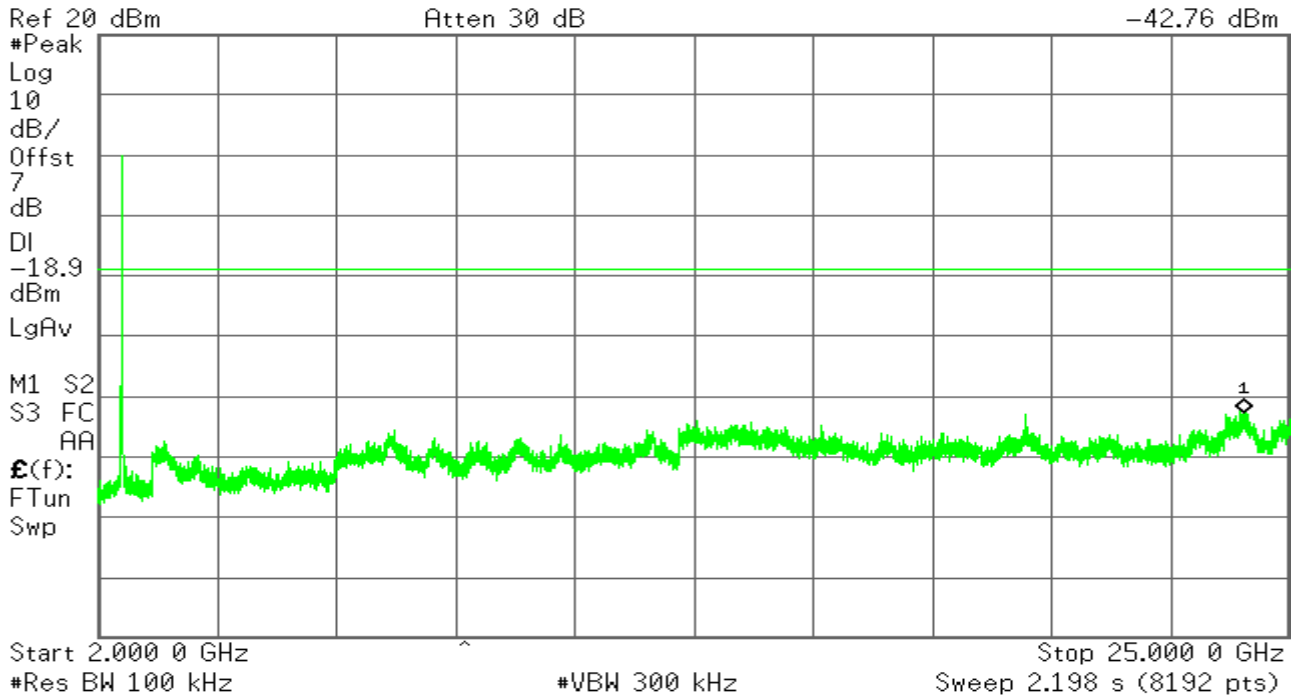


IEEE 802.11g mode/Chain 1

CH Low

Agilent

R T

Mkr1 2.417 00 GHz
1.36 dBm

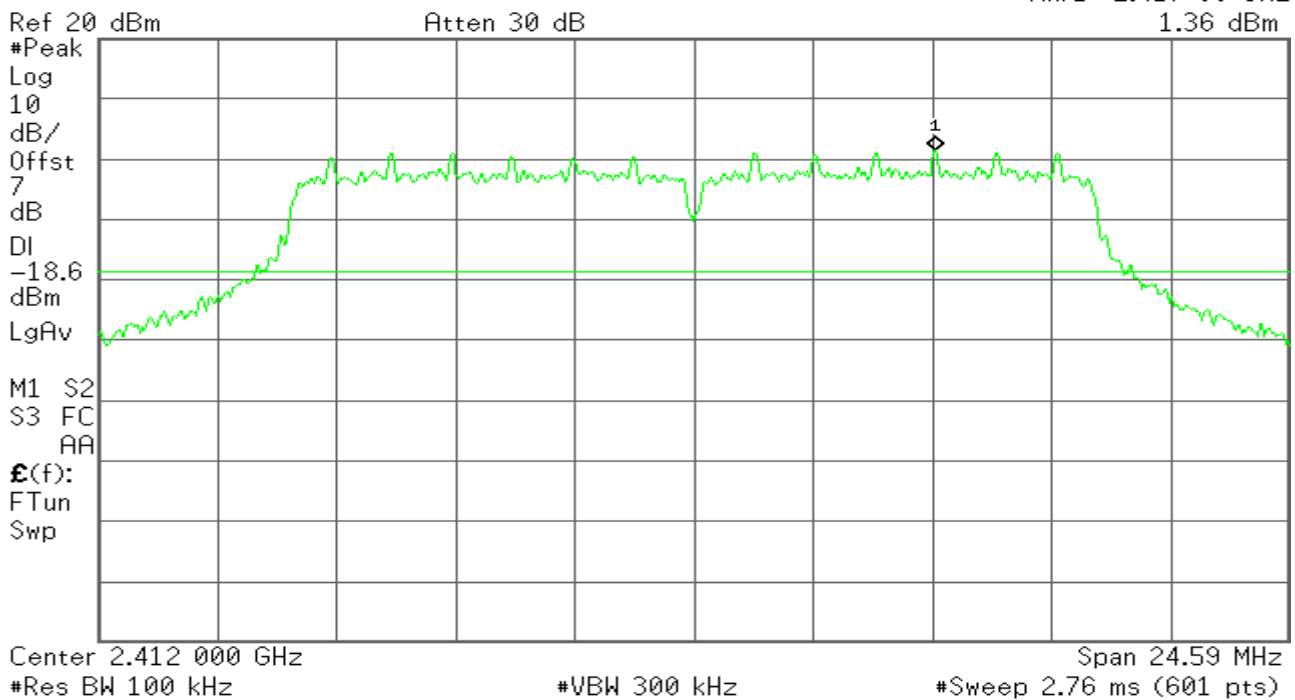

Agilent


R T

Ref 20 dBm

Atten 30 dB

Mkr1 2.400 000 GHz
-31.68 dBm

#Peak
Log
10
dB/
Offst
7
dB
DI
-18.6
dBm
LgAv
M1 S2
S3 FC
AA
£(f):
FTun
Swp

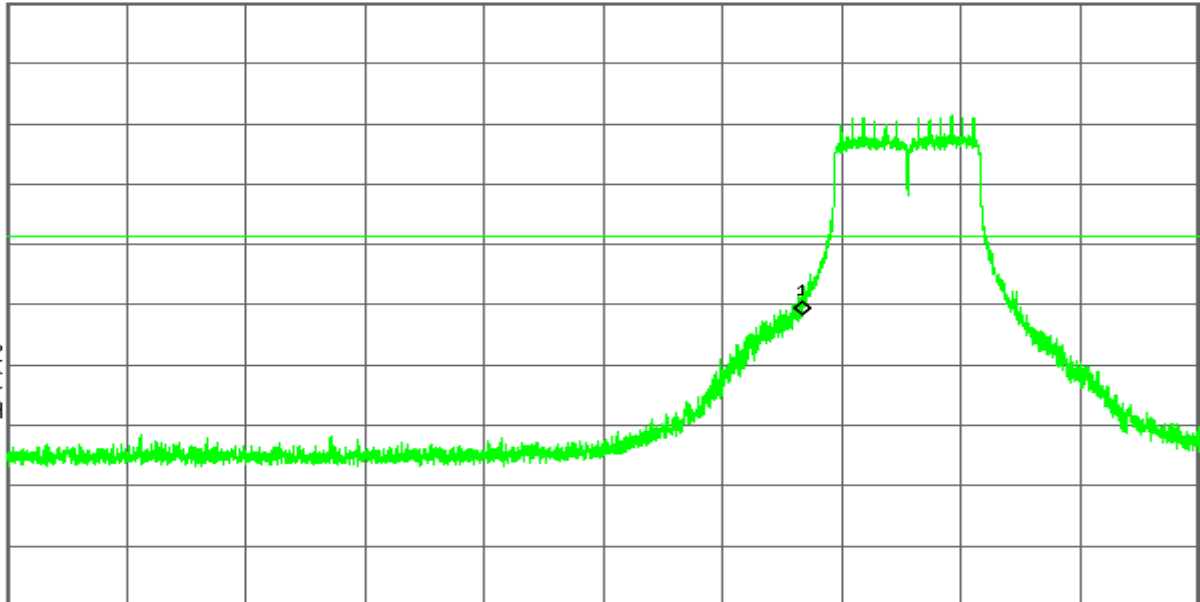

Start 2.310 000 GHz

Stop 2.445 000 GHz

#Res BW 100 kHz

#VBW 300 kHz

Sweep 13.11 ms (8192 pts)

Agilent


R T

Ref 20 dBm

Atten 30 dB

Mkr1 2.467 4 GHz
-51.17 dBm

#Peak
Log
10
dB/
Offst
7
dB
DI
-18.6
dBm
LgAv
M1 S2
S3 FC
AA
£(f):
FTun
Swp

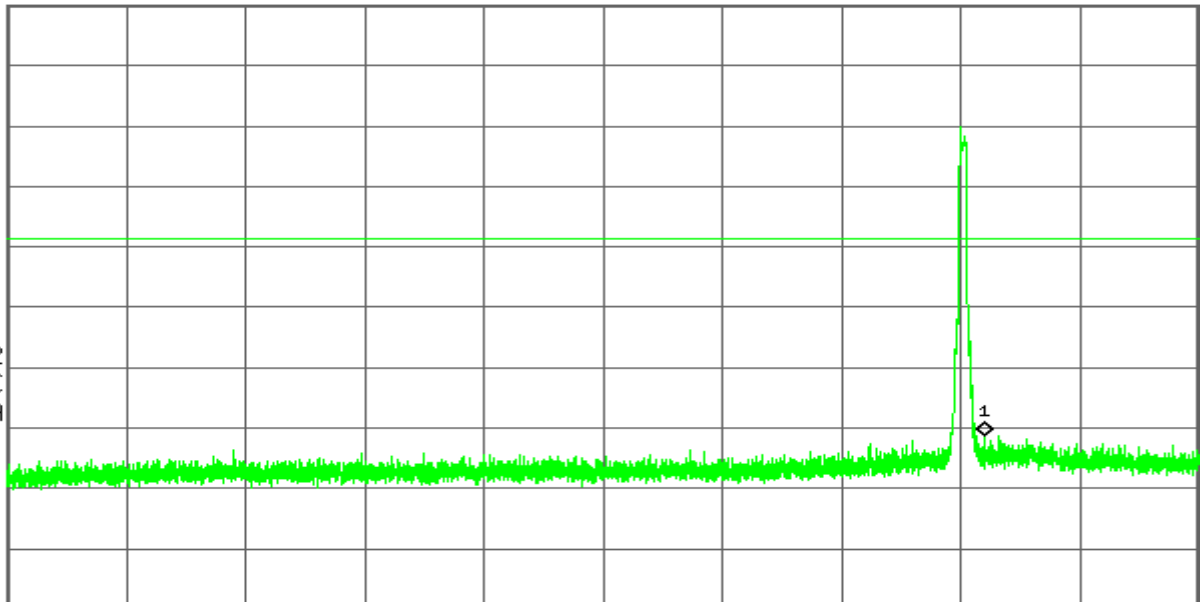

Start 30.0 MHz

Stop 3.000 0 GHz

#Res BW 100 kHz

#VBW 300 kHz

Sweep 284 ms (8192 pts)

Agilent

R T


Mkr1 24.109 9 GHz
-42.55 dBm

Ref 20 dBm

Atten 30 dB

#Peak
Log
10
dB/
Offst
7
dB
DI
-18.6
dBm
LgAv

M1 S2
S3 FC
AA
£(f):
FTun
Swp

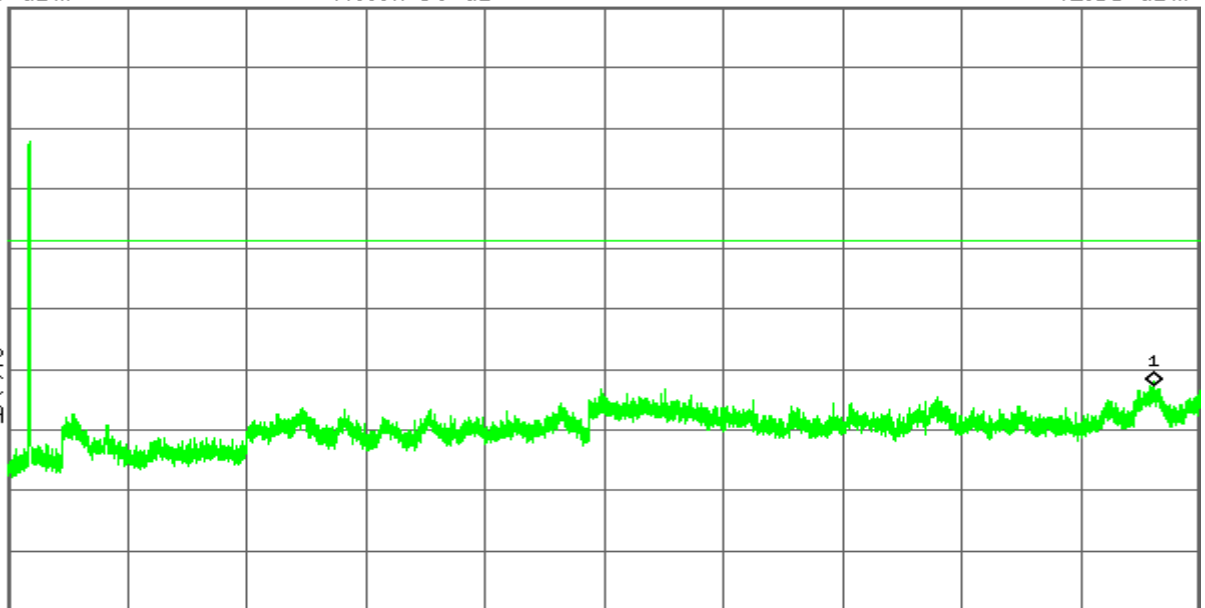

Start 2.000 0 GHz
#Res BW 100 kHz

#VBW 300 kHz

Stop 25.000 0 GHz
Sweep 2.198 s (8192 pts)

CH Mid

Agilent

R T


Mkr1 2.442 00 GHz
1.38 dBm

Ref 20 dBm

Atten 30 dB

#Peak
Log
10
dB/
Offst
7
dB
DI
-18.6
dBm
LgAv

M1 S2
S3 FC
AA
£(f):
FTun
Swp

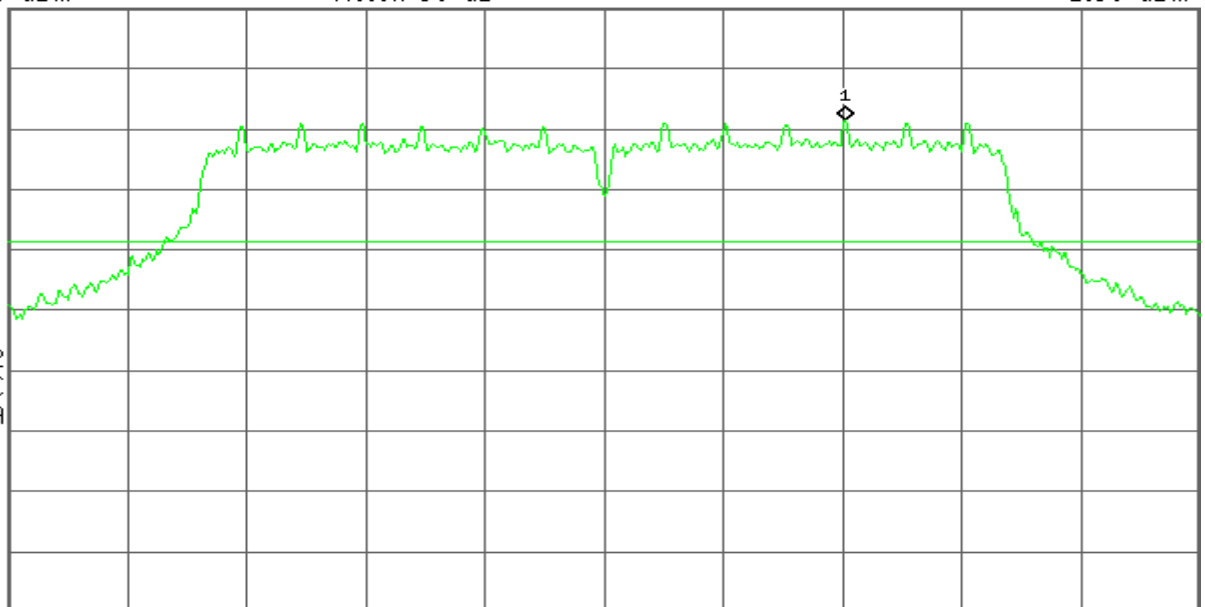

Center 2.437 000 GHz
#Res BW 100 kHz

#VBW 300 kHz

Span 24.59 MHz
Sweep 2.36 ms (601 pts)


Agilent

R T



Agilent


R T

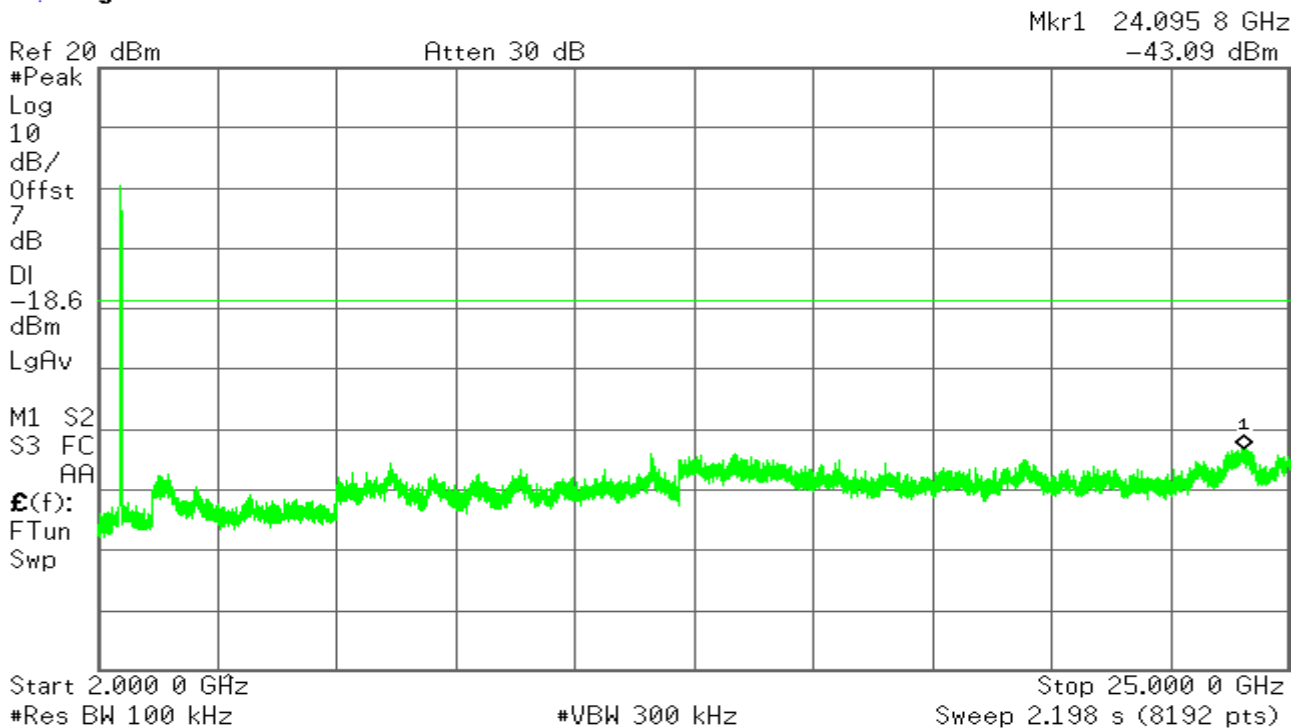

CH High

Agilent

R T

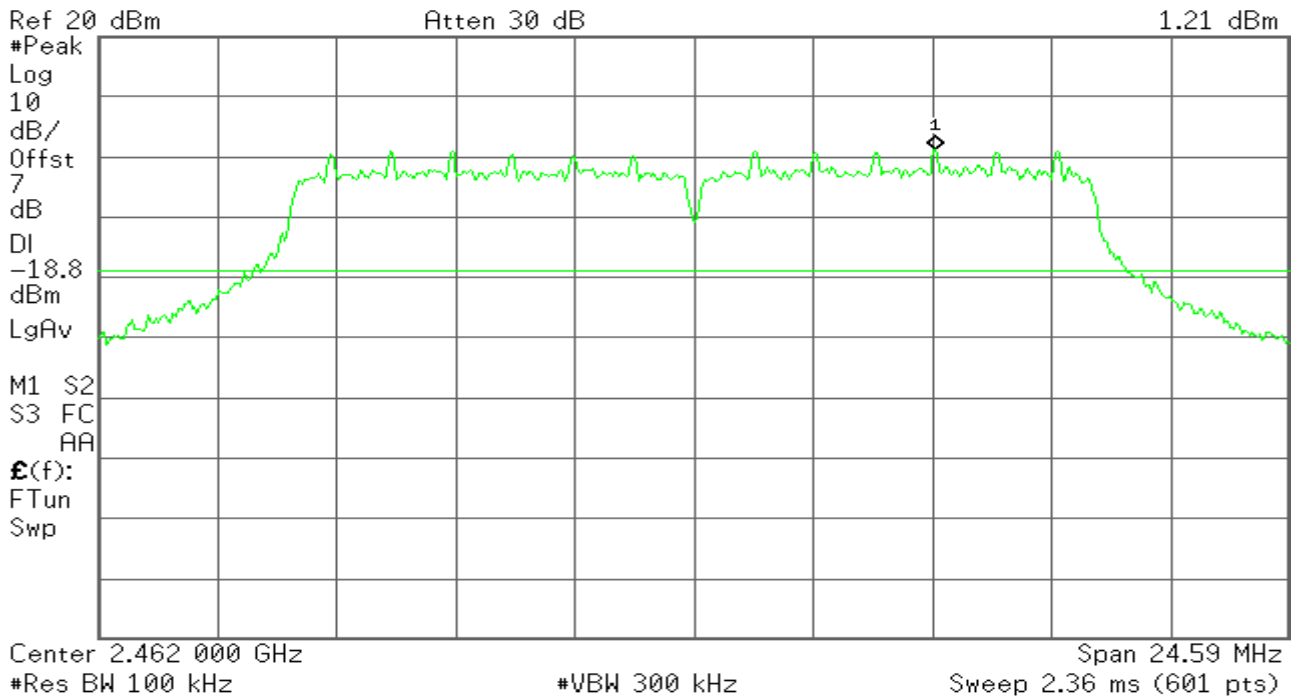

Agilent

R T



Agilent

R T

Mkr1 2.371 3 GHz
-52.57 dBm

Ref 20 dBm

Atten 30 dB

#Peak

Log

10

dB/

Offst

7

dB

DI

-18.8

dBm

LgAv

M1 S2


S3 FC

RA

£(f):

FTun

Swp

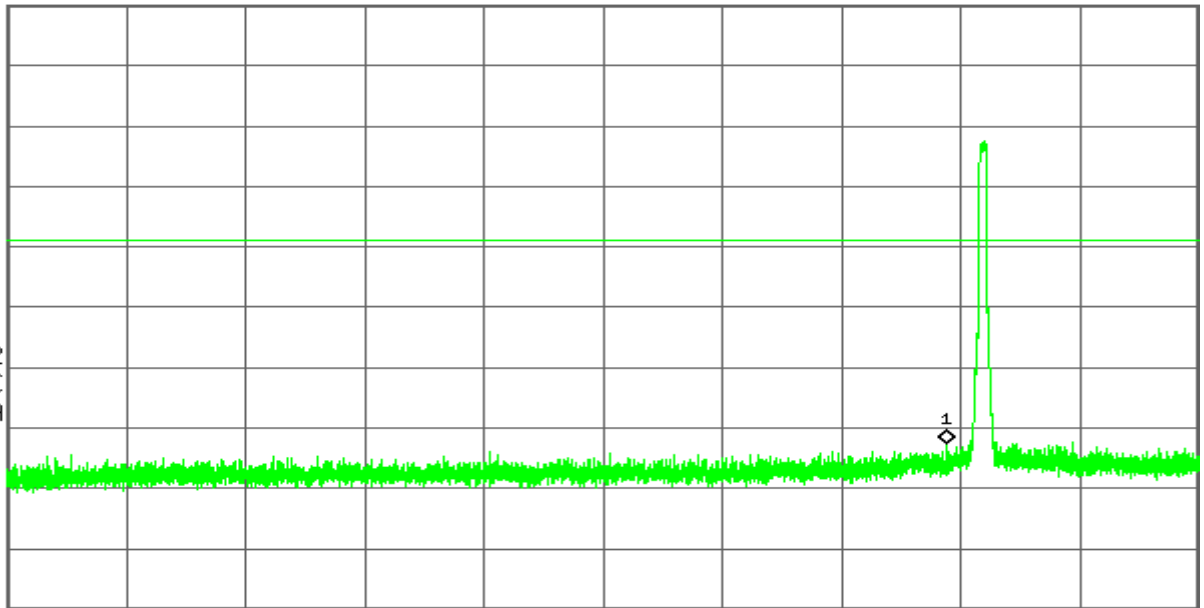

Start 30.0 MHz

Stop 3.000 0 GHz

#Res BW 100 kHz

#VBW 300 kHz

Sweep 284 ms (8192 pts)

Agilent

R T

Mkr1 24.118 3 GHz
-41.70 dBm

Ref 20 dBm

Atten 30 dB

#Peak

Log

10

dB/

Offst

7

dB

DI

-18.8

dBm

LgAv

M1 S2


S3 FC

RA

£(f):

FTun

Swp

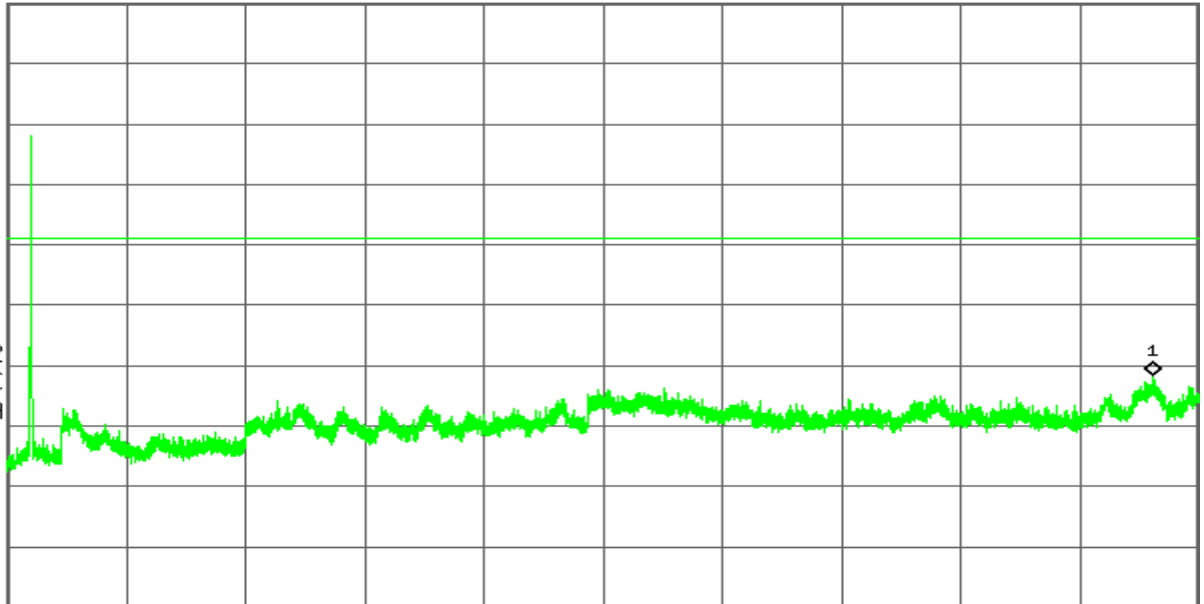

Start 2.000 0 GHz

Stop 25.000 0 GHz

#Res BW 100 kHz

#VBW 300 kHz

Sweep 2.198 s (8192 pts)

IEEE 802.11n HT20 mode / Chain 0

CH Low

Agilent

R T

Mkr1 2.417 00 GHz
0.16 dBm

Ref 20 dBm

Atten 30 dB

#Peak

Log

10

dB/

Offst

7

dB

DI

-19.8

dBm

LgAv

M1 S2


S3 FC

AA

$\mathcal{E}(f)$:

FTun

Swp

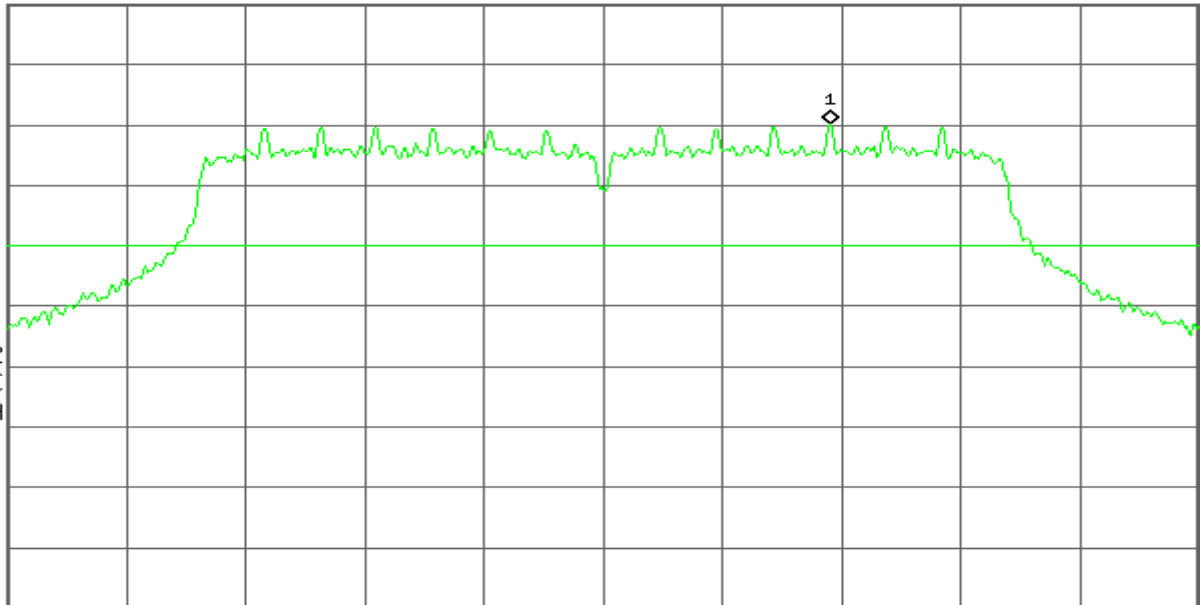

Center 2.412 00 GHz

#Res BW 100 kHz

#VBW 300 kHz

Span 26.33 MHz

Sweep 2.52 ms (601 pts)

Agilent

R T

Mkr1 2.400 000 GHz
-32.49 dBm

Ref 20 dBm

Atten 30 dB

#Peak

Log

10

dB/

Offst

7

dB

DI

-19.8

dBm

LgAv

M1 S2


S3 FC

AA

$\mathcal{E}(f)$:

FTun

Swp

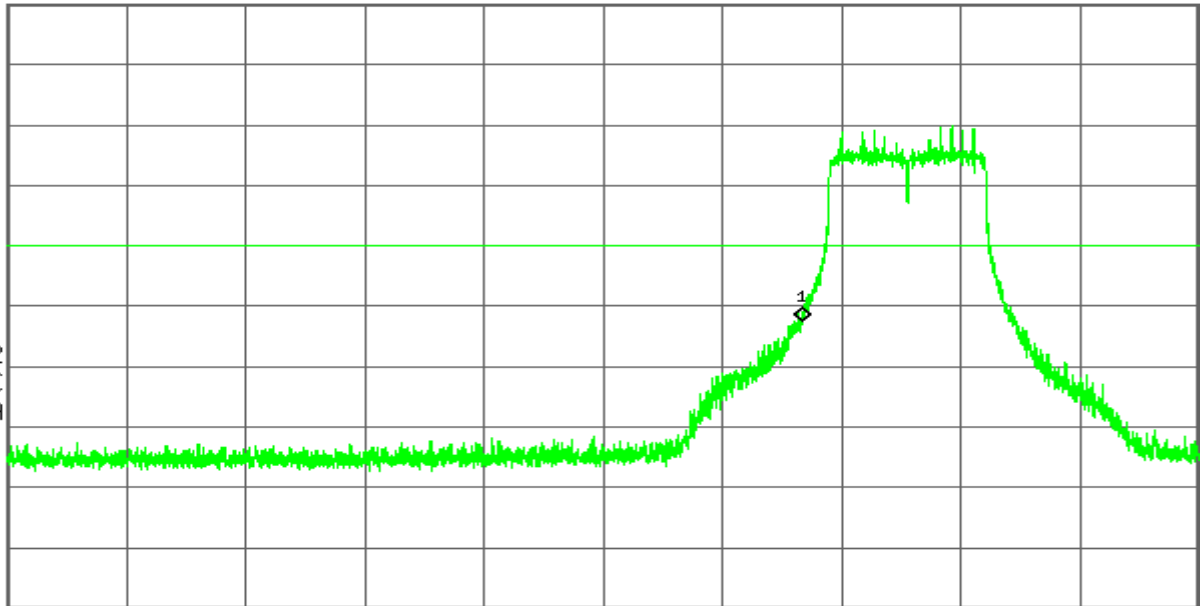

Start 2.310 000 GHz

#Res BW 100 kHz

#VBW 300 kHz

Stop 2.445 000 GHz

Sweep 13.11 ms (8192 pts)

Agilent

R T

Mkr1 1.608 0 GHz
-50.73 dBm

Ref 20 dBm

Atten 30 dB

#Peak

Log

10

dB/

Offst

7

dB

DI

-19.8

dBm

LgAv

M1 S2


S3 FC

RA

£(f):

FTun

Swp

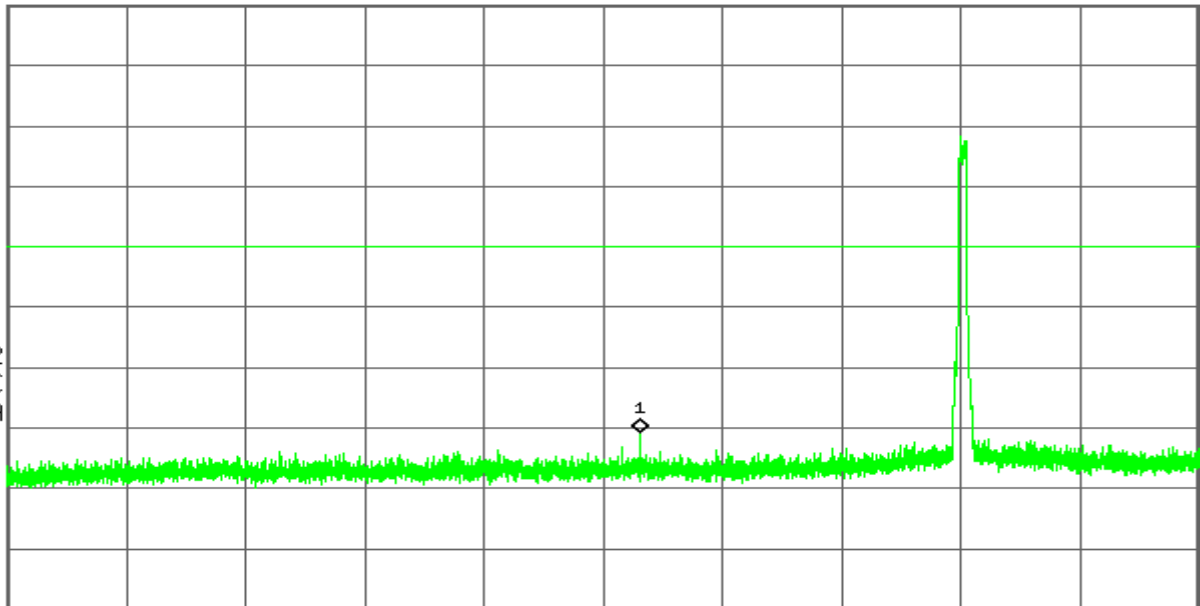

Start 30.0 MHz

#Res BW 100 kHz

#VBW 300 kHz

Stop 3.000 0 GHz

Sweep 284 ms (8192 pts)

Agilent

R T

Mkr1 24.101 5 GHz
-42.62 dBm

Ref 20 dBm

Atten 30 dB

#Peak

Log

10

dB/

Offst

7

dB

DI

-19.8

dBm

LgAv

M1 S2


S3 FC

RA

£(f):

FTun

Swp

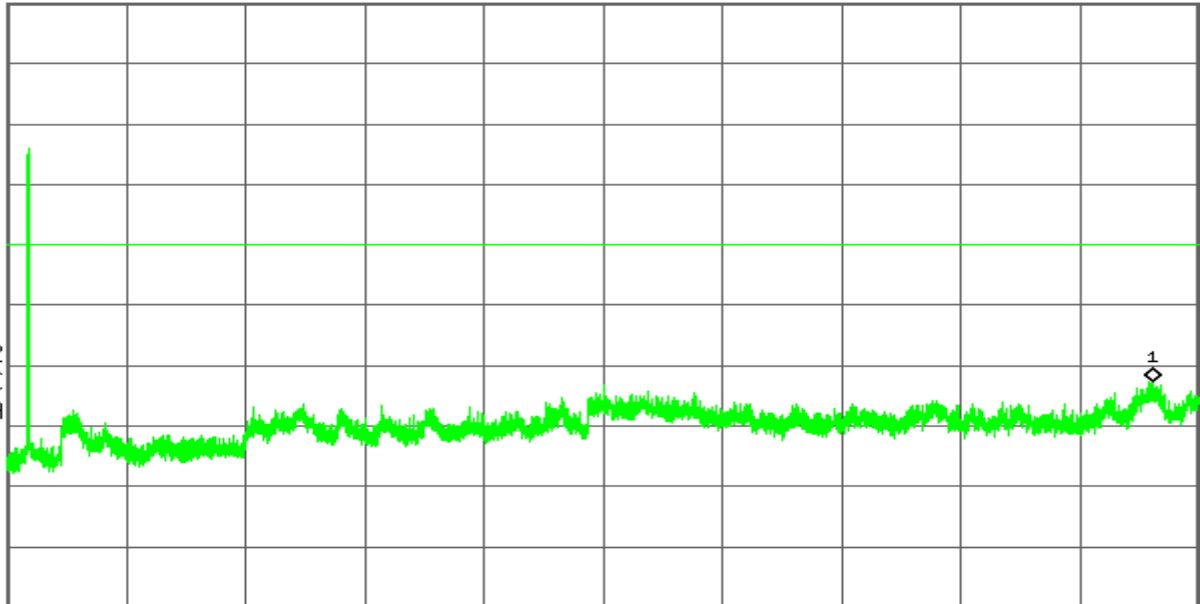

Start 2.000 0 GHz

#Res BW 100 kHz

#VBW 300 kHz

Stop 25.000 0 GHz

Sweep 2.198 s (8192 pts)

CH Mid

Agilent

R T

Mkr1 2.442 00 GHz
0.15 dBm

Ref 20 dBm

Atten 30 dB

#Peak

Log

10

dB/

Offst

7

dB

DI

-19.9

dBm

LgAv

M1 S2

S3 FC

AA

£(f):

FTun

Swp



Center 2.437 00 GHz

Span 26.33 MHz

#Res BW 100 kHz

#VBW 300 kHz

Sweep 2.52 ms (601 pts)

Agilent

R T

Mkr1 1.624 7 GHz
-51.02 dBm

Ref 20 dBm

Atten 30 dB

#Peak

Log

10

dB/

Offst

7

dB

DI

-19.9

dBm

LgAv

M1 S2


S3 FC

AA

£(f):

FTun

Swp

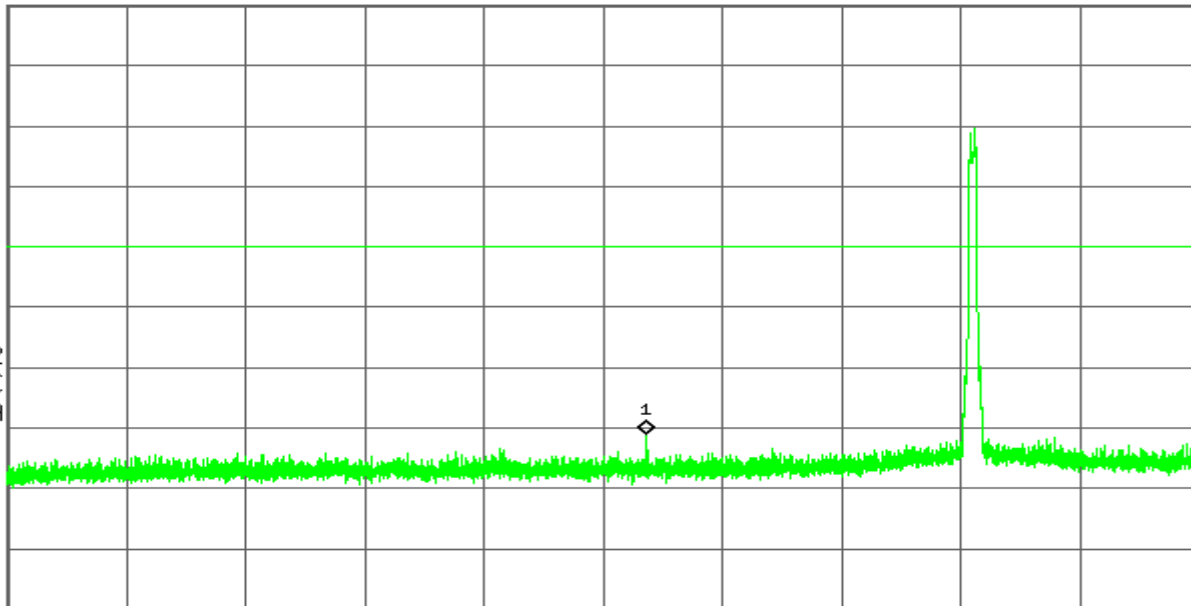

Start 30.00 MHz

Stop 3.000 00 GHz

#Res BW 100 kHz

#VBW 300 kHz


Sweep 284 ms (8192 pts)

Agilent

R T

Mkr1 24.050 9 GHz
-42.54 dBm

Ref 20 dBm Atten 30 dB

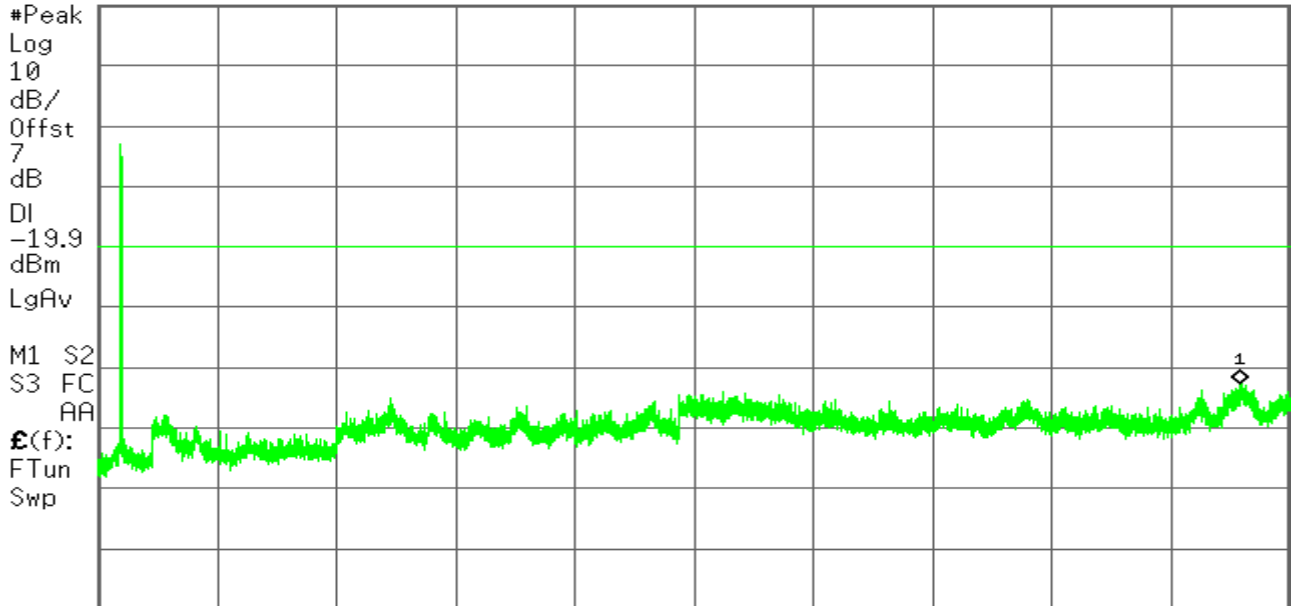

Start 2.000 0 GHz Stop 25.000 0 GHz
#Res BW 100 kHz #VBW 300 kHz Sweep 2.198 s (8192 pts)


CH High

Agilent

R T

Mkr1 2.467 00 GHz
0.26 dBm

Ref 20 dBm Atten 30 dB

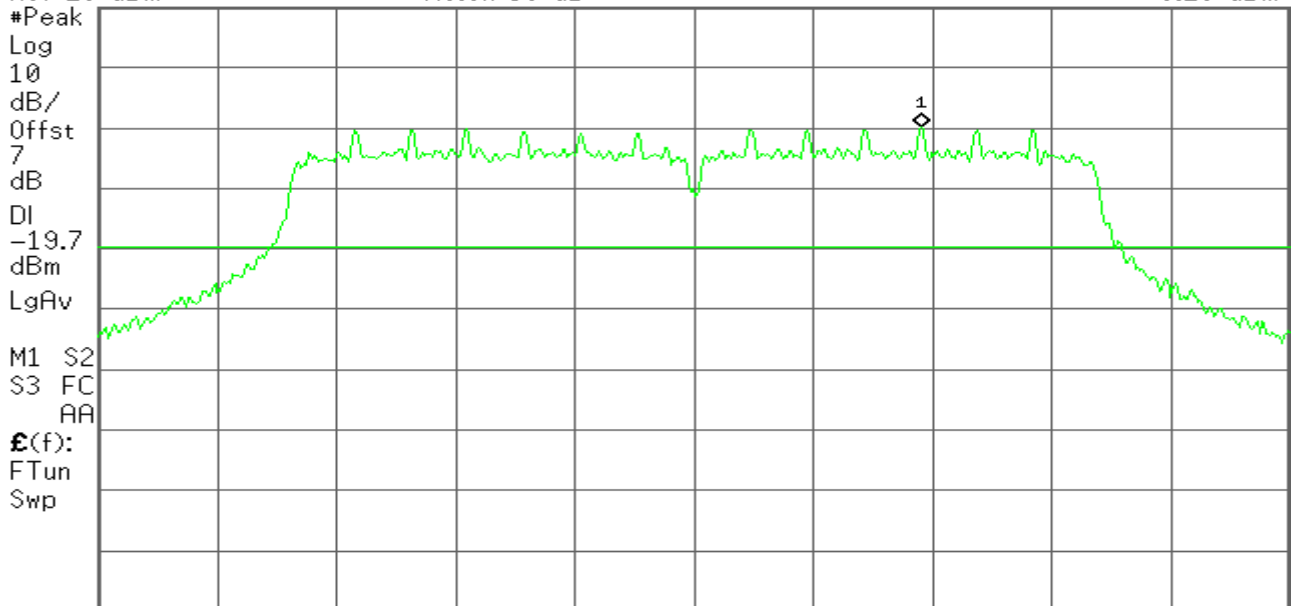

Center 2.462 000 GHz Span 26.33 MHz
#Res BW 100 kHz #VBW 300 kHz Sweep 2.52 ms (601 pts)

Agilent

R T


Mkr1 2.483 500 GHz
-47.58 dBm

Ref 20 dBm

Atten 30 dB

#Peak
Log
10
dB/
Offst
7
dB
DI
-19.7
dBm
LgAv

M1 S2
S3 FC
AA
E(f):
FTun
Swp

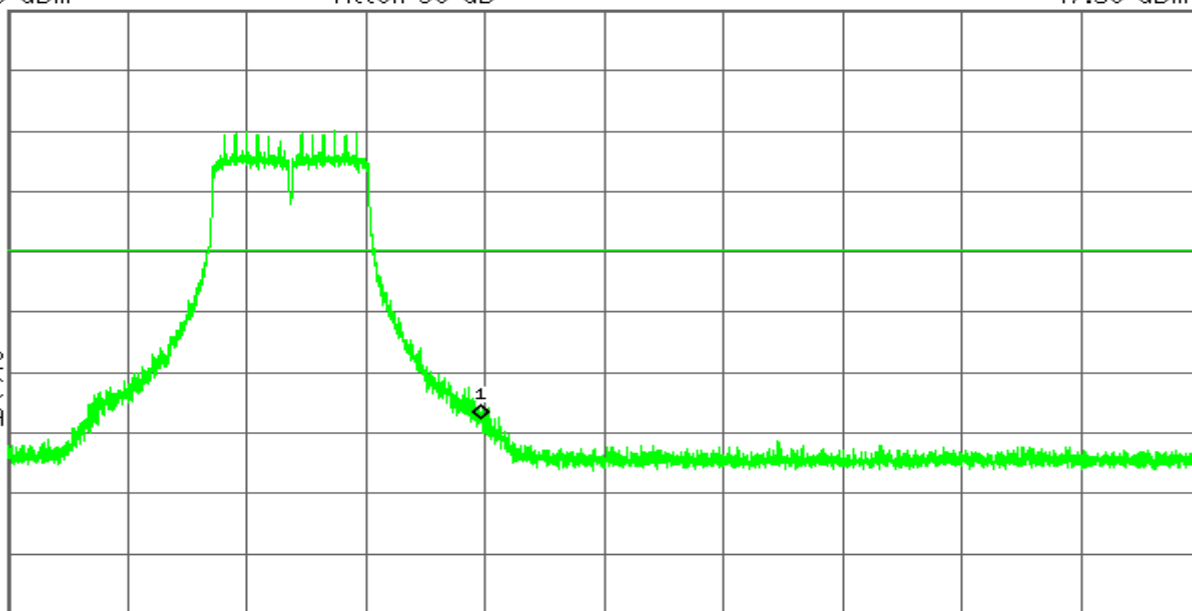

Start 2.430 000 GHz

Stop 2.565 000 GHz

#Res BW 100 kHz

#VBW 300 kHz

Sweep 13.11 ms (8192 pts)

Agilent

R T


Mkr1 1.641 4 GHz
-51.62 dBm

Ref 20 dBm

Atten 30 dB

#Peak
Log
10
dB/
Offst
7
dB
DI
-19.7
dBm
LgAv

M1 S2
S3 FC
AA
E(f):
FTun
Swp

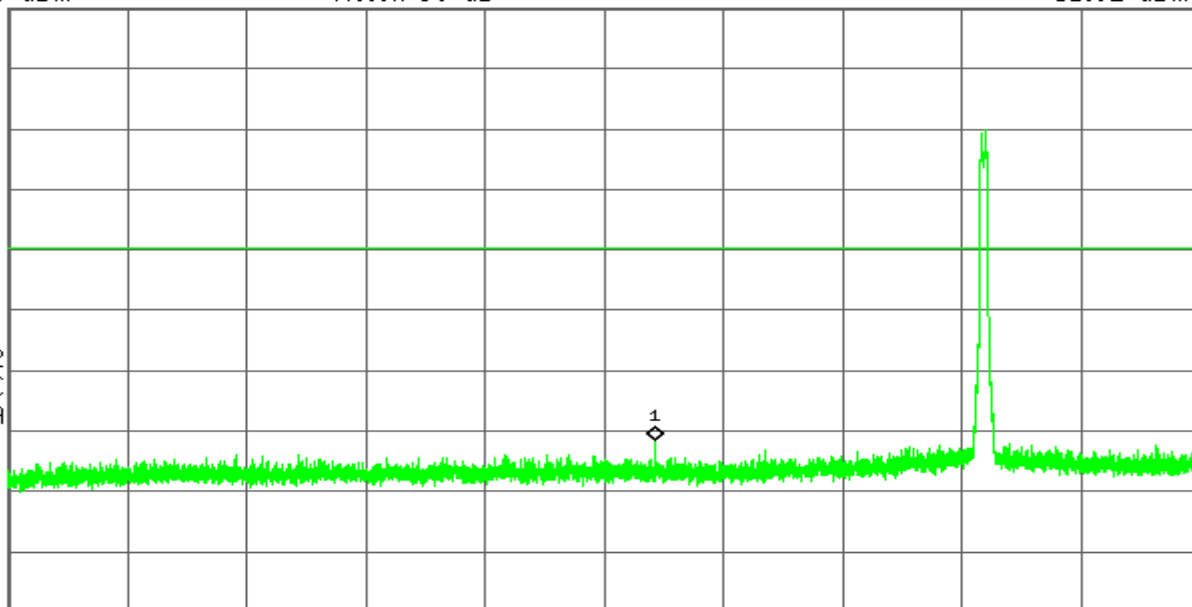

Start 30.0 MHz

Stop 3.000 0 GHz

#Res BW 100 kHz

#VBW 300 kHz


Sweep 284 ms (8192 pts)

Agilent

R T

Mkr1 24.034 1 GHz
-41.95 dBm

Ref 20 dBm Atten 30 dB

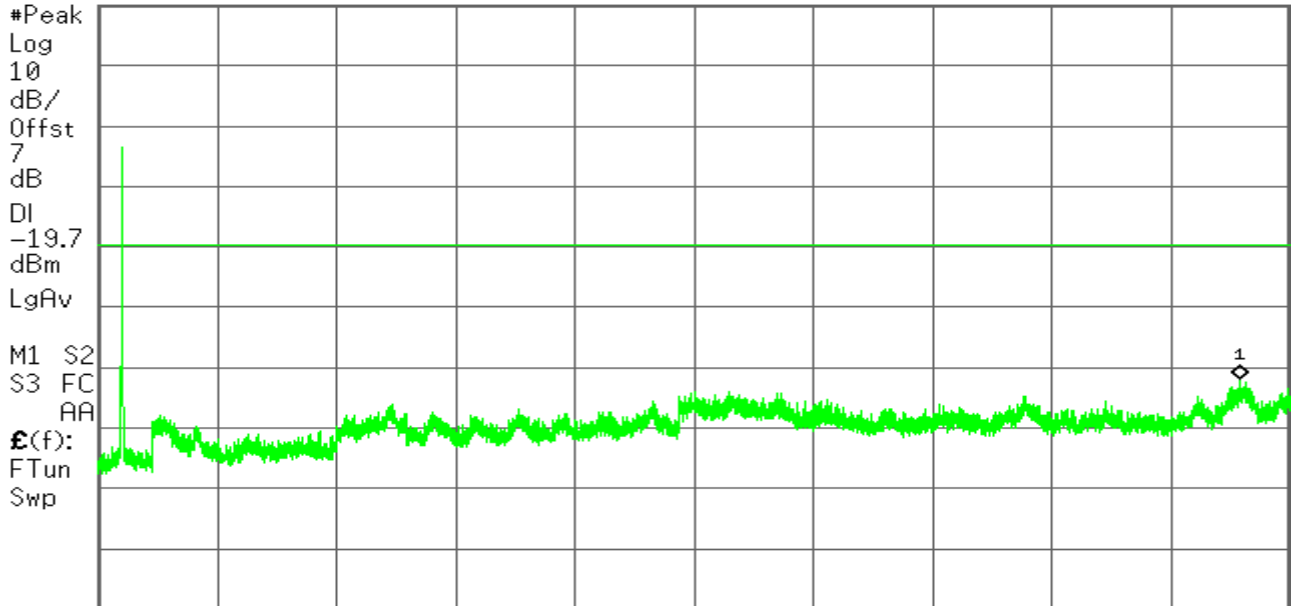

Start 2.000 0 GHz Stop 25.000 0 GHz
#Res BW 100 kHz #VBW 300 kHz Sweep 2.198 s (8192 pts)

IEEE 802.11n HT20 mode / Chain 1


CH Low

Agilent

R T

Mkr1 2.418 28 GHz
0.11 dBm

Ref 20 dBm Atten 30 dB

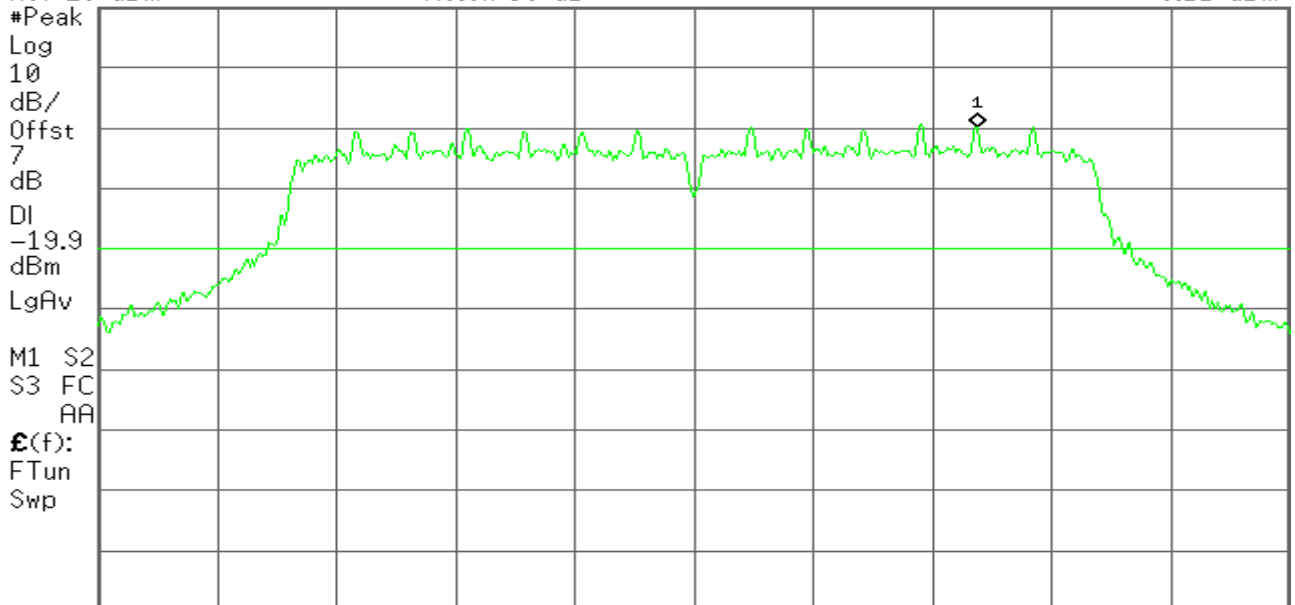

Center 2.412 00 GHz Span 26.37 MHz
#Res BW 100 kHz #VBW 300 kHz Sweep 2.52 ms (601 pts)

Agilent


R T

Ref 20 dBm

Atten 30 dB

Mkr1 2.400 000 GHz
-31.00 dBm

#Peak
Log
10
dB/
Offst
7
dB
DI
-19.9
dBm
LgAv
M1 S2
S3 FC
AA
£(f):
FTun
Swp

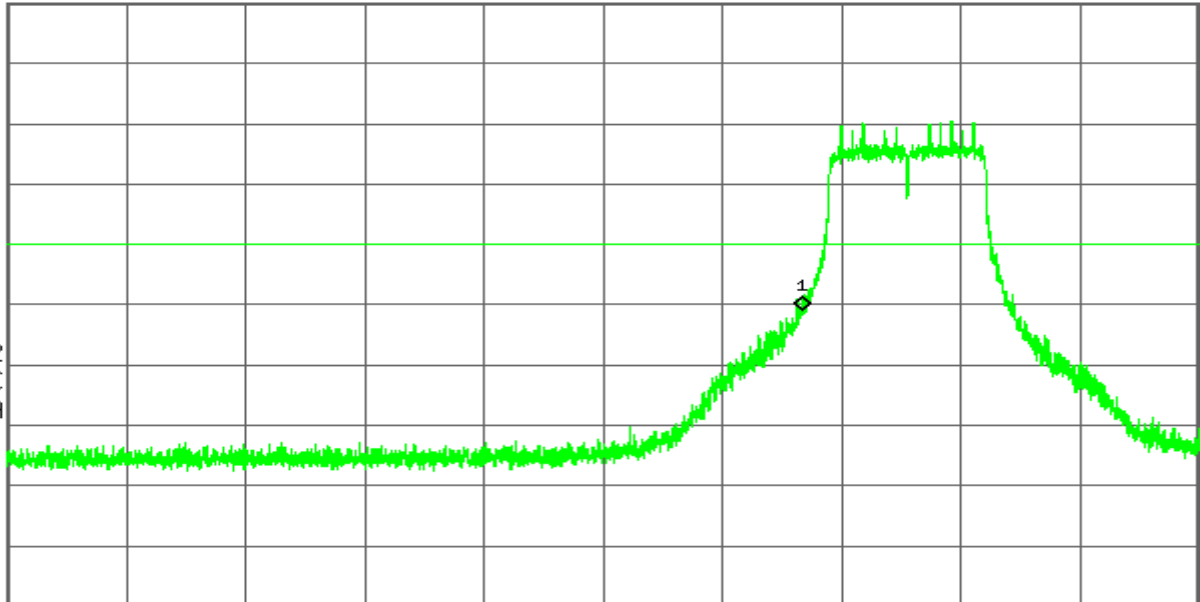

Start 2.310 000 GHz

Stop 2.445 000 GHz

#Res BW 100 kHz

#VBW 300 kHz

Sweep 13.11 ms (8192 pts)

Agilent


R T

Ref 20 dBm

Atten 30 dB

Mkr1 714.6 MHz
-54.03 dBm

#Peak
Log
10
dB/
Offst
7
dB
DI
-19.9
dBm
LgAv
M1 S2
S3 FC
AA
£(f):
FTun
Swp

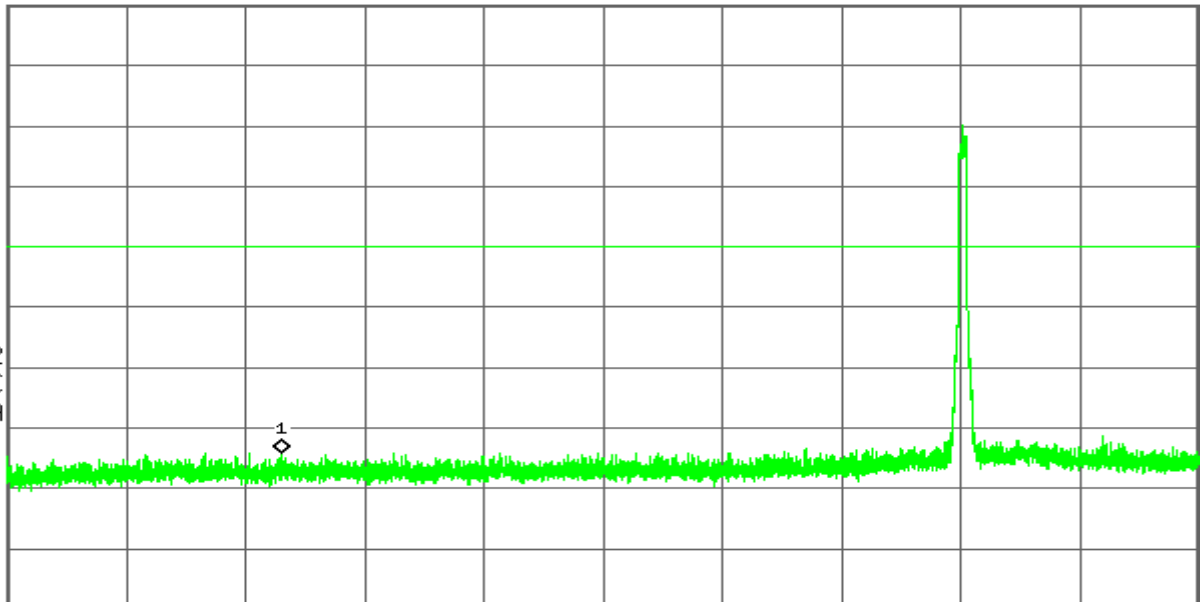

Start 30.0 MHz

Stop 3.000 0 GHz

#Res BW 100 kHz

#VBW 300 kHz


Sweep 284 ms (8192 pts)

Agilent

R T

Mkr1 24.081 8 GHz
-42.11 dBm

Ref 20 dBm Atten 30 dB

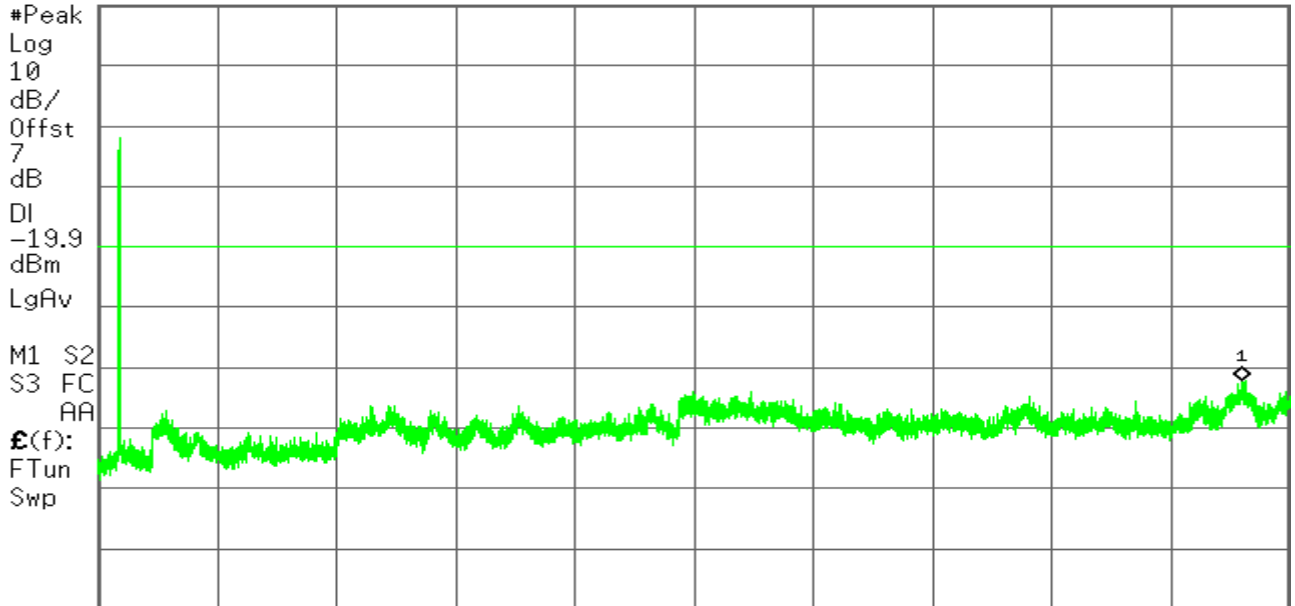

Start 2.000 0 GHz Stop 25.000 0 GHz
#Res BW 100 kHz #VBW 300 kHz Sweep 2.198 s (8192 pts)


CH Mid

Agilent

R T

Mkr1 2.442 01 GHz
-0.02 dBm


Ref 20 dBm Atten 30 dB

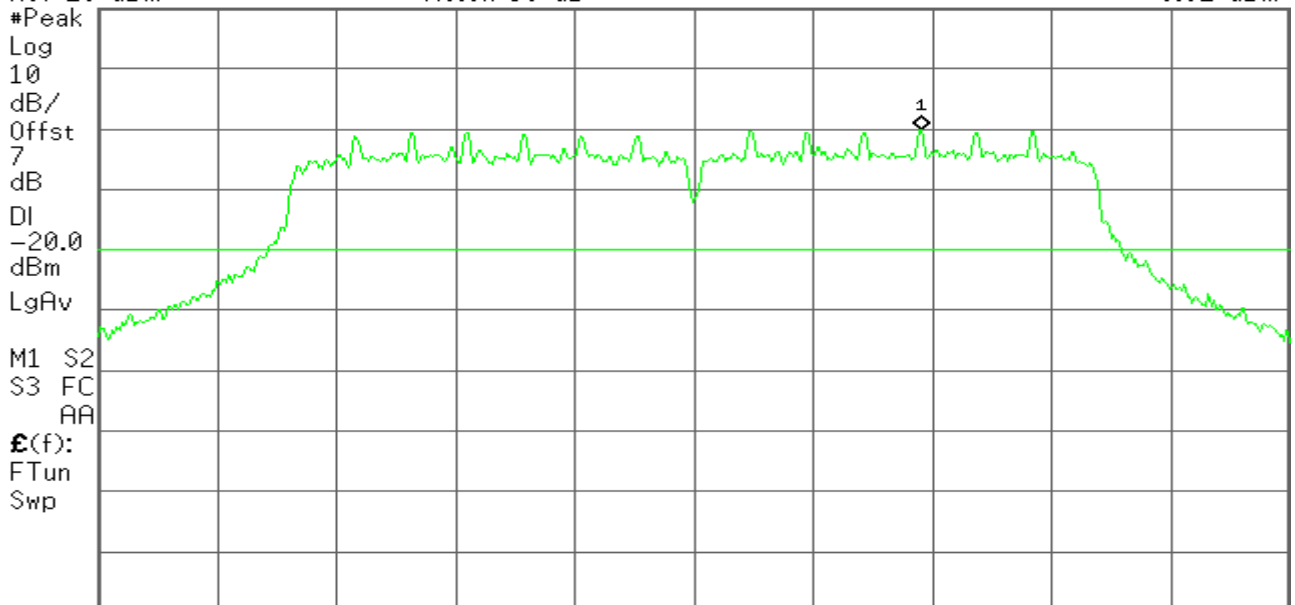

Center 2.437 000 GHz Span 26.37 MHz
#Res BW 100 kHz #VBW 300 kHz Sweep 2.52 ms (601 pts)

Agilent

R T

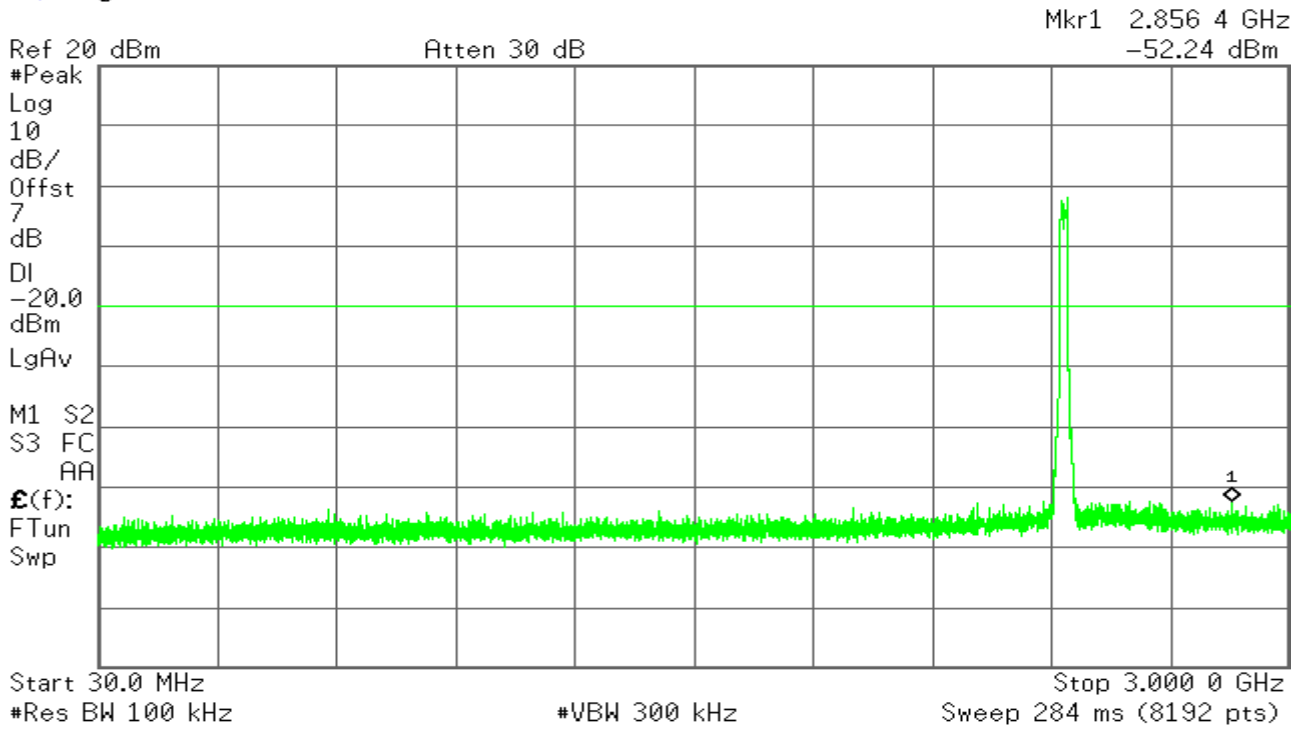

Agilent

R T




CH High

Agilent

R T

Mkr1 2.467 01 GHz
0.18 dBm

Ref 20 dBm Atten 30 dB

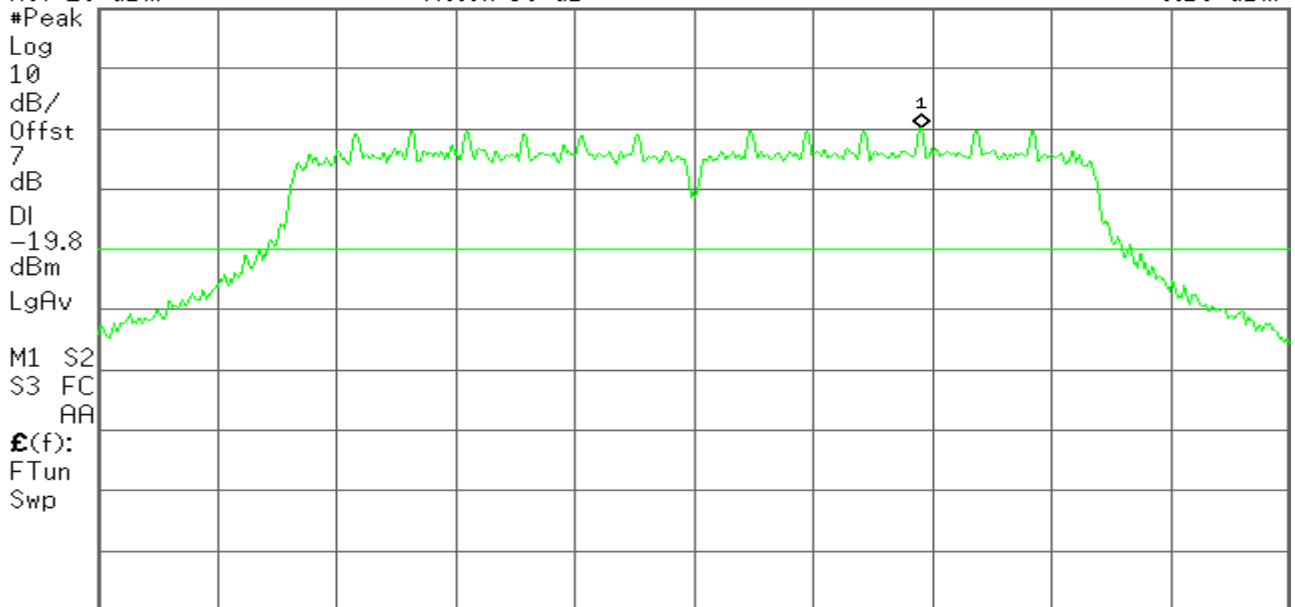


Center 2.462 000 GHz Span 26.37 MHz
#Res BW 100 kHz #VBW 300 kHz #Sweep 3.28 ms (601 pts)

Agilent

R T

Mkr1 2.483 500 GHz
-42.52 dBm

Ref 20 dBm Atten 30 dB

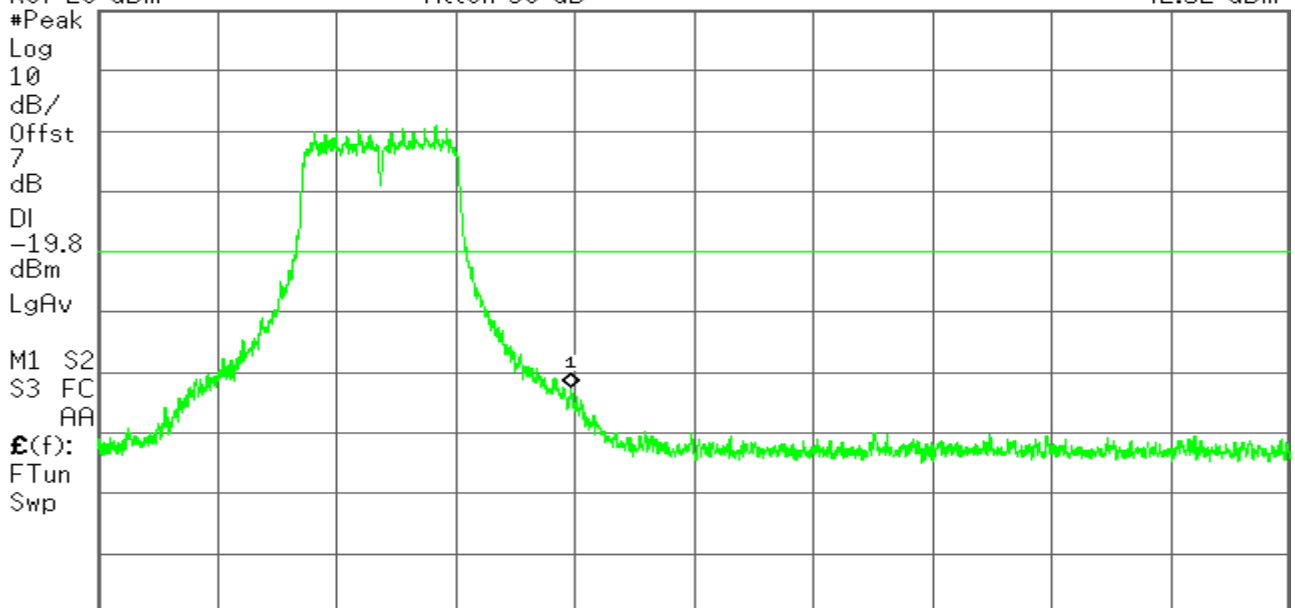

Start 2.430 000 GHz Stop 2.565 000 GHz
#Res BW 100 kHz #VBW 300 kHz Sweep 13.11 ms (8192 pts)

Agilent

R T

Mkr1 1.237 4 GHz
-53.78 dBm

Ref 20 dBm

Atten 30 dB

#Peak

Log

10

dB/

Offst

7

dB

DI

-19.8

dBm

LgAv

M1 S2


S3 FC

AA

E(f):

FTun

Swp

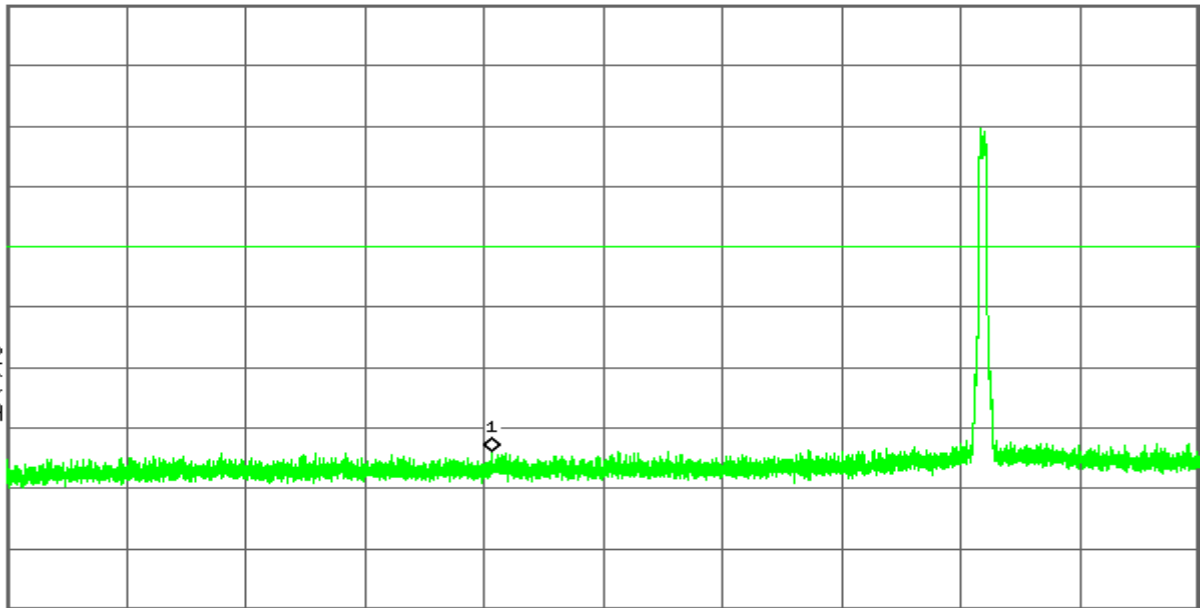

Start 30.0 MHz

#Res BW 100 kHz

#VBW 300 kHz

Stop 3.000 0 GHz

Sweep 284 ms (8192 pts)

Agilent

R T

Mkr1 24.053 7 GHz
-41.99 dBm

Ref 20 dBm

Atten 30 dB

#Peak

Log

10

dB/

Offst

7

dB

DI

-19.8

dBm

LgAv

M1 S2


S3 FC

AA

E(f):

FTun

Swp

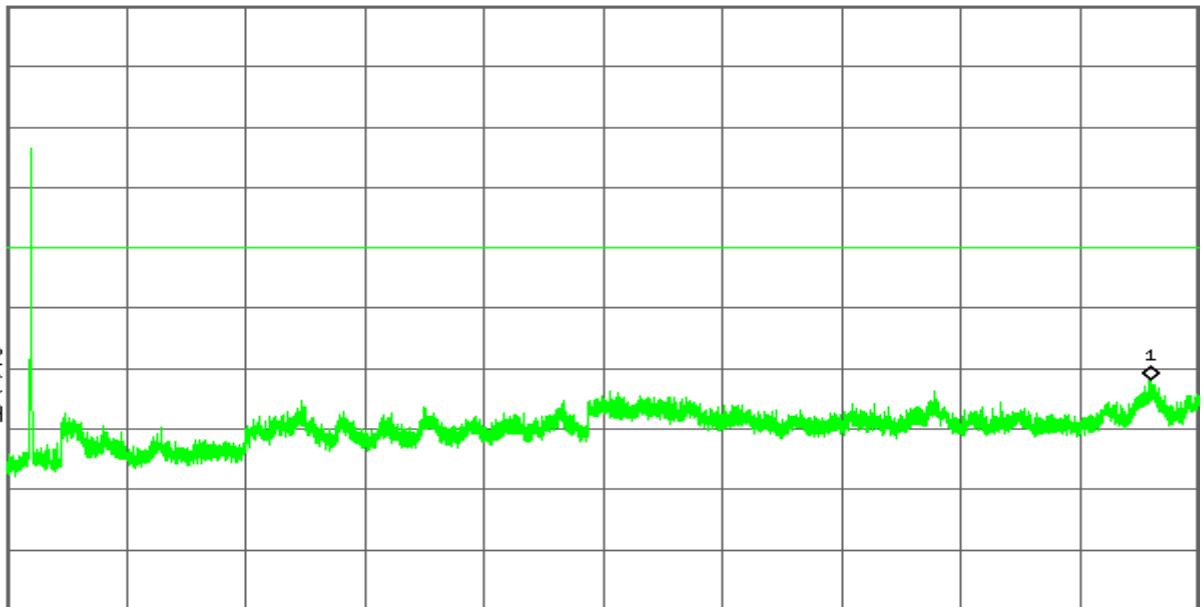

Start 2.000 0 GHz

#Res BW 100 kHz

#VBW 300 kHz

Stop 25.000 0 GHz

Sweep 2.198 s (8192 pts)

4.6.RADIATED EMISSIONS

LIMIT

Radiated emissions from 9 kHz to 25 GHz were measured according to the methods defines in ANSI C63.10-2013. The EUT was placed above the ground plane, 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz. The interface cables and equipment positions were varied within limits of reasonable applications to determine the positions producing maximum radiated emissions

1. According to §15.209(a), except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:



FREQUENCIES(MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE(meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3


Remark: Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

2.In the emission table above, the tighter limit applies at the band edges.

Frequency (MHz)	Field Strength (μ V/m at 3-meter)	Field Strength (dB μ V/m at 3-meter)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

Test Configuration

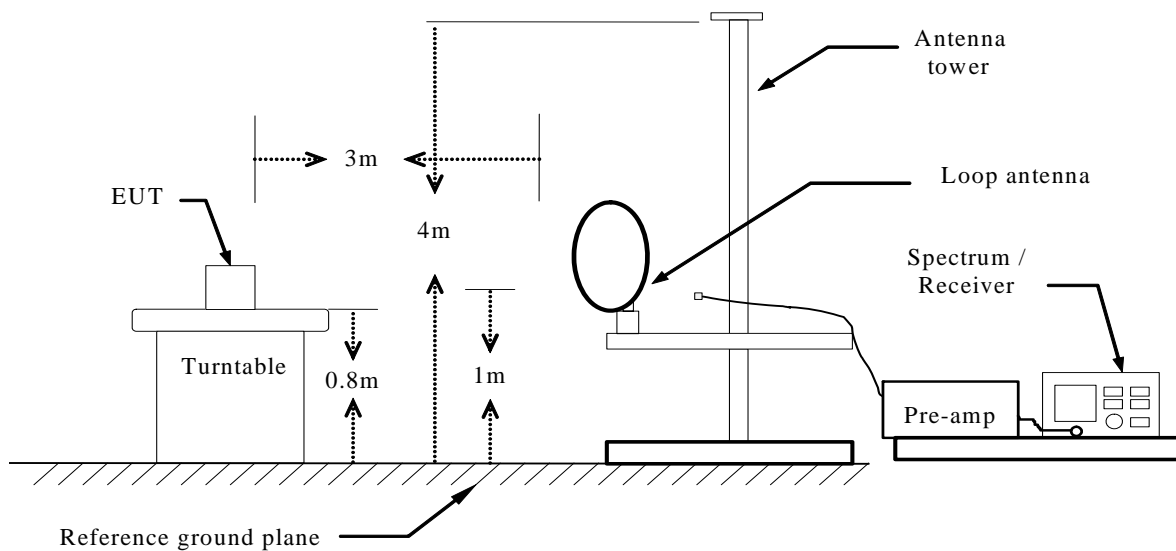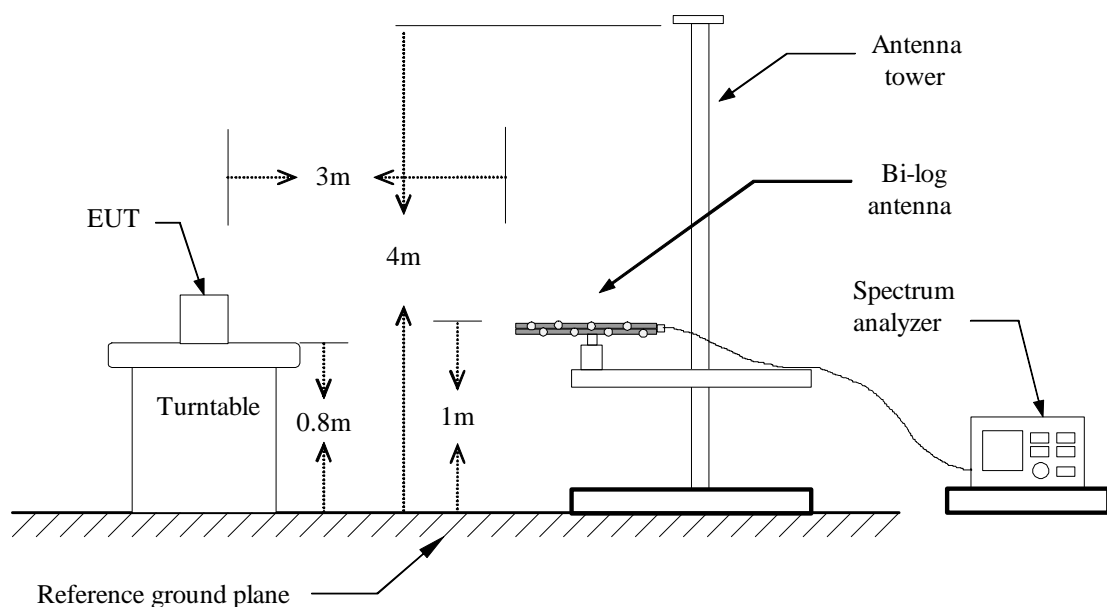Below 30MHz**Below 1 GHz**

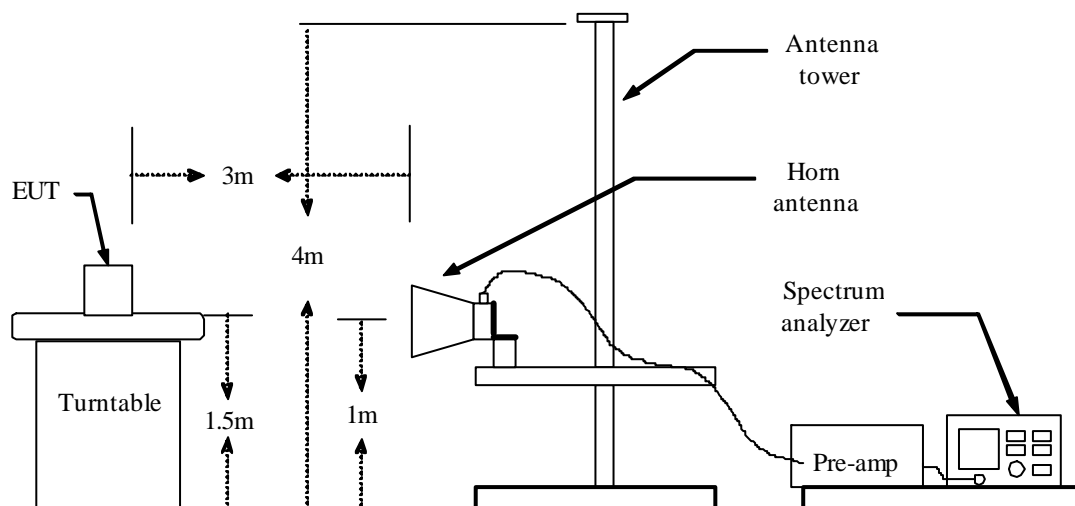Above 1 GHz**TEST PROCEDURE**

1. The EUT is placed on a turntable above ground plane, which is 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Set the spectrum analyzer in the following setting as:

Below 1GHz:

RBW=100kHz / VBW=300kHz / Sweep=AUTO

Above 1GHz:

PEAK: RBW=VBW=1MHz / Sweep=AUTO


AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO

7. Repeat above procedures until the measurements for all frequencies are complete.

TEST RESULTS

RESTRICTED BANDEDGE (b Mode, Low Channel, Horizontal)


120.0 dBuV/m

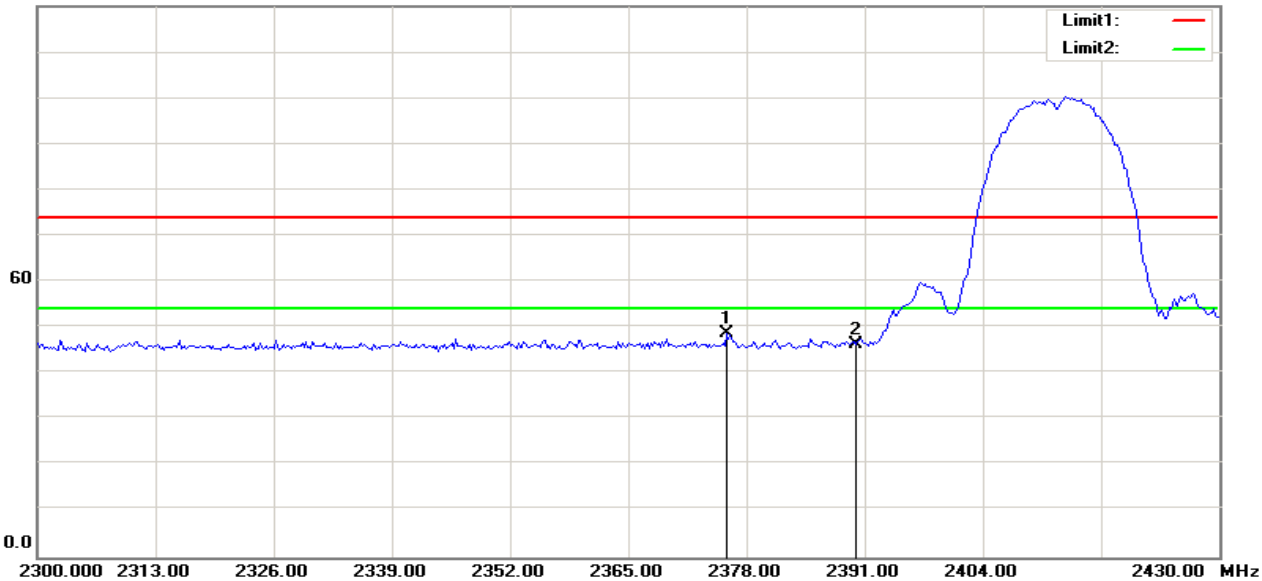

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	2375.833	57.24	-8.51	48.73	74.00	-25.27	100	201	peak
2	2390.000	54.72	-8.49	46.23	74.00	-27.77	100	300	peak

RESTRICTED BANDEDGE (b Mode, Low Channel, Vertical)


120.0 dBuV/m

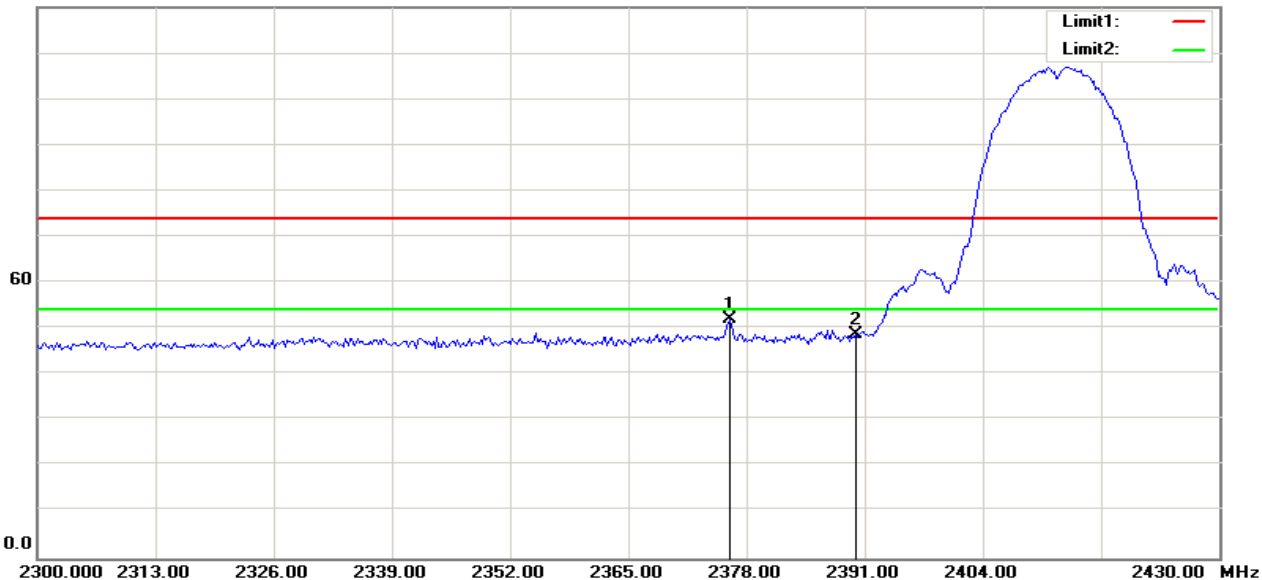

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	2376.250	60.68	-8.51	52.17	74.00	-21.83	100	149	peak
2	2390.000	57.35	-8.49	48.86	74.00	-25.14	100	317	peak

RESTRICTED BANDEDGE (b Mode, High Channel, Horizontal)


120.0 dBuV/m

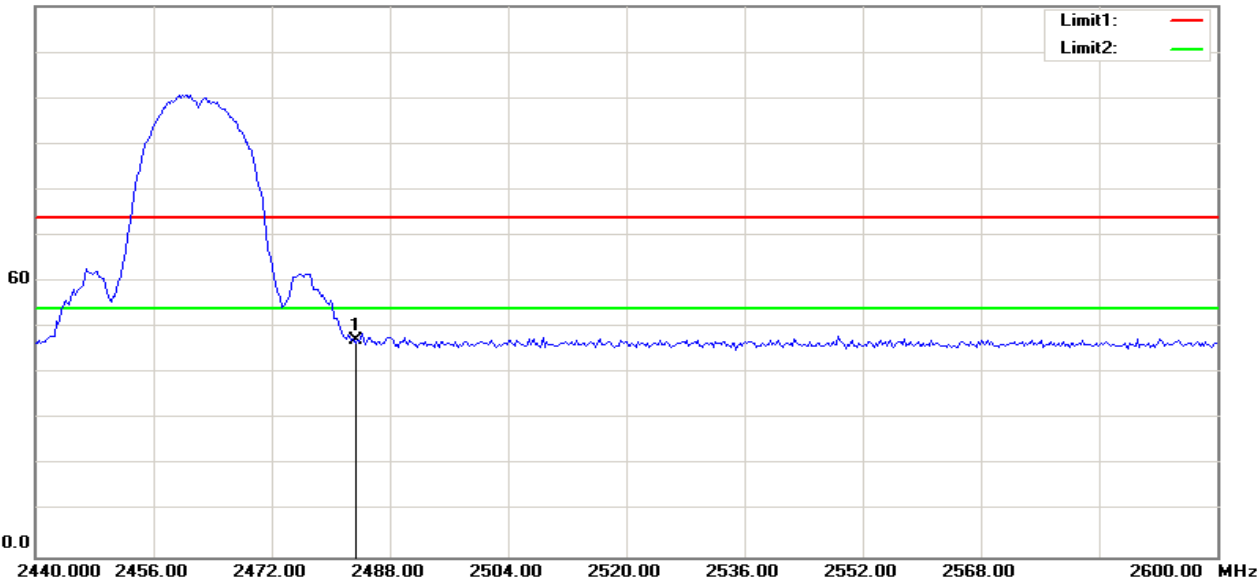

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	2483.500	55.68	-8.30	47.38	74.00	-26.62	100	325	peak

RESTRICTED BANDEDGE (b Mode, High Channel, Vertical)


120.0 dBuV/m

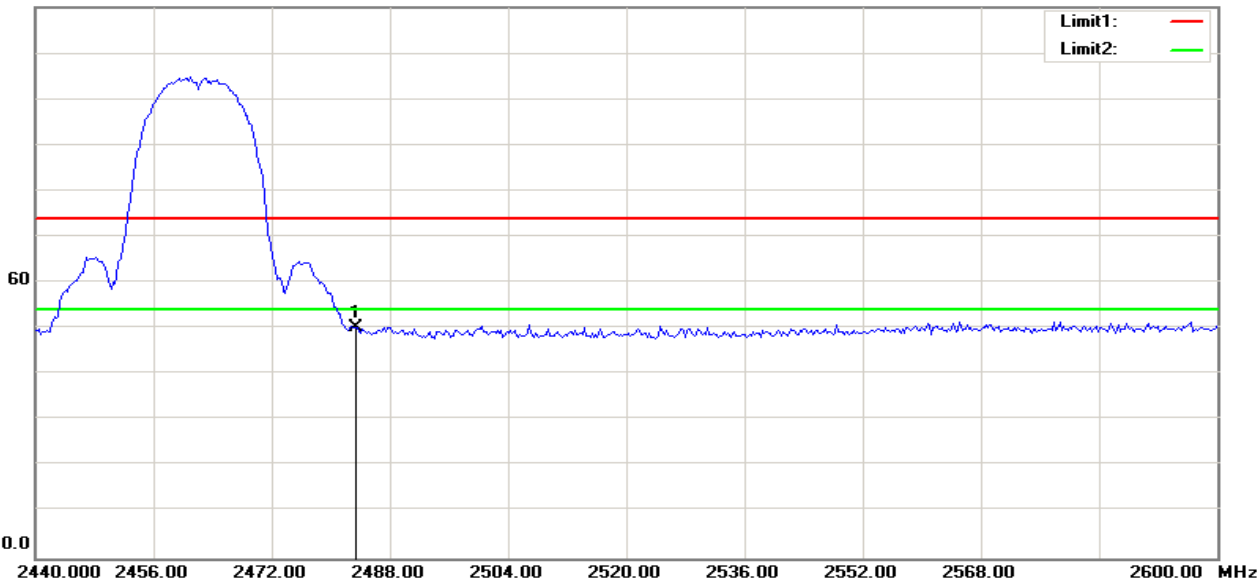

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	2483.500	58.62	-8.30	50.32	74.00	-23.68	100	256	peak

RESTRICTED BANDEDGE (g Mode, Low Channel, Horizontal)


120.0 dBuV/m

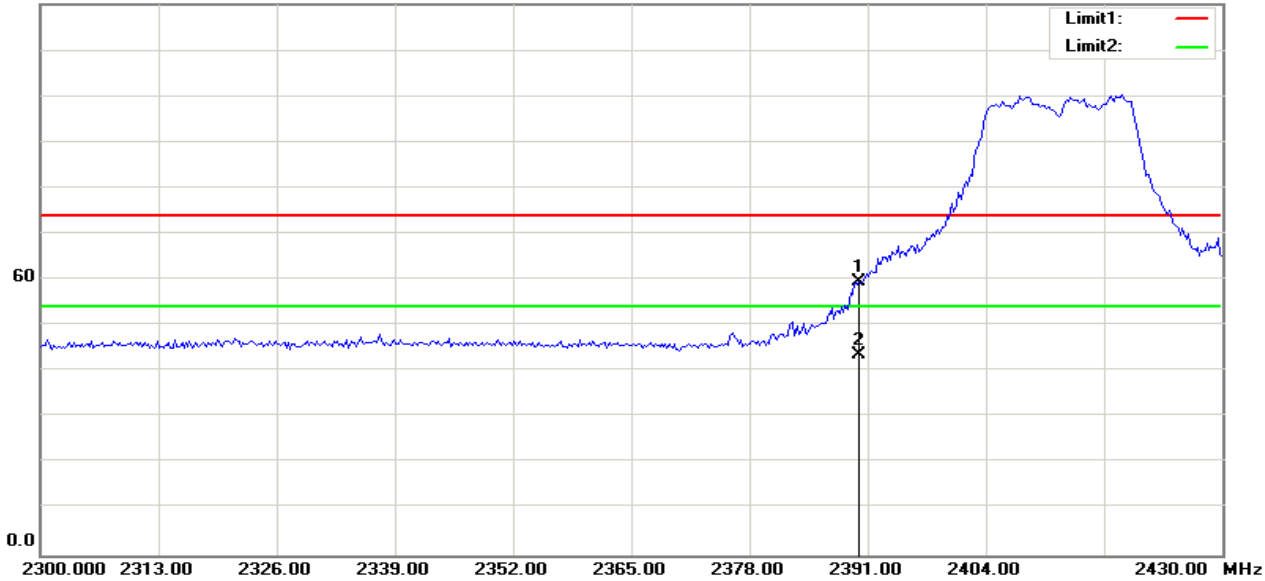

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	2390.000	68.07	-8.49	59.58	74.00	-14.42	100	201	peak
2	2390.000	52.05	-8.49	43.56	54.00	-10.44	100	201	AVG

RESTRICTED BANDEDGE (g Mode, Low Channel, Vertical)

120.0 dBuV/m

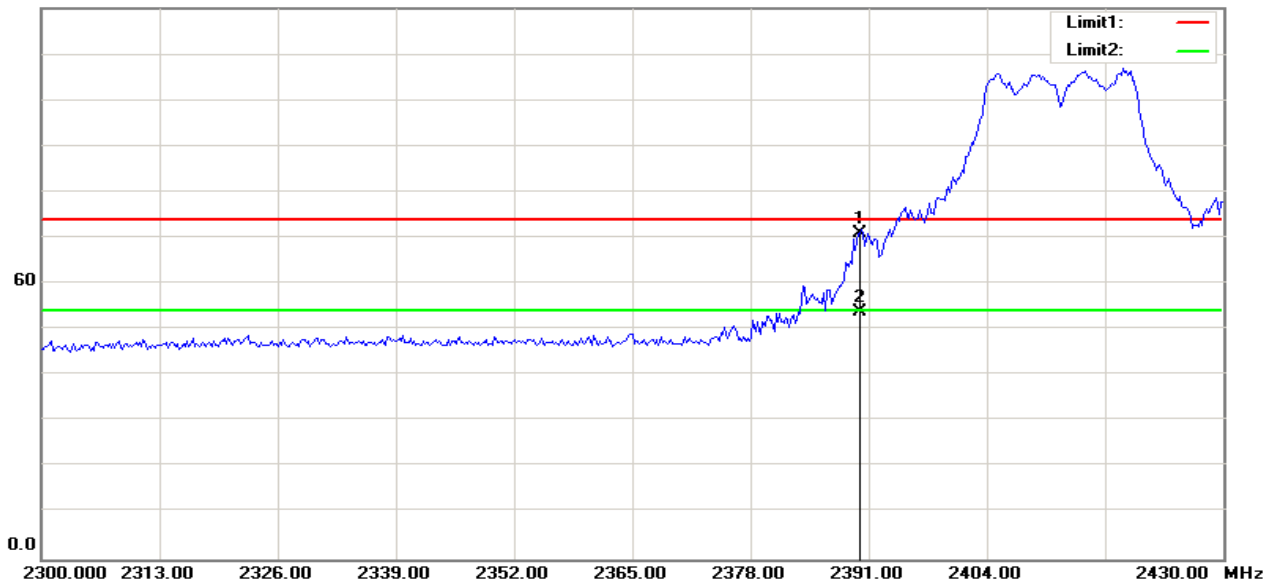

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	2390.000	79.59	-8.49	71.10	74.00	-2.90	100	45	peak
2	2390.000	62.20	-8.49	53.71	54.00	-0.29	100	45	AVG

RESTRICTED BANDEDGE (g Mode, High Channel, Horizontal)


120.0 dBuV/m



No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	2483.500	66.89	-8.30	58.59	74.00	-15.41	100	323	peak
2	2483.500	54.01	-8.30	45.71	54.00	-8.29	100	323	AVG
3	2483.846	69.49	-8.30	61.19	74.00	-12.81	100	37	peak
4	2483.846	53.36	-8.30	45.06	54.00	-8.94	100	37	AVG

RESTRICTED BANDEDGE (g Mode, High Channel, Vertical)


120.0 dBuV/m

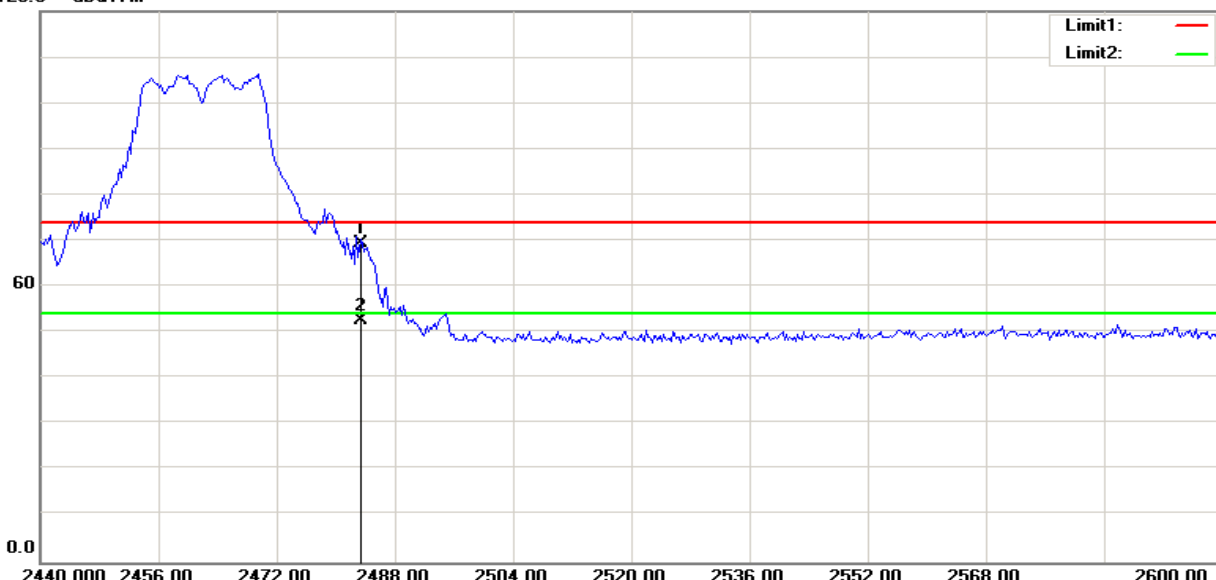

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	2483.500	77.78	-8.30	69.48	74.00	-4.52	100	0	peak
2	2483.500	60.86	-8.30	52.56	54.00	-1.44	100	0	AVG

RESTRICTED BANDEDGE (IEEE 802.11n HT20 mode, Low Channel, Horizontal)


120.0 dBuV/m

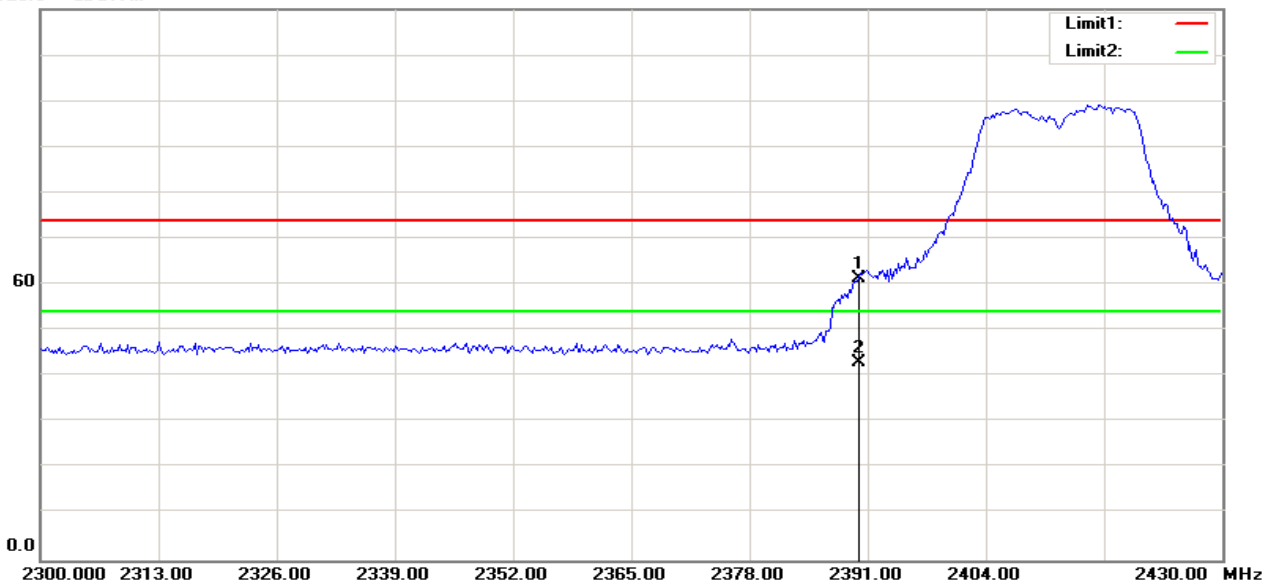

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	2390.000	69.89	-8.49	61.40	74.00	-12.60	100	360	peak
2	2390.000	51.40	-8.49	42.91	54.00	-11.09	100	360	AVG

RESTRICTED BANDEDGE (IEEE 802.11n HT20 mode, Low Channel, Vertical)


120.0 dBuV/m

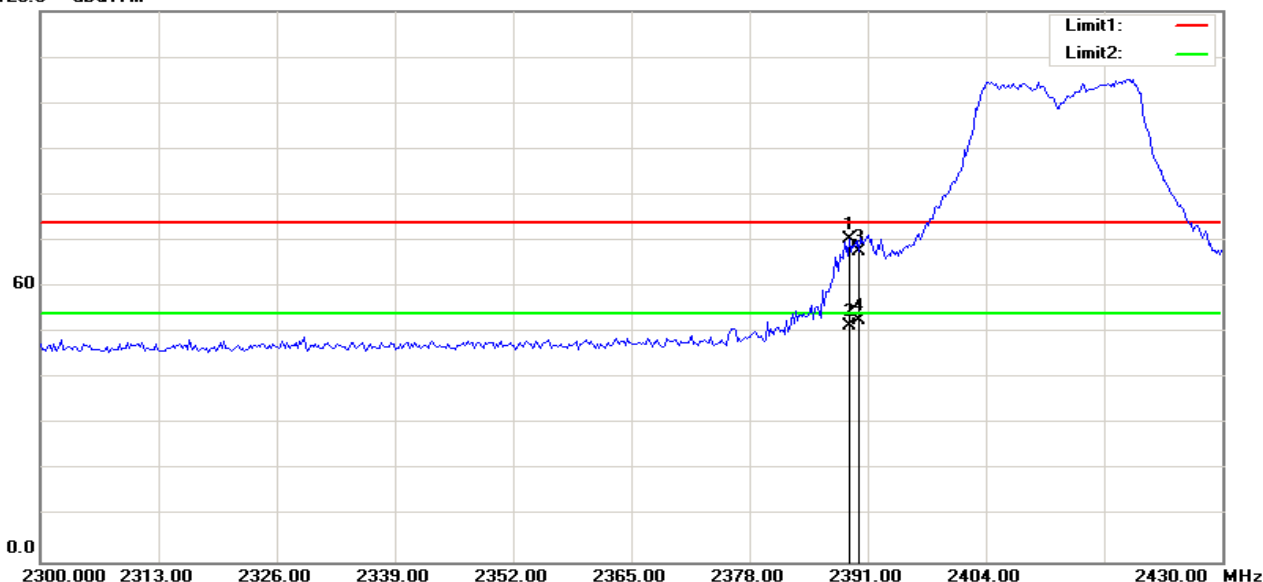

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	2388.958	78.98	-8.49	70.49	74.00	-3.51	100	72	peak
2	2388.958	59.84	-8.49	51.35	54.00	-2.65	100	72	AVG
3	2390.000	76.18	-8.49	67.69	74.00	-6.31	100	220	peak
4	2390.000	61.21	-8.49	52.72	54.00	-1.28	100	220	AVG

RESTRICTED BANDEDGE (IEEE 802.11n HT20 mode, High Channel, Horizontal)


120.0 dBuV/m

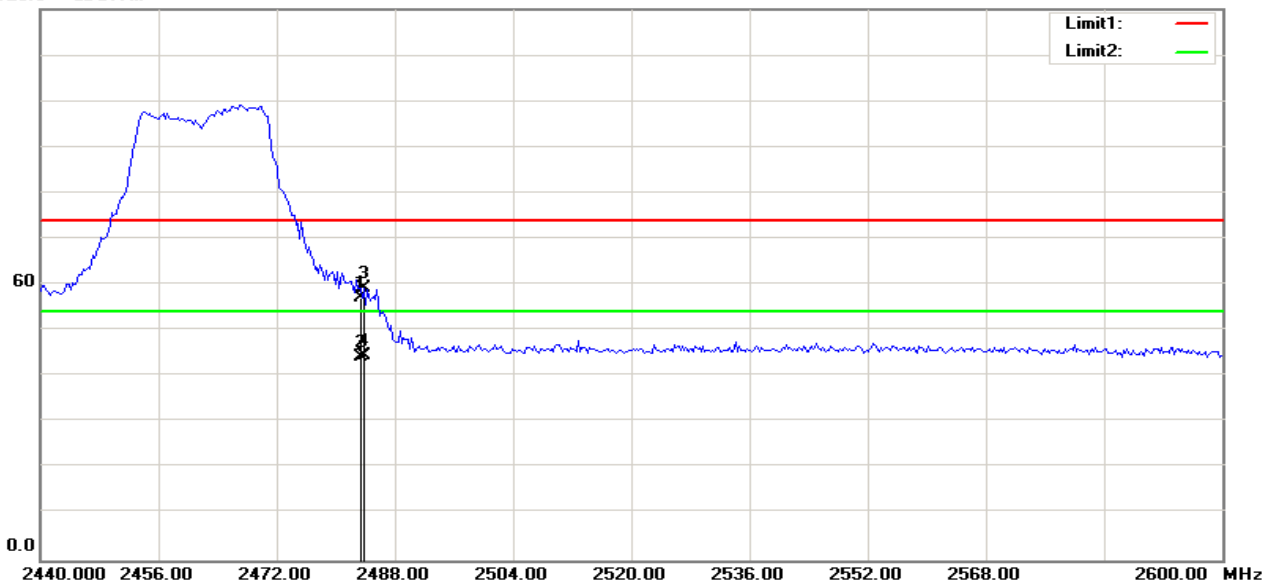

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	2483.500	65.58	-8.30	57.28	74.00	-16.72	100	0	peak
2	2483.500	52.63	-8.30	44.33	54.00	-9.67	100	0	AVG
3	2483.846	67.59	-8.30	59.29	74.00	-14.71	100	324	peak
4	2483.846	52.83	-8.30	44.53	54.00	-9.47	100	324	AVG

RESTRICTED BANDEDGE (IEEE 802.11n HT20 mode, High Channel, Vertical)

120.0 dBuV/m

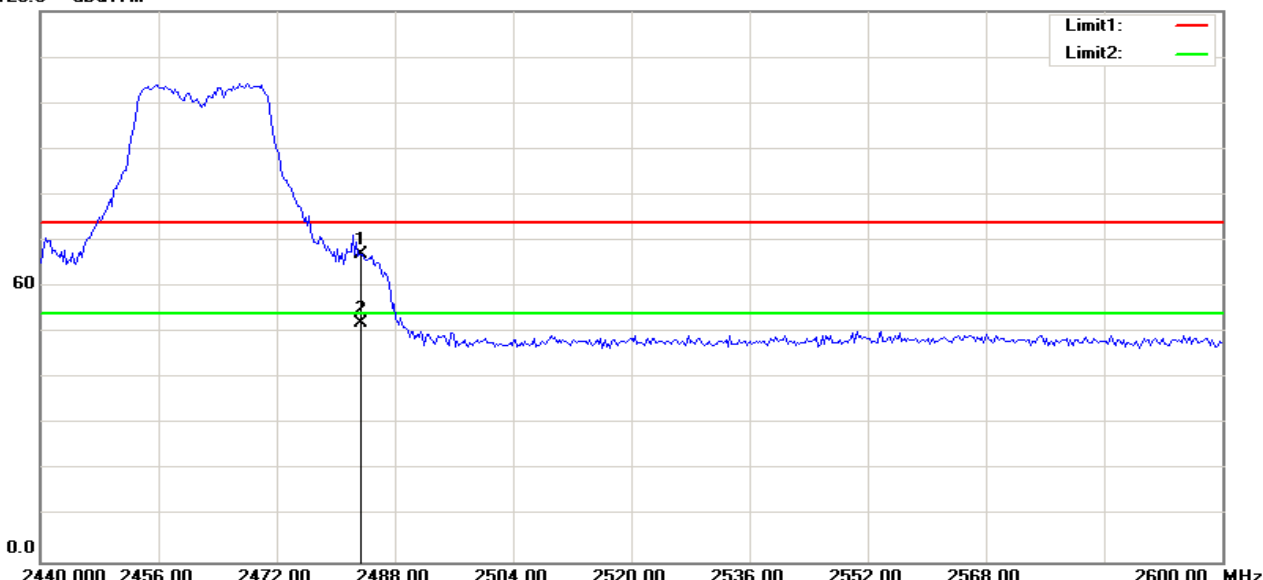

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	2483.500	75.48	-8.30	67.18	74.00	-6.82	100	328	peak
2	2483.500	60.21	-8.30	51.91	54.00	-2.09	100	328	AVG

Below 1GHz

Operation Mode:	Normal Link	Test Date:	2015-12-27
Temperature:	25°C	Tested by:	Lily.Wang
Humidity:	48% RH	Polarity:	Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
38.7300	V	16.60	17.25	33.85	40.00	-6.15	peak
111.4800	V	25.33	12.05	37.38	43.50	-6.12	peak
154.1600	V	24.42	11.59	36.01	43.50	-7.49	peak
308.3900	V	21.45	14.59	36.04	46.00	-9.96	peak
720.6400	V	14.85	22.79	37.64	46.00	-8.36	peak
996.1200	V	15.93	24.96	40.89	54.00	-13.11	peak
37.7600	H	15.23	17.43	32.66	40.00	-7.34	peak
87.2300	H	24.79	10.71	35.50	40.00	-4.50	peak
308.3900	H	20.53	14.59	35.12	46.00	-10.88	peak
720.6400	H	18.44	22.79	41.23	46.00	-4.77	peak
832.1900	H	15.42	23.25	38.67	46.00	-7.33	peak
993.2100	H	16.14	24.95	41.09	54.00	-12.91	peak

Remark:

1. *Measuring frequencies from 30 MHz to the 1GHz (No emission found between lowest internal used/generated frequency to 30 MH).*
2. *Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using peak/quasi-peak detector mode.*
3. *Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.*
4. *Margin (dB) = Result (dBuV/m) – Limit (dBuV/m).*



Compliance Certification Services Inc.

Date of Issue : January 12, 2016

Report No: C151211R01-RPW

FCC ID: 2AAED-R9861520

IC: 9393B-R9861520

Above 1 GHz

Operation Mode: TX / IEEE 802.11b / CH Low

Test Date: 2015-12-27

Temperature: 24°C

Tested by: Lily.Wang

Humidity: 48 % RH

Polarity: Ver. / Hor.

Horizontal

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	4705.128	43.96	-2.92	41.04	74.00	-32.96	100	25	peak
2	7701.923	41.64	3.55	45.19	74.00	-28.81	100	54	peak
N/A									

Vertical

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	5004.808	51.93	-2.04	49.89	74.00	-24.11	100	313	peak
2	7674.680	42.17	3.45	45.62	74.00	-28.38	100	331	peak
N/A									

Operation Mode: TX / IEEE 802.11b / CH Mid

Test Date: 2015-12-27

Temperature: 24°C

Tested by: Lily.Wang

Humidity: 48 % RH

Polarity: Ver. / Hor.

Horizontal

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	5004.808	45.52	-2.04	43.48	74.00	-30.52	100	247	peak
2	7429.487	42.30	2.60	44.90	74.00	-29.10	100	160	peak
N/A									

Vertical

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	5004.808	52.30	-2.04	50.26	74.00	-23.74	100	348	peak
2	7701.923	42.23	3.55	45.78	74.00	-28.22	100	250	peak
N/A									



Compliance Certification Services Inc.

Date of Issue :January 12, 2016

Report No: C151211R01-RPW

FCC ID: 2AAED-R9861520

IC: 9393B-R9861520

Operation Mode: TX / IEEE 802.11b / CH High

Test Date: 2015-12-27

Temperature: 24°C

Tested by: Lily.Wang

Humidity: 48 % RH

Polarity: Ver. / Hor.

Horizontal

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	5004.808	45.12	-2.04	43.08	74.00	-30.92	100	272	peak
2	7701.923	41.48	3.55	45.03	74.00	-28.97	100	187	peak
N/A									

Vertical

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	5004.808	50.97	-2.04	48.93	74.00	-25.07	100	313	peak
2	7674.680	41.75	3.45	45.20	74.00	-28.80	100	24	peak
N/A									

Operation Mode: TX / IEEE 802.11g / CH Low

Test Date: 2015-12-27

Temperature: 24°C

Tested by: Lily.Wang

Humidity: 48 % RH

Polarity: Ver. / Hor.

Horizontal

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	4814.103	44.84	-2.60	42.24	74.00	-31.76	100	55	peak
2	7674.680	41.08	3.45	44.53	74.00	-29.47	100	225	peak
N/A									

Vertical

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	4814.103	51.80	-2.60	49.20	74.00	-24.80	100	73	peak
2	7565.705	40.86	3.07	43.93	74.00	-30.07	100	360	peak
N/A									



Compliance Certification Services Inc.

Date of Issue : January 12, 2016

Report No: C151211R01-RPW

FCC ID: 2AAED-R9861520

IC: 9393B-R9861520

Operation Mode: TX / IEEE 802.11g / CH Mid

Test Date: 2015-12-27

Temperature: 24°C

Tested by: Lily.Wang

Humidity: 48 % RH

Polarity: Ver. / Hor.

Horizontal

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	5004.808	43.95	-2.04	41.91	74.00	-32.09	100	277	peak
2	7756.410	40.95	3.74	44.69	74.00	-29.31	100	244	peak
N/A									

Vertical

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	5004.808	50.44	-2.04	48.40	74.00	-25.60	100	316	peak
2	7810.897	40.73	3.93	44.66	74.00	-29.34	100	224	peak
N/A									

Operation Mode: TX / IEEE 802.11g / CH High

Test Date: 2015-12-27

Temperature: 24°C

Tested by: Lily.Wang

Humidity: 48 % RH

Polarity: Ver. / Hor.

Horizontal

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	5004.808	43.52	-2.04	41.48	74.00	-32.52	100	276	peak
2	7483.974	41.84	2.79	44.63	74.00	-29.37	100	130	peak
N/A									

Vertical

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	5004.808	50.34	-2.04	48.30	74.00	-25.70	100	313	peak
2	7674.680	41.88	3.45	45.33	74.00	-28.67	100	208	peak
N/A									



Compliance Certification Services Inc.

Date of Issue : January 12, 2016

Report No: C151211R01-RPW

FCC ID: 2AAED-R9861520

IC: 9393B-R9861520

Operation Mode: TX / IEEE 802.11n HT20 mode / CH Low

Test Date: 2015-12-27

Temperature: 24°C

Tested by: Lily.Wang

Humidity: 48 % RH

Polarity: Ver. / Hor.

Horizontal

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	5004.808	44.49	-2.04	42.45	74.00	-31.55	100	103	peak
2	7620.192	40.61	3.26	43.87	74.00	-30.13	100	28	peak
N/A									

Vertical

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	5004.808	51.14	-2.04	49.10	74.00	-24.90	100	314	peak
2	7647.436	40.92	3.36	44.28	74.00	-29.72	100	324	peak
N/A									

Operation Mode: TX / IEEE 802.11n HT20 mode / CH Mid

Test Date: 2015-12-27

Temperature: 24°C

Tested by: Lily.Wang

Humidity: 48 % RH

Polarity: Ver. / Hor.

Horizontal

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	5004.808	44.35	-2.04	42.31	74.00	-31.69	100	277	peak
2	7511.218	40.92	2.88	43.80	74.00	-30.20	100	275	peak
N/A									

Vertical

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	5004.808	50.02	-2.04	47.98	74.00	-26.02	100	312	peak
2	7810.897	40.63	3.93	44.56	74.00	-29.44	100	117	peak
N/A									



Compliance Certification Services Inc.

Date of Issue :January 12, 2016

Report No: C151211R01-RPW

FCC ID: 2AAED-R9861520

IC: 9393B-R9861520

Operation Mode: TX / IEEE 802.11n HT20 mode / CH High **Test Date:** 2015-12-27

Temperature: 24°C

Tested by: Lily.Wang

Humidity: 48 % RH

Polarity: Ver. / Hor.

Horizontal

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	5004.808	44.27	-2.04	42.23	74.00	-31.77	100	275	peak
2	7756.410	41.46	3.74	45.20	74.00	-28.80	100	227	peak
N/A									

Vertical

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	5004.808	49.35	-2.04	47.31	74.00	-26.69	100	313	peak
2	7701.923	40.89	3.55	44.44	74.00	-29.56	100	351	peak
N/A									

4.7.POWERLINE CONDUCTED EMISSIONS

LIMIT

According to §15.207(a), except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56*	56 to 46*
0.50 to 5	56	46
5 to 30	60	50

* Decreases with the logarithm of the frequency.

Test Configuration

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

TEST PROCEDURE


- 1.The EUT was placed on a table, which is 0.8m above ground plane.
- 2.Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 3.Repeat above procedures until all frequency measured were complete.

TEST RESULTS

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.

TEST DATA

Job No.:	C151211R01	Date:	2016-1-9
Model No.:	R9861520	Time:	PM 04:23:22
Standard:	FCC Class B	Temp.(C)/Hum.(%):	22(C)/48%
Test item:	Conduction test	Test By:	Lily.Wang
Line:	L1	Test Voltage:	AC 120V/60Hz
Model:		Description:	

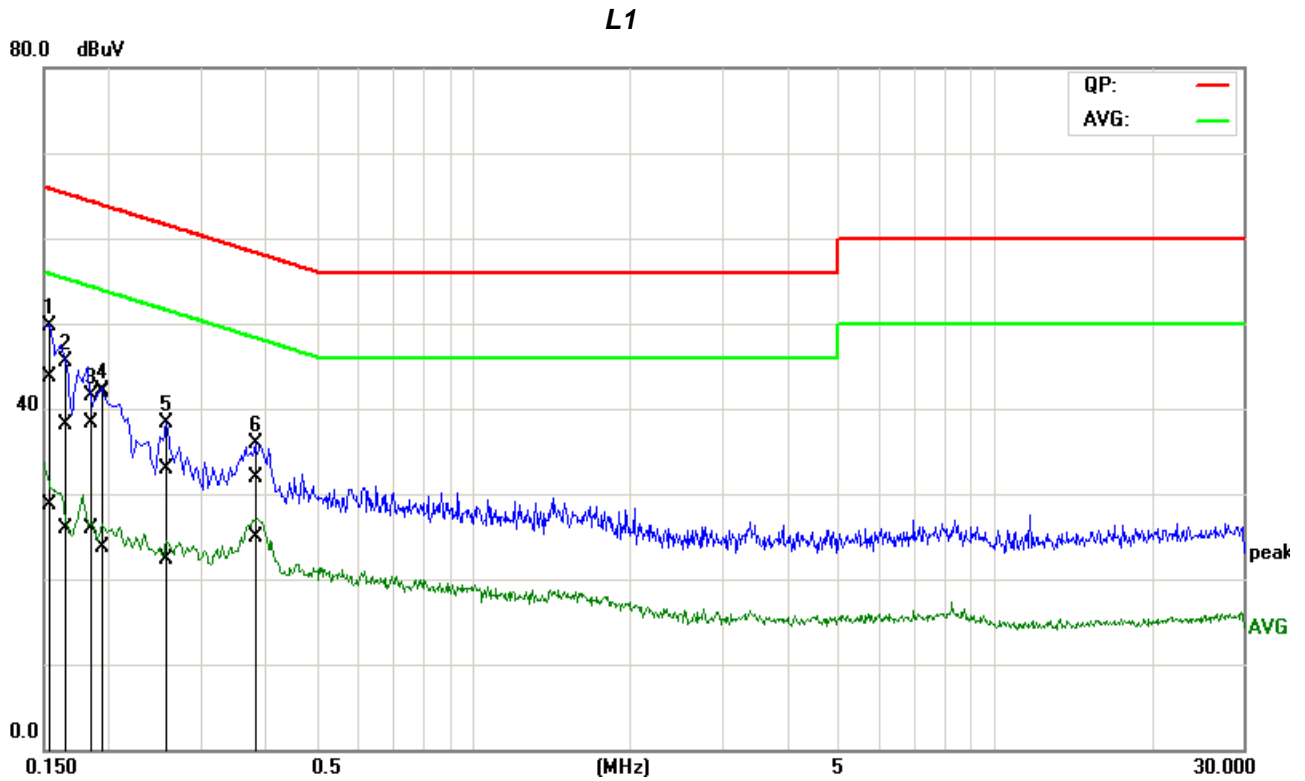


No.	Frequency (MHz)	QuasiPeak reading (dBuV)	Average reading (dBuV)	Correction factor (dB)	QuasiPeak result (dBuV)	Average result (dBuV)	QuasiPeak limit (dBuV)	Average limit (dBuV)	QuasiPeak margin (dB)	Average margin (dB)	Remark
1	0.1511	23.83	8.94	19.78	43.61	28.72	65.94	55.94	-22.33	-27.22	Pass
2	0.1663	18.39	6.07	19.78	38.17	25.85	65.14	55.14	-26.97	-29.29	Pass
3	0.1855	18.44	6.12	19.79	38.23	25.91	64.24	54.24	-26.01	-28.33	Pass
4*	0.1963	22.16	3.98	19.79	41.95	23.77	63.77	53.77	-21.82	-30.00	Pass
5	0.2577	13.13	2.45	19.79	32.92	22.24	61.51	51.51	-28.59	-29.27	Pass
6	0.3818	12.02	5.10	19.80	31.82	24.90	58.24	48.24	-26.42	-23.34	Pass

Note: 1. L1 = Line One (Live Line) / L2 = Line Two (Neutral Line).

Job No.:	C151211R01	Date:	2016-1-9
Model No.:	R9861520	Time:	PM 04:28:16
Standard:	FCC Class B	Temp.(C)/Hum.(%):	22(C)/48%
Test item:	Conduction test	Test By:	Lily.Wang
Line:	L2	Test Voltage:	AC 120V/60Hz
Model:		Description:	

L2

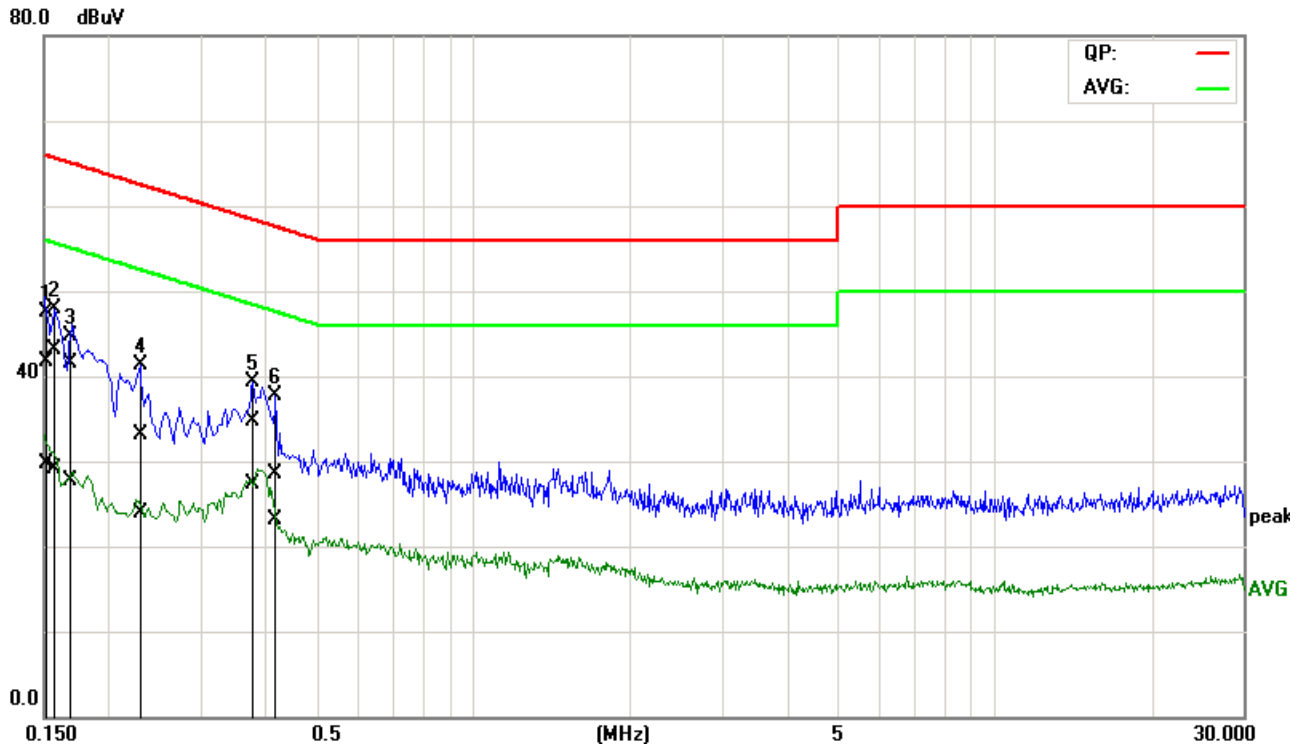


No.	Frequency (MHz)	QuasiPeak reading (dBuV)	Average reading (dBuV)	Correction factor (dB)	QuasiPeak result (dBuV)	Average result (dBuV)	QuasiPeak limit (dBuV)	Average limit (dBuV)	QuasiPeak margin (dB)	Average margin (dB)	Remark
1	0.1526	22.00	10.04	19.73	41.73	29.77	65.86	55.86	-24.13	-26.09	Pass
2	0.1557	23.35	9.35	19.73	43.08	29.08	65.69	55.69	-22.61	-26.61	Pass
3	0.1666	21.71	7.93	19.73	41.44	27.66	65.13	55.13	-23.69	-27.47	Pass
4	0.2314	13.40	4.25	19.74	33.14	23.99	62.40	52.40	-29.26	-28.41	Pass
5*	0.3797	14.95	7.64	19.75	34.70	27.39	58.29	48.29	-23.59	-20.90	Pass
6	0.4177	8.68	3.30	19.75	28.43	23.05	57.49	47.49	-29.06	-24.44	Pass

Note: 1. L1 = Line One (Live Line) / L2 = Line Two (Neutral Line).

Job No.:	C151211R01	Date:	2016-1-9
Model No.:	R9861520	Time:	PM 04:10:37
Standard:	FCC Class B	Temp.(C)/Hum.(%):	22(C)/48%
Test item:	Conduction test	Test By:	Lily.Wang
Line:	L1	Test Voltage:	AC 240V/60Hz
Model:		Description:	

L1

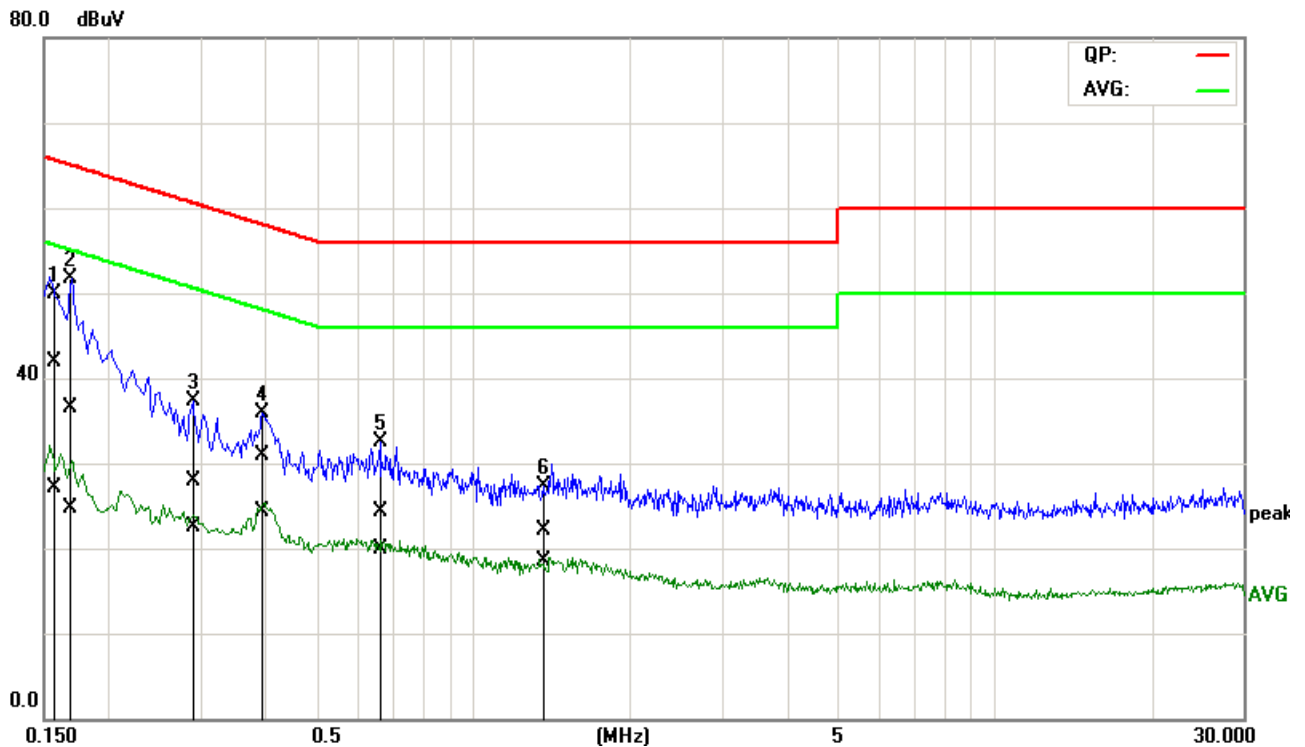


No.	Frequency (MHz)	QuasiPeak reading (dBuV)	Average reading (dBuV)	Correction factor (dB)	QuasiPeak result (dBuV)	Average result (dBuV)	QuasiPeak limit (dBuV)	Average limit (dBuV)	QuasiPeak margin (dB)	Average margin (dB)	Remark
1*	0.1584	22.16	7.36	19.78	41.94	27.14	65.55	55.55	-23.61	-28.41	Pass
2	0.1707	16.68	4.96	19.78	36.46	24.74	64.93	54.93	-28.47	-30.19	Pass
3	0.2910	8.20	2.79	19.80	28.00	22.59	60.50	50.50	-32.50	-27.91	Pass
4	0.3909	11.05	4.54	19.80	30.85	24.34	58.04	48.04	-27.19	-23.70	Pass
5	0.6668	4.47	0.14	19.81	24.28	19.95	56.00	46.00	-31.72	-26.05	Pass
6	1.3570	2.27	-1.41	19.82	22.09	18.41	56.00	46.00	-33.91	-27.59	Pass

Note: 1. L1 = Line One (Live Line) / L2 = Line Two (Neutral Line).

Job No.:	C151211R01	Date:	2016-1-9
Model No.:	R9861520	Time:	PM 04:18:03
Standard:	FCC Class B	Temp.(C)/Hum.(%):	22(C)/48%
Test item:	Conduction test	Test By:	Lily.Wang
Line:	L2	Test Voltage:	AC 240V/60Hz
Model:		Description:	

L2

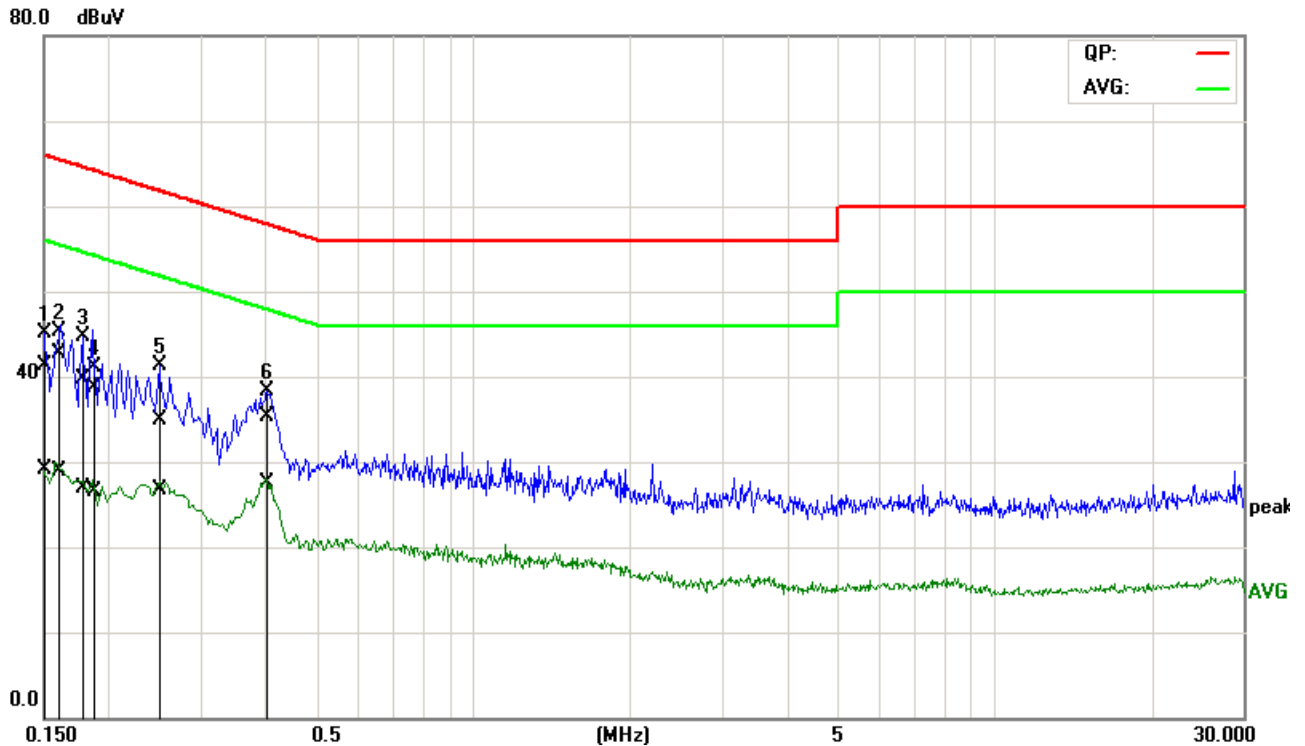

No.	Frequency (MHz)	QuasiPeak reading (dBuV)	Average reading (dBuV)	Correction factor (dB)	QuasiPeak result (dBuV)	Average result (dBuV)	QuasiPeak limit (dBuV)	Average limit (dBuV)	QuasiPeak margin (dB)	Average margin (dB)	Remark
1	0.1505	21.64	9.34	19.73	41.37	29.07	65.97	55.97	-24.60	-26.90	Pass
2	0.1587	23.05	9.27	19.73	42.78	29.00	65.53	55.53	-22.75	-26.53	Pass
3	0.1784	19.89	7.17	19.73	39.62	26.90	64.56	54.56	-24.94	-27.66	Pass
4	0.1887	18.95	6.86	19.74	38.69	26.60	64.09	54.09	-25.40	-27.49	Pass
5	0.2518	15.26	7.04	19.74	35.00	26.78	61.70	51.70	-26.70	-24.92	Pass
6*	0.3985	15.59	7.75	19.75	35.34	27.50	57.88	47.88	-22.54	-20.38	Pass

Note: 1. L1 = Line One (Live Line) / L2 = Line Two (Neutral Line).

Remark:

- 1.The measuring frequencies range between 0.15 MHz and 30 MHz.
- 2.The emissions measured in the frequency range between 0.15 MHz and 30MHz were made with an instrument using Quasi-peak detector and Average detector.
- 3.“---” denotes the emission level was or more than 2dB below the Average limit, and no re-check was made.
- 4.The IF bandwidth of SPA between 0.15MHz and 30MHz was 10KHz. The IF bandwidth of Test Receiver between 0.15MHz and 30MHz was 9kHz.

END OF REPORT