



Test Report

Date : 2018-11-07
No. : HMD18110009

Page 1 of 58

- Applicant** : Shenzhen Belter Health Measurement and Analysis Technology Co. Ltd.
702/704, Block C, Tsinghua Units Science Park, No 13 Langshan Rd, Hi-Tech Industrial park (North) Nshan District, Shenzhen, Guangdong, China
- Supplier / Manufacturer** : DongGuan Simple Industrial Co., Ltd.
No 192, Shaxin Road, Science Message Park, TangXia Town, Dongguan, Guangdong, China
- Description of Sample(s)** : Submitted sample(s) said to be
Product: BODY FAT SCALE
Brand Name: N/A
Model No.: eF-706W
FCC ID: 2AAEE706W
- Date Samples Received** : 2018-10-26
- Date Tested** : 2018-11-01 to 2018-11-05
- Investigation Requested** : Perform ElectroMagnetic Interference measurement in accordance with FCC 47CFR [Codes of Federal Regulations] Part 15: 2017 and ANSI C63.10:2013 for FCC Certification.
- Conclusions** : The submitted product COMPLIED with the requirements of Federal Communications Commission [FCC] Rules and Regulations Part 15. The tests were performed in accordance with the standards described above and on Section 2.2 in this Test Report.
- Remarks** : WIFI (802.11b, 802.11g, 802.11n20)



CHEUNG Chi, Kenneth
Authorized Signatory



Test Report

Date : 2018-11-07
No. : HMD18110009

Page 2 of 58

CONTENT:

Cover	Page 1 of 58	
Content	Page 2 of 58	
<u>1.0</u>	<u>General Details</u>	
1.1	Test Laboratory	Page 3 of 58
1.2	Equipment Under Test [EUT] Description of EUT operation	Page 3 of 58
1.3	Date of Order	Page 3 of 58
1.4	Submitted Sample(s)	Page 3 of 58
1.5	Test Duration	Page 3 of 58
1.6	Country of Origin	Page 3 of 58
<u>2.0</u>	<u>Technical Details</u>	
2.1	Investigations Requested	Page 4 of 58
2.2	Test Standards and Results Summary	Page 4 of 58
<u>3.0</u>	<u>Test Results</u>	
3.1	Emission	Page 5-53 of 58
<u>Appendix A</u>		
List of Measurement Equipment		Page 54 of 58
<u>Appendix B</u>		
Photograph(s) of Product		Page 55-58 of 58

The Hong Kong Standards and Testing Centre Limited

Head Office: 10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Unit B, 10/F, Block 1, Tai Ping Industrial Centre, No. 57 Ting Kok Road, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@hkstc.org Website: www.stc-group.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website



Test Report

Date : 2018-11-07
No. : HMD18110009

Page 3 of 58

1.0 General Details

1.1 Test Laboratory

The Hong Kong Standards and Testing Centre Ltd.
EMC Laboratory
Head Office: 10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong
Telephone: 852 2666 1888
Fax: 852 2664 4353

1.2 Equipment Under Test [EUT]

Description of Sample(s)

Product:	BODY FAT SCALE
Manufacturer:	DongGuan Simple Industrial Co., Ltd. No 192, Shaxin Road, Science Message Park, TangXia Town, Dongguan, Guangdong, China
Brand Name:	N/A
Model Number:	eF-706W
Rating:	6Vd.c. (AAA battery*4)

1.2.1 Description of EUT Operation

The Equipment Under Test (EUT) is a BODY FAT SCALE. The transmission signal is digital modulated with channel frequency range 2412-2462MHz.

1.3 Date of Order

2018-10-26

1.4 Submitted Sample(s):

1 Sample

1.5 Test Duration

2018-11-01 to 2018-11-05

1.6 Country of Origin

China

The Hong Kong Standards and Testing Centre Limited

Head Office: 10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Unit B, 10/F, Block 1, Tai Ping Industrial Centre, No. 57 Ting Kok Road, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@hkstc.org Website: www.stc-group.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website



Test Report

Date : 2018-11-07
No. : HMD18110009

Page 4 of 58

2.0 Technical Details

2.1 Investigations Requested

Perform Electromagnetic Interference measurements in accordance with FCC 47CFR [Codes of Federal Regulations] Part 15: 2017 Regulations and ANSI C63.10:2013 for FCC Certification.

2.2 Test Standards and Results Summary Tables

EMISSION Results Summary						
Test Condition	Test Requirement	Test Method	Class / Severity	Test Result		
				Pass	Failed	N/A
Output Power of Fundamental Emissions	FCC 47CFR 15.247(b)(3)	ANSI C63.10:2013	N/A	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Radiated Emissions	FCC 47CFR 15.209	ANSI C63.10:2013	N/A	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Conducted Emissions	FCC 47CFR 15.207	ANSI C63.10:2013	N/A	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
Power Spectral Density	FCC 47CFR 15.247(e)	N/A	N/A	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
6dB Bandwidth	FCC 47CFR 15.247(a)(2)	N/A	N/A	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Band Edge Emissions	FCC 47CFR 15.247(d)	N/A	N/A	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Antenna requirement	FCC 47CFR 15.203	N/A	N/A	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

Note: N/A - Not Applicable

The Hong Kong Standards and Testing Centre Limited

Head Office: 10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Unit B, 10/F, Block 1, Tai Ping Industrial Centre, No. 57 Ting Kok Road, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@hkstc.org Website: www.stc-group.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website

Test Report

Date : 2018-11-07
No. : HMD18110009

Page 5 of 58

3.0 Test Results

3.1 Emission

3.1.1 Maximum Peak Output Power


Test Requirement:	FCC 47CFR 15.247(b)(3)
Test Method:	N/A
Test Date:	2018-11-01
Mode of Operation:	Wifi mode

Ambient Temperature: 25°C Relative Humidity: 51% Atmospheric Pressure: 101 kPa

Test Method:

The RF output of the EUT was connected to the peak power meter. All the attenuation or cable loss will be added to the measured maximum output power. The results are recorded in Watt.

Test Setup:

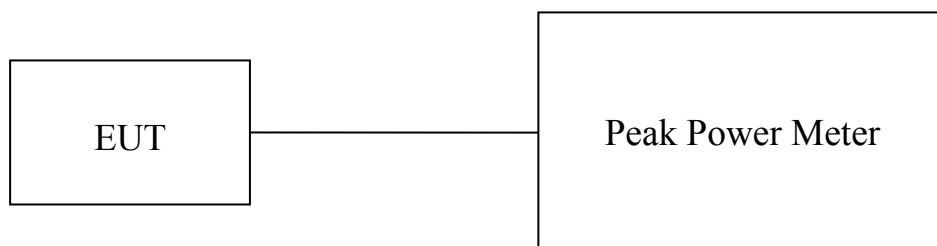

Note: a temporary antenna connector was soldered to the RF output.



Test Report

Date : 2018-11-07
No. : HMD18110009

Page 6 of 58

Limits for Peak Output Power of Fundamental & Harmonics Emissions [FCC 47CFR 15.247]:

For Digital Transmission systems in 2400-2483.5 MHz Band: 1 Watt (30dBm)

Results of WiFi mode 802.11 b, (2412MHz to 2462MHz) : Pass (TX Unit) Maximum conducted output power

Channel	Frequency(MHz)	Output Power(Watt)
Low	2412	0.049136
Middle	2437	0.048989
High	2462	0.049102

Results of WiFi mode 802.11 g, (2412MHz to 2462MHz) : Pass (TX Unit) Maximum conducted output power

Channel	Frequency(MHz)	Output Power(Watt)
Low	2412	0.048217
Middle	2437	0.048428
High	2462	0.048798

Results of WiFi mode 802.11 n20, (2412MHz to 2462MHz) : Pass (TX Unit) Maximum conducted output power

Channel	Frequency(MHz)	Output Power(Watt)
Low	2412	0.047984
Middle	2437	0.047152
High	2462	0.048339

Calculated measurement uncertainty : 30MHz to 1GHz 1.7dB
1GHz to 26GHz 1.7dB

The Hong Kong Standards and Testing Centre Limited

Head Office: 10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Unit B, 10/F, Block 1, Tai Ping Industrial Centre, No. 57 Ting Kok Road, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@hkstc.org Website: www.stc-group.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website



Test Report

Date : 2018-11-07
No. : HMD18110009

Page 7 of 58

3.1.2 Radiated Emissions

Test Requirement:	FCC 47CFR 15.209
Test Method:	ANSI C63.10:2013
Test Date:	2018-11-01
Mode of Operation:	Tx mode / Wifi mode

Ambient Temperature: 24°C Relative Humidity: 52% Atmospheric Pressure: 101 kPa

Test Method:

For emission measurements at or below 1 GHz, the sample was placed 0.01m above the ground plane of semi-anechoic Chamber*. For emission measurements above 1 GHz, the sample was placed 0.01m above the ground plane of semi-anechoic Chamber*. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.

* Semi-Anechoic chamber located on the G/F of The Hong Kong Standards and Testing Centre Ltd. with a metal ground plane filed with the FCC pursuant to section 2.948 of the FCC rules, with Registration Number: 607756.

The Hong Kong Standards and Testing Centre Limited

Head Office: 10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Unit B, 10/F, Block 1, Tai Ping Industrial Centre, No. 57 Ting Kok Road, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@hkstc.org Website: www.stc-group.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website

Test Report

Date : 2018-11-07
No. : HMD18110009

Page 8 of 58

Spectrum Analyzer Setting:

9KHz – 30MHz (Pk & Av)

RBW: 10kHz
 VBW: 30kHz
 Sweep: Auto
 Span: Fully capture the emissions being measured
 Trace: Max. hold

30MHz – 1GHz (QP)

RBW: 120kHz
 VBW: 120kHz
 Sweep: Auto
 Span: Fully capture the emissions being measured
 Trace: Max. hold


Above 1GHz (Pk)

RBW: 1MHz
 VBW: 1MHz
 Sweep: Auto
 Span: Fully capture the emissions being measured
 Trace: Max. hold

Above 1GHz (Av)

RBW: 1MHz
 VBW: 10Hz
 Sweep: Auto
 Span: Fully capture the emissions being measured
 Trace: Max. hold

Test Setup:

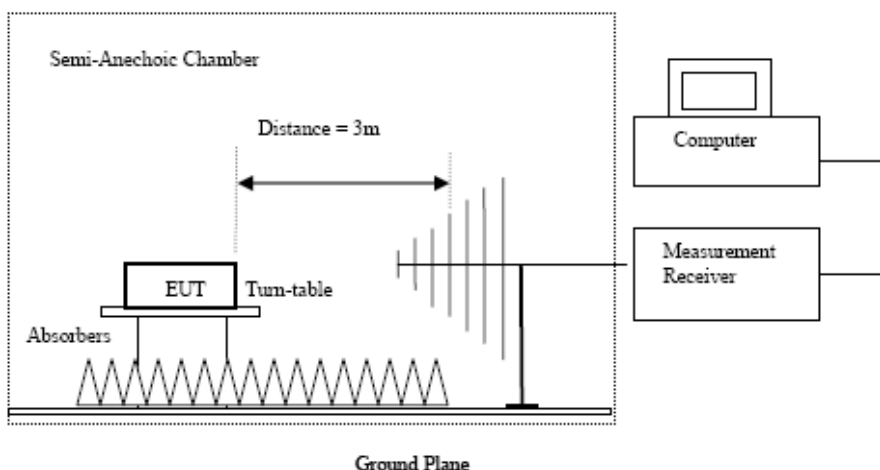

- Absorbers placed on top of the ground plane are for measurements above 1000MHz only.
- Measurements between 30MHz to 1000MHz made with Bi-log antennas, above 1000MHz horn antennas are used, 9kHz to 30MHz loop antennas are used.



Test Report

Date : 2018-11-07
 No. : HMD18110009

Page 9 of 58

Limits for Radiated Emissions FCC 47 CFR 15.247]:

Frequency Range [MHz]	Quasi-Peak Limits [μV/m]
0.009-0.490	2400/F (kHz)
0.490-1.705	24000/F (kHz)
1.705-30	30
30-88	100
88-216	150
216-960	200
Above960	500

The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.

Result of Tx mode (2412.0 MHz) (802.11b) (9kHz – 30MHz): Pass

Field Strength of Spurious Emissions Peak Value						
Frequency MHz	Measured Level dBuV	Correction Factor dB/m	Field Strength dBuV/m	Field Strength uV/m	Limit uV/m	E-Field Polarity
Emissions detected are more than 20 dB below the FCC Limits						

Result of Tx mode (2412.0 MHz) (802.11b) (1GHz-25GHz): Pass

Field Strength of Spurious Emissions Peak Value						
Frequency MHz	Measured Level @3m dBμV	Correction Factor dB/m	Field Strength dBμV/m	Limit @3m dBμV/m	Margin dB	E-Field Polarity
4824.0	15.0	41.5	56.5	74.0	17.5	Vertical
4824.0	13.4	42.4	55.8	74.0	18.2	Horizontal
7236.0	10.2	45.1	55.3	74.0	18.7	Vertical
7236.0	9.4	46.2	55.6	74.0	18.4	Horizontal
9648.0	7.5	48	55.5	74.0	18.5	Vertical
9648.0	7.1	48.8	55.9	74.0	18.1	Horizontal
12060.0	4.2	51.5	55.7	74.0	18.3	Vertical
12060.0	3.4	52.4	55.8	74.0	18.2	Horizontal

The Hong Kong Standards and Testing Centre Limited

Head Office: 10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Unit B, 10/F, Block 1, Tai Ping Industrial Centre, No. 57 Ting Kok Road, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@hkstc.org Website: www.stc-group.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website



Test Report

Date : 2018-11-07
 No. : HMD18110009

Page 10 of 58

Field Strength of Spurious Emissions						
Average Value						
Frequency MHz	Measured Level @3m dBuV	Correction Factor dB/m	Field Strength dBuV/m	Limit @3m dBuV/m	Margin dB	E-Field Polarity
4824.0	0.6	41.5	42.1	54.0	11.9	Vertical
4824.0	-1.2	42.4	41.2	54.0	12.8	Horizontal
7236.0	-4.3	45.1	40.8	54.0	13.2	Vertical
7236.0	-5.1	46.2	41.1	54.0	12.9	Horizontal
9648.0	-6.9	48	41.1	54.0	12.9	Vertical
9648.0	-8.2	48.8	40.6	54.0	13.4	Horizontal
12060.0	-10.2	51.5	41.3	54.0	12.7	Vertical
12060.0	-9.9	52.4	42.5	54.0	11.5	Horizontal

Result of Tx mode (2437.0 MHz) (802.11b) (9kHz – 30MHz): Pass

Field Strength of Spurious Emissions						
Peak Value						
Frequency MHz	Measured Level dBuV	Correction Factor dB/m	Field Strength dBuV/m	Field Strength uV/m	Limit uV/m	E-Field Polarity
Emissions detected are more than 20 dB below the FCC Limits						

Result of Tx mode (2437.0 MHz) (802.11b) (1GHz-25GHz): Pass

Field Strength of Spurious Emissions						
Peak Value						
Frequency MHz	Measured Level @3m dBuV	Correction Factor dB/m	Field Strength dBuV/m	Limit @3m dBuV/m	Margin dB	E-Field Polarity
4874.0	15.2	41.6	56.8	74.0	17.2	Vertical
4874.0	13.7	42.5	56.2	74.0	17.8	Horizontal
7311.0	10.2	45.2	55.4	74.0	18.6	Vertical
7311.0	8.8	46.3	55.1	74.0	18.9	Horizontal
9748.0	7.2	48.1	55.3	74.0	18.7	Vertical
9748.0	7.2	48.9	56.1	74.0	17.9	Horizontal
12185.0	4.4	51.6	56.0	74.0	18.0	Vertical
12185.0	3.3	52.5	55.8	74.0	18.2	Horizontal



Test Report

Date : 2018-11-07
 No. : HMD18110009

Page 11 of 58

Field Strength of Spurious Emissions						
Average Value						
Frequency MHz	Measured Level @3m dBuV	Correction Factor dB/m	Field Strength dBuV/m	Limit @3m dBuV/m	Margin dB	E-Field Polarity
4874.0	0.6	41.6	42.2	54.0	11.8	Vertical
4874.0	-0.6	42.5	41.9	54.0	12.1	Horizontal
7311.0	-4.9	45.2	40.3	54.0	13.7	Vertical
7311.0	-5.9	46.3	40.4	54.0	13.6	Horizontal
9748.0	-7.0	48.1	41.1	54.0	12.9	Vertical
9748.0	-7.4	48.9	41.5	54.0	12.5	Horizontal
12185.0	-9.2	51.6	42.4	54.0	11.6	Vertical
12185.0	-10.4	52.5	42.1	54.0	11.9	Horizontal

Result of Tx mode (2462.0 MHz) (802.11b) (9kHz – 30MHz): Pass

Field Strength of Spurious Emissions						
Peak Value						
Frequency MHz	Measured Level dBuV	Correction Factor dB/m	Field Strength dBuV/m	Field Strength uV/m	Limit uV/m	E-Field Polarity
Emissions detected are more than 20 dB below the FCC Limits						

Result of Tx mode (2462.0 MHz) (802.11b) (1GHz-25GHz): Pass

Field Strength of Spurious Emissions						
Peak Value						
Frequency MHz	Measured Level @3m dBμV	Correction Factor dB/m	Field Strength dBμV/m	Limit @3m dBμV/m	Margin dB	E-Field Polarity
4924.0	15.6	41.4	57.0	74.0	17.0	Vertical
4924.0	14.1	42.7	56.8	74.0	17.2	Horizontal
7386.0	9.7	45.6	55.3	74.0	18.7	Vertical
7386.0	9.2	46.5	55.7	74.0	18.3	Horizontal
9848.0	6.5	48.6	55.1	74.0	18.9	Vertical
9848.0	6.0	49.7	55.7	74.0	18.3	Horizontal
12310.0	4.4	51.7	56.1	74.0	17.9	Vertical
12310.0	3.0	52.7	55.7	74.0	18.3	Horizontal

The Hong Kong Standards and Testing Centre Limited

Head Office: 10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Unit B, 10/F, Block 1, Tai Ping Industrial Centre, No. 57 Ting Kok Road, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@hkstc.org Website: www.stc-group.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website



Test Report

Date : 2018-11-07
 No. : HMD18110009

Page 12 of 58

Field Strength of Spurious Emissions						
Average Value						
Frequency MHz	Measured Level @3m dBuV	Correction Factor dB/m	Field Strength dBuV/m	Limit @3m dBuV/m	Margin dB	E-Field Polarity
4924.0	1.3	41.4	42.7	54.0	11.3	Vertical
4924.0	-0.8	42.7	41.9	54.0	12.1	Horizontal
7386.0	-4.2	45.6	41.4	54.0	12.6	Vertical
7386.0	-4.5	46.5	42.0	54.0	12.0	Horizontal
9848.0	-7.4	48.6	41.2	54.0	12.8	Vertical
9848.0	-8.7	49.7	41.0	54.0	13.0	Horizontal
12310.0	-9.4	51.7	42.3	54.0	11.7	Vertical
12310.0	-11.0	52.7	41.7	54.0	12.3	Horizontal

Result of Tx mode (2412.0 MHz) (802.11g) (9kHz – 30MHz): Pass

Field Strength of Spurious Emissions						
Average Value						
Frequency MHz	Measured Level dB μ V	Correction Factor dB/m	Field Strength dB μ V/m	Field Strength dB μ V/m	Limit dB μ V/m	E-Field Polarity
Emissions detected are more than 20 dB below the FCC Limits						

Result of Tx mode (2412.0 MHz) (802.11g) (1GHz-25GHz): Pass

Field Strength of Spurious Emissions						
Peak Value						
Frequency MHz	Measured Level @3m dB μ V	Correction Factor dB/m	Field Strength dB μ V/m	Limit @3m dB μ V/m	Margin dB	E-Field Polarity
4824.0	15.3	41.5	56.8	74.0	17.2	Vertical
4824.0	14.1	42.4	56.5	74.0	17.5	Horizontal
7236.0	10.8	45.1	55.9	74.0	18.1	Vertical
7236.0	9.9	46.2	56.1	74.0	17.9	Horizontal
9648.0	7.6	48	55.6	74.0	18.4	Vertical
9648.0	7.1	48.8	55.9	74.0	18.1	Horizontal
12060.0	4.5	51.5	56.0	74.0	18.0	Vertical
12060.0	3.4	52.4	55.8	74.0	18.2	Horizontal

The Hong Kong Standards and Testing Centre Limited

Head Office: 10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Unit B, 10/F, Block 1, Tai Ping Industrial Centre, No. 57 Ting Kok Road, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@hkstc.org Website: www.stc-group.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website



Test Report

Date : 2018-11-07
 No. : HMD18110009

Page 13 of 58

Field Strength of Spurious Emissions						
Average Value						
Frequency MHz	Measured Level @3m dBuV	Correction Factor dB/m	Field Strength dBuV/m	Limit @3m dBuV/m	Margin dB	E-Field Polarity
4824.0	0.7	41.5	42.2	54.0	11.8	Vertical
4824.0	-0.7	42.4	41.7	54.0	12.3	Horizontal
7236.0	-2.8	45.1	42.3	54.0	11.7	Vertical
7236.0	-3.8	46.2	42.4	54.0	11.6	Horizontal
9648.0	-6.6	48	41.4	54.0	12.6	Vertical
9648.0	-7.7	48.8	41.1	54.0	12.9	Horizontal
12060.0	-9.5	51.5	42.0	54.0	12.0	Vertical
12060.0	-11.1	52.4	41.3	54.0	12.7	Horizontal

Result of Tx mode (2437.0 MHz) (802.11g) (9kHz – 30MHz): Pass

Field Strength of Spurious Emissions						
Average Value						
Frequency MHz	Measured Level dB μ V	Correction Factor dB/m	Field Strength dB μ V/m	Field Strength dB μ V/m	Limit dB μ V/m	E-Field Polarity
Emissions detected are more than 20 dB below the FCC Limits						

Result of Tx mode (2437.0 MHz) (802.11g) (1GHz-25GHz): Pass

Field Strength of Spurious Emissions						
Peak Value						
Frequency MHz	Measured Level @3m dBuV	Correction Factor dB/m	Field Strength dBuV/m	Limit @3m dBuV/m	Margin dB	E-Field Polarity
4874.0	15.4	41.6	57.0	74.0	17.0	Vertical
4874.0	13.9	42.5	56.4	74.0	17.6	Horizontal
7311.0	10.6	45.2	55.8	74.0	18.2	Vertical
7311.0	8.7	46.3	55.0	74.0	19.0	Horizontal
9748.0	9.5	48.1	57.6	74.0	16.4	Vertical
9748.0	7.3	48.9	56.2	74.0	17.8	Horizontal
12185.0	4.3	51.6	55.9	74.0	18.1	Vertical
12185.0	3.6	52.5	56.1	74.0	17.9	Horizontal

The Hong Kong Standards and Testing Centre Limited

Head Office: 10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Unit B, 10/F, Block 1, Tai Ping Industrial Centre, No. 57 Ting Kok Road, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@hkstc.org Website: www.stc-group.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website



Test Report

Date : 2018-11-07
 No. : HMD18110009

Page 14 of 58

Field Strength of Spurious Emissions						
Average Value						
Frequency MHz	Measured Level @3m dBuV	Correction Factor dB/m	Field Strength dBuV/m	Limit @3m dBuV/m	Margin dB	E-Field Polarity
4874.0	1.5	41.6	43.1	54.0	10.9	Vertical
4874.0	-0.2	42.5	42.3	54.0	11.7	Horizontal
7311.0	-4.2	45.2	41.0	54.0	13.0	Vertical
7311.0	-5.9	46.3	40.4	54.0	13.6	Horizontal
9748.0	-5.0	48.1	43.1	54.0	10.9	Vertical
9748.0	-6.7	48.9	42.2	54.0	11.8	Horizontal
12185.0	-10.2	51.6	41.4	54.0	12.6	Vertical
12185.0	-9.7	52.5	42.8	54.0	11.2	Horizontal

Result of Tx mode (2462.0 MHz) (802.11g) (9kHz – 30MHz): Pass

Field Strength of Spurious Emissions						
Average Value						
Frequency MHz	Measured Level dB μ V	Correction Factor dB/m	Field Strength dB μ V/m	Field Strength dB μ V/m	Limit dB μ V/m	E-Field Polarity
Emissions detected are more than 20 dB below the FCC Limits						

Result of Tx mode (2462.0 MHz) (802.11g) (1GHz-25GHz): Pass

Field Strength of Spurious Emissions						
Peak Value						
Frequency MHz	Measured Level @3m dB μ V	Correction Factor dB/m	Field Strength dB μ V/m	Limit @3m dB μ V/m	Margin dB	E-Field Polarity
4924.0	15.4	41.4	56.8	74.0	17.2	Vertical
4924.0	13.6	42.7	56.3	74.0	17.7	Horizontal
7386.0	9.8	45.6	55.4	74.0	18.6	Vertical
7386.0	8.7	46.5	55.2	74.0	18.8	Horizontal
9848.0	7.4	48.6	56.0	74.0	18.0	Vertical
9848.0	5.5	49.7	55.2	74.0	18.8	Horizontal
12310.0	4.2	51.7	55.9	74.0	18.1	Vertical
12310.0	3.4	52.7	56.1	74.0	17.9	Horizontal

The Hong Kong Standards and Testing Centre Limited

Head Office: 10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Unit B, 10/F, Block 1, Tai Ping Industrial Centre, No. 57 Ting Kok Road, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@hkstc.org Website: www.stc-group.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website



Test Report

Date : 2018-11-07
 No. : HMD18110009

Page 15 of 58

Field Strength of Spurious Emissions						
Average Value						
Frequency MHz	Measured Level @3m dBuV	Correction Factor dB/m	Field Strength dBuV/m	Limit @3m dBuV/m	Margin dB	E-Field Polarity
4924.0	1.3	41.4	42.7	54.0	11.3	Vertical
4924.0	-0.6	42.7	42.1	54.0	11.9	Horizontal
7386.0	-4.0	45.6	41.6	54.0	12.4	Vertical
7386.0	-5.6	46.5	40.9	54.0	13.1	Horizontal
9848.0	-7.3	48.6	41.3	54.0	12.7	Vertical
9848.0	-8.6	49.7	41.1	54.0	12.9	Horizontal
12310.0	-9.6	51.7	42.1	54.0	11.9	Vertical
12310.0	-10.7	52.7	42.0	54.0	12.0	Horizontal

Result of Tx mode (2412.0 MHz) (802.11n20) (9kHz – 30MHz): Pass

Field Strength of Spurious Emissions						
Average Value						
Frequency MHz	Measured Level dB μ V	Correction Factor dB/m	Field Strength dB μ V/m	Field Strength dB μ V/m	Limit dB μ V/m	E-Field Polarity
Emissions detected are more than 20 dB below the FCC Limits						

Result of Tx mode (2412.0 MHz) (802.11n20) (1GHz-25GHz): Pass

Field Strength of Spurious Emissions						
Peak Value						
Frequency MHz	Measured Level @3m dB μ V	Correction Factor dB/m	Field Strength dB μ V/m	Limit @3m dB μ V/m	Margin dB	E-Field Polarity
4824.0	15.4	41.5	56.9	74.0	17.1	Vertical
4824.0	13.4	42.4	55.8	74.0	18.2	Horizontal
7236.0	10.3	45.1	55.4	74.0	18.6	Vertical
7236.0	9.7	46.2	55.9	74.0	18.1	Horizontal
9648.0	7.4	48	55.4	74.0	18.6	Vertical
9648.0	6.9	48.8	55.7	74.0	18.3	Horizontal
12060.0	4.6	51.5	56.1	74.0	17.9	Vertical
12060.0	3.0	52.4	55.4	74.0	18.6	Horizontal



Test Report

Date : 2018-11-07
 No. : HMD18110009

Page 16 of 58

Field Strength of Spurious Emissions						
Average Value						
Frequency MHz	Measured Level @3m dBuV	Correction Factor dB/m	Field Strength dBuV/m	Limit @3m dBuV/m	Margin dB	E-Field Polarity
4824.0	0.9	41.5	42.4	54.0	11.6	Vertical
4824.0	-0.4	42.4	42.0	54.0	12.0	Horizontal
7236.0	-3.1	45.1	42.0	54.0	12.0	Vertical
7236.0	-4.0	46.2	42.2	54.0	11.8	Horizontal
9648.0	-7.4	48	40.6	54.0	13.4	Vertical
9648.0	-7.7	48.8	41.1	54.0	12.9	Horizontal
12060.0	-9.7	51.5	41.8	54.0	12.2	Vertical
12060.0	-11.1	52.4	41.3	54.0	12.7	Horizontal

Result of Tx mode (2437.0 MHz) (802.11n20) (9kHz – 30MHz): Pass

Field Strength of Spurious Emissions						
Average Value						
Frequency MHz	Measured Level dB μ V	Correction Factor dB/m	Field Strength dB μ V/m	Field Strength dB μ V/m	Limit dB μ V/m	E-Field Polarity
Emissions detected are more than 20 dB below the FCC Limits						

Result of Tx mode (2437.0 MHz) (802.11n20) (1GHz-25GHz): Pass

Field Strength of Spurious Emissions						
Peak Value						
Frequency MHz	Measured Level @3m dB μ V	Correction Factor dB/m	Field Strength dB μ V/m	Limit @3m dB μ V/m	Margin dB	E-Field Polarity
4874.0	15.0	41.6	56.6	74.0	17.4	Vertical
4874.0	13.8	42.5	56.3	74.0	17.7	Horizontal
7311.0	10.5	45.2	55.7	74.0	18.3	Vertical
7311.0	9.6	46.3	55.9	74.0	18.1	Horizontal
9748.0	8.0	48.1	56.1	74.0	17.9	Vertical
9748.0	7.4	48.9	56.3	74.0	17.7	Horizontal
12185.0	4.2	51.6	55.8	74.0	18.2	Vertical
12185.0	3.5	52.5	56.0	74.0	18.0	Horizontal

The Hong Kong Standards and Testing Centre Limited

Head Office: 10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Unit B, 10/F, Block 1, Tai Ping Industrial Centre, No. 57 Ting Kok Road, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@hkstc.org Website: www.stc-group.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website



Test Report

Date : 2018-11-07
 No. : HMD18110009

Page 17 of 58

Field Strength of Spurious Emissions						
Average Value						
Frequency MHz	Measured Level @3m dBuV	Correction Factor dB/m	Field Strength dBuV/m	Limit @3m dBuV/m	Margin dB	E-Field Polarity
4874.0	-0.5	41.6	41.1	54.0	12.9	Vertical
4874.0	-1.0	42.5	41.5	54.0	12.5	Horizontal
7311.0	-3.8	45.2	41.4	54.0	12.6	Vertical
7311.0	-5.0	46.3	41.3	54.0	12.7	Horizontal
9748.0	-6.0	48.1	42.1	54.0	11.9	Vertical
9748.0	-6.9	48.9	42.0	54.0	12.0	Horizontal
12185.0	-10.0	51.6	41.6	54.0	12.4	Vertical
12185.0	-10.8	52.5	41.7	54.0	12.3	Horizontal

Result of Tx mode (2462.0 MHz) (802.11n20) (9kHz – 30MHz): Pass

Field Strength of Spurious Emissions						
Average Value						
Frequency MHz	Measured Level dB μ V	Correction Factor dB/m	Field Strength dB μ V/m	Field Strength dB μ V/m	Limit dB μ V/m	E-Field Polarity
Emissions detected are more than 20 dB below the FCC Limits						

Result of Tx mode (2462.0 MHz) (802.11n20) (1GHz-25GHz): Pass

Field Strength of Spurious Emissions						
Peak Value						
Frequency MHz	Measured Level @3m dB μ V	Correction Factor dB/m	Field Strength dB μ V/m	Limit @3m dB μ V/m	Margin dB	E-Field Polarity
4924.0	15.2	41.4	56.6	74.0	17.4	Vertical
4924.0	13.1	42.7	55.8	74.0	18.2	Horizontal
7386.0	9.5	45.6	55.1	74.0	18.9	Vertical
7386.0	8.9	46.5	55.4	74.0	18.6	Horizontal
9848.0	7.1	48.6	55.7	74.0	18.3	Vertical
9848.0	5.5	49.7	55.2	74.0	18.8	Horizontal
12310.0	4.2	51.7	55.9	74.0	18.1	Vertical
12310.0	3.6	52.7	56.3	74.0	17.7	Horizontal



Test Report

Date : 2018-11-07
No. : HMD18110009

Page 18 of 58

Field Strength of Spurious Emissions Average Value						
Frequency MHz	Measured Level @3m dBuV	Correction Factor dB/m	Field Strength dBuV/m	Limit @3m dBuV/m	Margin dB	E-Field Polarity
4924.0	0.6	41.4	42.0	54.0	12.0	Vertical
4924.0	-1.1	42.7	41.6	54.0	12.4	Horizontal
7386.0	-4.9	45.6	40.7	54.0	13.3	Vertical
7386.0	-6.2	46.5	40.3	54.0	13.7	Horizontal
9848.0	-7.5	48.6	41.1	54.0	12.9	Vertical
9848.0	-8.4	49.7	41.3	54.0	12.7	Horizontal
12310.0	-10.0	51.7	41.7	54.0	12.3	Vertical
12310.0	-10.5	52.7	42.2	54.0	11.8	Horizontal

Remarks:

No additional spurious emissions found between lowest internal used/generated frequency and 30 MHz

* Denotes restricted band of operation.

Measurements were made using a peak detector. Any emission less than 1000MHz and falling within the restricted bands of FCC Rules Part 15 Section 15.205 and the limits of FCC Rules Part 15 Section 15.209 were applied.

Correction Factor included Antenna Factor and Cable Attenuation.

Calculated measurement uncertainty
(9kHz-30MHz): 2.0dB
(30MHz -1GHz): 4.9dB
(1GHz -26GHz): 4.02dB

Emissions in the vertical and horizontal polarizations have been investigated and the worst-case test results are recorded in this report.

The Hong Kong Standards and Testing Centre Limited

Head Office: 10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Unit B, 10/F, Block 1, Tai Ping Industrial Centre, No. 57 Ting Kok Road, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@hkstc.org Website: www.stc-group.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website



Test Report

Date : 2018-11-07
No. : HMD18110009

Page 19 of 58

Radiated Emissions Measurement:

Limit :

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 5.205(c)).

Result: RF Radiated Emissions (Lowest)-802.11b

Field Strength of Band-edge Compliance Peak Value						
Frequency MHz	Measured Level @3m dB μ V	Correction Factor dB/m	Field Strength dB μ V/m	Limit @3m dB μ V/m	Margin dB	E-Field Polarity
2390.0	11.8	36.8	48.6	74.0	25.4	Vertical

Field Strength of Band-edge Compliance Average Value						
Frequency MHz	Measured Level @3m dB μ V	Correction Factor dB/m	Field Strength dB μ V/m	Limit @3m dB μ V/m	Margin dB	E-Field Polarity
2390.0	2.3	36.8	39.1	54.0	14.9	Vertical

Result: RF Radiated Emissions (Highest) -802.11b

Field Strength of Band-edge Compliance Peak Value						
Frequency MHz	Measured Level @3m dB μ V	Correction Factor dB/m	Field Strength dB μ V/m	Limit @3m dB μ V/m	Margin dB	E-Field Polarity
2483.5	10.7	36.4	47.1	74.0	26.9	Horizontal

Field Strength of Band-edge Compliance Average Value						
Frequency MHz	Measured Level @3m dB μ V	Correction Factor dB/m	Field Strength dB μ V/m	Limit @3m dB μ V/m	Margin dB	E-Field Polarity
2483.5	3.5	36.4	39.9	54.0	14.1	Horizontal

The Hong Kong Standards and Testing Centre Limited

Head Office: 10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Unit B, 10/F, Block 1, Tai Ping Industrial Centre, No. 57 Ting Kok Road, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@hkstc.org Website: www.stc-group.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website



Test Report

Date : 2018-11-07
No. : HMD18110009

Page 20 of 58

Result: RF Radiated Emissions (Lowest)-802.11g

Field Strength of Band-edge Compliance Peak Value						
Frequency MHz	Measured Level @3m dB μ V	Correction Factor dB/m	Field Strength dB μ V/m	Limit @3m dB μ V/m	Margin dB	E-Field Polarity
2390.0	17.9	36.8	54.7	74.0	19.3	Vertical

Field Strength of Band-edge Compliance Average Value						
Frequency MHz	Measured Level @3m dB μ V	Correction Factor dB/m	Field Strength dB μ V/m	Limit @3m dB μ V/m	Margin dB	E-Field Polarity
2390.0	5.3	36.8	42.1	54.0	11.9	Vertical

Result: RF Radiated Emissions (Highest) -802.11g

Field Strength of Band-edge Compliance Peak Value						
Frequency MHz	Measured Level @3m dB μ V	Correction Factor dB/m	Field Strength dB μ V/m	Limit @3m dB μ V/m	Margin dB	E-Field Polarity
2483.5	12.9	36.4	49.3	74.0	24.7	Horizontal

Field Strength of Band-edge Compliance Average Value						
Frequency MHz	Measured Level @3m dB μ V	Correction Factor dB/m	Field Strength dB μ V/m	Limit @3m dB μ V/m	Margin dB	E-Field Polarity
2483.5	3.3	36.4	39.7	54.0	14.3	Horizontal

The Hong Kong Standards and Testing Centre Limited

Head Office: 10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Unit B, 10/F, Block 1, Tai Ping Industrial Centre, No. 57 Ting Kok Road, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@hkstc.org Website: www.stc-group.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website



Test Report

Date : 2018-11-07
 No. : HMD18110009

Page 21 of 58

Result: RF Radiated Emissions (Lowest)-802.11n20

Field Strength of Band-edge Compliance						
Peak Value						
Frequency	Measured Level @3m	Correction Factor	Field Strength	Limit @3m	Margin	E-Field Polarity
MHz	dB μ V	dB/m	dB μ V/m	dB μ V/m	dB	
2390.0	19.9	36.8	56.7	74.0	17.3	Vertical

Field Strength of Band-edge Compliance						
Average Value						
Frequency	Measured Level @3m	Correction Factor	Field Strength	Limit @3m	Margin	E-Field Polarity
MHz	dB μ V	dB/m	dB μ V/m	dB μ V/m	dB	
2390.0	6.1	36.8	42.9	54.0	11.1	Vertical

Result: RF Radiated Emissions (Highest) -802.11n20

Field Strength of Band-edge Compliance						
Peak Value						
Frequency	Measured Level @3m	Correction Factor	Field Strength	Limit @3m	Margin	E-Field Polarity
MHz	dB μ V	dB/m	dB μ V/m	dB μ V/m	dB	
2483.5	14.7	36.4	51.1	74.0	22.9	Horizontal

Field Strength of Band-edge Compliance						
Average Value						
Frequency	Measured Level @3m	Correction Factor	Field Strength	Limit @3m	Margin	E-Field Polarity
MHz	dB μ V	dB/m	dB μ V/m	dB μ V/m	dB	
2483.5	4.0	36.4	40.4	54.0	13.6	Horizontal



Test Report

Date : 2018-11-07
No. : HMD18110009

Page 22 of 58

Limits for Radiated Emissions FCC 47 CFR 15.247]:


Frequency Range [MHz]	Quasi-Peak Limits [μV/m]
0.009-0.490	2400/F (kHz)
0.490-1.705	24000/F (kHz)
1.705-30	30
30-88	100
88-216	150
216-960	200
Above960	500

The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.

Results of WiFi mode (2412MHz, 802.11b) (30MHz – 1GHz): Pass

Please refer to the following table for result details(The data is the worst cases)

Horizontal

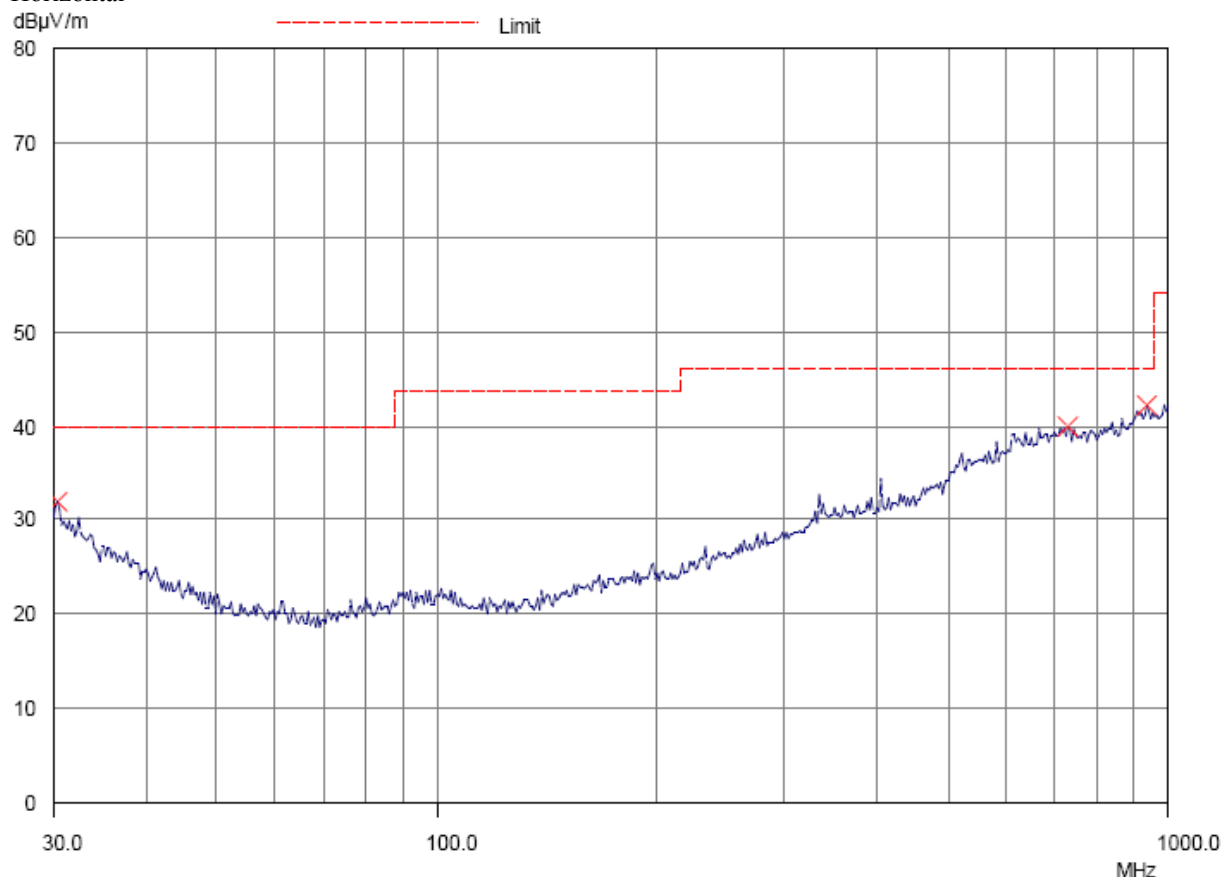

The Hong Kong Standards and Testing Centre Limited

Head Office: 10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Unit B, 10/F, Block 1, Tai Ping Industrial Centre, No. 57 Ting Kok Road, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@hkstc.org Website: www.stc-group.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website



Test Report

Date : 2018-11-07
No. : HMD18110009

Page 23 of 58

Result of WiFi mode (2412MHz, 802.11b) (30MHz – 1GHz): Pass

Radiated Emissions Quasi-Peak					
Emission Frequency MHz	E-Field Polarity	Level @3m dB μ V/m	Limit @3m dB μ V/m	Level @3m μ V/m	Limit @3m μ V/m
30.2	Horizontal	28.9	40.0	27.9	100
728.1	Horizontal	35.9	46.0	62.4	200
932.3	Horizontal	36.6	46.0	67.6	200

The Hong Kong Standards and Testing Centre Limited

Head Office: 10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Unit B, 10/F, Block 1, Tai Ping Industrial Centre, No. 57 Ting Kok Road, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@hkstc.org Website: www.stc-group.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website

Test Report

Date : 2018-11-07
 No. : HMD18110009

Page 24 of 58

Limits for Radiated Emissions FCC 47 CFR 15.247 Class B]:

Frequency Range [MHz]	Quasi-Peak Limits [$\mu\text{V}/\text{m}$]
0.009-0.490	2400/F (kHz)
0.490-1.705	24000/F (kHz)
1.705-30	30
30-88	100
88-216	150
216-960	200
Above960	500


The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.

Results of WiFi mode (2412MHz, 802.11b) (30MHz – 1GHz): Pass

Please refer to the following table for result details(The data is the worst cases)

Vertical

$\text{dB}\mu\text{V}/\text{m}$

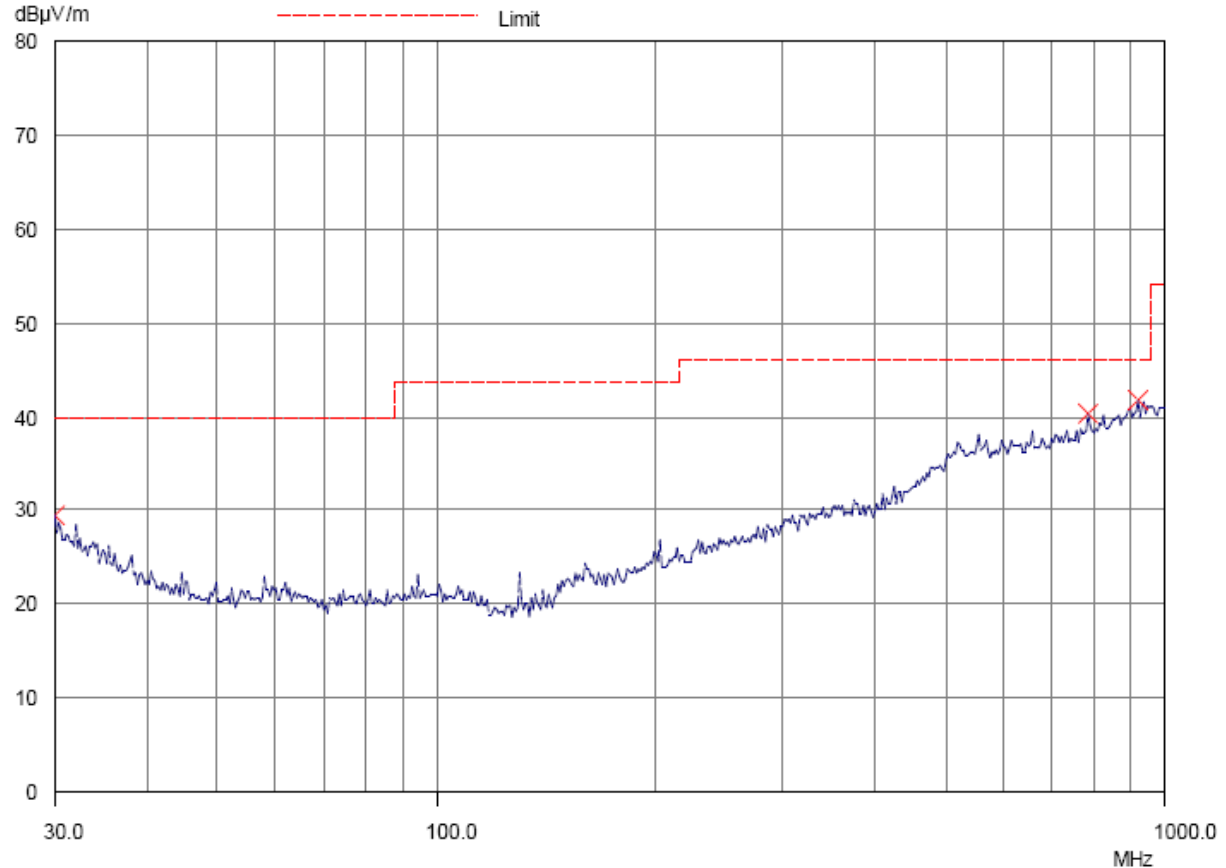

The Hong Kong Standards and Testing Centre Limited

Head Office: 10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Unit B, 10/F, Block 1, Tai Ping Industrial Centre, No. 57 Ting Kok Road, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@hkstc.org Website: www.stc-group.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website



Test Report

Date : 2018-11-07
No. : HMD18110009

Page 25 of 58

Result of WiFi mode (2412MHz, 802.11b) (30MHz – 1GHz): Pass

Radiated Emissions Quasi-Peak					
Emission Frequency MHz	E-Field Polarity	Level @3m dB μ V/m	Limit @3m dB μ V/m	Level @3m μ V/m	Limit @3m μ V/m
30.0	Vertical	26.4	40.0	20.9	100
783.3	Vertical	36.0	46.0	63.1	200
916.6	Vertical	36.5	46.0	66.8	200

Remarks:

Calculated measurement uncertainty (30MHz – 1GHz): 4.9dB

Emissions in the vertical and horizontal polarizations have been investigated and the worst-case test results are recorded in this report.

The Hong Kong Standards and Testing Centre Limited

Head Office: 10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Unit B, 10/F, Block 1, Tai Ping Industrial Centre, No. 57 Ting Kok Road, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@hkstc.org Website: www.stc-group.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website



Test Report

Date : 2018-11-07
No. : HMD18110009

Page 26 of 58

3.1.3 Power Spectral Density

Test Requirement: FCC 47CFR 15.247(e)
Test Method: ANSI C63.10:2013
Test Date: 2018-11-01
Mode of Operation: Wifi mode

Ambient Temperature: 25°C Relative Humidity: 51% Atmospheric Pressure: 101 kPa

Test Method:

The RF output of the EUT was connected to the spectrum analyzer. Set the fundamental frequency as the center frequency of the spectral analyzer. Use RBW=100kHz , VBW= 300KHz , Set the span to 1.5 times the DTS channel bandwidth. Detector = peak, Sweep time = auto couple , Trace mode = max hold. Measure the Power Spectral Density (PSD) and record the results in dBm.

Test Setup:

As Test Setup of clause 3.1.1 in this test report.

Test Limit:

The maximum power spectral density (PSD) shall not exceeded 8dBm in any 3kHz band.

Scale the observed power level to an equivalent value in 3 kHz by adjusting (reducing) the measured power by a bandwidth correction factor (BWCF) where $BWCF=10\log(3\text{ kHz}/100\text{ kHz})=-15.2\text{dB}$

Results of WiFi Mode 802.11 b (Tx:2412MHz to 2462MHz) : Pass (TX Unit)

Maximum power spectral density

Transmitter Frequency (MHz)	Maximum Power spectral density level / 3kHz band (dBm)	Maximum Power spectral density / 3kHz band limit
2412.0	-9.16	8dBm
2437.0	-9.40	8dBm
2462.0	-10.42	8dBm

The Hong Kong Standards and Testing Centre Limited

Head Office: 10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Unit B, 10/F, Block 1, Tai Ping Industrial Centre, No. 57 Ting Kok Road, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@hkstc.org Website: www.stc-group.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website



Test Report

Date : 2018-11-07
No. : HMD18110009

Page 27 of 58

Results of WiFi Mode 802.11 g (Tx:2412MHz to 2462MHz) : Pass (TX Unit)

Maximum power spectral density

Transmitter Frequency (MHz)	Maximum Power spectral density level / 3kHz band (dBm)	Maximum Power spectral density / 3kHz band limit
2412.0	-12.91	8dBm
2437.0	-13.42	8dBm
2462.0	-14.41	8dBm

Results of WiFi Mode 802.11 n20 (Tx:2412MHz to 2462MHz) : Pass (TX Unit)

Maximum power spectral density

Transmitter Frequency (MHz)	Maximum Power spectral density level / 3kHz band (dBm)	Maximum Power spectral density / 3kHz band limit
2412.0	-13.43	8dBm
2437.0	-13.38	8dBm
2462.0	-16.27	8dBm

The Hong Kong Standards and Testing Centre Limited

Head Office: 10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Unit B, 10/F, Block 1, Tai Ping Industrial Centre, No. 57 Ting Kok Road, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@hkstc.org Website: www.stc-group.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website




Test Report


Date : 2018-11-07
No. : HMD18110009

Page 28 of 58

WiFi mode 802.11 b, (Tx: 2412MHz to 2462MHz)
CH 1 (2412.0 MHz)

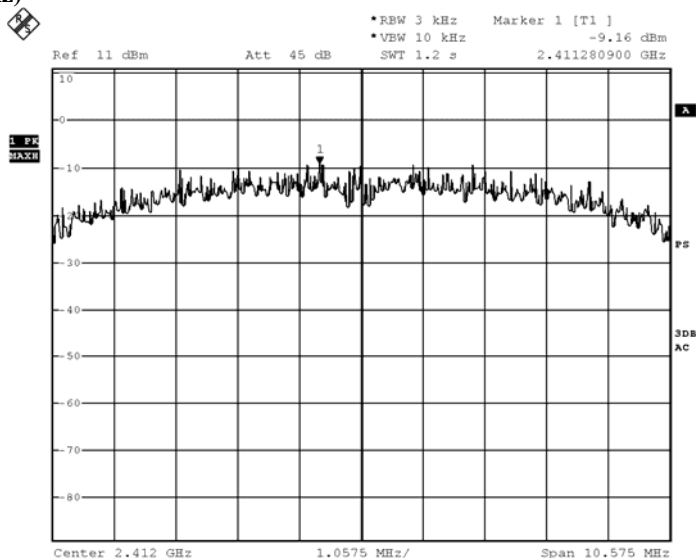

CH 6 (2437.0 MHz)

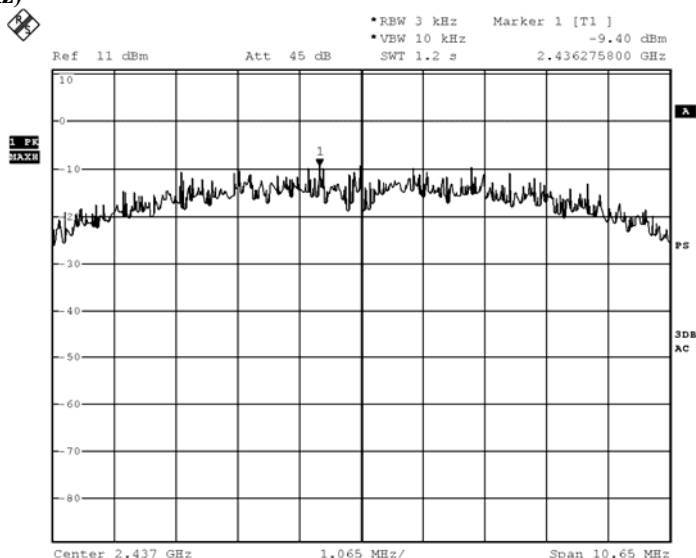

The Hong Kong Standards and Testing Centre Limited

Head Office: 10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Unit B, 10/F, Block 1, Tai Ping Industrial Centre, No. 57 Ting Kok Road, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@hkstc.org Website: www.stc-group.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website




Test Report


Date : 2018-11-07
No. : HMD18110009

Page 29 of 58

CH 11 (2462.0 MHz)

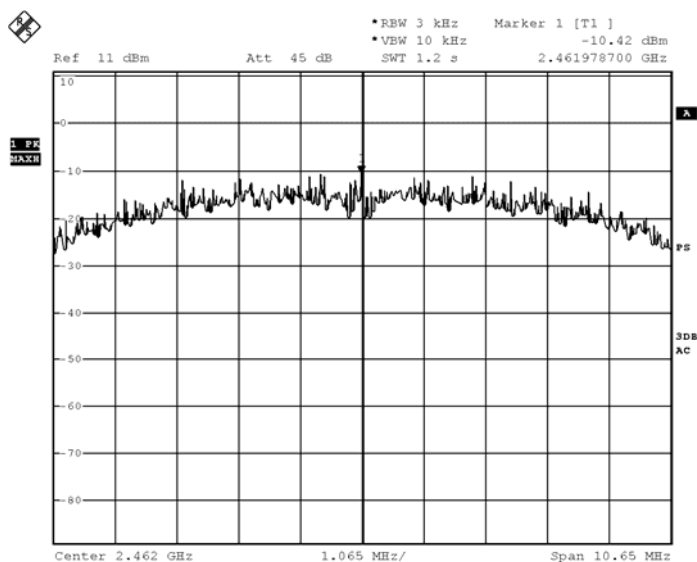

WiFi mode 802.11 g, (Tx:2412MHz to 2462MHz)
Ch 1 (2412.0 MHz)

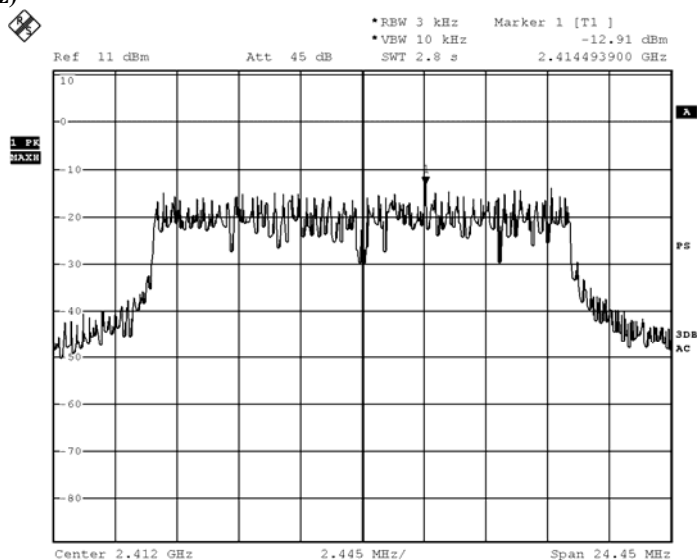

The Hong Kong Standards and Testing Centre Limited

Head Office: 10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Unit B, 10/F, Block 1, Tai Ping Industrial Centre, No. 57 Ting Kok Road, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@hkstc.org Website: www.stc-group.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website




Test Report


Date : 2018-11-07
No. : HMD18110009

Page 30 of 58

CH 6 (2437.0 MHz)

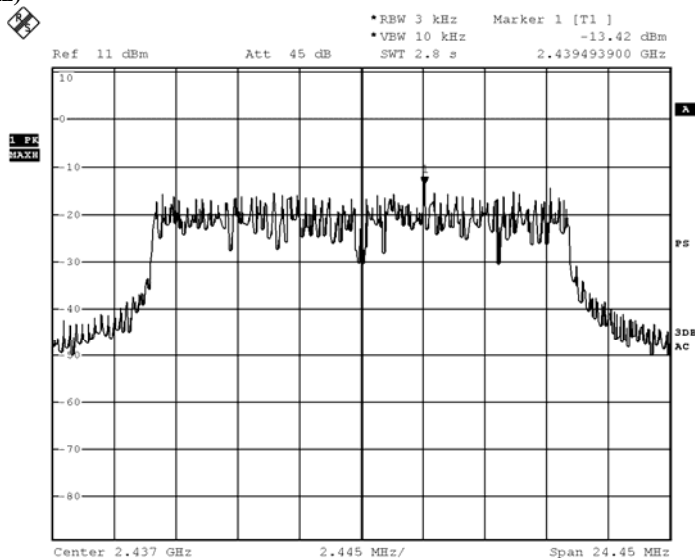

CH 11 (2462.0 MHz)

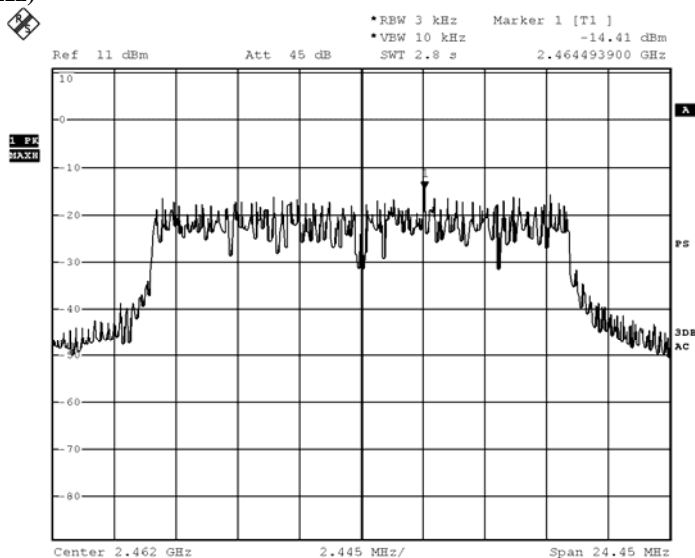

The Hong Kong Standards and Testing Centre Limited

Head Office: 10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Unit B, 10/F, Block 1, Tai Ping Industrial Centre, No. 57 Ting Kok Road, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@hkstc.org Website: www.stc-group.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website




Test Report


Date : 2018-11-07
No. : HMD18110009

Page 31 of 58

WiFi mode 802.11 n20, (Tx: 2412MHz to 2462MHz)
CH 1 (2412.0 MHz)

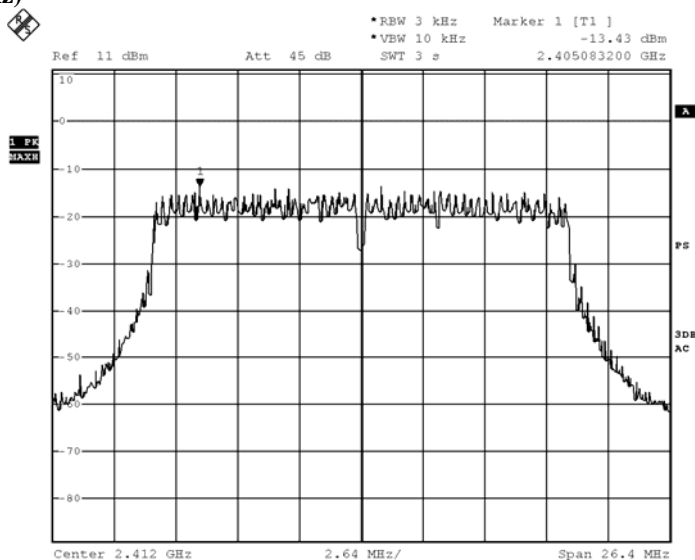

CH 6 (2437.0 MHz)

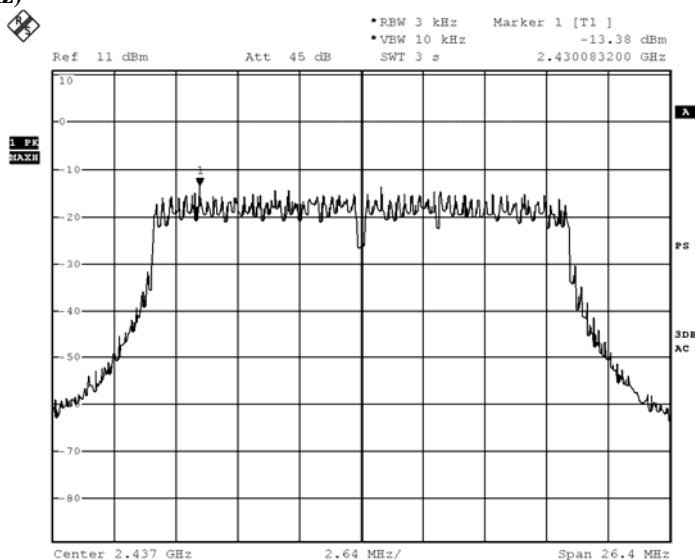

The Hong Kong Standards and Testing Centre Limited

Head Office: 10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Unit B, 10/F, Block 1, Tai Ping Industrial Centre, No. 57 Ting Kok Road, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@hkstc.org Website: www.stc-group.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website




Test Report

Date : 2018-11-07
No. : HMD18110009

Page 32 of 58

Ch 11 (2462.0 MHz)

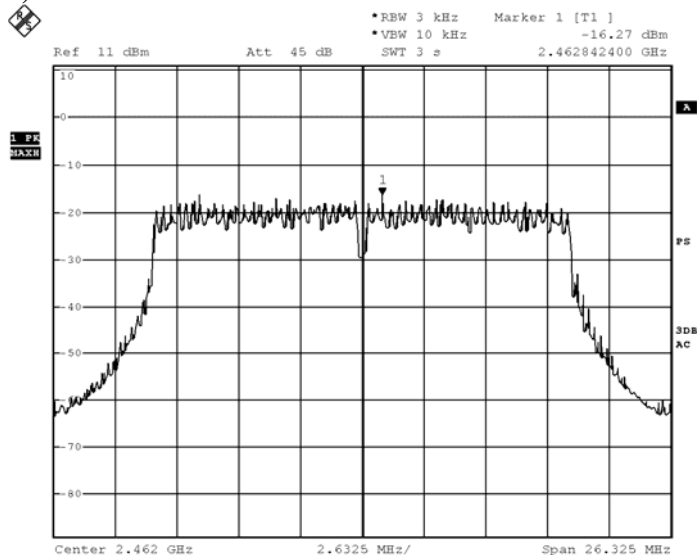

The Hong Kong Standards and Testing Centre Limited

Head Office: 10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Unit B, 10/F, Block 1, Tai Ping Industrial Centre, No. 57 Ting Kok Road, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@hkstc.org Website: www.stc-group.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website



Test Report

Date : 2018-11-07
No. : HMD18110009

Page 33 of 58

3.1.4 6dB Spectrum Bandwidth Measurement

Test Requirement: FCC 47CFR 15.247(a)(2)
Test Method: ANSI C63.10:2013
Test Date: 2018-11-02
Mode of Operation: WiFi mode

Ambient Temperature: 25°C Relative Humidity: 51% Atmospheric Pressure: 101 kPa

Test Method:

The bandwidth is measured at an amplitude level reduced from the reference level by a specified ratio. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. Once the reference level is established, the equipment is conditioned with typical modulating signal to produce the worst-case (i.e. the widest) bandwidth.

Spectrum Analyzer Setting:

RBW = 100kHz, VBW \geq 3*RBW, Sweep = Auto couple
Detector = Peak, Trace = Max. hold

Test Setup:

As Test Setup of clause 3.1.1 in this test report.

The Hong Kong Standards and Testing Centre Limited

Head Office: 10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Unit B, 10/F, Block 1, Tai Ping Industrial Centre, No. 57 Ting Kok Road, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@hkstc.org Website: www.stc-group.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website



Test Report


Date : 2018-11-07
 No. : HMD18110009

Page 34 of 58

Limits for 6dB Spectrum Bandwidth Measurement:

Center Frequency	6dB Bandwidth	FCC Limits
[MHz]	[MHz]	[kHz]
2412.0	7.05	> 500

6dB Bandwidth of Fundamental Emission on 802.11 b (2412MHz)

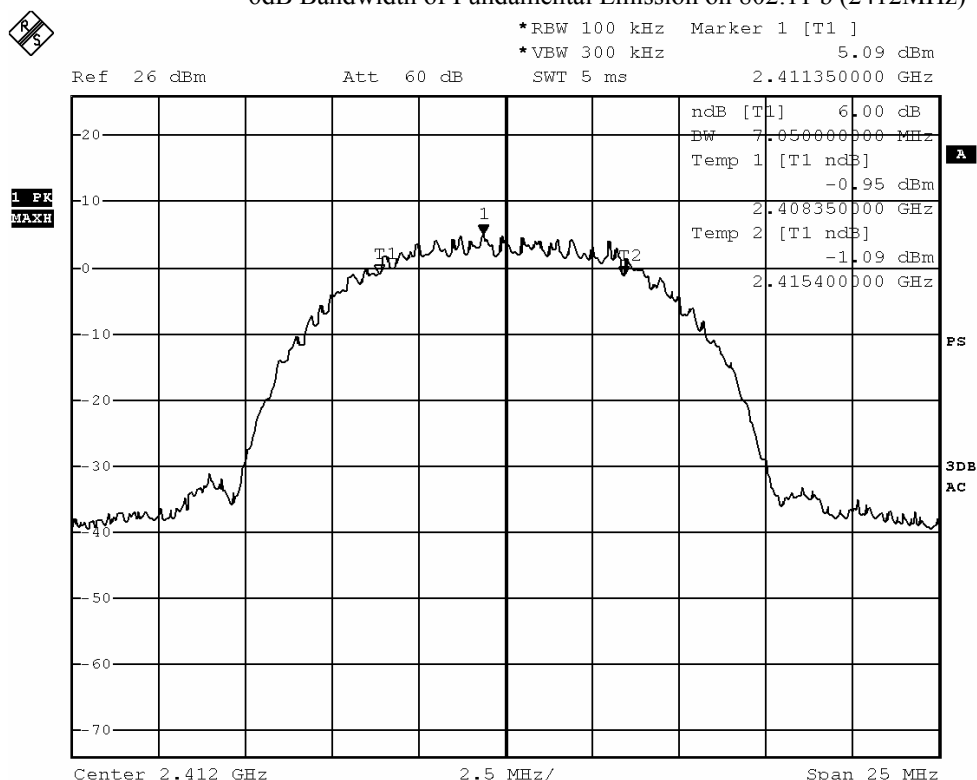

The Hong Kong Standards and Testing Centre Limited

Head Office: 10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Unit B, 10/F, Block 1, Tai Ping Industrial Centre, No. 57 Ting Kok Road, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@hkstc.org Website: www.stc-group.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website



Test Report


Date : 2018-11-07
 No. : HMD18110009

Page 35 of 58

Limits for 6dB Spectrum Bandwidth Measurement:

Frequency Range	6dB Bandwidth	FCC Limits
[MHz]	[MHz]	[kHz]
2437.0	7.10	> 500

6dB Bandwidth of Fundamental Emission on 802.11 b (2437MHz)

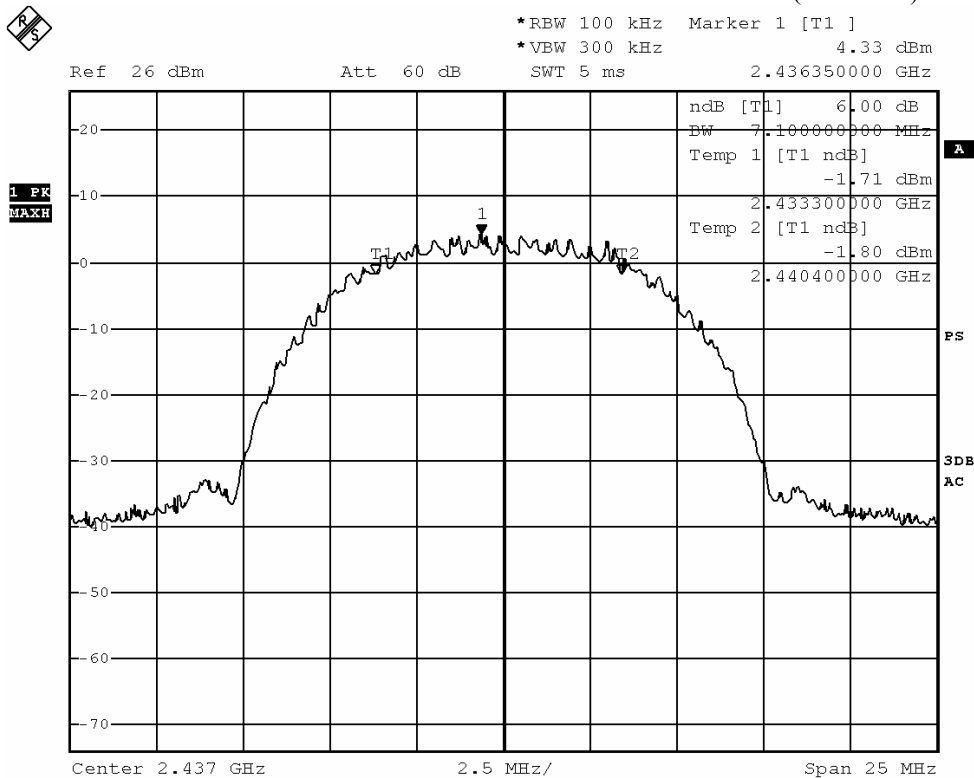

The Hong Kong Standards and Testing Centre Limited

Head Office: 10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Unit B, 10/F, Block 1, Tai Ping Industrial Centre, No. 57 Ting Kok Road, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@hkstc.org Website: www.stc-group.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website



Test Report


Date : 2018-11-07
 No. : HMD18110009

Page 36 of 58

Limits for 6dB Spectrum Bandwidth Measurement:

Frequency Range	6dB Bandwidth	FCC Limits
[MHz]	[MHz]	[kHz]
2462.0	7.10	> 500

6dB Bandwidth of Fundamental Emission on 802.11 b (2462MHz)

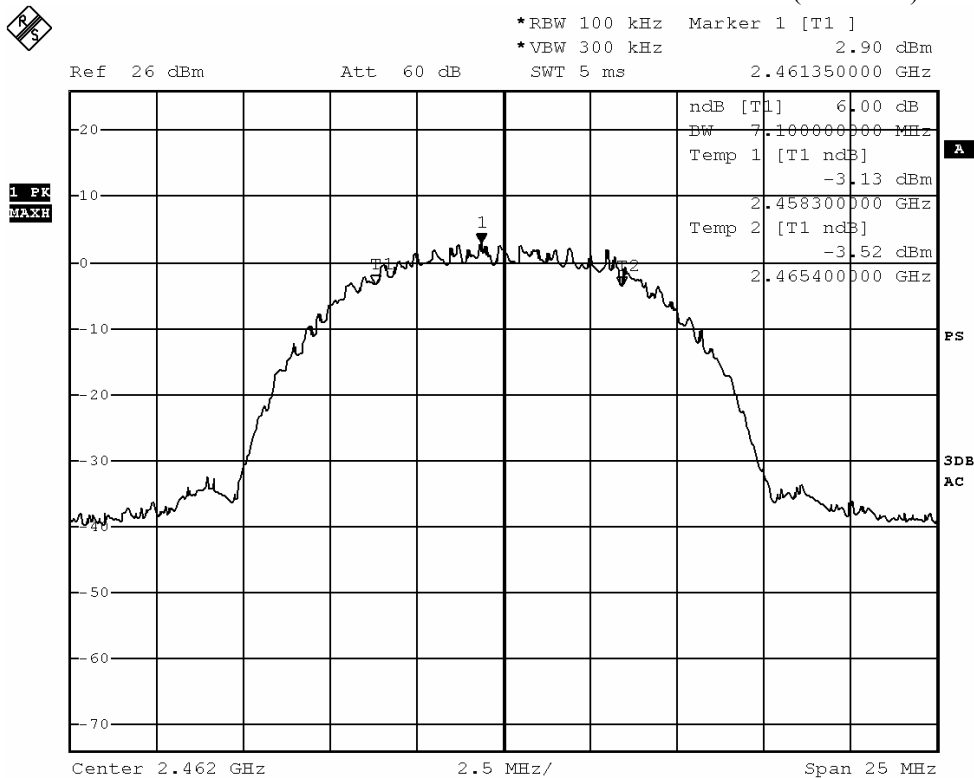

The Hong Kong Standards and Testing Centre Limited

Head Office: 10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Unit B, 10/F, Block 1, Tai Ping Industrial Centre, No. 57 Ting Kok Road, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@hkstc.org Website: www.stc-group.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website



Test Report

Date : 2018-11-07
 No. : HMD18110009

Page 37 of 58


Limits for 6dB Spectrum Bandwidth Measurement:

Center Frequency	6dB Bandwidth	FCC Limits
[MHz]	[MHz]	[kHz]
2412.0	16.30	> 500

6dB Bandwidth of Fundamental Emission on 802.11 g (2412MHz)



*RBW 100 kHz Marker 1 [T1]
 *VBW 300 kHz -5.66 dBm
 Ref 26 dBm Att 60 dB SWT 5 ms 2.403850000 GHz

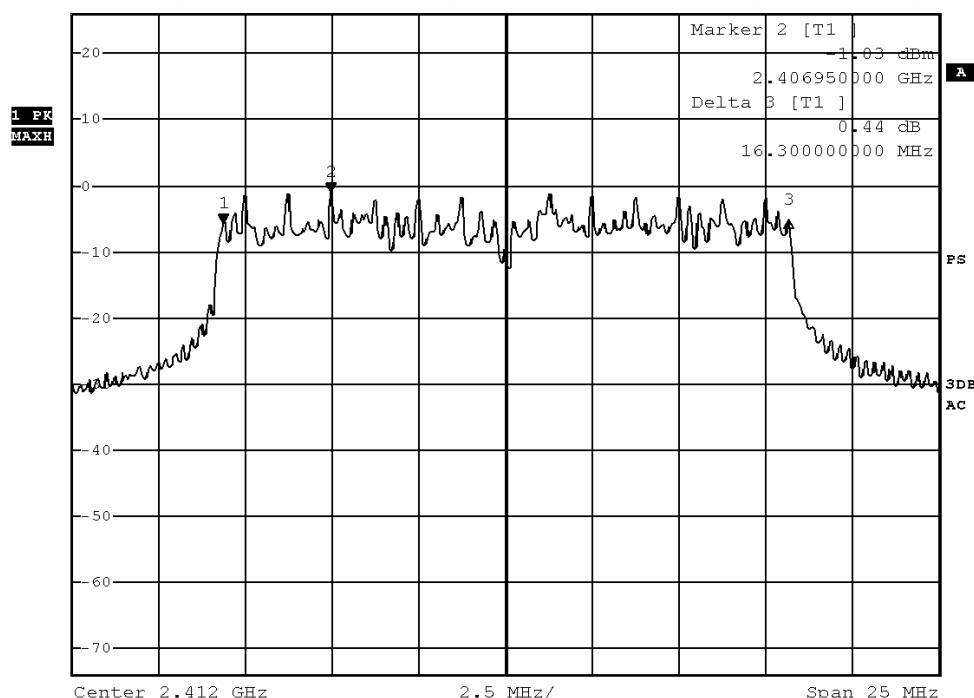



Test Report


Date : 2018-11-07
 No. : HMD18110009

Page 38 of 58

Limits for 6dB Spectrum Bandwidth Measurement:

Frequency Range [MHz]	6dB Bandwidth [MHz]	FCC Limits [kHz]
2437.0	16.30	> 500

6dB Bandwidth of Fundamental Emission on 802.11 g (2437MHz)

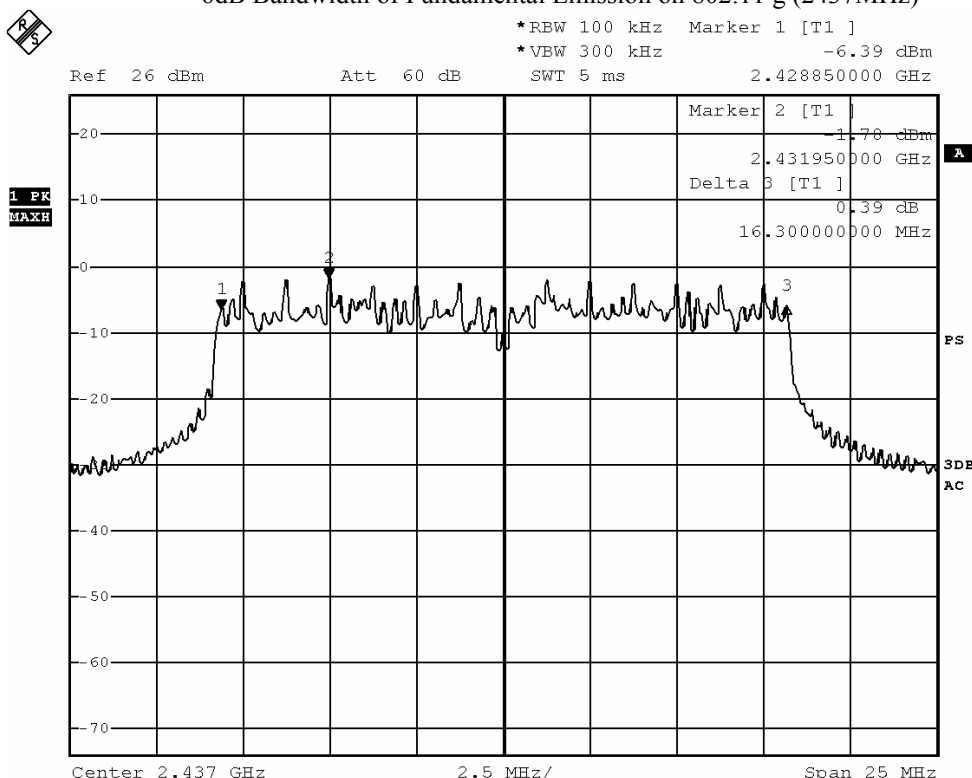

The Hong Kong Standards and Testing Centre Limited

Head Office: 10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Unit B, 10/F, Block 1, Tai Ping Industrial Centre, No. 57 Ting Kok Road, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@hkstc.org Website: www.stc-group.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website



Test Report


Date : 2018-11-07
 No. : HMD18110009

Page 39 of 58

Limits for 6dB Spectrum Bandwidth Measurement:

Frequency Range [MHz]	6dB Bandwidth [MHz]	FCC Limits [kHz]
2462.0	16.30	> 500

6dB Bandwidth of Fundamental Emission on 802.11 g (2462MHz)

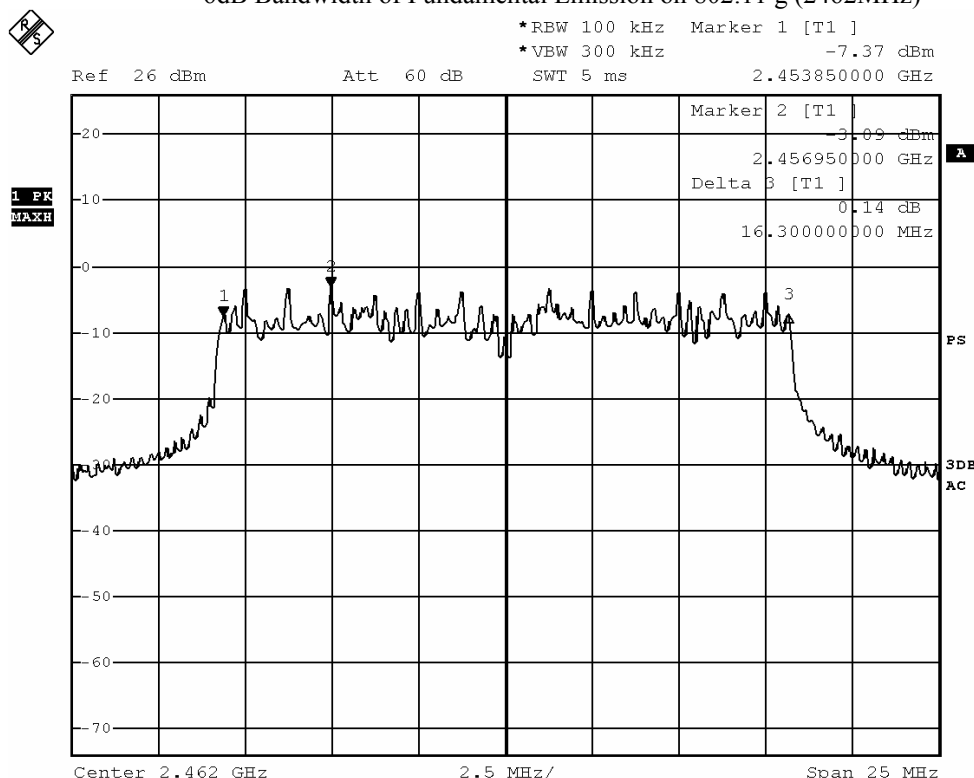

The Hong Kong Standards and Testing Centre Limited

Head Office: 10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Unit B, 10/F, Block 1, Tai Ping Industrial Centre, No. 57 Ting Kok Road, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@hkstc.org Website: www.stc-group.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website



Test Report


Date : 2018-11-07
 No. : HMD18110009

Page 40 of 58

Limits for 6dB Spectrum Bandwidth Measurement:

Center Frequency [MHz]	6dB Bandwidth [MHz]	FCC Limits [kHz]
2412.0	17.60	> 500

6dB Bandwidth of Fundamental Emission on 802.11 n20 (2412MHz)

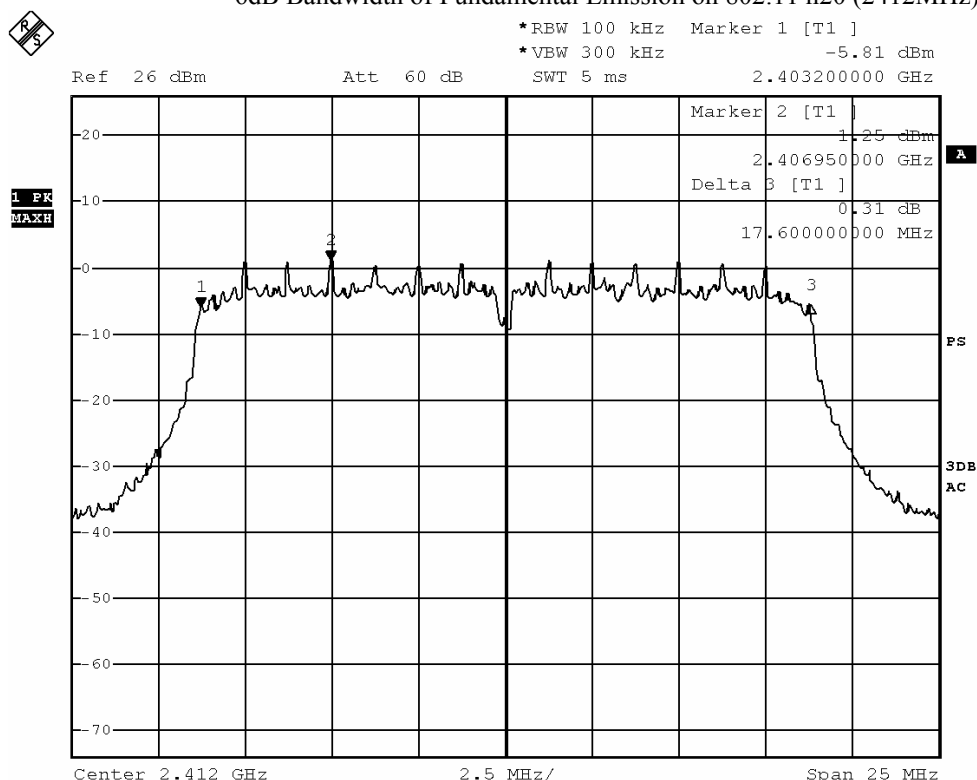



Test Report


Date : 2018-11-07
 No. : HMD18110009

Page 41 of 58

Limits for 6dB Spectrum Bandwidth Measurement:

Frequency Range [MHz]	6dB Bandwidth [MHz]	FCC Limits [kHz]
2437.0	17.60	> 500

6dB Bandwidth of Fundamental Emission on 802.11 n20 (2437MHz)

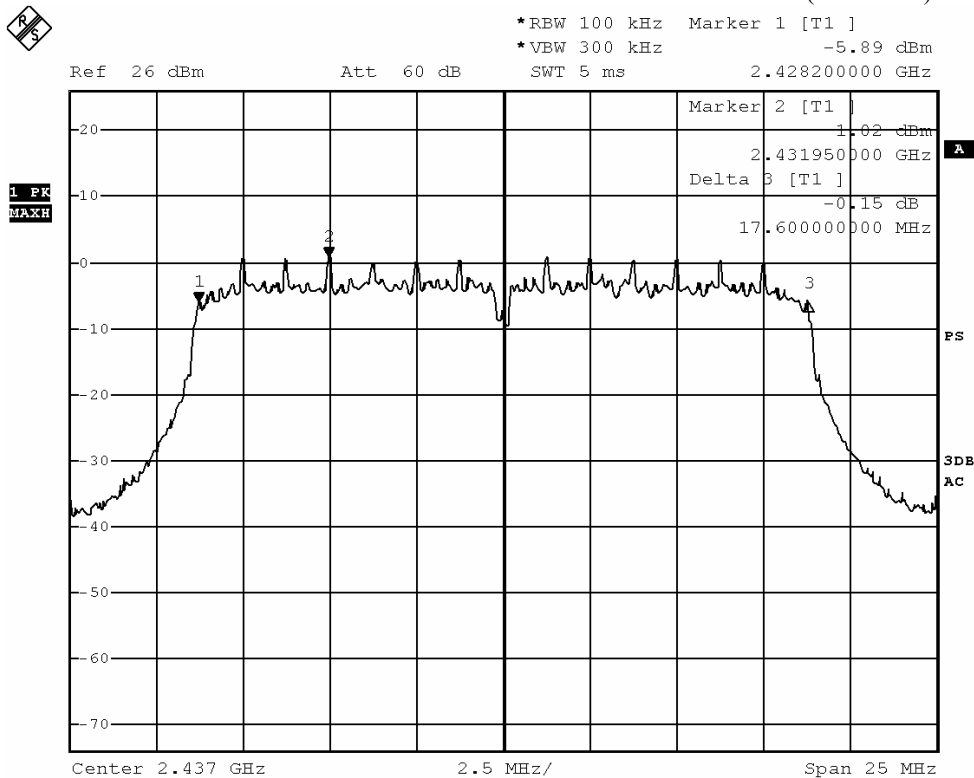



Test Report


Date : 2018-11-07
 No. : HMD18110009

Page 42 of 58

Limits for 6dB Spectrum Bandwidth Measurement:

Frequency Range [MHz]	6dB Bandwidth [MHz]	FCC Limits [kHz]
2462.0	17.55	> 500

6dB Bandwidth of Fundamental Emission on 802.11 n20 (2462MHz)

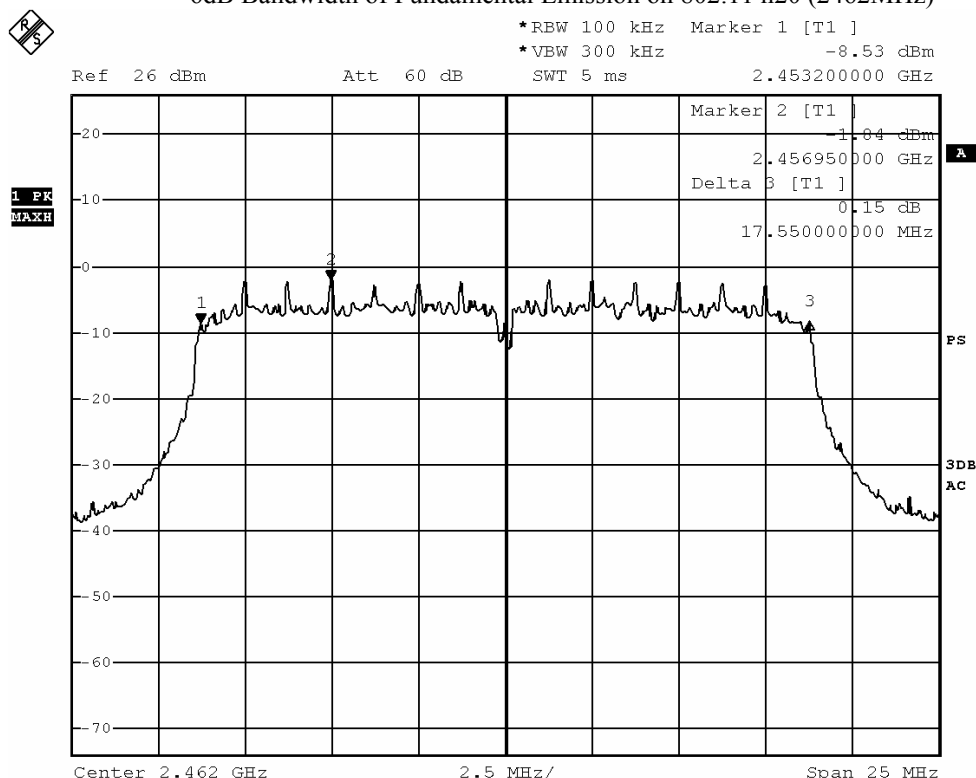



Test Report

Date : 2018-11-07
No. : HMD18110009

Page 43 of 58

3.1.5 Band Edges Measurement

Test Requirement: FCC 47CFR 15.247
Test Method: ANSI C63.10:2013
Test Date: 2018-11-02
Mode of Operation: Wifi mode

Ambient Temperature: 25°C Relative Humidity: 51% Atmospheric Pressure: 101 kPa

Test Method:

The band edge is measured at an amplitude level reduced from the reference level by a specified ratio. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. The RBW are set to 100kHz and VBW are set to 300kHz for this measurement.

Test Setup:

As Test Setup of clause 3.1.2 in this test report.

The Hong Kong Standards and Testing Centre Limited

Head Office: 10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Unit B, 10/F, Block 1, Tai Ping Industrial Centre, No. 57 Ting Kok Road, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@hkstc.org Website: www.stc-group.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website



Test Report


Date : 2018-11-07
 No. : HMD18110009

Page 45 of 58

Band-edge Compliance of RF Conducted Emissions Measurement:

Frequency Range [MHz]	Conducted Emission Attenuated below the Fundamental [dB]
2483.5 - Highest Fundamental (2480)	54.45

Band-edge Compliance of RF Emissions – Highest (802.11b)

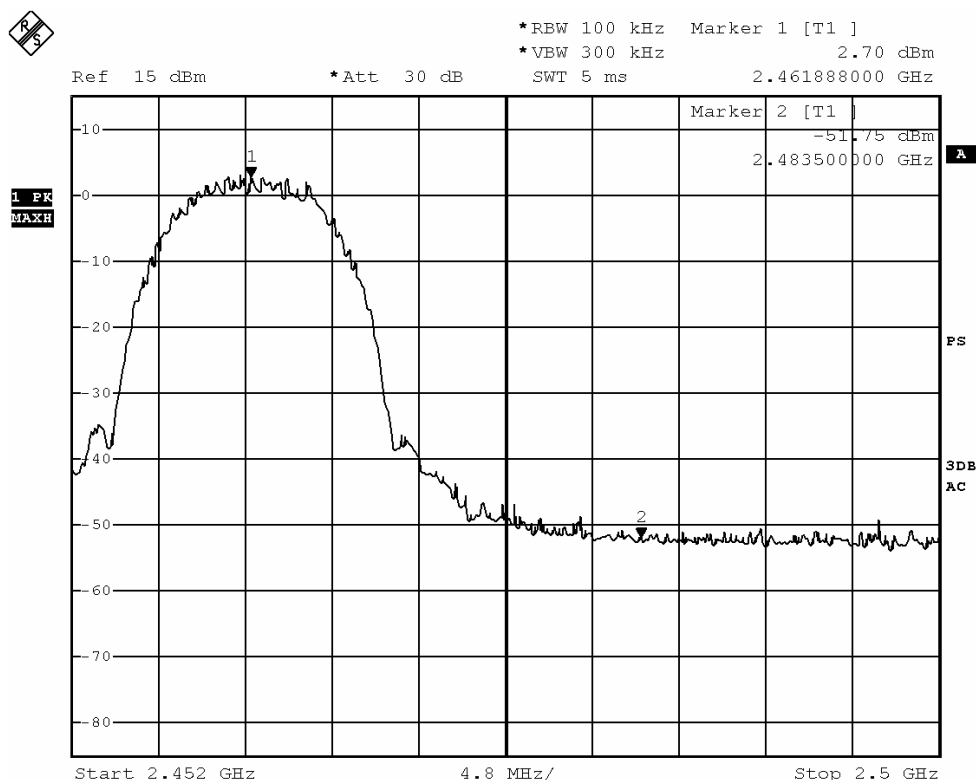



Test Report


Date : 2018-11-07
 No. : HMD18110009

Page 47 of 58

Band-edge Compliance of RF Conducted Emissions Measurement:

Frequency Range [MHz]	Conducted Emission Attenuated below the Fundamental [dB]
2483.5 - Highest Fundamental (2480)	43.38

Band-edge Compliance of RF Emissions – Highest (802.11g)

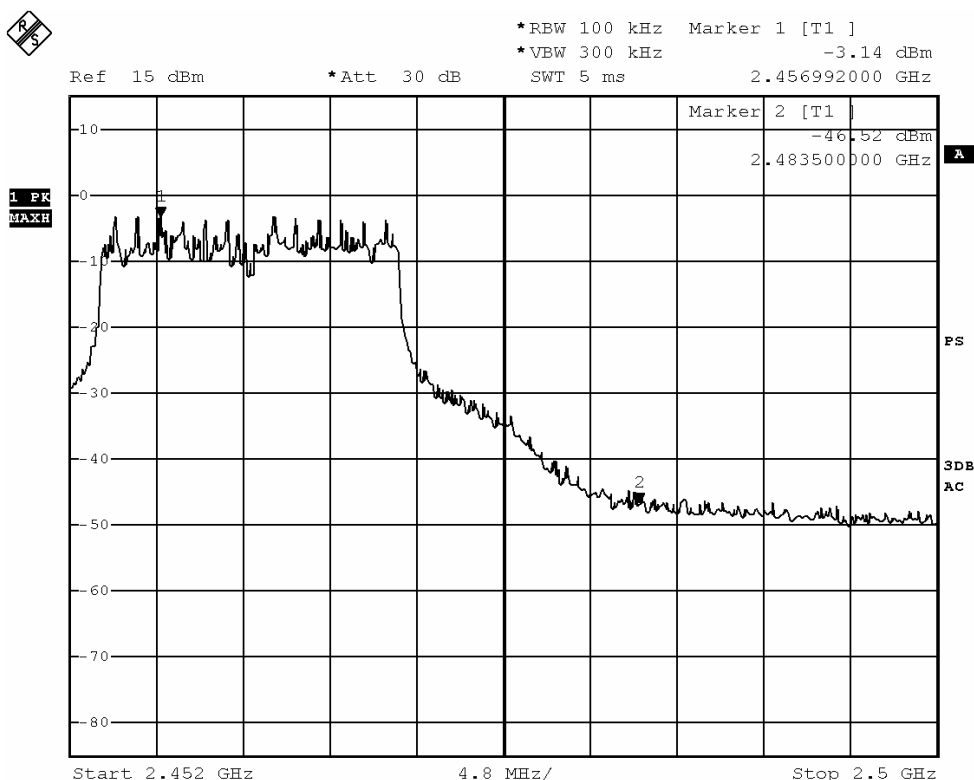



Test Report


Date : 2018-11-07
 No. : HMD18110009

Page 48 of 58

Band-edge Compliance of RF Conducted Emissions Measurement:

Frequency Range [MHz]	Conducted Emission Attenuated below the Fundamental [dB]
2400 - Lowest Fundamental (2402)	42.40

Band-edge Compliance of RF Emissions – Lowest (802.11n20)

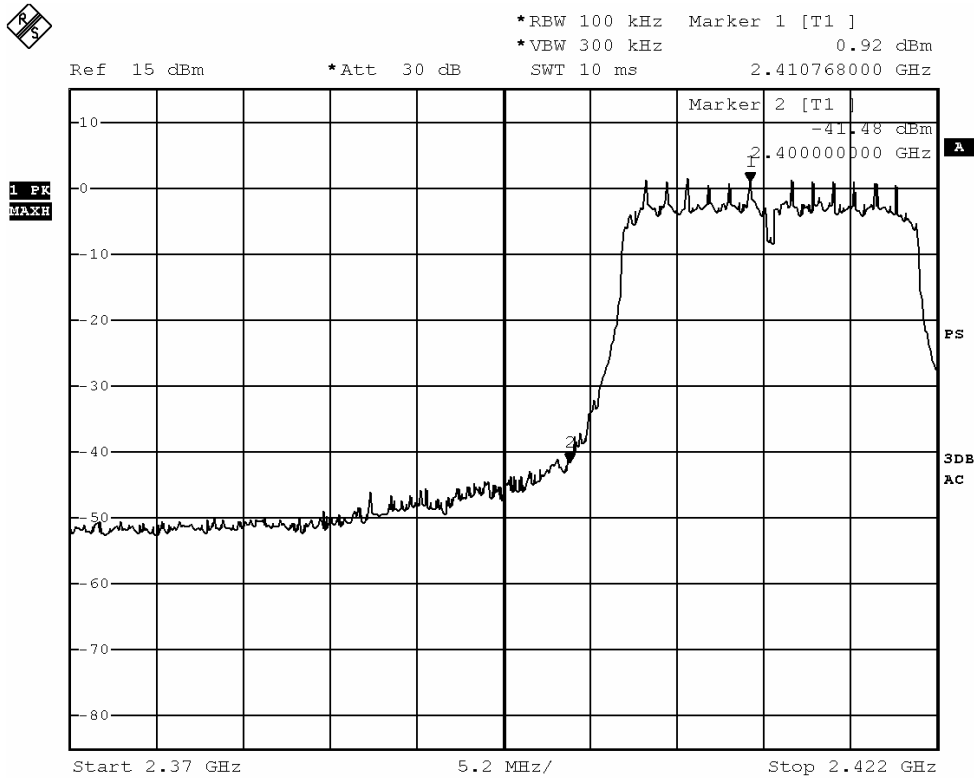



Test Report

Date : 2018-11-07
No. : HMD18110009

Page 50 of 58


Band-edge Compliance of RF Conducted Emissions Measurement:

Limit :

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required.

Remark: Emissions under the fixed frequency mode and hopping mode have been investigated, the worst-case measurement results were recorded in the test report

Band-edge Compliance of RF Emissions (802.11b 2412MHz)

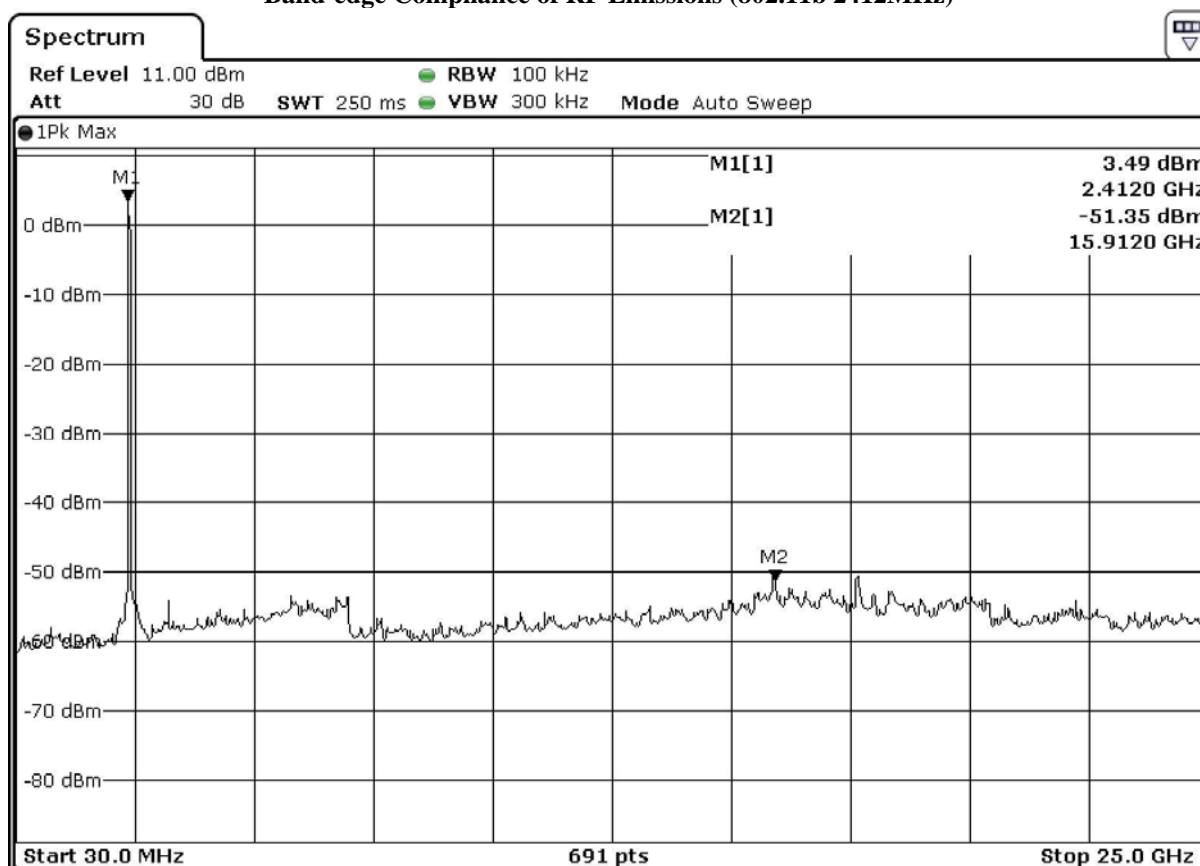

The Hong Kong Standards and Testing Centre Limited

Head Office: 10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Unit B, 10/F, Block 1, Tai Ping Industrial Centre, No. 57 Ting Kok Road, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@hkstc.org Website: www.stc-group.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website




Test Report

Date : 2018-11-07
No. : HMD18110009

Page 51 of 58

Band-edge Compliance of RF Emissions (802.11g 2412MHz)

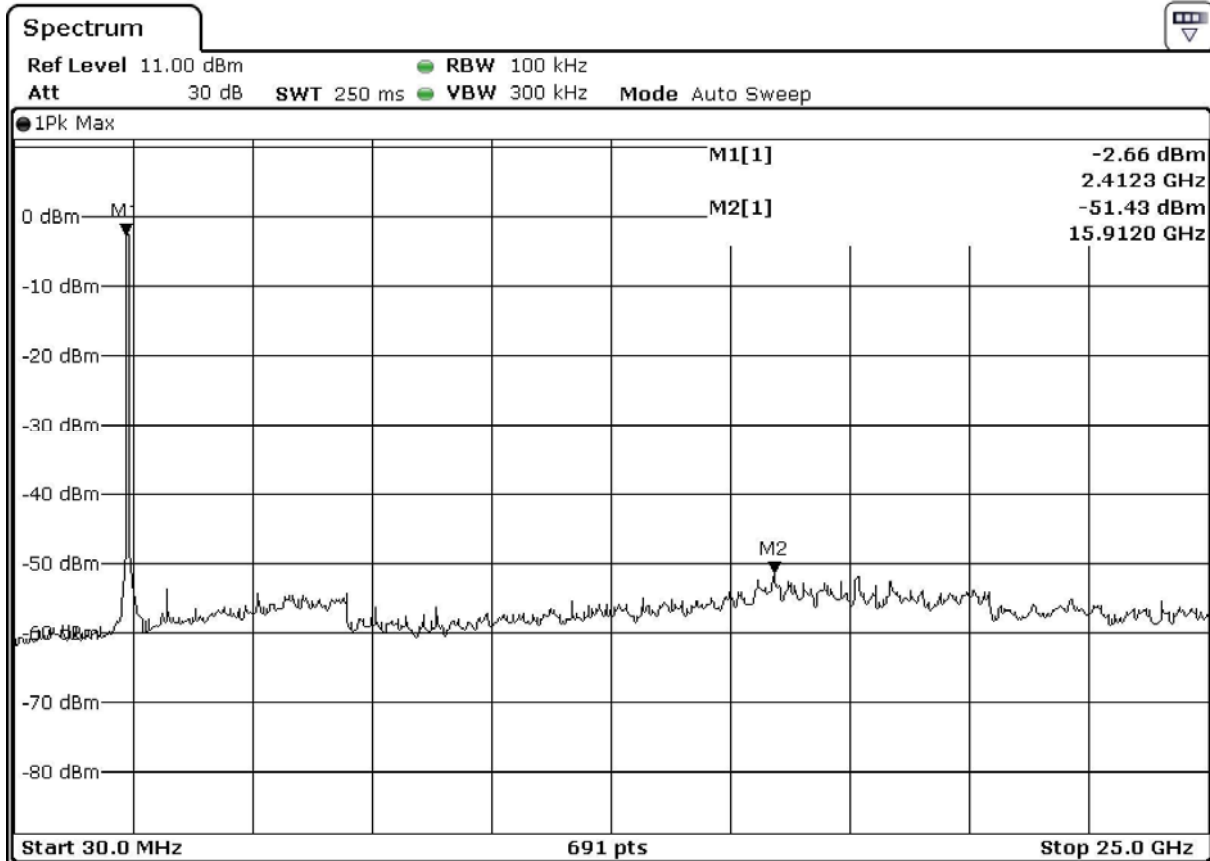




Test Report

Date : 2018-11-07
No. : HMD18110009

Page 52 of 58

Band-edge Compliance of RF Emissions (802.11n20 2412MHz)

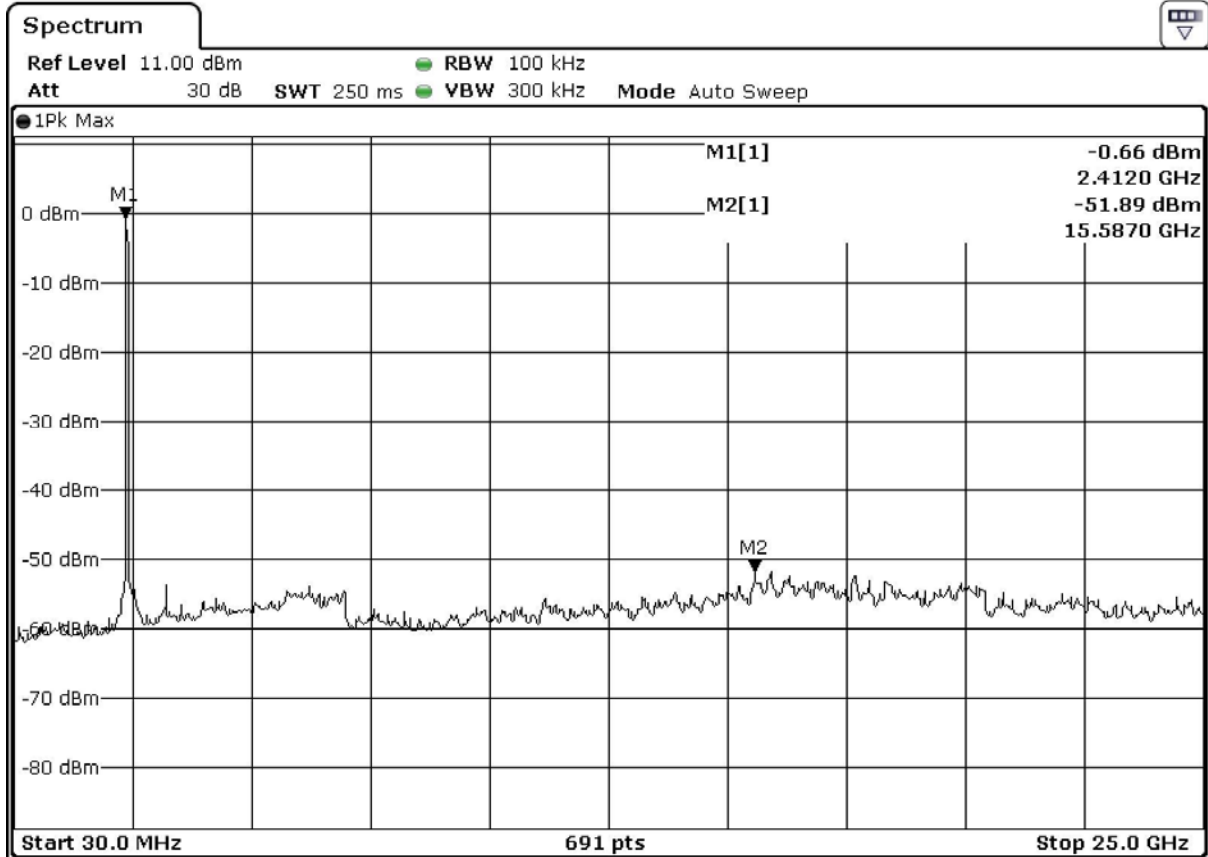



Test Report

Date : 2018-11-07
No. : HMD18110009

Page 53 of 58

3.1.6 Antenna Requirement

Ambient Temperature: 25°C

Relative Humidity: 51%

Atmospheric Pressure: 101 kPa

Test Requirements: § 15.203

Test Specification:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Test Results:

This is PCB antenna. There is no external antenna, the 2014MHz antenna gain = 2.33dBi, the 2437MHz antenna gain = 2.56dBi, the 2462MHz antenna gain = 2.69dBi. User is unable to remove or changed the Antenna.

The Hong Kong Standards and Testing Centre Limited

Head Office: 10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Unit B, 10/F, Block 1, Tai Ping Industrial Centre, No. 57 Ting Kok Road, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@hkstc.org Website: www.stc-group.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website



Test Report

Date : 2018-11-07
No. : HMD18110009

Page 54 of 58

Appendix A

List of Measurement Equipment

Radiated Emission

EQP NO.	DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.	LAST CAL	DUE CAL
EM215	MULTIDEVICE CONTROLLER	EMCO	2090	00024676	N/A	N/A
EM217	ELECTRIC POWERED TURNTABLE	EMCO	2088	00029144	N/A	N/A
EM218	ANECHOIC CHAMBER	ETS-LINDGREN	FACT-3	--	2018/01/24	2019/01/24
EM356	ANTENNA POSITIONING TOWER	ETS-LINDGREN	2171B	00150346	N/A	N/A
EM354	BICONILOG ANTENNA	ETS-LINDGREN	3143B	00142073	2018/03/29	2020/03/29
EM229	EMI TEST RECEIVER	R&S	ESIB40	100248	2018/06/01	2019/06/01
EM276	BROADBAND HORN ANTENNA	A-INFOMW	JXTXLB- 10180-SF	J203109090300 7	2018/04/27	2020/04/27
EM300	PYRAMIDAL STANDARD GAIN HORN ANTENNA	ETS-LINDGREN	3160-09	00130130	2018/05/13	2019/05/13
EM301	PYRAMIDAL STANDARD GAIN HORN ANTENNA	ETS-LINDGREN	3160-10	00130988	2018/05/13	2019/05/13
EM302	PRECISION OMNIDIRECTIONAL DIPOLE (1 – 6GHZ)	SEIBERSDORF LABORATORIES	POD 16	161806/L	2018/05/11	2020/05/11
EM303	PRECISION OMNIDIRECTIONAL DIPOLE (6 – 18GHZ)	SEIBERSDORF LABORATORIES	POD 618	6181908/L	2018/05/11	2020/05/11
EM353	LOOP ANTENNA	ETS LINDGREN	6502	00206533	2018/04/16	2020/04/16
EM045	POWER METER	ROHDE & SCHWARZ	NRVD	843246/028	2018/10/14	2019/10/14

Remarks:-

CM Corrective Maintenance
N/A Not Applicable
TBD To Be Determined

The Hong Kong Standards and Testing Centre Limited

Head Office: 10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Unit B, 10/F, Block 1, Tai Ping Industrial Centre, No. 57 Ting Kok Road, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@hkstc.org Website: www.stc-group.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website

Test Report

Date : 2018-11-07
No. : HMD18110009

Page 55 of 58

Appendix B

Photographs of EUT

Front View of the product




Rear View of the product




Inside View of the product



Inner Circuit Top View

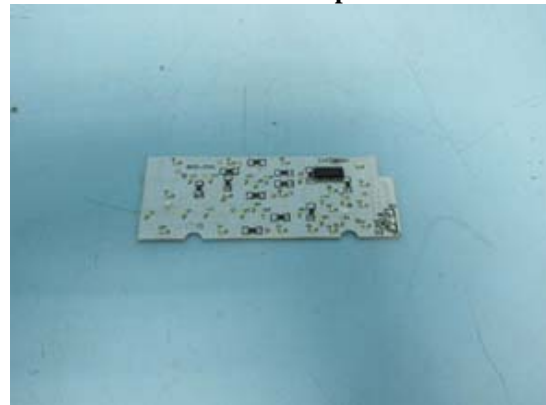

Inner Circuit Bottom View

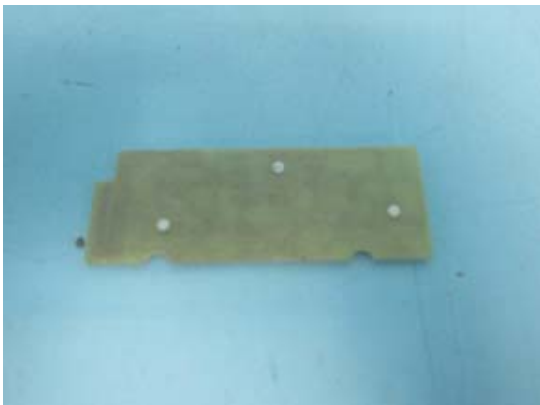

Inner Circuit Top View



The Hong Kong Standards and Testing Centre Limited

Head Office: 10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Unit B, 10/F, Block 1, Tai Ping Industrial Centre, No. 57 Ting Kok Road, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@hkstc.org Website: www.stc-group.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website

Test Report

Date : 2018-11-07
No. : HMD18110009

Page 56 of 58

Appendix B

Photographs of EUT

Inner Circuit Bottom View



The Hong Kong Standards and Testing Centre Limited

Head Office: 10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Unit B, 10/F, Block 1, Tai Ping Industrial Centre, No. 57 Ting Kok Road, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@hkstc.org Website: www.stc-group.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website


Test Report

Date : 2018-11-07
No. : HMD18110009


Page 57 of 58

Photographs of EUT

Measurement of Radiated Emission Test Set Up (9kHz – 30MHz)

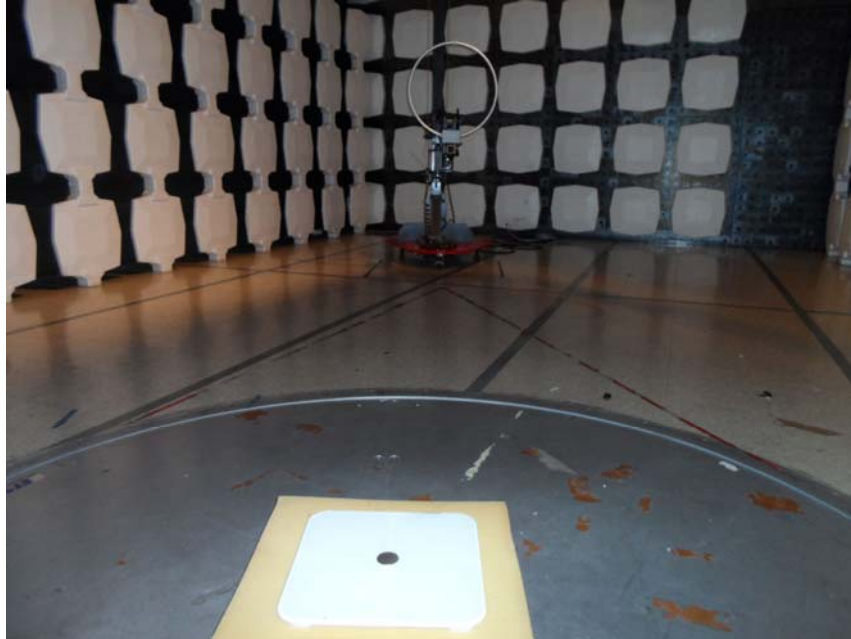

Measurement of Radiated Emission Test Set Up (30MHz – 1000MHz)

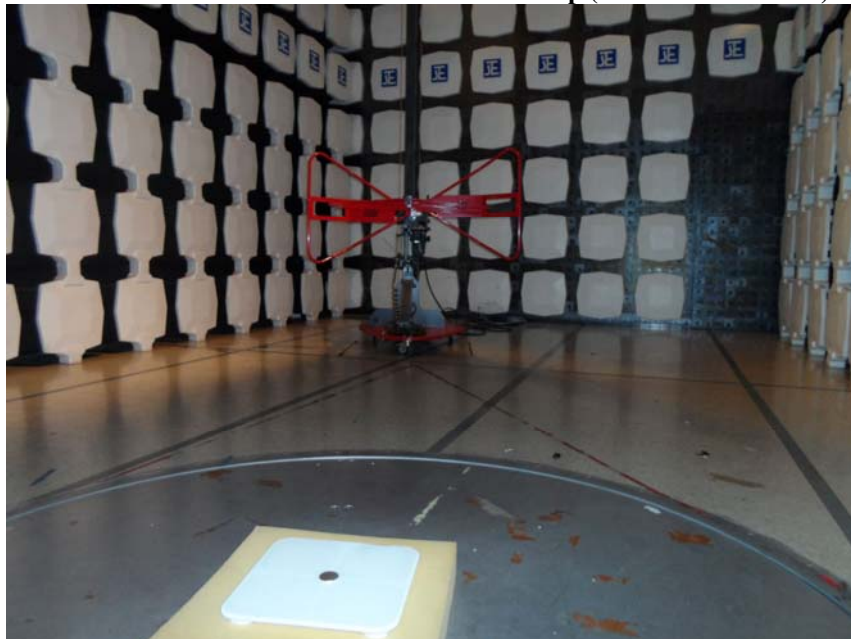

The Hong Kong Standards and Testing Centre Limited

Head Office: 10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Unit B, 10/F, Block 1, Tai Ping Industrial Centre, No. 57 Ting Kok Road, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@hkstc.org Website: www.stc-group.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website


Test Report

Date : 2018-11-07
No. : HMD18110009

Page 58 of 58

Photographs of EUT

Measurement of Radiated Emission Test Set Up (above 1000MHz)

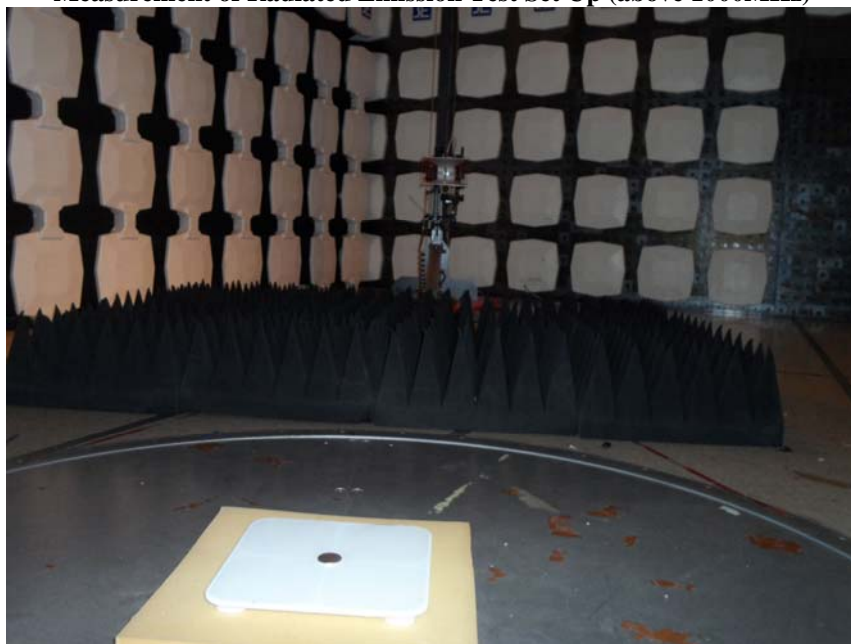

***** End of Test Report *****

The Hong Kong Standards and Testing Centre Limited

Head Office: 10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Unit B, 10/F, Block 1, Tai Ping Industrial Centre, No. 57 Ting Kok Road, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@hkstc.org Website: www.stc-group.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website

Conditions of Issuance of Test Reports

1. All samples and goods are accepted by The Hong Kong Standards & Testing Centre Limited (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The Company provides its services on the basis that such terms and conditions constitute express agreement between the Company and any person, firm or company requesting its services (the "Clients").
2. Any report issued by the Company as a result of this application for testing service (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to his customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.
3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.
4. The Report refers only to the sample tested and does not apply to the bulk, unless the sampling has been carried out by the Company and is stated as such in the Report.
5. In the event of the improper use the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.
6. Sample submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.
7. The Company will not be liable for or accept responsibility for any loss or damage howsoever arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.
8. Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.
9. Subject to the variable length of retention time for test data and report stored hereinto as to otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of this test report for a period of three years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after the retention period. Under no circumstances shall we be liable for damages of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.
10. Issuance records of the Report are available on the internet at www.stc-group.org. Further enquiry of validity or verification of the Reports should be addressed to the Company.