



FCC RADIO TEST REPORT

FCC ID: 2AAEUHW

Product : IP Camera

Trade Name : Dericam

Model Name : H502W

Serial Model : H201W,H202W,H204W,H216W,H218W,H501W,
H503W,H504W,H601W,H602W,H801W,H802W

Report No. : NTEK-2013NT0603110F

Prepared for

Shenzhen Dericam Technology Co., Ltd.
Rm420, Building 4, Zhongxing Industrial Park, Chuangye Rd.,
Nanshan,China

Prepared by

Shenzhen NTEK Testing Technology Co., Ltd.
1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street
Bao'an District, Shenzhen P.R. China
Tel.: +86-0755-61156588 Fax.: +86-0755-61156599
Website:www.ntek.org.cn

TEST RESULT CERTIFICATION

Applicant's name : Shenzhen Dericam Technology Co., Ltd.
Address : Rm420, Building 4, Zhongxing Industrial Park, Chuangye Rd.,
Nanshan,China

Manufacture's Name : Shenzhen Dericam Technology Co., Ltd.
Address : Rm420, Building 4, Zhongxing Industrial Park, Chuangye Rd.,
Nanshan,China

Product description

Product name..... : IP Camera
Model and/or type reference : H502W
Serial Model : H201W,H202W,H204W,H216W,H218W,H501W,
H503W,H504W,H601W,H602W,H801W,H802W

Standards : FCC Part15.247

Test procedure..... ANSI C63.4-2003

This device described above has been tested by NTEK, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of NTEK, this document may be altered or revised by NTEK, personal only, and shall be noted in the revision of the document.

Date of Test :
Date (s) of performance of tests..... : 23 May 2013 ~31 May 2013
Date of Issue..... : 31 May 2013
Test Result..... : **Pass**

Testing Engineer : Apple Huang
(Apple Huang)

Technical Manager : Tom Zhang
(Tom Zhang)

Authorized Signatory : Bovey Yang
(Bovey Yang)

Table of Contents

	Page
1 . SUMMARY OF TEST RESULTS	5
1.1 TEST FACILITY	6
1.2 MEASUREMENT UNCERTAINTY	6
2 . GENERAL INFORMATION	7
2.1 GENERAL DESCRIPTION OF EUT	7
2.2 DESCRIPTION OF TEST MODES	9
2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	10
2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)	11
2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS	12
3 . EMC EMISSION TEST	13
3.1 CONDUCTED EMISSION MEASUREMENT	13
3.1.1 POWER LINE CONDUCTED EMISSION LIMITS	13
3.1.2 TEST PROCEDURE	14
3.1.3 DEVIATION FROM TEST STANDARD	14
3.1.4 TEST SETUP	14
3.1.5 EUT OPERATING CONDITIONS	14
3.1.6 TEST RESULTS	15
3.2 RADIATED EMISSION MEASUREMENT	17
3.2.1 RADIATED EMISSION LIMITS	17
3.2.2 TEST PROCEDURE	18
3.2.3 DEVIATION FROM TEST STANDARD	18
3.2.4 TEST SETUP	19
3.2.5 EUT OPERATING CONDITIONS	20
3.2.6 TEST RESULTS	21
4 . POWER SPECTRAL DENSITY TEST	37
4.1 APPLIED PROCEDURES / LIMIT	37
4.1.1 TEST PROCEDURE	37
4.1.2 DEVIATION FROM STANDARD	37
4.1.3 TEST SETUP	37
4.1.4 EUT OPERATION CONDITIONS	37
4.1.5 TEST RESULTS	38
5 . BANDWIDTH TEST	46
5.1 APPLIED PROCEDURES / LIMIT	46
5.1.1 TEST PROCEDURE	46
5.1.2 DEVIATION FROM STANDARD	46
5.1.3 TEST SETUP	46

Table of Contents

	Page
5.1.4 EUT OPERATION CONDITIONS	46
5.1.5 TEST RESULTS	47
6 . PEAK OUTPUT POWER TEST	55
6.1 APPLIED PROCEDURES / LIMIT	55
6.1.1 TEST PROCEDURE	55
6.1.2 DEVIATION FROM STANDARD	55
6.1.3 TEST SETUP	55
6.1.4 EUT OPERATION CONDITIONS	55
6.1.5 TEST RESULTS	56
7 . 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE	57
7.1 DEVIATION FROM STANDARD	57
7.2 TEST SETUP	57
7.3 EUT OPERATION CONDITIONS	57
7.4 TEST RESULTS	58
8 . ANTENNA REQUIREMENT	63
8.1 STANDARD REQUIREMENT	63
8.2 EUT ANTENNA	63
9 . EUT TEST PHOTO	64
APPENDIX-PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS	

1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 (15.247) , Subpart C			
Standard Section	Test Item	Judgment	Remark
15.207	Conducted Emission	PASS	
15.247 (a)(2)	6dB Bandwidth	PASS	
15.247 (b)	Peak Output Power	PASS	
15.247 (c)	Radiated Spurious Emission	PASS	
15.247 (d)	Power Spectral Density	PASS	
15.205	Band Edge Emission	PASS	
15.203	Antenna Requirement	PASS	

NOTE:

(1) "N/A" denotes test is not applicable in this Test Report

1.1 TEST FACILITY

NTEK Testing Technology Co., Ltd
 Add.:1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street, Bao'an District, Shenzhen P.R. China.
 FCC Registration No.:238937; IC Registration No.:9270A-1
 CNAS Registration No.:L5516

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 1.38\text{dB}$
2	RF power,conducted	$\pm 0.16\text{dB}$
3	Spurious emissions,conducted	$\pm 0.21\text{dB}$
4	All emissions,radiated(<1G)	$\pm 4.68\text{dB}$
5	All emissions,radiated(>1G)	$\pm 4.89\text{dB}$
6	Temperature	$\pm 0.5^\circ\text{C}$
7	Humidity	$\pm 2\%$

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Equipment	IP Camera	
Trade Name	Dericam	
Model Name	H502W	
Serial Model	H201W,H202W,H204W,H216W,H218W,H501W, H503W,H504W,H601W,H602W,H801W,H802W	
Model Difference	All the models are the same circuit and RF module, except the mode names.	
Product Description	The EUT is a IP Camera	
	Operation Frequency:	802.11b/g/n20MHz:2412~2462 MHz 802.11n40MHz:2422~2452
	Modulation Type:	CCK/OFDM/DBPSK/DAPSK
	Bit Rate of Transmitter	802.11b:11/5.5/2/1 Mbps 802.11g:54/48/36/24/18/12/9/6 Mbps 802.11n(20MHz/40MHz):150/144.4 4/130/117/115.56/104/86.67/78/52/6 .5 Mbps
	Number Of Channel	802.11b/g/n: 11CH 802.11n40:7CH
	Antenna Designation:	Please see Note 3.
	Output Power(Conducted):	802.11b: 18.99 dBm (Max.) 802.11g: 17.95 dBm (Max.) 802.11n: 15.87 dBm (Max.) 802.11n(40M) : 13.76 dBm (Max.)
	Antenna Gain (dBi)	2.5 dBi
	Based on the application, features, or specification exhibited in User's Manual, More details of EUT technical specification, please refer to the User's Manual.	
Channel List	Please refer to the Note 2.	
Ratings	DC 5V from adapter AC120V/60Hz	
Adapter	Model:SAW-0502000 AC Power Input: 100-240V~, 50/60Hz, 0.5A Output: 5V $\overline{\text{---}}$, 2000mA	
Battery	N/A	
Connecting I/O Port(s)	Please refer to the User's Manual	

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

2.

Channel List for 802.11b/g/n							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2412	04	2427	07	2442	10	2457
02	2417	05	2432	08	2447	11	2462
03	2422	06	2437	09	2452		

Channel List for 802.11n(40MHz)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
03	2422	06	2437	09	2452		
04	2427	07	2442				
05	2432	08	2447				

3.

Table for Filed Antenna

Ant	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	NOTE
A	N/A	N/A	External Antenna	N/A	2.5	Wifi Antenna

2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	802.11b CH1/ CH6/ CH11
Mode 2	802.11g CH1/ CH6/ CH11
Mode 3	802.11n20 CH1/ CH6/ CH11
Mode 4	802.11n40 CH3/ CH6/ CH9
Mode 5	Link Mode


For Conducted Emission	
Final Test Mode	Description
Mode 1	Link Mode

For Radiated Emission	
Final Test Mode	Description
Mode 1	802.11b CH1/ CH6/ CH11
Mode 2	802.11g CH1/ CH6/ CH11
Mode 3	802.11n20 CH1/ CH6/ CH11
Mode 4	802.11n40 CH3/ CH6/ CH9
Mode 5	Link Mode

Note:

- (1) The measurements are performed at the highest, middle, lowest available channels.
- (2) The measurements are performed at all Bit Rate of Transmitter, the worst data was reported

2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED



2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Brand	Model/Type No.	Series No.	Note
E-1	IP Camera	Dericam	H502W	N/A	EUT
E-2	Adapter	N/A	SAW-0502000	N/A	

Item	Shielded Type	Ferrite Core	Length	Note
C-1	NO	NO	1.2m	

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Spectrum Analyzer	Agilent	E4407B	MY45108040	2012.07.06	2013.07.05	1 year
2	Test Receiver	R&S	ESPI	101318	2012.06.07	2013.06.06	1 year
3	Bilog Antenna	TESEQ	CBL6111D	31216	2012.07.06	2013.07.05	1 year
4	50Ω Coaxial Switch	Anritsu	MP59B	6200264416	2012.06.07	2013.06.06	1 year
5	Spectrum Analyzer	ADVANTEST	R3132	150900201	2012.06.07	2013.06.06	1 year
6	Horn Antenna	EM	EM-AH-10180	2011071402	2012.07.06	2013.07.05	1 year
7	Horn Ant	Schwarzbeck	BBHA 9170	9170-181	2012.07.06	2013.07.05	1 year
8	Amplifier	EM	EM-30180	060538	2012.12.22	2013.12.21	1 year
9	Loop Antenna	ARA	PLA-1030/B	1029	2012.06.08	2013.06.07	1 year
10	Power Meter	R&S	NRVS	100696	2012.07.06	2013.07.05	1 year
11	Power Sensor	R&S	URV5-Z4	0395.1619.05	2012.07.06	2013.07.05	1 year

Conduction Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Test Receiver	R&S	ESCI	101160	2012.06.06	2013.06.05	1 year
2	LISN	R&S	ENV216	101313	2012.08.24	2013.08.23	1 year
3	LISN	EMCO	3816/2	00042990	2012.08.24	2013.08.23	1 year
4	50Ω Coaxial Switch	Anritsu	MP59B	6200264417	2012.06.07	2013.06.06	1 year
5	Passive Voltage Probe	R&S	ESH2-Z3	100196	2012.06.07	2013.06.06	1 year
6	Absorbing clamp	R&S	MOS-21	100423	2012.06.08	2013.06.07	1 year

3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)		Standard
	Quasi-peak	Average	Quasi-peak	Average	
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *	CISPR
0.50 -5.0	73.00	60.00	56.00	46.00	CISPR
5.0 -30.0	73.00	60.00	60.00	50.00	CISPR

0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	73.00	60.00	56.00	46.00	FCC
5.0 -30.0	73.00	60.00	60.00	50.00	FCC

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


3.1.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.1.3 DEVIATION FROM TEST STANDARD

No deviation

3.1.4 TEST SETUP

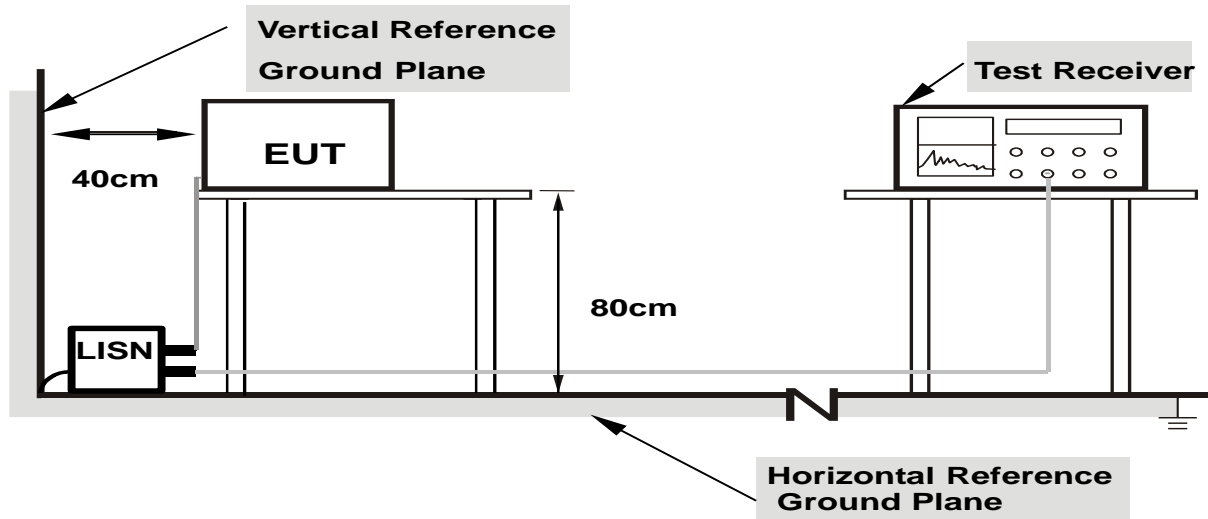

- Note:**
- 1.Support units were connected to second LISN.
 - 2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

3.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.


3.1.6 TEST RESULTS

EUT :	IP Camera	Model Name. :	H502W
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	L
Test Voltage :	DC 5V from adapter AC120V/60Hz	Test Mode :	Mode 4

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Detector Type
0.1500	43.68	11.63	55.31	66.00	-10.69	QP
0.5500	38.65	10.56	49.21	56.00	-6.79	QP
0.5500	24.50	10.56	35.06	46.00	-10.94	AVG
1.1019	31.88	10.52	42.40	56.00	-13.60	QP
1.7500	32.75	10.52	43.27	56.00	-12.73	QP
2.8020	32.72	10.55	43.27	56.00	-12.73	QP
16.9139	30.08	10.99	41.07	60.00	-18.93	QP

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

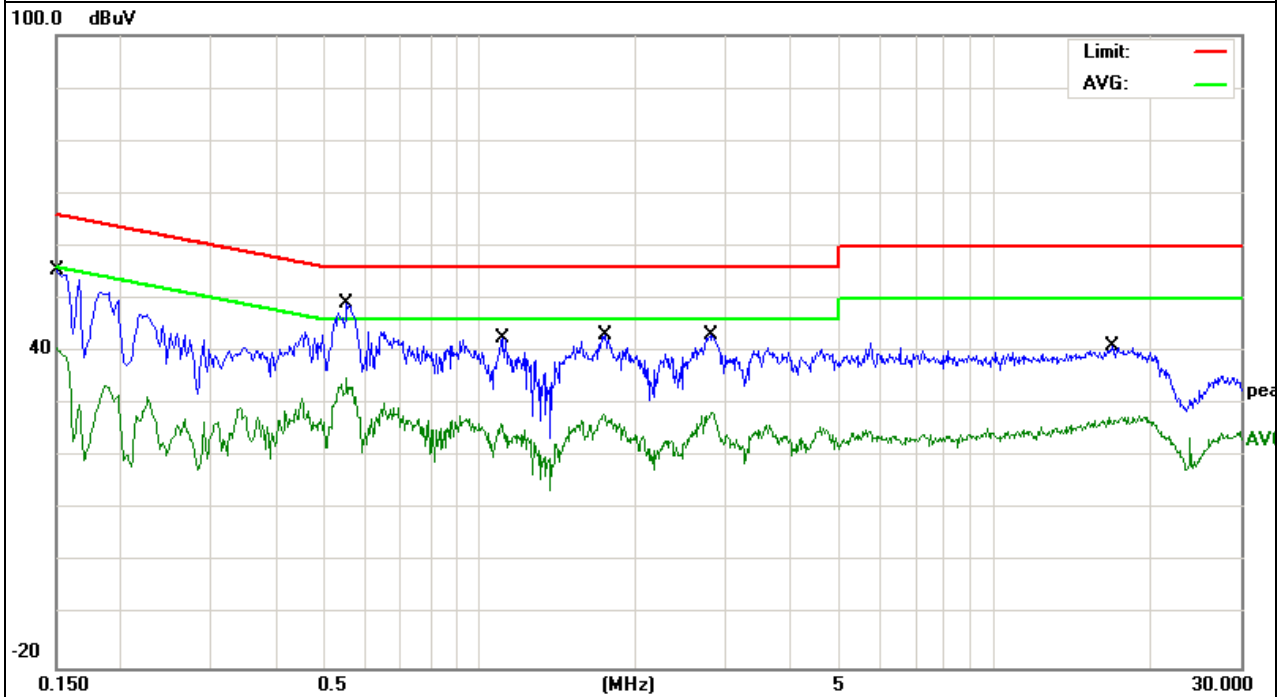


EUT :	IP Camera	Model Name. :	H502W
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	N
Test Voltage :	DC 5V from adapter AC120V/60Hz	Test Mode :	Mode 4

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Detector Type
0.1539	45.61	11.59	57.20	65.78	-8.58	QP
0.1539	31.20	11.59	42.79	55.78	-12.99	AVG
0.5460	37.38	10.57	47.95	56.00	-8.05	QP
0.5460	28.07	10.57	38.64	46.00	-7.36	AVG
0.9180	30.72	10.53	41.25	56.00	-14.75	QP
1.7180	31.09	10.52	41.61	56.00	-14.39	QP
2.8020	32.48	10.55	43.03	56.00	-12.97	QP
19.9219	28.36	11.11	39.47	60.00	-20.53	QP

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

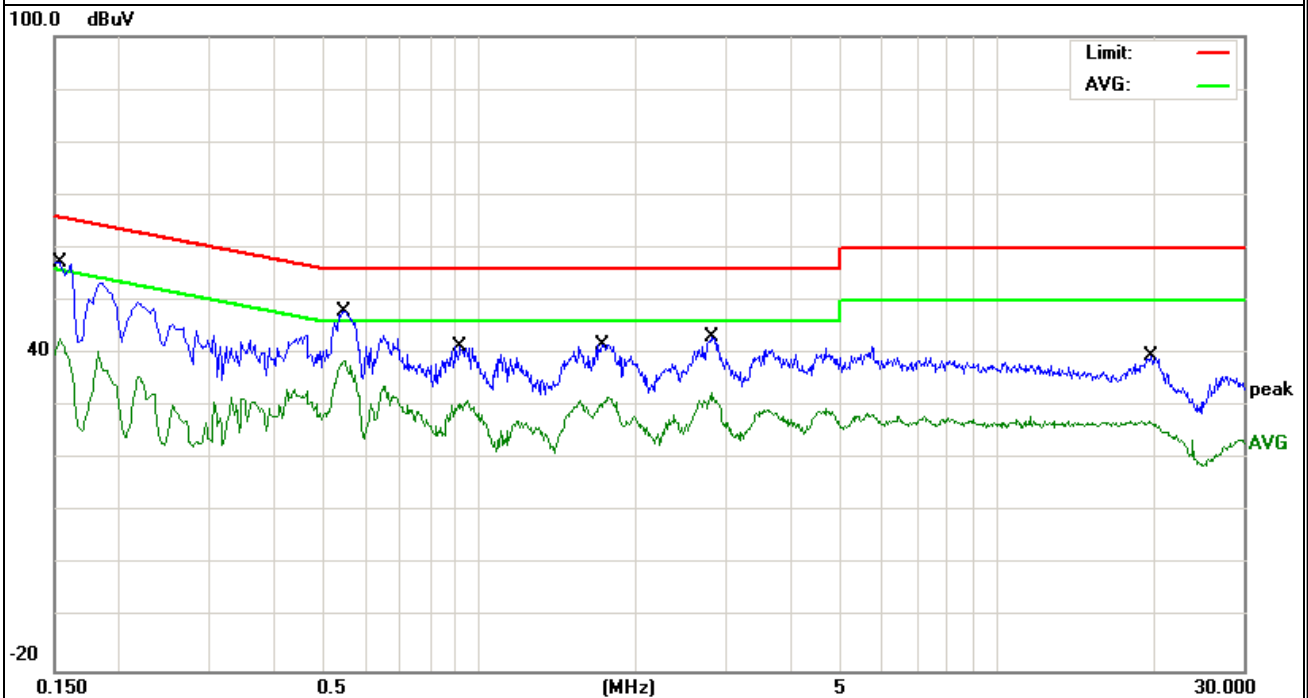

3.2 RADIATED EMISSION MEASUREMENT

3.2.1 RADIATED EMISSION LIMITS (Frequency Range 9kHz-1000MHz)

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (microrvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Class A (dBuV/m) (at 3M)		Class B (dBuV/m) (at 3M)	
	PEAK	AVERAGE	PEAK	AVERAGE
Above 1000	80	60	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

3.2.2 TEST PROCEDURE

- a. The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- b. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

3.2.3 DEVIATION FROM TEST STANDARD


No deviation


3.2.4 TEST SETUP

(A) Radiated Emission Test-Up Frequency Below 30MHz

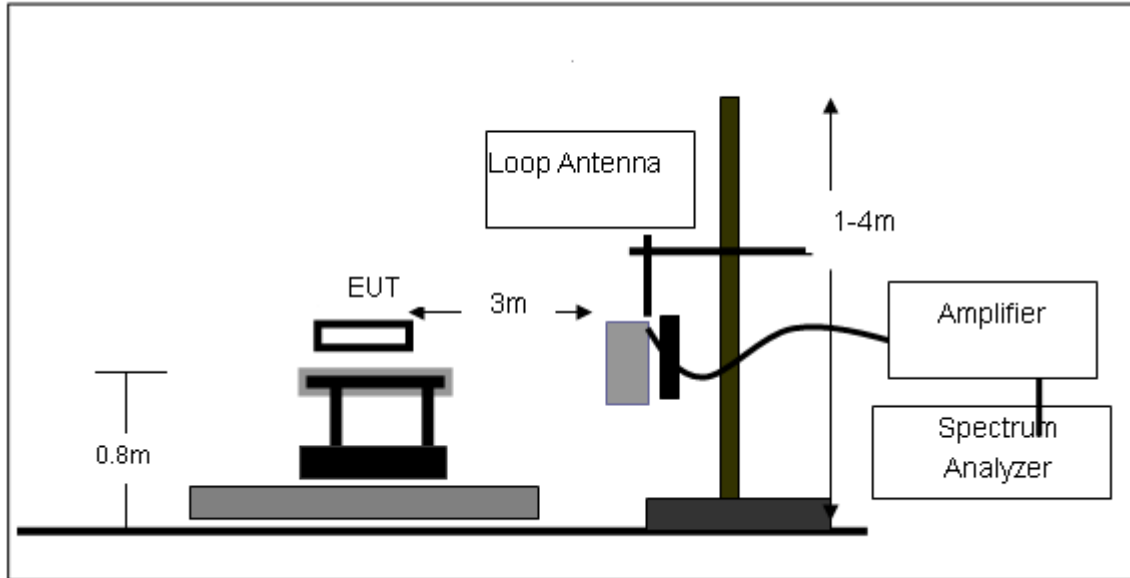

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

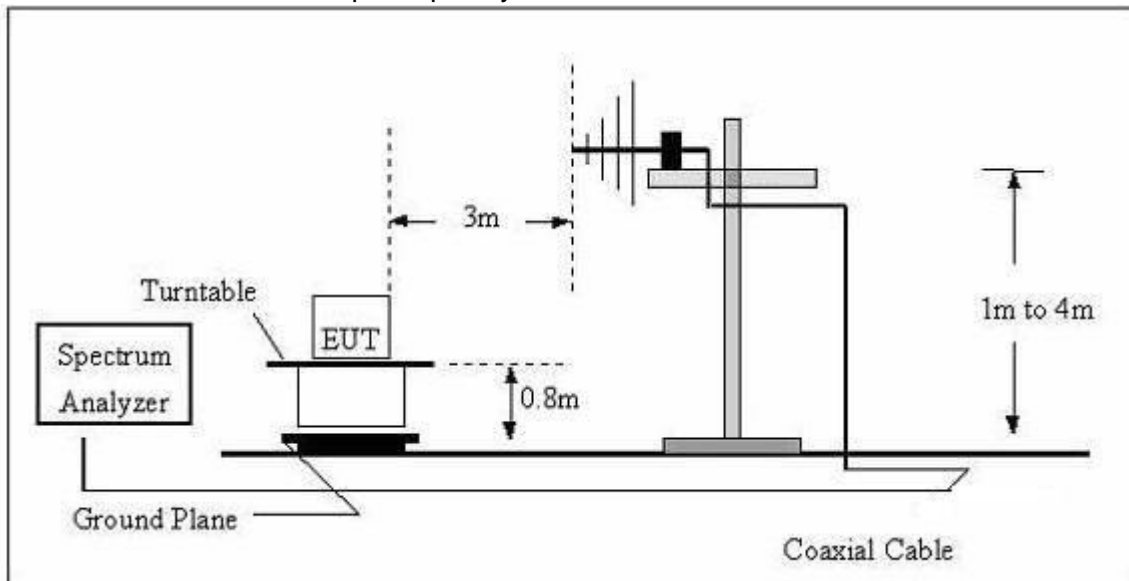

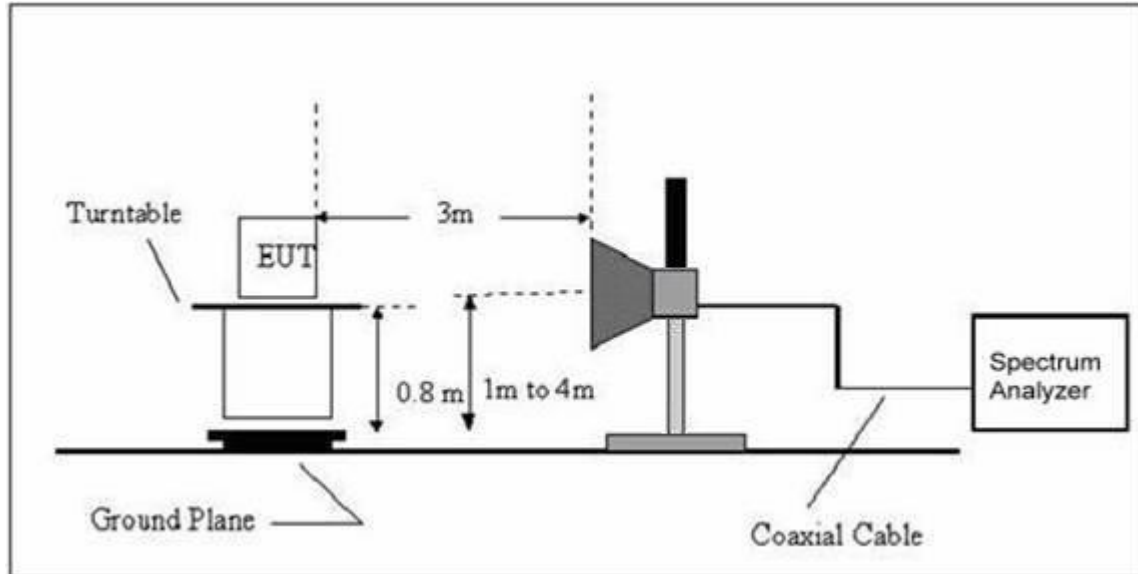(C) Radiated Emission Test-Up Frequency Above 1GHz**3.2.5 EUT OPERATING CONDITIONS**

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

3.2.6 TEST RESULTS



The worse case: 802.11g mode
Radiated Spurious Emission (Transmitting)

Frequency (MHz)	Meter Reading (dBµV)	Factor (dB)	Emission Level (dBµV/m)	Limits (dBµV/m)	Margin (dB)	Detect or Type	Comment
Low Channel (2412 MHz)-Below 1G							
135.0319	15.26	12.25	27.51	43.5	-15.99	QP	Vertical
239.9874	13.69	11.65	25.34	46.0	-20.66	QP	Vertical
406.088	15.21	18.54	33.75	46.0	-12.25	QP	Vertical
495.9343	14.76	20.59	35.35	46.0	-10.65	QP	Vertical
528.2458	15.19	21.12	36.31	46.0	-9.69	QP	Vertical
815.9678	8.62	26.46	35.08	46.0	-10.92	QP	Vertical
125.0066	15.62	12.21	27.83	43.5	-15.67	QP	Horizontal
164.9071	15.69	10.81	26.5	43.5	-17.00	QP	Horizontal
287.9904	15.60	14.30	29.9	46.0	-16.10	QP	Horizontal
528.2458	15.56	21.12	36.68	46.0	-9.32	QP	Horizontal
721.7259	9.49	25.59	35.08	46.0	-10.92	QP	Horizontal
815.9678	11.96	26.46	38.42	46.0	-7.58	QP	Horizontal
High Channel (2412 MHz)-Above 1G							
1464.692	60.60	-17.01	43.59	74.0	-30.41	Pk	Vertical
2004.115	58.05	-13.21	44.84	74.0	-29.16	Pk	Vertical
2412.015	52.48	-12.97	39.51	74.0	-34.49	pk	Vertical
4824.125	49.71	-3.60	46.11	74.0	-27.89	pk	Vertical
1336.782	60.15	-17.51	42.64	74.0	-31.36	pk	Horizontal
1651.514	68.94	-15.93	53.01	74.0	-20.99	pk	Horizontal
1993.371	55.68	-13.42	42.26	74.0	-31.74	pk	Horizontal
2412.150	52.71	-12.97	39.74	74.0	-34.26	Pk	Horizontal
2480.405	66.27	-12.79	53.48	74.0	-20.52	Pk	Horizontal
4824.250	48.84	-3.6	45.24	74.0	-28.76	Pk	Horizontal



Frequency (MHz)	Meter Reading (dBµV)	Factor (dB)	Emission Level (dBµV/m)	Limits (dBµV/m)	Margin (dB)	Detect or Type	Comment
Low Channel (2437 MHz)-Below 1G							
135.0319	14.68	12.25	26.93	43.5	-16.57	QP	Vertical
225.3077	14.63	10.73	25.36	46.0	-20.64	QP	Vertical
263.819	12.16	14.62	26.78	46.0	-19.22	QP	Vertical
315.4806	14.66	15.26	29.92	46.0	-16.08	QP	Vertical
528.2458	14.61	21.12	35.73	46.0	-10.27	QP	Vertical
815.9678	8.04	26.46	34.5	46.0	-11.50	QP	Vertical
125.0066	15.04	12.21	27.25	43.5	-16.25	QP	Horizontal
263.819	15.03	14.62	29.65	46.0	-16.35	QP	Horizontal
432.5457	15.05	18.82	33.87	46.0	-12.13	QP	Horizontal
528.2458	14.98	21.12	36.10	46.0	-9.90	QP	Horizontal
721.7259	8.91	25.59	34.5	46.0	-11.50	QP	Horizontal
815.9678	11.38	26.46	37.84	46.0	-8.16	QP	Horizontal
High Channel (2437 MHz)-Above 1G							
1329.615	58.63	-17.59	41.04	74.0	-32.96	Pk	Vertical
1501.898	60.59	-17.15	43.44	74.0	-30.56	pk	Vertical
1663.393	59.55	-15.86	43.69	74.0	-30.31	pk	Vertical
1996.946	56.39	-13.36	43.03	74.0	-30.97	pk	Vertical
2437.183	53.01	-12.97	40.04	74.0	-33.96	pk	Vertical
4824.125	49.01	-3.60	45.41	74.0	-28.59	pk	Vertical
1107.528	65.32	-19.40	45.92	74.0	-28.08	Pk	Horizontal
1334.389	65.62	-17.53	48.09	74.0	-25.91	pk	Horizontal
1663.393	61.42	-15.86	45.56	74.0	-28.44	Pk	Horizontal
1993.371	59.3	-13.42	45.88	74.0	-28.12	Pk	Horizontal
2412.125	52.46	-12.97	39.49	74.0	-34.51	Pk	Horizontal
4824.250	48.78	-3.6	45.18	74.0	-28.82	Pk	Horizontal

Frequency (MHz)	Meter Reading (dBµV)	Factor (dB)	Emission Level (dBµV/m)	Limits (dBµV/m)	Margin (dB)	Detect or Type	Comment
Low Channel (2462 MHz)-Below 1G							
98.8324	13.54	10.51	24.05	43.5	-19.45	QP	Vertical
143.8291	13.31	12.06	25.37	43.5	-18.13	QP	Vertical
336.035	11.4	16.03	27.43	46.0	-18.57	QP	Vertical
383.9318	8.17	17.38	25.55	46.0	-20.45	QP	Vertical
528.2458	13.45	21.12	34.57	46.0	-11.43	QP	Vertical
815.9678	6.88	26.46	33.34	46.0	-12.66	QP	Vertical
131.7572	14.51	12.22	26.73	43.5	-16.77	QP	Horizontal
197.8925	14.38	8.99	23.37	43.5	-20.13	QP	Horizontal
287.9904	14.44	14.3	28.74	46.0	-17.26	QP	Horizontal
462.3455	9.56	19.5	29.06	46.0	-16.94	QP	Horizontal
625.0778	7.74	23.6	31.34	46.0	-14.66	QP	Horizontal
721.7259	8.33	25.59	33.92	46.0	-12.08	QP	Horizontal
High Channel (2462 MHz)-Above 1G							
1329.615	66.23	-17.59	48.64	74.0	-25.36	pk	Vertical
1663.393	63.20	-15.86	47.34	74.0	-26.66	pk	Vertical
1829.098	58.45	-14.78	43.67	74.0	-30.33	pk	Vertical
1993.371	57.90	-13.42	44.48	74.0	-29.52	pk	Vertical
2412.108	52.92	-12.97	39.95	74.0	-34.05	pk	Vertical
4824.350	48.83	-3.6	45.23	74.0	-28.77	pk	Vertical
1329.615	61.12	-17.59	43.53	74.0	-30.47	pk	Horizontal
1663.393	57.49	-15.86	41.63	74.0	-32.37	pk	Horizontal
1993.371	55.77	-13.42	42.35	74.0	-31.65	pk	Horizontal
2412.125	52.79	-12.97	39.82	74.0	-34.18	pk	Horizontal
2806.824	54.49	-11.69	42.80	74.0	-31.20	pk	Horizontal
4824.167	48.40	-3.60	44.80	74.0	-29.20	pk	Horizontal



Conducted Spurious Emissions at Antenna Port: 802.11b Low Channel

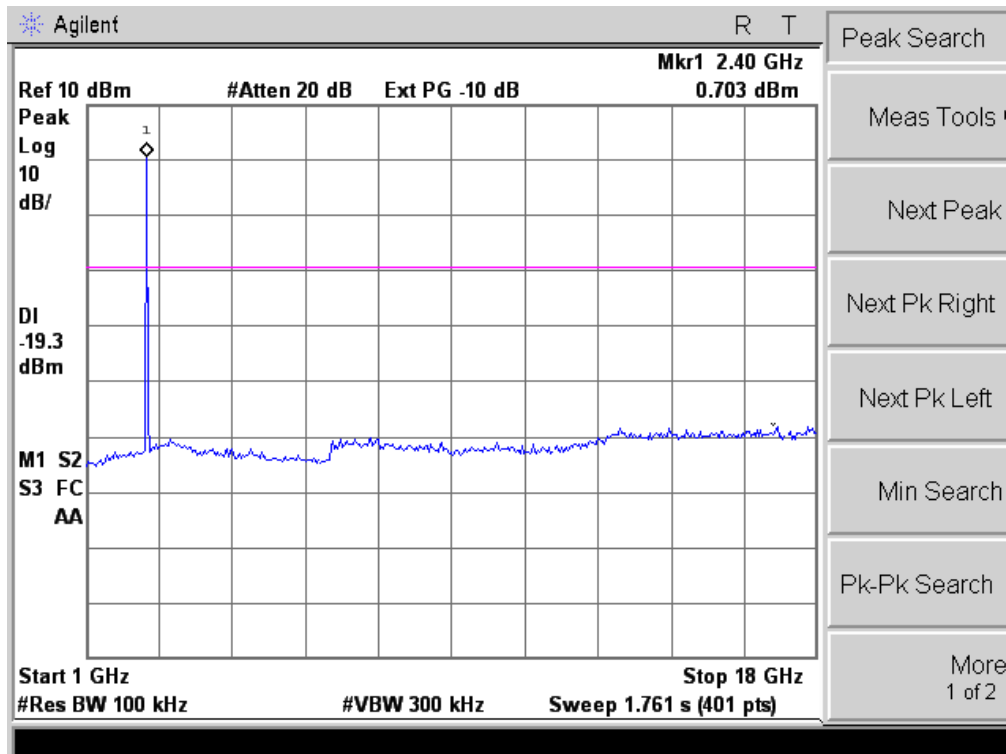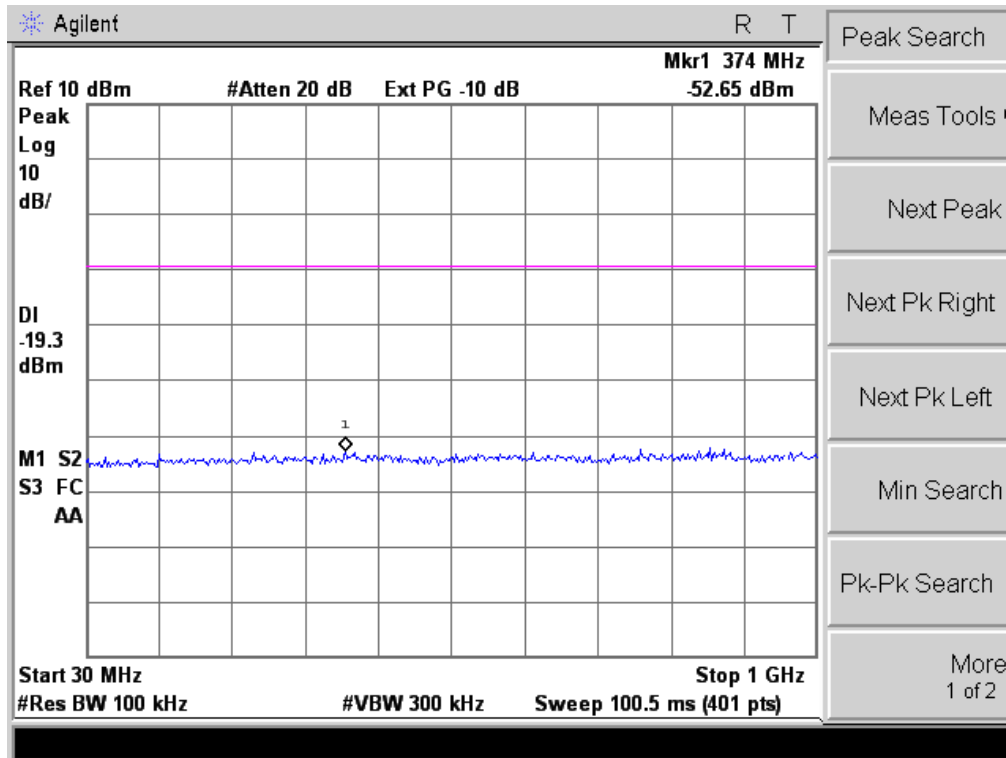



802.11b Middle Channel

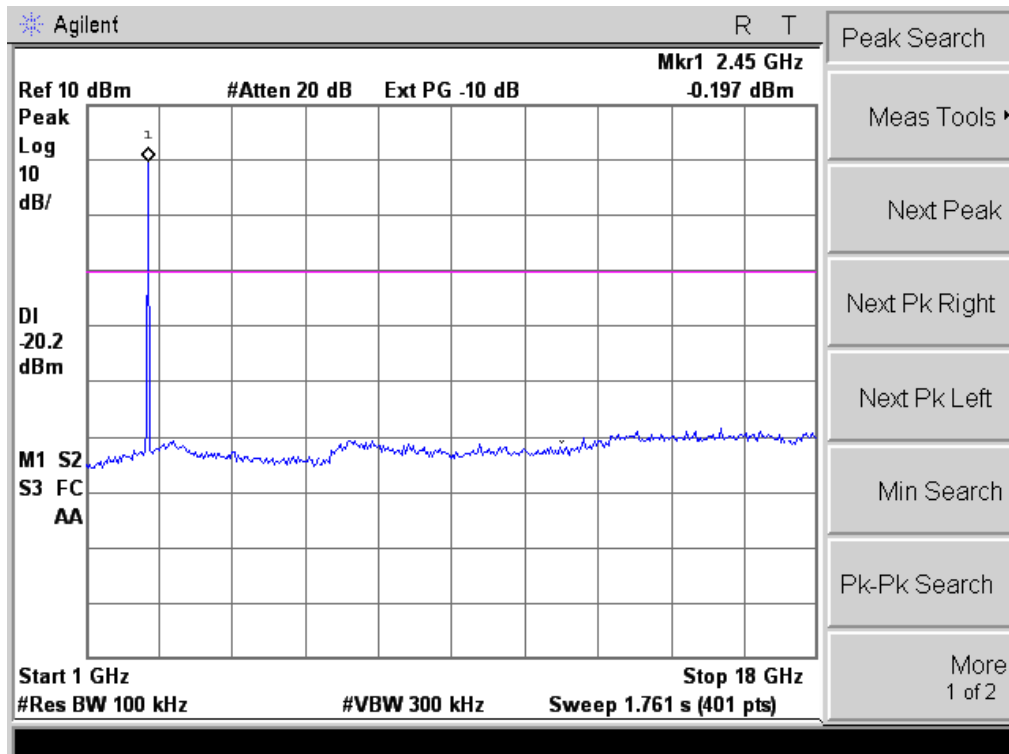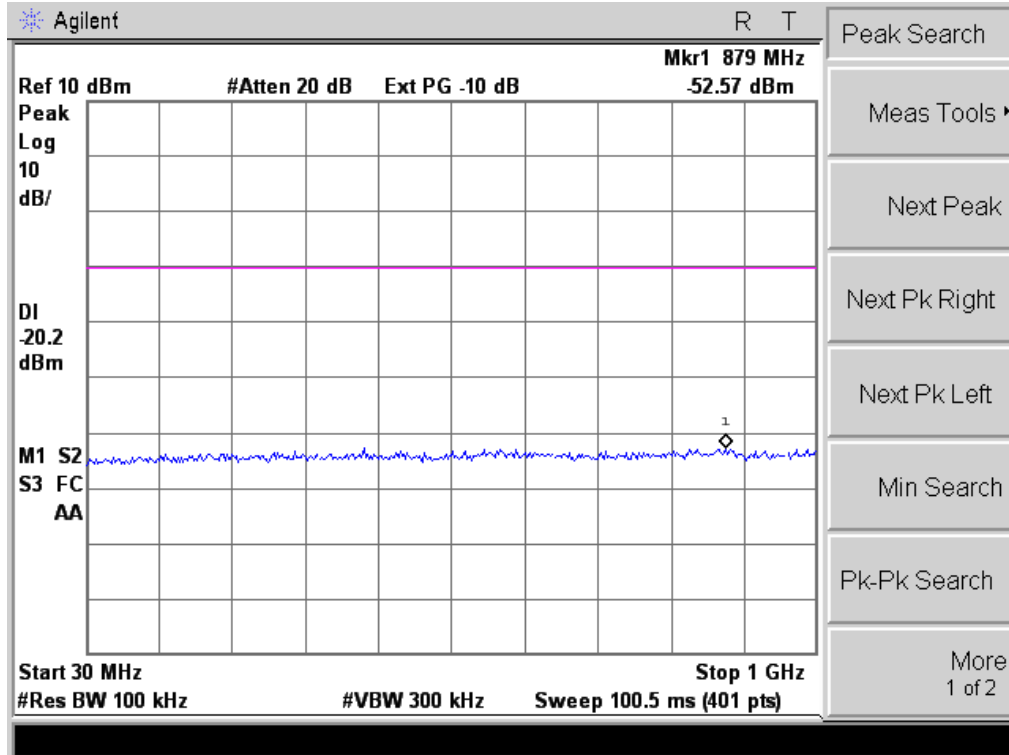



802.11b High Channel

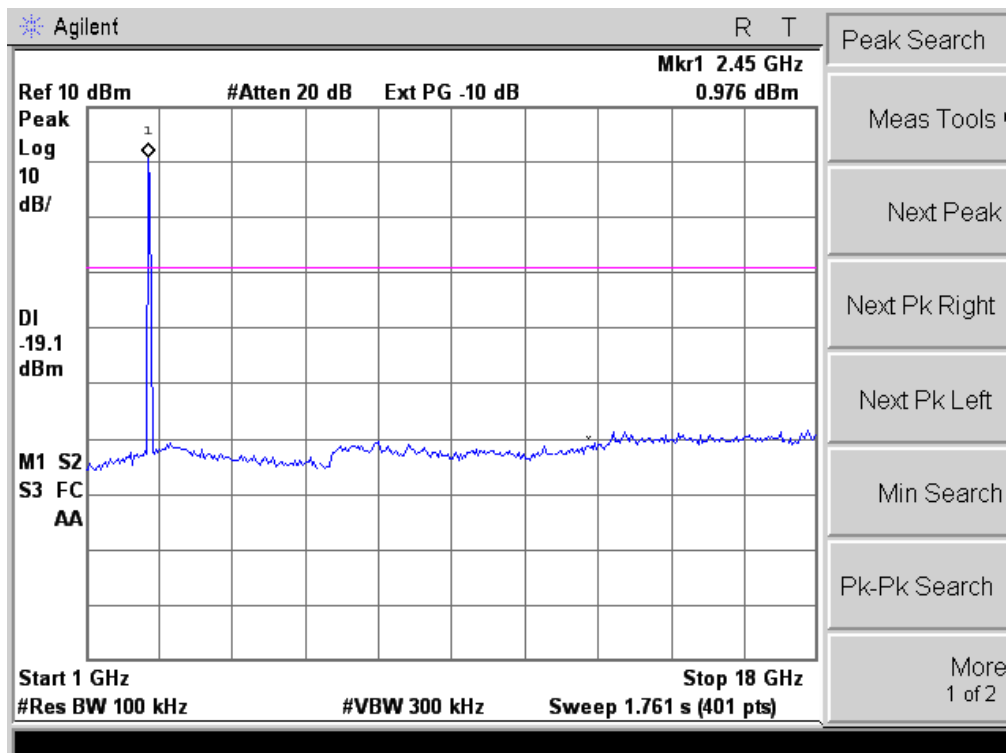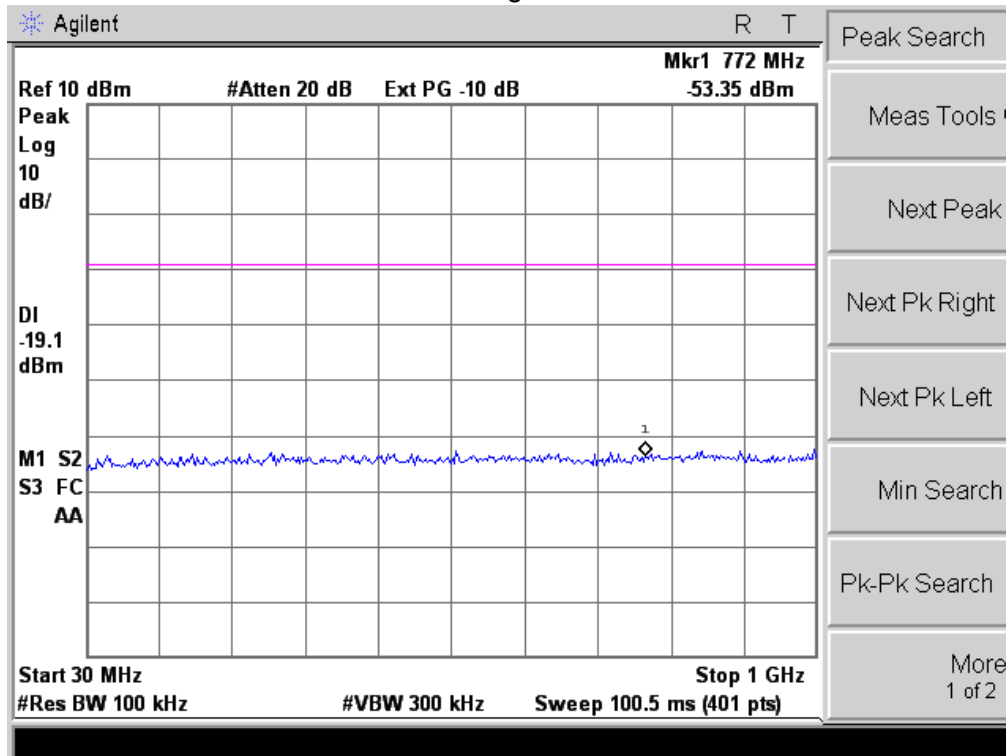



802.11g Low Channel

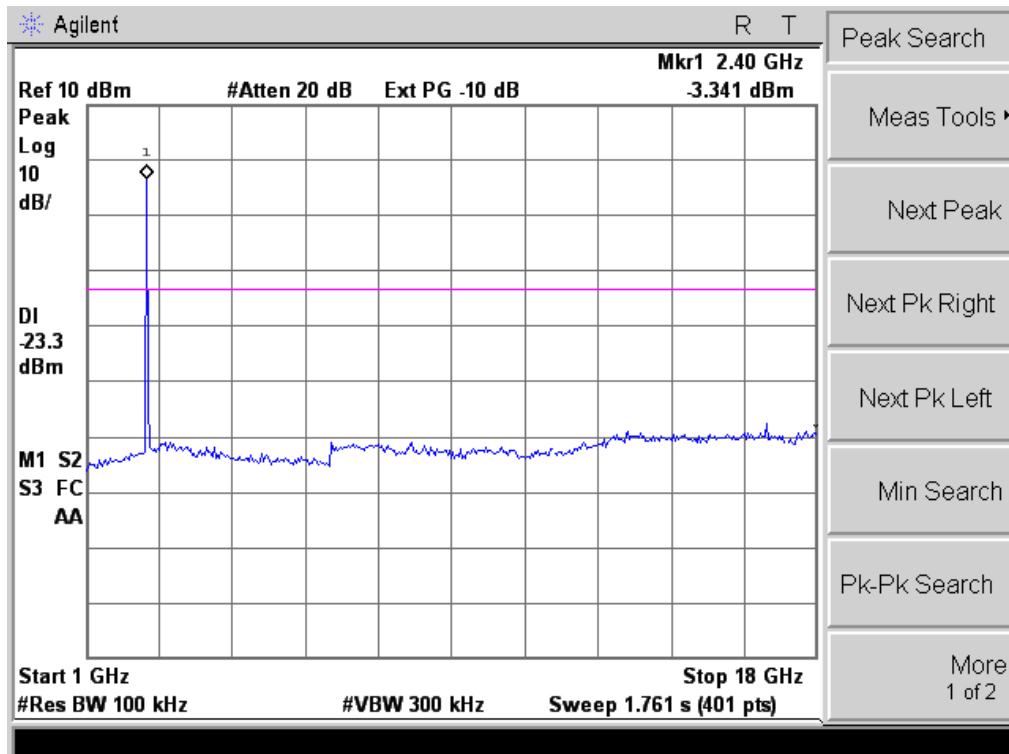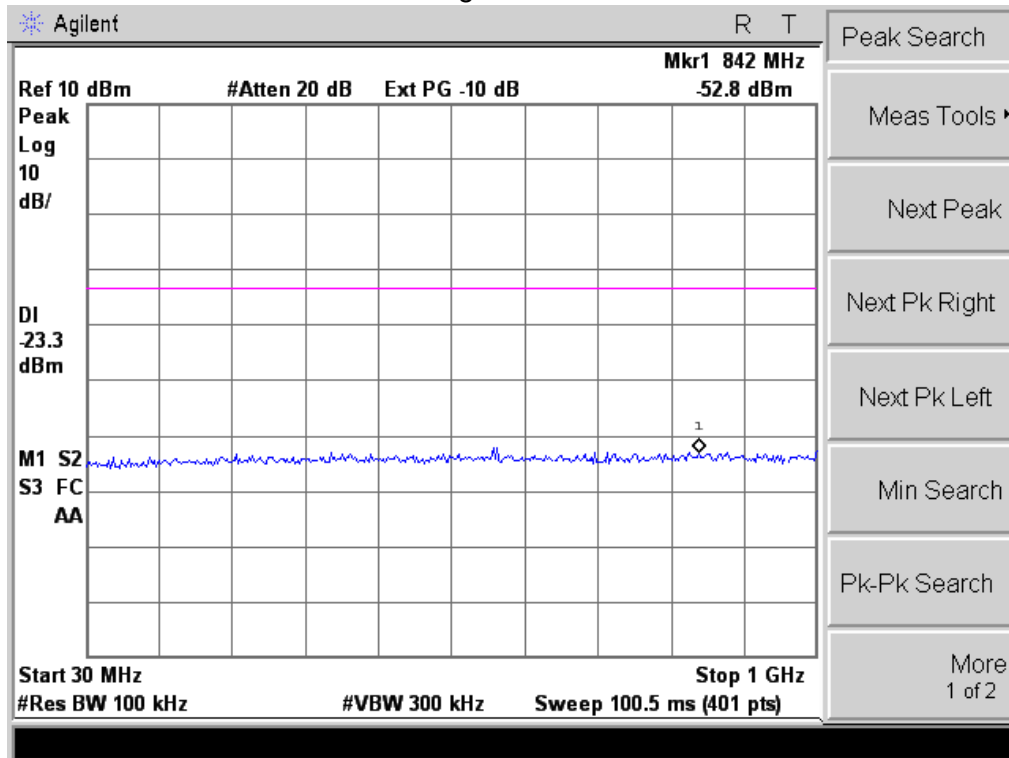



802.11g Middle Channel

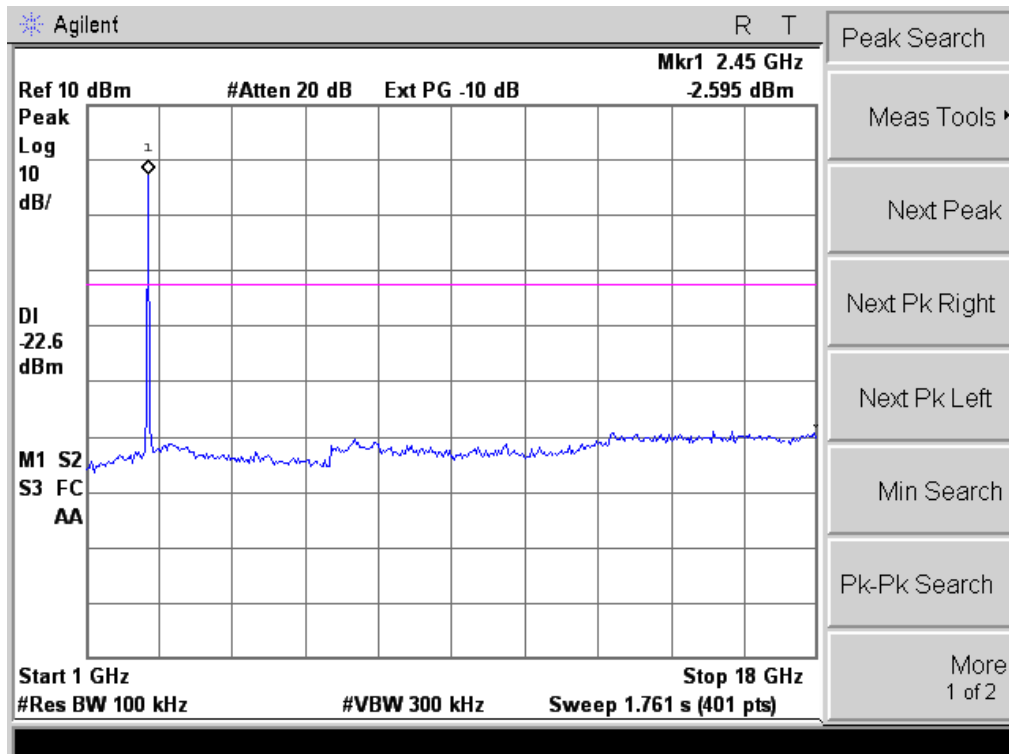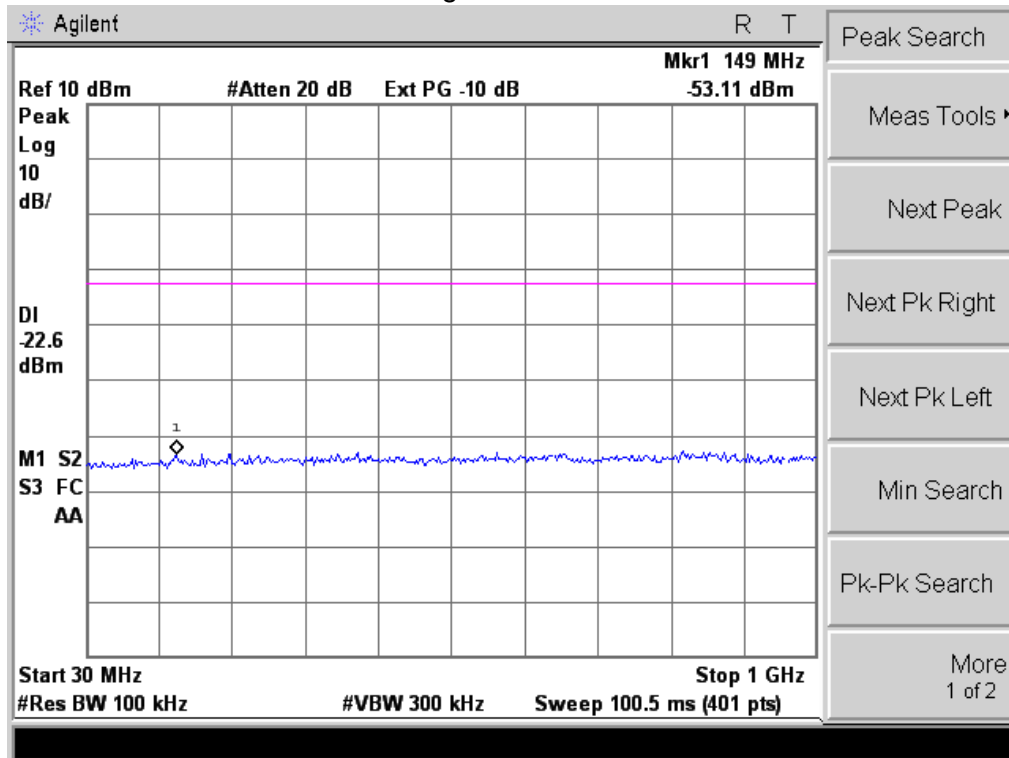



802.11g High Channel

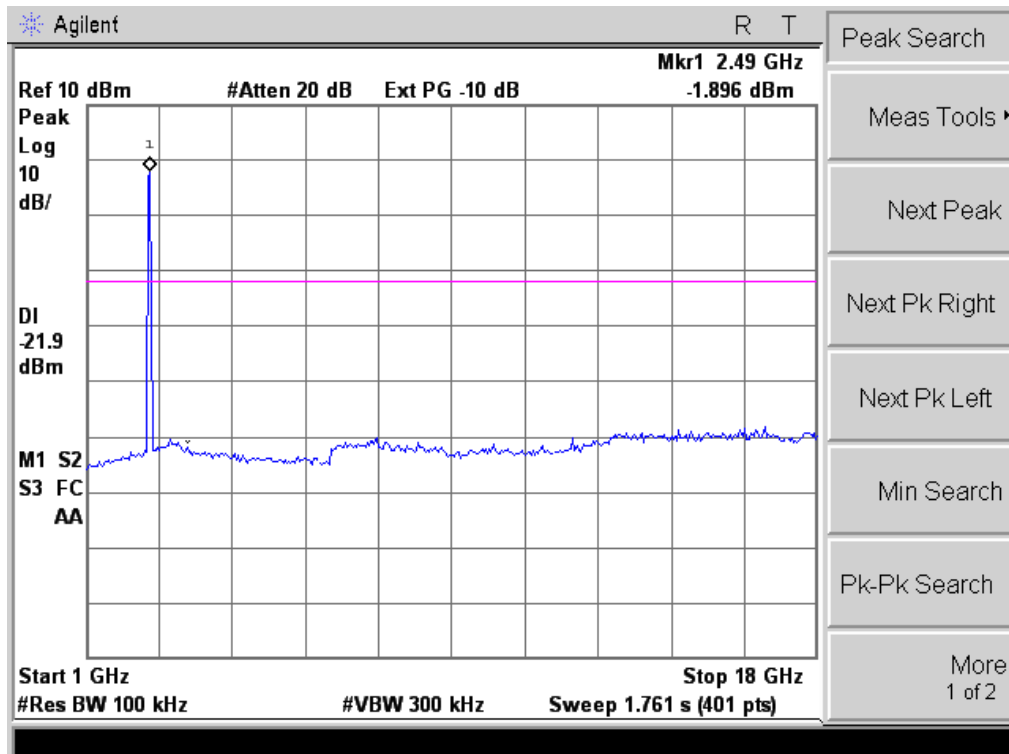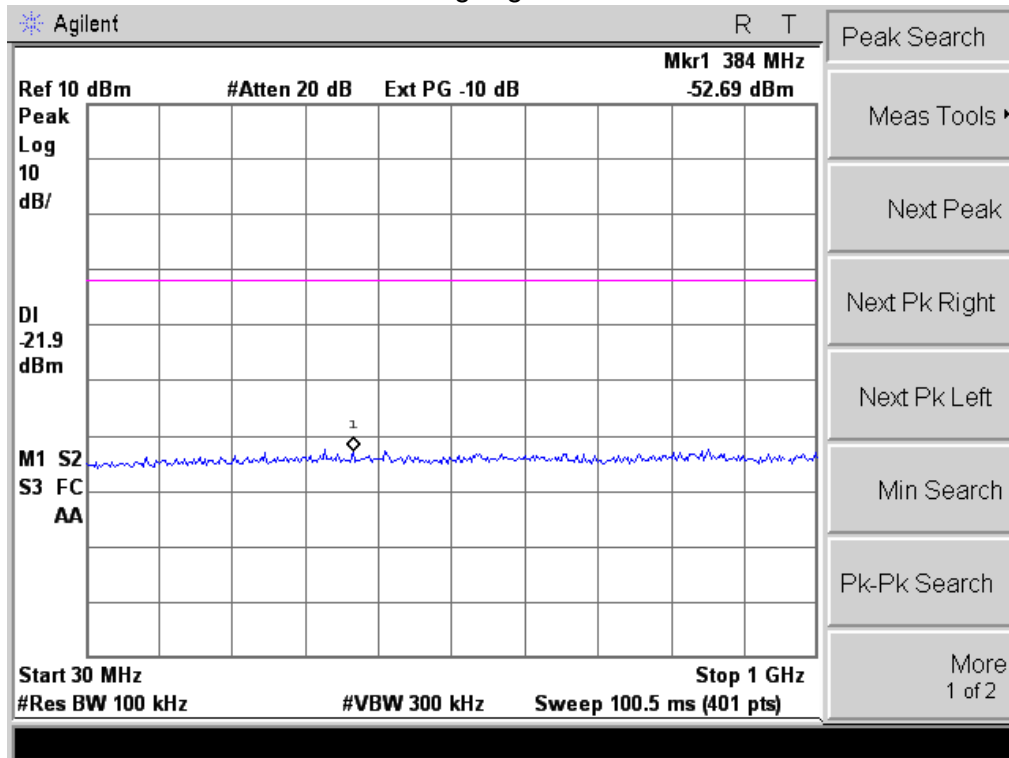



802.11n20 Low Channel

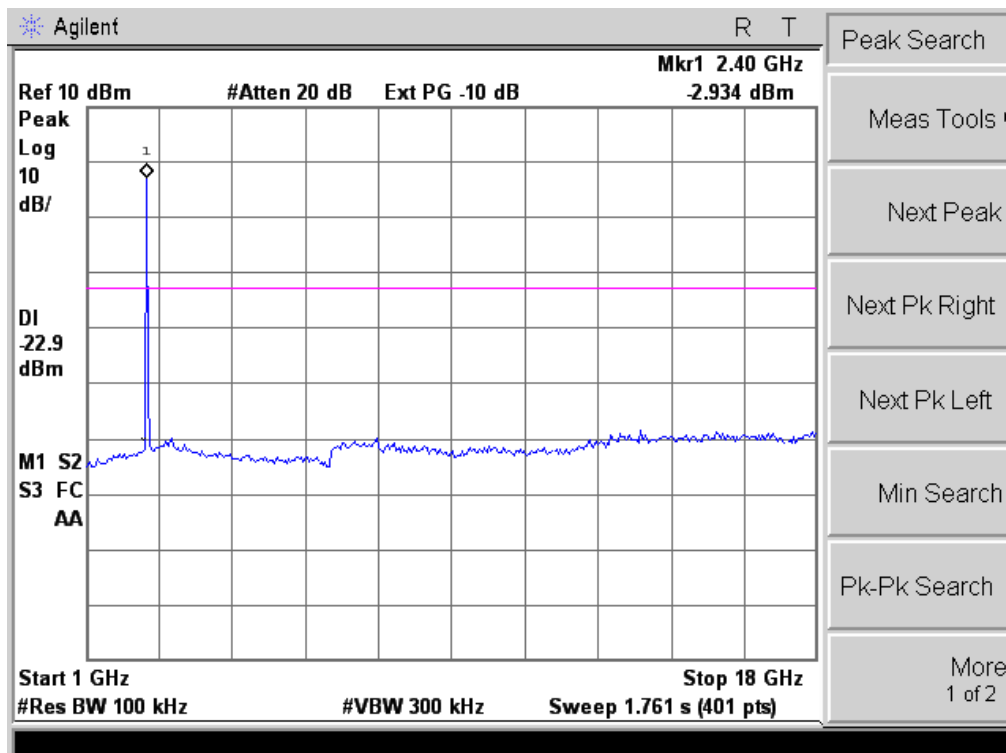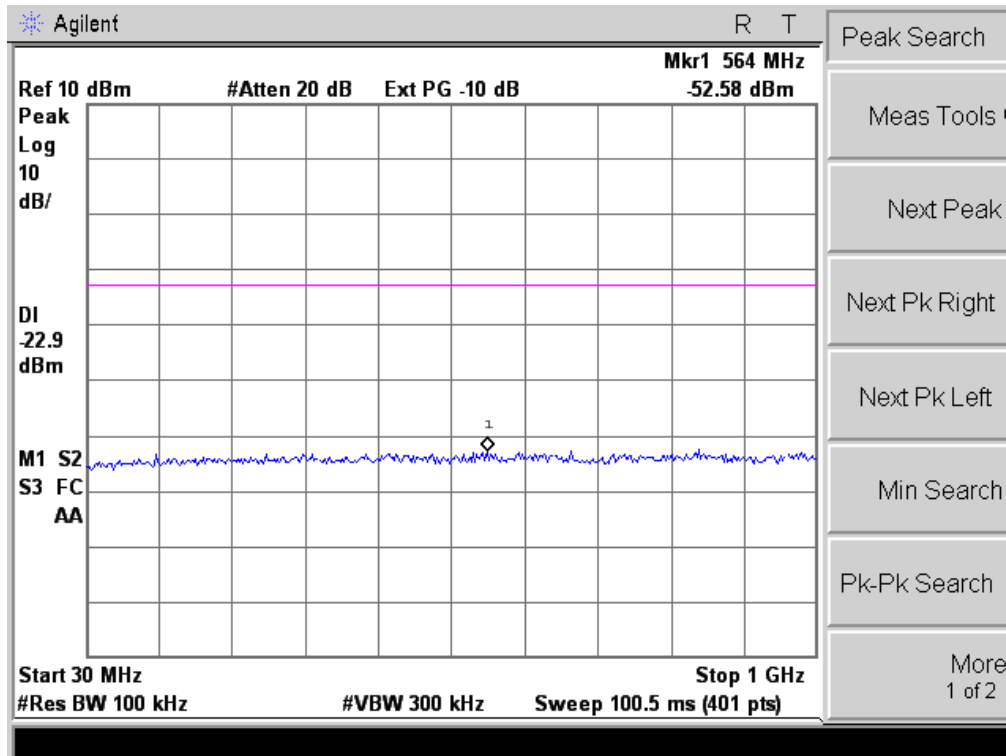



802.11n20 Middle Channel

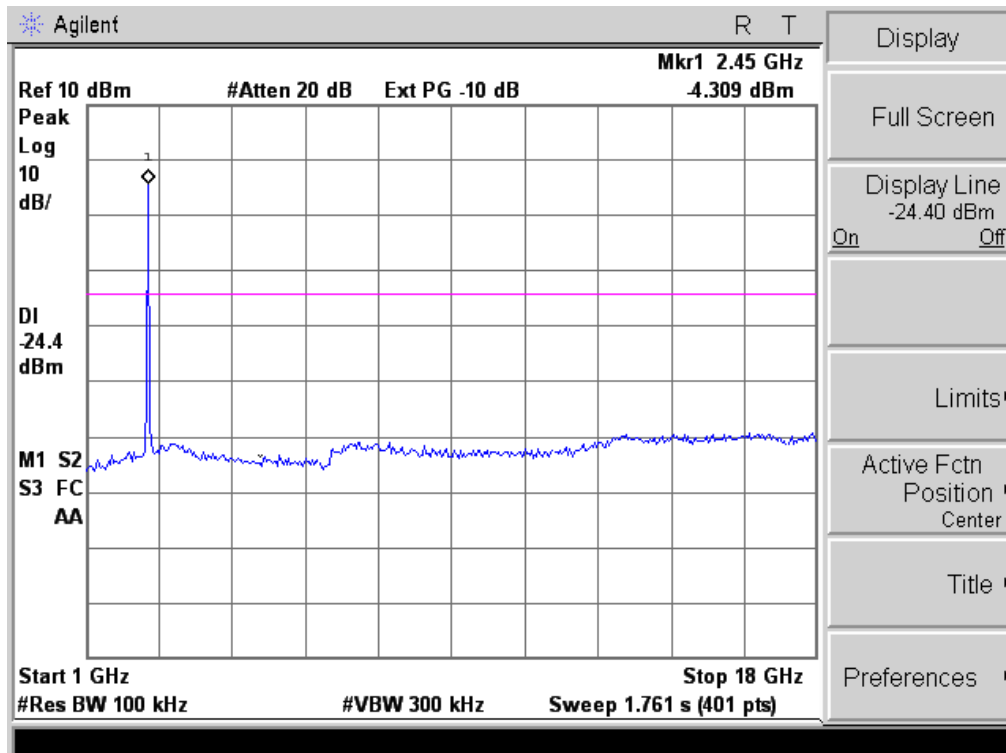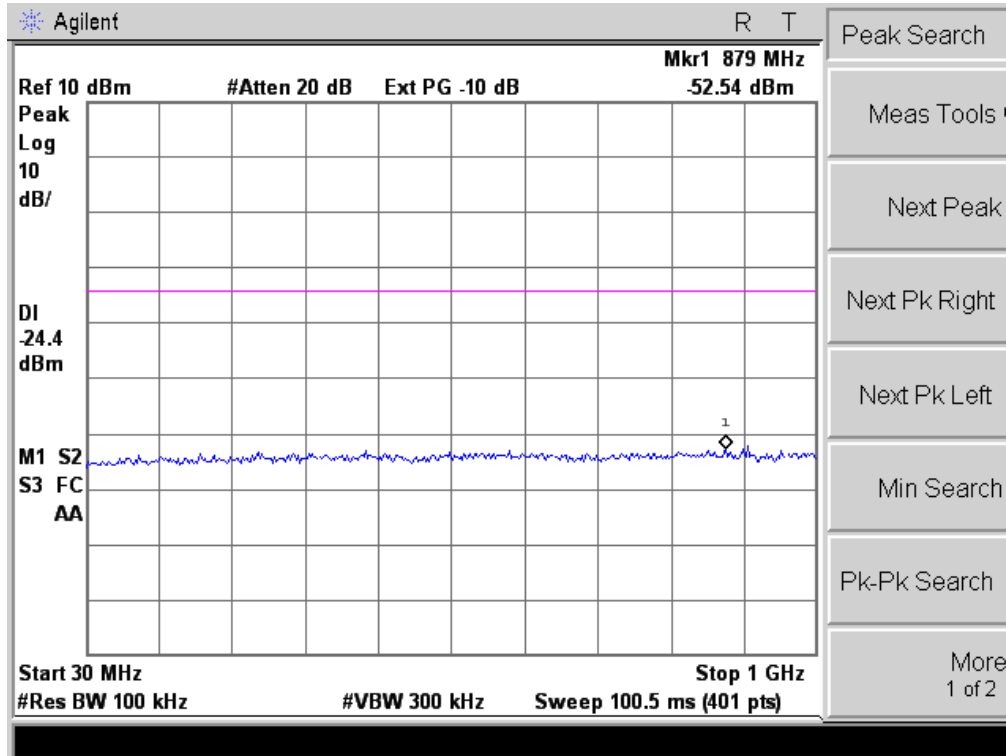



802.11n20 High Channel

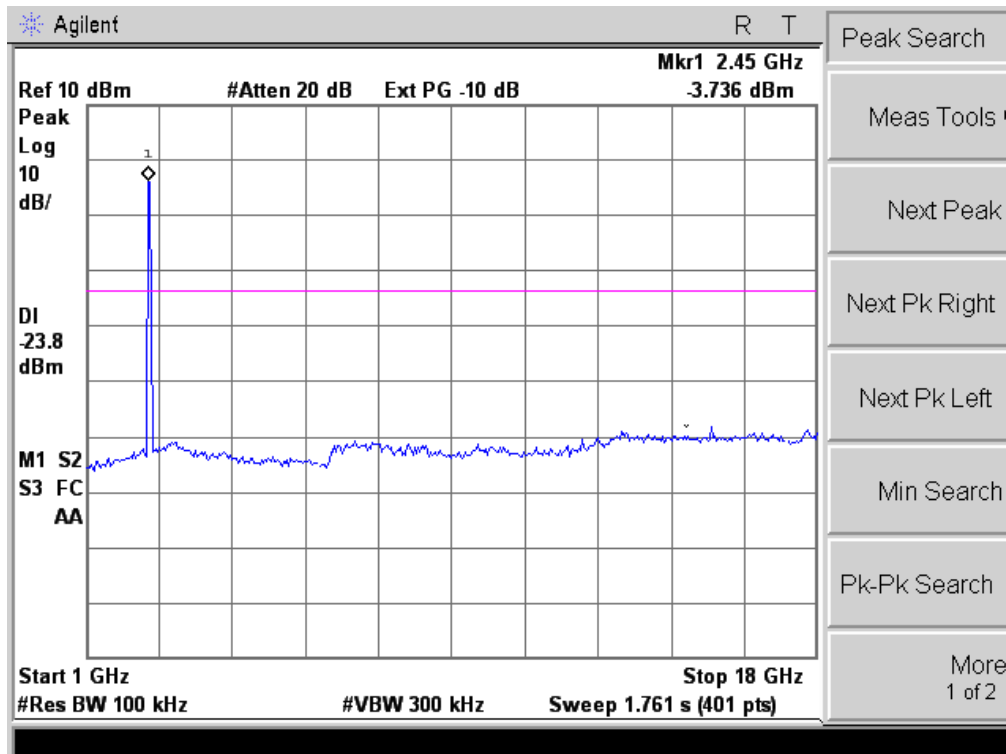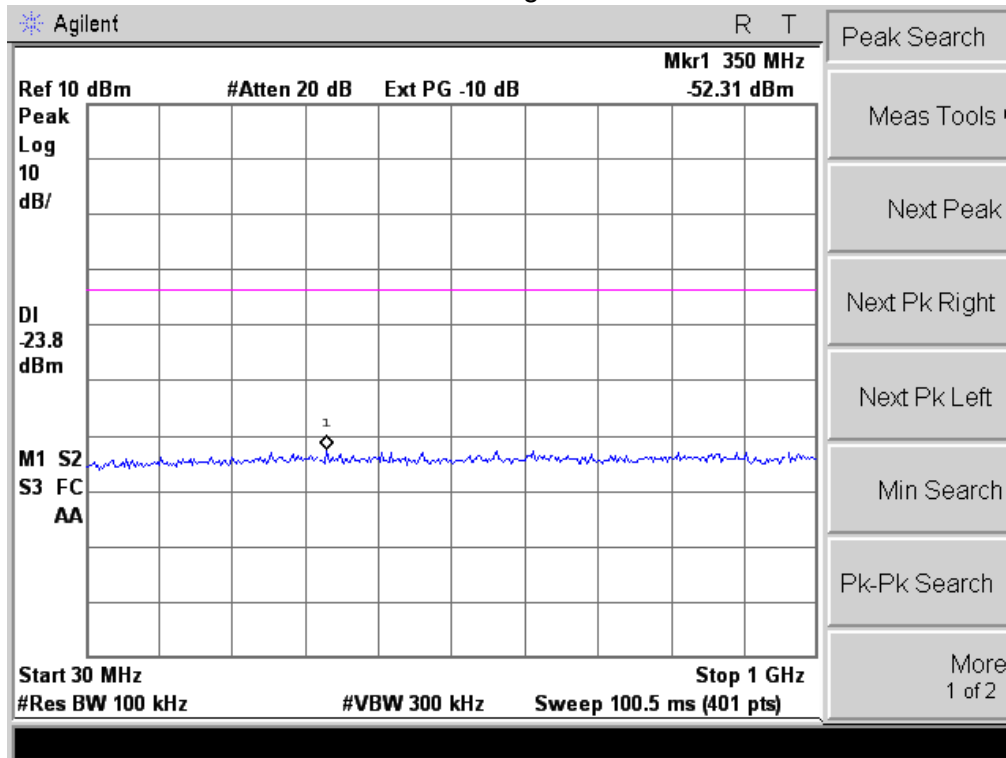



802.11n40 Low Channel

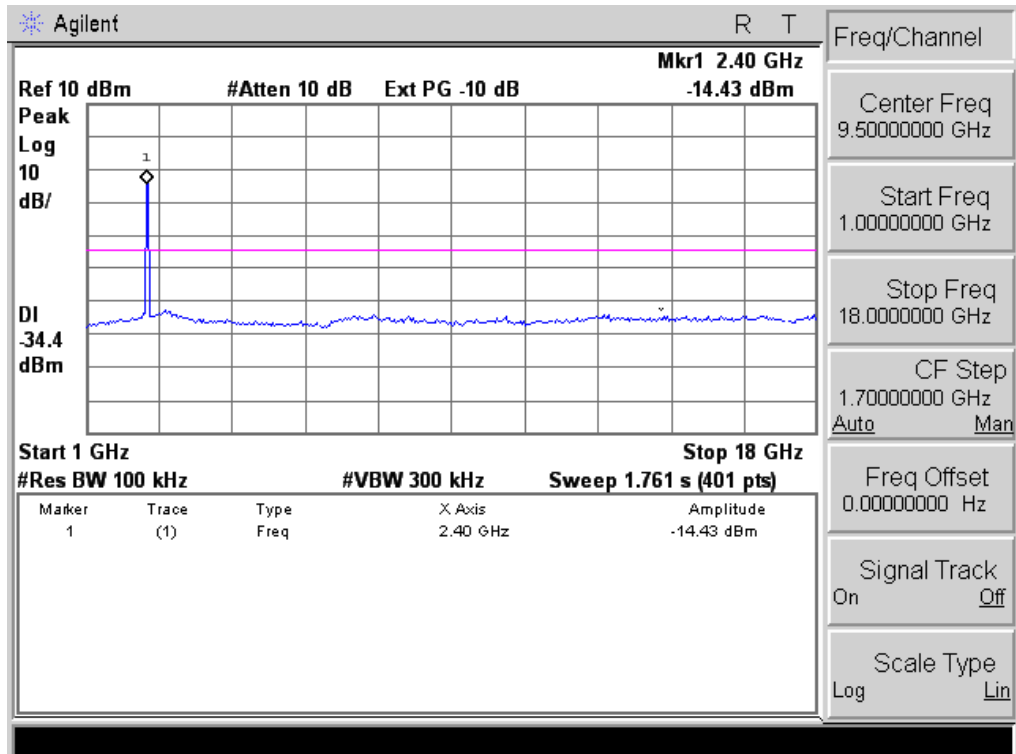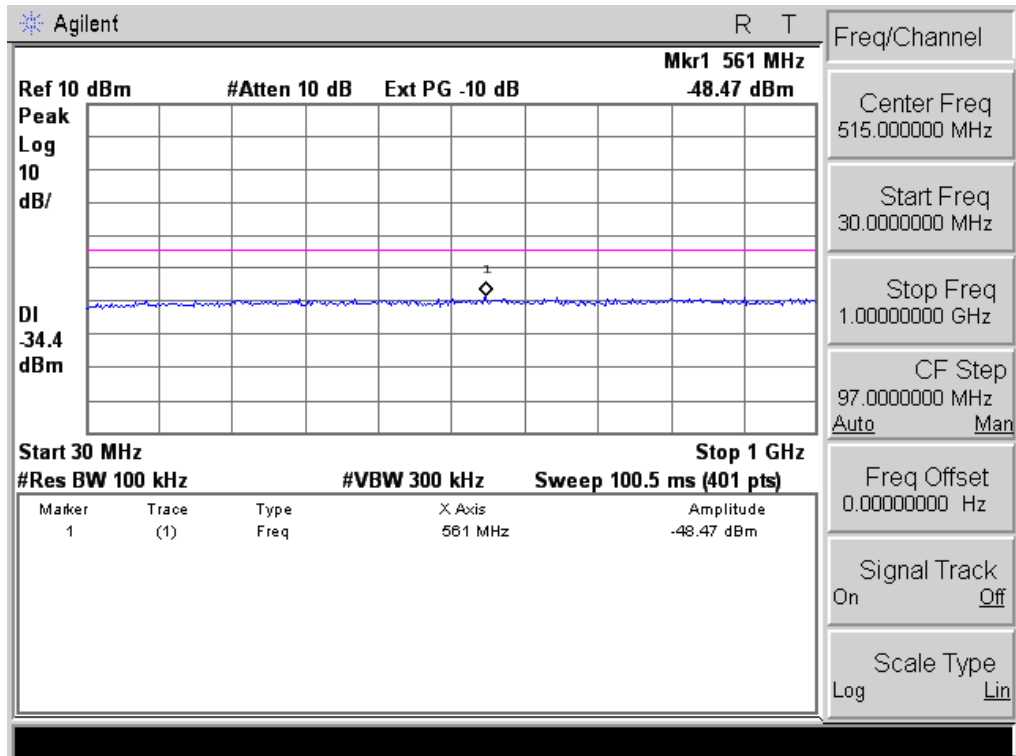

802.11n40 Middle Channel

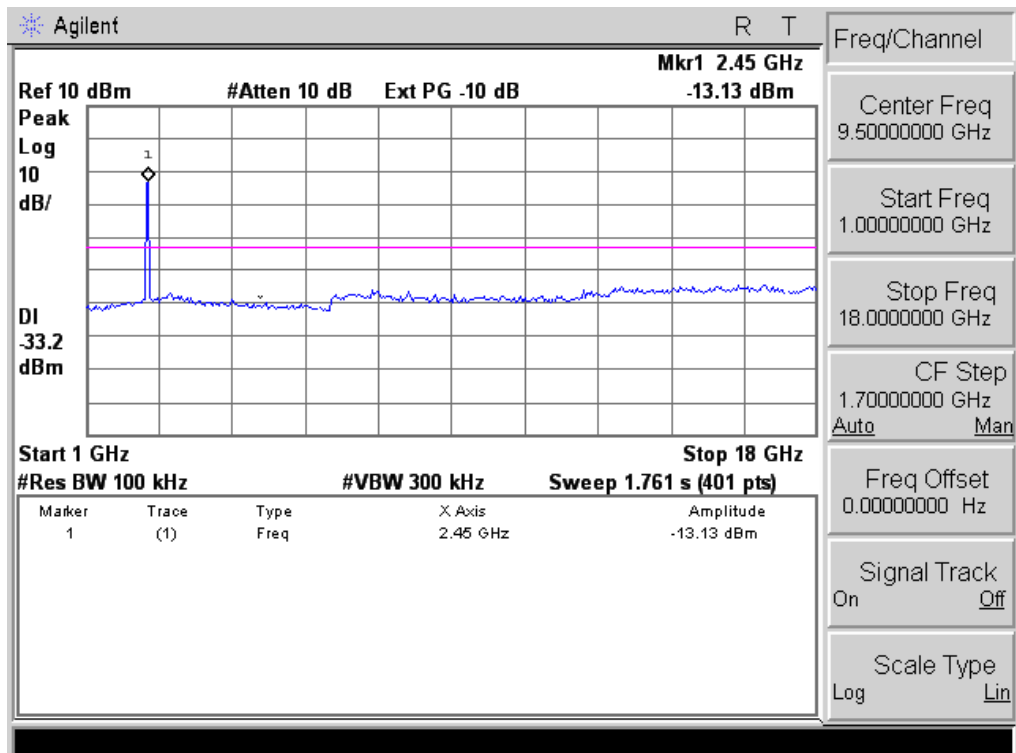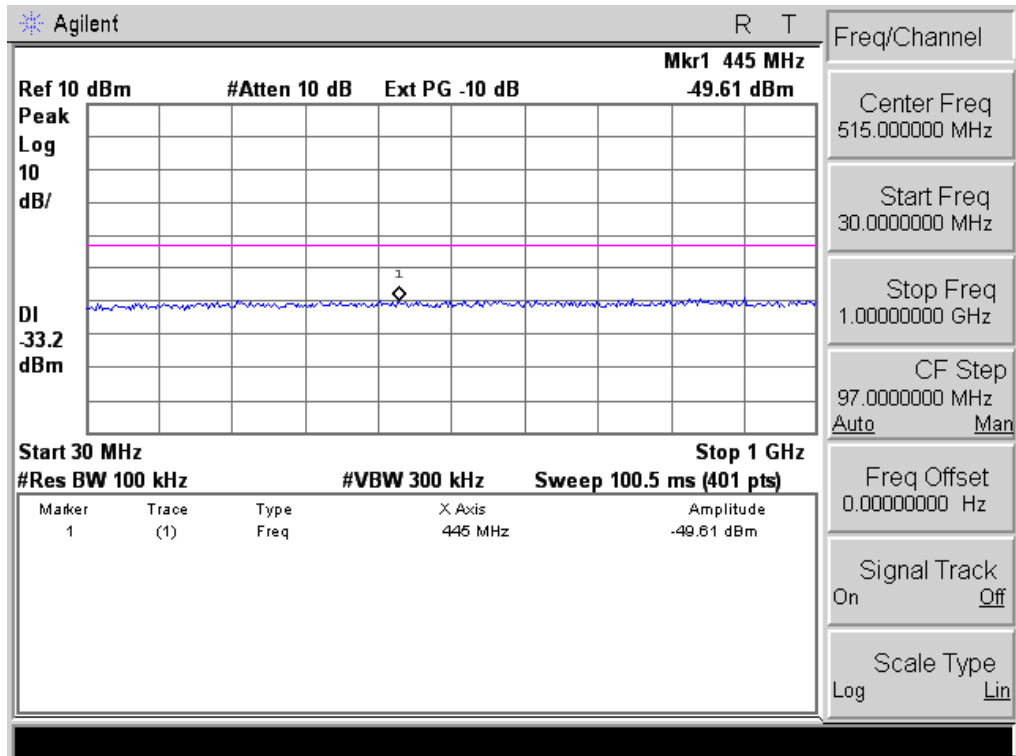

802.11n40 High Channel

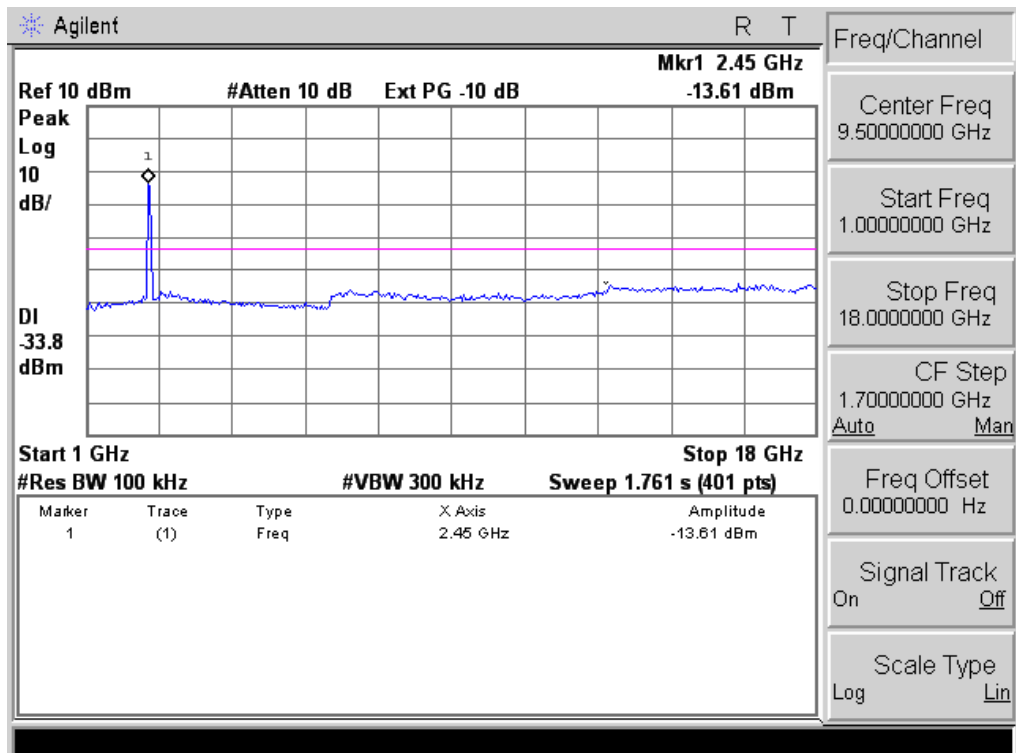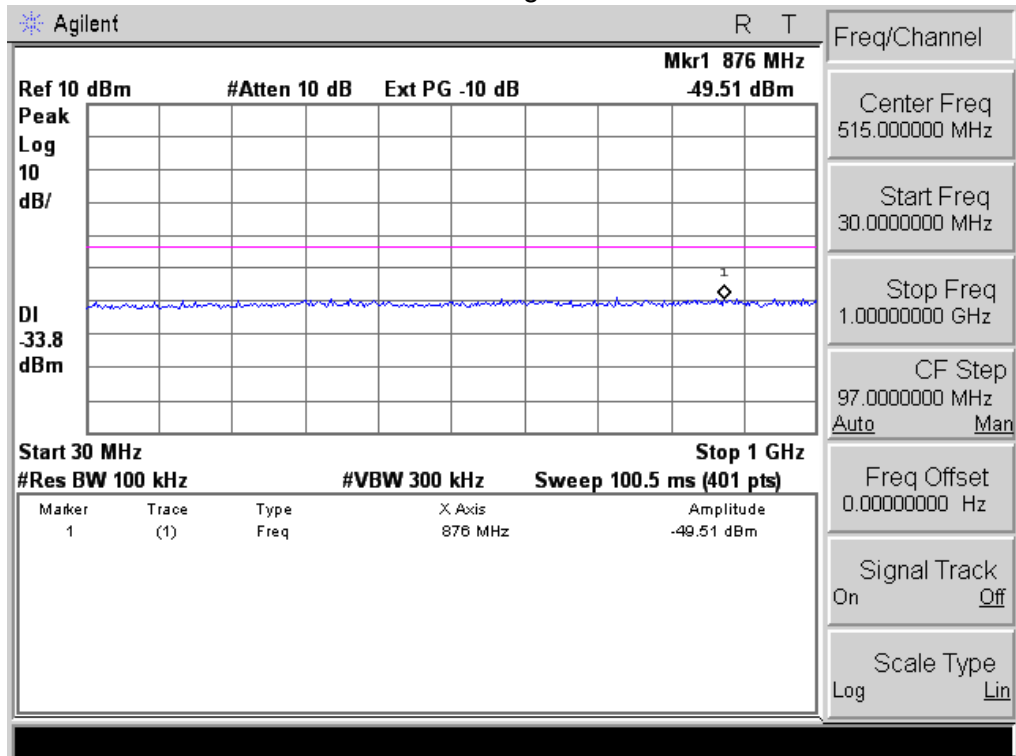

Radiated band edge:

Frequency (MHz)	Meter Reading (dBµV)	Factor (dB)	Emission Level (dBµV/m)	Limits (dBµV/m)	Margin (dB)	Detector Type	Comment
802.11b							
2390	38.61	-13.06	25.55	74	-48.45	peak	Vertical
2390	40.26	-13.06	27.20	74	-46.80	peak	Horizontal
2483.5	40.04	-12.78	27.26	74	-46.74	peak	Vertical
2483.5	48.28	-12.78	35.50	74	-38.50	peak	Horizontal
802.11g							
2390	40.58	-13.06	27.52	74	-46.48	peak	Vertical
2390	39.64	-13.06	26.58	74	-47.42	peak	Horizontal
2483.5	47.96	-12.78	35.18	74	-38.82	peak	Vertical
2483.5	40.35	-12.78	27.57	74	-46.43	peak	Horizontal
802.11n20							
2390	39.68	-13.06	26.62	74	-47.38	peak	Vertical
2390	38.82	-13.06	25.76	74	-48.24	peak	Horizontal
2483.5	48.02	-12.78	35.24	74	-38.76	peak	Vertical
2483.5	40.82	-12.78	28.04	74	-45.96	peak	Horizontal
802.11n40							
2390	49.4	-12.99	36.41	74	-37.59	peak	Vertical
2390	31.31	-12.99	18.32	54	-35.68	peak	Horizontal
2483.5	60.28	-12.78	47.5	74	-26.5	peak	Vertical
2483.5	59.68	-12.78	46.9	74	-27.1	peak	Horizontal

NOTE: The result(PK) less than AV limite,No need shown AV result.

4. POWER SPECTRAL DENSITY TEST

4.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS

4.1.1 TEST PROCEDURE

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS channel bandwidth.
3. Set the RBW \geq 3 kHz.
4. Set the VBW \geq 3 x RBW.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

4.1.2 DEVIATION FROM STANDARD

No deviation.

4.1.3 TEST SETUP




4.1.4 EUT OPERATION CONDITIONS



The EUT tested system was configured as the statements of 2.1 Unless otherwise a special operating condition is specified in the follows during the testing.

4.1.5 TEST RESULTS

EUT :	IP Camera	Model Name :	H502W
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1015 hPa	Test Voltage :	DC 5V from adapter AC120V/60Hz
Test Mode :	TX b Mode /CH01, CH06, CH11		


Frequency	Power Density (dBm)	Limit (dBm)	Result
2412 MHz	-11.63	8	PASS
2437 MHz	-12.90	8	PASS
2462 MHz	-11.95	8	PASS


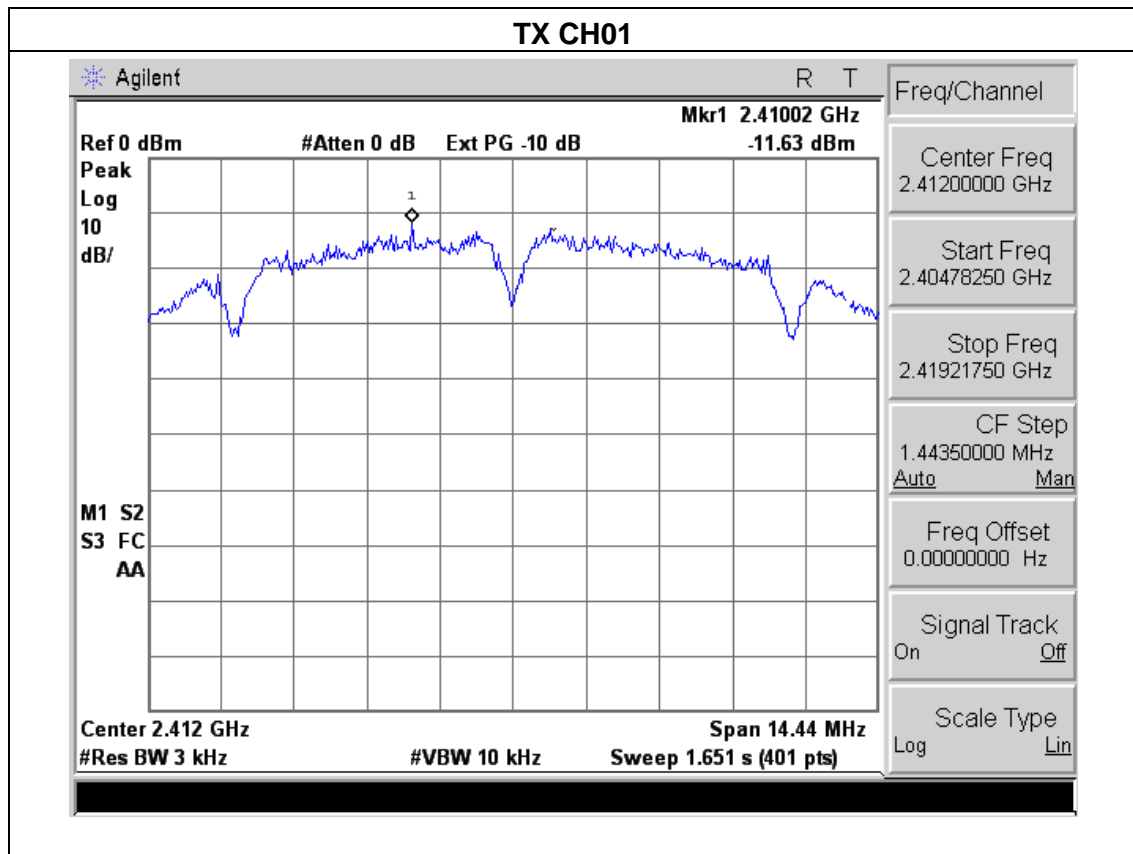


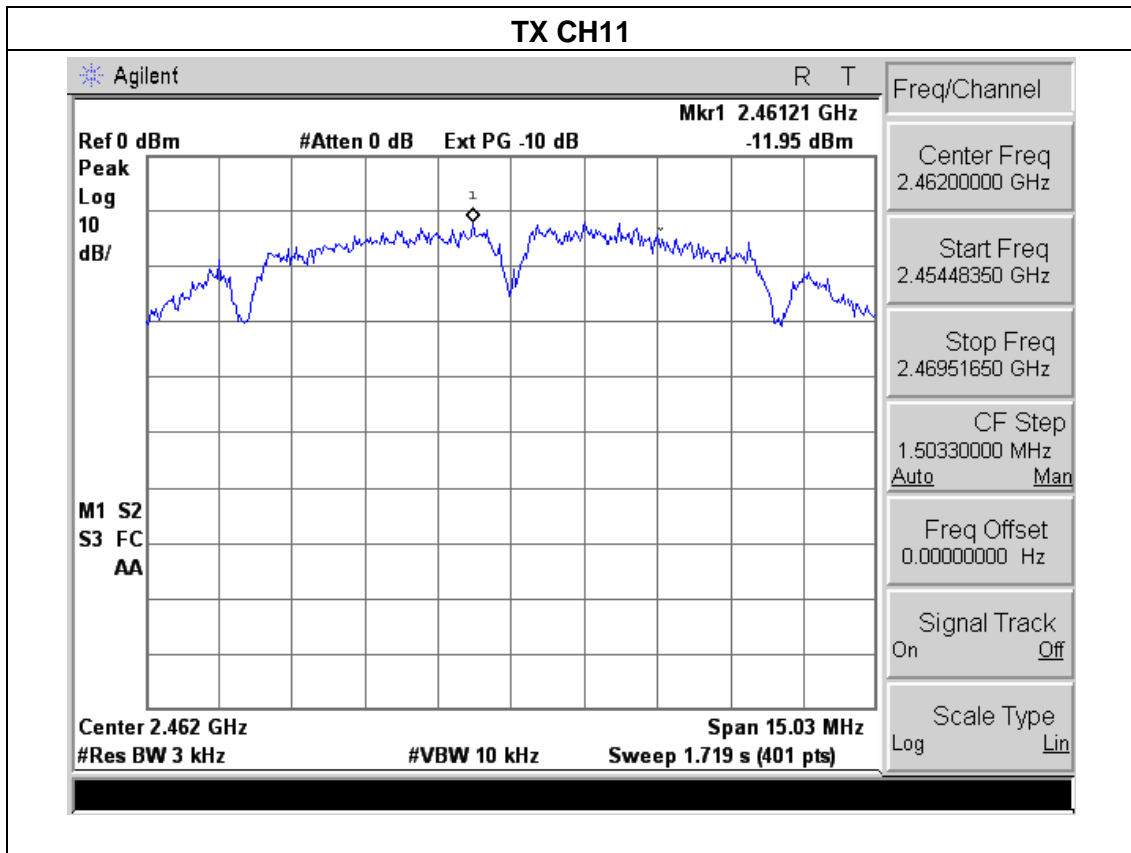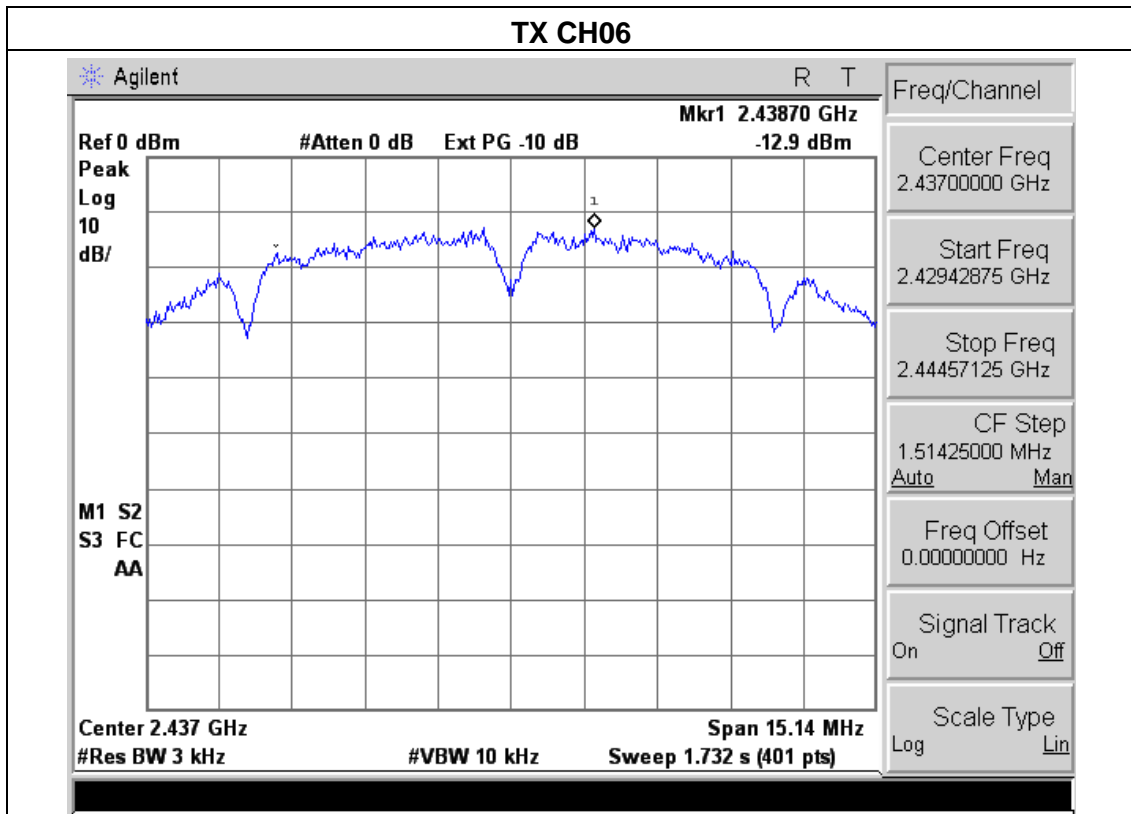

EUT :	IP Camera	Model Name :	H502W
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1015 hPa	Test Voltage :	DC 5V from adapter AC120V/60Hz
Test Mode :	TX g Mode /CH01, CH06, CH11		


Frequency	Power Density (dBm)	Limit (dBm)	Result
2412 MHz	-14.65	8	PASS
2437 MHz	-14.38	8	PASS
2462 MHz	-13.31	8	PASS


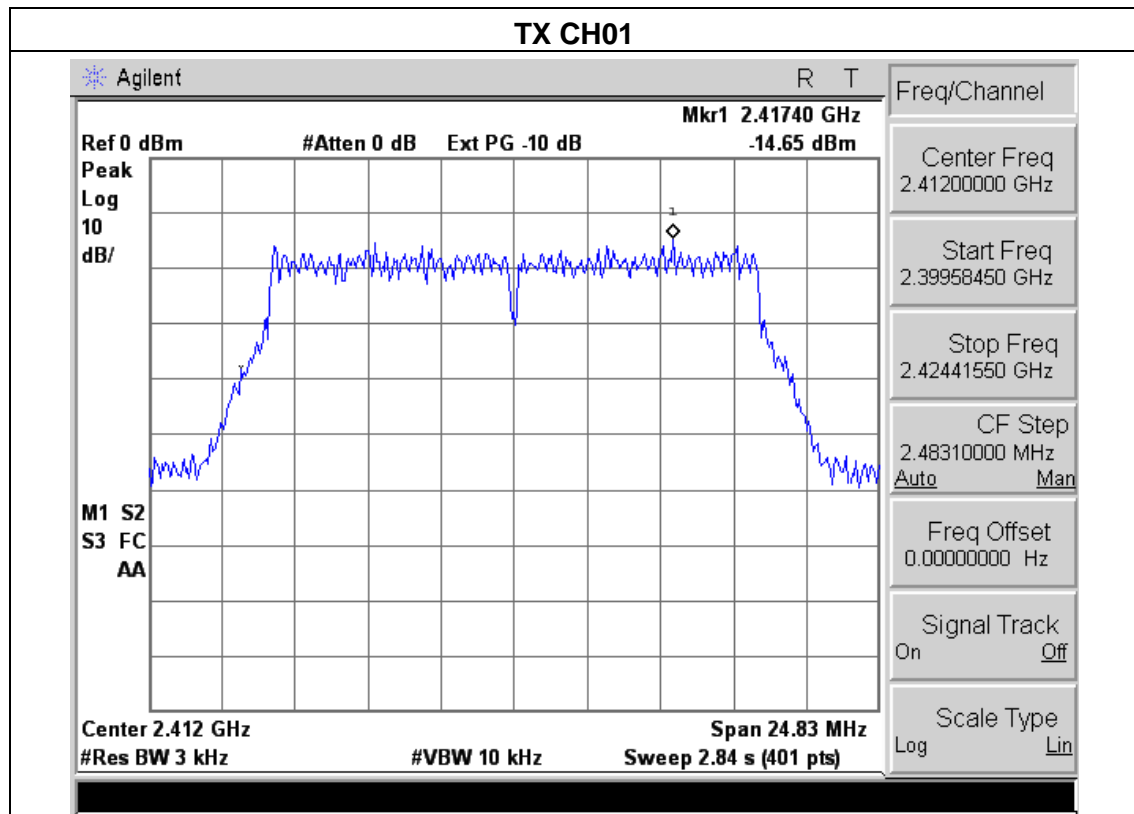


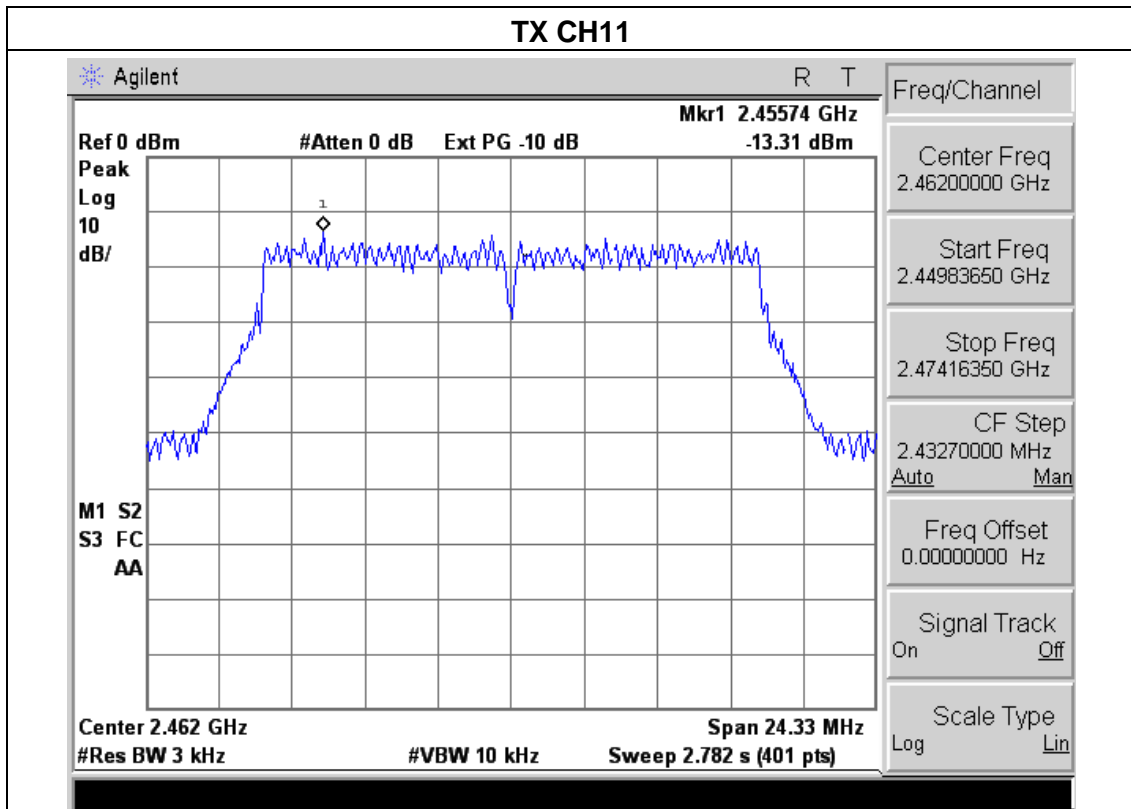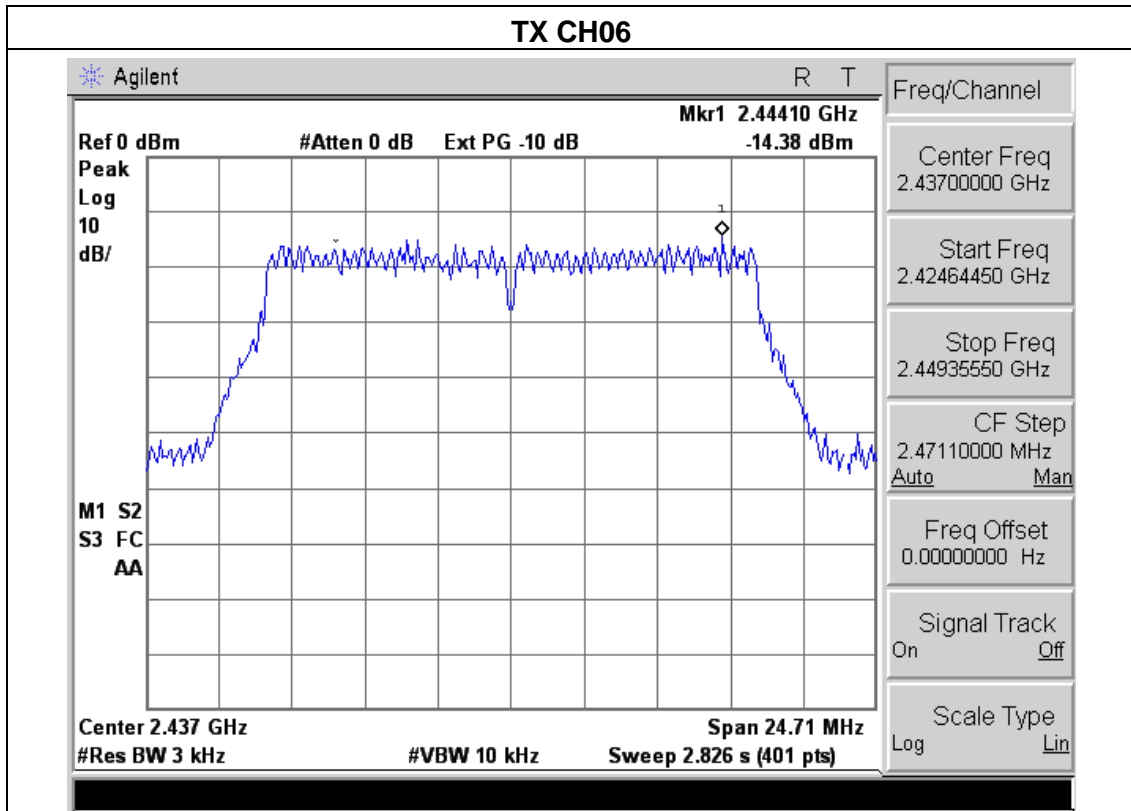

EUT :	IP Camera	Model Name :	H502W
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1015 hPa	Test Voltage :	DC 5V from adapter AC120V/60Hz
Test Mode :	TX n20 Mode /CH01, CH06, CH11		


Frequency	Power Density (dBm)	Limit (dBm)	Result
2412 MHz	-14.65	8	PASS
2437 MHz	-13.66	8	PASS
2462 MHz	-13.92	8	PASS


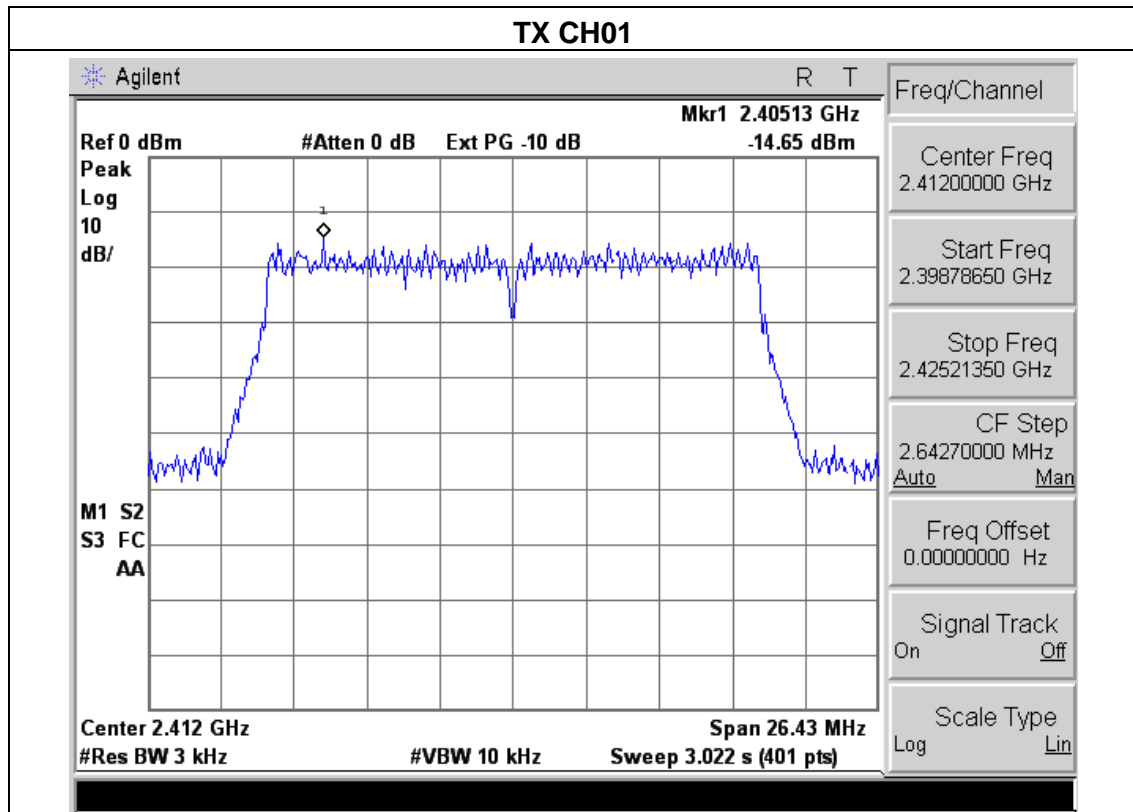


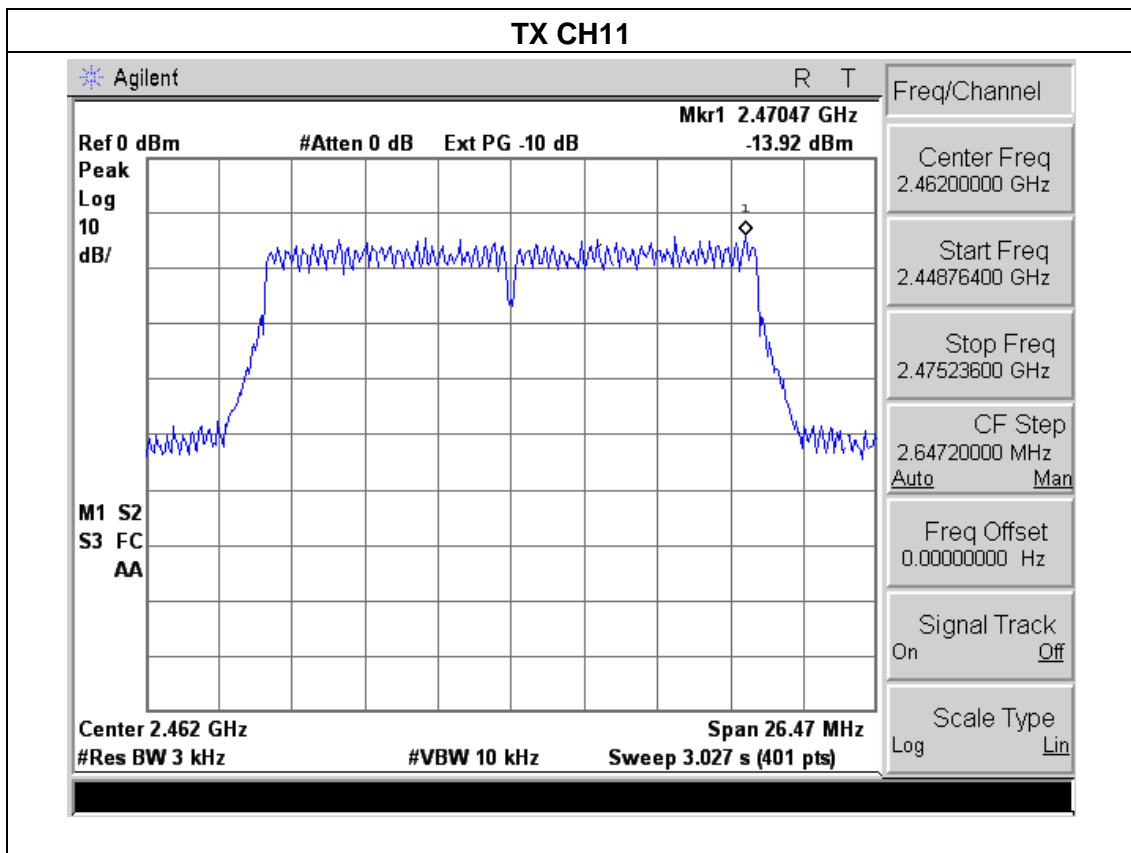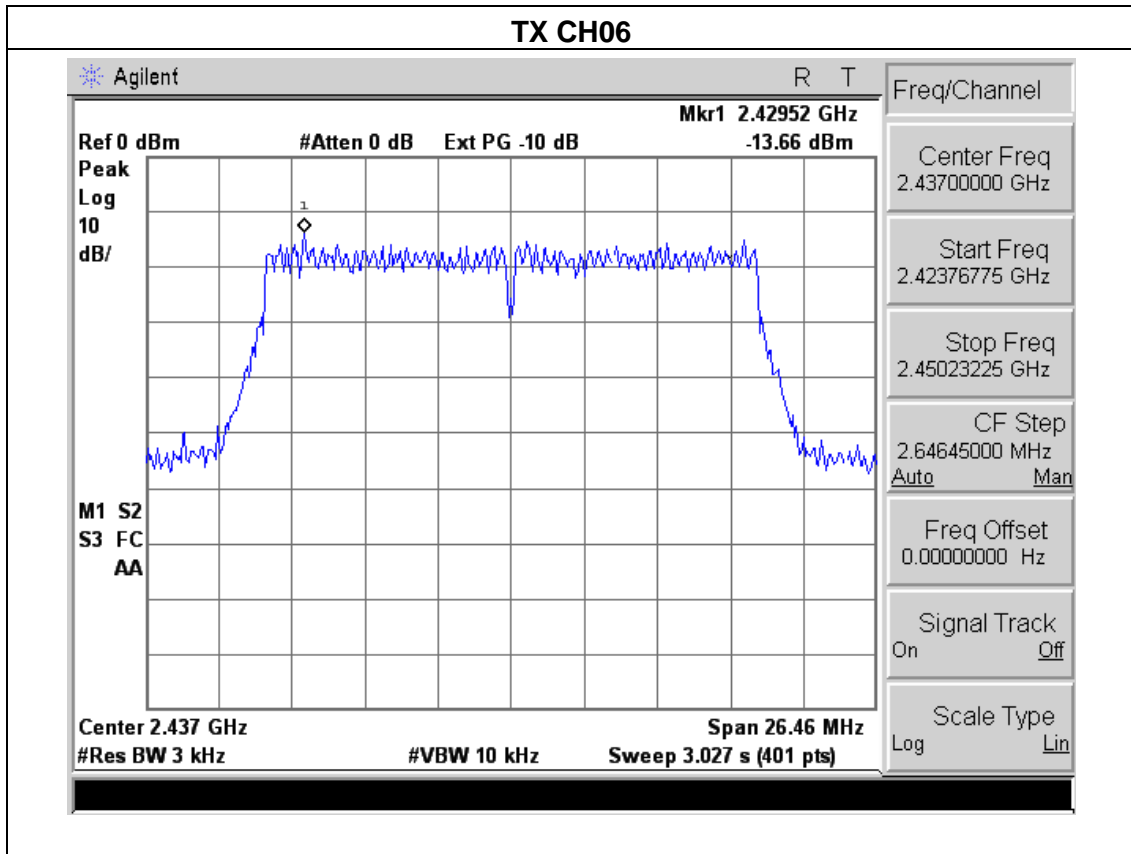

EUT :	IP Camera	Model Name :	H502W
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1015 hPa	Test Voltage :	DC 5V from adapter AC120V/60Hz
Test Mode :	TX n40 Mode /CH03, CH06, CH09		

Frequency	Power Density (dBm)	Limit (dBm)	Result
2422 MHz	-27.77	8	PASS
2437 MHz	-29.73	8	PASS
2452 MHz	-29.48	8	PASS

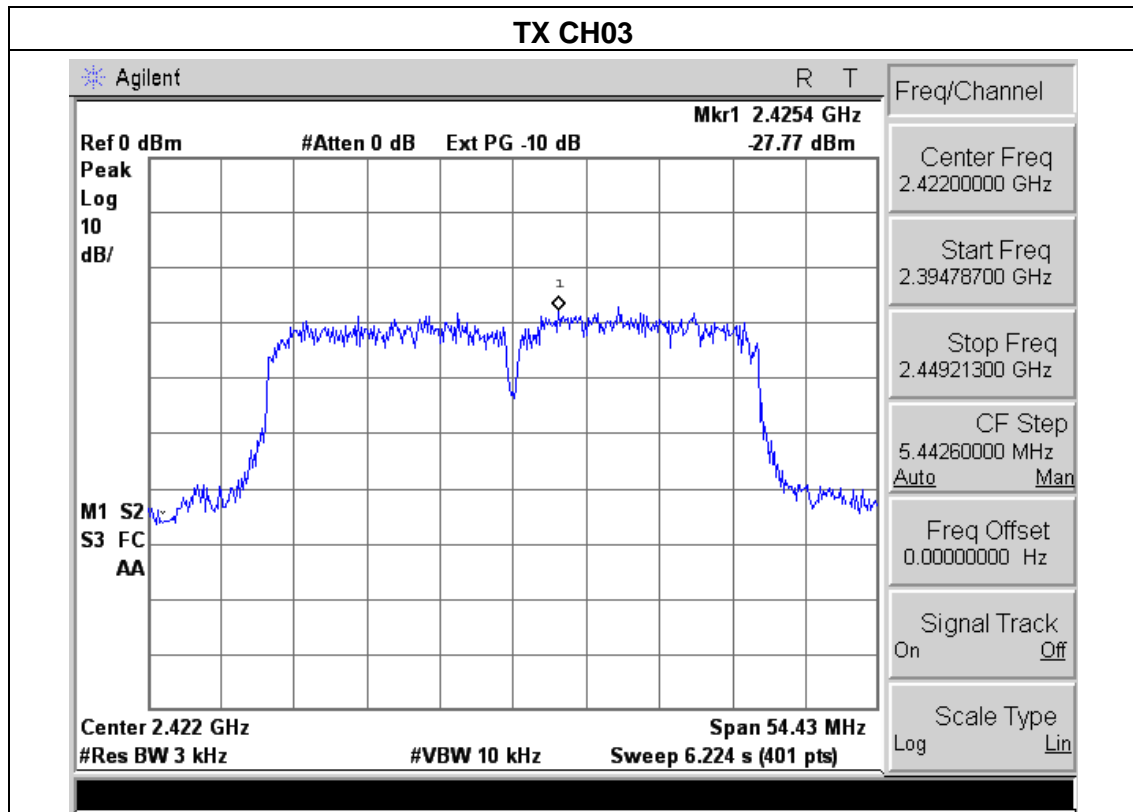

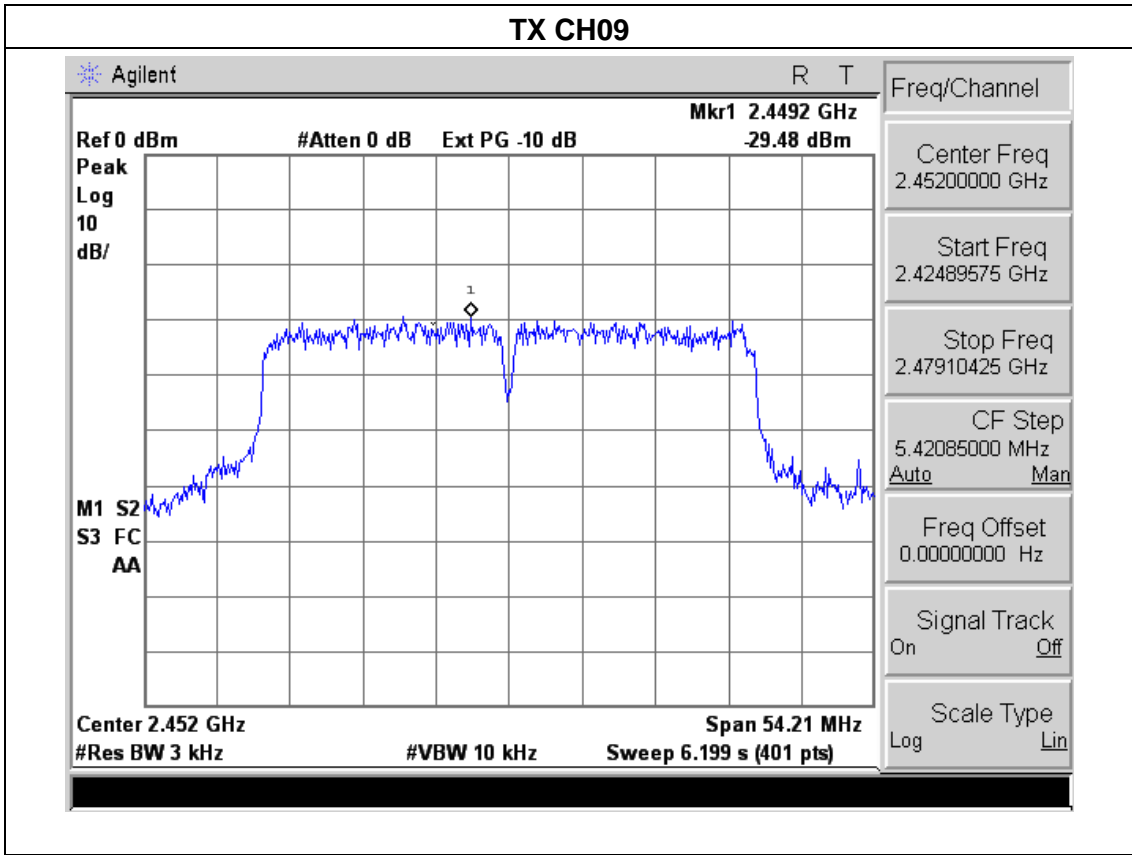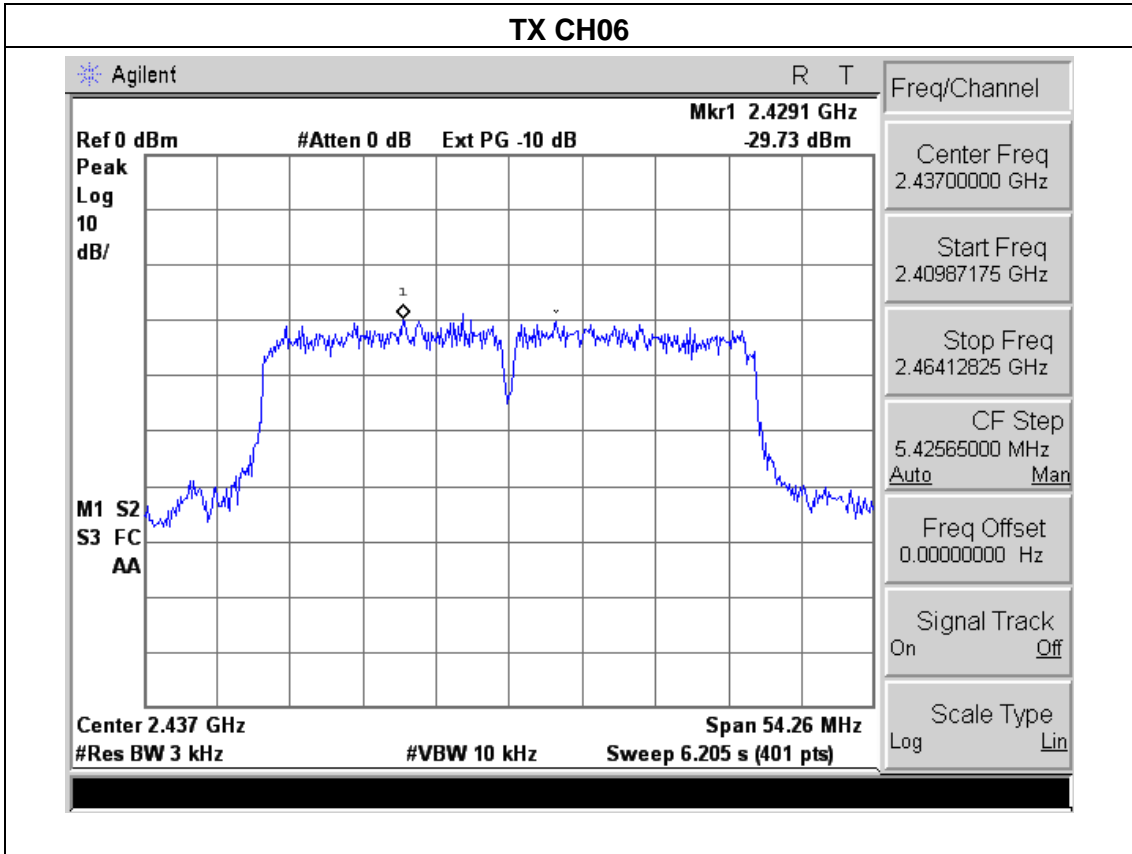

5. BANDWIDTH TEST

5.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{KHz}$ (6dB bandwidth)	2400-2483.5	PASS

5.1.1 TEST PROCEDURE

Set RBW = 100 kHz.

Set the video bandwidth (VBW) $\geq 3 \square$ RBW.

Detector = Peak.

Trace mode = max hold.

Sweep = auto couple.


Allow the trace to stabilize.

Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

5.1.2 DEVIATION FROM STANDARD

No deviation.

5.1.3 TEST SETUP

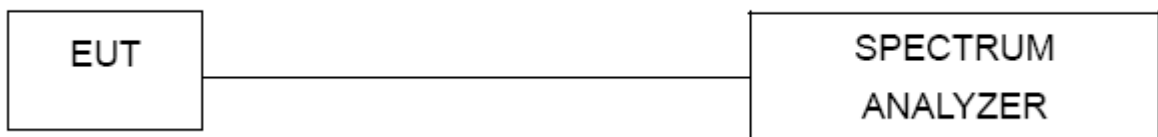


5.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

5.1.5 TEST RESULTS

EUT :	IP Camera	Model Name :	H502W
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	DC 5V from adapter AC120V/60Hz
Test Mode :	TX b Mode /CH01, CH06, CH11		

Channel	Frequency (MHz)	Data Rate (Mbps)	Antenna port	6dB bandwidth (MHz)	Limit (kHz)	Result
802.11b mode						
Low	2412	1	Chain 0	9.63	500	Pass
Middle	2437	1	Chain 0	10.10	500	Pass
High	2462	1	Chain 0	10.02	500	Pass

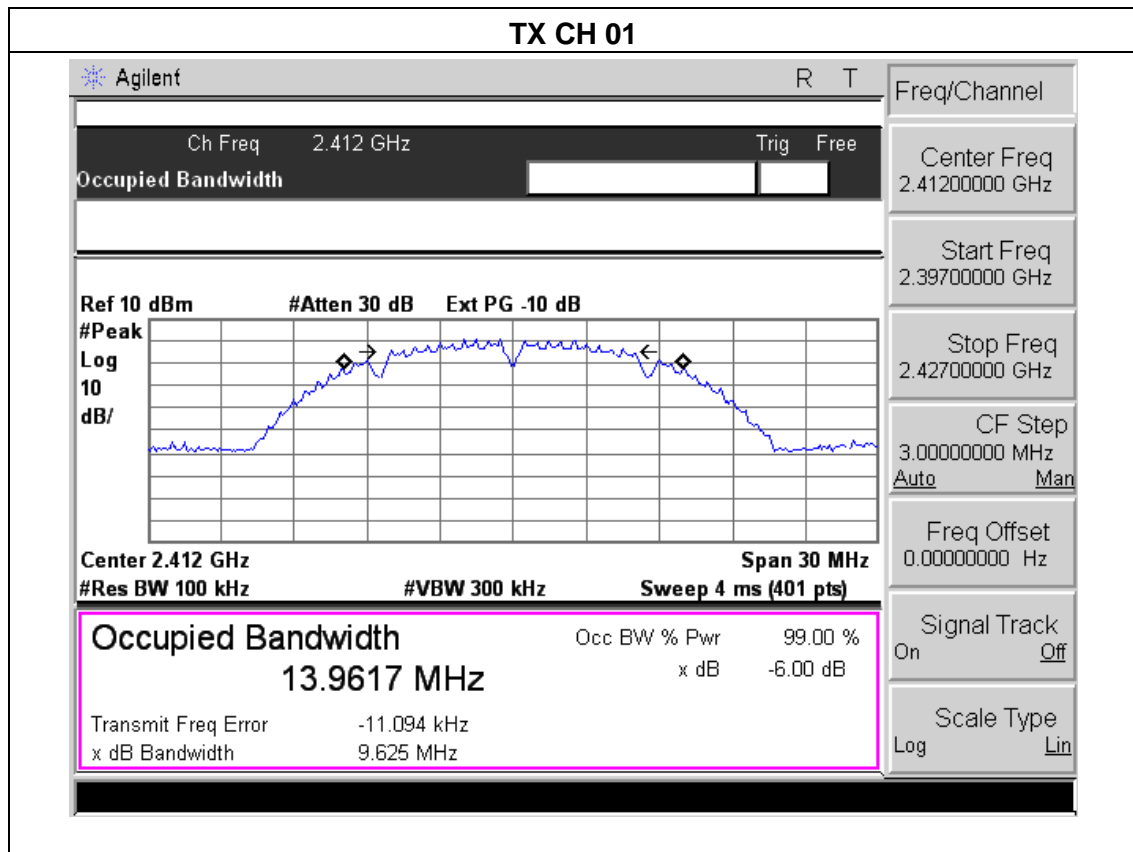

TX CH 06

Agilent
R T

Ch Freq 2.437 GHz
Trig Free

Occupied Bandwidth

Ref 10 dBm
#Atten 30 dB
Ext PG -10 dB

#Peak
Log
10
dB/

Freq/Channel

Center Freq
2.43700000 GHz

Start Freq
2.42200000 GHz

Stop Freq
2.45200000 GHz

CF Step
3.00000000 MHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

Scale Type
Log Lin

Center 2.437 GHz
Span 30 MHz

#Res BW 100 kHz
#VBW 300 kHz
Sweep 4 ms (401 pts)

Occupied Bandwidth	Occ BW % Pwr	99.00 %
13.9840 MHz	x dB	-6.00 dB
Transmit Freq Error	-5.606 kHz	
x dB Bandwidth	10.095 MHz	

TX CH 11

Agilent
R T

Ch Freq 2.462 GHz
Trig Free

Occupied Bandwidth

Ref 10 dBm
#Atten 30 dB
Ext PG -10 dB

#Peak
Log
10
dB/

Freq/Channel

Center Freq
2.46200000 GHz

Start Freq
2.44700000 GHz

Stop Freq
2.47700000 GHz

CF Step
3.00000000 MHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

Scale Type
Log Lin


Center 2.462 GHz
Span 30 MHz

#Res BW 100 kHz
#VBW 300 kHz
Sweep 4 ms (401 pts)

Occupied Bandwidth	Occ BW % Pwr	99.00 %
13.9703 MHz	x dB	-6.00 dB
Transmit Freq Error	-7.407 kHz	
x dB Bandwidth	10.022 MHz	

EUT :	IP Camera	Model Name :	H502W
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	DC 5V from adapter AC120V/60Hz
Test Mode :	TX g Mode /CH01, CH06, CH11		

Channel	Frequency (MHz)	Data Rate (Mbps)	Antenna port	6dB bandwidth (MHz)	Limit (kHz)	Result
802.11b mode						
Low	2412	6	Chain 0	16.55	500	Pass
Middle	2437	6	Chain 0	16.47	500	Pass
High	2462	6	Chain 0	16.22	500	Pass

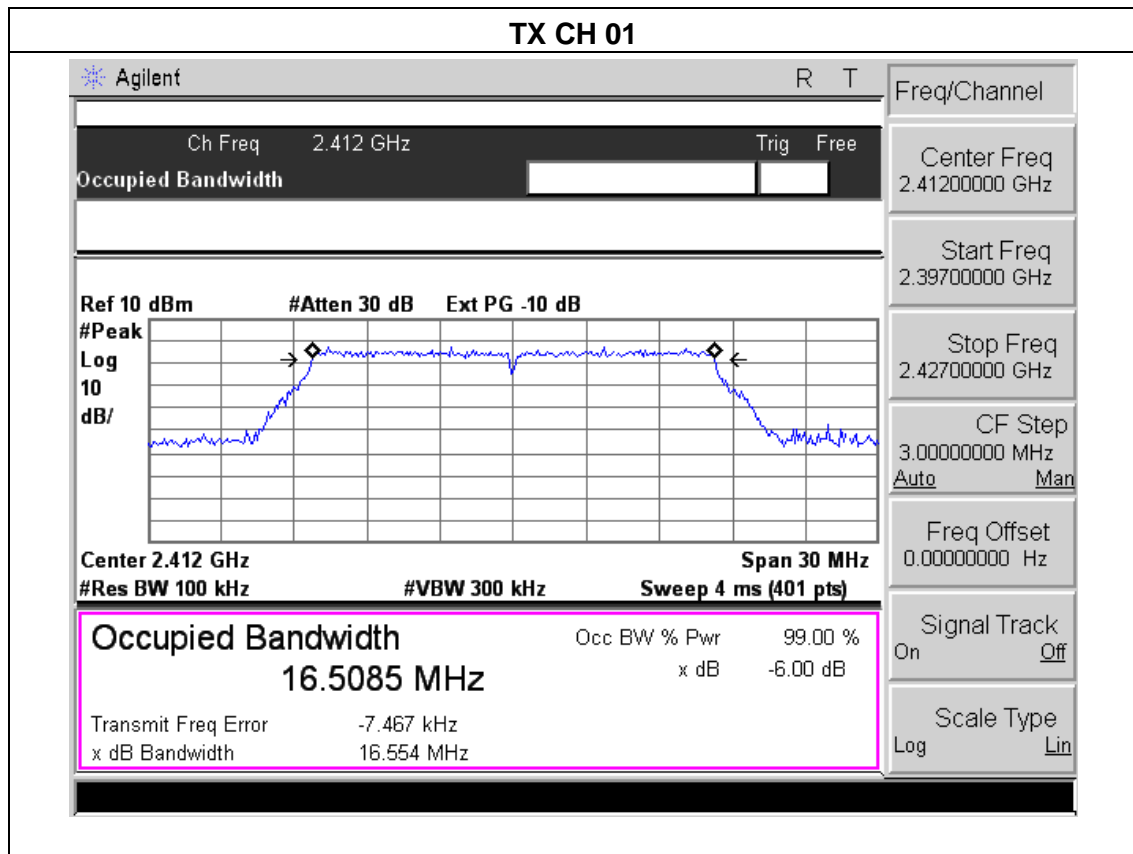

TX CH 06

Agilent
R T

Ch Freq 2.437 GHz
Trig Free

Occupied Bandwidth

Ref 10 dBm
#Atten 30 dB
Ext PG -10 dB

#Peak
Log
10
dB/

Center 2.437 GHz Span 30 MHz
 #Res BW 100 kHz #VBW 300 kHz Sweep 4 ms (401 pts)

Occupied Bandwidth	Occ BW % Pwr	99.00 %
16.5247 MHz	x dB	-6.00 dB
Transmit Freq Error	-7.345 kHz	
x dB Bandwidth	16.474 MHz	

Freq/Channel

Center Freq 2.43700000 GHz

Start Freq 2.42200000 GHz

Stop Freq 2.45200000 GHz

CF Step 3.00000000 MHz
Auto Man

Freq Offset 0.00000000 Hz

Signal Track On Off

Scale Type Log Lin

TX CH 11

Agilent
R T

Ch Freq 2.462 GHz
Trig Free

Occupied Bandwidth

Ref 10 dBm
#Atten 30 dB
Ext PG -10 dB

#Peak
Log
10
dB/

Center 2.462 GHz Span 30 MHz
 #Res BW 100 kHz #VBW 300 kHz Sweep 4 ms (401 pts)

Occupied Bandwidth	Occ BW % Pwr	99.00 %
16.4541 MHz	x dB	-6.00 dB
Transmit Freq Error	12.527 kHz	
x dB Bandwidth	16.218 MHz	

Freq/Channel

Center Freq 2.46200000 GHz

Start Freq 2.44700000 GHz

Stop Freq 2.47700000 GHz

CF Step 3.00000000 MHz
Auto Man


Freq Offset 0.00000000 Hz

Signal Track On Off

Scale Type Log Lin

EUT :	IP Camera	Model Name :	H502W
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	DC 5V from adapter AC120V/60Hz
Test Mode :	TX n20 Mode /CH01, CH06, CH11		

Channel	Frequency (MHz)	Data Rate (Mbps)	Antenna port	6dB bandwidth (MHz)	Limit (kHz)	Result
802.11b mode						
Low	2412	Msc7	Chain 0	17.62	500	Pass
Middle	2437	Msc7	Chain 0	17.64	500	Pass
High	2462	Msc7	Chain 0	17.65	500	Pass

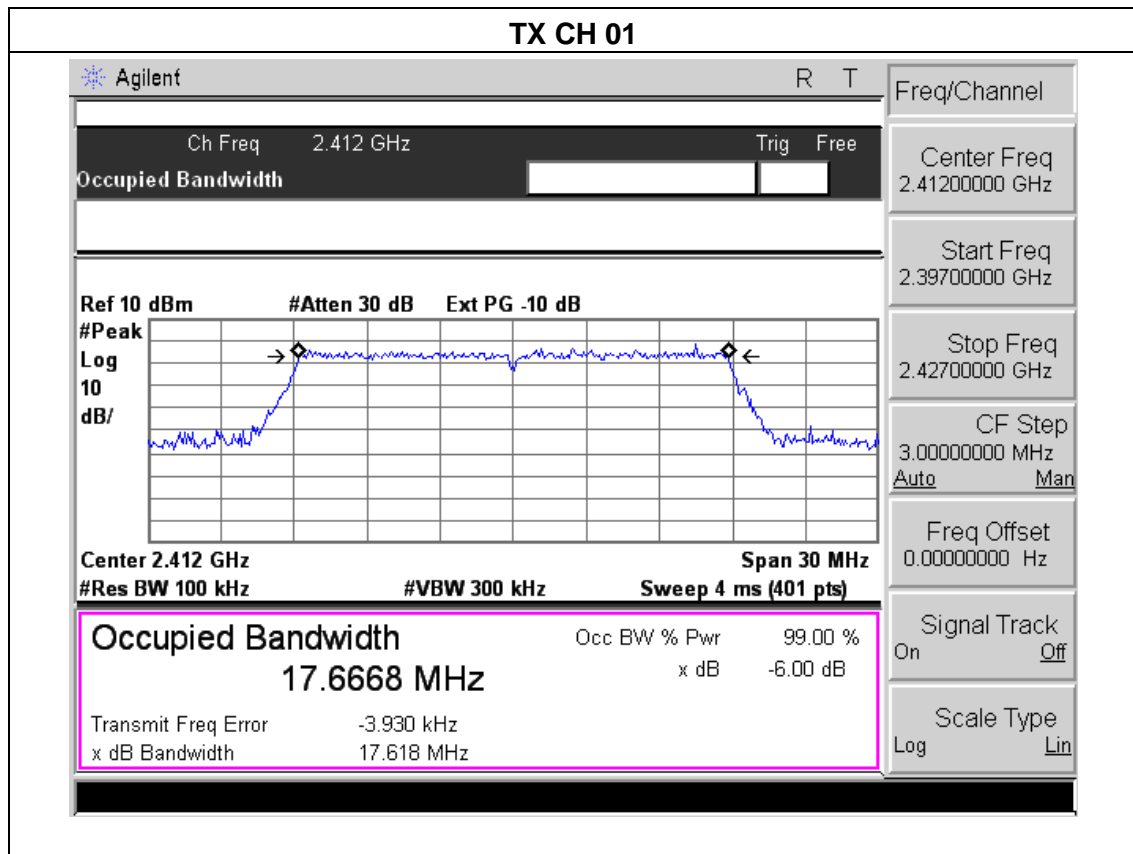

TX CH 06

Agilent
R T

Ch Freq 2.437 GHz
Trig Free

Occupied Bandwidth

Ref 10 dBm
#Atten 30 dB
Ext PG -10 dB

#Peak
Log
10
dB/

Occupied Bandwidth
17.6546 MHz

Transmit Freq Error -4.373 kHz
x dB Bandwidth 17.643 MHz

Occ BW % Pwr 99.00 %
x dB -6.00 dB

Center 2.437 GHz
Span 30 MHz

#Res BW 100 kHz
#VBW 300 kHz
Sweep 4 ms (401 pts)

Freq/Channel
Center Freq 2.43700000 GHz
Start Freq 2.42200000 GHz
Stop Freq 2.45200000 GHz
CF Step 3.00000000 MHz
Auto Man

Freq Offset 0.00000000 Hz

Signal Track On Off

Scale Type Log Lin

TX CH 11

Agilent
R T

Ch Freq 2.462 GHz
Trig Free

Occupied Bandwidth

Ref 10 dBm
#Atten 30 dB
Ext PG -10 dB

#Peak
Log
10
dB/

Occupied Bandwidth
17.6813 MHz

Transmit Freq Error 9.558 kHz
x dB Bandwidth 17.648 MHz

Occ BW % Pwr 99.00 %
x dB -6.00 dB

Center 2.462 GHz
Span 30 MHz

#Res BW 100 kHz
#VBW 300 kHz
Sweep 4 ms (401 pts)

Freq/Channel
Center Freq 2.46200000 GHz
Start Freq 2.44700000 GHz
Stop Freq 2.47700000 GHz
CF Step 3.00000000 MHz
Auto Man


Freq Offset 0.00000000 Hz

Signal Track On Off

Scale Type Log Lin

EUT :	IP Camera	Model Name :	H502W
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	DC 5V from adapter AC120V/60Hz
Test Mode :	TX n40 Mode /CH03, CH06, CH09		

Channel	Frequency (MHz)	Data Rate (Mbps)	Antenna port	6dB bandwidth (MHz)	Limit (kHz)	Result
802.11b mode						
Low	2422	Msc7	Chain 0	36.28	500	Pass
Middle	2437	Msc7	Chain 0	36.17	500	Pass
High	2452	Msc7	Chain 0	36.14	500	Pass

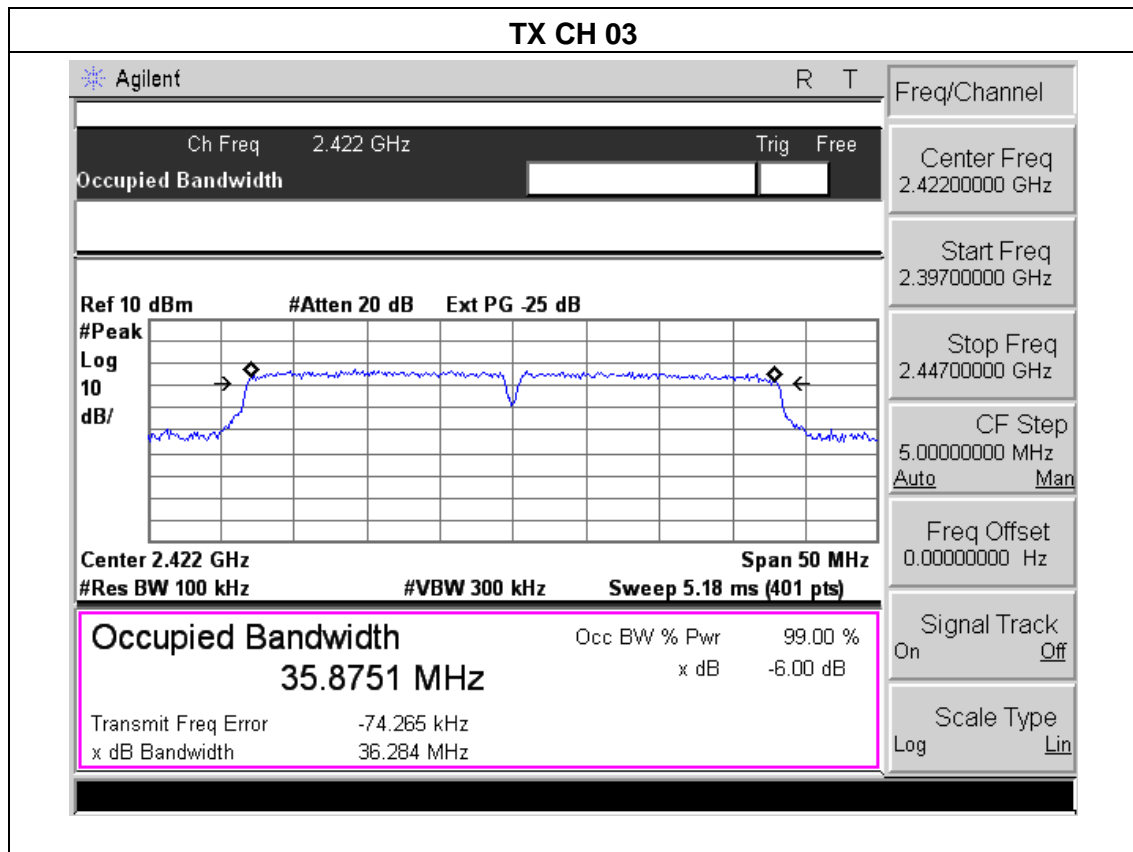

TX CH 06

Agilent
R T

Ch Freq 2.437 GHz
Trig Free

Occupied Bandwidth

Ref 10 dBm
#Atten 20 dB
Ext PG -25 dB

#Peak
Log
10
dB/

Center 2.437 GHz Span 50 MHz

#Res BW 100 kHz #VBW 300 kHz

Occupied Bandwidth

35.8442 MHz

Transmit Freq Error -92.055 kHz

x dB Bandwidth 36.171 MHz

Freq/Channel

Center Freq 2.43700000 GHz

Start Freq 2.41200000 GHz

Stop Freq 2.46200000 GHz

CF Step 5.00000000 MHz

Auto Man

Freq Offset 0.00000000 Hz

Signal Track On Off

Scale Type Log Lin

TX CH09

Agilent
R T

Ch Freq 2.452 GHz
Trig Free

Occupied Bandwidth

Ref 10 dBm
#Atten 20 dB
Ext PG -25 dB

#Peak
Log
10
dB/

Center 2.452 GHz Span 50 MHz

#Res BW 100 kHz #VBW 300 kHz

Occupied Bandwidth

35.8326 MHz

Transmit Freq Error -82.532 kHz

x dB Bandwidth 36.139 MHz

Freq/Channel

Center Freq 2.45200000 GHz

Start Freq 2.42700000 GHz

Stop Freq 2.47700000 GHz

CF Step 5.00000000 MHz

Auto Man

Freq Offset 0.00000000 Hz

Signal Track On Off

Scale Type Log Lin

6. PEAK OUTPUT POWER TEST

6.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Peak Output Power	1 watt or 30dBm	2400-2483.5	PASS

6.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the Power meter

6.1.2 DEVIATION FROM STANDARD

No deviation.

6.1.3 TEST SETUP



6.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

6.1.5 TEST RESULTS

EUT :	IP Camera	Model Name :	H502W
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	DC 5V from adapter AC120V/60Hz
Test Mode :	TX b/g/n Mode /CH01, CH06, CH11		

TX 802.11b Mode			
Test Channe	Frequency	Maximum Peak Conducted Output Power	LIMIT
	(MHz)	(dBm)	dBm
CH01	2412	18.99	30
CH06	2437	18.57	30
CH11	2462	18.09	30
TX 802.11g Mode			
CH01	2412	17.01	30
CH06	2437	17.71	30
CH11	2462	17.95	30
TX 802.11n20 Mode			
CH01	2412	15.87	30
CH06	2437	15.53	30
CH11	2462	15.08	30
TX 802.11n40 Mode			
CH03	2422	13.76	30
CH06	2437	13.32	30
CH09	2452	13.58	30

7. 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE

APPLICABLE STANDARD

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

TEST PROCEDURE

- a) Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- b) Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
- c) Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
- d) Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
- e) Repeat above procedures until all measured frequencies were complete.

7.1 DEVIATION FROM STANDARD

No deviation.

7.2 TEST SETUP



7.3 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

7.4 TEST RESULTS


EUT :	IP Camera	Model Name :	H502W
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	DC 5V from adapter AC120V/60Hz
Test Mode :	TX b/g/n Mode		

Frequency Band	Delta Peak to band emission (dBc)	> Limit (dBc)	Result
802.11b mode			
Left-band	47.39	20	Pass
Right-band	49.74	20	Pass
802.11g mode			
Left-band	46.11	20	Pass
Right-band	41.33	20	Pass
802.11n-HT20 mode			
Left-band	45.44	20	Pass
Right-band	39.98	20	Pass
802.11n-HT40 mode			
Left-band	38.46	20	Pass
Right-band	38.05	20	Pass


802.11b: Band Edge, Left Side

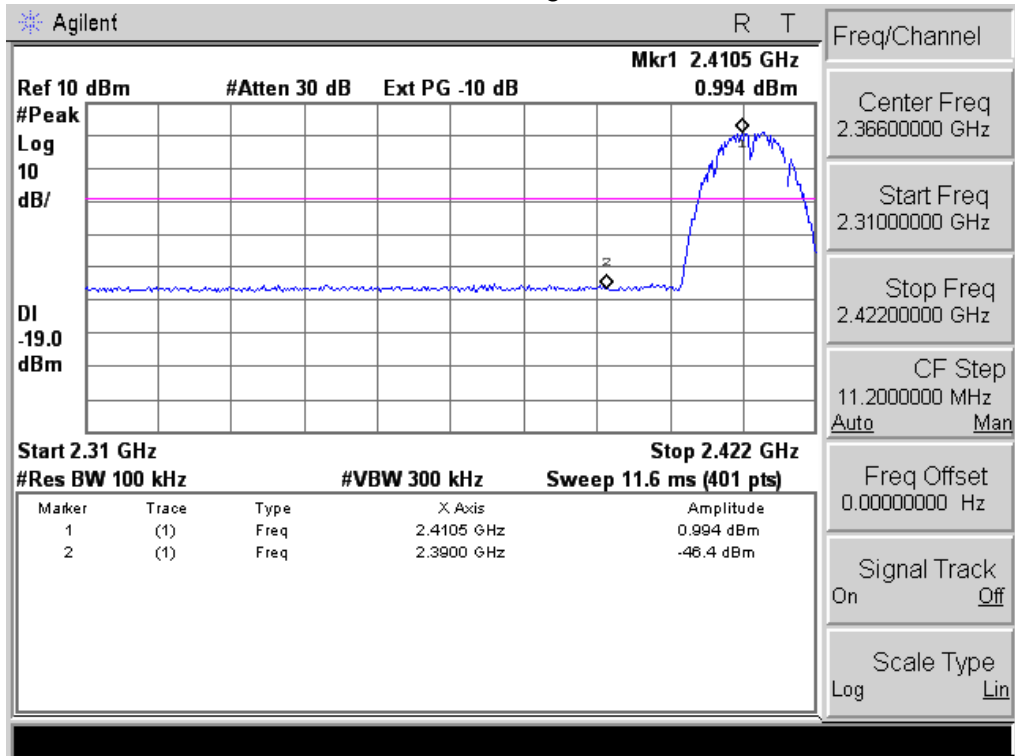


802.11b: Band Edge, Right Side

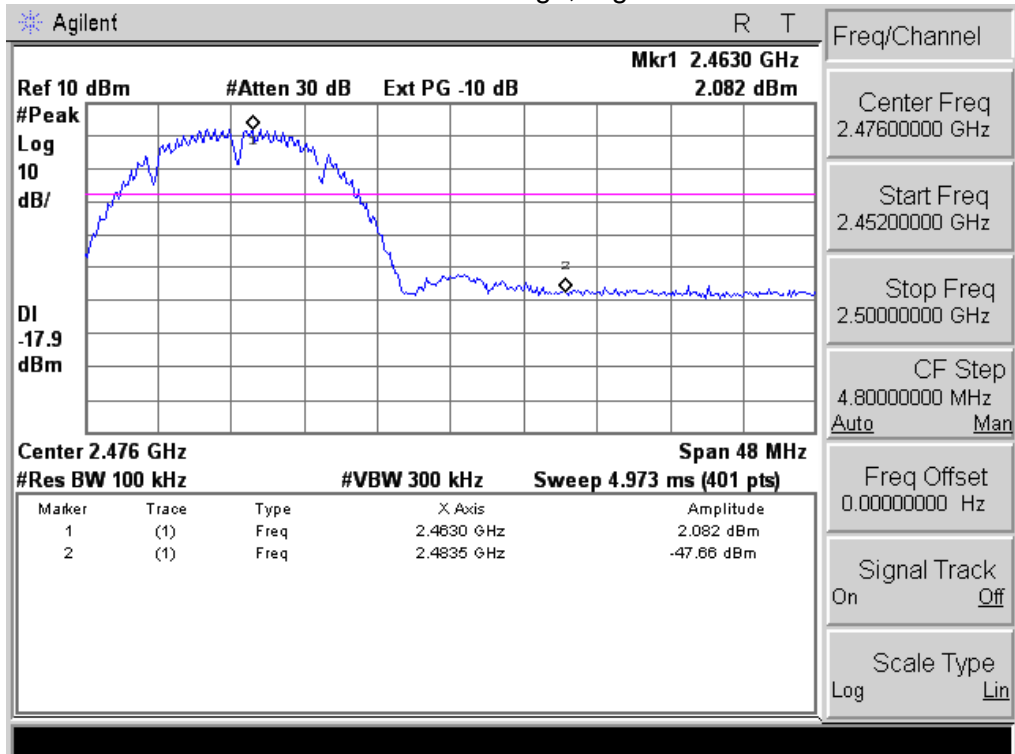


802.11g: Band Edge, Left Side

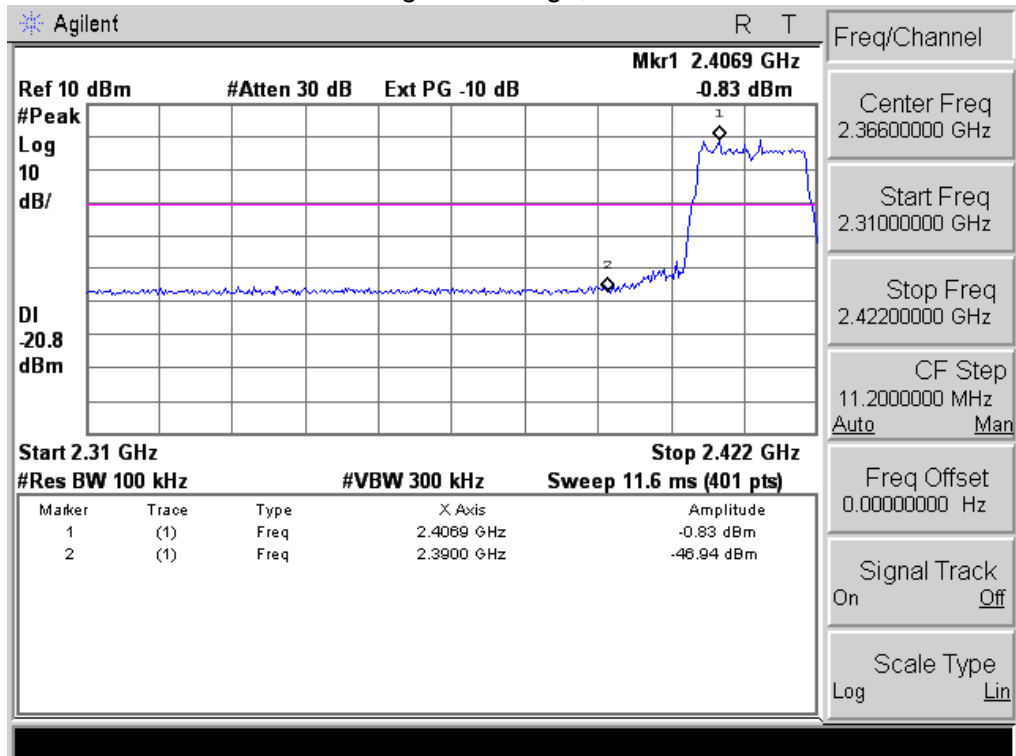


802.11g: Band Edge, Right Side

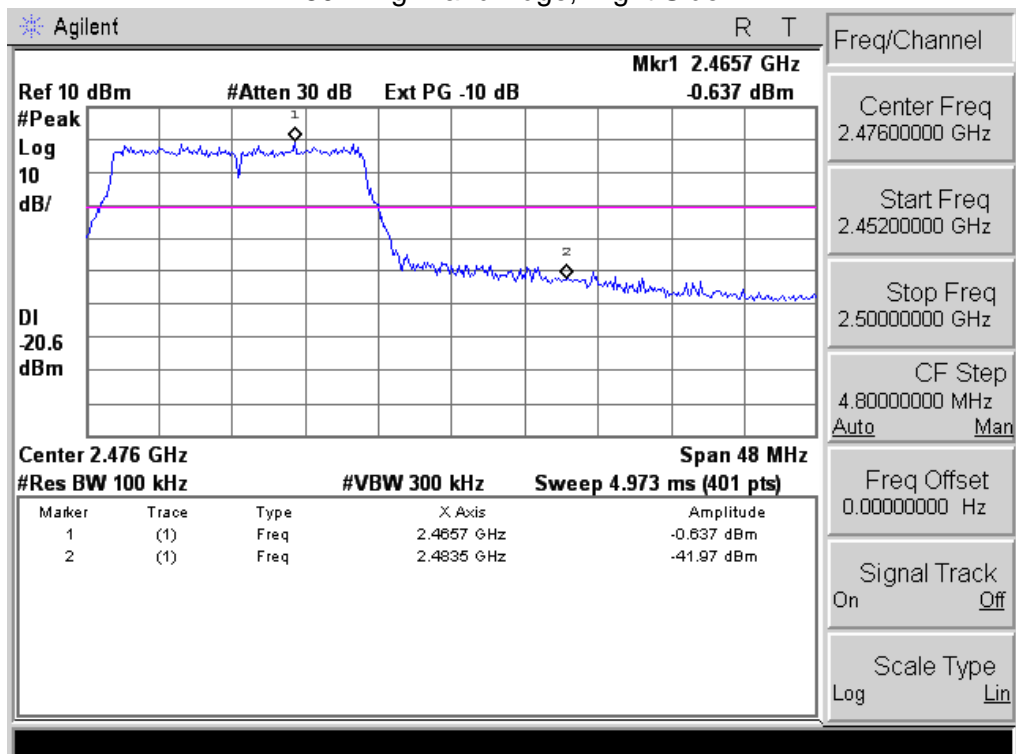


802.11n20: Band Edge, Left Side

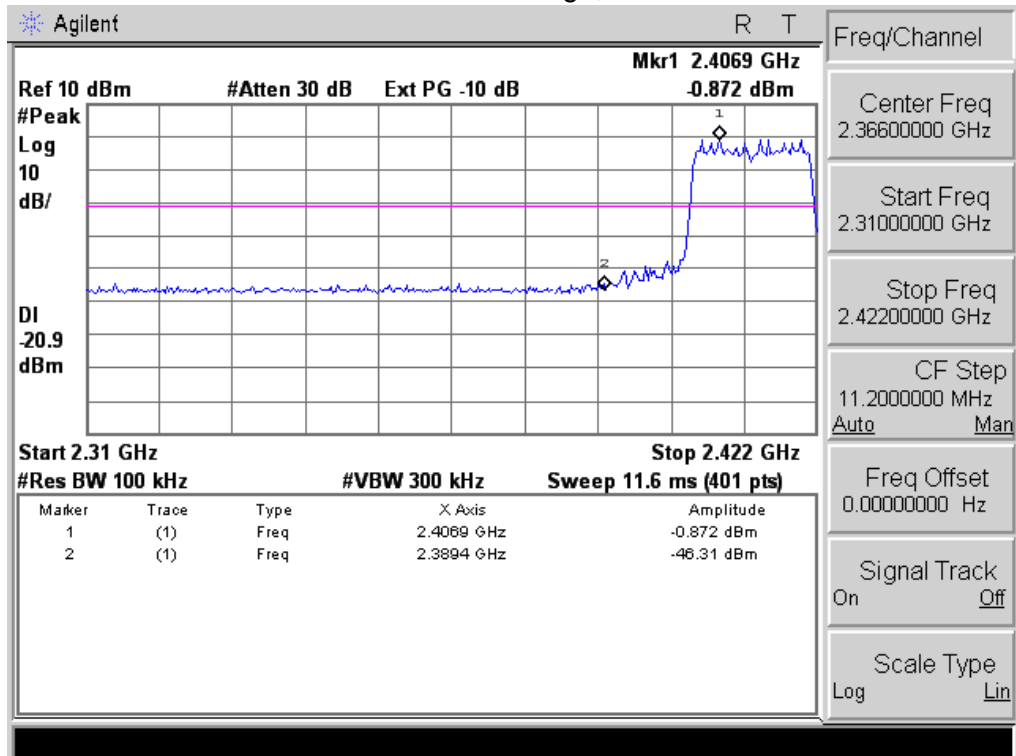


802.11n20: Band Edge, Right Side

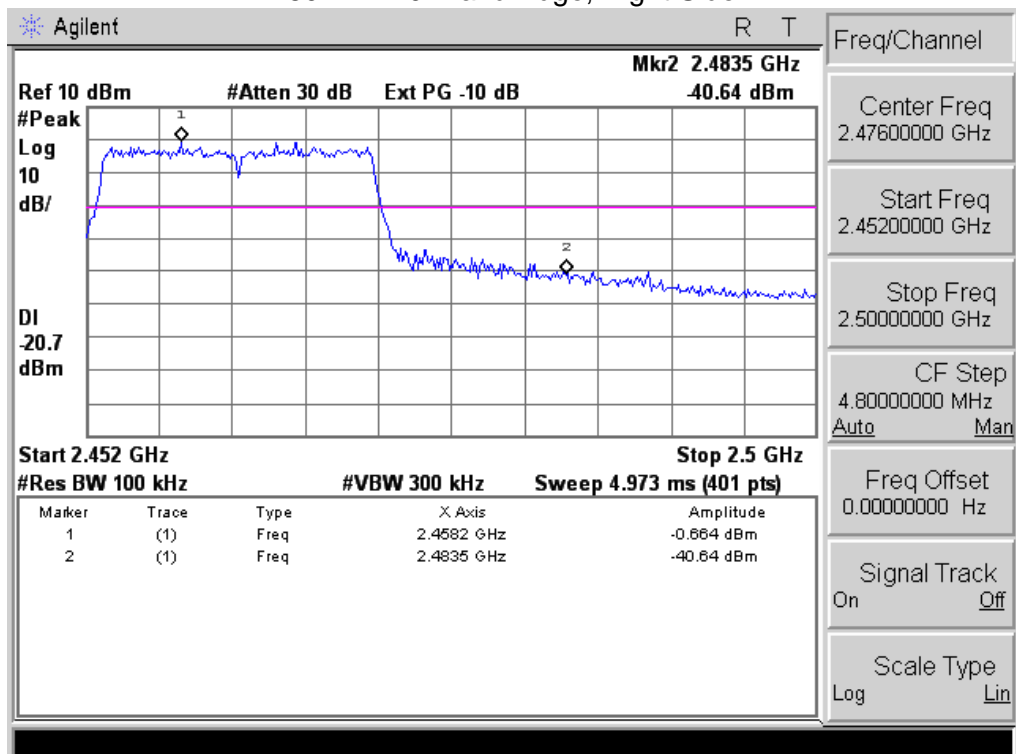

802.11n40: Band Edge, Left Side

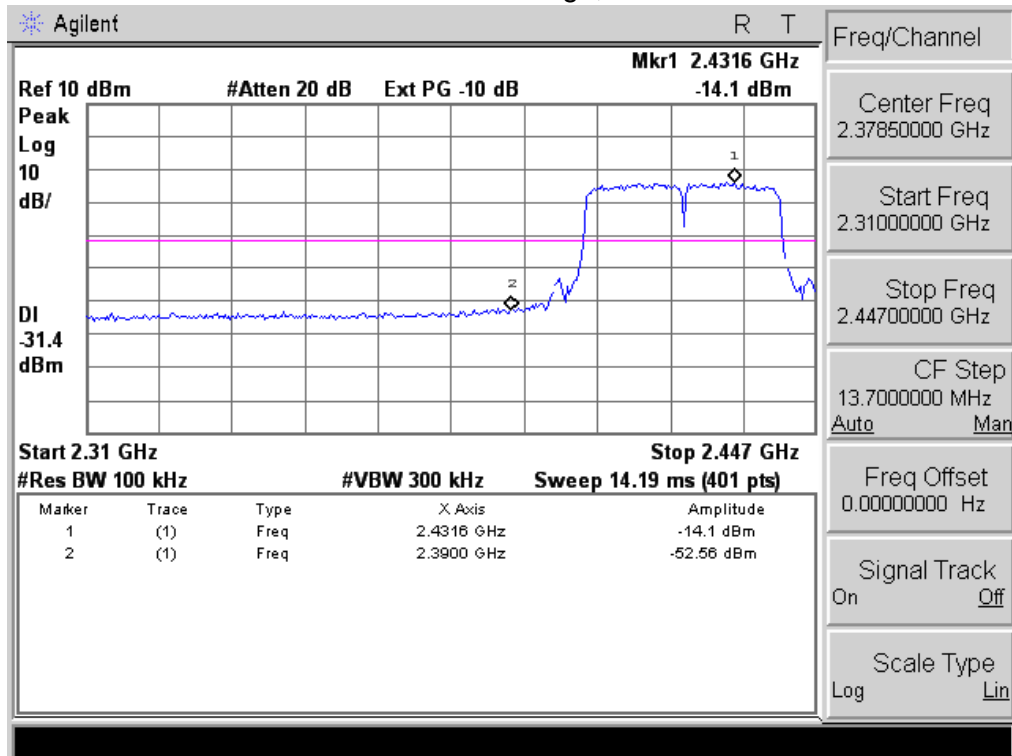

802.11n40: Band Edge, Right Side

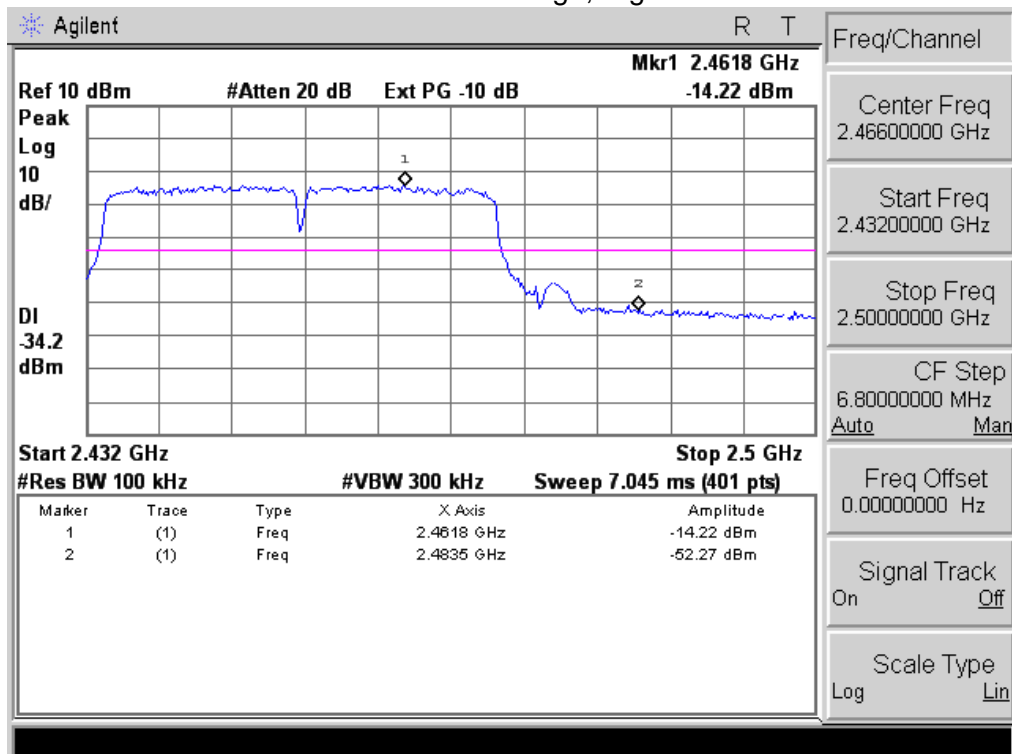

8. ANTENNA REQUIREMENT

8.1 STANDARD REQUIREMENT



15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

8.2 EUT ANTENNA

The EUT antenna is external antenna. It comply with the standard requirement.

9. EUT TEST PHOTO

Radiated Measurement Photos

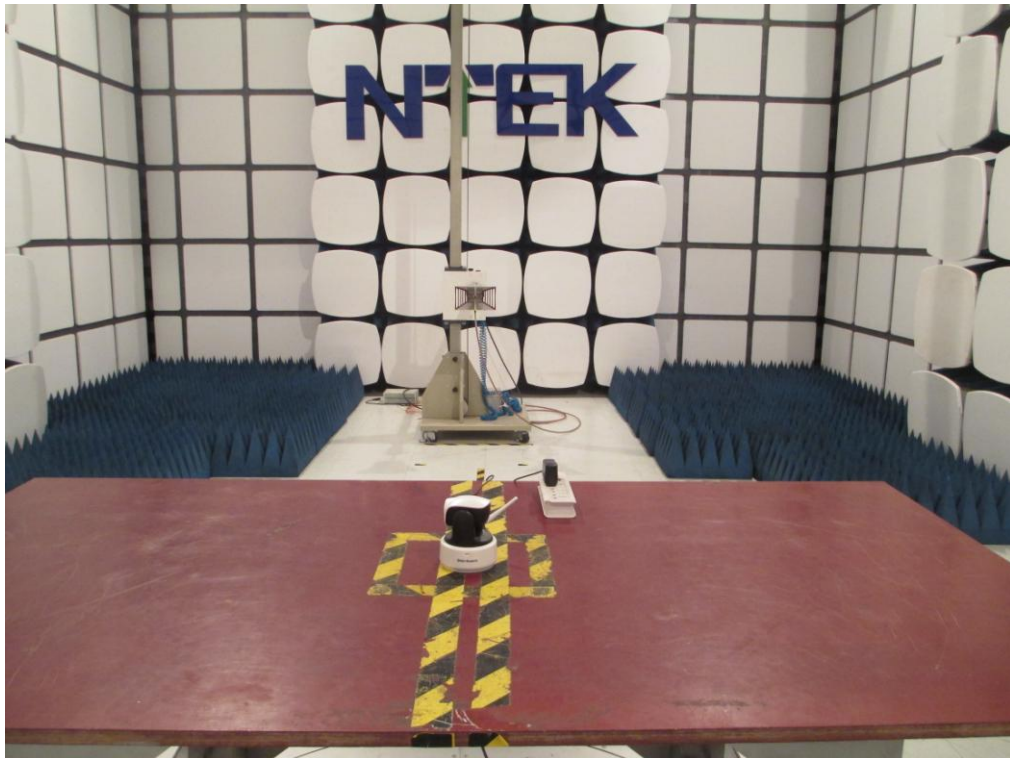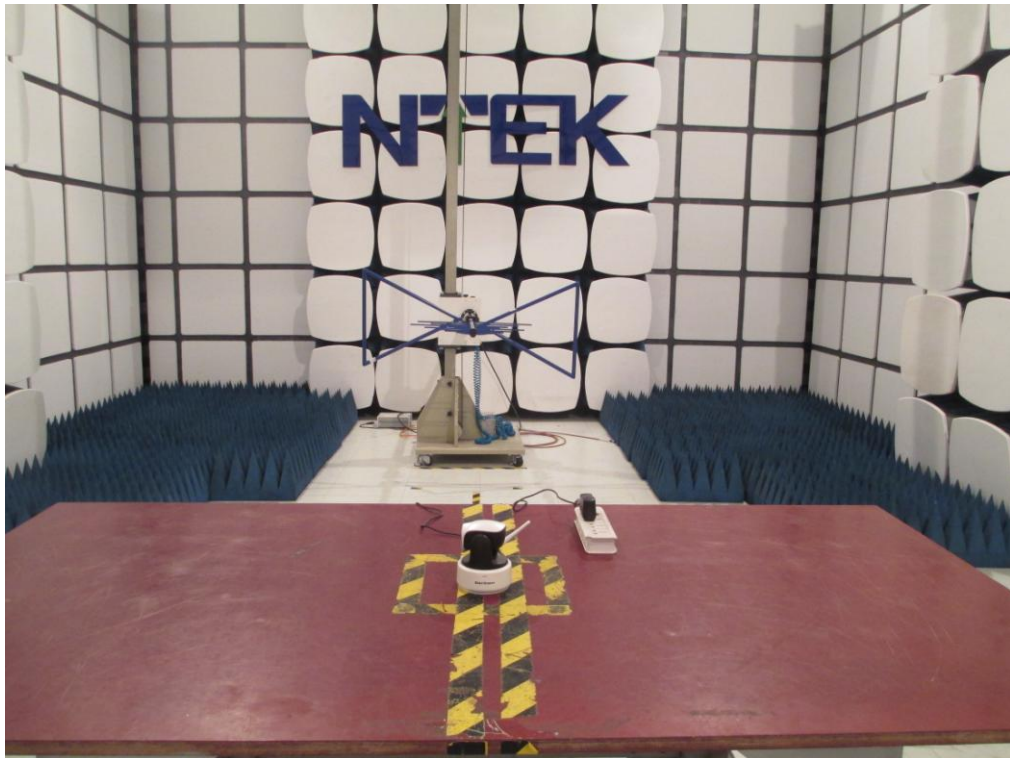

Conducted Measurement Photos

