

## FCC Test Report

**Report No.:** RFBDTL-WTW-P21100469-1

**FCC ID:** 2AAFMRGP0129

**Test Model:** RGP0129

**Received Date:** 2021/10/19

**Test Date:** 2021/10/19 ~ 2022/1/6

**Issued Date:** 2022/10/25

**Applicant:** Corsair Memory, Inc.

**Address:** 115 North McCarthy Blvd, Milpitas, CA 95035, USA

**Issued By:** Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch  
Lin Kou Laboratories

**Lab Address:** No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

**FCC Registration /  
Designation Number:** 198487 / TW2021



This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/>, and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

## Table of Contents

<b>Release Control Record</b> .....	<b>3</b>
<b>1 Certificate of Conformity</b> .....	<b>4</b>
<b>2 Summary of Test Results</b> .....	<b>5</b>
2.1 Measurement Uncertainty .....	5
2.2 Modification Record .....	5
<b>3 General Information</b> .....	<b>6</b>
3.1 General Description of EUT .....	6
3.2 Description of Test Modes .....	7
3.2.1 Test Mode Applicability and Tested Channel Detail .....	8
3.3 Duty Cycle of Test Signal .....	9
3.4 Description of Support Units .....	10
3.4.1 Configuration of System under Test .....	10
3.5 General Description of Applied Standards .....	11
<b>4 Test Types and Results</b> .....	<b>12</b>
4.1 Radiated Emission and Bandedge Measurement .....	12
4.1.1 Limits of Radiated Emission and Bandedge Measurement .....	12
4.1.2 Test Instruments .....	13
4.1.3 Test Procedures .....	14
4.1.4 Deviation from Test Standard .....	14
4.1.5 Test Setup .....	15
4.1.6 EUT Operating Conditions .....	16
4.1.7 Test Results .....	17
4.2 Conducted Emission Measurement .....	24
4.2.1 Limits of Conducted Emission Measurement .....	24
4.2.2 Test Instruments .....	25
4.2.3 Test Procedures .....	26
4.2.4 Deviation From Test Standard .....	26
4.2.5 Test Setup .....	26
4.2.6 EUT Operating Condition .....	26
4.2.7 Test Results .....	27
4.3 Channel Bandwidth .....	31
4.3.1 Test Setup .....	31
4.3.2 Test Instruments .....	31
4.3.3 Test Procedure .....	31
4.3.4 Deviation from Test Standard .....	31
4.3.5 EUT Operating Condition .....	31
4.3.6 Test Results .....	32
<b>5 Pictures of Test Arrangements</b> .....	<b>33</b>
<b>Appendix – Information of the Testing Laboratories</b> .....	<b>34</b>

### Release Control Record

Issue No.	Description	Date Issued
RFBDTL-WTW-P21100469-1	Original release.	2022/10/25

## 1 Certificate of Conformity

**Product:** Wireless Mouse

**Brand:** Corsair

**Test Model:** RGP0129

**Sample Status:** Engineering sample

**Applicant:** Corsair Memory, Inc.

**Test Date:** 2021/10/19 ~ 2022/1/6

**Standards:** 47 CFR FCC Part 15, Subpart C (Section 15.249)  
ANSI C63.10: 2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

**Prepared by :**

*Jessica Cheng*

**Date:**

2022/10/25

Jessica Cheng / Senior Specialist

**Approved by :**

*Jeremy Lin*

**Date:**

2022/10/25

Jeremy Lin / Project Engineer

## 2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (SECTION 15.249)			
FCC Clause	Test Item	Result	Remarks
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -10.89dB at 0.15391MHz.
15.215	Channel Bandwidth Measurement	PASS	Meet the requirement of limit.
15.209 15.249 15.249 (d)	Radiated Emission and Bandedge Measurement	PASS	Meet the requirement of limit. Minimum passing margin is -1.96dB at 2403.00MHz.
15.203	Antenna Requirement	PASS	No antenna connector is used.

Note: Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

### 2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) ( $\pm$ )
Conducted Emissions at mains ports	150kHz ~ 30MHz	3.00 dB
Conducted Emissions	9kHz ~ 40GHz	2.63 dB
Radiated Emissions up to 1 GHz	9kHz ~ 30MHz	2.38 dB
	30MHz ~ 1000MHz	5.70 dB
Radiated Emissions above 1 GHz	Above 1GHz	5.21 dB

### 2.2 Modification Record

There were no modifications required for compliance.

### 3 General Information

#### 3.1 General Description of EUT

Product	Wireless Mouse
Brand	Corsair
Test Model	RGP0129
Status of EUT	Engineering sample
Power Supply Rating	3.7Vdc from battery or 5Vdc from USB port (Charging only)
Modulation Type	GFSK
Operating Frequency	2403MHz ~ 2480MHz
Number of Channel	78
Field Strength	92.04dBuV/m (3m)
Accessory Device	N/A
Data Cable Supplied	Shielded USB type C cable (1.8m)

Note:

1. Bluetooth & GFSK technologies can not transmit at same time.
2. Due to radiated measurements are made and the antenna gain is already accounted for this device, so provide an antenna datasheet and/or antenna measurement report is not required. The antenna dimensions and pictures (include antenna wire length if have) are stated in EUT photo exhibit.
3. The EUT can't transfer wirelessly while connect to device, it function only charge.
4. For Radiated Emissions test of charging mode, following modes were pre-tested:
  - ✧ Charging Mode (Powered from Adapter)
  - ✧ Charging Mode (Powered from Notebook)
 The worst emission level was found when the EUT tested under **Charging Mode (Powered from Notebook)**, therefore, only its test data was recorded in this report.
5. The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.
6. The antenna information is listed as below.

Model P/N	Gain (dBi)	Antenna Type	Connector Type
T-00002376	3.14	PIFA	NA

### 3.2 Description of Test Modes

78 channels are provided to this EUT:

CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)
1	2403	21	2423	41	2443	61	2463
2	2404	22	2424	42	2444	62	2464
3	2405	23	2425	43	2445	63	2465
4	2406	24	2426	44	2446	64	2466
5	2407	25	2427	45	2447	65	2467
6	2408	26	2428	46	2448	66	2468
7	2409	27	2429	47	2449	67	2469
8	2410	28	2430	48	2450	68	2470
9	2411	29	2431	49	2451	69	2471
10	2412	30	2432	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	78	2480
19	2421	39	2441	59	2461		
20	2422	40	2442	60	2462		

### 3.2.1 Test Mode Applicability and Tested Channel Detail

EUT Configure Mode	Applicable To				Description
	RE $\geq$ 1G	RE<1G	PLC	APCM	
A	√	√	-	√	Operating Mode (EUT only)
B	-	√	√	-	Charging Mode (Powered from Notebook)
C	-	-	√	-	Charging Mode (Powered from Adapter)

Where **RE $\geq$ 1G**: Radiated Emission above 1GHz & Bandedge Measurement  
**RE<1G**: Radiated Emission below 1GHz  
**PLC**: Power Line Conducted Emission  
**APCM**: Antenna Port Conducted Measurement

#### **Radiated Emission Test (Above 1GHz):**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Channel	Tested Channel	Modulation Type
A	1 to 78	1, 39, 78	GFSK

#### **Radiated Emission Test (Below 1GHz):**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Channel	Tested Channel	Modulation Type
A	1 to 78	1	GFSK
B	-	-	-

#### **Power Line Conducted Emission Test:**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Channel	Tested Channel	Modulation Type
B & C	-	-	-

#### **Antenna Port Conducted Measurement:**

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Channel	Tested Channel	Modulation Type
A	1 to 78	1, 39, 78	GFSK


#### **Test Condition:**

Applicable To	EUT Configure Mode	Environmental Conditions	Input Power	Tested By
RE $\geq$ 1G	A	27deg. C, 70%RH	3.7Vdc	Dalen Dai
RE<1G	A	27deg. C, 70%RH	3.7Vdc	Dalen Dai
	B	27deg. C, 70%RH	120Vac, 60Hz (System)	Dalen Dai
PLC	B	25deg. C, 75%RH	120Vac, 60Hz (System)	Pirar Hsieh
	C	25deg. C, 75%RH	120Vac, 60Hz (Adapter)	Pirar Hsieh
APCM	A	25deg. C, 76%RH	3.7Vdc	Dalen Dai



### 3.3 Duty Cycle of Test Signal

Duty cycle correction factor =  $20 \log(\text{Duty cycle}) = 20 \log(2.14 \text{ ms} / 4.23 \text{ ms}) = -5.9 \text{ dB}$

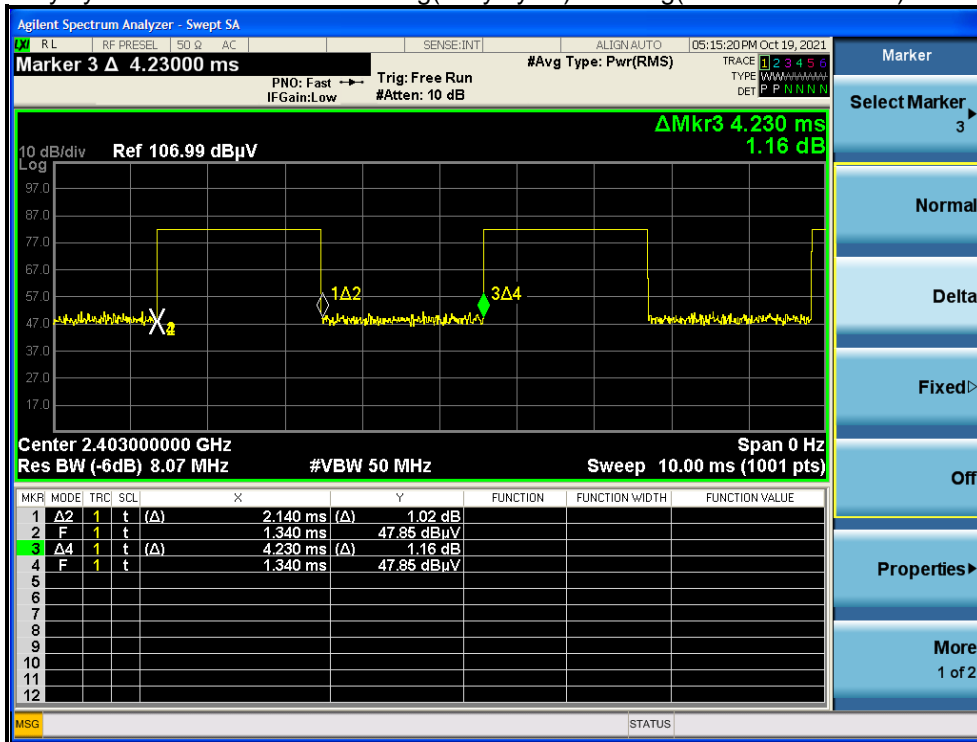

### 3.4 Description of Support Units


The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	Notebook	Lenovo	81A4	YD02TWDP	N/A	Provided by Lab
B.	Adapter	Apple	A1385	N/A	N/A	Provided by Lab


ID	Cable Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	USB Type C Cable	1	1.8	Y	0	Supplied by applicant

#### 3.4.1 Configuration of System under Test


##### Mode A- Operating Mode



##### Mode B- Charging Mode (Powered from Notebook)

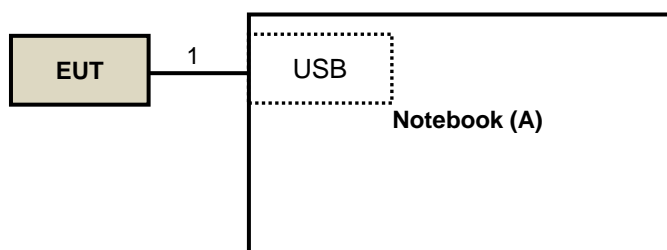

##### Mode C- Charging Mode (Powered from Adapter)

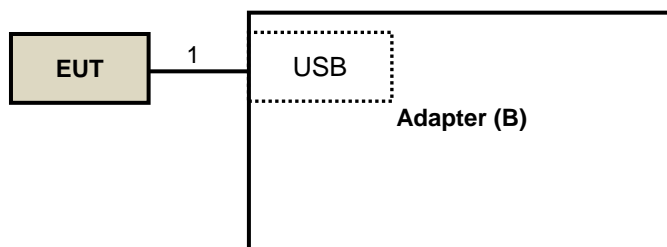

### 3.5 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**FCC Part 15, Subpart C (15.249)**

ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

## 4 Test Types and Results

### 4.1 Radiated Emission and Bandedge Measurement

#### 4.1.1 Limits of Radiated Emission and Bandedge Measurement

The field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following

Fundamental Frequency	Field Strength of Fundamental (millivolts/meter)	Field Strength of Harmonics (microvolts/meter)
902 ~ 928 MHz	50	500
2400 ~ 2483.5 MHz	50	500
5725 ~ 5875 MHz	50	500
24 ~ 24.25 GHz	250	2500

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits as below table, whichever is the lesser attenuation

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

#### NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

#### 4.1.2 Test Instruments

Description & Manufacturer	Model no.	Serial No.	Calibrated Date	Calibrated Until
Test Receiver Agilent	N9038A	MY51210129	2021/3/12	2022/3/11
Software BVADT	ADT_Radiated_V8.7.08	NA	NA	NA
Software BVADT	ADT_RF Test Software V6.6.5.4	NA	NA	NA
Auto Control System(Antenna Tower, Table, Controller) ADT	SC100+AT100+TT100	0306	NA	NA
Pre_Amplifier EMC I	EMC001340	980269	2021/6/29	2022/6/28
LOOP ANTENNA EMC I	LPA600	270	2021/9/2	2023/9/1
RF Coaxial Cable Pacific	8D-FB	Cable-CH6-02	2021/7/13	2022/7/12
Pre_Amplifier HP	8447D	2432A03504	2021/2/18	2022/2/17
Bi-log Broadband Antenna Schwarzbeck	VULB9168	139	2020/11/6	2021/11/5
Attenuator Mini-Circuits	UNAT-5+	PAD-CH6-01	2021/7/13	2022/7/12
RF Coaxial Cable Pacific	8D-FB	Cable-CH6-02	2021/7/13	2022/7/12
Antenna(Horn) EMCO	3115	00028257	2020/11/22	2021/11/21
Test Receiver Agilent	N9038A	MY51210129	2021/3/12	2022/3/11
Pre-amplifier HP	8449B	3008A01201	2021/2/19	2022/2/18
RF Coaxial Cable NEAT BAR PROER SUHNER	SF-102	Cable-CH6-01	2021/7/8	2022/7/7
Highpass filter Wainwright Instruments	WHK 3.1/18G-10SS	SN 8	2021/5/28	2022/5/27
Fix tool for Boresight	BAF-01	5	NA	NA
Pre_Amplifier MITEQ	AMF-6F-260400-33-8P	892164	2021/2/19	2022/2/18
Antenna(Horn) Schwarzbeck	BBHA-9170	BBHA9170190	2020/11/22	2021/11/21
Spectrum Analyzer R&S	FSV40	101544	2021/5/24	2022/5/23
RF Coaxial Cable WOKEN	WC01	Cable-CH10-03	2021/7/8	2022/7/7
RF Coaxial Cable Rosnol	K1K50-UP0279-K1K50-3000	Cable-CH10(3m)-04	2021/7/8	2022/7/7
Highpass filter SUHNER	11SH10-7000/T18000-O/OP	SN 4	2021/5/28	2022/5/27

- NOTE:**
1. The calibration interval of the above test instruments is 12/24 months. And the calibrations are traceable to NML/ROC and NIST/USA.
  2. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
  3. The test was performed in LK - 966 chamber 1.
  4. Tested Date: 2021/10/19

#### 4.1.3 Test Procedures

##### **For Radiated emission below 30MHz**

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

##### **NOTE:**

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

##### **For Radiated emission above 30MHz**

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

##### **Note:**


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) and Average detection at frequency above 1GHz. For fundamental and harmonic signal measurement, according to ANSI C63.10 section 7.5, the average value = peak value + duty factor. The duty factor refer to Chapter 3.3 of this report.
3. All modes of operation were investigated and the worst-case emissions are reported.

#### 4.1.4 Deviation from Test Standard


No deviation.

#### 4.1.5 Test Setup


##### For Radiated emission below 30MHz

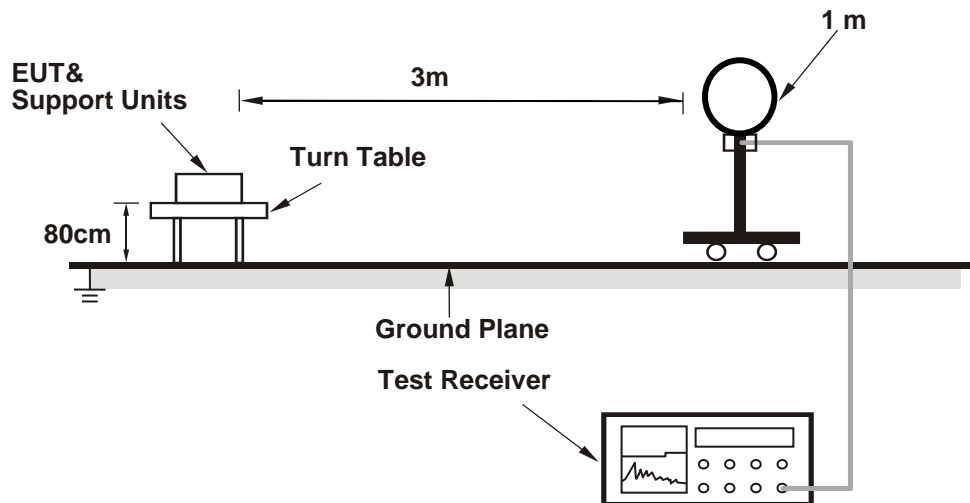

##### For Radiated emission 30MHz to 1GHz

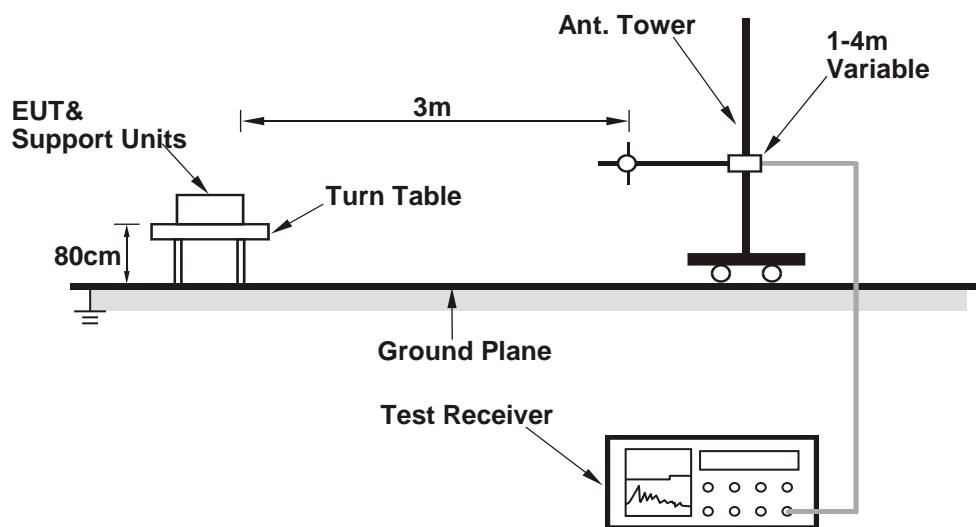

### For Radiated emission above 1GHz

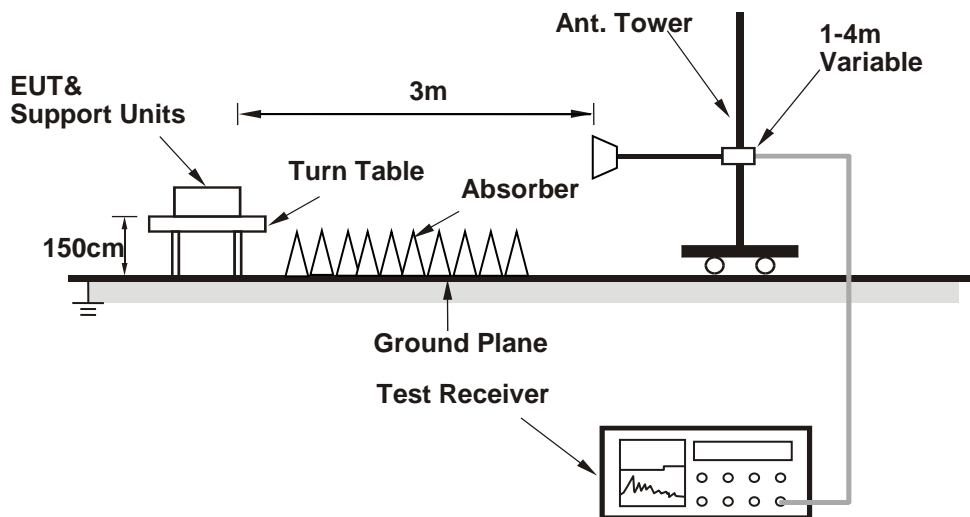

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.1.6 EUT Operating Conditions

##### Mode A- Operating Mode

Set the EUT under transmission condition continuously at specific channel frequency continuously.

##### Mode B- Charging Mode (Powered from Notebook)

- a. Connected the EUT to Notebook PC.
- b. Set the EUT under charging condition.



#### 4.1.7 Test Results

#### Mode A

#### ABOVE 1GHz DATA

<b>RF Mode</b>	TX_GFSK	<b>Channel</b>	CH 1 : 2403 MHz
<b>Frequency Range</b>	1GHz ~ 25GHz	<b>Detector Function</b>	Peak (PK) Average (AV)

#### Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	51.13 PK	74.00	-22.87	1.47 H	235	53.41	-2.28
2	2390.00	40.59 AV	54.00	-13.41	1.47 H	235	42.87	-2.28
3	2400.00	51.07 PK	74.00	-22.93	1.47 H	235	53.29	-2.22
4	2400.00	45.17 AV	54.00	-8.83	1.47 H	235	47.39	-2.22
5	*2403.00	97.94 PK	114.00	-16.06	1.47 H	235	100.16	-2.22
<b>6</b>	<b>*2403.00</b>	<b>92.04 AV</b>	<b>94.00</b>	<b>-1.96</b>	<b>1.47 H</b>	<b>235</b>	<b>94.26</b>	<b>-2.22</b>
7	4806.00	47.53 PK	74.00	-26.47	2.51 H	267	41.87	5.66
8	4806.00	41.63 AV	54.00	-12.37	2.51 H	267	35.97	5.66

#### Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	51.03 PK	74.00	-22.97	1.34 V	291	53.31	-2.28
2	2390.00	40.15 AV	54.00	-13.85	1.34 V	291	42.43	-2.28
3	2400.00	43.32 PK	74.00	-30.68	1.34 V	291	45.54	-2.22
4	2400.00	37.42 AV	54.00	-16.58	1.34 V	291	39.64	-2.22
5	*2403.00	90.19 PK	114.00	-23.81	1.34 V	291	92.41	-2.22
6	*2403.00	84.29 AV	94.00	-9.71	1.34 V	291	86.51	-2.22
7	4806.00	46.78 PK	74.00	-27.22	1.42 V	211	41.12	5.66
8	4806.00	40.88 AV	54.00	-13.12	1.42 V	211	35.22	5.66

#### Remarks:

- Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
- Margin value = Emission Level – Limit value
- The other emission levels were very low against the limit.
- " \* ": Fundamental frequency.
- The average value of fundamental and harmonic frequency is: Average value = Peak value + 20 log(Duty cycle) Where the Duty cycle correction factor is calculated from following formula:  
 $20 \log(\text{Duty cycle}) = 20 \log(2.14 \text{ ms} / 4.23 \text{ ms}) = -5.9\text{dB}$   
 Please refer to the plotted duty (see section 3.3)

<b>RF Mode</b>	TX_GFSK	<b>Channel</b>	CH 39 : 2441 MHz
<b>Frequency Range</b>	1GHz ~ 25GHz	<b>Detector Function</b>	Peak (PK) Average (AV)

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2441.00	97.43 PK	114.00	-16.57	1.43 H	236	99.57	-2.14
2	*2441.00	91.53 AV	94.00	-2.47	1.43 H	236	93.67	-2.14
3	4882.00	47.27 PK	74.00	-26.73	2.46 H	271	41.58	5.69
4	4882.00	41.37 AV	54.00	-12.63	2.46 H	271	35.68	5.69

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2441.00	89.93 PK	114.00	-24.07	1.28 V	293	92.07	-2.14
2	*2441.00	84.03 AV	94.00	-9.97	1.28 V	293	86.17	-2.14
3	4882.00	46.52 PK	74.00	-27.48	1.44 V	209	40.83	5.69
4	4882.00	40.62 AV	54.00	-13.38	1.44 V	209	34.93	5.69

**Remarks:**

- Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
- Margin value = Emission Level – Limit value
- The other emission levels were very low against the limit.
- " \* ": Fundamental frequency.
- The average value of fundamental and harmonic frequency is: Average value = Peak value + 20 log(Duty cycle) Where the Duty cycle correction factor is calculated from following formula:  
 $20 \log(\text{Duty cycle}) = 20 \log(2.14 \text{ ms} / 4.23 \text{ ms}) = -5.9\text{dB}$   
 Please refer to the plotted duty (see section 3.3)

<b>RF Mode</b>	TX_GFSK	<b>Channel</b>	CH 78 : 2480 MHz
<b>Frequency Range</b>	1GHz ~ 25GHz	<b>Detector Function</b>	Peak (PK) Average (AV)

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2480.00	96.95 PK	114.00	-17.05	1.41 H	243	98.91	-1.96
2	*2480.00	91.05 AV	94.00	-2.95	1.41 H	243	93.01	-1.96
3	2483.50	48.45 PK	74.00	-25.55	1.41 H	243	50.39	-1.94
4	2483.50	42.55 AV	54.00	-11.45	1.41 H	243	44.49	-1.94
5	4960.00	47.16 PK	74.00	-26.84	2.53 H	268	41.30	5.86
6	4960.00	41.26 AV	54.00	-12.74	2.53 H	268	35.40	5.86

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2480.00	89.55 PK	114.00	-24.45	1.29 V	290	91.51	-1.96
2	*2480.00	83.65 AV	94.00	-10.35	1.29 V	290	85.61	-1.96
3	2483.50	41.05 PK	74.00	-32.95	1.29 V	290	42.99	-1.94
4	2483.50	35.15 AV	54.00	-18.85	1.29 V	290	37.09	-1.94
5	4960.00	46.32 PK	74.00	-27.68	1.37 V	212	40.46	5.86
6	4960.00	40.42 AV	54.00	-13.58	1.37 V	212	34.56	5.86

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. The average value of fundamental and harmonic frequency is: Average value = Peak value + 20 log(Duty cycle) Where the Duty cycle correction factor is calculated from following formula:  
 $20 \log(\text{Duty cycle}) = 20 \log(2.14 \text{ ms} / 4.23 \text{ ms}) = -5.9\text{dB}$   
Please refer to the plotted duty (see section 3.3)

Mode A


BELOW 1GHz WORST-CASE DATA

RF Mode	TX GFSK	Channel	CH 1 : 2403 MHz
Frequency Range	9kHz ~ 1GHz	Detector Function	Quasi-Peak (QP)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	52.41	26.82 QP	40.00	-13.18	1.78 H	47	33.66	-6.84
2	132.77	22.50 QP	43.50	-21.00	1.46 H	40	29.83	-7.33
3	337.54	25.05 QP	46.00	-20.95	1.69 H	11	28.32	-3.27
4	425.18	26.54 QP	46.00	-19.46	1.83 H	360	27.85	-1.31
5	489.68	28.12 QP	46.00	-17.88	1.24 H	62	28.25	-0.13
6	568.35	29.58 QP	46.00	-16.42	1.52 H	264	28.30	1.28

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

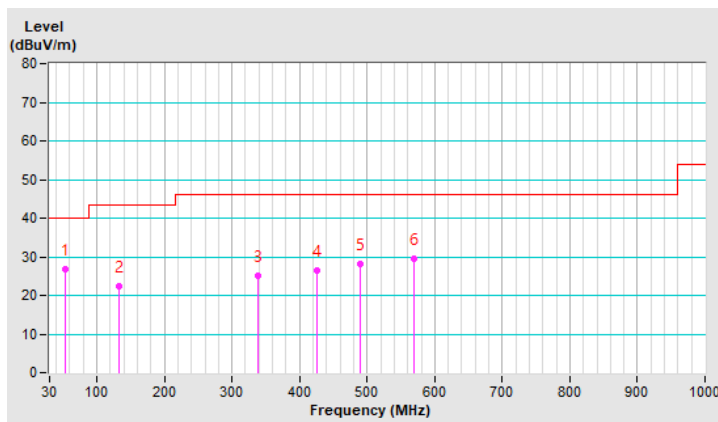


<b>RF Mode</b>	TX GFSK	<b>Channel</b>	CH 1 : 2403 MHz
<b>Frequency Range</b>	9kHz ~ 1GHz	<b>Detector Function</b>	Quasi-Peak (QP)

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	30.58	26.53 QP	40.00	-13.47	1.36 V	148	35.35	-8.82
2	114.78	23.13 QP	43.50	-20.37	1.57 V	160	32.51	-9.38
3	149.12	23.94 QP	43.50	-19.56	1.82 V	138	30.31	-6.37
4	420.18	27.32 QP	46.00	-18.68	1.26 V	126	28.83	-1.51
5	503.36	28.80 QP	46.00	-17.20	1.51 V	2	28.69	0.11
6	605.06	30.83 QP	46.00	-15.17	1.09 V	19	28.50	2.33

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

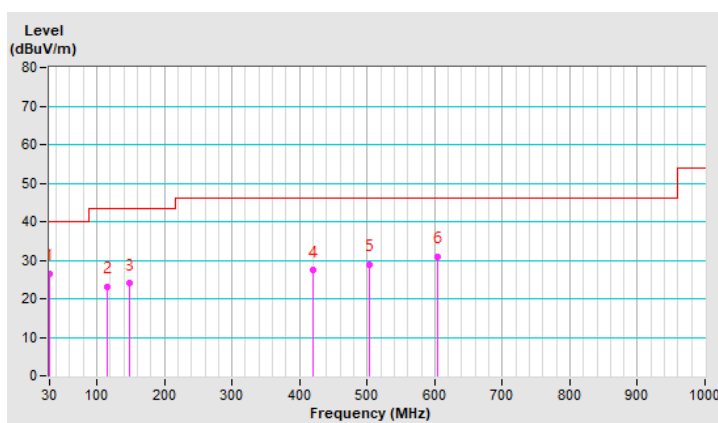


**Mode B- Charging Mode (Powered from Notebook)**

<b>Frequency Range</b>	9kHz ~ 1GHz	<b>Detector Function</b>	Quasi-Peak (QP)
------------------------	-------------	--------------------------	-----------------

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	30.58	29.86 QP	40.00	-10.14	1.83 H	143	38.68	-8.82
2	68.07	30.64 QP	40.00	-9.36	1.66 H	164	39.09	-8.45
3	204.02	25.72 QP	43.50	-17.78	1.53 H	251	34.40	-8.68
4	376.14	28.95 QP	46.00	-17.05	1.99 H	159	31.47	-2.52
5	483.38	29.92 QP	46.00	-16.08	2.25 H	351	30.15	-0.23
6	603.90	31.27 QP	46.00	-14.73	2.16 H	176	28.97	2.30

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

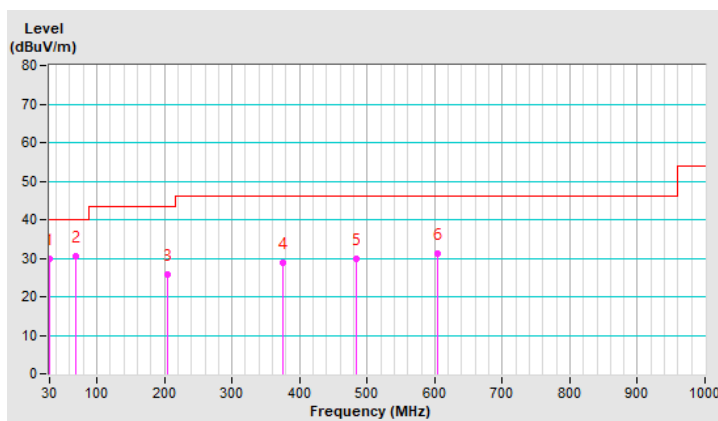


<b>Frequency Range</b>	9kHz ~ 1GHz	<b>Detector Function</b>	Quasi-Peak (QP)
------------------------	-------------	--------------------------	-----------------

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	30.58	26.77 QP	40.00	-13.23	1.54 V	178	35.59	-8.82
2	68.17	30.87 QP	40.00	-9.13	1.22 V	214	39.36	-8.49
3	132.82	24.79 QP	43.50	-18.71	1.69 V	347	32.11	-7.32
4	328.13	33.74 QP	46.00	-12.26	1.37 V	244	37.06	-3.32
5	483.33	28.91 QP	46.00	-17.09	1.98 V	202	29.14	-0.23
6	600.46	30.86 QP	46.00	-15.14	2.15 V	171	28.64	2.22

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

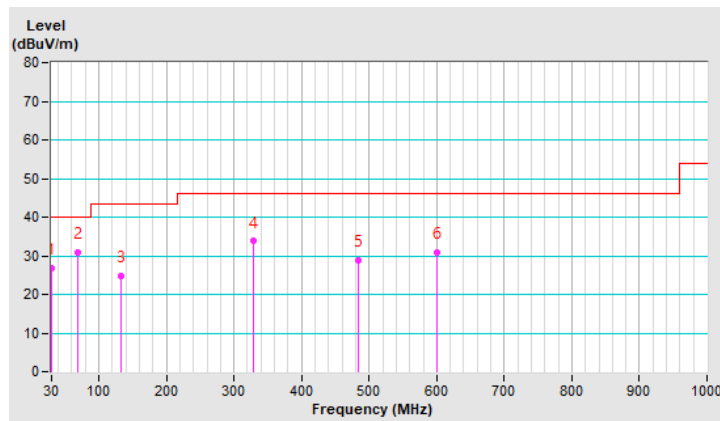

## 4.2 Conducted Emission Measurement

### 4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.



#### 4.2.2 Test Instruments

Description & Manufacturer	Model no.	Serial No.	Calibrated Date	Calibrated Until
Test Receiver ESR3 R&S	ESR3	102412	2021/1/29	2022/1/28
LISN SCHWARZBECK	NSLK 8128	8128-244	2021/11/11	2022/11/10
LISN SCHWARZBECK	NNLK8129	8129229	2021/5/20	2022/5/19
DC LISN SCHWARZBECK	NNLK 8121	8121-808	2021/4/18	2022/4/17
LISN SCHWARZBECK	NNLK 8121	8121-731	2021/4/28	2022/4/27
LISN R&S	ENV216	101196	2021/4/26	2022/4/25
LISN R&S	ESH3-Z5	100220	2021/11/25	2022/11/24
LISN R&S	ESH3-Z6	844950/018	2021/7/25	2022/7/24
DC LISN R&S	ESH3-Z6	100219	2021/7/25	2022/7/24
High Voltage Probe Schwarzbeck	TK9420	00982	2021/1/8	2022/1/7
RF Coaxial Cable Commate	5D-FB	Cable-CO5-01	2021/1/29	2022/1/28
Attenuator STI	STI02-2200-10	NO.4	2021/9/3	2022/9/2
50 Ohms Terminator LYNICS	0900510	E1-01-305	2021/2/17	2022/2/16
Isolation Transformer Erika Fiedler	D-65396	017	2021/9/9	2022/9/8
Software BVADT	Cond_V7.3.7.4	NA	NA	NA

- Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.  
 2. The test was performed in Linkou Conduction05  
 3. The VCCI Site Registration No. C-11093.  
 4. Tested Date: 2022/1/6

#### 4.2.3 Test Procedures


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

**NOTE:** The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

#### 4.2.4 Deviation From Test Standard

No deviation.

#### 4.2.5 Test Setup

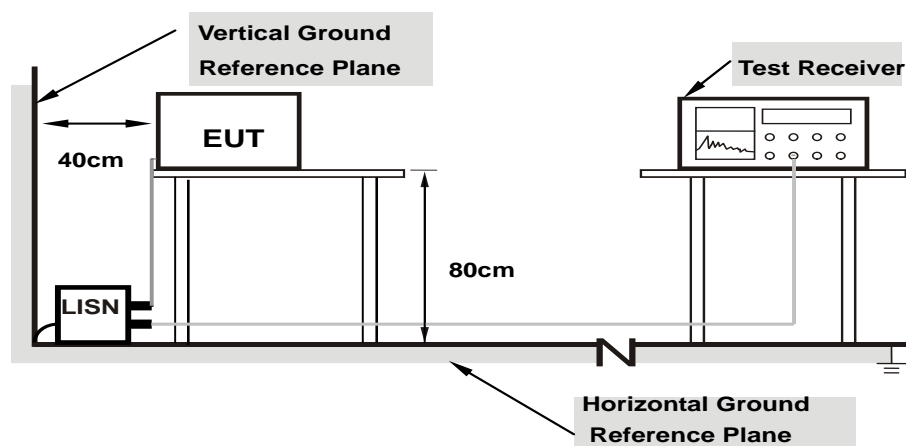

**Note: 1.Support units were connected to second LISN.**

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.2.6 EUT Operating Condition

##### Mode B & C

- Connected the EUT to Notebook PC or Adapter.
- Set the EUT under charging condition.

4.2.7 Test Results


**Mode B- Charging Mode (Powered from Notebook)**

<b>Frequency Range</b>	150kHz ~ 30MHz	<b>Detector Function</b>	Quasi-Peak (QP) / Average (AV)
------------------------	----------------	--------------------------	--------------------------------

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15391	9.89	45.01	24.14	54.90	34.03	65.79	55.79	-10.89	-21.76
2	0.16953	9.89	42.54	21.83	52.43	31.72	64.98	54.98	-12.55	-23.26
3	0.20469	9.89	37.19	18.47	47.08	28.36	63.42	53.42	-16.34	-25.06
4	0.44297	9.92	24.64	13.95	34.56	23.87	57.01	47.01	-22.45	-23.14
5	3.60547	10.12	21.70	15.22	31.82	25.34	56.00	46.00	-24.18	-20.66
6	21.45313	10.71	18.67	12.36	29.38	23.07	60.00	50.00	-30.62	-26.93

**Remarks:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

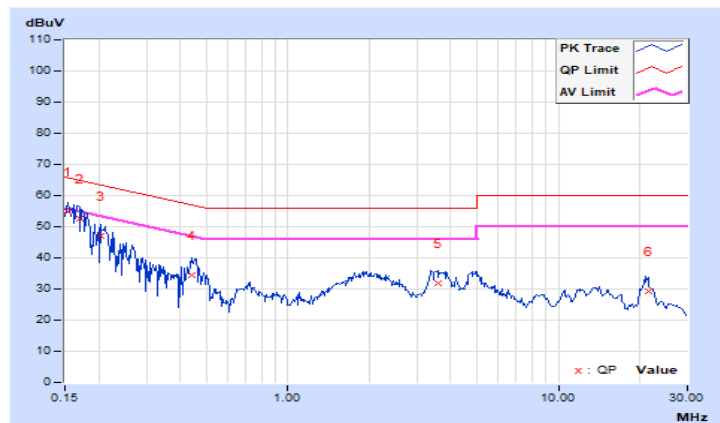


<b>Frequency Range</b>	150kHz ~ 30MHz	<b>Detector Function</b>	Quasi-Peak (QP) / Average (AV)
------------------------	----------------	--------------------------	--------------------------------

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	9.90	44.97	24.85	54.87	34.75	66.00	56.00	-11.13	-21.25
2	0.16172	9.91	43.01	20.40	52.92	30.31	65.38	55.38	-12.46	-25.07
3	0.22031	9.91	34.22	16.19	44.13	26.10	62.81	52.81	-18.68	-26.71
4	0.46641	9.94	25.58	17.14	35.52	27.08	56.58	46.58	-21.06	-19.50
5	4.46094	10.17	22.66	16.58	32.83	26.75	56.00	46.00	-23.17	-19.25
6	20.82031	10.67	18.77	13.05	29.44	23.72	60.00	50.00	-30.56	-26.28

**Remarks:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

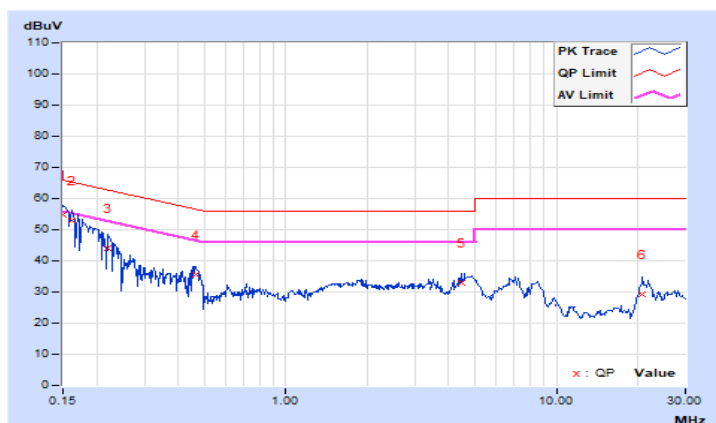


**Mode C- Charging Mode (Powered from Adapter)**

<b>Frequency Range</b>	150kHz ~ 30MHz	<b>Detector Function</b>	Quasi-Peak (QP) / Average (AV)
------------------------	----------------	--------------------------	--------------------------------

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.17344	9.89	32.39	11.95	42.28	21.84	64.79	54.79	-22.51	-32.95
2	0.25156	9.90	27.91	10.67	37.81	20.57	61.71	51.71	-23.90	-31.14
3	0.33750	9.90	21.90	3.88	31.80	13.78	59.26	49.26	-27.46	-35.48
4	0.78281	9.95	25.98	16.20	35.93	26.15	56.00	46.00	-20.07	-19.85
5	2.30859	10.04	13.97	7.67	24.01	17.71	56.00	46.00	-31.99	-28.29
6	8.67578	10.33	17.43	11.06	27.76	21.39	60.00	50.00	-32.24	-28.61

**Remarks:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

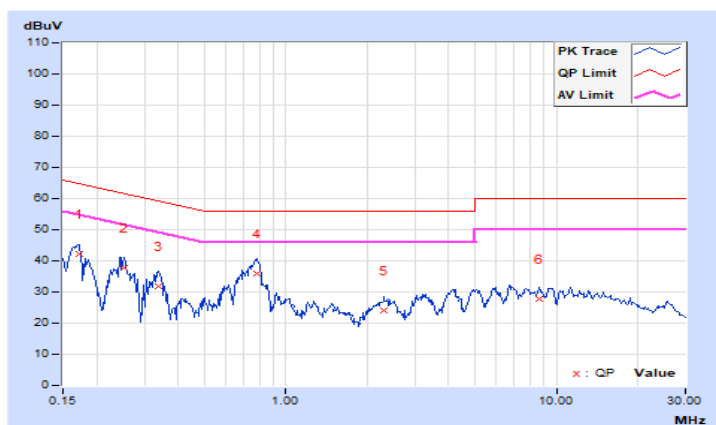


<b>Frequency Range</b>	150kHz ~ 30MHz	<b>Detector Function</b>	Quasi-Peak (QP) / Average (AV)
------------------------	----------------	--------------------------	--------------------------------

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16562	9.91	31.54	13.98	41.45	23.89	65.18	55.18	-23.73	-31.29
2	0.24375	9.91	24.83	7.71	34.74	17.62	61.97	51.97	-27.23	-34.35
3	0.32969	9.92	20.69	6.42	30.61	16.34	59.46	49.46	-28.85	-33.12
4	0.75938	9.97	26.10	16.60	36.07	26.57	56.00	46.00	-19.93	-19.43
5	2.34375	10.07	15.19	8.78	25.26	18.85	56.00	46.00	-30.74	-27.15
6	8.66797	10.33	17.72	11.94	28.05	22.27	60.00	50.00	-31.95	-27.73


**Remarks:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

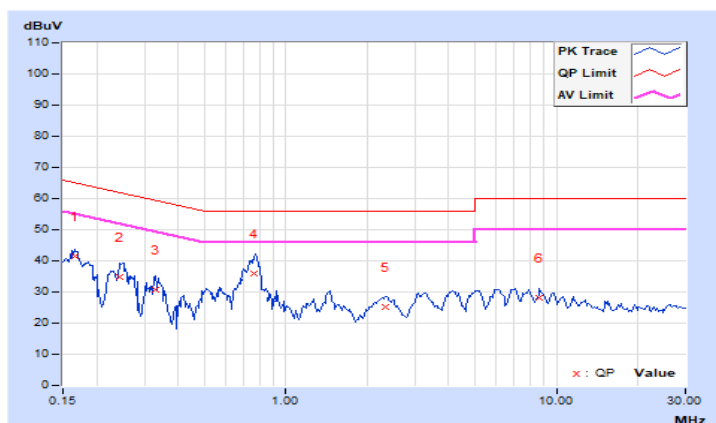

### 4.3 Channel Bandwidth

#### 4.3.1 Test Setup



#### 4.3.2 Test Instruments

Description & Manufacturer	Model no.	Serial No.	Calibrated Date	Calibrated Until
Spectrum Analyzer R&S	FSV40	101544	2021/5/24	2022/5/23

- NOTE:**
1. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.
  2. The test was performed in LK - Oven
  2. Tested Date: 2021/11/12

#### 4.3.3 Test Procedure

- a. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- c. Measure the frequency difference of two frequencies that were attenuated 20dB from the reference level. Record the frequency difference as the emission bandwidth.
- d. Repeat above procedures until all frequencies measured were complete.

#### 4.3.4 Deviation from Test Standard

No deviation.


#### 4.3.5 EUT Operating Condition

The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.

### 4.3.6 Test Results

#### Mode A

Channel	Frequency (MHz)	20dB Bandwidth (MHz)
1	2403	1.15
39	2441	1.14
78	2480	1.16

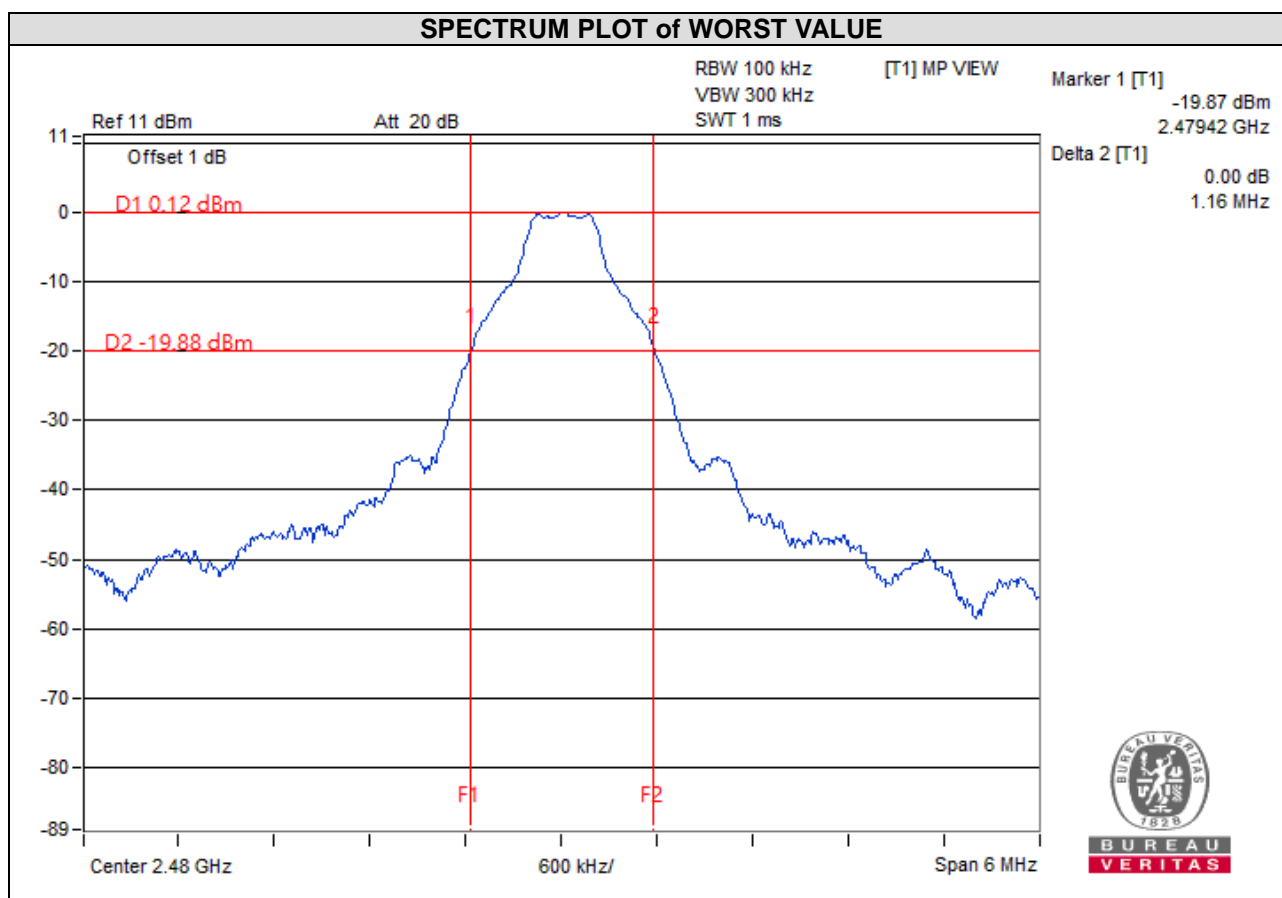



## 5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

## Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

**Lin Kou EMC/RF Lab**

Tel: 886-2-26052180

Fax: 886-2-26051924

**Hsin Chu EMC/RF/Telecom Lab**

Tel: 886-3-6668565

Fax: 886-3-6668323

**Hwa Ya EMC/RF/Safety Lab**

Tel: 886-3-3183232

Fax: 886-3-3270892

**Email:** [service.adt@tw.bureauveritas.com](mailto:service.adt@tw.bureauveritas.com)

**Web Site:** [www.bureauveritas-adt.com](http://www.bureauveritas-adt.com)

The address and road map of all our labs can be found in our web site also.

--- END ---