



America

Add value.
Inspire trust.

Radio Testing of the

Deere & Company
Sensor Model: PF80799

In accordance with FCC Part 15 Subpart C
§15.245 and ISED RSS-210 Issue 10 December
2019

Deere & Company
One Deere Place
Moline, IL 61265 USA

COMMERCIAL-IN-CONFIDENCE

Date: November 2021
Document Number: 7217124A Issue 02 | Version Number: 01

RESPONSIBLE FOR	NAME	DATE	SIGNATURE
Authorized Signatory	Xiaoying Zhang	November 10, 2021	

Signatures in this approval box have checked this document in line with the requirements of TÜV SÜD document control rules.

EXECUTIVE SUMMARY

A sample of this product was tested and found to be in compliance with FCC Part 15 Subpart C §15.245 and ISED RSS-210 Issue 10 December 2019.



DISCLAIMER AND COPYRIGHT

This report has been prepared by TÜV SÜD America with all reasonable skill and care. The document is confidential to the potential Client and TÜV SÜD America. No part of this document may be reproduced without the prior written approval of TÜV SÜD America.

ACCREDITATION

Our A2LA Accreditation does not cover opinions and interpretations and any expressed are outside the scope of our A2LA Accreditation.

A2LA Cert. No. 2955.13

TÜV SÜD America, Inc.
10040 Mesa Rim Road
San Diego, CA 92121-2912

TÜV SÜD America, Inc.
Rancho Bernardo Facility
16936 Via Del Campo
San Diego, CA 92127

Phone: 858 678 1400
www.tuv-sud-america.com



REPORT ON Radio Testing of the
Deere & Company
Model PF80799 Sensor

TEST REPORT NUMBER 7217124A

TEST REPORT DATE November 2021

PREPARED FOR Deere & Company
One Deere Place
Moline, IL 61265 USA

CONTACT PERSON Andrew J. Norby
Engineering Manager, Electronic Systems
NorbyAndrewJ@JohnDeere.com
(515) 253-6638

PREPARED BY 
Ferdinand S. Custodio
Name
Authorized Signatory
Title: Senior EMC Test Engineer / Wireless Team Lead

APPROVED BY 
Xiaoying Zhang
Name
Authorized Signatory
Title: Senior RF Wireless Test Engineer

DATED November 10, 2021



Revision History

7217124A Deere & Company Model PF80799 Sensor					
DATE	OLD REVISION	NEW REVISION	REASON	PAGES AFFECTED	APPROVED BY
11/10/2021	Initial Release				Xiaoying Zhang
09/13/22	Initial Release	Issue 2	Update FCC ID		Ferdinand Custodio



CONTENTS

	REPORT SUMMARY	5
1.1	Introduction	6
1.2	Brief Summary Of Results	7
1.3	Product Information	8
1.4	EUT Test Configuration	8
1.5	Deviations From The Standard	9
1.6	Modification Record	9
1.7	Test Methodology	9
1.8	Test Facility Location	9
1.9	Test Facility Registration	9
	TEST DETAILS	11
2.1	RF Power Output	12
2.2	Spurious Emissions	15
2.3	99% Emission Bandwidth	24
	TEST EQUIPMENT USED	26
3.2	Measurement Uncertainty	29
	DIAGRAM OF TEST SETUP	31
4.1	Test Setup Diagram	32
	ACCREDITATION, DISCLAIMERS AND COPYRIGHT	34
5.1	Accreditation, Disclaimers and Copyright	35



SECTION 1

REPORT SUMMARY

Radio Testing of the
Deere & Company
Eagle Radar Sensor



1.1 INTRODUCTION

The information contained in this report is intended to show verification of the Deere & Company Eagle Radar Sensor to the requirements of FCC Part 15 Subpart C §15.245 and ISED RSS-210 Issue 10 December 2019.

Objective	To perform Radio Testing to determine the Equipment Under Test's (EUT's) compliance with the test specification, for the series of tests carried out.
Manufacturer	Deere & Company
EUT	Sensor
Trade Name	Eagle Radar
Model Name	PF80799
FCC ID	2AAFX-PF80799
Serial Number(s)	PCHS01A541411
Number of Samples Tested	1
Test Specification/Issue/Date	<ul style="list-style-type: none">• FCC Part 15 Subpart C §15.245 (October 1, 2020).• ISED RSS-210 Issue 10 December 2019: License-Exempt Radio Apparatus: Category I Equipment
Start of Test	September 13, 2021
Finish of Test	September 22, 2021
Name of Engineer(s)	Ferdinand Custodio
Related Document(s)	<ul style="list-style-type: none">• ANSI C63.10-2013. American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices• Eagle Radar PD 2_16_21.docx• Supporting documents for EUT certification are separate exhibits.



1.2 BRIEF SUMMARY OF RESULTS

A brief summary of the tests carried out in accordance with FCC Part 15 Subpart C §15.245 and ISED RSS-210 Issue 10 December 2019 with cross-reference to the corresponding ISED RSS standard are shown below.

Section	§15.245 Spec Clause	RSS	Test Description	Result	Comments /Base Standard
2.1	§15.245(b)	RSS-210 Annex F	Fundamental Emissions	Compliant	
2.2	§15.245(b)	RSS-210 Annex F	Spurious Emissions	Compliant	
2.3	-	RSS-Gen 6.7	99% Emission Bandwidth	For Reference Only	
-		RSS-Gen 8.8	AC Powerline conducted Emissions	N/A	

N/A Not performed as the EUT does not have provisions to connect to public AC mains.



1.3 PRODUCT INFORMATION

1.3.1 Technical Description

The Equipment Under Test (EUT) is a Deere & Company Eagle Radar Sensor. The EUT is a sensor used to measure the mass flow rate of cotton flowing through a non-conductive duct on a cotton picker using a microwave signal. The cotton mass flow rate in duct ranges from 0 to 1.3 kg/s. The cotton velocity ranges from 13m/s to 18m/s (46.8 km/h to 64.8 km/h / 29.1 mph to 40.3 mph).

1.3.2 EUT General Description

EUT Description	Sensor
Model Name	Eagle Radar
Model Number	PF80799
Serial Number	PCHS01A541411
Input Voltage	13.8VDC Nominal (9VDC to 16VDC)
Output RF Power	19.11 dBm Peak EIRP
Frequency Range (TX)	24.125GHz

1.4 EUT TEST CONFIGURATION

1.4.1 Test Configuration Description

Test Configuration	Description
Default	The EUT will start transmitting once power is applied (9 to 16VDC)

1.4.2 EUT Exercise Software

None. No special software was utilized to exercise the EUT during verifications.

1.4.3 Support Equipment and I/O cables

Manufacturer	Equipment/Cable	Description
John Deere	Wiring Harness	Custom cable assy with eight (8) 1.1 meters conductors and banana Jack connectors

1.4.4 Simplified Test Configuration Diagram

Not required. The EUT was verified on a stand-alone configuration.



1.5 DEVIATIONS FROM THE STANDARD

No deviations from the applicable test standards or test plan were made during testing.

1.6 MODIFICATION RECORD

Description of Modification	Modification Fitted By	Date Modification Fitted
Serial Number: PCHS01A541411		
None	—	—

The table above details modifications made to the EUT during the test programme. The modifications incorporated during each test (if relevant) are recorded on the appropriate test pages.

1.7 TEST METHODOLOGY

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices

For conducted and radiated emissions, the equipment under test (EUT) was configured to measure its highest possible emission level. This level was based on the maximized cable configuration from exploratory testing per ANSI C63.10-2013. The test modes were adapted according to the Operating Instructions provided by the manufacturer/client.

1.8 TEST FACILITY LOCATION

1.8.1 TÜV SÜD America Inc. (Mira Mesa)

10040 Mesa Rim Road, San Diego, CA 92121-2912 (32.901268,-117.177681). Phone: 858 678 1400
 Fax: 858 546 0364

1.8.2 TÜV SÜD America Inc. (Rancho Bernardo)

16936 Via Del Campo, San Diego, CA 92127-1708 (33.018644,-117.092409). Phone: 858 678 1400
 Fax: 858 546 0364.

1.9 TEST FACILITY REGISTRATION

1.9.1 FCC – Designation No.: US1146

TÜV SÜD America Inc. (San Diego), is an accredited test facility with the site description report on file and has met all the requirements specified in §2.948 of the FCC rules. The acceptance letter from the FCC is maintained in our files and the Designation is US1146.



1.9.2 Innovation, Science and Economic Development Canada (IC) Registration No.: 3067A-1 & 22806-1

The 10m Semi-anechoic chamber of TÜV SÜD America Inc. (San Diego Rancho Bernardo) has been registered by Certification and Engineering Bureau of Innovation, Science and Economic Development Canada for radio equipment testing with Registration No. 3067A-1.

The 3m Semi-anechoic chamber of TÜV SÜD America Inc. (San Diego Mira Mesa) has been registered by Certification and Engineering Bureau of Innovation, Science and Economic Development Canada for radio equipment testing with Registration No. 22806-1.

1.9.3 BSMI – Laboratory Code: SL2-IN-E-028R (US0102)

TÜV Product Service Inc. (San Diego) is a recognized EMC testing laboratory by the BSMI under the MRA (Mutual Recognition Arrangement) with the United States. Accreditation includes CNS 13438 up to 6GHz.

1.9.4 NCC (National Communications Commission - US0102)

TÜV SÜD America Inc. (San Diego) is listed as a Foreign Recognized Telecommunication Equipment Testing Laboratory and is accredited to ISO/IEC 17025 (A2LA Certificate No.2955.13) which under APEC TEL MRA Phase 1 was designated as a Conformity Assessment Body competent to perform testing of equipment subject to the Technical Regulations covered under its scope of accreditation including RTTE01, PLMN01 and PLMN08 for TTE type of testing and LP002 for Low-Power RF Device type of testing.

1.9.5 VCCI – Registration No. A-0280 and A-0281

TÜV SÜD America Inc. (San Diego) is a VCCI registered measurement facility which includes radiated field strength measurement, radiated field strength measurement above 1GHz, mains port interference measurement and telecommunication port interference measurement.

1.9.6 RRA – Identification No. US0102

TÜV SÜD America Inc. (San Diego) is National Radio Research Agency (RRA) recognized laboratory under Phase I of the APEC Tel MRA.

1.9.7 OFCA – U.S. Identification No. US0102

TÜV SÜD America Inc. (San Diego) is recognized by Office of the Communications Authority (OFCA) under Appendix B, Phase I of the APEC Tel MRA.



SECTION 2

TEST DETAILS

Radio Testing of the
Deere & Company
Eagle Radar Sensor



2.1 RF POWER OUTPUT

2.1.1 Specification Reference

FCC 47 Chapter I Subchapter A Part 15 Subpart C §15.245
RSS-210, Annex F

2.1.2 Standard Applicable

(b) The field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental frequency (MHz)	Field strength of fundamental (mv/m)	Field strength of harmonics (mv/m)
902-928	500	1.6
2435-2465	500	1.6
5785-5815	500	1.6
10500-10550	2500	25.0
24075-24175	2500	25.0

1) Regardless of the limits shown in the above table, harmonic emissions in the restricted bands below 17.7 GHz, as specified in §15.205, shall not exceed the field strength limits shown in §15.209. Harmonic emissions in the restricted bands at and above 17.7 GHz shall not exceed the following field strength limits:

(i) For the second and third harmonics of field disturbance sensors operating in the 24075-24175 MHz band and for other field disturbance sensors designed for use only within a building or to open building doors, 25.0 mV/m.

(ii) For all other field disturbance sensors, 7.5 mV/m.

(iii) Field disturbance sensors designed to be used in motor vehicles or aircraft must include features to prevent continuous operation unless their emissions in the restricted bands, other than the second and third harmonics from devices operating in the 24075-24175 MHz band, fully comply with the limits given in §15.209. Continuous operation of field disturbance sensors designed to be used in farm equipment, vehicles such as fork lifts that are intended primarily for use indoors or for very specialized operations, or railroad locomotives, railroad cars and other equipment which travels on fixed tracks is permitted. A field disturbance sensor will be considered not to be operating in a continuous mode if its operation is limited to specific activities of limited duration (e.g., putting a vehicle into reverse gear, activating a turn signal, etc.).

2.1.3 Equipment Under Test and Modification State

Serial No: PCHS01A541411 / Default Test Configuration

2.1.4 Date of Test/Initial of test personnel who performed the test

September 13, 2021 / FSC



2.1.5 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.1.6 Environmental Conditions

Test performed at TÜV SÜD America Inc. Mira Mesa facility

Ambient Temperature	27.5 °C
Relative Humidity	43.5 %
ATM Pressure	100.1 kPa

2.1.7 Additional Observations

Test results are from Section 2.2.13 of this test report


2.1.8 Test Results

Complies. See attached test plot.



2.1.9 From 18GHz to 26.5GHz Radiated Emission Test

Full Spectrum

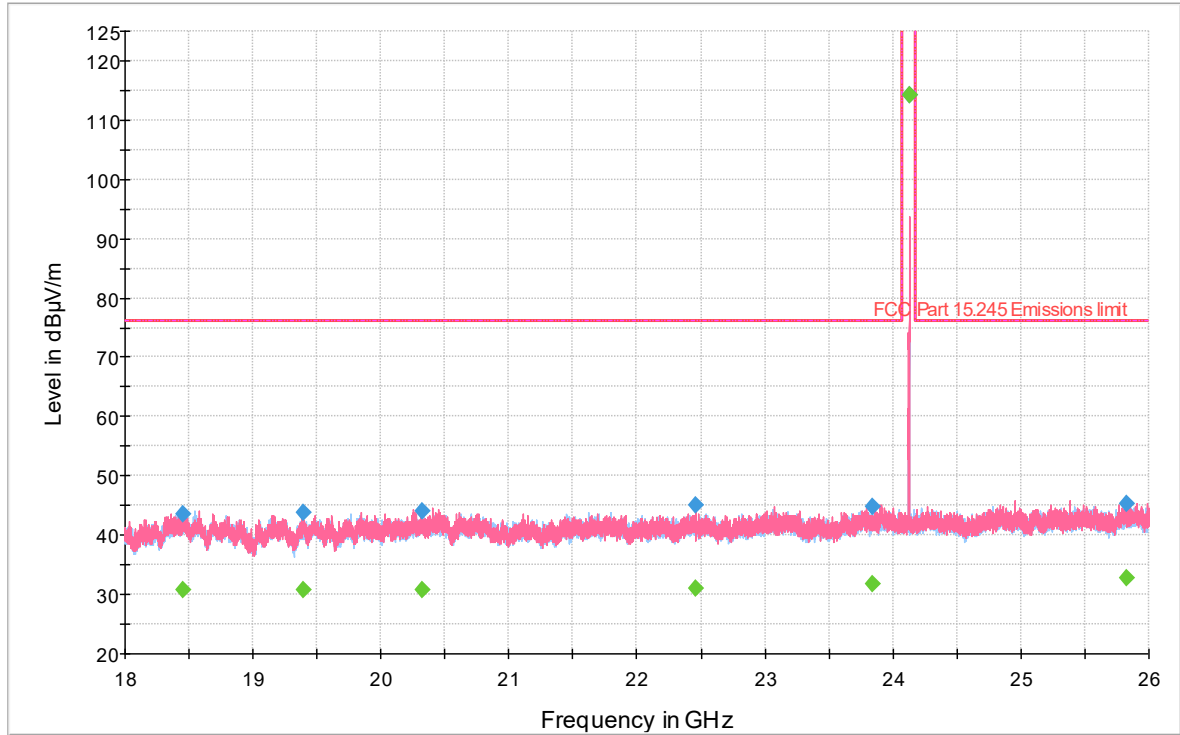

— Preview Result 1H-PK+ [Preview Result 1H.Result:2] — Preview Result 1V-PK+ [Preview Result 1V.Result:2]
— FCC Part 15.245 Emissions limit [..\EMI Radiated\
◆ Final_Result PK+ [Final_Result.Result:4] ◆ Final_Result AVG [Final_Result.Result:5]

Peak Data

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
24127.159500	114.34	129.20	14.86	1000.0	1000.000	187.0	V	31.0	0

Average Data

Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
24127.159500	114.19	129.20	15.01	1000.0	1000.000	187.0	V	31.0	0



2.2 SPURIOUS EMISSIONS

2.2.1 Specification Reference

FCC 47 Chapter I Subchapter A Part 15 Subpart C §15.245
RSS-210, Annex F

2.2.2 Standard Applicable

(2) Field strength limits are specified at a distance of 3 meters.

(3) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

(4) The emission limits shown above are based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply.

2.2.3 Equipment Under Test and Modification State

Serial No: PCHS01A541411 / Default Test Configuration

2.2.4 Date of Test/Initial of test personnel who performed the test

September 13, 2021 / FSC

2.2.5 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.2.6 Environmental Conditions

Test performed at TÜV SÜD America Inc. Mira Mesa facility

Ambient Temperature	27.5 °C
Relative Humidity	43.5 %
ATM Pressure	100.1 kPa

2.2.7 Additional Observations

- This is a radiated test.
- The spectrum was searched from 9kHz to 100GHz.
- Limits used outside the frequency band 24075-24175MHz as required is per §15.209 which is identical to FCC Subpart B limit (§15.109 Class B). There are no significant emissions observed other than the Fundamental and Harmonics. Above 40GHz, only the Harmonics limits presented.
- Measurement was done using EMC32 automated software below 40GHz. Reported level is the actual level with all the correction factors factored in. Correction Factor column is for informational purposes only. See Section 2.2.8 for sample computation.



2.2.8 Sample Computation (Radiated Emission)

Measuring equipment raw measurement (db μ V) @ 30 MHz		24.4
Correction Factor (dB)	Asset# 1066 (cable)	0.3
	Asset# 1172 (cable)	0.3
	Asset# 1016 (preamplifier)	-30.7
	Asset# 1175(cable)	0.3
	Asset# 1002 (antenna)	17.2
Reported QuasiPeak Final Measurement (dbμV/m) @ 30MHz		11.8


2.2.9 Test Results

Compliant. See attached plots.



2.2.10 Below 30MHz Radiated Emission Test

Full Spectrum

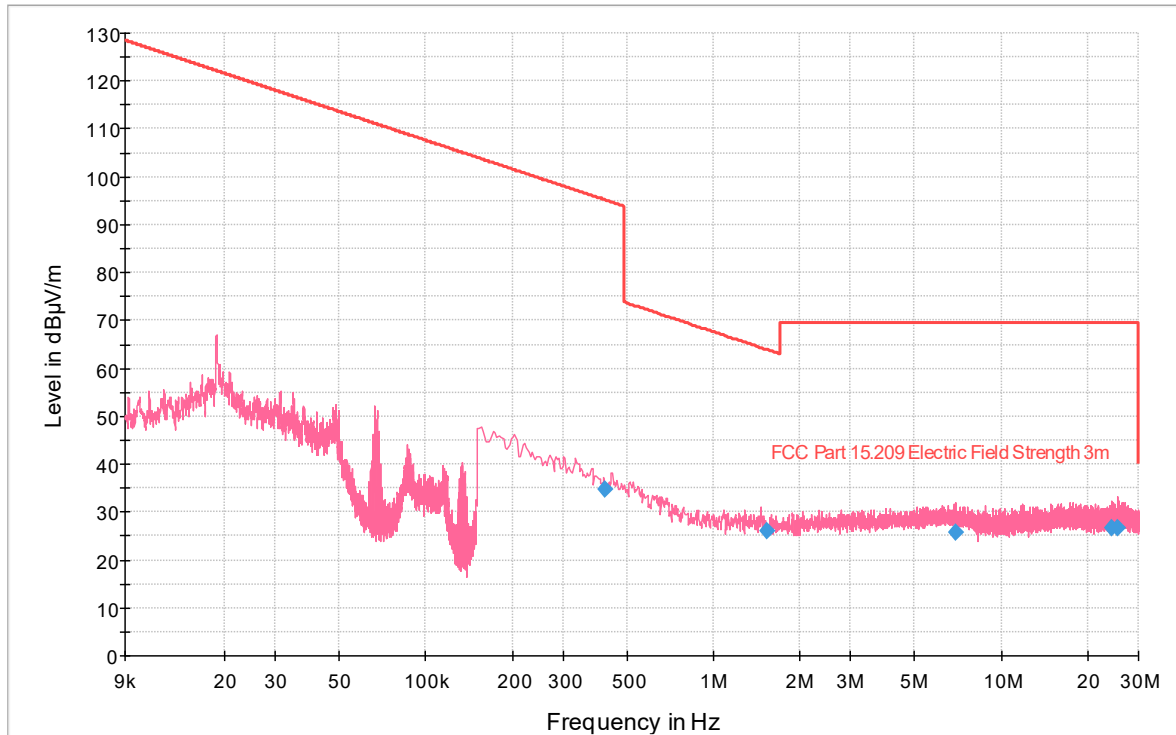

— Preview Result 1V-PK+ [Preview Result 1V.Result:2]
— FCC Part 15.209 Electric Field Strength 3m [.\EMI Radiated]
◆ Final_Result QPK [Final_Result.Result:4]


Quasi-Peak Data

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Height (cm)	Azimuth (degrees)	Corr. (dB/m)
0.417685	34.80	95.19	60.38	1000.0	9.000	400.0	H	212.0	19.4
1.524778	26.21	63.93	37.72	1000.0	9.000	400.0	H	200.0	20.0
6.932316	25.66	69.50	43.84	1000.0	9.000	400.0	H	16.0	20.2
24.226102	26.80	69.50	42.70	1000.0	9.000	400.0	H	282.0	24.2
25.341067	26.74	69.50	42.76	1000.0	9.000	400.0	H	92.0	24.5



2.2.11 30MHz to 1GHz Radiated Emission Test

Full Spectrum

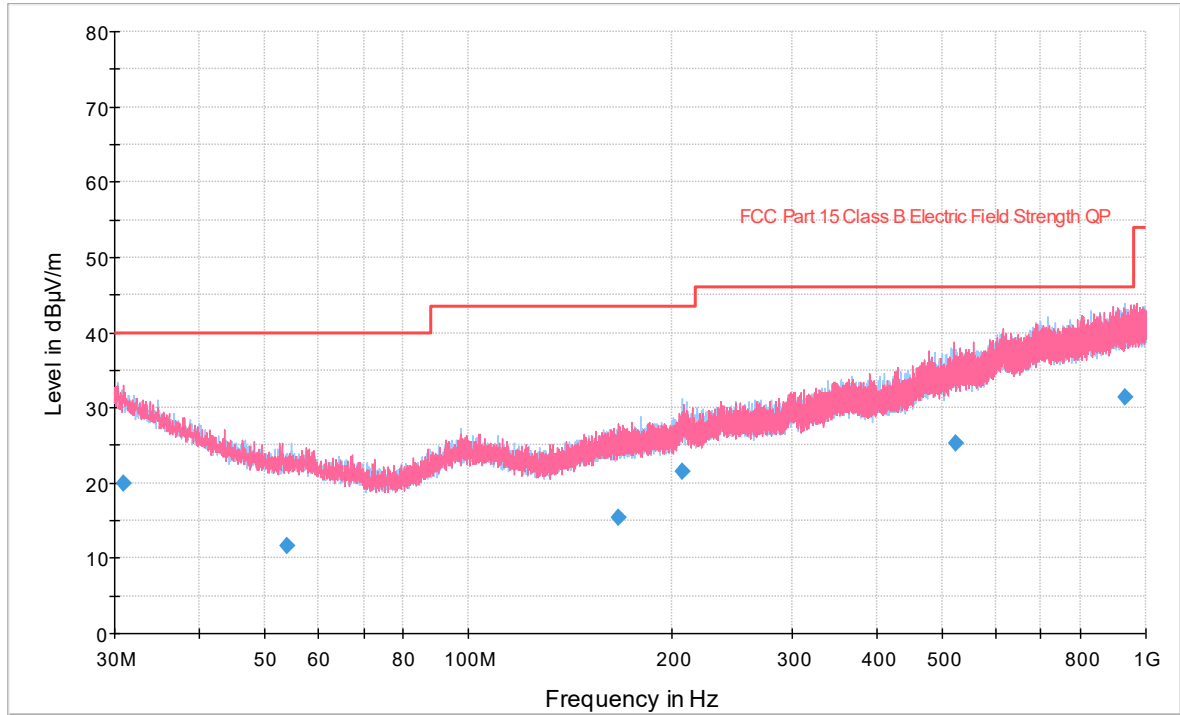

- Preview Result 1H-PK+ [Preview Result 1H.Result:2]
- Preview Result 1V-PK+ [Preview Result 1V.Result:2]
- FCC Part 15 Class B Electric Field Strength QP [..\EMI Radiated\]
- ◆ Final_Result QPK [Final_Result.Result:4]


Quasi-Peak Data

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
30.920000	19.95	40.00	20.05	1000.0	120.000	118.0	H	54.0	22.1
53.919667	11.75	40.00	28.25	1000.0	120.000	225.0	H	24.0	14.2
166.559000	15.50	43.50	28.00	1000.0	120.000	289.0	V	330.0	16.8
206.273667	21.58	43.50	21.92	1000.0	120.000	125.0	H	10.0	19.0
523.099000	25.28	46.00	20.72	1000.0	120.000	386.0	V	316.0	25.9
932.808000	31.32	46.00	14.68	1000.0	120.000	120.0	H	89.0	30.7



2.2.12 From 1GHz to 18GHz Radiated Emission Test

Full Spectrum

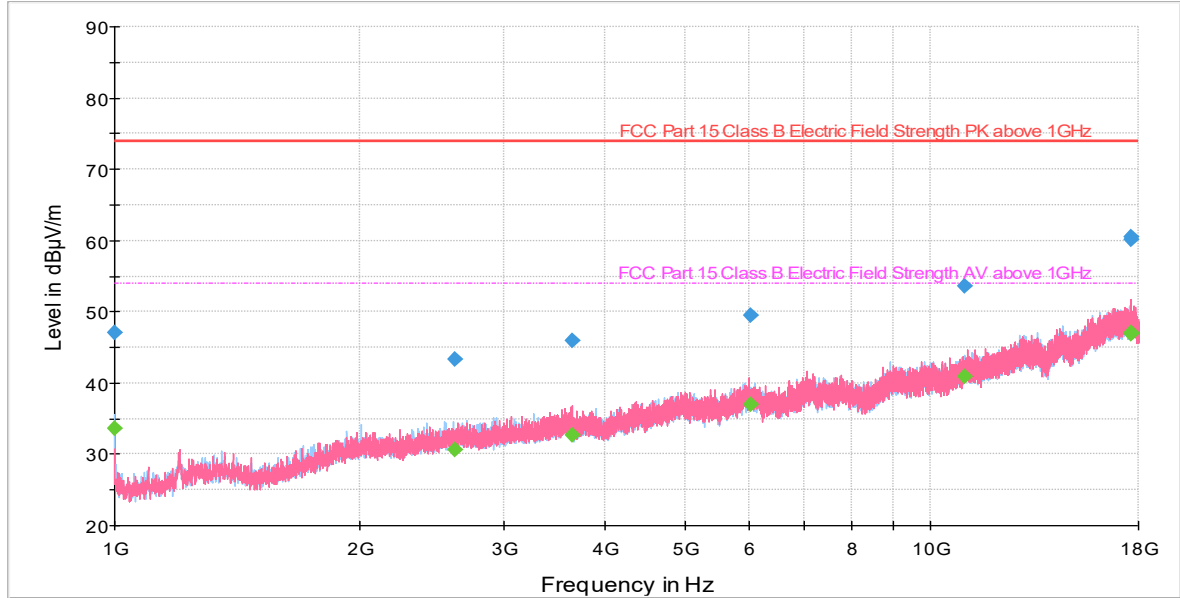

- Preview Result 1H-PK+ [Preview Result 1H.Result:2]
- Preview Result 1V-PK+ [Preview Result 1V.Result:2]
- FCC Part 15 Class B Electric Field Strength PK above 1GHz [.\EMI Radiated\]
- FCC Part 15 Class B Electric Field Strength AV above 1GHz [.\EMI Radiated\]
- ◆ Final_Result PK+ [Final_Result.Result:4]
- ◆ Final_Result AVG [Final_Result.Result:5]

Peak Data

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1000.000000	47.15	73.90	26.75	1000.0	1000.000	138.0	H	282.0	-6.1
2613.700000	43.40	73.90	30.50	1000.0	1000.000	350.0	H	170.0	1.5
3633.900000	45.87	73.90	28.03	1000.0	1000.000	255.0	V	43.0	3.5
6017.500000	49.54	73.90	24.36	1000.0	1000.000	175.0	V	305.0	5.5
11032.633333	53.69	73.90	20.21	1000.0	1000.000	335.0	H	17.0	13.7
17639.566667	60.49	73.90	13.41	1000.0	1000.000	305.0	V	8.0	19.3
17641.566667	60.14	73.90	13.76	1000.0	1000.000	335.0	V	0.0	19.3


Average Data

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1000.000000	33.70	53.90	20.20	1000.0	1000.000	138.0	H	282.0	-6.1
2613.700000	30.64	53.90	23.26	1000.0	1000.000	350.0	H	170.0	1.5
3633.900000	32.61	53.90	21.29	1000.0	1000.000	255.0	V	43.0	3.5
6017.500000	37.01	53.90	16.89	1000.0	1000.000	175.0	V	305.0	5.5
11032.633333	40.99	53.90	12.91	1000.0	1000.000	335.0	H	17.0	13.7
17639.566667	47.08	53.90	6.82	1000.0	1000.000	305.0	V	8.0	19.3
17641.566667	46.83	53.90	7.07	1000.0	1000.000	335.0	V	0.0	19.3



2.2.13 18GHz to 26GHz Radiated Emission Test (including band edges verifications)

Full Spectrum

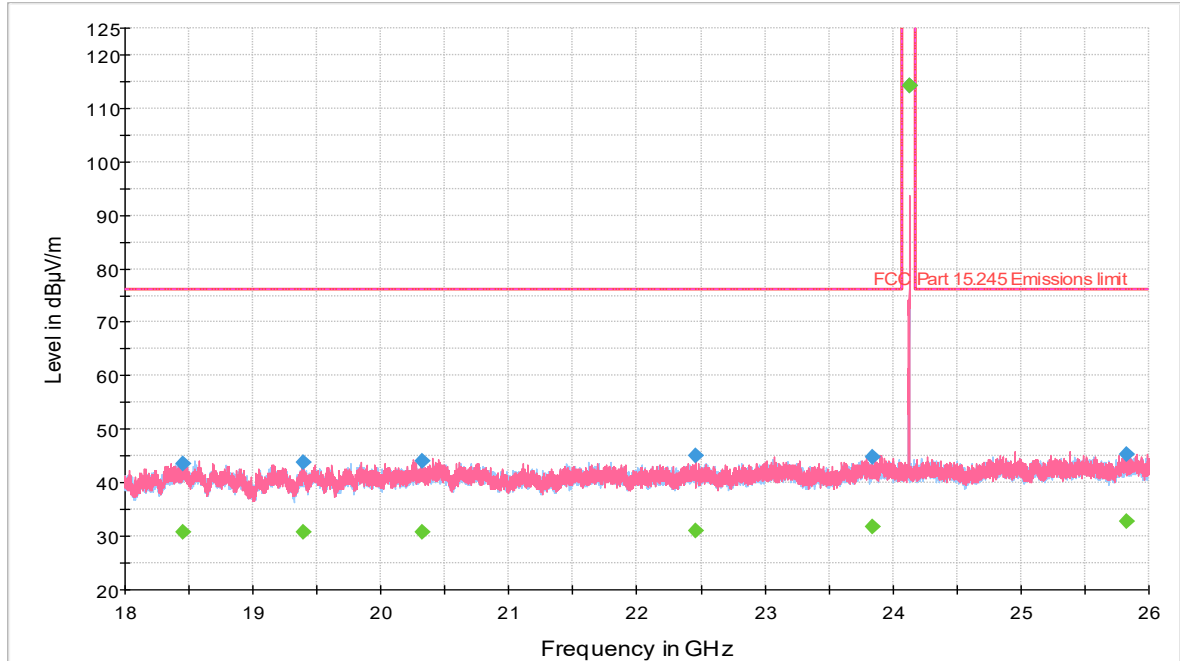

◆ Preview Result 1H-PK+ [Preview Result 1H.Result:2] — FCC Part 15.245 Emissions limit [.\EMI Radiated\
◆ Final_Result PK+ [Final_Result.Result:4] ◆ Final_Result AVG [Final_Result.Result:5]

Peak Data

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
18456.192500	43.45	76.20	32.75	1000.0	1000.000	212.0	V	47.0	-3
19390.314500	43.83	76.20	32.37	1000.0	1000.000	153.0	V	215.0	-3
20320.485000	44.01	76.20	32.19	1000.0	1000.000	159.0	H	25.0	-3
22452.995500	45.15	76.20	31.05	1000.0	1000.000	163.0	V	262.0	-1
23835.360500	44.71	76.20	31.49	1000.0	1000.000	187.0	H	308.0	0
24127.159500	114.34	129.20	14.86	1000.0	1000.000	187.0	V	31.0	0
25828.187500	45.34	76.20	30.86	1000.0	1000.000	163.0	V	40.0	1


Average Data

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
18456.192500	30.76	76.20	45.44	1000.0	1000.000	212.0	V	47.0	-3
19390.314500	30.89	76.20	45.31	1000.0	1000.000	153.0	V	215.0	-3
20320.485000	30.68	76.20	45.52	1000.0	1000.000	159.0	H	25.0	-3
22452.995500	31.09	76.20	45.12	1000.0	1000.000	163.0	V	262.0	-1
23835.360500	31.89	76.20	44.31	1000.0	1000.000	187.0	H	308.0	0
24127.159500	114.19	129.20	15.01	1000.0	1000.000	187.0	V	31.0	0
25828.187500	32.77	76.20	43.43	1000.0	1000.000	163.0	V	40.0	1



2.2.14 26GHz to 40GHz Radiated Emission Test

Full Spectrum

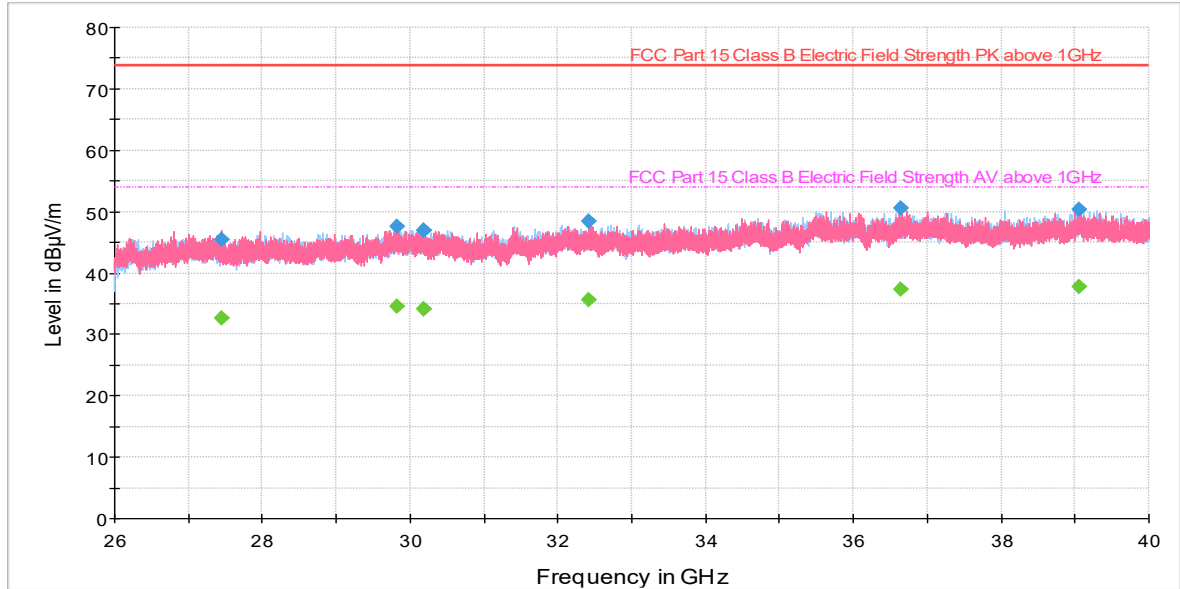

- Preview Result 1H-PK+ [Preview Result 1H.Result:2]
- Preview Result 1V-PK+ [Preview Result 1V.Result:2]
- FCC Part 15 Class B Electric Field Strength PK above 1GHz [.\EMI Radiated\]
- - - FCC Part 15 Class B Electric Field Strength AV above 1GHz [.\EMI Radiated\]
- ◆ Final_Result PK+ [Final_Result.Result:4]
- ◆ Final_Result AVG [Final_Result.Result:5]

Peak Data


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
27453.461923	45.44	73.90	28.46	1000.0	1000.000	175.0	V	300.0	2
29822.379230	47.50	73.90	26.40	1000.0	1000.000	138.0	H	273.0	3
30175.484615	46.96	73.90	26.94	1000.0	1000.000	225.0	V	80.0	3
30177.985385	47.02	73.90	26.88	1000.0	1000.000	225.0	V	114.0	3
32408.874231	48.37	73.90	25.53	1000.0	1000.000	177.0	V	248.0	5
36632.415769	50.53	73.90	23.37	1000.0	1000.000	175.0	H	313.0	7
39057.750385	50.40	73.90	23.50	1000.0	1000.000	202.0	V	2.0	7

Average Data

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
27453.461923	32.71	53.90	21.19	1000.0	1000.000	175.0	V	300.0	2
29822.379230	34.64	53.90	19.26	1000.0	1000.000	138.0	H	273.0	3
30175.484615	34.17	53.90	19.73	1000.0	1000.000	225.0	V	80.0	3
30177.985385	34.06	53.90	19.84	1000.0	1000.000	225.0	V	114.0	3
32408.874231	35.56	53.90	18.34	1000.0	1000.000	177.0	V	248.0	5
36632.415769	37.23	53.90	16.67	1000.0	1000.000	175.0	H	313.0	7
39057.750385	37.74	53.90	16.16	1000.0	1000.000	202.0	V	2.0	7




2.2.15 Maximized Plot from 40GHz to 100GHz

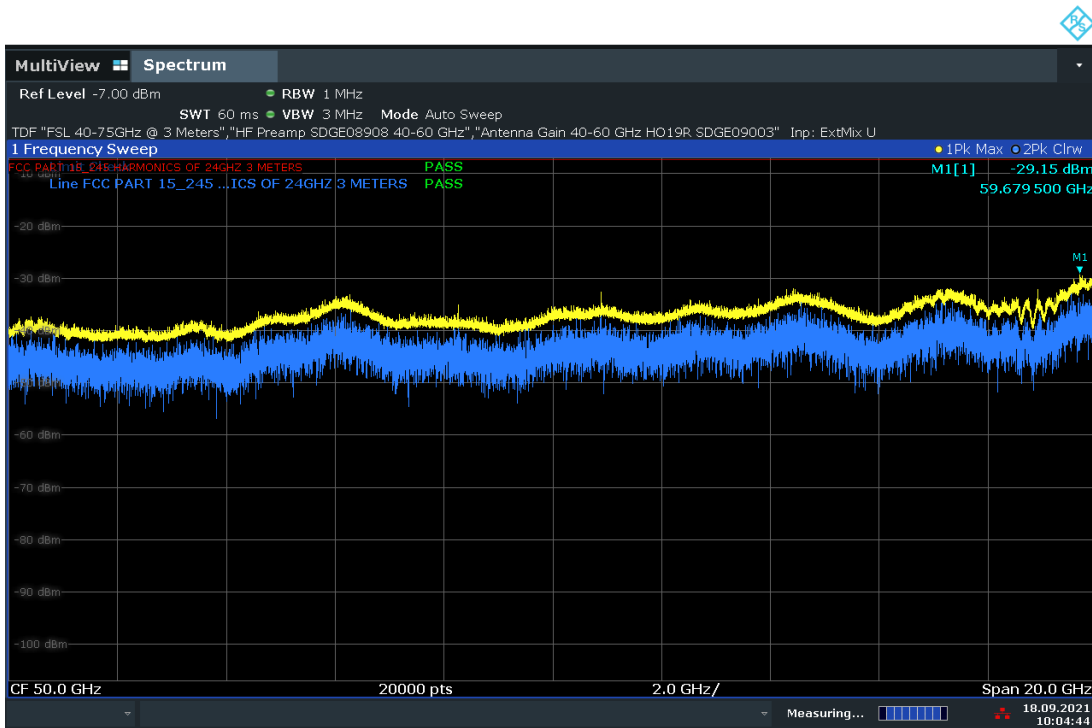


10:04:45 18.09.2021

40GHz to 60GHz

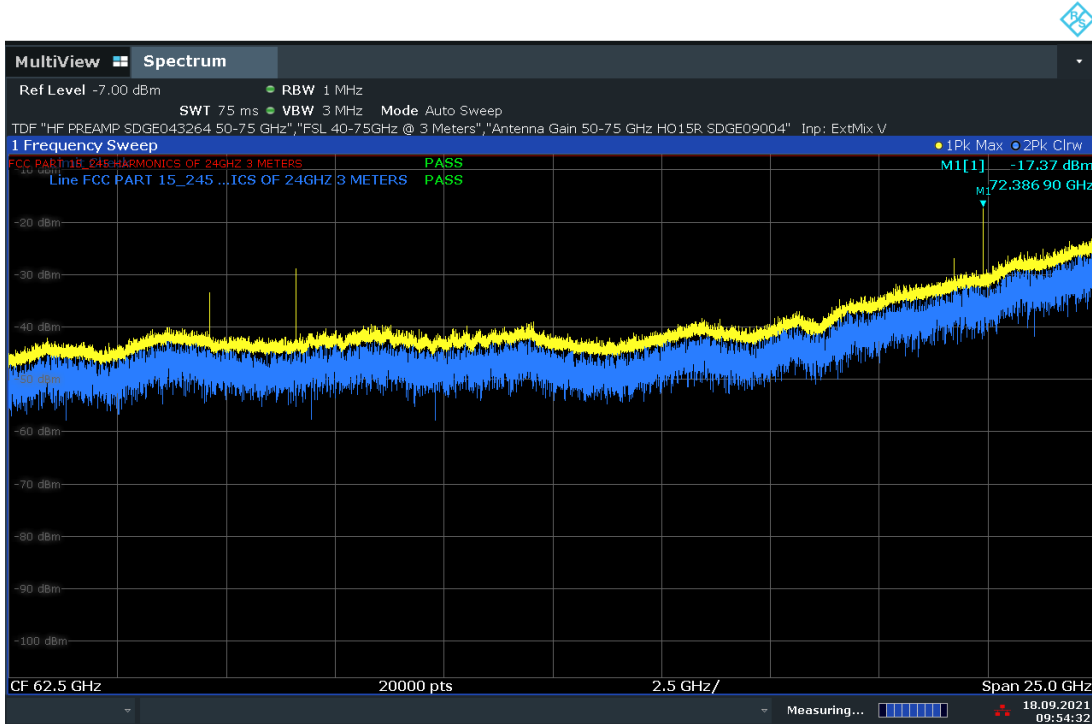

09:54:32 18.09.2021

60GHz to 75GHz

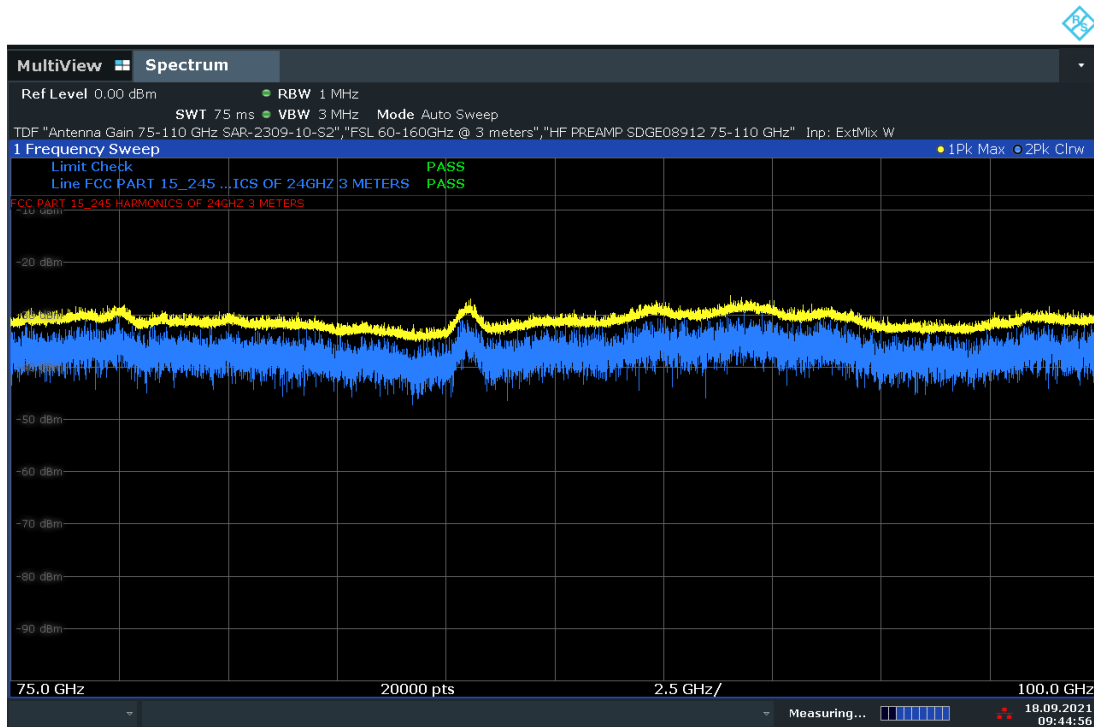

09:44:57 18.09.2021

75GHz to 100GHz Verification



2.3 99% EMISSION BANDWIDTH

2.3.1 Specification Reference

RSS-Gen 6.7

2.3.2 Standard Applicable

The occupied bandwidth or the “99% emission bandwidth” is defined as the frequency range between two points, one above and the other below the carrier frequency, within which 99% of the total transmitted power of the fundamental transmitted emission is contained. The occupied bandwidth shall be reported for all equipment in addition to the specified bandwidth required in the applicable RSSs.

In some cases, the “x dB bandwidth” is required, which is defined as the frequency range between two points, one at the lowest frequency below and one at the highest frequency above the carrier frequency, at which the maximum power level of the transmitted emission is attenuated x dB below the maximum inband power level of the modulated signal, where the two points are on the outskirts of the in-band emission.

2.3.3 Equipment Under Test and Modification State

Serial No: PCHS01A541411 / Default Test Configuration

2.3.4 Date of Test/Initial of test personnel who performed the test

September 22, 2021 / FSC

2.3.5 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.3.6 Environmental Conditions

Test performed at TÜV SÜD America Inc. Mira Mesa facility


Ambient Temperature	28.1 °C
Relative Humidity	42.9 %
ATM Pressure	99.9 kPa

2.3.7 Additional Observations

The EUT behaves like a CW signal. The verification therefore is performed using worst case RBW of 1MHz.

2.3.8 Test Results

See attached test plot. For reference only. Measured 99% OBW is **2.2MHz**.

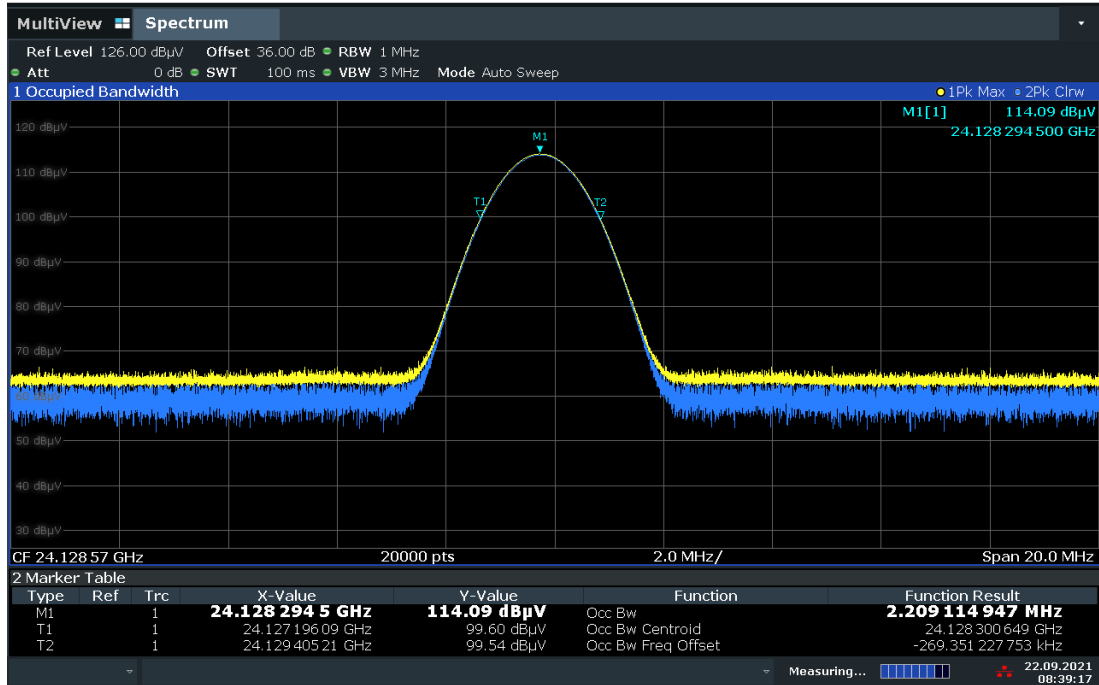

08:39:17 22.09.2021

99% OBW



SECTION 3

TEST EQUIPMENT USED



3.1 TEST EQUIPMENT USED

List of absolute measuring and other principal items of test equipment.

ID Number (SDGE/SDRB)	Test Equipment	Type	Serial Number	Manufacturer	Cal Date	Cal Due Date
Radiated Emission						
1049	EMI Test Receiver	ESU40	100133	Rohde & Schwarz	09/25/20	09/25/21
7611	Signal/Spectrum Analyzer	FSW26	102017	Rohde & Schwarz	02/02/21	02/02/22
1003	Signal Generator	SMR40	100443	Rohde & Schwarz	06/25/21	06/25/22
1002	Bilog Antenna	3142C	0058717	EMCO	10/09/19	10/09/21
7631	Double-ridged waveguide horn	3117	00205418	ETS-Lindgren	09/16/20	09/16/22
46797	Preamplifier	PA-122	181925	Com Power	10/28/20	10/28/21
6628	Loop Antenna	HFH2-Z2335.4711.52	FNr.800.458/25	Rohde & Schwarz	05/22/20	05/20/22
9001	Horn antenna (18-26.5GHz)	HO42S	101	Custom Microwave	09/09/19	10/09/21
9003	Horn antenna (26-40 GHz)	HO28S	102	Custom Microwaves	09/09/19	10/09/21
40815	Pre-amplifier (18-40 GHz)	19D18	15G27	Spacek Labs	10/05/20	10/05/21
7637	Harmonics mixer (40-60 GHz)	FS-Z60	100009	Rhode & Schwarz	07/29/20	07/29/23
7636	Harmonics mixer (60-90 GHz)	FS-Z90	100092	Rhode & Schwarz	07/29/20	07/29/23
51288	Harmonics mixer (50-75 GHz)	FS-Z75	102099	Rohde & Schwarz	03/11/21	07/29/23
7633	Harmonics mixer (75-110 GHz)	HM-110-7	101000	Radiometer Physics	02/22/21	07/29/23
8908	Pre-amplifier (40-60 GHz)	SBL-4036033080-1919-E1	12020-01	Sage Millimeter, Inc.	07/07/21	07/29/23
8892	Pre-amplifier (50-75 GHz)	SBL-5037533050-1515-E1	12020-01	Sage Millimeter, Inc.	07/07/21	07/29/23
8912	Pre-amplifier (75-110 GHz)	FLNA-10-0005	FTL17328	Farran Technology Ltd.	07/07/21	07/29/23
9003	Horn antenna (40-60 GHz)	HO19R	103	Custom Microwaves	Verified by 7611 and corresponding direct reading attenuator/active multiplier combination	
9004	Horn antenna (50-75 GHz)	HO15R	104	Custom Microwaves		
7628	Horn antenna (75-110 GHz)	SAR-2309-10-S2	13481-01	Sage Millimeter, Inc.		
8872	Direct Reading Attenuator (40-60)	STA-60-19-D1	11875-01	Sage Millimeter, Inc.	Verified by 7611 and corresponding antenna/mixer combination	
8860	Direct Reading Attenuator (50-75)	STA-60-15-D1	11466-01	Sage Millimeter, Inc.		
8861	Direct Reading Attenuator (75-110)	STA-60-10-D1	11466-01	Sage Millimeter, Inc.		
8919	Direct Reading Attenuator (90-140)	STA-60-08-D1	12605-01	Sage Millimeter, Inc.		
8873	Active Multiplier (40-60 GHz)	AMC-19-RFH00	124	Millitech, Inc.		



ID Number (SDGE/SDRB)	Test Equipment	Type	Serial Number	Manufacturer	Cal Date	Cal Due Date
8914	Active Multiplier (50-75 GHz)	AMC-15-RFH00	283	Millitech, Inc.	Verified by 7611 and corresponding antenna/mixer combination	
8915	Active Multiplier (75-110 GHz)	AMC-10-RFH00	606	Millitech, Inc.		
8920	Active Multiplier (90-140 GHz)	AMC-08-RFH00	58	Millitech, Inc.		
Miscellaneous						
43003	True RMS Multimeter	85 III	69880143	Fluke	10/23/20	10/23/21
7619	Temp/Humidity Sensor	iBTHX-W	15050268	Omega	03/09/21	03/09/22
-	Test Software	EMC32	V10.50.40	Rhode & Schwarz	N/A	



3.2 Measurement Uncertainty

Calculation of Measurement Uncertainty per CISPR 16-4-2:2011 with Corr. 1

3.2.1 Radiated Measurements (Below 1GHz)

	Input Quantity (Contribution) X_i	Value	Prob. Dist.	Divisor	$u_i(x)$	$u_i(x)^2$
1	Receiver reading	0.10 dB	Normal, k=1	1.000	0.10	0.01
2	Attenuation: antenna-receiver	0.20 dB	Normal, k=2	2.000	0.10	0.01
3	Antenna factor AF	0.75 dB	Normal, k=2	2.000	0.38	0.14
4	Receiver sinewave accuracy	0.45 dB	Normal, k=2	2.000	0.23	0.05
5	Receiver pulse amplitude	1.50 dB	Rectangular	1.732	0.87	0.75
6	Receiver pulse repetition rate	1.50 dB	Rectangular	1.732	0.87	0.75
7	Noise floor proximity	0.50 dB	Rectangular	1.732	0.29	0.08
8	Mismatch: antenna-receiver	0.95 dB	U-shaped	1.414	0.67	0.45
9	AF frequency interpolation	0.30 dB	Rectangular	1.732	0.17	0.03
10	AF height deviations	0.10 dB	Rectangular	1.732	0.06	0.00
11	Directivity difference at 3 m	3.12 dB	Rectangular	1.732	1.80	3.24
12	Phase center location at 3 m	1.00 dB	Rectangular	1.732	0.58	0.33
13	Cross-polarisation	0.90 dB	Rectangular	1.732	0.52	0.27
14	Balance	0.00 dB	Rectangular	1.732	0.00	0.00
15	Site imperfections	3.76 dB	Triangular	2.449	1.54	2.36
16	Separation distance at 3 m	0.30 dB	Rectangular	1.732	0.17	0.03
17	Effect of setup table material	0.77 dB	Rectangular	1.732	0.44	0.20
18	Table height at 3 m	0.10 dB	Normal, k=2	2.000	0.05	0.00
19	Near-field effects	0.00 dB	Triangular	2.449	0.00	0.00
20	Effect of ambient noise on OATS	0.00 dB				0.00
Combined standard uncertainty				Normal	2.95 dB	
Expanded uncertainty				Normal, k=2	5.90 dB	



3.2.2 Radiated Emission Measurements (Above 1GHz)

	Input Quantity (Contribution) X_i	Value	Prob. Dist.	Divisor	$u_i(x)$	$u_i(x)^2$
1	Receiver reading	0.10 dB	Normal, k=1	1.000	0.10	0.01
2	Attenuation: antenna-receiver	0.20 dB	Normal, k=2	2.000	0.10	0.01
3	Antenna factor AF	0.75 dB	Normal, k=2	2.000	0.38	0.14
4	Receiver sinewave accuracy	0.45 dB	Normal, k=2	2.000	0.23	0.05
5	Receiver pulse amplitude	1.50 dB	Rectangular	1.732	0.87	0.75
6	Receiver pulse repetition rate	1.50 dB	Rectangular	1.732	0.87	0.75
7	Noise floor proximity	0.50 dB	Rectangular	1.732	0.29	0.08
8	Mismatch: antenna-receiver	0.95 dB	U-shaped	1.414	0.67	0.45
9	AF frequency interpolation	0.30 dB	Rectangular	1.732	0.17	0.03
10	AF height deviations	0.10 dB	Rectangular	1.732	0.06	0.00
11	Directivity difference at 3 m	3.12 dB	Rectangular	1.732	1.80	3.24
12	Phase center location at 3 m	1.00 dB	Rectangular	1.732	0.58	0.33
13	Cross-polarisation	0.90 dB	Rectangular	1.732	0.52	0.27
14	Balance	0.00 dB	Rectangular	1.732	0.00	0.00
15	Site imperfections	3.25 dB	Triangular	2.449	1.33	1.76
16	Separation distance at 3 m	0.30 dB	Rectangular	1.732	0.17	0.03
17	Effect of setup table material	0.77 dB	Rectangular	1.732	0.44	0.20
18	Table height at 3 m	0.10 dB	Normal, k=2	2.000	0.05	0.00
19	Near-field effects	0.00 dB	Triangular	2.449	0.00	0.00
20	Effect of ambient noise on OATS	0.00 dB				0.00
				Combined standard uncertainty	Normal	2.85 dB
				Expanded uncertainty	Normal, k=2	5.70 dB




SECTION 4

DIAGRAM OF TEST SETUP




America

4.1 Test Setup Diagram

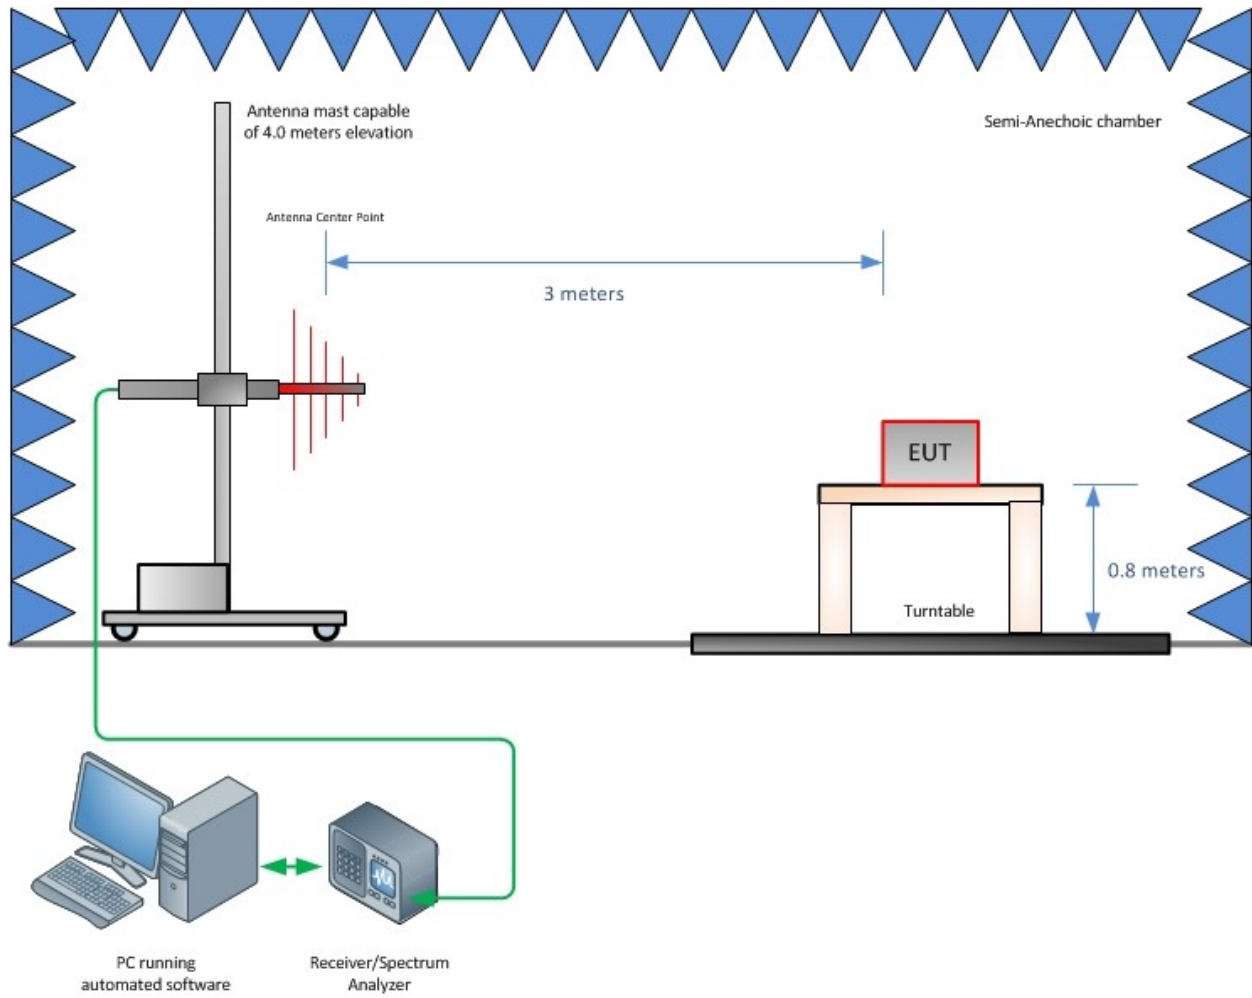

Radiated Emission Test Setup (Below 1GHz)

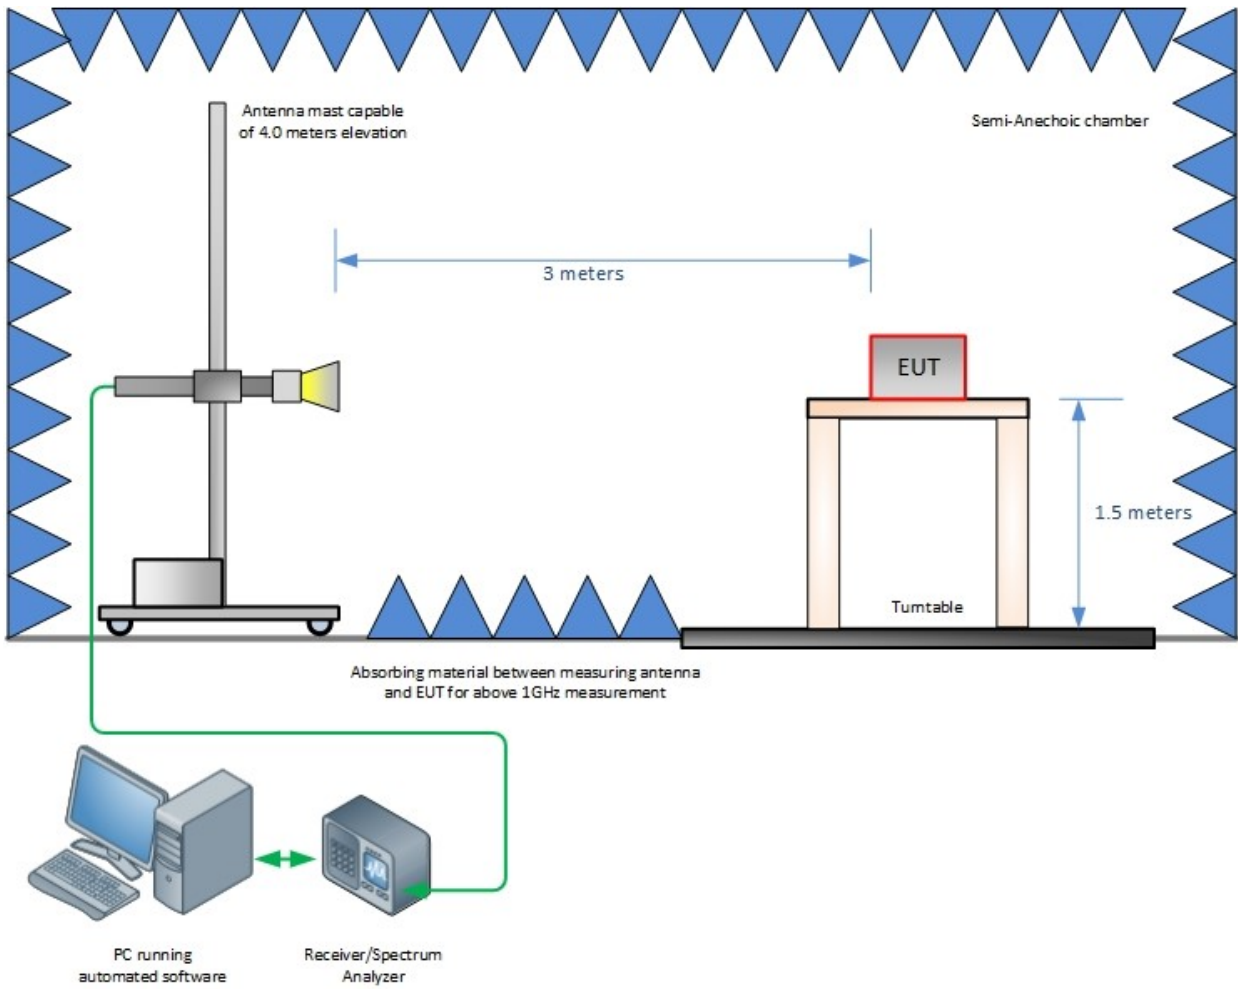

Radiated Emission Test Setup (Above 1GHz)



SECTION 5

ACCREDITATION, DISCLAIMERS AND COPYRIGHT



5.1 Accreditation, Disclaimers and Copyright

TÜV SÜD America Inc.'s reports apply only to the specific sample tested under stated test conditions. It is the manufacturer's responsibility to assure the continued compliance of production units of this model. TÜV SÜD America, Inc. shall have no liability for any deductions, inferences or generalizations drawn by the client or others from TÜV SÜD America, Inc.'s issued reports.

This report is the confidential property of the client. As a mutual protection to our clients, the public and TÜV SÜD America, Inc., extracts from the test report shall not be reproduced, except in full without TÜV SÜD America, Inc.'s written approval.

This report must not be used to claim product certification, approval, or endorsement by A2LA, NIST, or any agency of the federal government.

TÜV SÜD America, Inc. and its professional staff hold government and professional organization certifications for AAMI, ACIL, AEA, ANSI, IEEE, A2LA, NIST and VCCI.



A2LA Cert. No. 2955.13

