

4789722180 Vantron Tablet Wifi 2.4 802.11b 2462 _right edge 0mm(low configuragtion)1201 nv=62

Communication System: UID 0, 2.45GHz Wi-Fi (0); Communication System Band: ISM 2.4GHz; Frequency: 2462 MHz;

Medium parameters used: $f = 2462$ MHz; $\sigma = 1.8$ S/m; $\epsilon_r = 39.887$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3748; ConvF(7, 7, 7); Calibrated: 2020/7/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE3 Sn427; Calibrated: 2020/3/31
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 1235
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (8x11x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 1.49 W/kg


Configuration/Body/Zoom Scan (7x7x4)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 5.380 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 1.734 W/kg

SAR(1 g) = 0.682 W/kg; SAR(10 g) = 0.271 W/kg

Maximum value of SAR (measured) = 1.69 W/kg

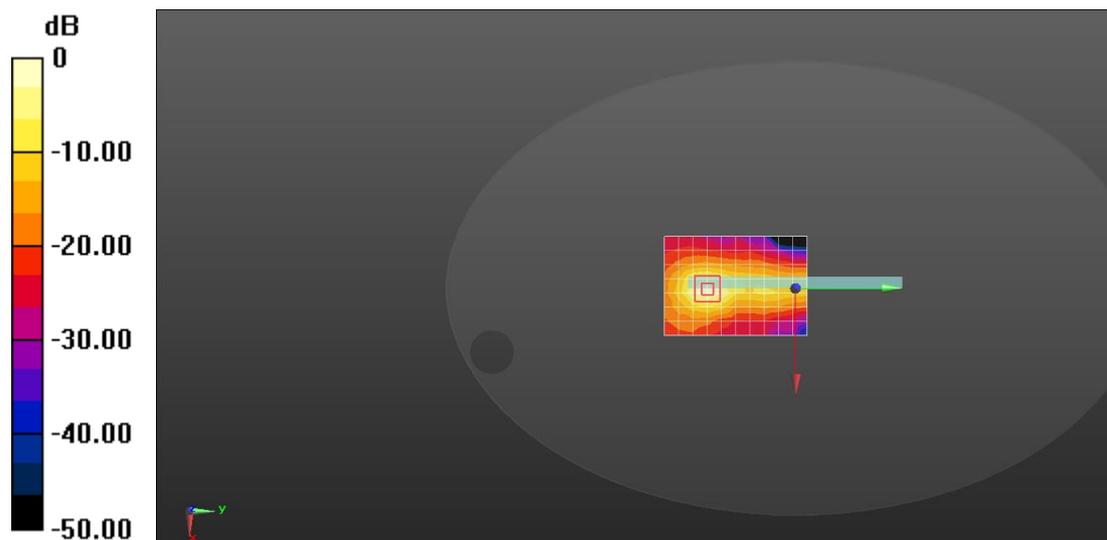

0 dB = 1.49 W/kg = 1.73 dBW/kg

4789722180 Vantron Tablet Wifi 5G 802.11N40 5230 _right edge 0mm(low configuragtion) nv=57

Communication System: UID 0, Wifi 802.11n40 (0); Communication System Band: 5150-5250MHz; Frequency: 5230 MHz;

Medium parameters used: $f = 5230$ MHz; $\sigma = 4.55$ S/m; $\epsilon_r = 34.632$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3748; ConvF(5.05, 5.05, 5.05); Calibrated: 2020/7/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 25.0$
- Electronics: DAE3 Sn427; Calibrated: 2020/3/31
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 1235
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (9x9x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 2.31 W/kg


Configuration/Body/Zoom Scan (8x8x6)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 2.684 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 6.26 W/kg

SAR(1 g) = 1.11 W/kg; SAR(10 g) = 0.286 W/kg

Maximum value of SAR (measured) = 3.17 W/kg

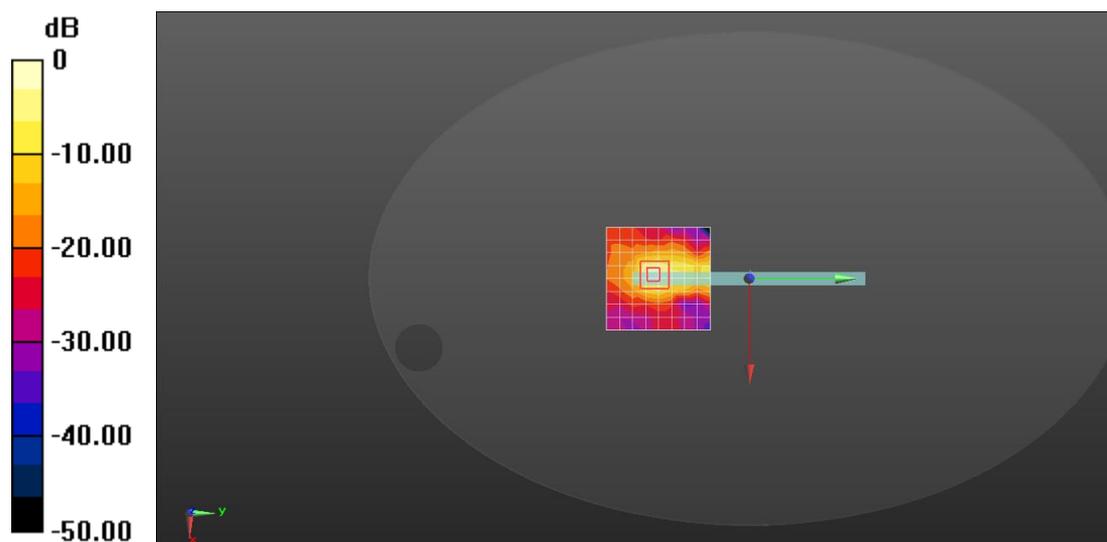

0 dB = 2.31 W/kg = 3.64 dBW/kg

4789722180 Vantron Tablet Wifi 5G 802.11N40 5755 _right edge 0mm(low configuragtion)

Communication System: UID 0, Wifi 802.11n40 (0); Communication System Band: 5725-5825MHz; Frequency: 5755 MHz;

Medium parameters used (interpolated): $f = 5755$ MHz; $\sigma = 5.36$ S/m; $\epsilon_r = 34.07$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3748; ConvF(4.7, 4.7, 4.7); Calibrated: 2020/7/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 25.0$
- Electronics: DAE3 Sn427; Calibrated: 2020/3/31
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 1235
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (9x9x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 1.36 W/kg


Configuration/Body/Zoom Scan (8x8x6)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 0 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 3.92 W/kg

SAR(1 g) = 0.702 W/kg; SAR(10 g) = 0.169 W/kg

Maximum value of SAR (measured) = 2.06 W/kg

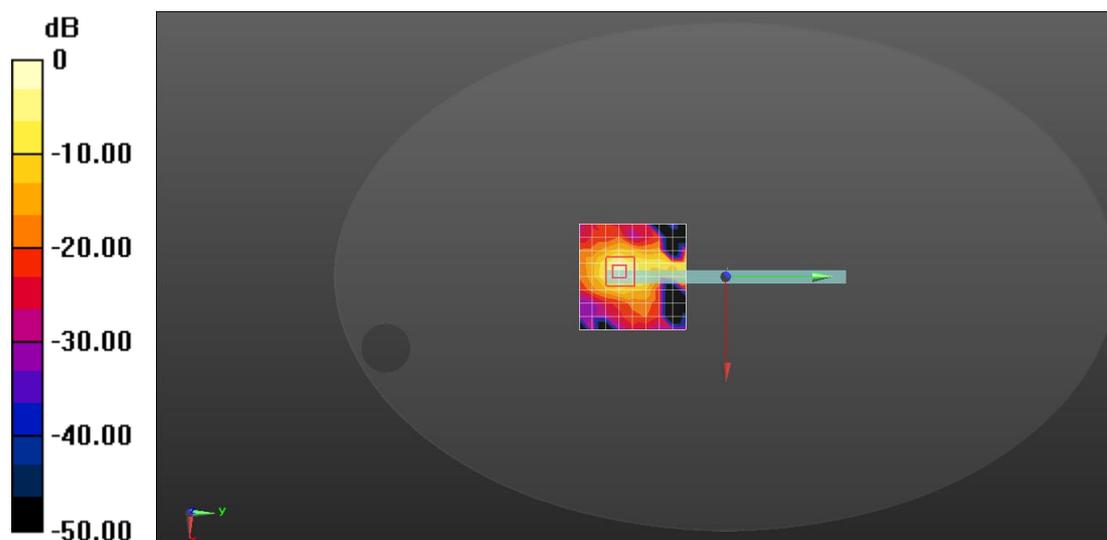

0 dB = 1.36 W/kg = 1.34 dBW/kg

