

FCC PART 15.407 TEST REPORT

For

Chengdu Vantron Technology, Ltd.

No.5 GaoPeng Road, Hi-Tech Zone, Chengdu, SiChuan, P.R. China 610045

Tested Model: VT-TABLET-5081G
FCC ID: 2AAGE5081G

Report Type: Original Report	Equipment Name: Tablet
Report Number:	RSC191025001-0E
Date of Report Issue:	2019-12-12 Sula Huang
Reviewed By:	
Prepared By:	Bay Area Compliance Laboratories Corp. (Chengdu) No.5040, Huilongwan Plaza, No. 1, Shawan Road, Jinniu District, Chengdu, Sichuan, China Tel: +86-28-65525123 Fax: +86-28-65525125 www.baclcorp.com

Note: This report must not be used by the customer to claim product certification, approval, or endorsement by A2LA, or any agency of the Federal Government. BACL is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk **. Customer model name, addresses, names, trademarks etc. are not considered data. This report cannot be reproduced except in full, without prior written approval of the company. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

TABLE OF CONTENTS

GENERAL INFORMATION	3
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	3
OBJECTIVE	3
RELATED SUBMITTAL(S)/GRANT(S).....	3
MEASUREMENT UNCERTAINTY	4
TEST METHODOLOGY	4
TEST FACILITY.....	4
SYSTEM TEST CONFIGURATION.....	5
DESCRIPTION OF TEST CONFIGURATION	5
EUT EXERCISE SOFTWARE.....	6
SUPPORT EQUIPMENT LIST AND DETAILS	11
EXTERNAL I/O CABLE	11
BLOCK DIAGRAM OF TEST SETUP	12
SUMMARY OF TEST RESULTS.....	13
TEST EQUIPMENTS LIST.....	14
FCC §15.407 (f) & §1.1310 & §2.1093- RF EXPOSURE	16
APPLICABLE STANDARD.....	16
FCC §15.203 - ANTENNA REQUIREMENT	17
APPLICABLE STANDARD.....	17
FCC §15.407 (b) (6) §15.207 (a) – CONDUCTED EMISSIONS.....	18
APPLICABLE STANDARD.....	18
EUT SETUP.....	18
EMI TEST RECEIVER SETUP	18
CORRECTED AMPLITUDE & MARGIN CALCULATION	19
TEST PROCEDURE	19
TEST RESULTS SUMMARY	19
TEST DATA	19
FCC §15.209, §15.205 & §15.407(b) (1) (4)(i) (6) (7) – UNDESIRABLE EMISSION, RESTRICTED BANDS	22
APPLICABLE STANDARD.....	22
EUT SETUP.....	23
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	24
TEST PROCEDURE	24
CORRECTED AMPLITUDE & MARGIN CALCULATION	25
TEST RESULTS SUMMARY	25
TEST DATA.....	25
FCC §15.407(a) (5) & (e) – 26dB & 6dB BANDWIDTH	45
APPLICABLE STANDARD.....	45
TEST PROCEDURE	45
TEST DATA	46
FCC §15.407(a) (1)(IV), (3), (4) – CONDUCTED TRANSMITTER OUTPUT POWER	104
APPLICABLE STANDARD.....	104
TEST PROCEDURE	104
TEST DATA	105
FCC §15.407(a) (1) (iv) (3) (5) - POWER SPECTRAL DENSITY	107
APPLICABLE STANDARD.....	107
TEST PROCEDURE	107
TEST DATA	108

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Applicant	Chengdu Vantron Technology, Ltd.
Product	Tablet
Tested Model	VT-TABLET-5081G
FCC ID	2AAGE5081G
Frequency Range	5150~5250 MHz 5725~5850 MHz
Modulation Type	OFDM
Voltage Range	DC 3.8V rechargeable Li-ion battery or DC5V from adapter
Measure approximately	246 mm (L) x 151 mm (W) x 23.5 mm (H)
Sample serial number	191025001/01 (assigned by the BAACL, Chengdu)
Sample/EUT Status	The test sample was in good condition and received:2019-10-25

Note: Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

Objective

This type approval report is prepared on behalf of **Chengdu Vantron Technology, Ltd.** in accordance with Part 2-Subpart J, Part 15-Subparts A, C and E of the Federal Communications Commission rules.

The tests were performed in order to determine compliance with FCC Part 15, section subpart C, 15.203, 15.205, 15.207, 15.209 and Subpart E, 15.407 rules.

Related Submittal(s)/Grant(s)

FCC Part 15C DXX submissions with FCC ID: 2AAGE5081G
FCC Part 15.247 DSS submissions with FCC ID: 2AAGE5081G
FCC Part 15.247 DTS submissions with FCC ID: 2AAGE5081G

Measurement Uncertainty

Item		Uncertainty	
AC power line conducted emission		2.24 dB	
Radiated Emission(Field Strength)	30MHz-200MHz	H	4.47 dB
		V	4.73 dB
	200MHz-1GHz	H	4.87 dB
		V	5.93 dB
	1GHz-6GHz		4.51 dB
	6GHz-18GHz		4.49 dB
	18GHz-40GHz		5.48 dB
Conducted RF Power		±0.61dB	
Power Spectrum Density		±0.61dB	
Occupied Bandwidth		±5%	
Conducted Emission		±1.5dB	
Humidity		±5%	
Temperature		±1°C	

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the corresponding inclusion factor K when the inclusion probability is about 95%.

Test Methodology

All measurements contained in this report were conducted with:

1. ANSI C63.10-2013 American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.
2. KDB 789033 D02 General U-NII Test Procedures New Rules v02r01.
3. KDB 662911 D01 Multiple Transmitter Output v02r01.

Test Facility

The test site used by Bay Area Compliance Laboratories Corp. (Chengdu) to collect test data is located No.5040, Huilongwan Plaza, No. 1, Shawan Road, Jinniu District, Chengdu, Sichuan, China.

Bay Area Compliance Laboratories Corp. (Chengdu) lab is accredited to ISO/IEC 17025 by A2LA (Lab code: 4324.01) and the FCC designation No. CN1186 under the FCC KDB 974614 D01. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2014.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The EUT was configured for testing in an engineering mode which was provided by the manufacturer.

For 5150~5250 MHz band, channels are provided to test as follows:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	44	5220
38	5190	46	5230
40	5200	48	5240
42	5210	/	/

For 802.11a, 802.11ac20, 802.11n-HT20: Channel 36, 40 and 48 were tested; for 802.11ac40, 802.11n-HT40: Channel 38, 46 were tested; for ac80: Channel 42 was tested.

For 5725~5850 MHz band, channels are provided to test as follows:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	157	5785
151	5755	159	5795
153	5765	161	5805
155	5775	165	5825

For 802.11a, 802.11ac20, 802.11n-HT20: Channel 149, 157 and 165 were tested.

For 802.11n-HT40, 802.11ac40: Channel 151, 159 were tested; for ac80: Channel 155 was tested.

The worst-case data rates are determined to be as follows for each mode based upon investigations by measuring the average power and PSD across all data rates bandwidths, and modulations.

For radiated emission data recorded report:

The system support 802.11a/n ht20/n ht40/ac vht20/ac vht40/ac vht80, the vht20/vht40 were reduced since the identical parameters with 802.11n ht20 and ht40.

The device supports SISO and MIMO at 802.11n-ht20/n-ht40/ac80 mode, per pre-test, the MIMO mode was the worst and reported.


EUT Exercise Software

The software “RF Test Tool” was used for testing, which was provided by manufacturer. The maximum power with maximum duty cycle was set as below:


Software				RF Test Tool		
UNII Band	Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Power Level	
					Chain 0	Chain 1
5150-5250MHz	802.11a	Low	5180	6	Default	Default
		Middle	5200	6	Default	Default
		High	5240	6	Default	Default
	802.11n-HT20	Low	5180	MCS0	Default	Default
		Middle	5200	MCS0	Default	Default
		High	5240	MCS0	Default	Default
	802.11n-HT40	Low	5190	MCS0	Default	Default
		High	5230	MCS0	Default	Default
	802.11ac20	Low	5180	MCS0	Default	Default
		Middle	5200	MCS0	Default	Default
		High	5240	MCS0	Default	Default
	802.11ac40	Low	5190	MCS0	Default	Default
		High	5230	MCS0	Default	Default
	802.11ac80	/	5210	MCS0	Default	Default
5725-5850MHz	802.11a	Low	5745	6	Default	Default
		Middle	5785	6	Default	Default
		High	5825	6	Default	Default
	802.11n-HT20	Low	5745	MCS0	Default	Default
		Middle	5785	MCS0	Default	Default
		High	5825	MCS0	Default	Default
	802.11n-HT40	Low	5755	MCS0	Default	Default
		High	5795	MCS0	Default	Default
	802.11ac20	Low	5745	MCS0	Default	Default
		Middle	5785	MCS0	Default	Default
		High	5825	MCS0	Default	Default
	802.11ac40	Low	5755	MCS0	Default	Default
		High	5795	MCS0	Default	Default
	802.11ac80	/	5775	MCS0	Default	Default

Duty Cycle information is below:


Mode	T _{on} (ms)	T _{on} +T _{off} (ms)	Duty Cycle (%)	Duty Cycle Factor (dB)
802.11a	1.39	1.42	97.89	0.09
802.11n-HT20	1.31	1.34	97.76	0.10
802.11n-HT40	0.65	0.69	94.20	0.26
802.11ac20	1.32	1.35	97.78	0.10
802.11ac40	0.66	0.69	94.81	0.23
802.11ac80	0.32	0.36	89.49	0.48

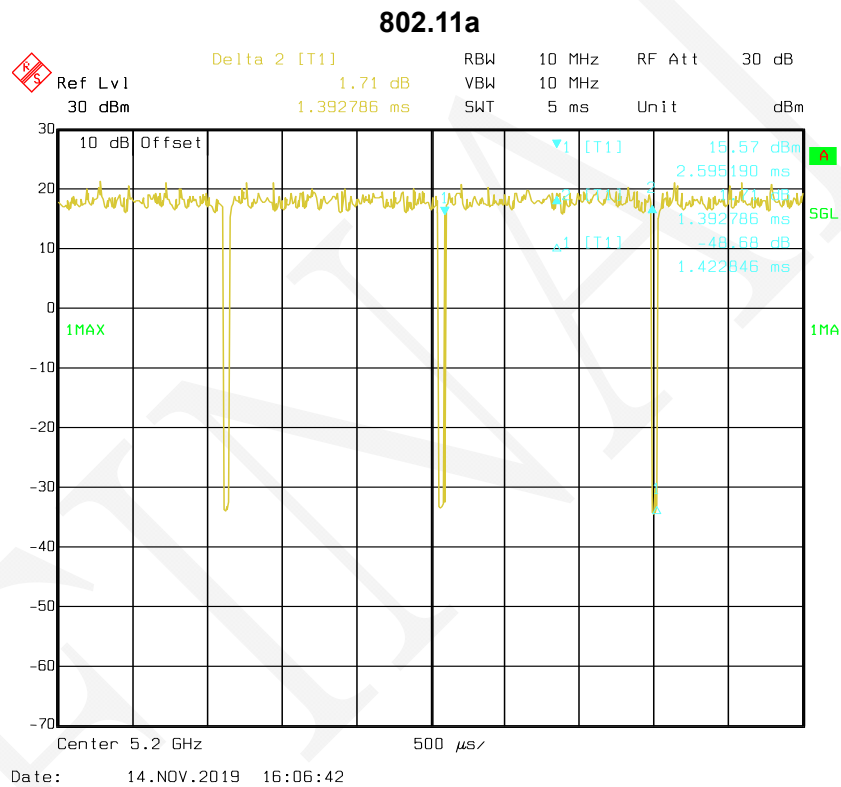

802.11n- HT20

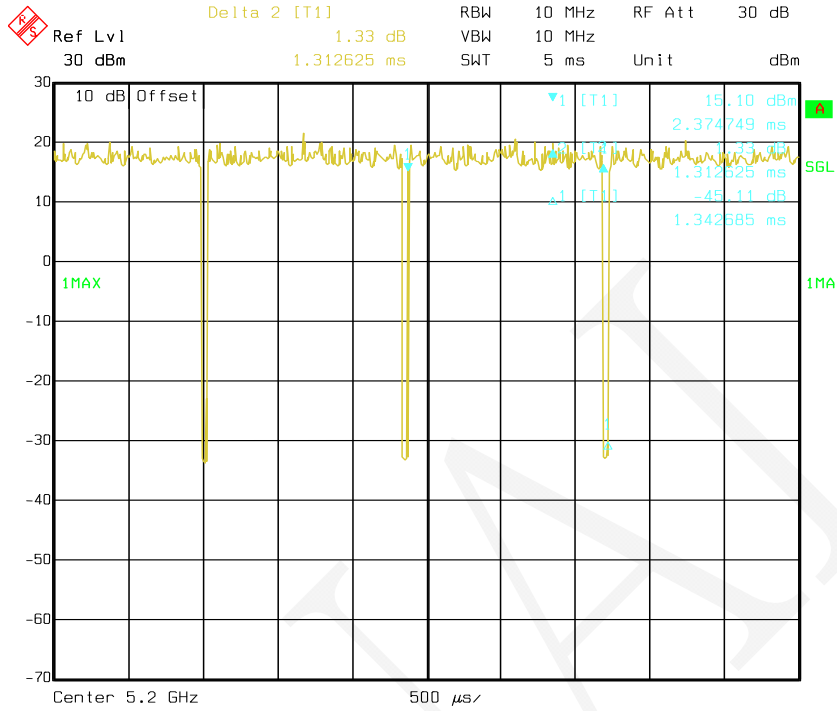


802.11n- HT40

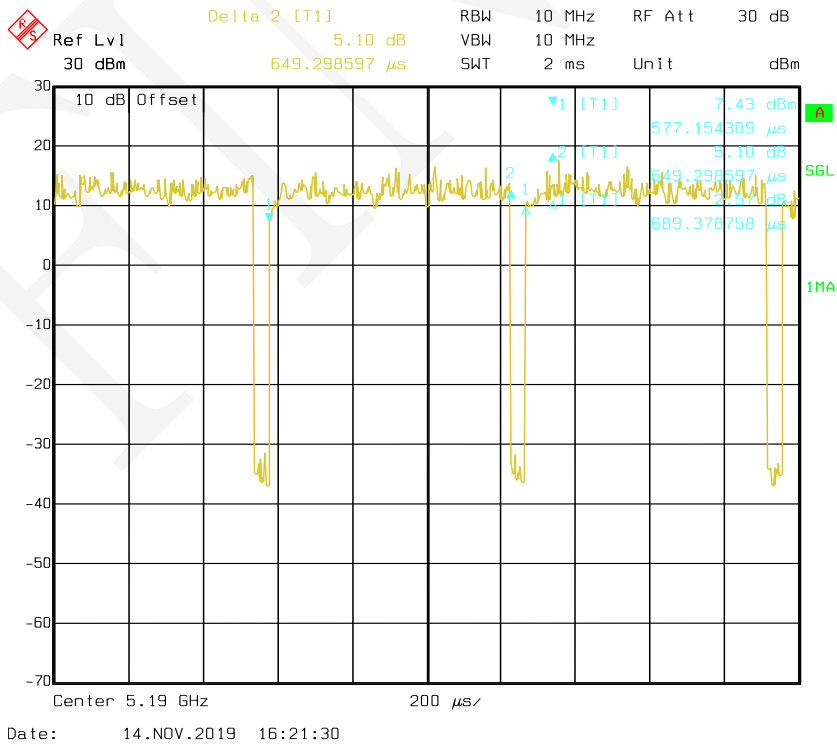

802.11ac20


⚠ Ref Lvl 30 dBm Delta 2 [T1] -2.54 dB RBW 10 MHz RF Att 30 dB
 1.322645 ms VBW 10 MHz Unit dBm
 5 ms

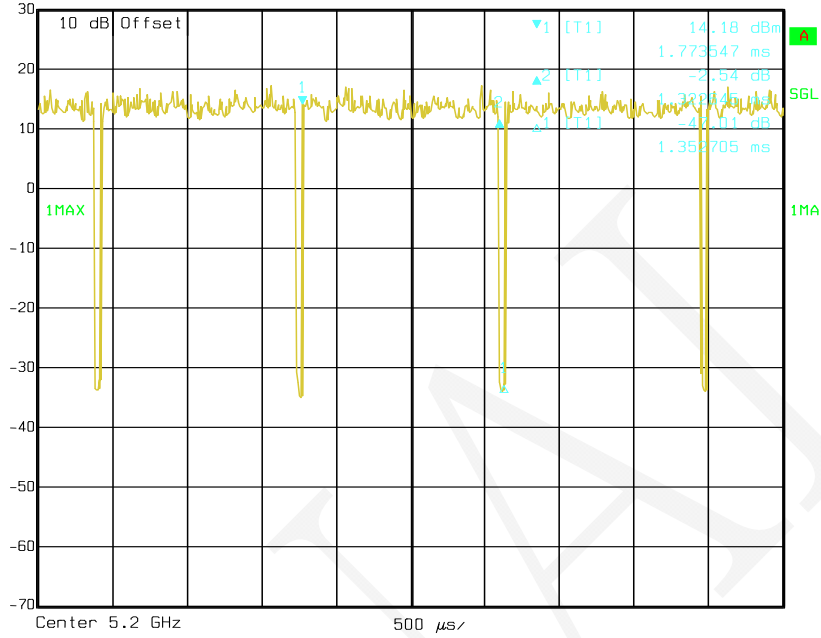

Date: 14.NOV.2019 16:18:13


802.11ac40

⚠ Ref Lvl 30 dBm Delta 2 [T1] 1.29 dB RBW 10 MHz RF Att 30 dB
 657.314629 μs VBW 10 MHz Unit dBm
 2 ms

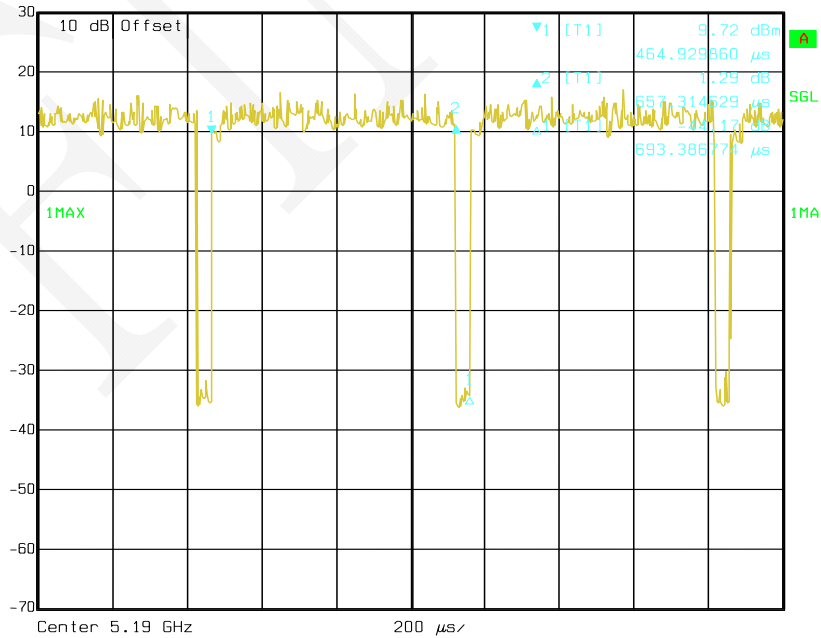

Date: 14.NOV.2019 16:19:55

802.11ac80

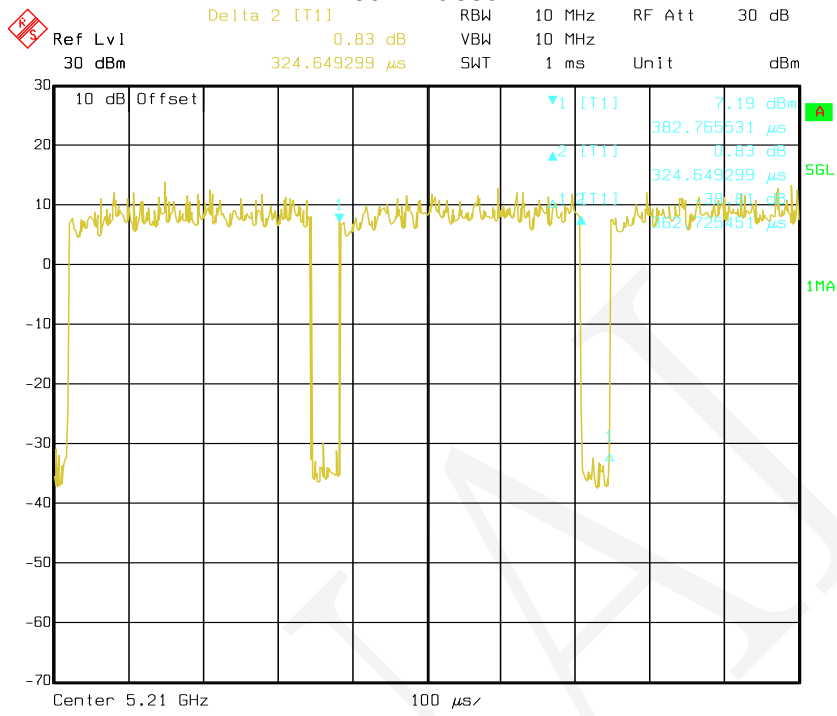

Date: 14.NOV.2019 16:26:28

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
XIAOMI	Adapter Input: 100-240VAC, 50/60Hz,0.5A Output:5V,2A/9V,1.2A/ 12V,1A	MD3-03-EB	14102116834
Huawei	Earphone	Unknown	Unknown
SS	Earphone	Unknown	Unknown

External I/O Cable

Cable Description	Length (m)	From	To
Unshielded Power Cable	1.8	Adapter	EUT
Unshielded Earphone Cable*2	1.5	EUT	Earphone

Block Diagram of Test Setup

Conducted Emissions

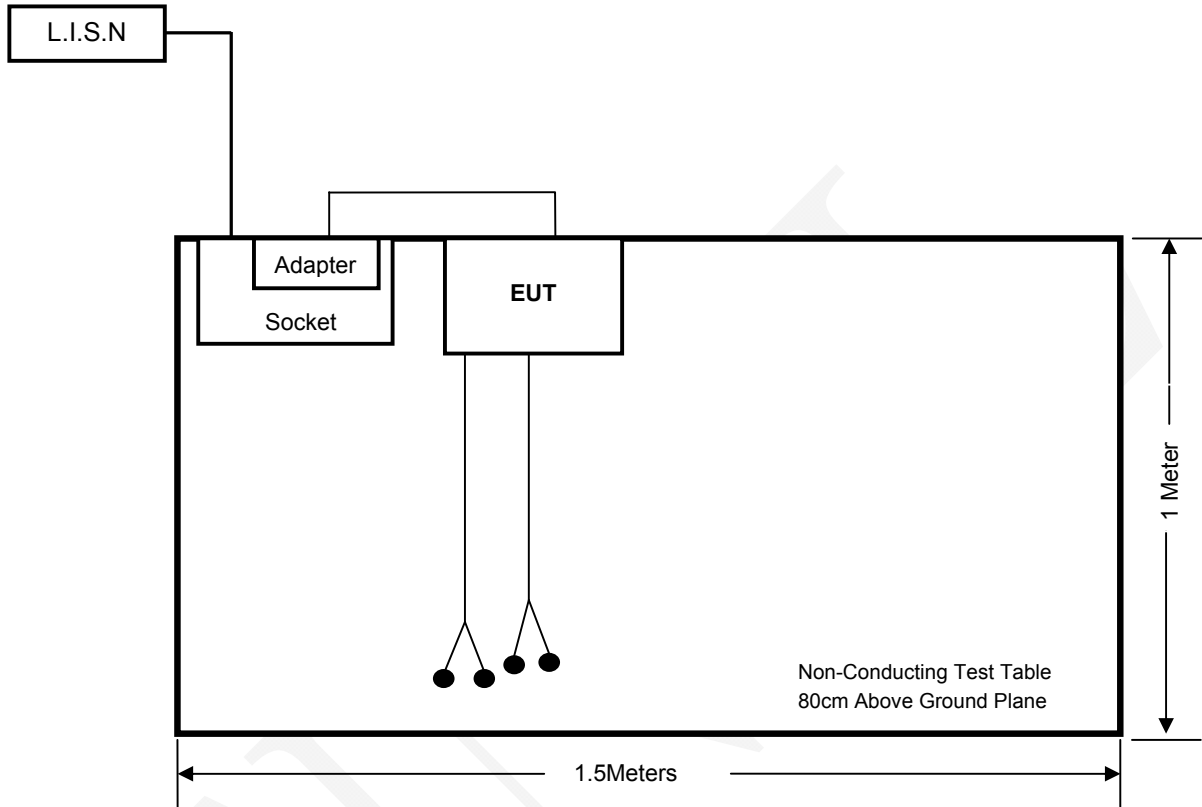

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.407(f) & §1.1310 & §2.1093	RF Exposure	Compliance
§15.203	Antenna Requirement	Compliance
§15.407(b)(6) & §15.207(a)	Conducted Emissions	Compliance
§15.205 & §15.209 §15.407(b) (1), (4)(i), (6), (7)	Undesirable Emission & Restricted Bands	Compliance
§15.407(a) (1),(3) & (e)	26dB & 6dB Bandwidth	Compliance
§15.407(a)(1),(3)	Conducted Transmitter Output Power	Compliance
§15.407 (a)(1),(3),(5)	Power Spectral Density	Compliance

Note: Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

TEST EQUIPMENTS LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Conducted Emission					
Rohde & Schwarz	EMI Test Receiver	ESCI	100028	2019-04-15	2020-04-14
ROHDE&SCHWARZ	L.I.S.N.	ENV216	3560.6550.16	2019-02-25	2020-02-24
HP	RF Limiter	11947A	3107A01270	2019-10-18	2020-10-17
Unknown	Conducted Cable	L-E003	000003	2019-08-05	2020-08-04
Rohde & Schwarz	EMC32	EMC32	V 8.52.0	NCR	NCR
Radiated Emission					
EMCT	Semi-Anechoic Chamber	966	001	2017-05-18	2020-05-17
SONOMA INSTRUMENT	Amplifier	310 N	186684	2019-09-06	2020-09-05
SUNOL SCIENCES	Broadband Antenna	JB3	A121808	2017-05-19	2020-05-18
INMET	Attenuator	18N-6dB	N/A	2019-10-17	2020-10-16
Rohde & Schwarz	EMI Test Receiver	ESR3	102456	2019-04-15	2020-04-14
Rohde & Schwarz	Spectrum Analyzer	FSU26	200835	2019-04-15	2020-04-14
EMCO	Horn Antenna	3115	2192	2019-09-25	2021-09-24
A.H. Systems, Inc	Amplifier	PAM-0118P	467	2019-08-30	2020-08-29
EM Electronics	RF Pre-Amplifier	EM18G40	060725	2019-07-24	2020-07-23
Rohde & Schwarz	EMI Test Receiver	ESIB 40	100215	2019-04-15	2020-04-14
A.H. Systems, Inc	Horn Antenna	SAS-574	510	2019-09-02	2021-09-01
Sinoscite.,Co Ltd	Reject Band Filter	BSF 5150-5850MN	0899V2	2019-11-10	2020-11-09
MICRO-TRONICS	High Pass Filter	HPM50111	G216	2019-11-10	2020-11-09
Unknown	RF Cable (Below 1GHz)	L-E005	000005	2019-09-06	2020-09-05
Unknown	RF Cable (Below 1GHz)	T-E128	000128	2019-10-17	2020-10-16
MICRO-COAX	Flexible microwave cable	T-E237	233522-001	2019-07-19	2020-07-18
Unknown	RF Cable (Above 1GHz)	T-E069	000069	2019-07-24	2020-07-23
Micro-coax	RF Cable (Above 1GHz)	T-E209	MFR 64639 2310	2019-07-19	2020-07-18
Rohde & Schwarz	EMC32	EMC32	V9.10.00	NCR	NCR

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
RF Conducted Test					
Rohde & Schwarz	Spectrum Analyzer	FSEM30	100018	2019-04-15	2020-04-14
WEINSCHL ENGINEERING	Attenuator	1A 10dB	AB1165	2019-08-05	2020-08-04
E-Microwave	DC Block	EMDCB-00036	OE01304225	2019-08-05	2020-08-04
Agilent	USB Wideband Power Sensor	U2021XA	MY53320008	2019-01-17	2020-01-16
Unknown	RF Cable	Unknown	000007	Each Time	Each Time

FCC §15.407 (f) & §1.1310 & §2.1093- RF EXPOSURE

Applicable Standard

According to §15.407(f) and §1.1310 & §2.1093, systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

According to KDB447498 D01 General RF Exposure Guidance v06:

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where

- $f(\text{GHz})$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison
- 3.0 and 7.5 are referred to as the numeric thresholds in the step 2 below

The test exclusions are applicable only when the minimum test separation distance is ≤ 50 mm and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is < 5 mm, a distance of 5 mm according to 5) in section 4.1 is applied to determine SAR test exclusion.

Measurement Result

For 5.2 G Wi-Fi mode

The max conducted power including tune-up tolerance is 6.5 dBm (4.47mW).

$[(\text{max. power of channel, mW})/(\text{min. test separation distance, mm})][\sqrt{f(\text{GHz})}]$
 $= 4.47/5 \cdot (\sqrt{5.24}) = 2.0 < 3.0$

For 5.8 G Wi-Fi mode

The max conducted power including tune-up tolerance is 4.8 dBm (3.02mW).

$[(\text{max. power of channel, mW})/(\text{min. test separation distance, mm})][\sqrt{f(\text{GHz})}]$
 $= 3.02/5 \cdot (\sqrt{5.825}) = 1.5 < 3.0$

So the stand-alone SAR evaluation is not necessary.

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

The EUT has one WIFI antenna, one WIFI/Bluetooth antenna, four 4G antennas and one NFC antenna, which are permanently attached and fulfill the requirement of this section. Please refer to the table below and EUT photos.

Antenna	Manufacturer	Antenna Model Number	Max. Antenna Gain	Antenna Type
2.4G/5G WIFI; Bluetooth Antenna (Chain 0)	Dongguan Yijia Electronics communication Technology Co.,Ltd	YJS01.042.002.305C	2.4G:1.1dBi 5G: 4.6dBi	FPC Antenna
2.4G/5G WIFI Antenna (Chain 1)		YJS01.042.002.306C	2.4G: 0.7dBi 5G: 2.7dBi	
4G Antenna (Diversity)	Dongguan Yijia Electronics communication Technology Co.,Ltd	YJS01.042.002.301C	1.9dBi	FPC Antenna
4G Antenna (Main)		YJS01.042.002.302C	2.1dBi	
4G Antenna (Diversity)		YJS01.042.002.303C	1.9dBi	
4G Antenna (Diversity)		YJS01.042.002.304C	1.9dBi	
NFC Antenna	SHENZHEN SUNSHINE GOOD ELECTRONICS CO.,LTD	P134FQ2137A0	0dBi	FPC Antenna


Result: Compliance.

FCC §15.407 (b) (6) §15.207 (a) – CONDUCTED EMISSIONS

Applicable Standard

FCC §15.207, §15.407(b) (6)

EUT Setup

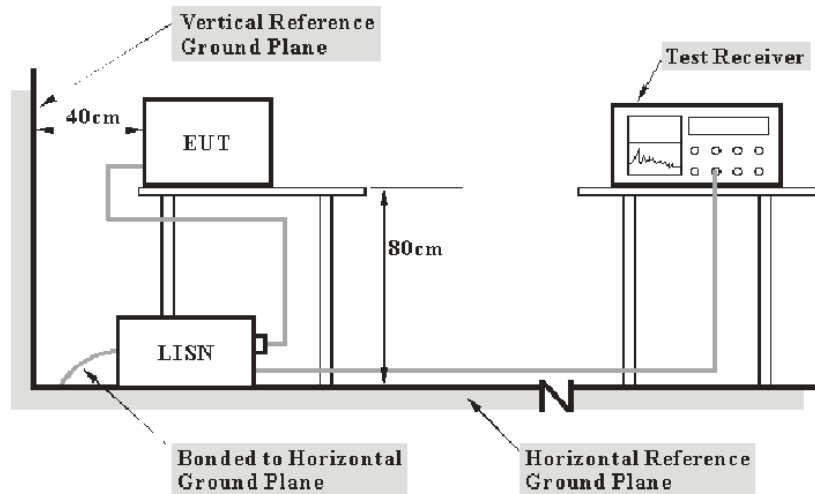

- Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Corrected Amplitude & Margin Calculation

The basic equation is as follows:

$$V_C = V_R + A_C + VDF$$

$$C_f = A_C + VDF$$

Herein,

V_C (cord. Reading): corrected voltage amplitude

V_R : reading voltage amplitude

A_C : attenuation caused by cable loss

VDF: voltage division factor of AMN

C_f : Correction Factor

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Procedure

During the conducted emission test, the adapter was connected to the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207.

Test Data

Environmental Conditions


Temperature:	18 °C
Relative Humidity:	63 %
ATM Pressure:	94.8 kPa

The testing was performed by Eric Xiao on 2019-11-24.

Test Mode: Transmitting

5150-5250MHz band: 802.11n20-high channel - worst case


AC120V/60Hz, Line

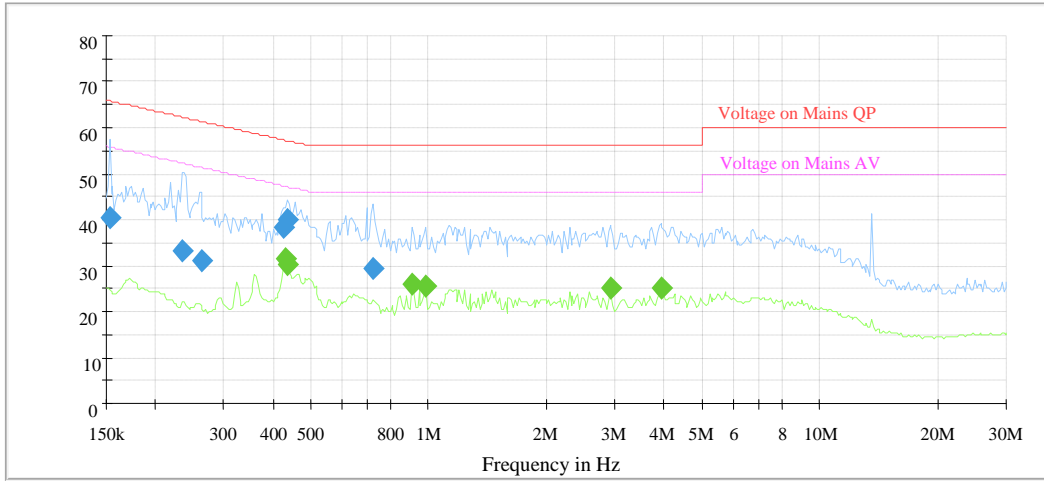

Frequency (MHz)	QuasiPeak (dB μV)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μV)
0.153015	40.3	200.0	9.000	L1	19.6	25.5	65.8
0.234722	33.2	200.0	9.000	L1	19.6	29.1	62.3
0.261872	31.2	200.0	9.000	L1	19.6	30.2	61.4
0.426418	38.4	200.0	9.000	L1	19.6	18.9	57.3
0.434989	39.8	200.0	9.000	L1	19.6	17.4	57.2
0.722551	29.2	200.0	9.000	L1	19.6	26.8	56.0

Frequency (MHz)	Average (dB μV)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μV)
0.430682	31.7	200.0	9.000	L1	19.6	15.5	47.2
0.434989	30.2	200.0	9.000	L1	19.6	17.0	47.2
0.908365	25.9	200.0	9.000	L1	19.6	20.1	46.0
0.983629	25.3	200.0	9.000	L1	19.6	20.7	46.0
2.909785	25.0	200.0	9.000	L1	19.6	21.0	46.0
3.921951	25.0	200.0	9.000	L1	19.6	21.0	46.0

AC120V/60Hz, Neutral

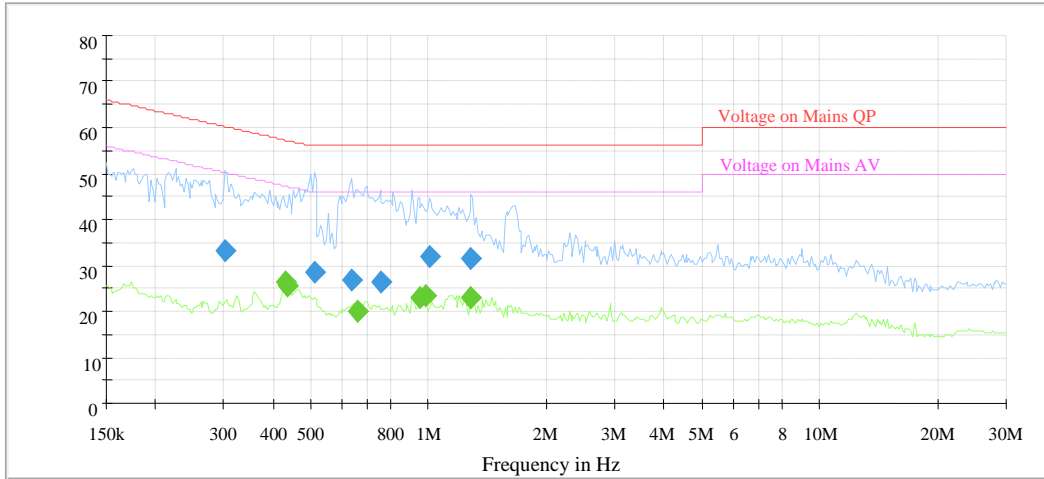

Frequency (MHz)	QuasiPeak (dB μV)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μV)
0.301015	33.3	200.0	9.000	N	19.6	26.9	60.2
0.510059	28.6	200.0	9.000	N	19.6	27.4	56.0
0.634879	26.7	200.0	9.000	N	19.6	29.3	56.0
0.751890	26.5	200.0	9.000	N	19.7	29.5	56.0
1.003400	31.9	200.0	9.000	N	19.7	24.1	56.0
1.286792	31.5	200.0	9.000	N	19.7	24.5	56.0

Frequency (MHz)	Average (dB μV)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μV)
0.430682	26.4	200.0	9.000	N	19.6	20.8	47.2
0.434989	25.4	200.0	9.000	N	19.6	21.8	47.2
0.660657	20.2	200.0	9.000	N	19.6	25.8	46.0
0.945248	23.0	200.0	9.000	N	19.6	23.0	46.0
0.983629	23.6	200.0	9.000	N	19.6	22.4	46.0
1.274051	23.1	200.0	9.000	N	19.7	22.9	46.0

Note:

- 1) Corrected Amplitude = Reading + Correction Factor
- 2) Correction Factor = LISN VDF (Voltage Division Factor) + Cable Loss + Transient Limiter
- 3) Margin = Limit – Corrected Amplitude

FCC §15.209, §15.205 & §15.407(b) (1) (4)(i) (6) (7) – UNDESIRABLE EMISSION, RESTRICTED BANDS

Applicable Standard

FCC §15.407 (b) (1) (4)(i), (6), (7); §15.209; §15.205

FCC 15.407 (b)

Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85 GHz band:
 - (i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.
 - (ii) Devices certified before March 2, 2017 with antenna gain greater than 10 dBi may demonstrate compliance with the emission limits in §15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease by March 2, 2018. Devices certified before March 2, 2018 with antenna gain of 10 dBi or less may demonstrate compliance with the emission limits in §15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease before March 2, 2020.
- (5) The emission measurements shall be performed using a minimum resolution bandwidth of 1 MHz. A lower resolution bandwidth may be employed near the band edge, when necessary, provided the measured energy is integrated to show the total power over 1 MHz.
- (6) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in §15.207.
- (7) The provisions of §15.205 apply to intentional radiators operating under this section.
- (8) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the upper and lower frequency band edges as the design of the equipment permits.


According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, emission shall be computed as:

$$E[\text{dBuV/m}] = \text{EIRP}[\text{dBm}] + 95.2, \text{ for } d = 3 \text{ meters.}$$


- 1) For 75 MHz above or below the band edge, a level of -27 dBm/MHz (68.2dB μ V/m) was applied.
- 2) For 25MHz-75 MHz above or below the band edge, a level of 10 dBm/MHz (105.2dB μ V/m) was applied.
- 3) For 5MHz-25 MHz above or below the band edge, a level of 15.6 dBm/MHz (110.8dB μ V/m) was applied.
- 4) For 0 MHz-5 MHz above or below the band edge, a level of 27 dBm/MHz (122.2dB μ V/m) was applied.

EUT Setup

Below 1 GHz:

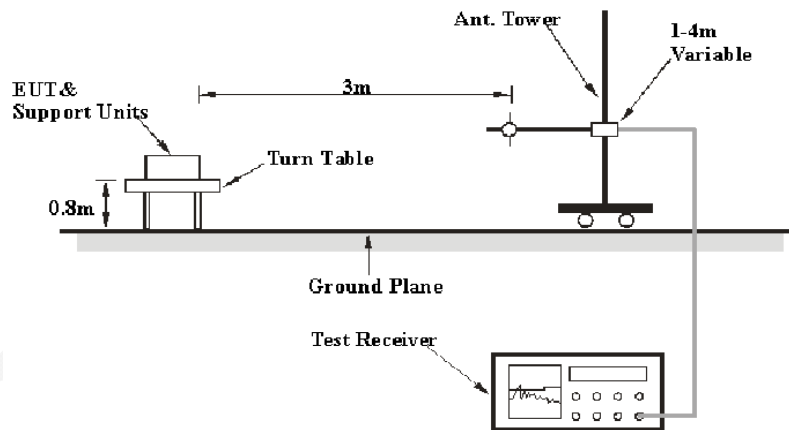

Above 1 GHz:

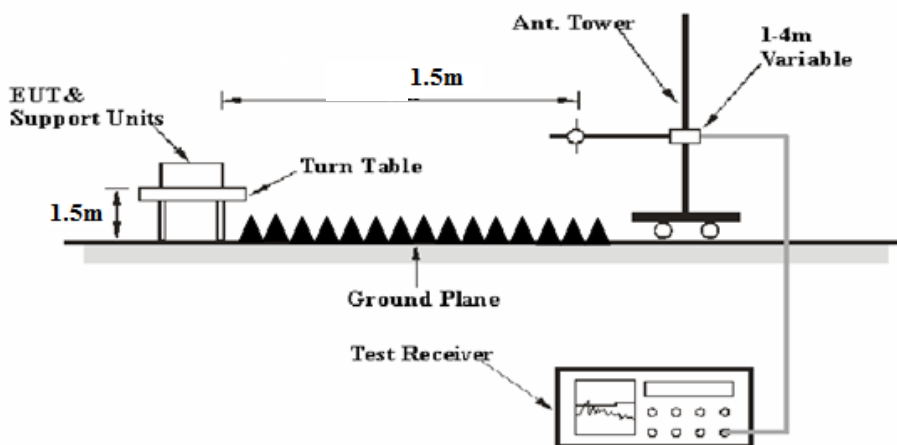

The radiated emission tests were performed in the 3 meters semi-anechoic chamber, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209 and FCC 15.407 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 40 GHz.

During the radiated emission test, the EMI test receiver Setup was set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30 MHz – 1000 MHz	120 kHz	300 kHz	120 kHz	QP

Frequency Range	RBW	Video B/W	Duty Cycle	Measurement
Above 1 GHz	1MHz	3 MHz	Any	PK
	1MHz	10Hz	>98%	AV
	1MHz	1/T	<98%	AV

Note: T is Transmission Duration

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1GHz, peak and Average detection modes for frequencies above 1 GHz.

According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, emission shall be computed as: $E [dB\mu V/m] = EIRP[dBm] + 95.2$, for $d = 3$ meters.

According to C63.10, the above 1G test result shall be extrapolated to the specified distance using an extrapolation factor of 20dB/decade from 3m to 1.5m

Distance extrapolation factor = $20 \log(\text{specific distance [3m]}/\text{test distance [1.5m]})$ dB

Extrapolation result = Corrected Amplitude (dB μ V/m) - distance extrapolation factor (6dB)

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Receiver Reading} + \text{Cable loss} + \text{Antenna Factor} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart C, Section 15.205 and 15.209, Subpart E, Section 15.407.

Test Data

Environmental Conditions


Temperature:	21 °C
Relative Humidity:	65 %
ATM Pressure:	95.3 kPa

The testing was performed by Eric Xiao on 2019-11-24.

Test mode: Transmitting

1) 30 MHz to 1 GHz:

5150-5250MHz band: 802.11n20-high channel - worst case

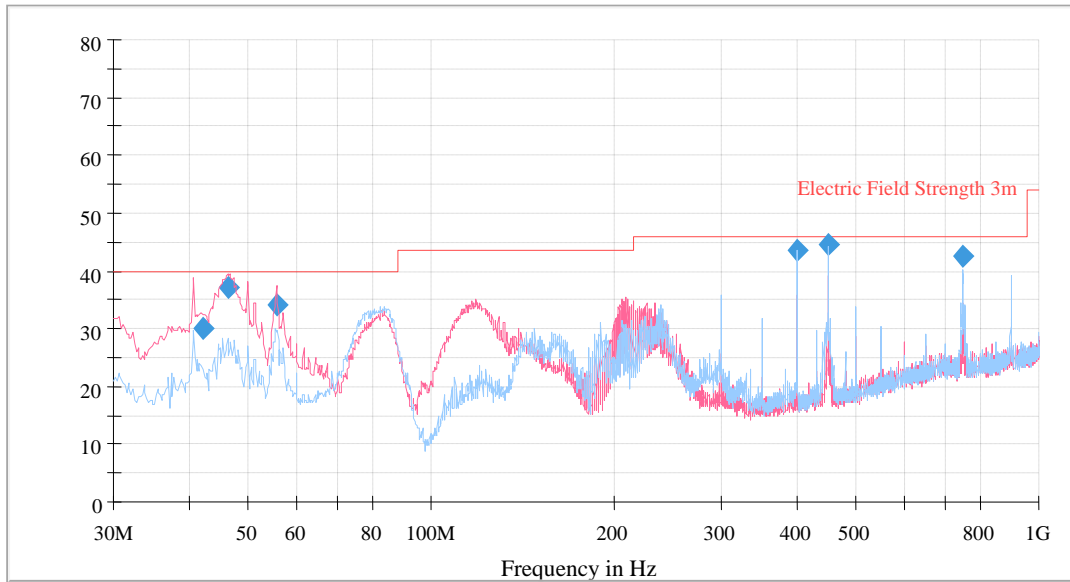

Frequency (MHz)	QuasiPeak (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
42.021200	30.06	40.00	9.94	200.0	120.000	102.0	V	65.0	-12.3
46.468900	37.05	40.00	2.95	200.0	120.000	107.0	V	6.0	-15.0
55.734000	34.15	40.00	5.85	200.0	120.000	116.0	V	42.0	-17.4
400.027300	43.71	46.00	2.29	200.0	120.000	102.0	H	63.0	-8.7
450.012700	44.58	46.00	1.42	200.0	120.000	103.0	H	286.0	-8.2
750.073500	42.68	46.00	3.32	200.0	120.000	114.0	H	121.0	-3.3

2) 1GHz-40GHz

(Note: Above 1GHz was performed at distance 1.5m)

For 5150-5250 MHz:

For 802.11a mode (SISO)

Chain 0

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBµV/m)	Extrapolation Result (dBµV/m)	Limit (dBµV/m)	Margin (dB)
	Reading (dBµV)	Measurement (PK /AV)	Polar (H/V)	Factor (dB/m)						
Frequency: 5180 MHz										
5180	69.21	PK	H	33.75	5.29	0.00	108.25	102.25	N/A	N/A
5180	56.85	AV	H	33.75	5.29	0.00	95.89	89.89	N/A	N/A
5150	29.36	PK	H	33.71	5.27	0.00	68.34	62.34	74.00	11.66
5150	17.88	AV	H	33.71	5.27	0.00	56.86	50.86	54.00	3.14
2700	56.98	PK	H	29.48	3.76	42.14	48.08	42.08	74.00	31.92
2700	43.69	AV	H	29.48	3.76	42.14	34.79	28.79	54.00	25.21
2850	56.18	PK	H	29.84	3.87	42.17	47.72	41.72	74.00	32.28
2850	43.35	AV	H	29.84	3.87	42.17	34.89	28.89	54.00	25.11
10360	40.35	PK	H	38.31	7.66	43.97	42.35	36.35	68.20	31.85
Frequency: 5200 MHz										
5200	69.65	PK	H	33.78	5.31	0.00	108.74	102.74	N/A	N/A
5200	57.32	AV	H	33.78	5.31	0.00	96.41	90.41	N/A	N/A
2700	56.90	PK	H	29.48	3.76	42.14	48.00	42.00	74.00	32.00
2700	44.24	AV	H	29.48	3.76	42.14	35.34	29.34	54.00	24.66
2850	55.43	PK	H	29.84	3.87	42.17	46.97	40.97	74.00	33.03
2850	43.00	AV	H	29.84	3.87	42.17	34.54	28.54	54.00	25.46
10400	40.36	PK	H	38.28	7.68	43.98	42.34	36.34	68.20	31.86
Frequency: 5240 MHz										
5240	68.98	PK	H	33.84	5.34	0.00	108.16	102.16	N/A	N/A
5240	57.13	AV	H	33.84	5.34	0.00	96.31	90.31	N/A	N/A
5350	27.08	PK	H	33.99	5.42	0.00	66.49	60.49	74.00	13.51
5350	29.53	AV	H	33.99	5.42	0.00	68.94	62.94	74.00	11.06
2700	56.11	PK	H	29.48	3.76	42.14	47.21	41.21	74.00	32.79
2700	43.84	AV	H	29.48	3.76	42.14	34.94	28.94	54.00	25.06
2850	55.82	PK	H	29.84	3.87	42.17	47.36	41.36	74.00	32.64
2850	43.61	AV	H	29.84	3.87	42.17	35.15	29.15	54.00	24.85
10480	39.86	PK	H	38.22	7.70	44.00	41.78	35.78	68.20	32.42

Chain 1

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBµV/m)	Extrapolation Result (dBµV/m)	Limit (dBµV/m)	Margin (dB)
	Reading (dBµV)	Measurement (PK /AV)	Polar (H/V)	Factor (dB/m)						
Frequency: 5180 MHz										
5180	68.43	PK	H	33.75	5.29	0.00	107.47	101.47	N/A	N/A
5180	56.25	AV	H	33.75	5.29	0.00	95.29	89.29	N/A	N/A
5150	28.69	PK	H	33.71	5.27	0.00	67.67	61.67	74.00	12.33
5150	17.66	AV	H	33.71	5.27	0.00	56.64	50.64	54.00	3.36
2700	57.00	PK	V	29.48	3.76	42.14	48.10	42.10	74.00	31.90
2700	44.36	AV	V	29.48	3.76	42.14	35.46	29.46	54.00	24.54
2850	56.00	PK	V	29.84	3.87	42.17	47.54	41.54	74.00	32.46
2850	43.53	AV	V	29.84	3.87	42.17	35.07	29.07	54.00	24.93
10360	40.46	PK	V	38.31	7.66	43.97	42.46	36.46	68.20	31.74
Frequency: 5200 MHz										
5200	70.35	PK	H	33.78	5.31	0.00	109.44	103.44	N/A	N/A
5200	57.32	AV	H	33.78	5.31	0.00	96.41	90.41	N/A	N/A
2700	56.28	PK	V	29.48	3.76	42.14	47.38	41.38	74.00	32.62
2700	44.09	AV	V	29.48	3.76	42.14	35.19	29.19	54.00	24.81
2850	55.64	PK	V	29.84	3.87	42.17	47.18	41.18	74.00	32.82
2850	42.91	AV	V	29.84	3.87	42.17	34.45	28.45	54.00	25.55
10400	40.05	PK	V	38.28	7.68	43.98	42.03	36.03	68.20	32.17
Frequency: 5240 MHz										
5240	69.04	PK	H	33.84	5.34	0.00	108.22	102.22	N/A	N/A
5240	57.63	AV	H	33.84	5.34	0.00	96.81	90.81	N/A	N/A
5350	27.51	PK	H	33.99	5.42	0.00	66.92	60.92	74.00	13.08
5350	14.52	AV	H	33.99	5.42	0.00	53.93	47.93	54.00	6.07
2700	56.72	PK	V	29.48	3.76	42.14	47.82	41.82	74.00	32.18
2700	43.81	AV	V	29.48	3.76	42.14	34.91	28.91	54.00	25.09
2850	56.25	PK	V	29.84	3.87	42.17	47.79	41.79	74.00	32.21
2850	43.62	AV	V	29.84	3.87	42.17	35.16	29.16	54.00	24.84
10480	40.47	PK	V	38.22	7.70	44.00	42.39	36.39	68.20	31.81

For 802.11n-HT20 mode (MIMO)

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBµV/m)	Extrapolation Result (dBµV/m)	Limit (dBµV/m)	Margin (dB)
	Reading (dBµV)	Measurement (PK /AV)	Polar (H/V)	Factor (dB/m)						
Frequency: 5180 MHz										
5180	72.35	PK	H	33.75	5.29	0.00	111.39	105.39	N/A	N/A
5180	64.86	AV	H	33.75	5.29	0.00	103.90	97.90	N/A	N/A
5150	29.53	PK	H	33.71	5.27	0.00	68.51	62.51	74.00	11.49
5150	18.19	AV	H	33.71	5.27	0.00	57.17	51.17	54.00	2.83
2700	56.49	PK	H	29.48	3.76	42.14	47.59	41.59	74.00	32.41
2700	44.26	AV	H	29.48	3.76	42.14	35.36	29.36	54.00	24.64
2850	55.55	PK	H	29.84	3.87	42.17	47.09	41.09	74.00	32.91
2850	43.52	AV	H	29.84	3.87	42.17	35.06	29.06	54.00	24.94
10360	40.28	PK	H	38.31	7.66	43.97	42.28	36.28	68.20	31.92
Frequency: 5200 MHz										
5200	73.15	PK	H	33.78	5.31	0.00	112.24	106.24	N/A	N/A
5200	65.06	AV	H	33.78	5.31	0.00	104.15	98.15	N/A	N/A
2700	57.82	PK	H	29.48	3.76	42.14	48.92	42.92	74.00	31.08
2700	43.72	AV	H	29.48	3.76	42.14	34.82	28.82	54.00	25.18
2850	56.00	PK	H	29.84	3.87	42.17	47.54	41.54	74.00	32.46
2850	42.63	AV	H	29.84	3.87	42.17	34.17	28.17	54.00	25.83
10400	40.4	PK	H	38.28	7.68	43.98	42.38	36.38	68.20	31.82
Frequency: 5240 MHz										
5240	71.33	PK	H	33.84	5.34	0.00	110.51	104.51	N/A	N/A
5240	64.05	AV	H	33.84	5.34	0.00	103.23	97.23	N/A	N/A
5350	27.55	PK	H	33.99	5.42	0.00	66.96	60.96	74.00	13.04
5350	16.27	AV	H	33.99	5.42	0.00	55.68	49.68	54.00	4.32
2700	57.63	PK	H	29.48	3.76	42.14	48.73	42.73	74.00	31.27
2700	44.46	AV	H	29.48	3.76	42.14	35.56	29.56	54.00	24.44
2850	55.41	PK	H	29.84	3.87	42.17	46.95	40.95	74.00	33.05
2850	42.63	AV	H	29.84	3.87	42.17	34.17	28.17	54.00	25.83
10480	39.89	PK	H	38.22	7.70	44.00	41.81	35.81	68.20	32.39

For 802.11n-HT40 mode (MIMO)

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBµV/m)	Extrapolation Result (dBµV/m)	Limit (dBµV/m)	Margin (dB)
	Reading (dBµV)	Measurement (PK /AV)	Polar (H/V)	Factor (dB/m)						
Frequency: 5190 MHz										
5190	68.85	PK	H	33.77	5.30	0.00	107.92	101.92	N/A	N/A
5190	59.79	AV	H	33.77	5.30	0.00	98.86	92.86	N/A	N/A
5150	30.76	PK	H	33.71	5.27	0.00	69.74	63.74	74.00	10.26
5150	18.52	AV	H	33.71	5.27	0.00	57.50	51.50	54.00	2.50
2700	55.29	PK	V	29.48	3.76	42.14	46.39	40.39	74.00	33.61
2700	43.73	AV	V	29.48	3.76	42.14	34.83	28.83	54.00	25.17
2850	55.73	PK	V	29.84	3.87	42.17	47.27	41.27	74.00	32.73
2850	42.71	AV	V	29.84	3.87	42.17	34.25	28.25	54.00	25.75
10380	44.39	PK	V	38.30	7.67	43.98	46.38	40.38	68.20	27.82
Frequency: 5230 MHz										
5230	75.11	PK	H	33.82	5.33	0.00	114.26	108.26	N/A	N/A
5230	67.51	AV	H	33.82	5.33	0.00	106.66	100.66	N/A	N/A
5350	27.59	PK	H	33.99	5.42	0.00	67.00	61.00	74.00	13.00
5350	16.06	AV	H	33.99	5.42	0.00	55.47	49.47	54.00	4.53
2700	56.13	PK	V	29.48	3.76	42.14	47.23	41.23	74.00	32.77
2700	44.49	AV	V	29.48	3.76	42.14	35.59	29.59	54.00	24.41
2850	55.46	PK	V	29.84	3.87	42.17	47.00	41.00	74.00	33.00
2850	42.72	AV	V	29.84	3.87	42.17	34.26	28.26	54.00	25.74
10460	39.53	PK	V	38.23	7.70	43.99	41.47	35.47	68.20	32.73

For 802.11ac80 mode

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBµV/m)	Extrapolation Result (dBµV/m)	Limit (dBµV/m)	Margin (dB)
	Reading (dBµV)	Measurement (PK /AV)	Polar (H/V)	Factor (dB/m)						
Frequency: 5210 MHz										
5210	66.57	PK	H	33.79	5.32	0.00	105.68	99.68	N/A	N/A
5210	58.3	AV	H	33.79	5.32	0.00	97.41	91.41	N/A	N/A
5150	29.61	PK	H	33.71	5.27	0.00	68.59	62.59	74.00	11.41
5150	18.19	AV	H	33.71	5.27	0.00	57.17	51.17	54.00	2.83
5350	27.28	PK	H	33.99	5.42	0.00	66.69	60.69	74.00	13.31
5350	15.96	AV	H	33.99	5.42	0.00	55.37	49.37	54.00	4.63
2700	56.78	PK	H	29.48	3.76	42.14	47.88	41.88	74.00	32.12
2700	43.86	AV	H	29.48	3.76	42.14	34.96	28.96	54.00	25.04
2850	55.89	PK	H	29.84	3.87	42.17	47.43	41.43	74.00	32.57
2850	43.59	AV	H	29.84	3.87	42.17	35.13	29.13	54.00	24.87
10420	39.83	PK	H	38.26	7.68	43.98	41.79	35.79	68.20	32.41

Note:


Corrected Amplitude = Corrected Factor + Reading

Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor


Margin = Limit- Corr. Amplitude

Please refer to the below pre-scan plot of worst case:


802.11n40 Mode: Low Channel_Horizontal_1GHz-5GHz

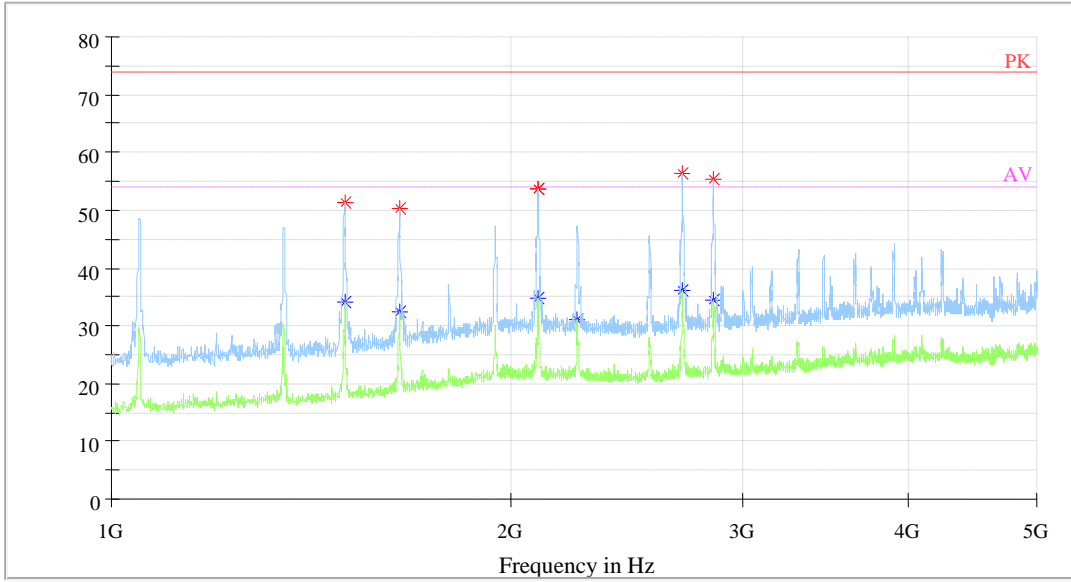


802.11n40 Mode: Low Channel_Vertical_1GHz-5GHz

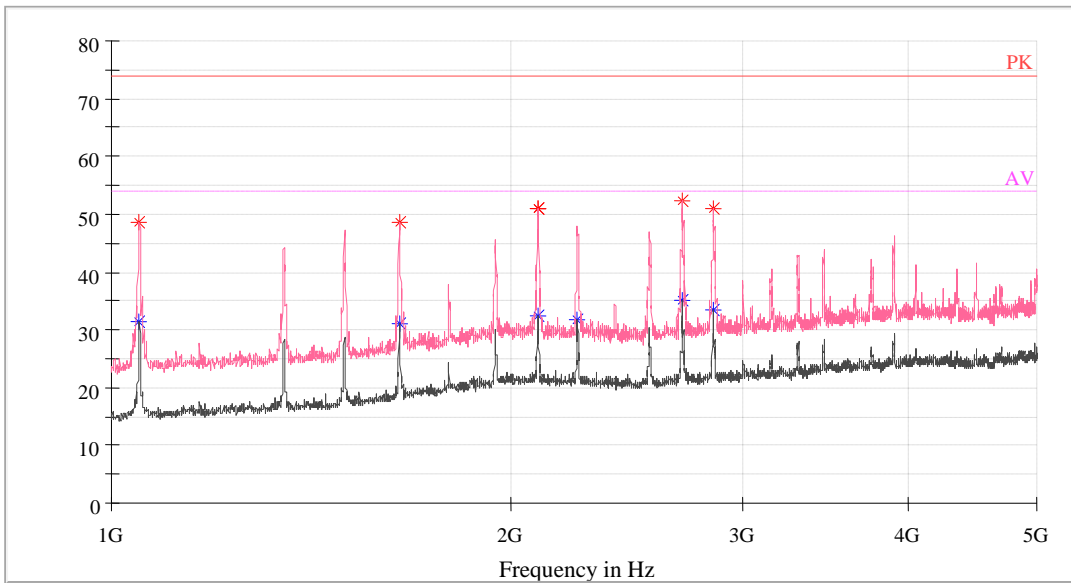


802.11n40 Mode: Low Channel _Horizontal_5GHz-18GHz

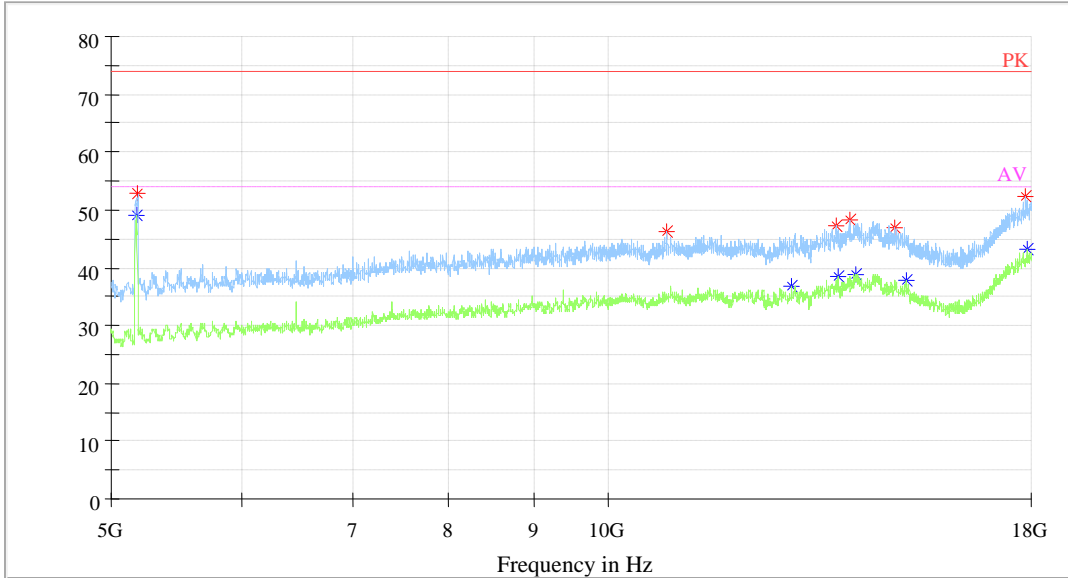


802.11n40 Mode: Low Channel _Vertical_5GHz-18GHz

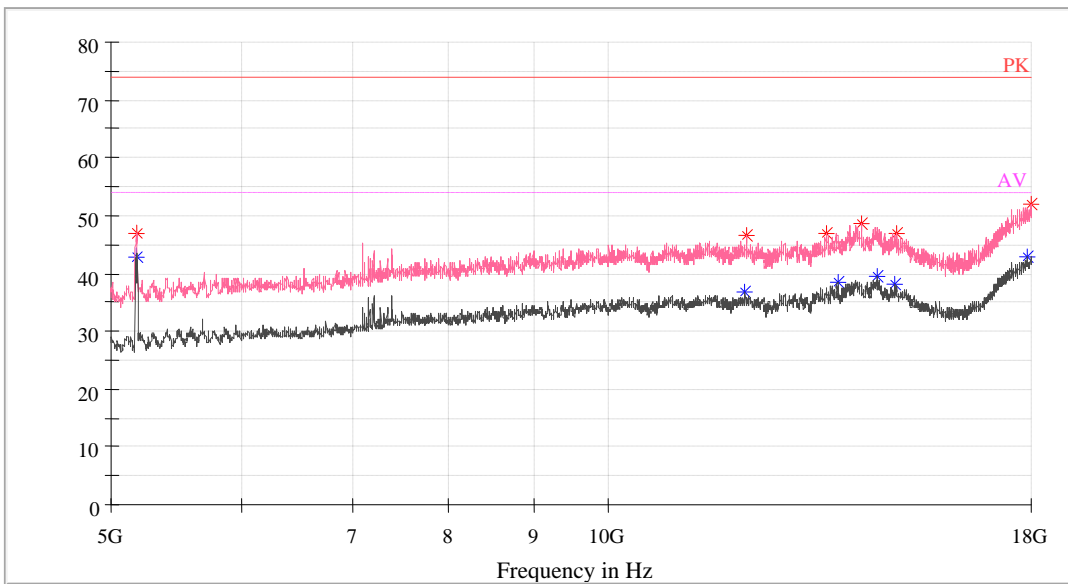


802.11n40 Mode: Low Channel _Horizontal_18GHz-26.5GHz

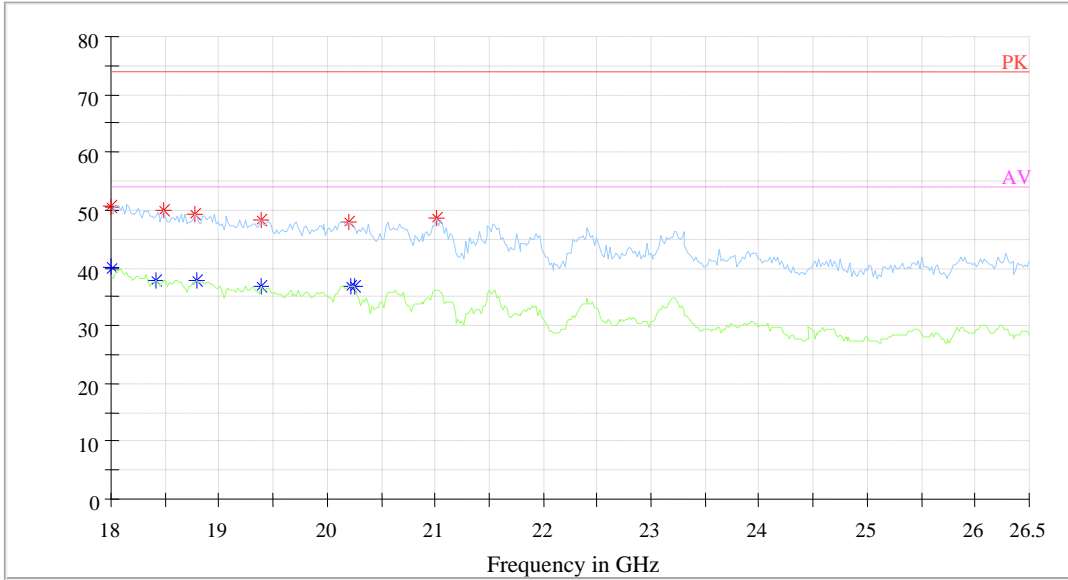


802.11n40 Mode: Low Channel _Vertical_18GHz-26.5GHz

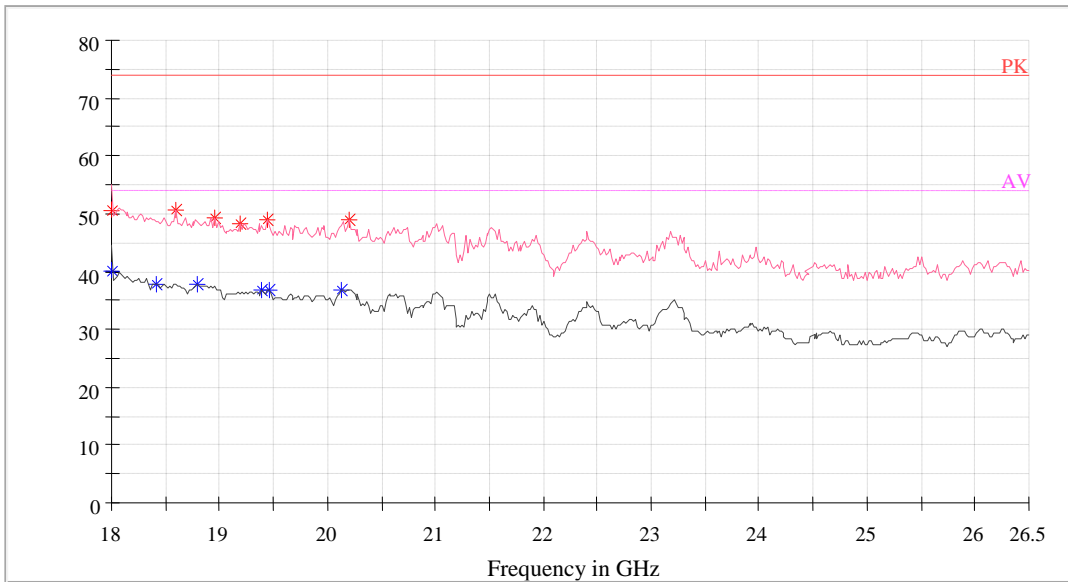

802.11n40 Mode: Low Channel _Horizontal_26.5GHz-40GHz

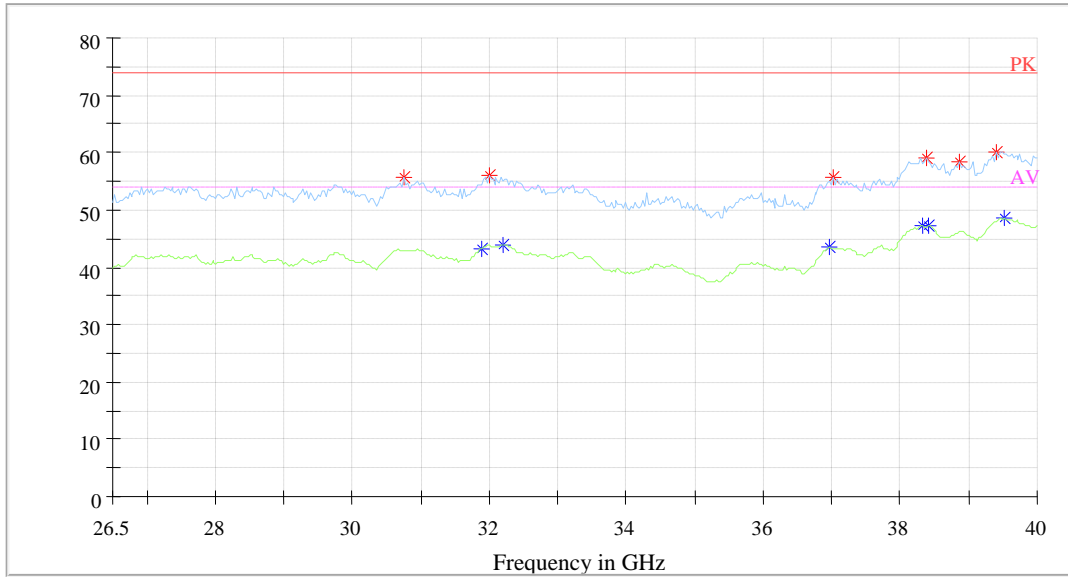

802.11n40 Mode: Low Channel _Vertical_26.5GHz-40GHz

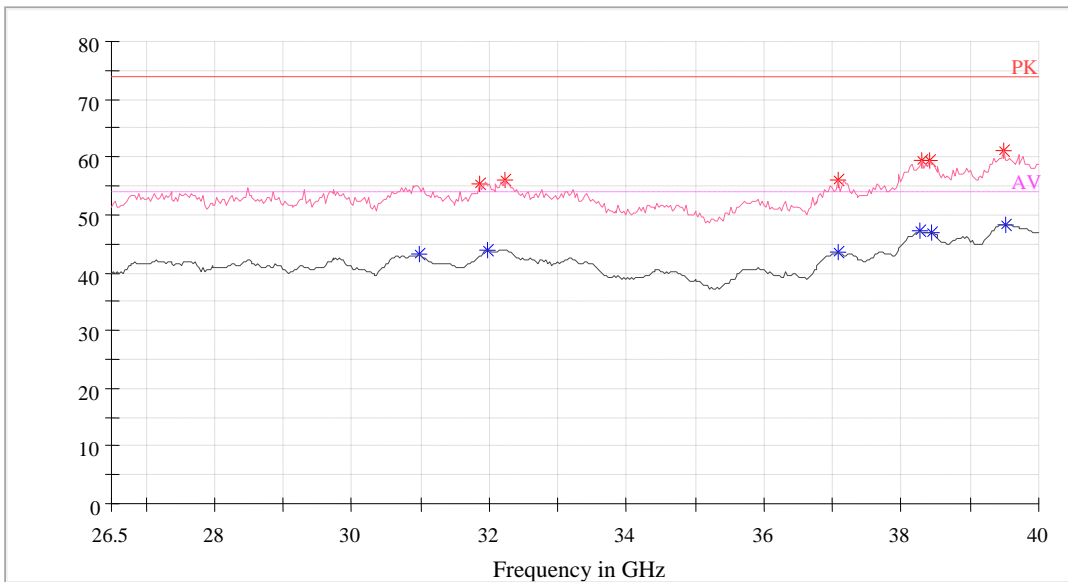

For 5725-5850 MHz

For 802.11a mode (SISO)

Chain 0

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBµV/m)	Extrapolation Result (dBµV/m)	Limit (dBµV/m)	Margin (dB)
	Reading (dBµV)	Measurement (PK /AV)	Polar (H/V)	Factor (dB/m)						
Frequency: 5745 MHz										
5745	66.48	PK	H	34.75	4.81	0.00	106.04	100.04	N/A	N/A
5745	57.68	AV	H	34.75	4.81	0.00	97.24	91.24	N/A	N/A
5650	25.45	PK	H	34.73	4.76	0.00	64.94	58.94	68.20	9.26
5700	24.85	PK	H	34.74	4.79	0.00	64.38	58.38	105.20	46.82
5720	25.55	PK	H	34.74	4.80	0.00	65.09	59.09	110.80	51.71
5725	27.75	PK	H	34.75	4.80	0.00	67.30	61.30	122.20	60.90
2700	56.34	PK	V	29.64	3.25	44.13	45.10	39.10	74.00	34.90
2700	42.88	AV	V	29.64	3.25	44.13	31.64	25.64	54.00	28.36
2850	55.28	PK	V	30.12	3.33	44.20	44.53	38.53	74.00	35.47
2850	41.36	AV	V	30.12	3.33	44.20	30.61	24.61	54.00	29.39
11490	38.48	PK	V	38.90	6.89	44.64	39.63	33.63	74.00	40.37
11490	28.56	AV	V	38.90	6.89	44.64	29.71	23.71	54.00	30.29
Frequency: 5785 MHz										
5785	67.36	PK	H	34.76	4.83	0.00	106.95	100.95	N/A	N/A
5785	58.31	AV	H	34.76	4.83	0.00	97.90	91.90	N/A	N/A
5650	27.13	PK	H	34.73	4.76	0.00	66.62	60.62	68.20	7.58
5700	25.81	PK	H	34.74	4.79	0.00	65.34	59.34	105.20	45.86
5720	29.50	PK	H	34.74	4.80	0.00	69.04	63.04	110.80	47.76
5725	29.35	PK	H	34.75	4.80	0.00	68.90	62.90	122.20	59.30
2700	56.73	PK	V	29.64	3.25	44.13	45.49	39.49	74.00	34.51
2700	43.02	AV	V	29.64	3.25	44.13	31.78	25.78	54.00	28.22
2850	55.87	PK	V	30.12	3.33	44.20	45.12	39.12	74.00	34.88
2850	41.81	AV	V	30.12	3.33	44.20	31.06	25.06	54.00	28.94
11570	38.71	PK	V	38.91	6.91	44.46	40.07	34.07	74.00	39.93
11570	29.14	AV	V	38.91	6.91	44.46	30.50	24.50	54.00	29.50
Frequency: 5825 MHz										
5825	67.02	PK	H	34.77	4.85	0.00	106.64	100.64	N/A	N/A
5825	58.24	AV	H	34.77	4.85	0.00	97.86	91.86	N/A	N/A
5850	25.62	PK	H	34.77	4.86	0.00	65.25	59.25	122.20	62.95
5855	25.99	PK	H	34.77	4.86	0.00	65.62	59.62	110.80	51.18
5875	25.65	PK	H	34.78	4.87	0.00	65.30	59.30	105.20	45.90
5925	25.04	PK	H	34.79	4.89	0.00	64.72	58.72	68.20	9.48
2700	56.27	PK	V	29.64	3.25	44.13	45.03	39.03	74.00	34.97
2700	43.26	AV	V	29.64	3.25	44.13	32.02	26.02	54.00	27.98
2850	55.06	PK	V	30.12	3.33	44.20	44.31	38.31	74.00	35.69
2850	42.02	AV	V	30.12	3.33	44.20	31.27	25.27	54.00	28.73
11650	38.59	PK	V	38.93	6.94	44.27	40.19	34.19	74.00	39.81
11650	28.94	AV	V	38.93	6.94	44.27	30.54	24.54	54.00	29.46

Chain 1

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBµV/m)	Extrapolation Result (dBµV/m)	Limit (dBµV/m)	Margin (dB)
	Reading (dBµV)	Measurement (PK /AV)	Polar (H/V)	Factor (dB/m)						
Frequency: 5745 MHz										
5745	66.53	PK	H	34.75	4.81	0.00	106.09	100.09	N/A	N/A
5745	57.73	AV	H	34.75	4.81	0.00	97.29	91.29	N/A	N/A
5650	25.16	PK	H	34.73	4.76	0.00	64.65	58.65	68.20	9.55
5700	25.01	PK	H	34.74	4.79	0.00	64.54	58.54	105.20	46.66
5720	25.75	PK	H	34.74	4.80	0.00	65.29	59.29	110.80	51.51
5725	27.31	PK	H	34.75	4.80	0.00	66.86	60.86	122.20	61.34
2700	56.15	PK	V	29.64	3.25	44.13	44.91	38.91	74.00	35.09
2700	43.88	AV	V	29.64	3.25	44.13	32.64	26.64	54.00	27.36
2850	55.13	PK	V	30.12	3.33	44.20	44.38	38.38	74.00	35.62
2850	41.57	AV	V	30.12	3.33	44.20	30.82	24.82	54.00	29.18
11490	38.75	PK	V	38.90	6.89	44.64	39.90	33.90	74.00	40.10
11490	28.71	AV	V	38.90	6.89	44.64	29.86	23.86	54.00	30.14
Frequency: 5785 MHz										
5785	67.36	PK	H	34.76	4.83	0.00	106.95	100.95	N/A	N/A
5785	58.31	AV	H	34.76	4.83	0.00	97.90	91.90	N/A	N/A
2700	56.23	PK	V	29.64	3.25	44.13	44.99	38.99	74.00	35.01
2700	43.43	AV	V	29.64	3.25	44.13	32.19	26.19	54.00	27.81
2850	54.51	PK	V	30.12	3.33	44.20	43.76	37.76	74.00	36.24
2850	42.18	AV	V	30.12	3.33	44.20	31.43	25.43	54.00	28.57
11570	38.97	PK	V	38.91	6.91	44.46	40.33	34.33	74.00	39.67
11570	28.93	AV	V	38.91	6.91	44.46	30.29	24.29	54.00	29.71
Frequency: 5825 MHz										
5825	67.02	PK	H	34.77	4.85	0.00	106.64	100.64	N/A	N/A
5825	58.24	AV	H	34.77	4.85	0.00	97.86	91.86	N/A	N/A
5850	25.62	PK	H	34.77	4.86	0.00	65.25	59.25	122.20	62.95
5855	25.99	PK	H	34.77	4.86	0.00	65.62	59.62	110.80	51.18
5875	25.65	PK	H	34.78	4.87	0.00	65.30	59.30	105.20	45.90
5925	25.04	PK	H	34.79	4.89	0.00	64.72	58.72	68.20	9.48
2700	56.46	PK	V	29.64	3.25	44.13	45.22	39.22	74.00	34.78
2700	43.29	AV	V	29.64	3.25	44.13	32.05	26.05	54.00	27.95
2850	55.67	PK	V	30.12	3.33	44.20	44.92	38.92	74.00	35.08
2850	42.22	AV	V	30.12	3.33	44.20	31.47	25.47	54.00	28.53
11650	38.88	PK	V	38.93	6.94	44.27	40.48	34.48	74.00	39.52
11650	29.08	AV	V	38.93	6.94	44.27	30.68	24.68	54.00	29.32

For 802.11n-HT20 mode (MIMO)

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBµV/m)	Extrapolation Result (dBµV/m)	Limit (dBµV/m)	Margin (dB)
	Reading (dBµV)	Measurement (PK /AV)	Polar (H/V)	Factor (dB/m)						
Frequency: 5745 MHz										
5745	70.47	PK	H	34.75	4.81	0.00	110.03	104.03	N/A	N/A
5745	62.84	AV	H	34.75	4.81	0.00	102.40	96.40	N/A	N/A
5650	24.49	PK	H	34.73	4.76	0.00	63.98	57.98	68.20	10.22
5700	26.81	PK	H	34.74	4.79	0.00	66.34	60.34	105.20	44.86
5720	27.93	PK	H	34.74	4.80	0.00	67.47	61.47	110.80	49.33
5725	29.05	PK	H	34.75	4.80	0.00	68.60	62.60	122.20	59.60
2700	56.91	PK	V	29.64	3.25	44.13	45.67	39.67	74.00	34.33
2700	43.26	AV	V	29.64	3.25	44.13	32.02	26.02	54.00	27.98
2850	55.85	PK	V	30.12	3.33	44.20	45.10	39.10	74.00	34.90
2850	42.36	AV	V	30.12	3.33	44.20	31.61	25.61	54.00	28.39
11490	39.02	PK	V	38.90	6.89	44.64	40.17	34.17	74.00	39.83
11490	28.72	AV	V	38.90	6.89	44.64	29.87	23.87	54.00	30.13
Frequency: 5785 MHz										
5785	70.32	PK	H	34.76	4.83	0.00	109.91	103.91	N/A	N/A
5785	62.66	AV	H	34.76	4.83	0.00	102.25	96.25	N/A	N/A
2700	56.8	PK	V	29.64	3.25	44.13	45.56	39.56	74.00	34.44
2700	43.04	AV	V	29.64	3.25	44.13	31.80	25.80	54.00	28.20
2850	54.74	PK	V	30.12	3.33	44.20	43.99	37.99	74.00	36.01
2850	42.34	AV	V	30.12	3.33	44.20	31.59	25.59	54.00	28.41
11570	39.37	PK	V	38.91	6.91	44.46	40.73	34.73	74.00	39.27
11570	29.25	AV	V	38.91	6.91	44.46	30.61	24.61	54.00	29.39
Frequency: 5825 MHz										
5825	69.38	PK	H	34.77	4.85	0.00	109.00	103.00	N/A	N/A
5825	61.63	AV	H	34.77	4.85	0.00	101.25	95.25	N/A	N/A
5850	25.36	PK	H	34.77	4.86	0.00	64.99	58.99	122.20	63.21
5855	25.74	PK	H	34.77	4.86	0.00	65.37	59.37	110.80	51.43
5875	25.33	PK	H	34.78	4.87	0.00	64.98	58.98	105.20	46.22
5925	25.21	PK	H	34.79	4.89	0.00	64.89	58.89	68.20	9.31
2700	55.38	PK	V	29.64	3.25	44.13	44.14	38.14	74.00	35.86
2700	43.37	AV	V	29.64	3.25	44.13	32.13	26.13	54.00	27.87
2850	54.23	PK	V	30.12	3.33	44.20	43.48	37.48	74.00	36.52
2850	41.46	AV	V	30.12	3.33	44.20	30.71	24.71	54.00	29.29
11650	38.59	PK	V	38.93	6.94	44.27	40.19	34.19	74.00	39.81
11650	29.4	AV	V	38.93	6.94	44.27	31.00	25.00	54.00	29.00

For 802.11n-HT40 mode (MIMO)

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBµV/m)	Extrapolation Result (dBµV/m)	Limit (dBµV/m)	Margin (dB)
	Reading (dBµV)	Measurement (PK /AV)	Polar (H/V)	Factor (dB/m)						
Frequency: 5755 MHz										
5755	66.92	PK	H	34.75	4.81	0.00	106.48	100.48	N/A	N/A
5755	58.96	AV	H	34.75	4.81	0.00	98.52	92.52	N/A	N/A
5650	26.46	PK	H	34.73	4.76	0.00	65.95	59.95	68.20	8.25
5700	25.61	PK	H	34.74	4.79	0.00	65.14	59.14	105.20	46.06
5720	29.39	PK	H	34.74	4.80	0.00	68.93	62.93	110.80	47.87
5725	29.28	PK	H	34.75	4.80	0.00	68.83	62.83	122.20	59.37
2700	65.93	PK	V	29.64	3.25	44.13	54.69	48.69	74.00	25.31
2700	43.59	AV	V	29.64	3.25	44.13	32.35	26.35	54.00	27.65
2850	63.68	PK	V	30.12	3.33	44.20	52.93	46.93	74.00	27.07
2850	42.34	AV	V	30.12	3.33	44.20	31.59	25.59	54.00	28.41
11510	39.03	PK	V	38.90	6.89	44.61	40.21	34.21	74.00	39.79
11510	29.11	AV	V	38.90	6.89	44.61	30.29	24.29	54.00	29.71
Frequency: 5795 MHz										
5795	65.15	PK	H	34.76	4.83	0.00	104.74	98.74	N/A	N/A
5795	57.36	AV	H	34.76	4.83	0.00	96.95	90.95	N/A	N/A
5850	25.36	PK	H	34.77	4.86	0.00	64.99	58.99	122.20	63.21
5855	25.14	PK	H	34.77	4.86	0.00	64.77	58.77	110.80	52.03
5875	25.83	PK	H	34.78	4.87	0.00	65.48	59.48	105.20	45.72
5925	26.32	PK	H	34.79	4.89	0.00	66.00	60.00	68.20	8.20
2700	56.66	PK	V	29.64	3.25	44.13	45.42	39.42	74.00	34.58
2700	43.35	AV	V	29.64	3.25	44.13	32.11	26.11	54.00	27.89
2850	55.33	PK	V	30.12	3.33	44.20	44.58	38.58	74.00	35.42
2850	42.31	AV	V	30.12	3.33	44.20	31.56	25.56	54.00	28.44
11590	39.31	PK	V	38.92	6.92	44.41	40.74	34.74	74.00	39.26
11590	28.99	AV	V	38.92	6.92	44.41	30.42	24.42	54.00	29.58

For 802.11ac80 mode (MIMO)

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBµV/m)	Extrapolation Result (dBµV/m)	Limit (dBµV/m)	Margin (dB)
	Reading (dBµV)	Measurement (PK /AV)	Polar (H/V)	Factor (dB/m)						
Frequency: 5775 MHz										
5775	67.83	PK	H	34.76	4.82	0.00	107.41	101.41	N/A	N/A
5775	59.86	AV	H	34.76	4.82	0.00	99.44	93.44	N/A	N/A
5650	25.91	PK	H	34.73	4.76	0.00	65.40	59.40	68.20	7.13
5700	27.54	PK	H	34.74	4.79	0.00	67.07	61.07	105.20	43.44
5720	28.22	PK	H	34.74	4.80	0.00	67.76	61.76	110.80	48.69
5725	28.56	PK	H	34.75	4.80	0.00	68.11	62.11	122.20	88.65
5850	27.05	PK	H	34.77	4.86	0.00	66.68	60.68	122.20	88.57
5855	26.3	PK	H	34.77	4.86	0.00	65.93	59.93	110.80	51.60
5875	25.55	PK	H	34.78	4.87	0.00	65.20	59.20	105.20	45.56
5925	25.96	PK	H	34.79	4.89	0.00	65.64	59.64	68.20	34.10
2700	56.42	PK	V	29.64	3.25	44.13	45.18	39.18	74.00	34.82
2700	42.96	AV	V	29.64	3.25	44.13	31.72	25.72	54.00	28.28
2850	55.71	PK	V	30.12	3.33	44.20	44.96	38.96	74.00	35.04
2850	42.19	AV	V	30.12	3.33	44.20	31.44	25.44	54.00	28.56
11550	38.79	PK	V	38.91	6.91	44.51	40.10	34.10	74.00	49.80
11550	28.89	AV	V	38.91	6.91	44.51	30.20	24.20	54.00	29.80

Note:


Corrected Amplitude = Corrected Factor + Reading

Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor


Margin = Limit- Corr. Amplitude

Please refer to the below pre-scan plot of worst case:


802.11ac80 Mode_Horizontal_1GHz-5GHz

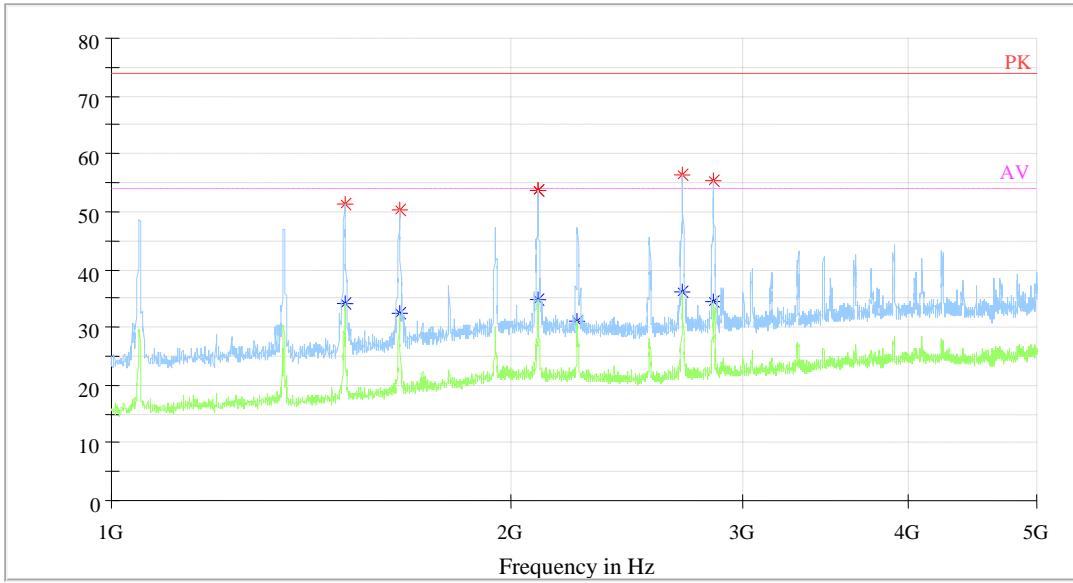


802.11ac80 Mode_Vertical_1GHz-5GHz

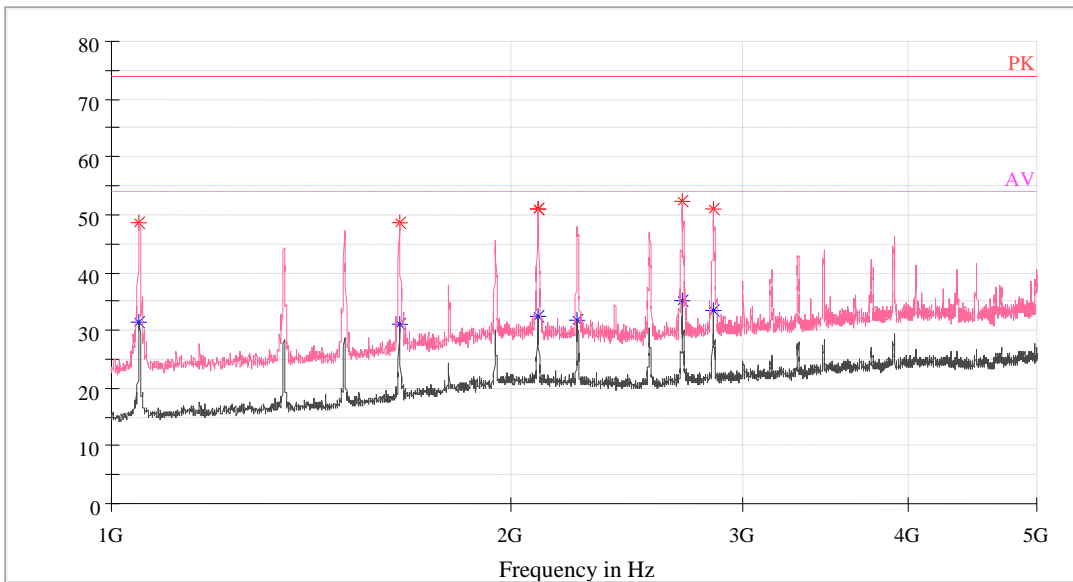


802.11ac80 Mode_Horizontal_5GHz-18GHz

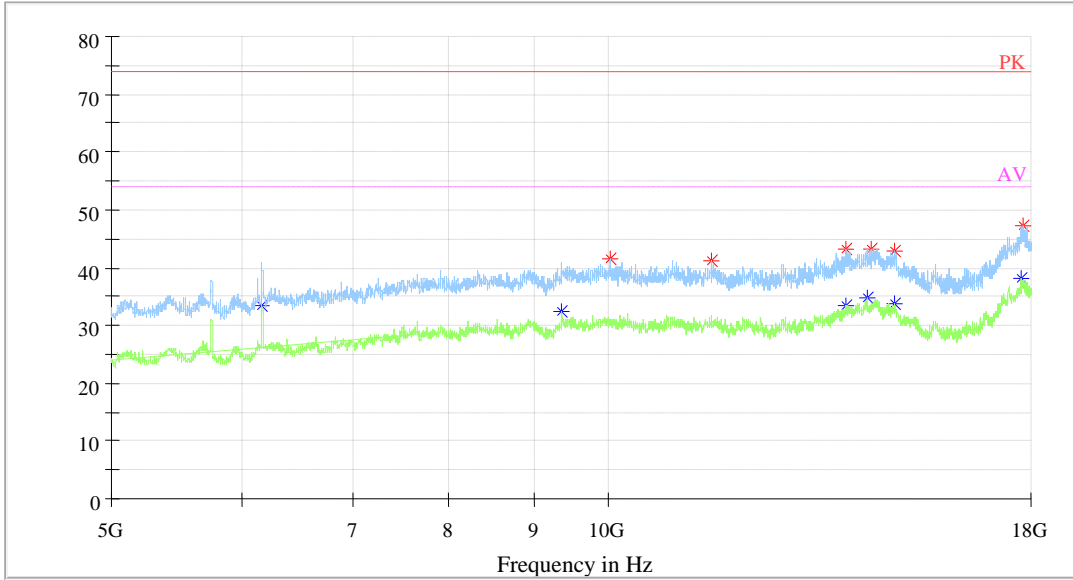


802.11ac80 Mode_Vertical_5GHz-18GHz

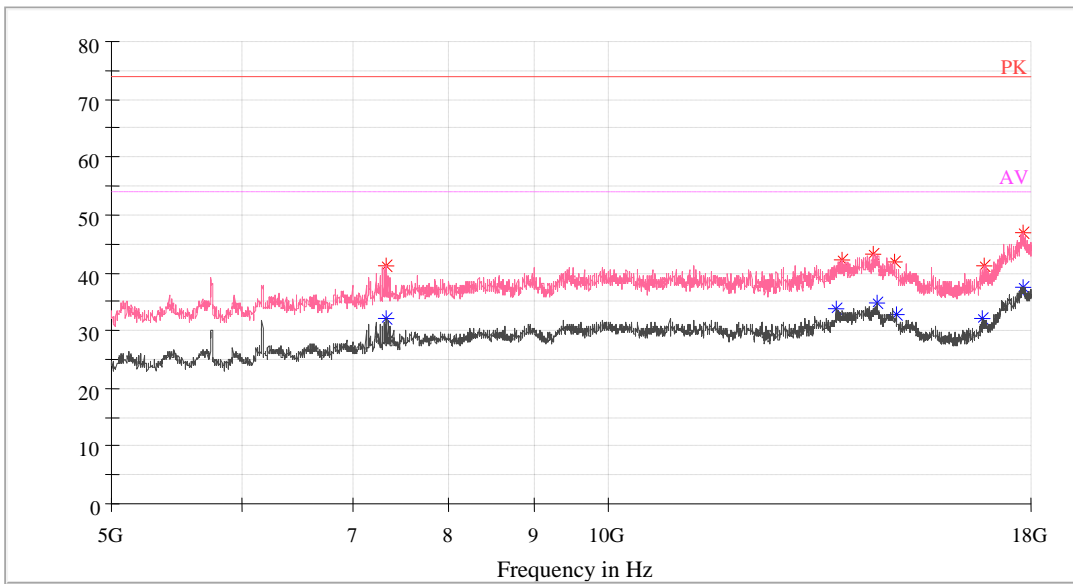


802.11ac80 Mode _Horizontal_18GHz-26.5GHz

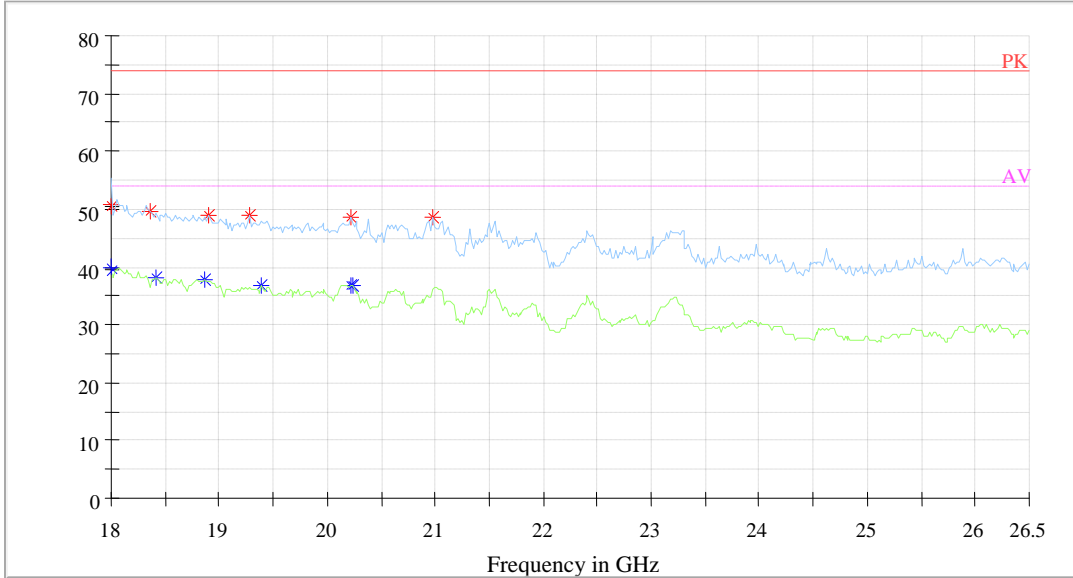


802.11ac80 Mode _Vertical_18GHz-26.5GHz

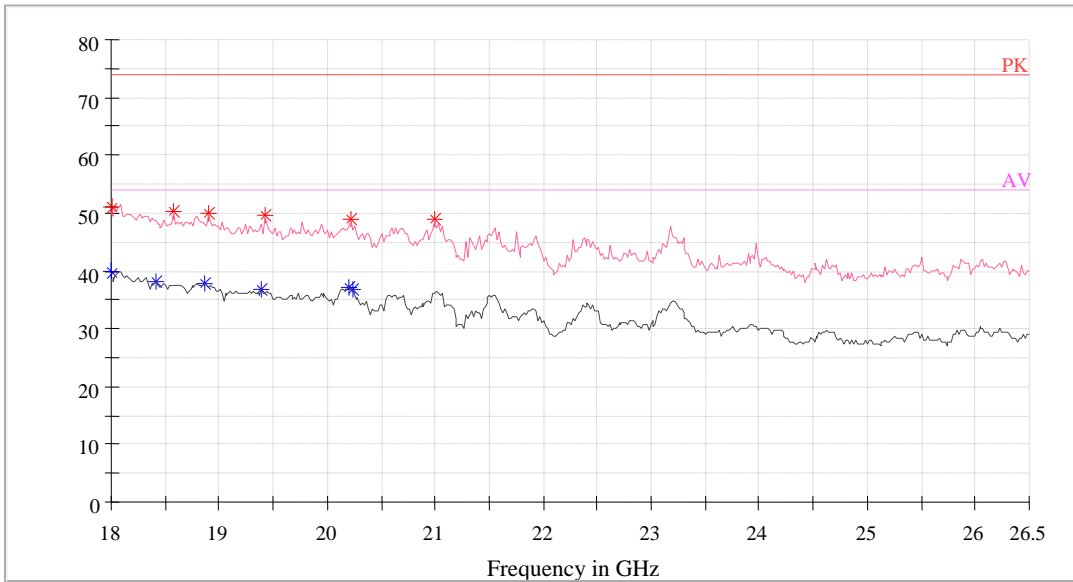

802.11ac80 Mode _Horizontal_26.5GHz-40GHz

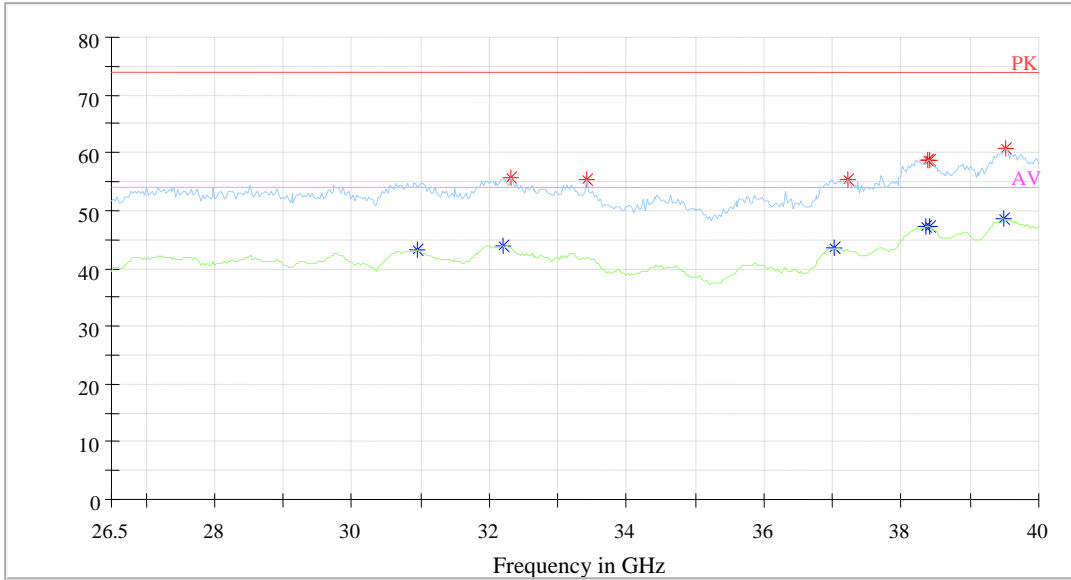

802.11ac80 Mode _Vertical_26.5GHz-40GHz

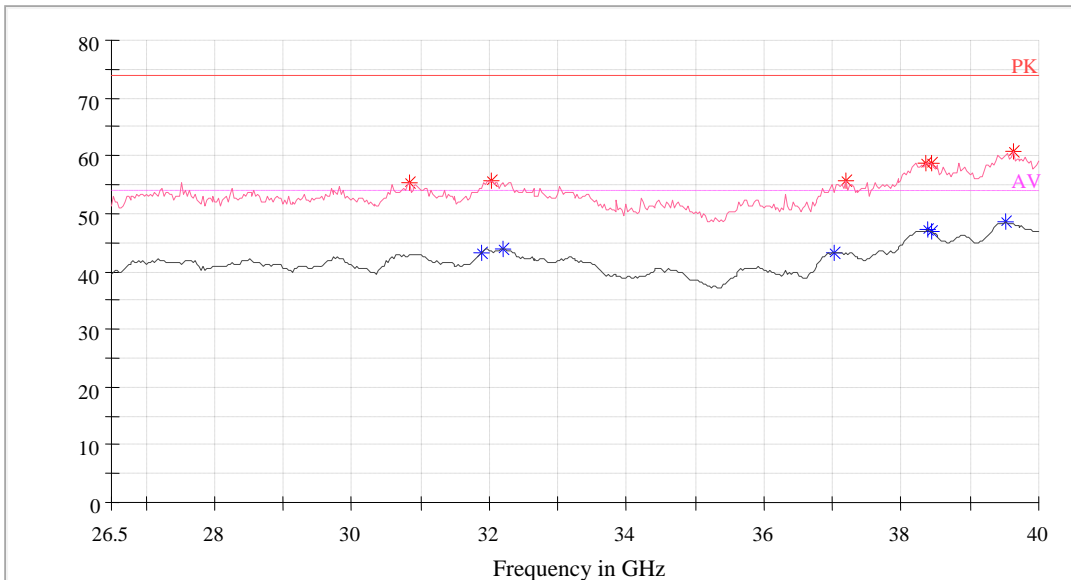

FCC §15.407(a) (5) & (e) – 26dB & 6dB BANDWIDTH

Applicable Standard

(a)(5) The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test. If the device cannot be connected directly, alternative techniques acceptable to the Commission may be used. Measurements in the 5.725-5.85 GHz band are made over a reference bandwidth of 500 kHz or the 26 dB emission bandwidth of the device, whichever is less. Measurements in the 5.15-5.25 GHz, 5.25-5.35 GHz, and the 5.47-5.725 GHz bands are made over a bandwidth of 1 MHz or the 26 dB emission bandwidth of the device, whichever is less. A narrower resolution bandwidth can be used, provided that the measured power is integrated over the full reference bandwidth.

(e) Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3.
 - (A) 26dB Bandwidth
Set RBW = approximately 1% of the emission bandwidth.
Set the VBW > RBW. Detector= Peak. Trace mode = max hold. Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.
 - (B) 6dB Bandwidth
Set RBW = 100 kHz. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
Detector = Peak. Trace mode = max hold. Sweep = auto couple. Allow the trace to stabilize. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.
 - (C) 99% Occupied Bandwidth
The following procedure shall be used for measuring (99 %) power bandwidth:
 1. Set center frequency to the nominal EUT channel center frequency.
 2. Set span = 1.5 times to 5.0 times the OBW.
 3. Set RBW = 1 % to 5 % of the OBW
 4. Set VBW $\geq 3 \cdot$ RBW
 5. Use the 99 % power bandwidth function of the instrument.
4. Repeat above procedures until all frequencies measured were complete.

Test Data

Environmental Conditions

Temperature:	21 °C
Relative Humidity:	55 ~ 59 %
ATM Pressure:	95.3 ~ 95.5 kPa

* The testing was performed by Eric Xiao from 2019-11-13 to 2019-11-14.

Test Result: Pass. Please refer to the following tables and plots.


Test mode: Transmitting

For 5150-5250 MHz:

Mode	Channel	Frequency (MHz)	26dB Bandwidth (MHz)		99% Occupied Bandwidth (MHz)	
			Chain 0	Chain 1	Chain 0	Chain 1
802.11a	Low	5180	21.96	21.96	17.39	17.39
	Middle	5200	21.88	21.88	17.31	17.39
	High	5240	21.72	21.72	17.31	17.23
802.11n-HT20	Low	5180	22.12	21.96	18.36	18.28
	Middle	5200	21.96	22.20	18.36	18.36
	High	5240	22.04	22.12	18.28	18.28
802.11n-HT40	Low	5190	40.72	40.72	36.39	36.55
	High	5230	40.88	40.72	36.39	36.39
802.11ac20	Low	5180	22.12	21.72	18.28	18.28
	Middle	5200	21.96	22.12	18.28	18.28
	High	5240	21.96	21.80	18.36	18.28
802.11ac40	Low	5190	40.88	40.24	36.39	36.71
	High	5230	40.56	40.56	36.39	36.71
802.11ac80	/	5210	82.97	82.97	76.35	75.95


Note: the 99% Occupied Bandwidth doesn't extend U-NII-2A band 5250-5350MHz.

802.11a mode, 26 dB Bandwidth-5180 MHz, Chain 0

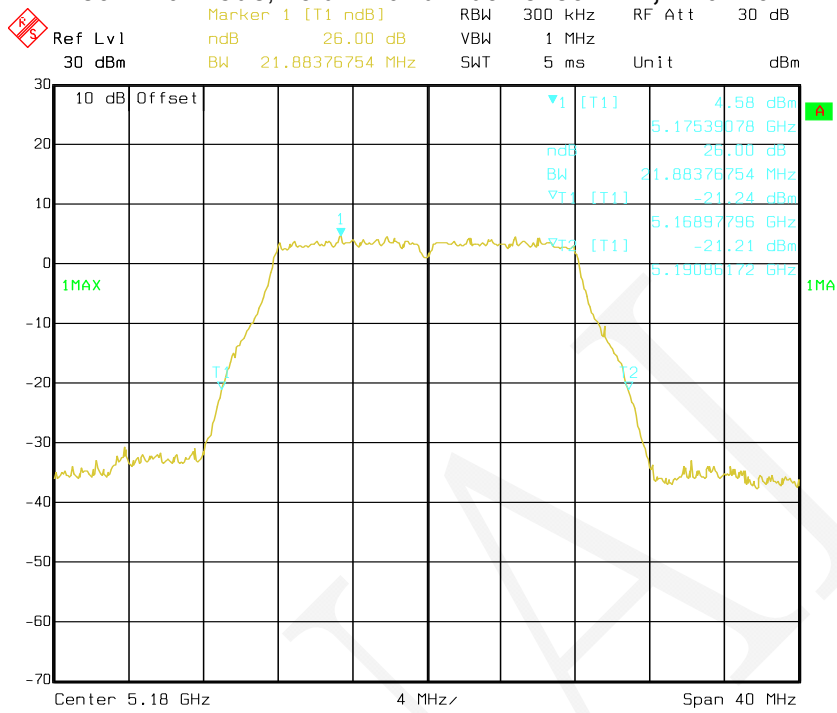


Date: 13.NOV.2019 16:25:06

802.11a mode, 26 dB Bandwidth-5200 MHz, Chain 0

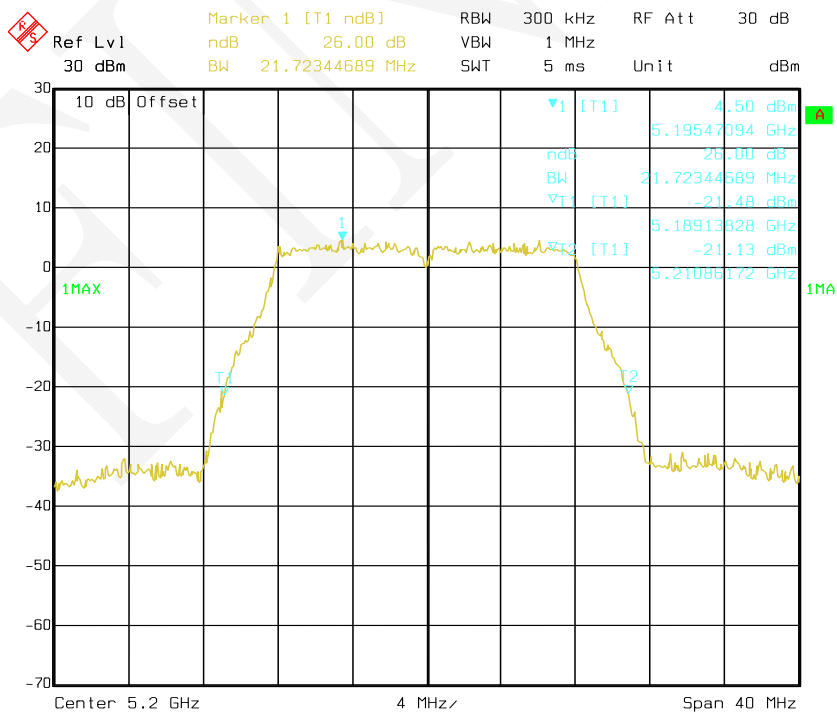


Date: 13.NOV.2019 16:40:39

802.11a mode, 26 dB Bandwidth-5240 MHz, Chain 0

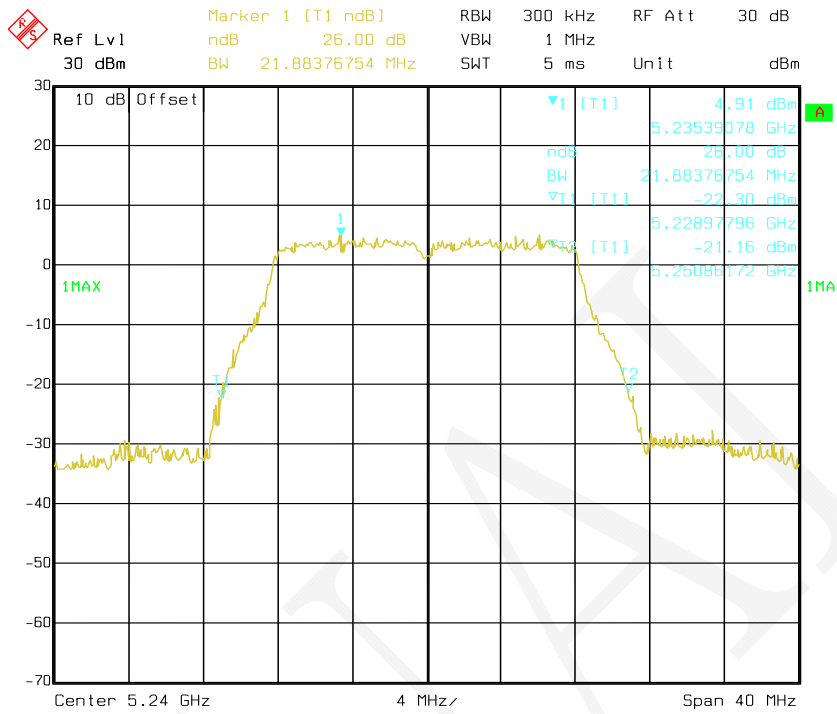


Date: 13.NOV.2019 16:41:03

802.11a mode, 26 dB Bandwidth-5180 MHz, Chain 1

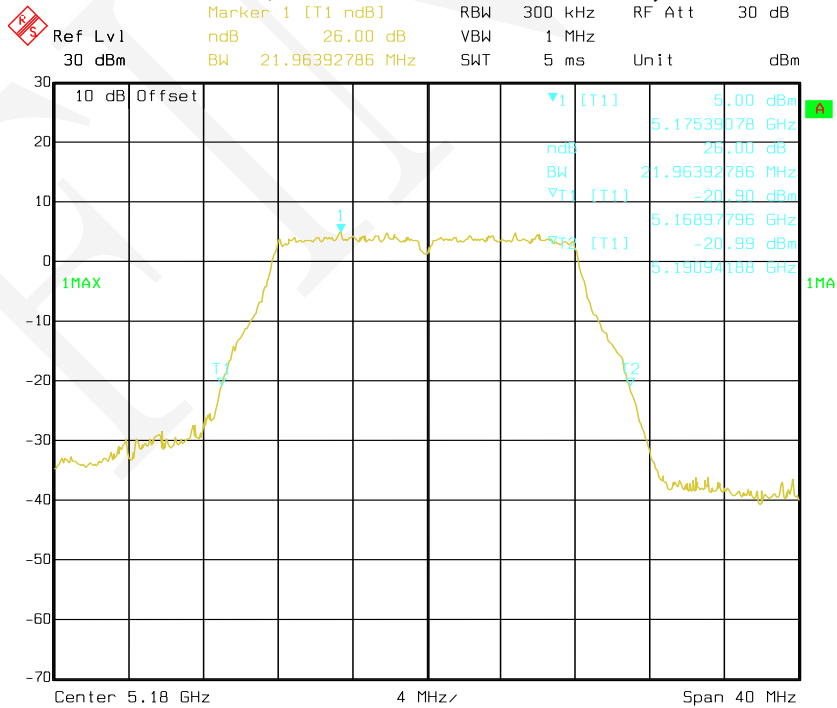


Date: 13.NOV.2019 15:19:21

802.11a mode, 26 dB Bandwidth-5200 MHz, Chain 1

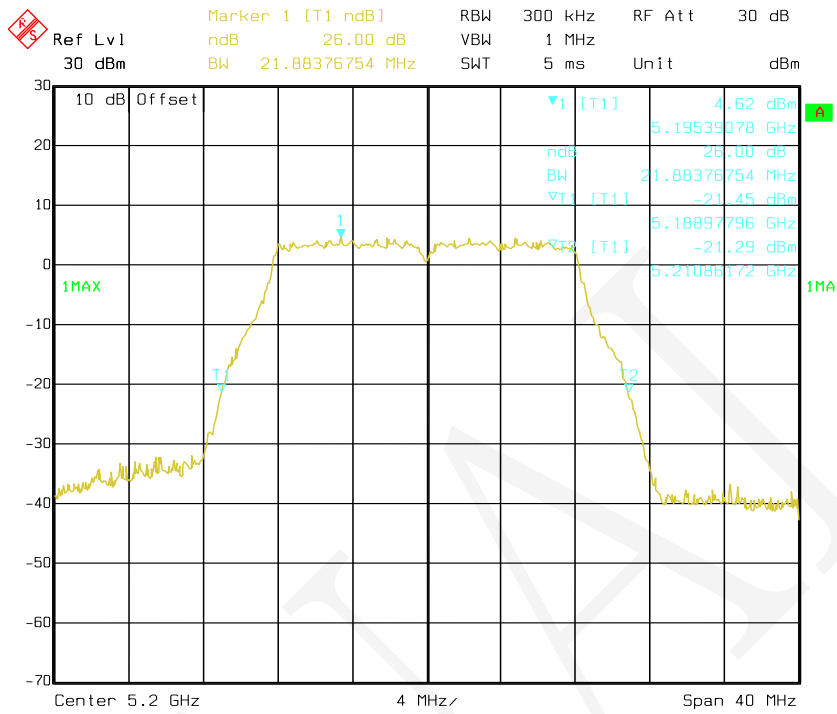


Date: 13.NOV.2019 15:23:49

802.11a mode, 26 dB Bandwidth-5240 MHz, Chain 1

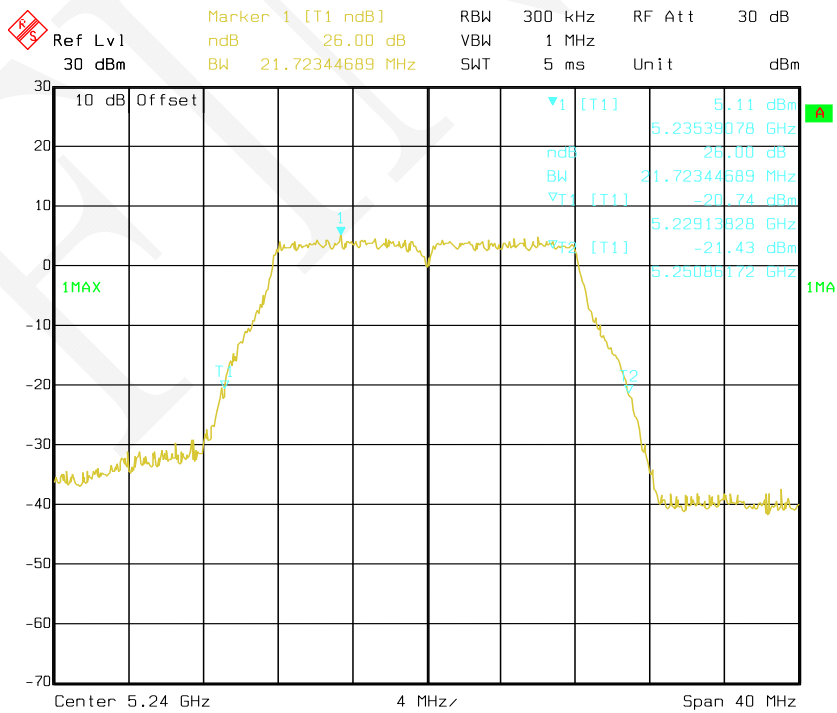


Date: 13.NOV.2019 15:24:16

802.11n-HT20 mode, 26 dB Bandwidth-5180 MHz, Chain 0

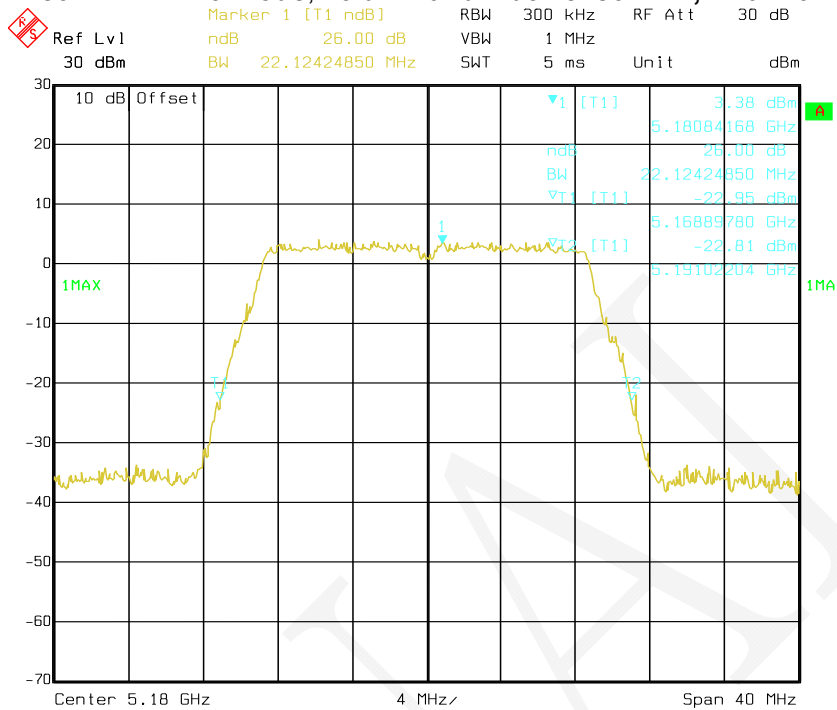


Date: 13.NOV.2019 16:45:36

802.11n-HT20 mode, 26 dB Bandwidth-5200 MHz, Chain 0

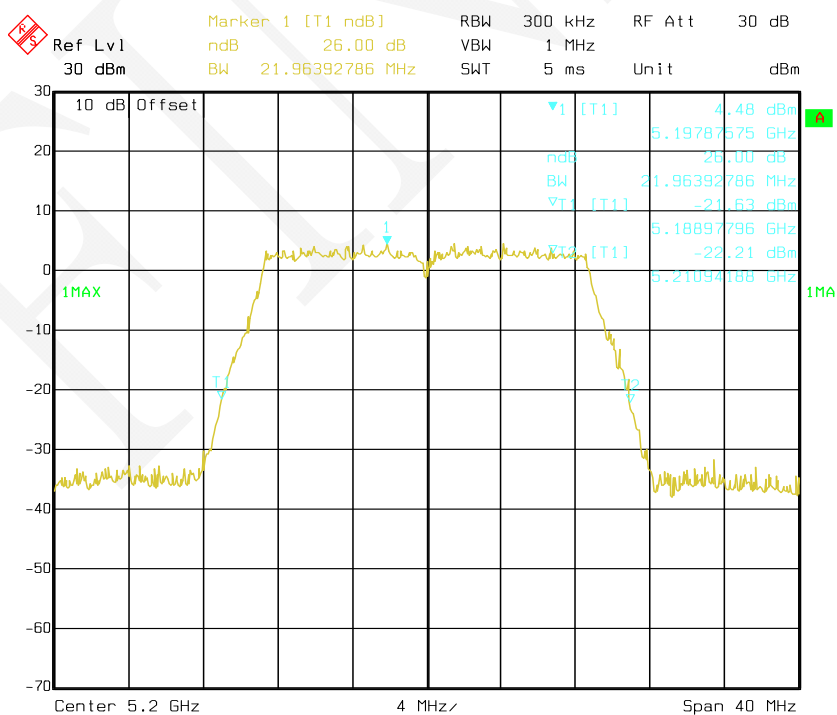


Date: 13.NOV.2019 16:46:00

802.11n-HT20 mode, 26 dB Bandwidth-5240 MHz, Chain 0

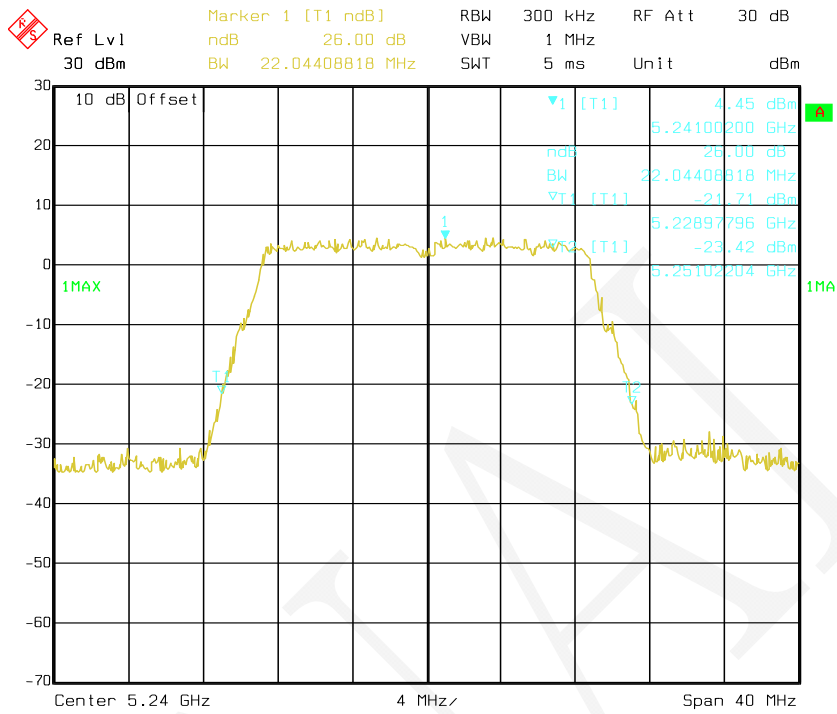


Date: 13.NOV.2019 16:46:24

802.11n-HT20 mode, 26 dB Bandwidth-5180 MHz, Chain 1

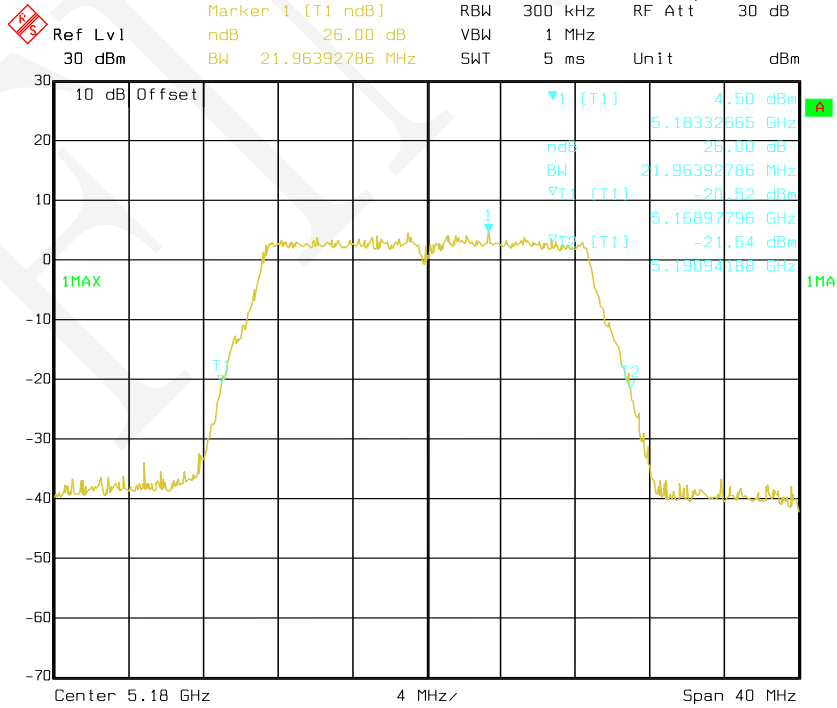


Date: 13.NOV.2019 16:15:27

802.11n-HT20 mode, 26 dB Bandwidth-5200 MHz, Chain 1

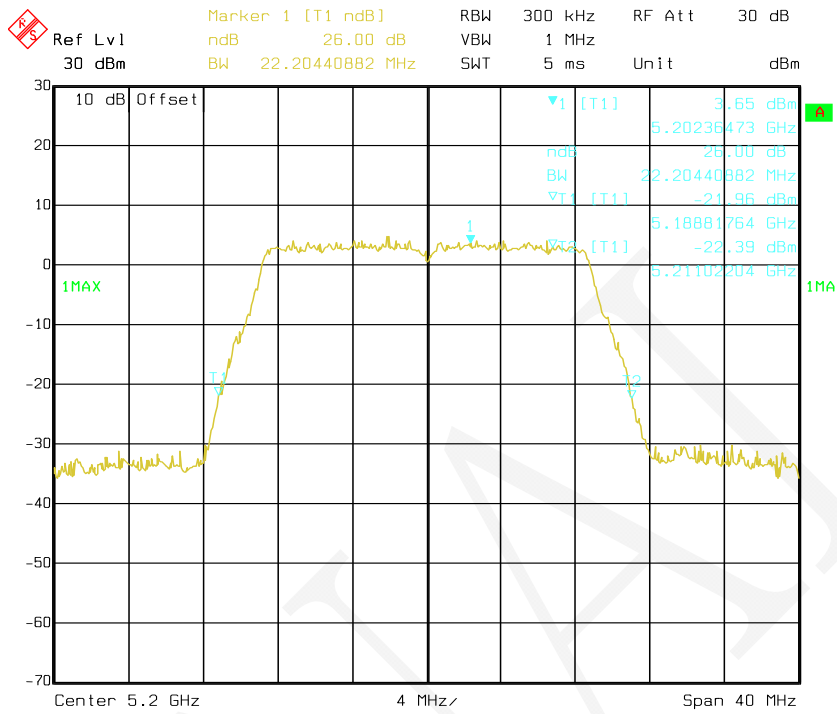


Date: 13.NOV.2019 16:39:49

802.11n-HT20 mode, 26 dB Bandwidth-5240 MHz, Chain 1

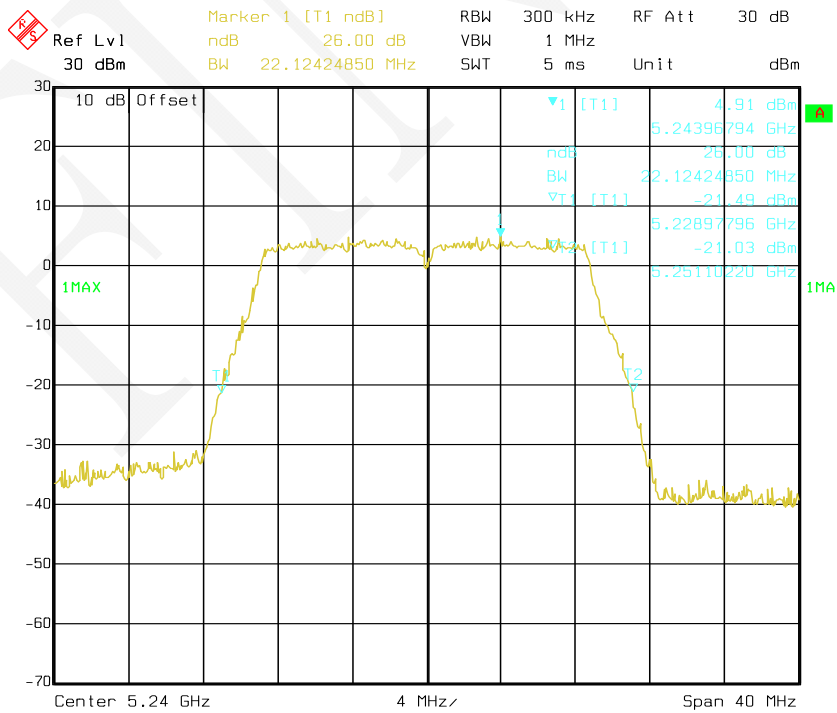


Date: 13.NOV.2019 16:17:19

802.11n-HT40 mode, 26 dB Bandwidth-5190 MHz, Chain 0

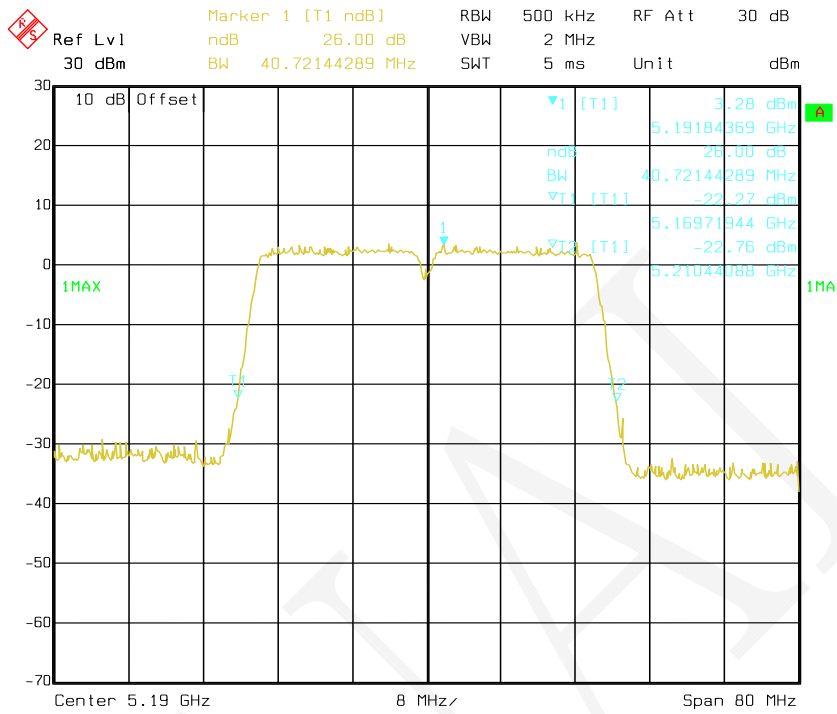


Date: 14.NOV.2019 13:45:36

802.11n-HT40 mode, 26 dB Bandwidth-5230 MHz, Chain 0

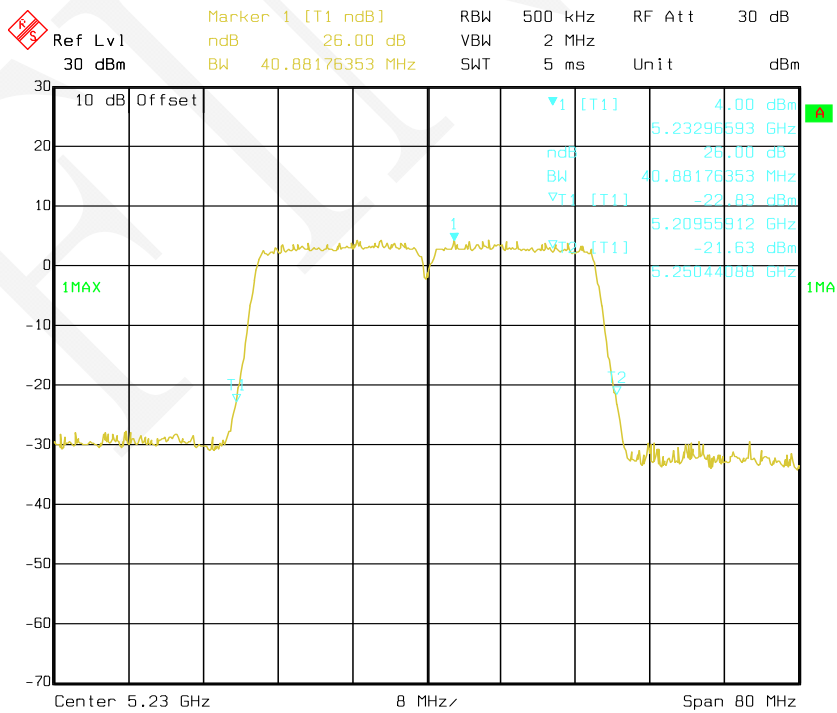


Date: 14.NOV.2019 13:46:51


802.11n-HT40 mode, 26 dB Bandwidth-5190 MHz, Chain 1

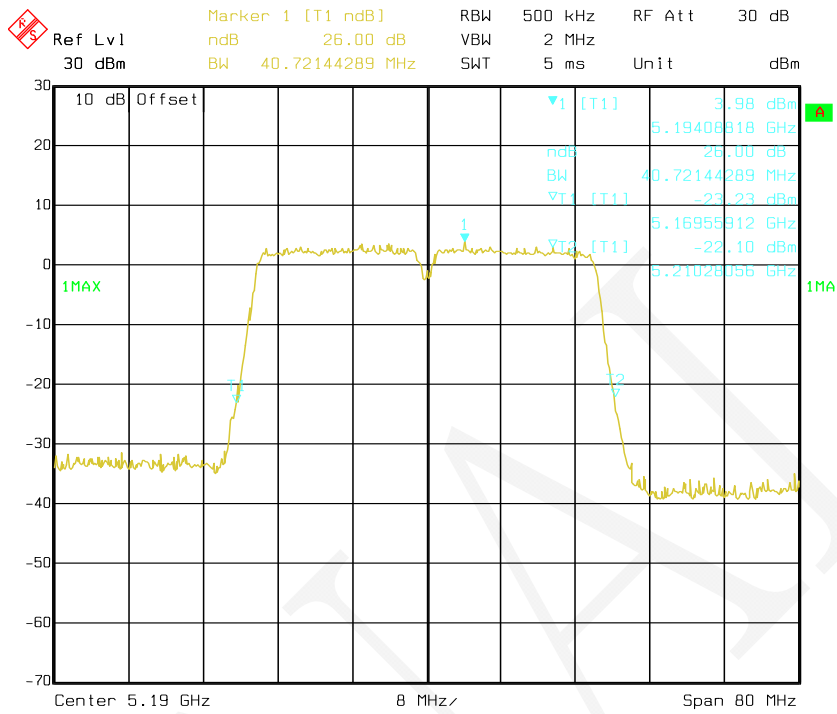

802.11n-HT40 mode, 26 dB Bandwidth-5230 MHz, Chain 1

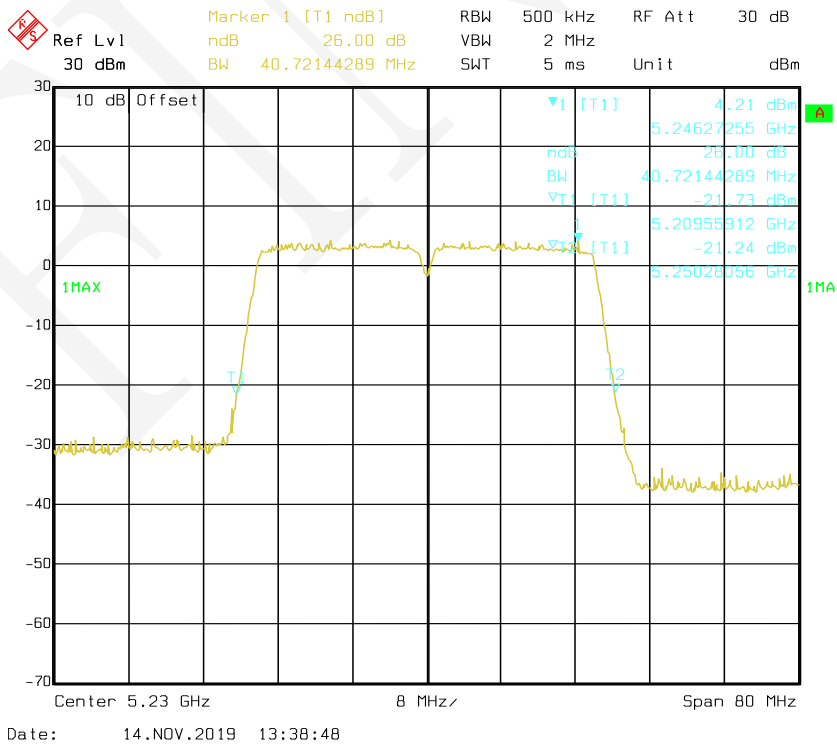


802.11ac20 mode, 26 dB Bandwidth-5180 MHz, Chain 0

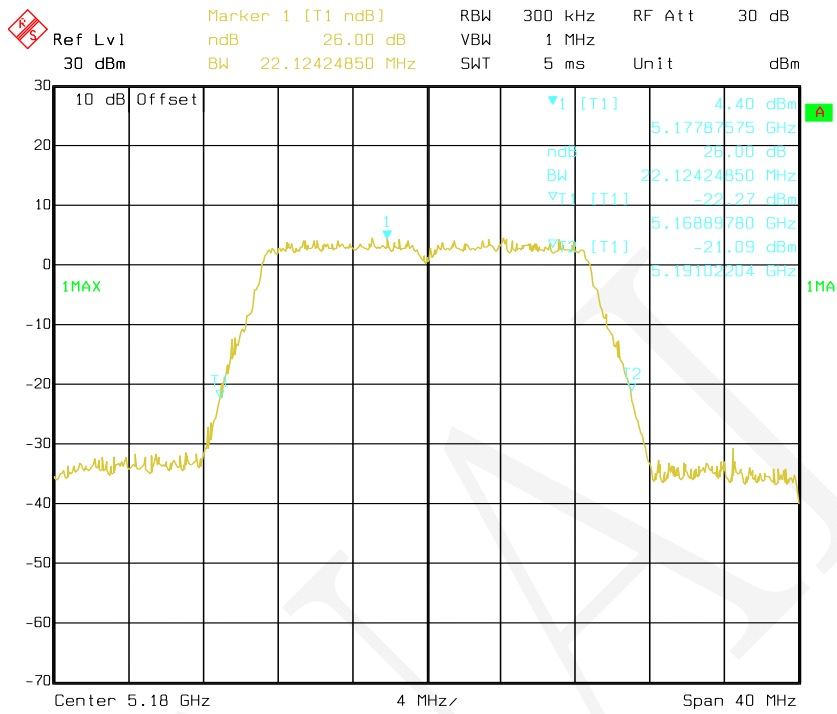


Date: 13.NOV.2019 16:41:38

802.11ac20 mode, 26 dB Bandwidth-5200 MHz, Chain 0

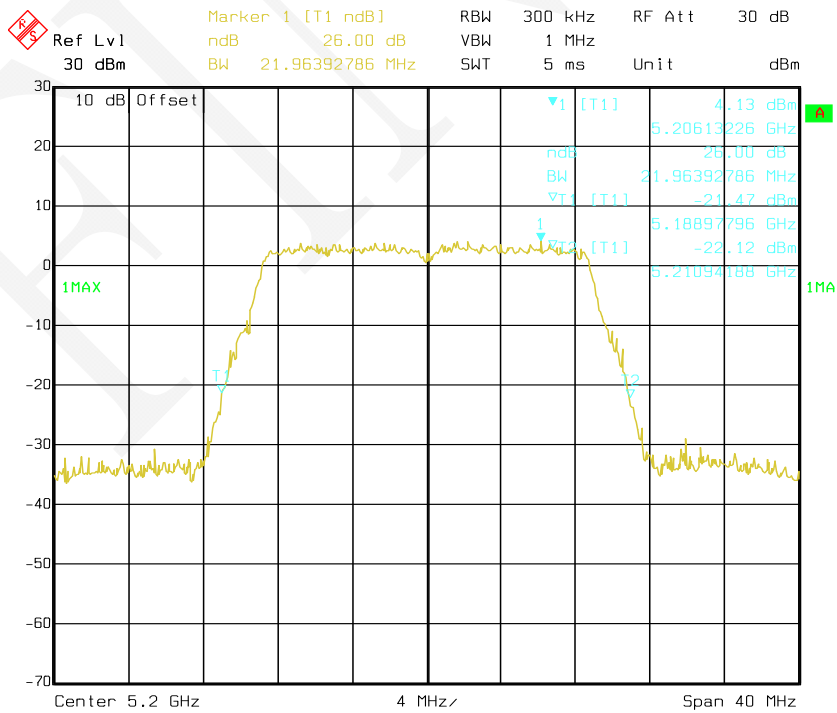


Date: 13.NOV.2019 16:43:02

802.11ac20 mode, 26 dB Bandwidth-5240 MHz, Chain 0

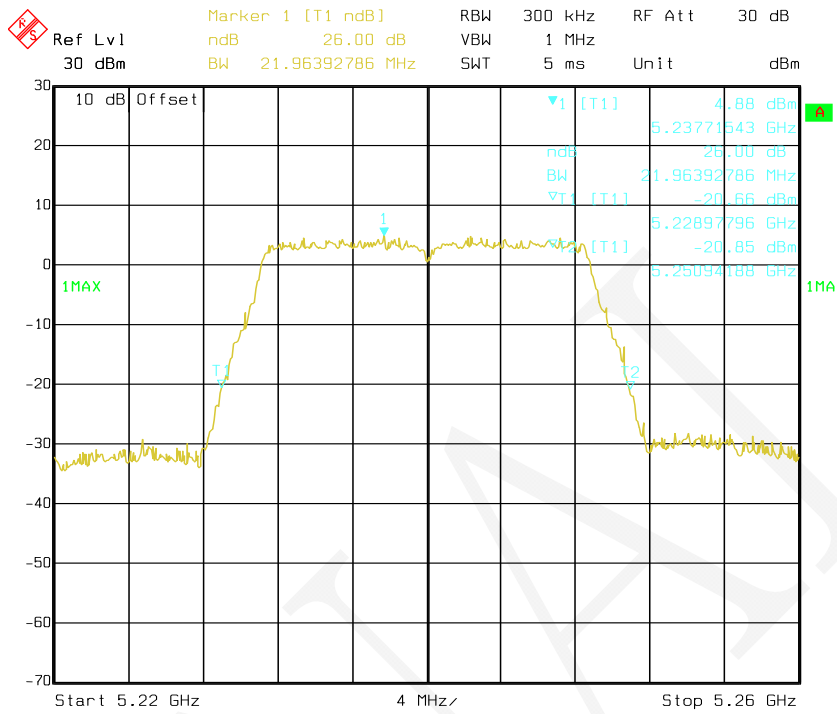

Date: 13.NOV.2019 16:43:49


802.11ac20 mode, 26 dB Bandwidth-5180 MHz, Chain 1

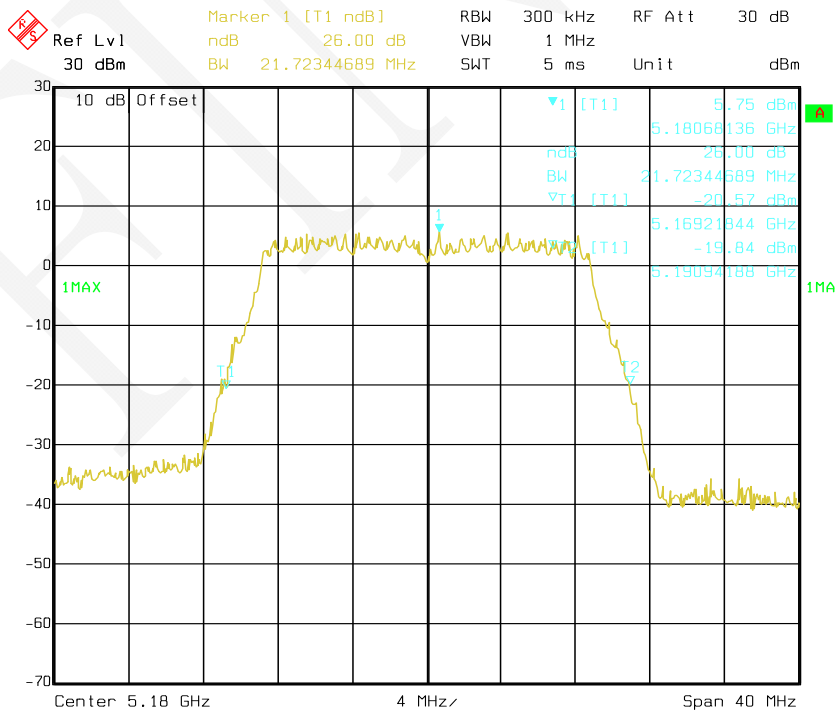

Date: 13.NOV.2019 16:08:59

802.11ac40 mode, 26 dB Bandwidth-5190 MHz, Chain 0


✠ Ref Lvl 30 dBm Marker 1 [T1 ndB] RBW 500 kHz RF Att 30 dB
 ndB 26.00 dB VBW 2 MHz
 BW 40.88176353 MHz SWT 5 ms Unit dBm

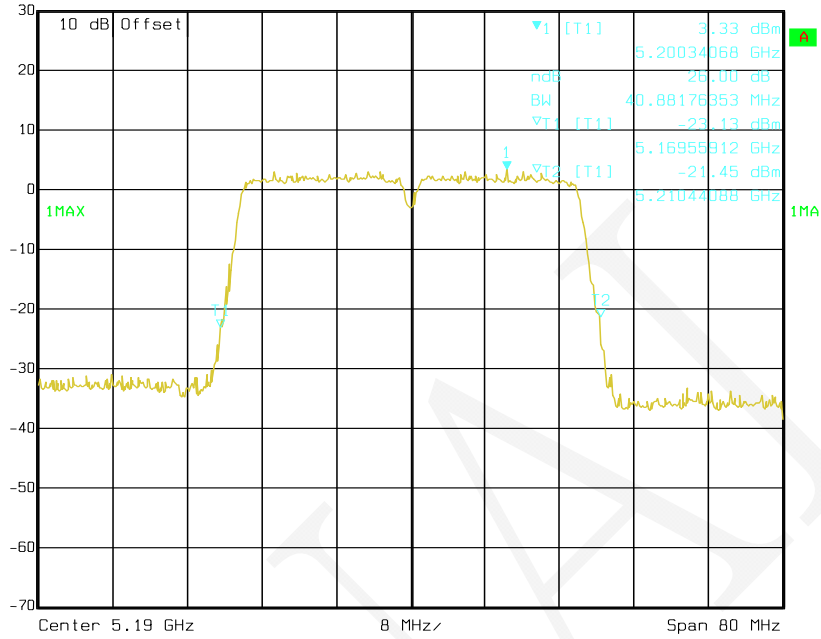

Date: 14.NOV.2019 13:42:33

802.11ac40 mode, 26 dB Bandwidth-5230 MHz, Chain 0


✠ Ref Lvl 30 dBm Marker 1 [T1 ndB] RBW 500 kHz RF Att 30 dB
 ndB 26.00 dB VBW 2 MHz
 BW 40.56112224 MHz SWT 5 ms Unit dBm

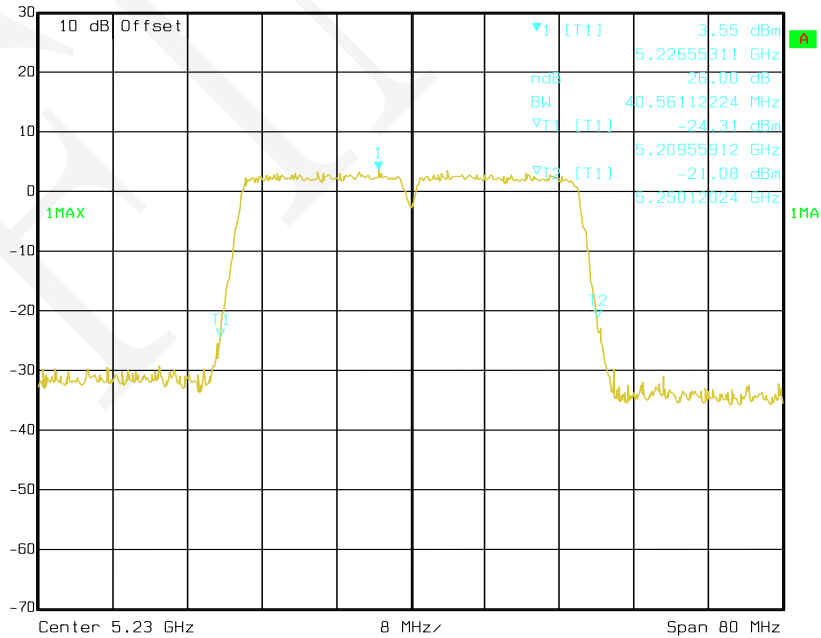

Date: 14.NOV.2019 13:40:42

802.11ac40 mode, 26 dB Bandwidth-5190 MHz, Chain 1


✠ Ref Lvl 30 dBm Marker 1 [T1 ndB] 26.00 dB RBW 500 kHz RF Att 30 dB
 BW 40.24048096 MHz VBW 2 MHz SWT 5 ms Unit dBm

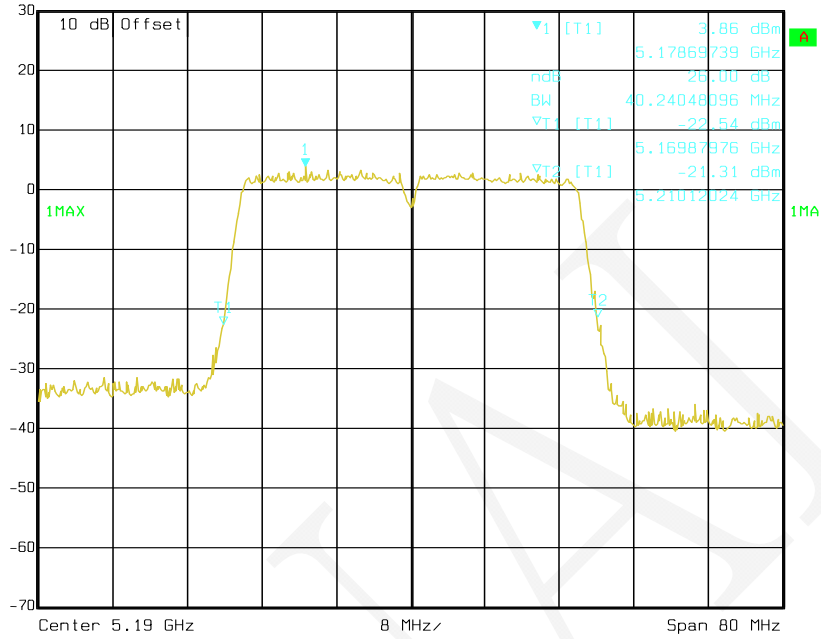

Date: 14.NOV.2019 13:39:25


802.11ac40 mode, 26 dB Bandwidth-5230 MHz, Chain 1

✠ Ref Lvl 30 dBm Marker 1 [T1 ndB] 26.00 dB RBW 500 kHz RF Att 30 dB
 BW 40.56112224 MHz VBW 2 MHz SWT 5 ms Unit dBm

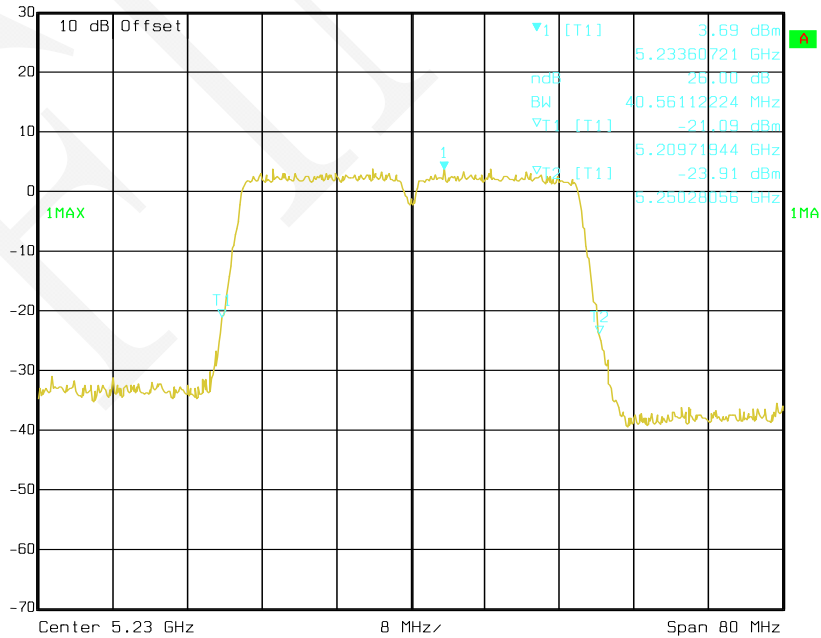


Date: 14.NOV.2019 13:39:54

802.11ac80 mode, 26 dB Bandwidth-5210 MHz, Chain 0

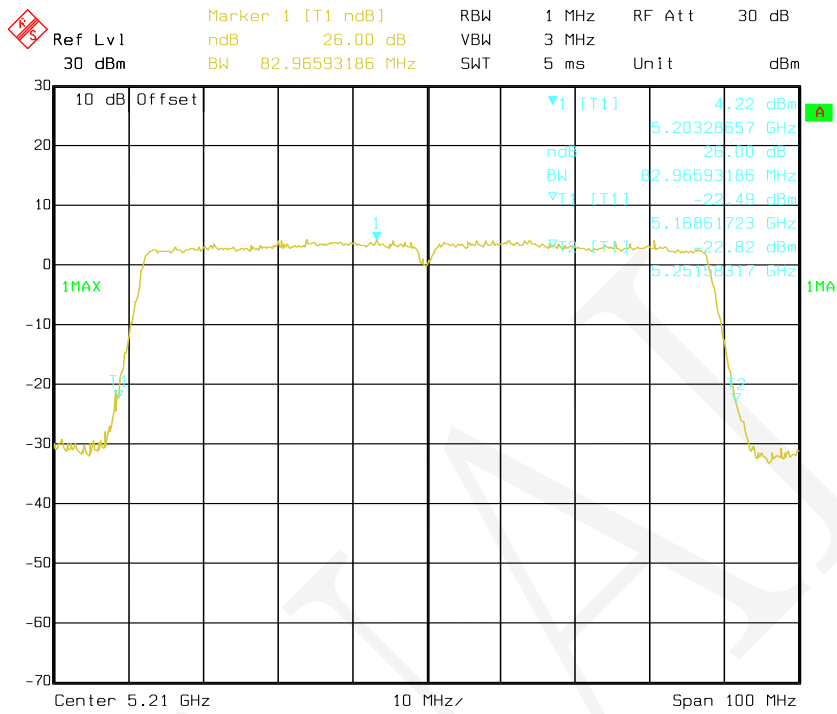


Date: 14.NOV.2019 10:14:34

802.11ac80 mode, 26 dB Bandwidth-5210 MHz, Chain 1

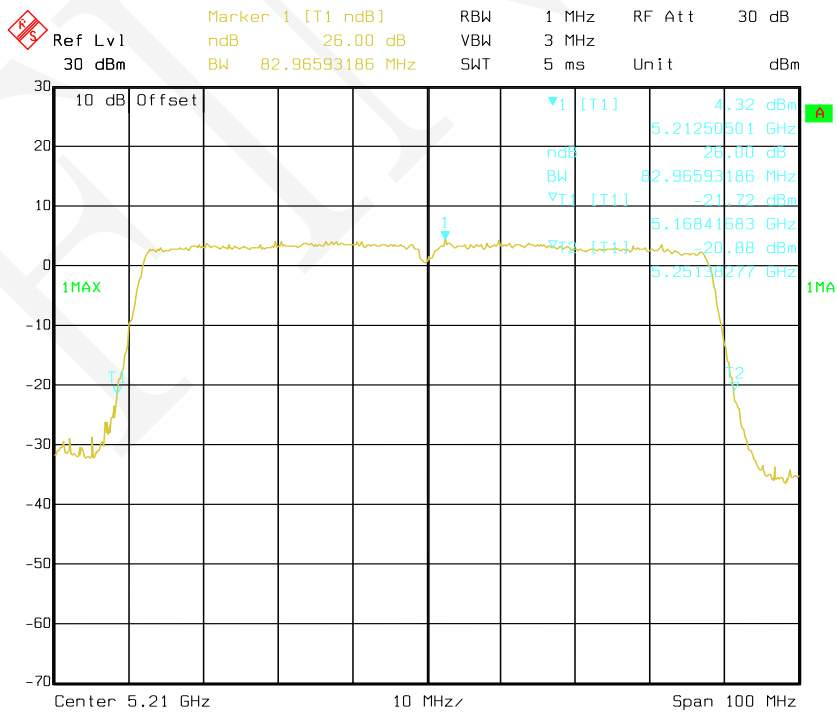


Date: 14.NOV.2019 13:34:28


802.11a mode, 99% Occupied Bandwidth-5180 MHz, Chain 0

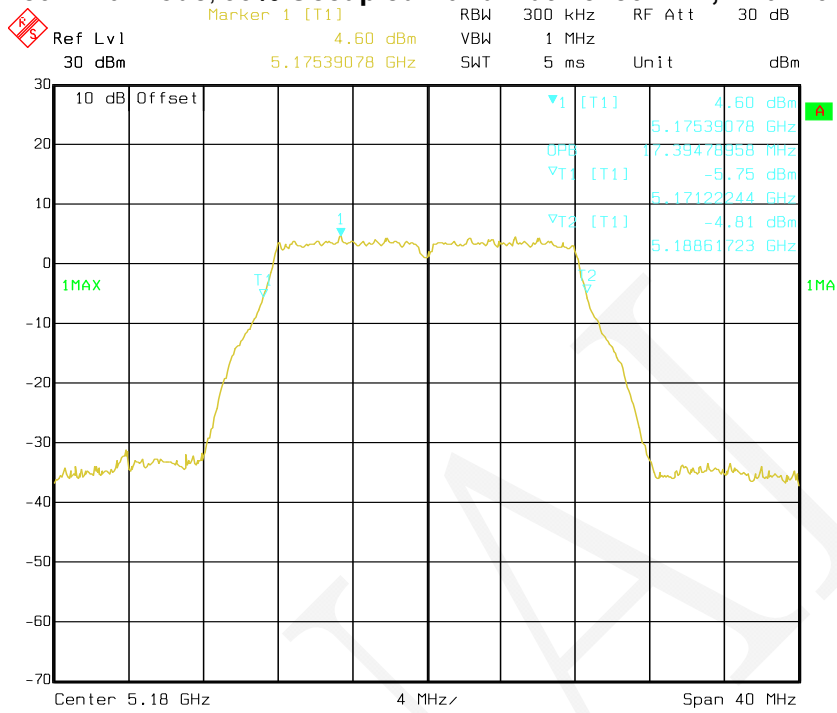

802.11a mode, 99% Occupied Bandwidth -5200 MHz, Chain 0

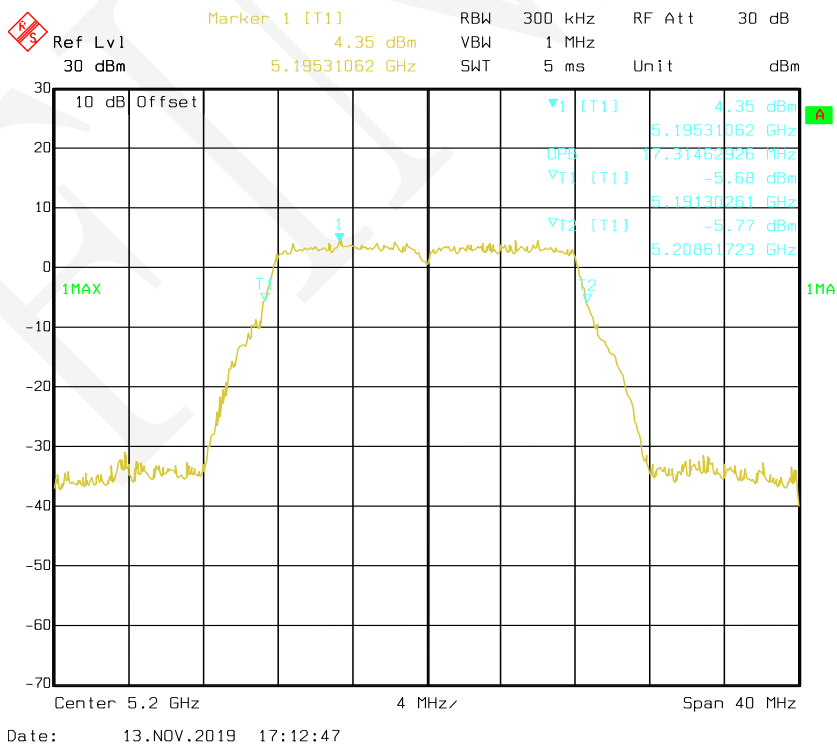


802.11a mode, 99% Occupied Bandwidth -5240 MHz, Chain 0

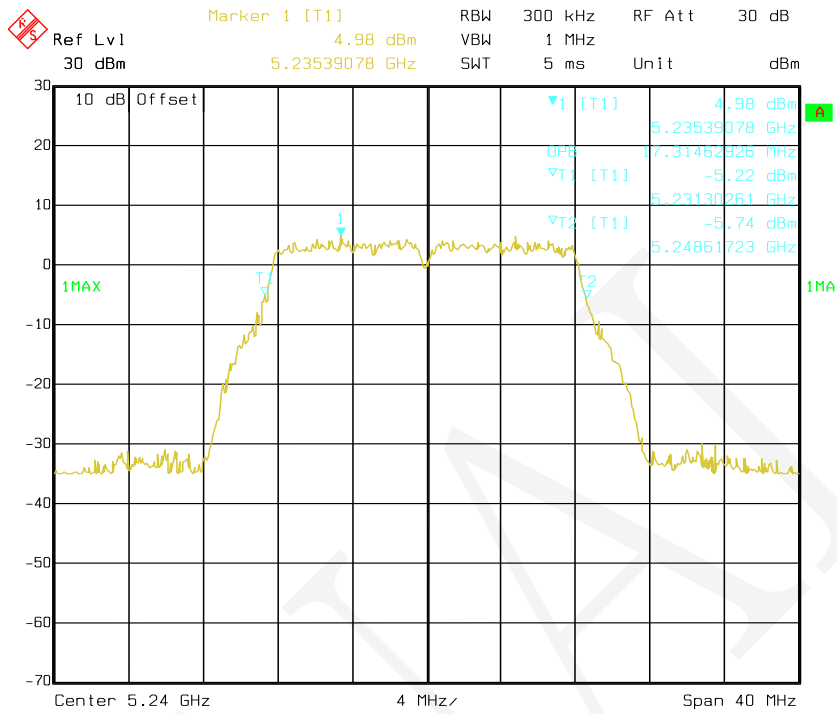


Date: 13.NOV.2019 17:13:11

802.11a mode, 99% Occupied Bandwidth-5180 MHz, Chain 1

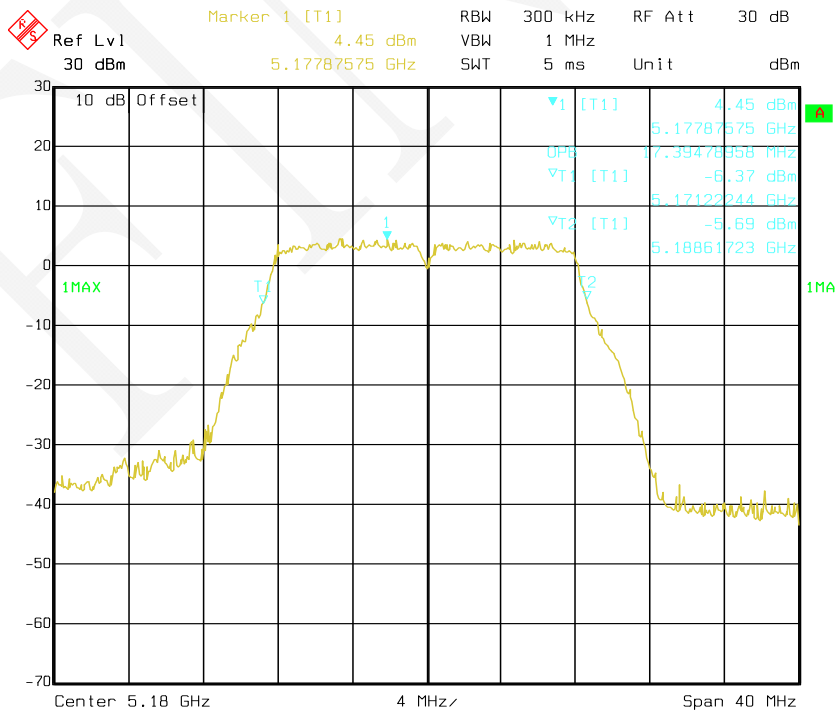


Date: 14.NOV.2019 13:50:54

802.11a mode, 99% Occupied Bandwidth -5200 MHz, Chain 1

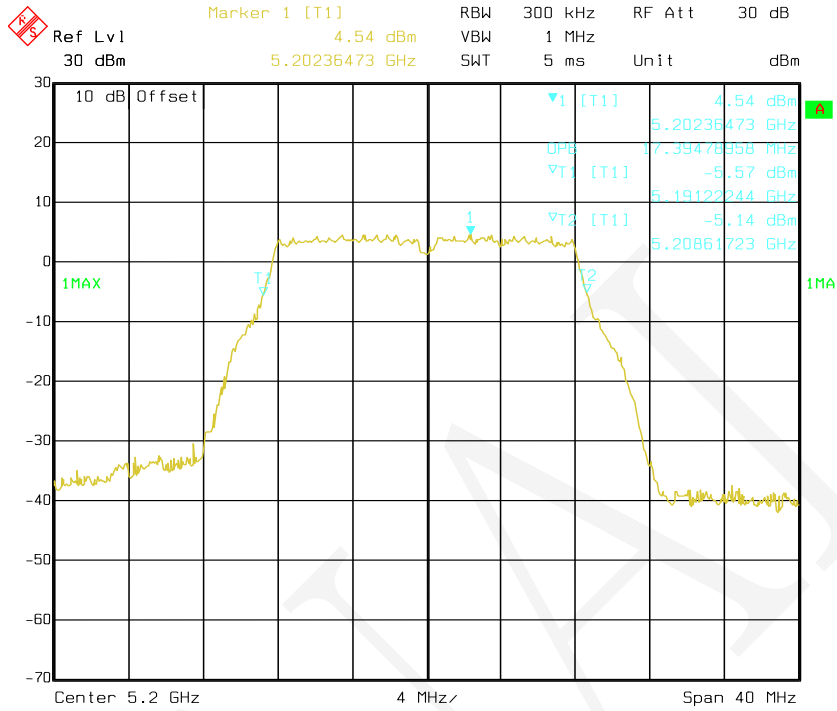


Date: 14.NOV.2019 13:52:39

802.11a mode, 99% Occupied Bandwidth -5240 MHz, Chain 1

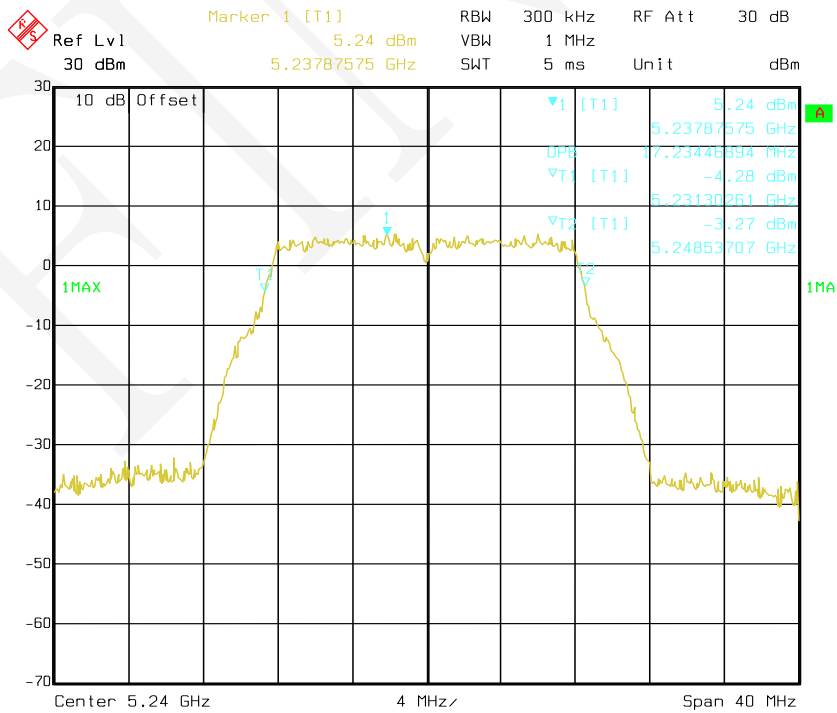


Date: 14.NOV.2019 13:53:13


802.11n-HT20 mode, 99% Occupied Bandwidth-5180 MHz, Chain 0

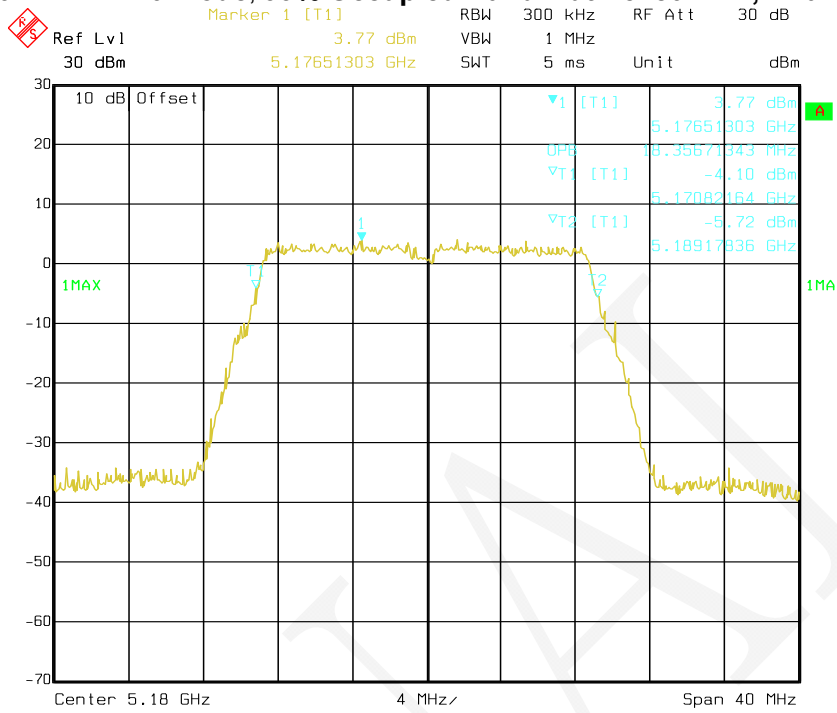

802.11n-HT20 mode, 99% Occupied Bandwidth -5200 MHz, Chain 0

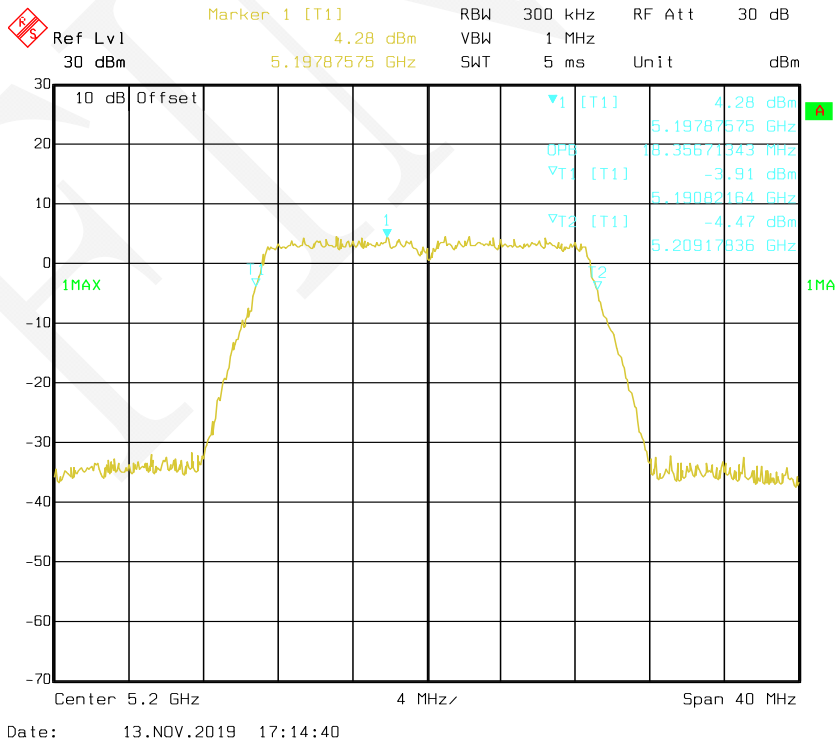


802.11n-HT20 mode, 99% Occupied Bandwidth -5240 MHz, Chain 0

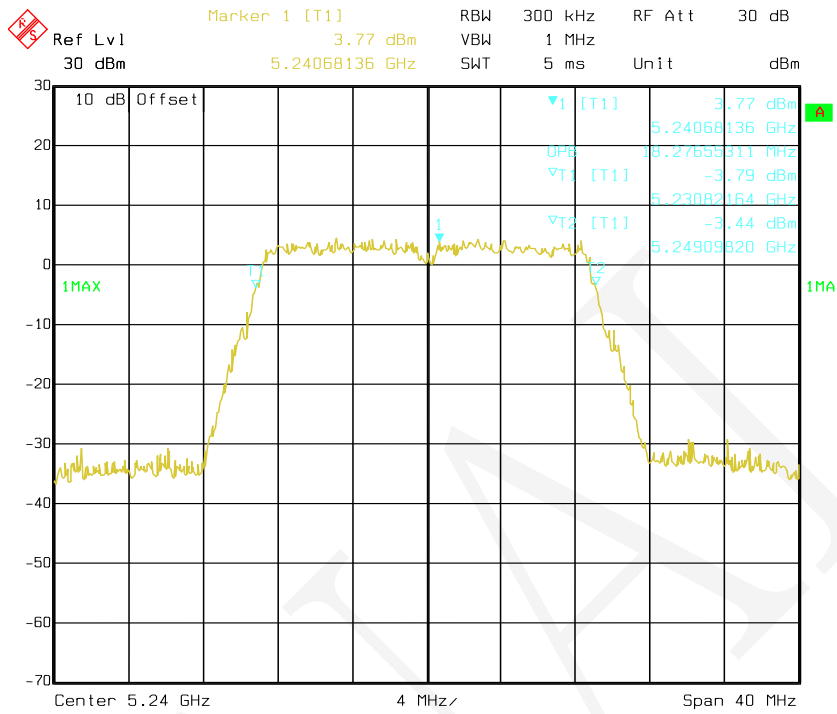


Date: 13.NOV.2019 17:15:10

802.11n-HT20 mode, 99% Occupied Bandwidth-5180 MHz, Chain 1

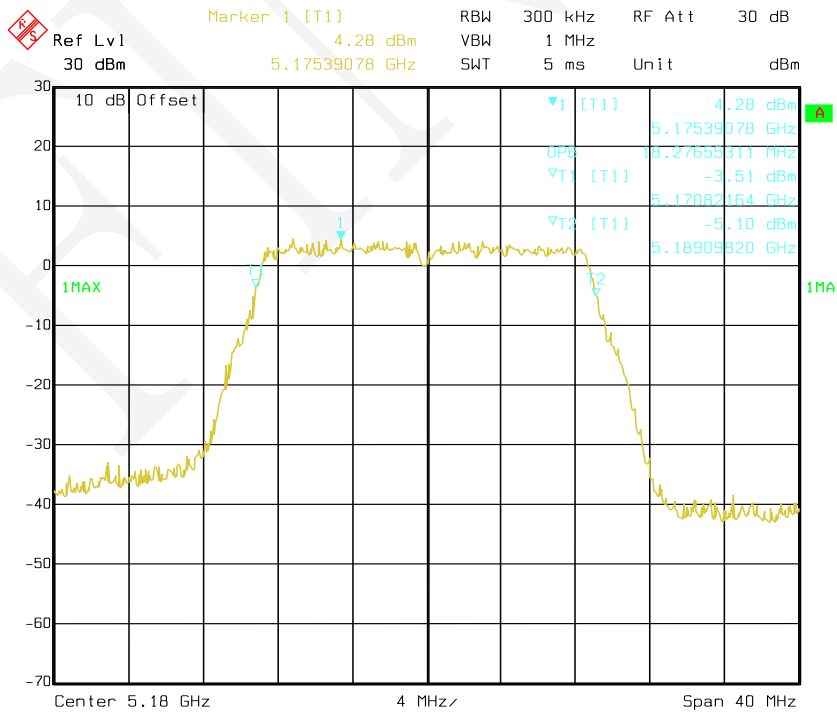


Date: 14.NOV.2019 13:53:54


802.11n-HT20 mode, 99% Occupied Bandwidth -5200 MHz, Chain 1

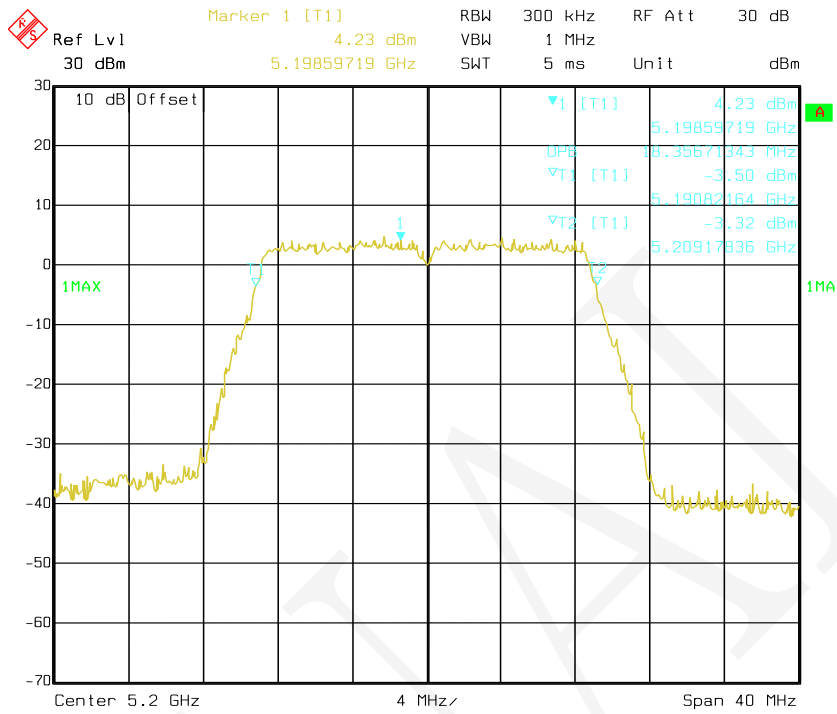


802.11n-HT20 mode, 99% Occupied Bandwidth -5240 MHz, Chain 1

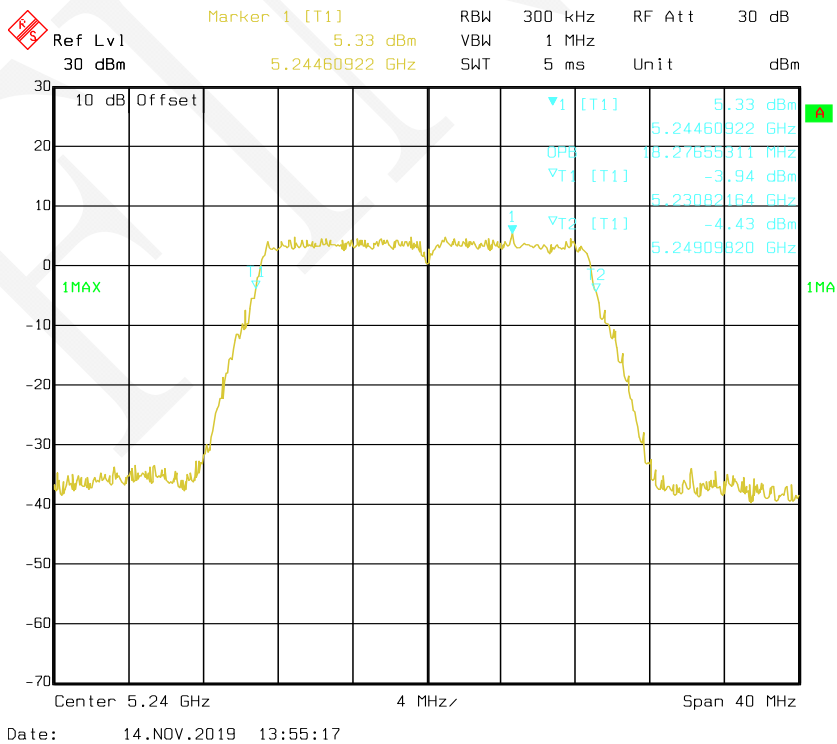


802.11n-HT40 mode, 99% Occupied Bandwidth-5190 MHz, Chain 0

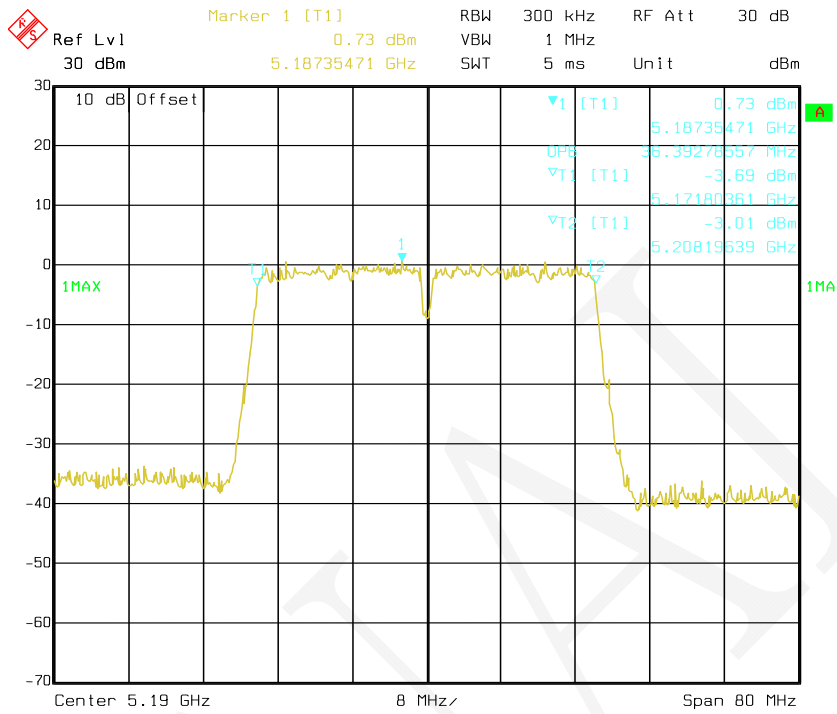

802.11n-HT40 mode, 99% Occupied Bandwidth-5230 MHz, Chain 0

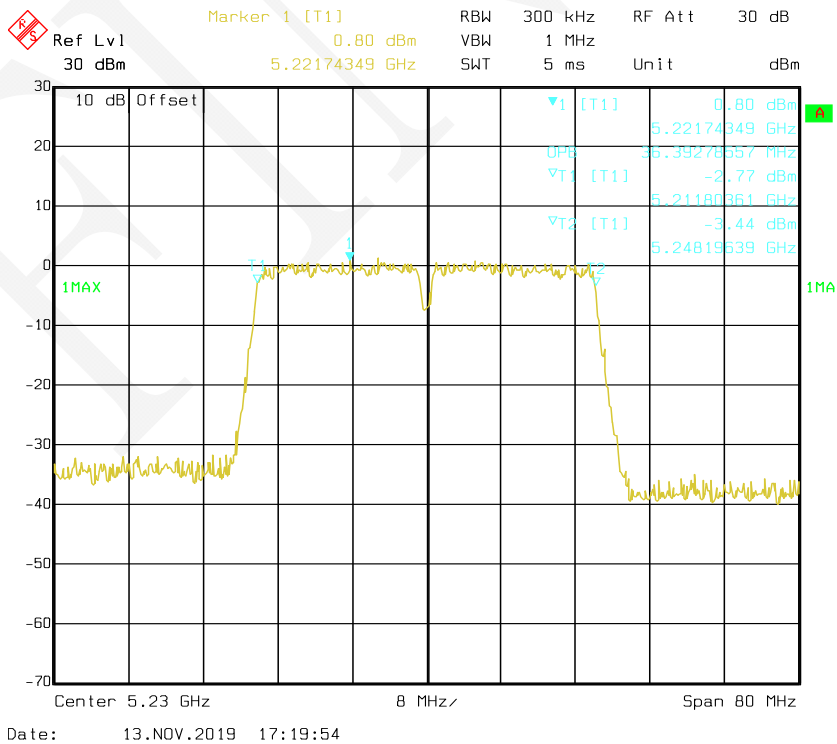


802.11n-HT40 mode, 99% Occupied Bandwidth-5190 MHz, Chain 1

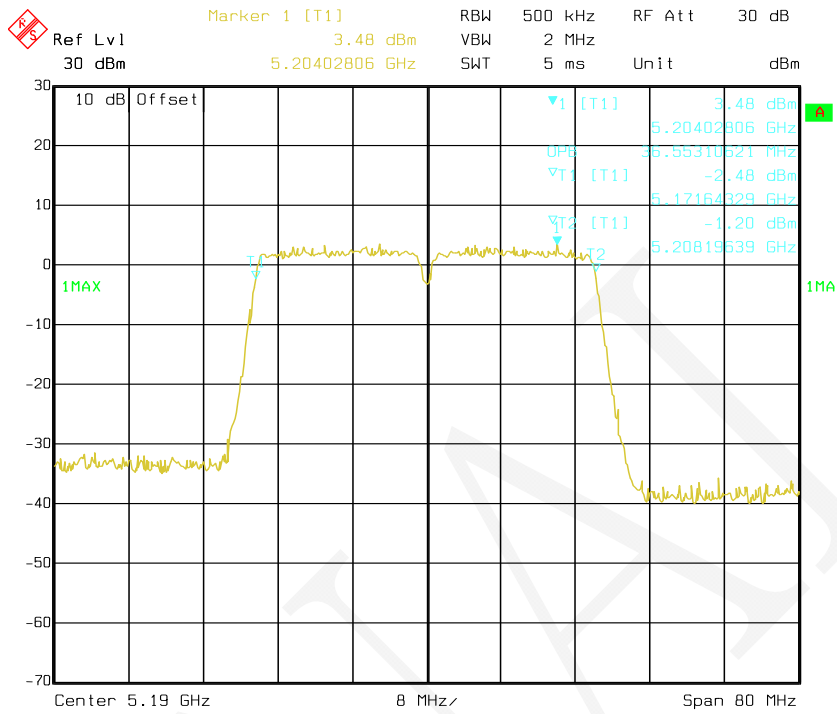


Date: 14.NOV.2019 13:58:45

802.11n-HT40 mode, 99% Occupied Bandwidth-5230 MHz, Chain 1

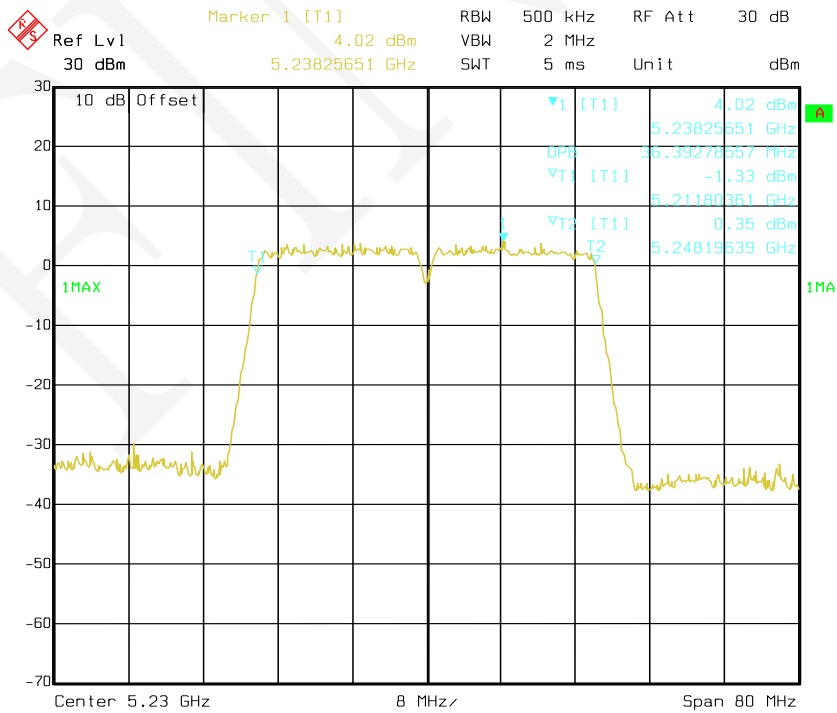


Date: 14.NOV.2019 13:59:37

802.11ac20 mode, 99% Occupied Bandwidth-5180 MHz, Chain 0

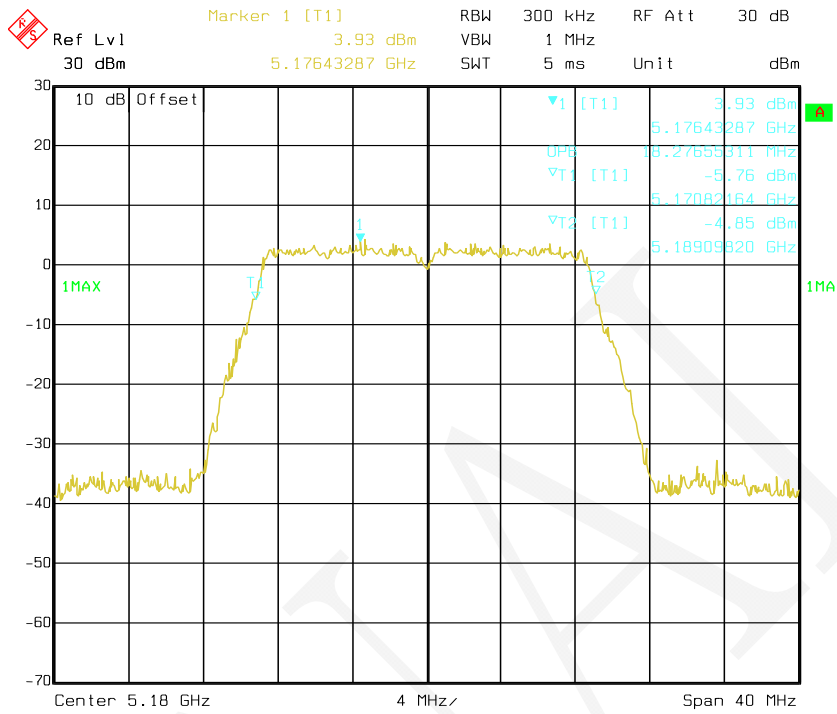


Date: 13.NOV.2019 17:16:08

802.11ac20 mode, 99% Occupied Bandwidth-5200 MHz, Chain 0

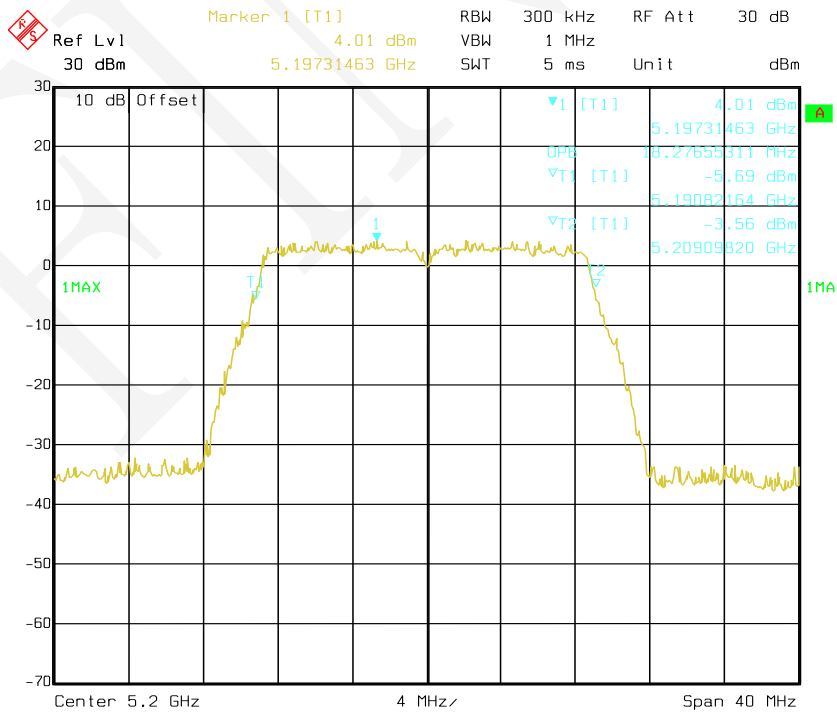


Date: 13.NOV.2019 17:16:38


802.11ac20 mode, 99% Occupied Bandwidth-5240 MHz, Chain 0

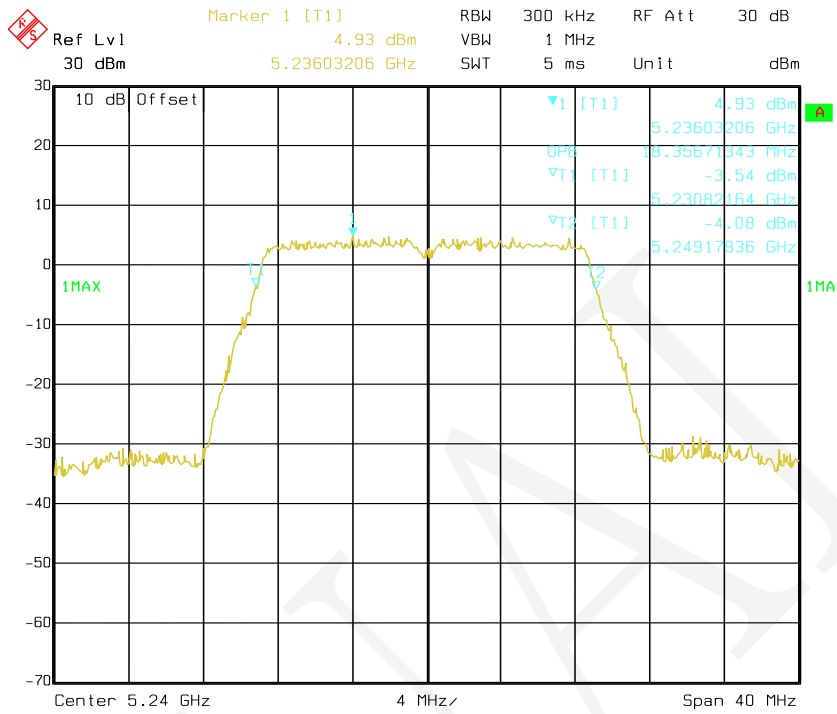

802.11ac20 mode, 99% Occupied Bandwidth-5180 MHz, Chain 1

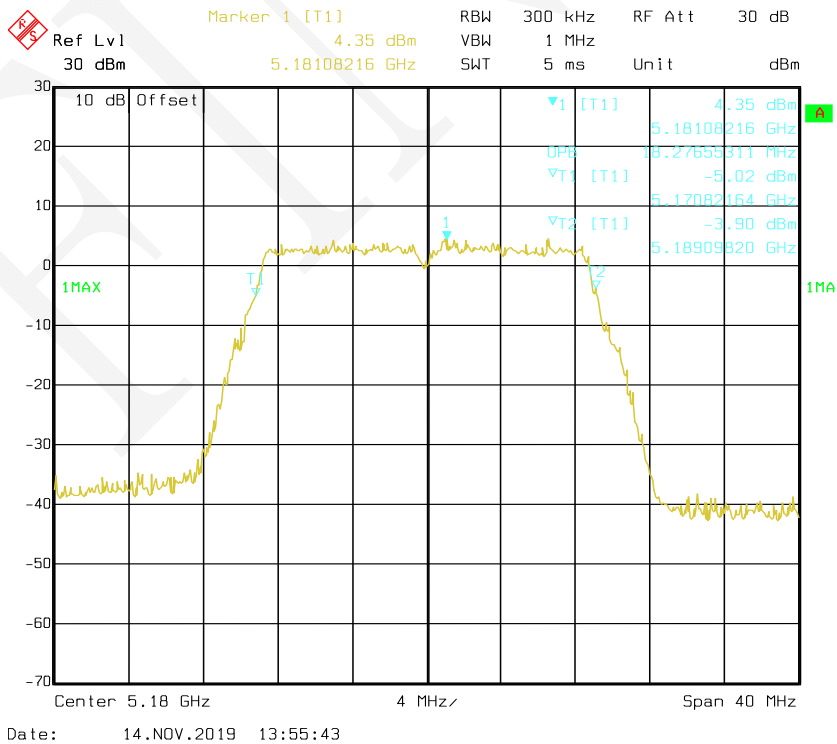


802.11ac20 mode, 99% Occupied Bandwidth-5200 MHz, Chain 1

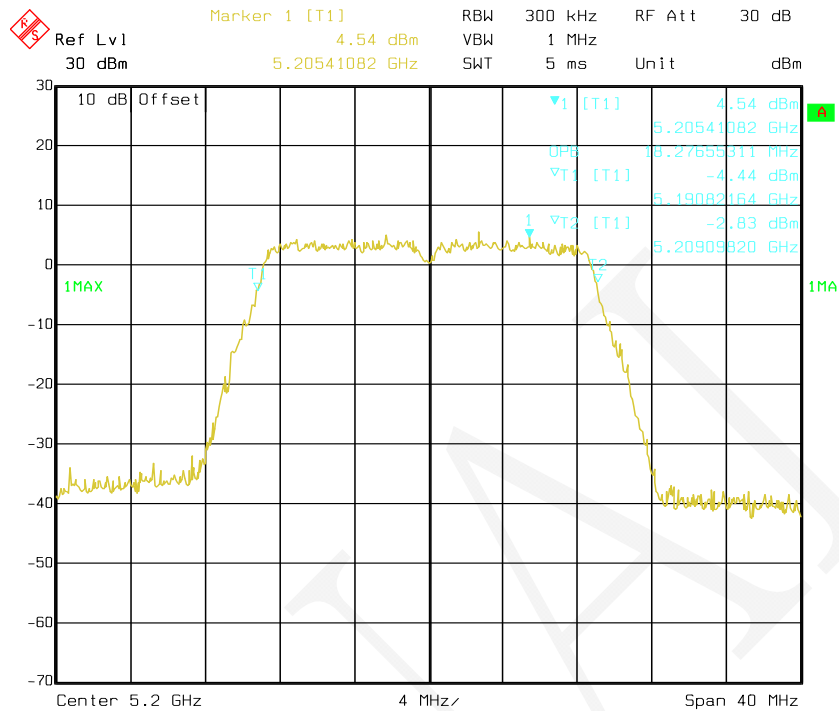


Date: 14.NOV.2019 13:56:17

802.11ac20 mode, 99% Occupied Bandwidth-5240 MHz, Chain 1

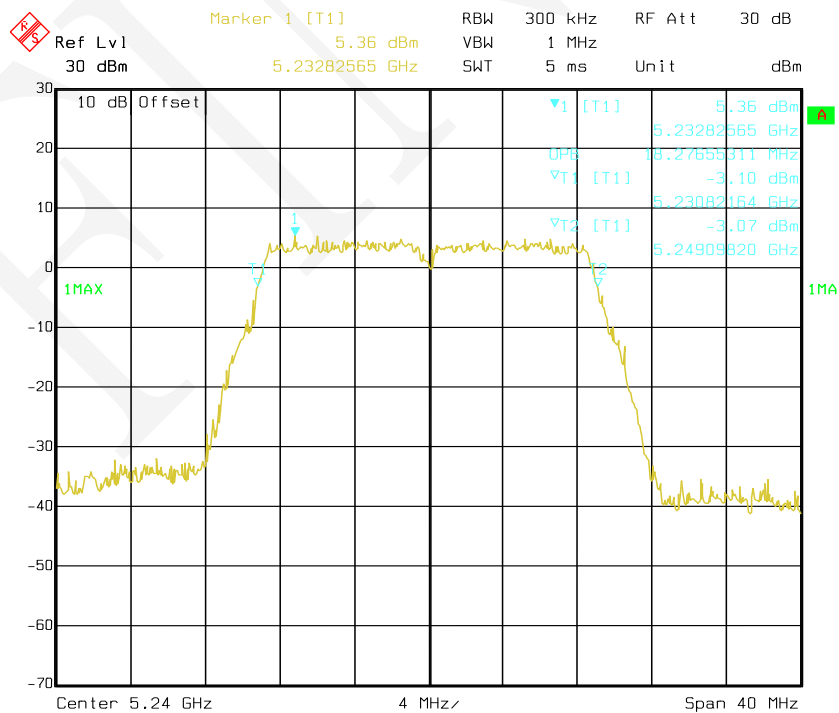


Date: 14.NOV.2019 13:56:45

802.11ac40 mode, 99% Occupied Bandwidth-5190 MHz, Chain 0

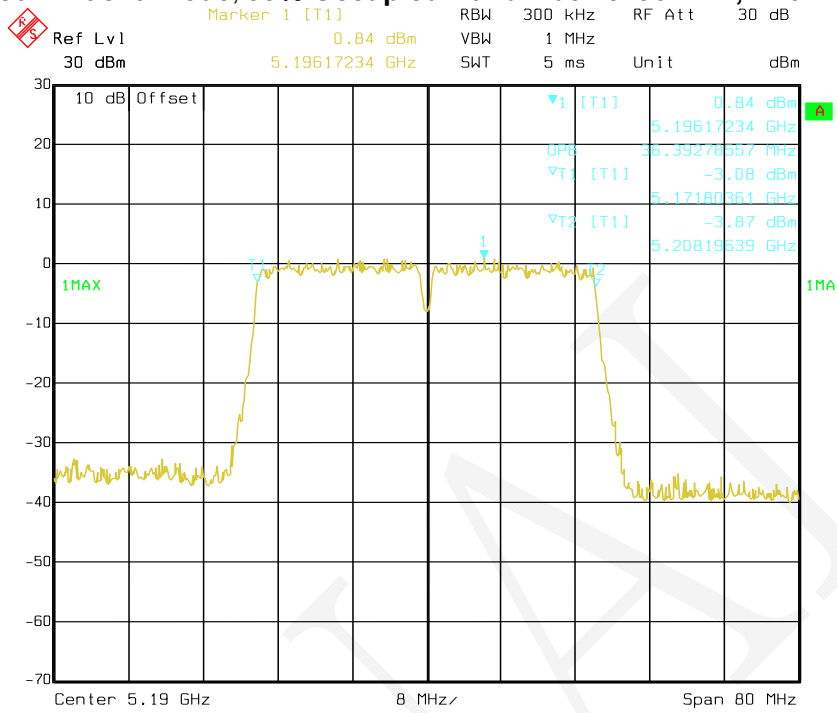


802.11ac40 mode, 99% Occupied Bandwidth-5230 MHz, Chain 0

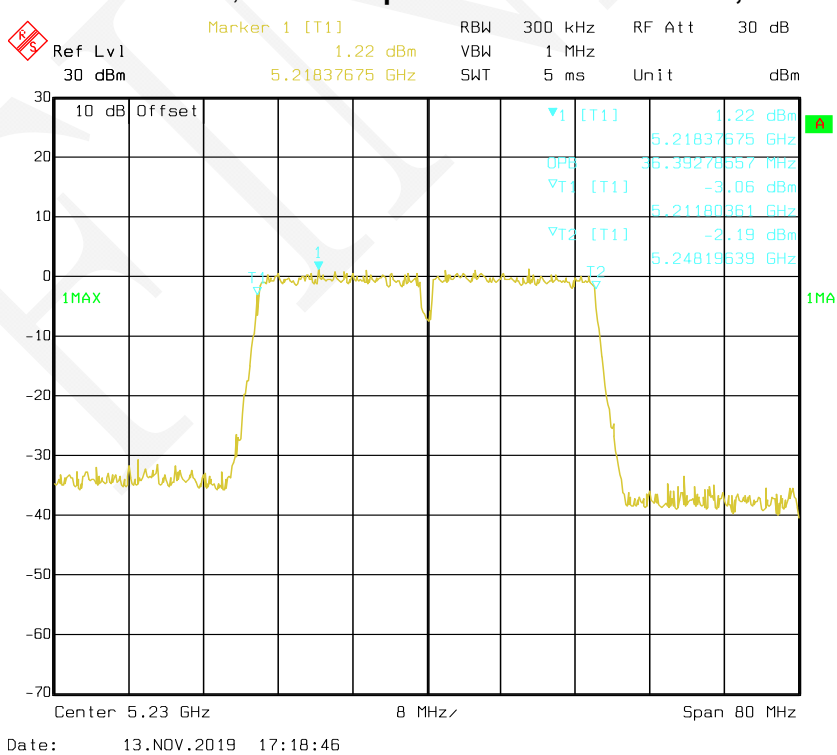

802.11ac40 mode, 99% Occupied Bandwidth-5190 MHz, Chain 1


❖ Ref Lvl 30 dBm
 Marker 1 [T1] 3.48 dBm
 5.19360721 GHz
 RBW 500 kHz RF Att 30 dB
 VBW 2 MHz
 SWT 5 ms Unit dBm

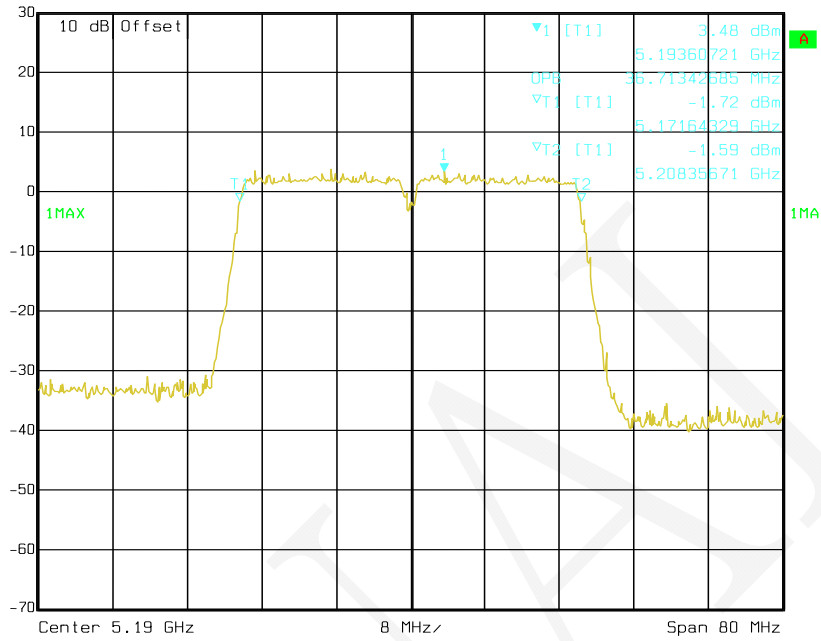

Date: 14.NOV.2019 13:57:41


802.11ac40 mode, 99% Occupied Bandwidth-5230 MHz, Chain 1

❖ Ref Lvl 30 dBm
 Marker 1 [T1] 4.14 dBm
 5.23488978 GHz
 RBW 500 kHz RF Att 30 dB
 VBW 2 MHz
 SWT 5 ms Unit dBm

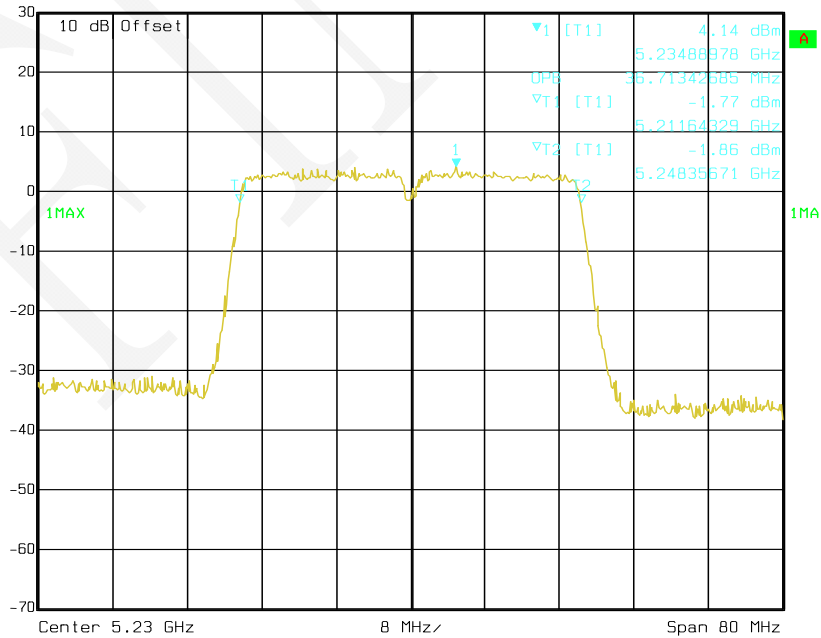


Date: 14.NOV.2019 13:58:11

802.11ac80 mode, 99% Occupied Bandwidth-5210 MHz, Chain 0

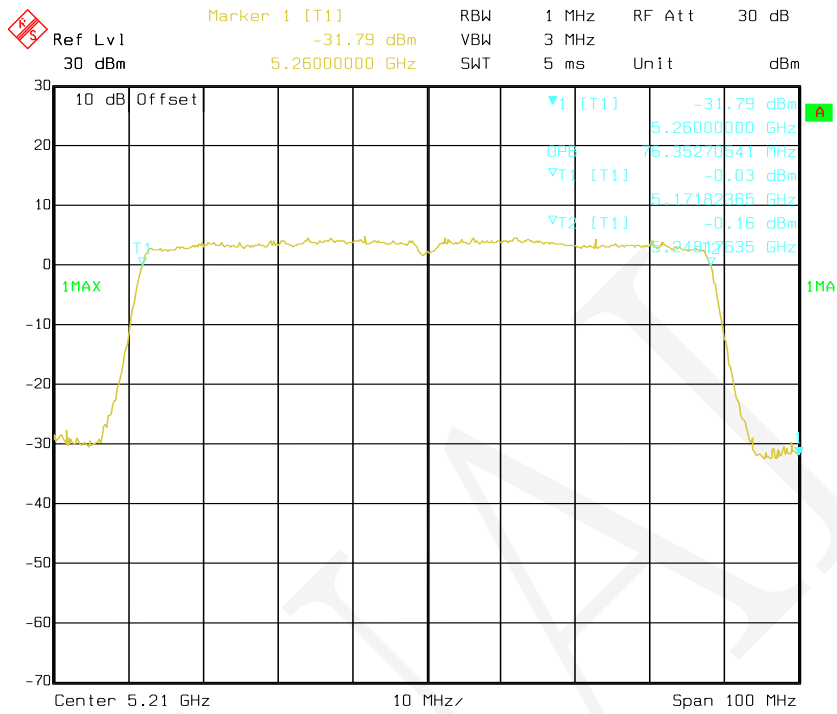

Date: 14.NOV.2019 10:10:41

802.11ac80 mode, 99% Occupied Bandwidth-5210 MHz, Chain 1

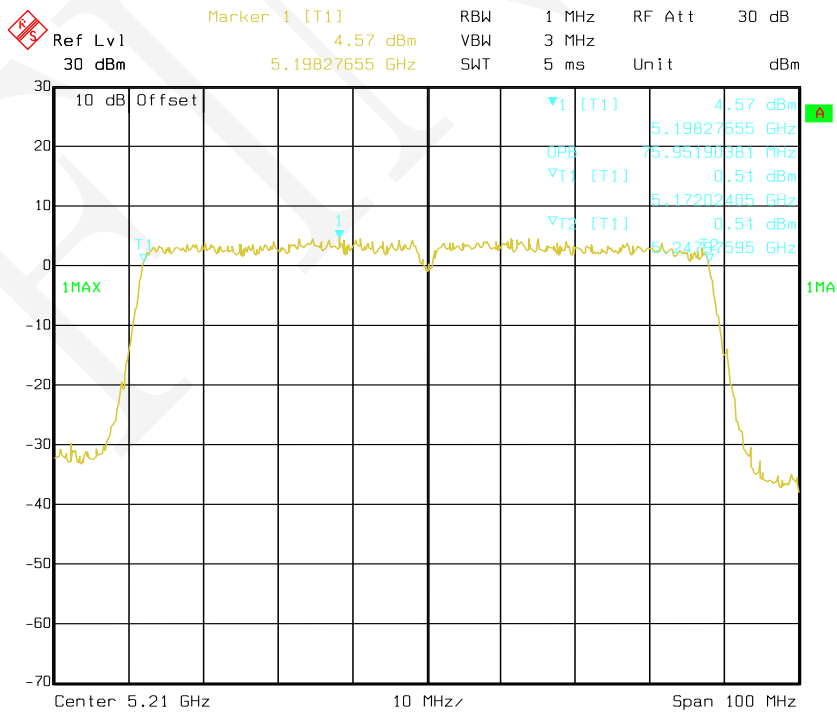


Date: 14.NOV.2019 14:01:46

For 5725-5850 MHz:

Mode	Channel	Frequency (MHz)	6dB Bandwidth (MHz)		99% Occupied Bandwidth (MHz)	
			Chain 0	Chain 1	Chain 0	Chain 1
802.11a	Low	5745	16.43	16.51	17.39	17.23
	Middle	5785	16.51	16.43	17.39	17.31
	High	5825	16.51	16.43	17.23	17.31
802.11n-HT20	Low	5745	17.64	17.64	18.28	18.28
	Middle	5785	17.64	17.64	18.28	19.28
	High	5825	17.64	17.64	18.28	18.28
802.11n-HT40	Low	5755	36.39	36.39	36.39	36.55
	High	5795	36.39	36.39	36.39	36.71
802.11ac20	Low	5745	17.64	17.64	18.28	18.28
	Middle	5785	17.64	17.64	18.28	18.28
	High	5825	17.80	17.64	18.36	18.28
802.11ac40	Low	5755	36.55	36.39	36.39	36.55
	High	5795	36.39	36.39	36.39	36.71
802.11ac80	/	5775	76.35	76.35	75.95	76.15


Note: The 99% Occupied Bandwidth doesn't extend U-NII-2C band 5470-5725MHz.

802.11a mode, 6 dB Bandwidth-5745 MHz, Chain 0

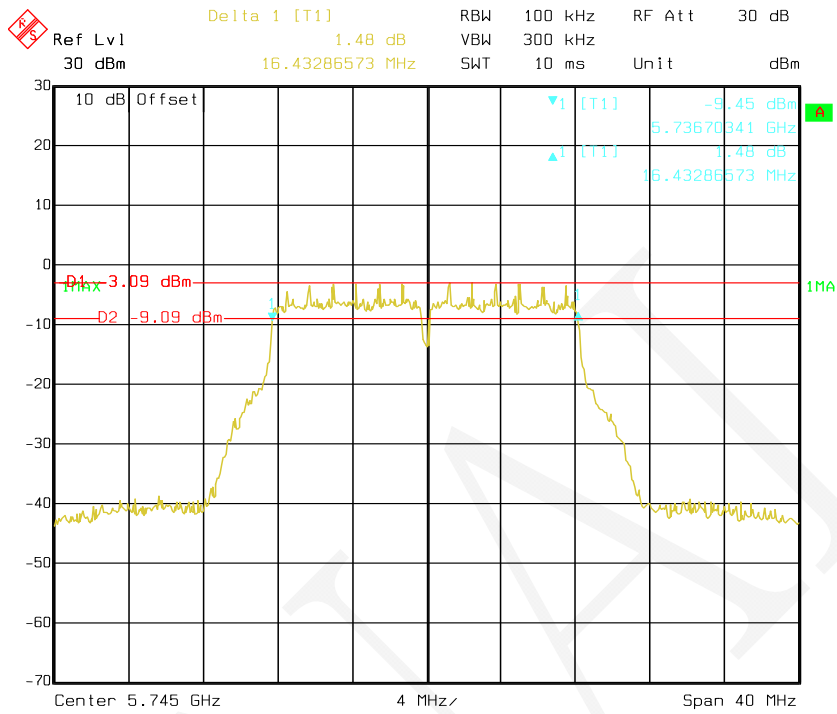


Date: 14.NOV.2019 13:07:22

802.11a mode, 6 dB Bandwidth-5785 MHz, Chain 0

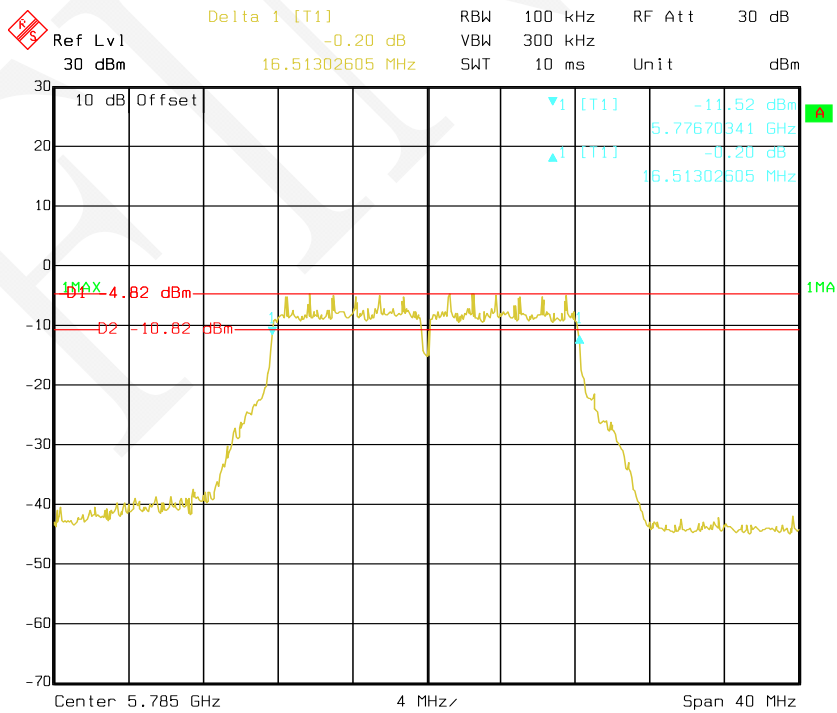


Date: 14.NOV.2019 13:09:12

802.11a mode, 6 dB Bandwidth-5825 MHz, Chain 0

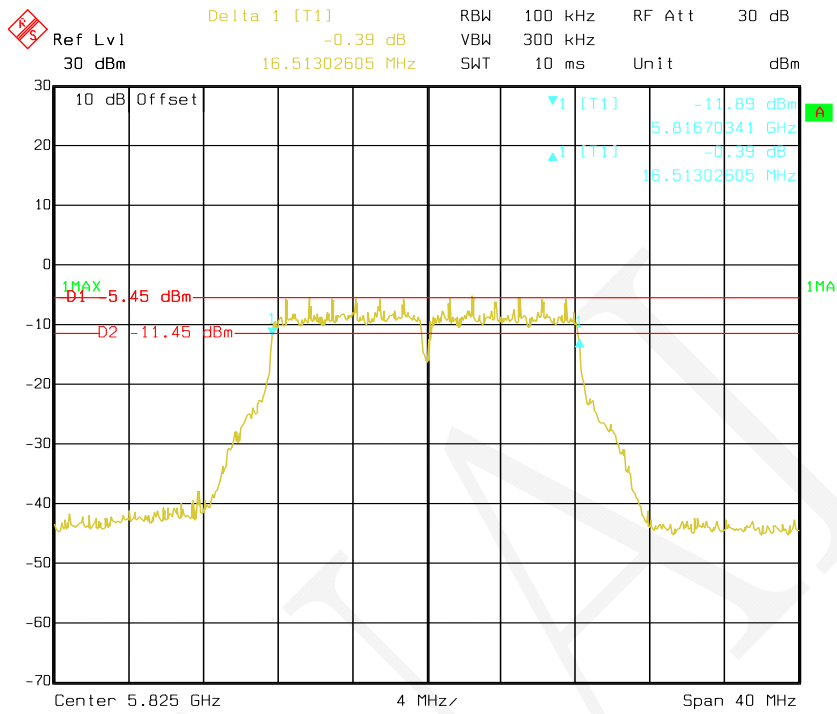


Date: 14.NOV.2019 13:10:18

802.11a mode, 6 dB Bandwidth-5745 MHz, Chain 1

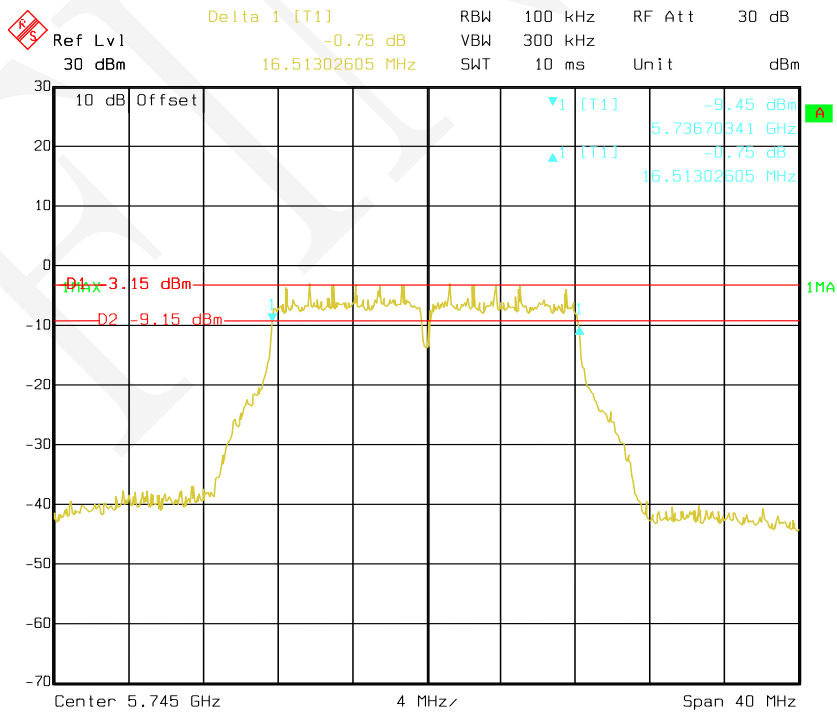


Date: 14.NOV.2019 11:13:49

802.11a mode, 6 dB Bandwidth-5785 MHz, Chain 1

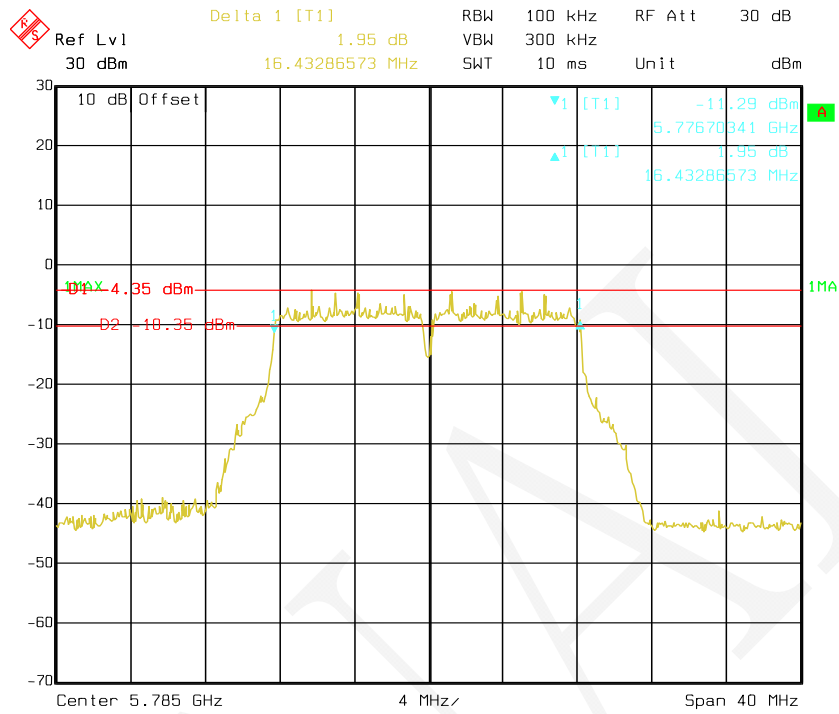


Date: 14.NOV.2019 11:19:23

802.11a mode, 6 dB Bandwidth-5825 MHz, Chain 1

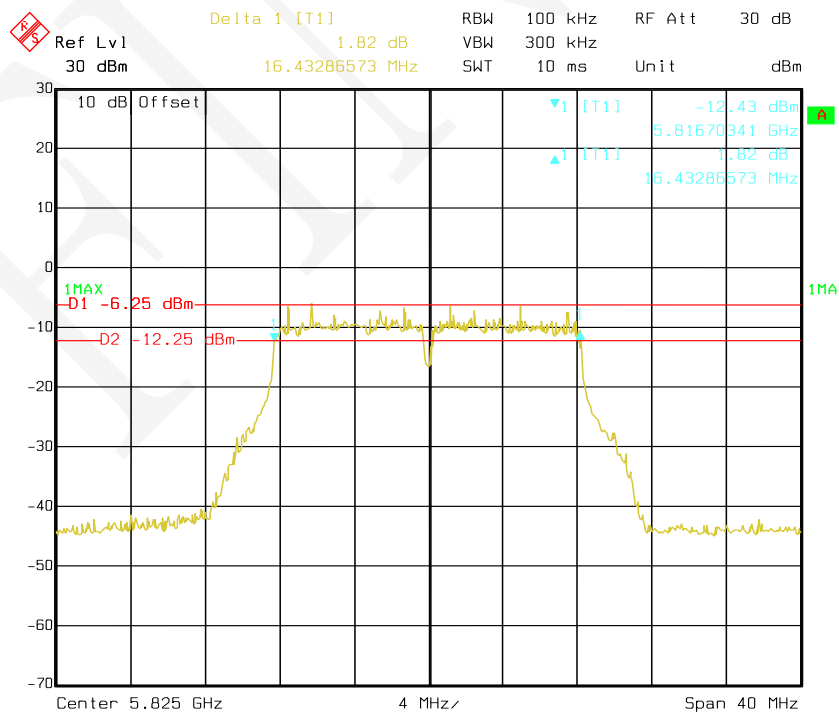


Date: 14.NOV.2019 11:21:02

802.11n-HT20 mode, 6 dB Bandwidth-5745 MHz, Chain 0

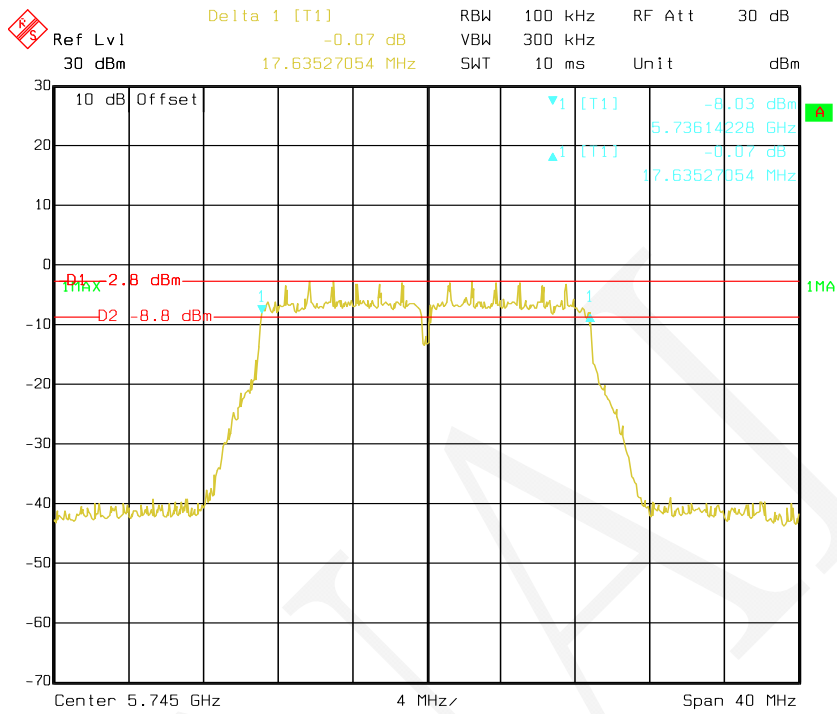


Date: 14.NOV.2019 13:12:06

802.11n-HT20 mode, 6 dB Bandwidth-5785 MHz, Chain 0

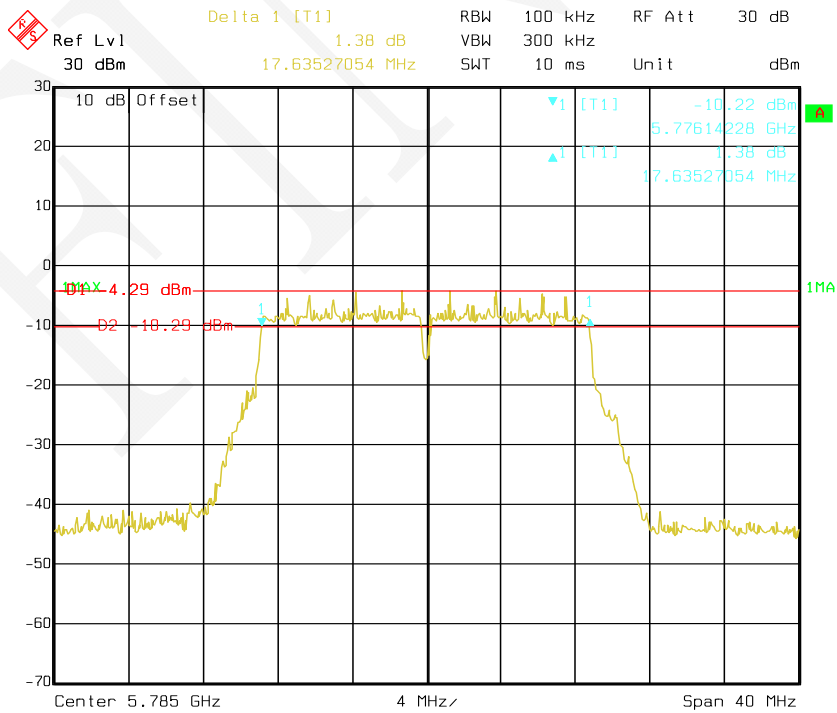


Date: 14.NOV.2019 13:13:28

802.11n-HT20 mode, 6 dB Bandwidth-5825 MHz, Chain 0

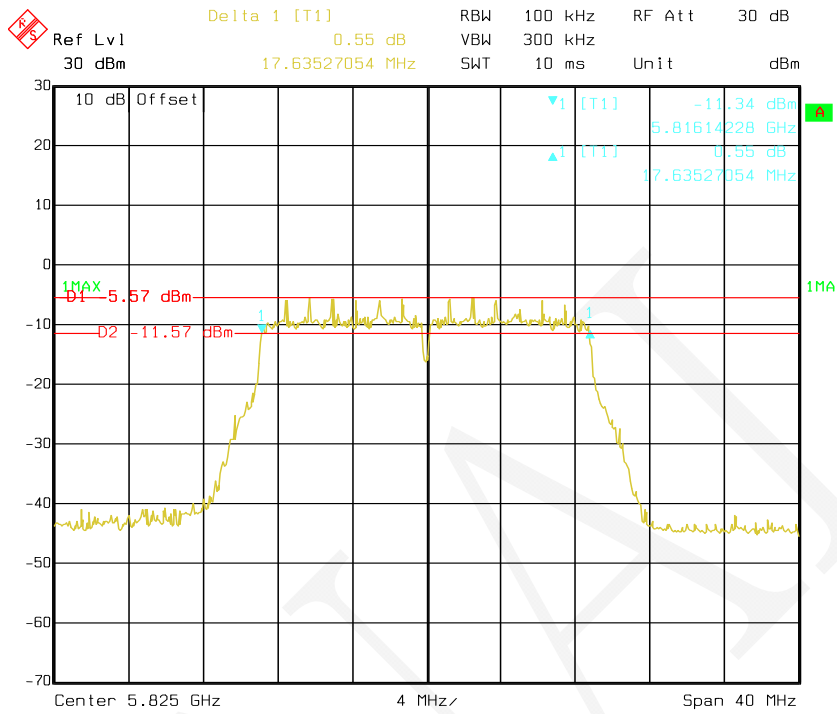


Date: 14.NOV.2019 13:14:21

802.11n-HT20 mode, 6 dB Bandwidth-5745 MHz, Chain 1

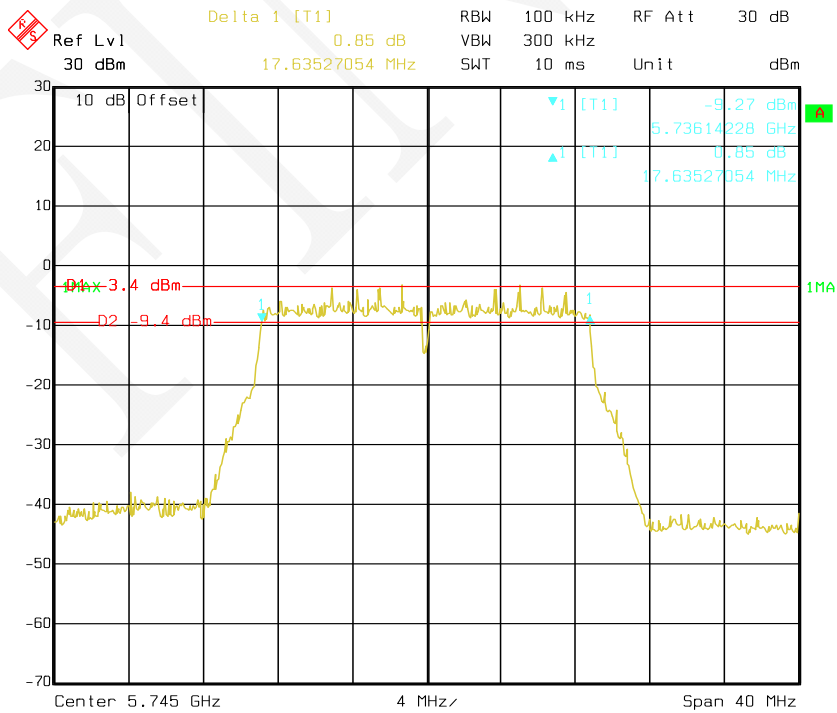


Date: 14.NOV.2019 11:22:44

802.11n-HT20 mode, 6 dB Bandwidth-5785 MHz, Chain 1

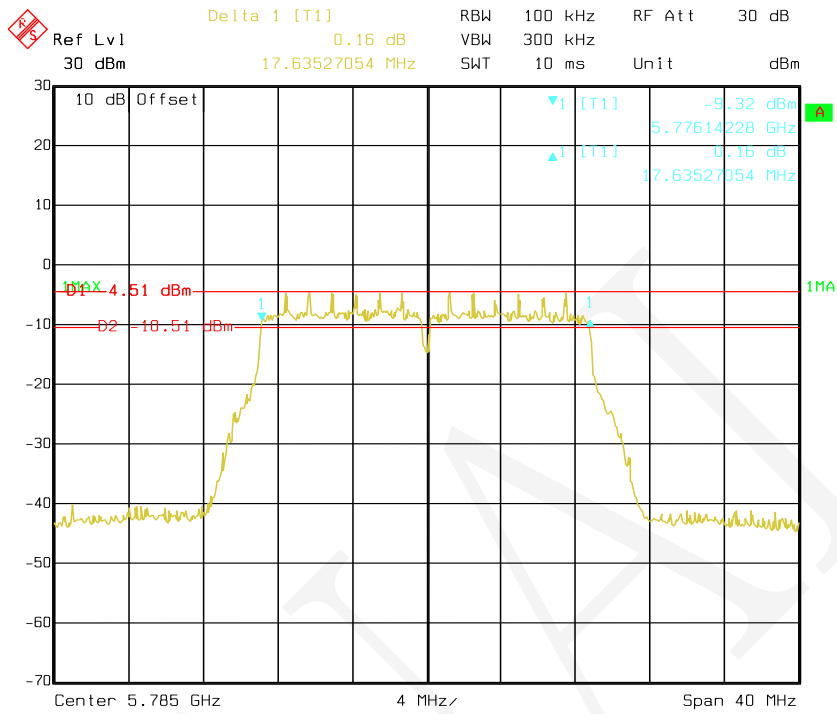


Date: 14.NOV.2019 11:24:00

802.11n-HT20 mode, 6 dB Bandwidth-5825 MHz, Chain 1

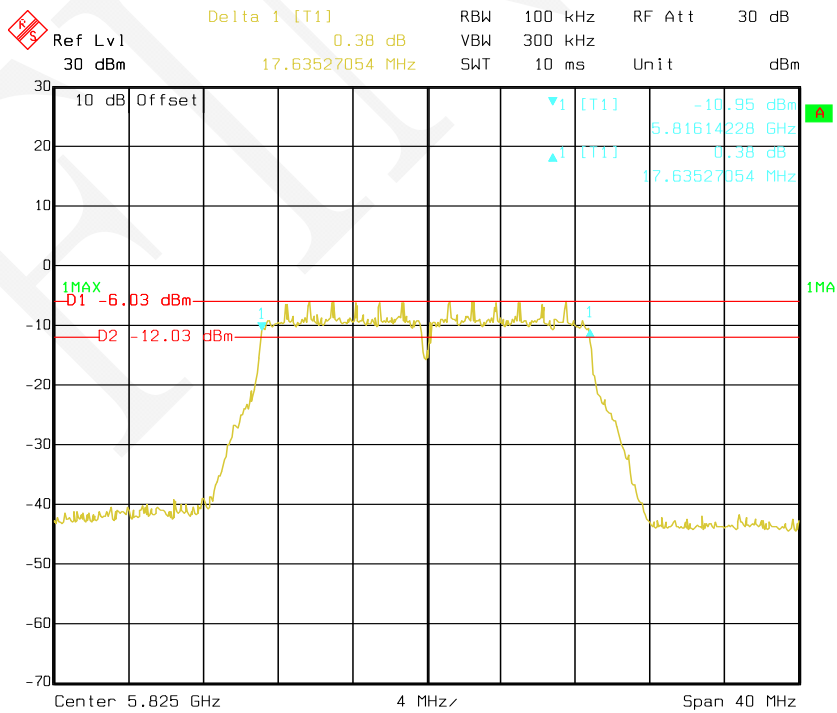


Date: 14.NOV.2019 11:26:17

802.11n-HT40 mode, 6 dB Bandwidth-5755 MHz, Chain 0

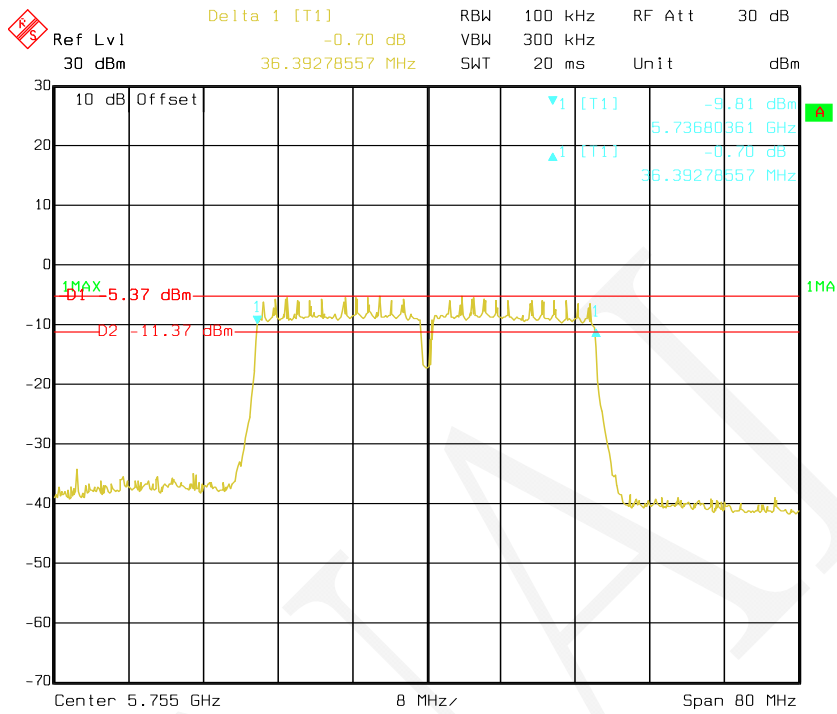


Date: 14.NOV.2019 13:25:43

802.11n-HT40 mode, 6 dB Bandwidth-5795 MHz, Chain 0

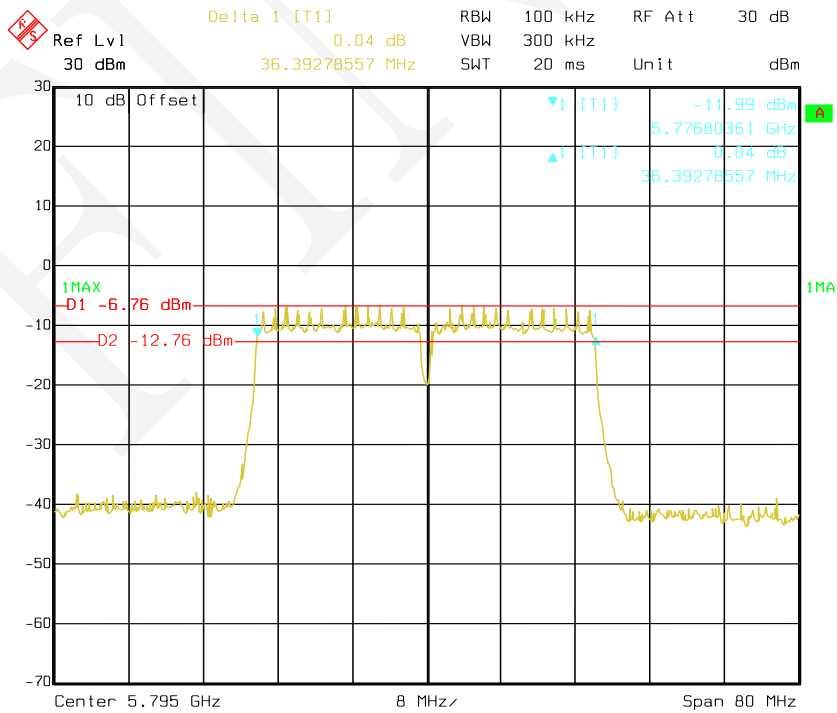


Date: 14.NOV.2019 13:27:00

802.11n-HT40 mode, 6 dB Bandwidth-5755 MHz, Chain 1

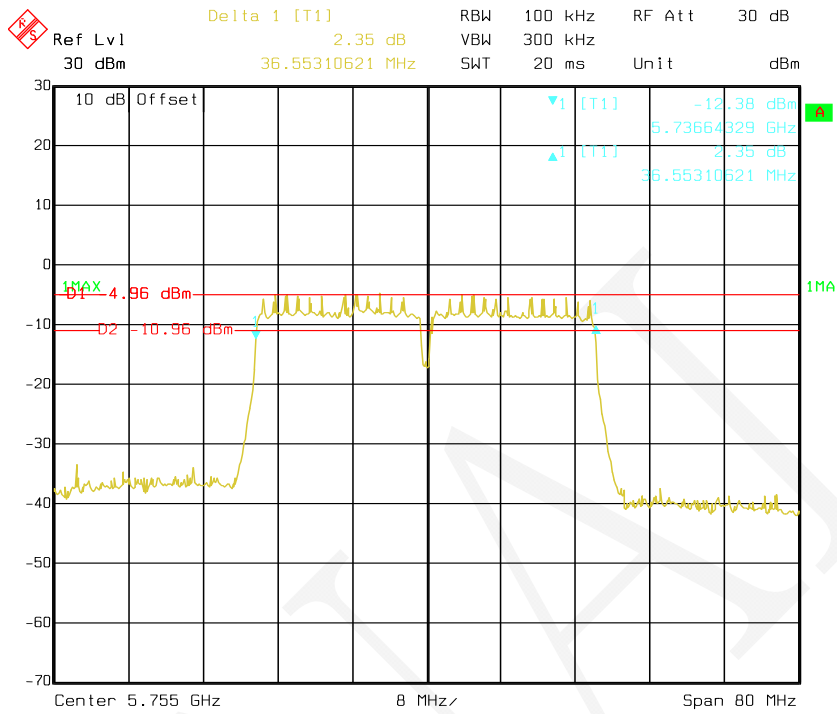


Date: 14.NOV.2019 11:40:47

802.11n-HT40 mode, 6 dB Bandwidth-5795 MHz, Chain 1

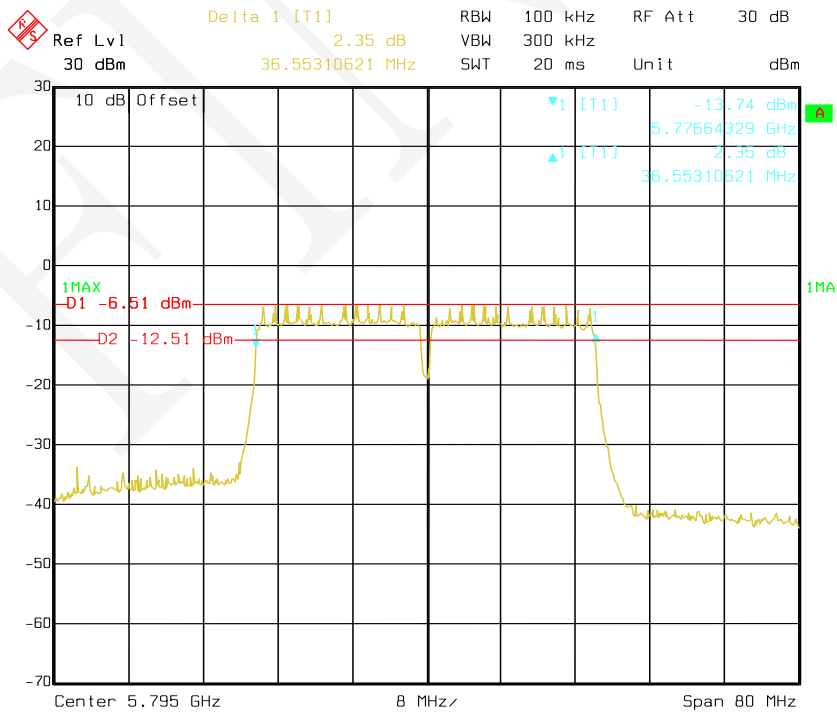


Date: 14.NOV.2019 11:38:55

802.11ac20 mode, 6 dB Bandwidth-5745 MHz, Chain 0

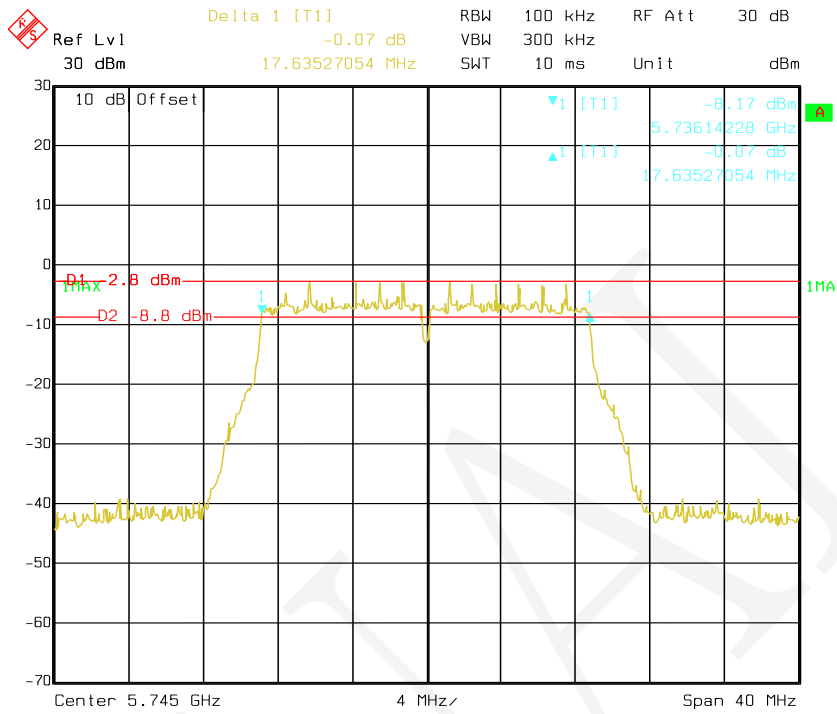


Date: 14.NOV.2019 13:15:38

802.11ac20 mode, 6 dB Bandwidth-5785 MHz, Chain 0

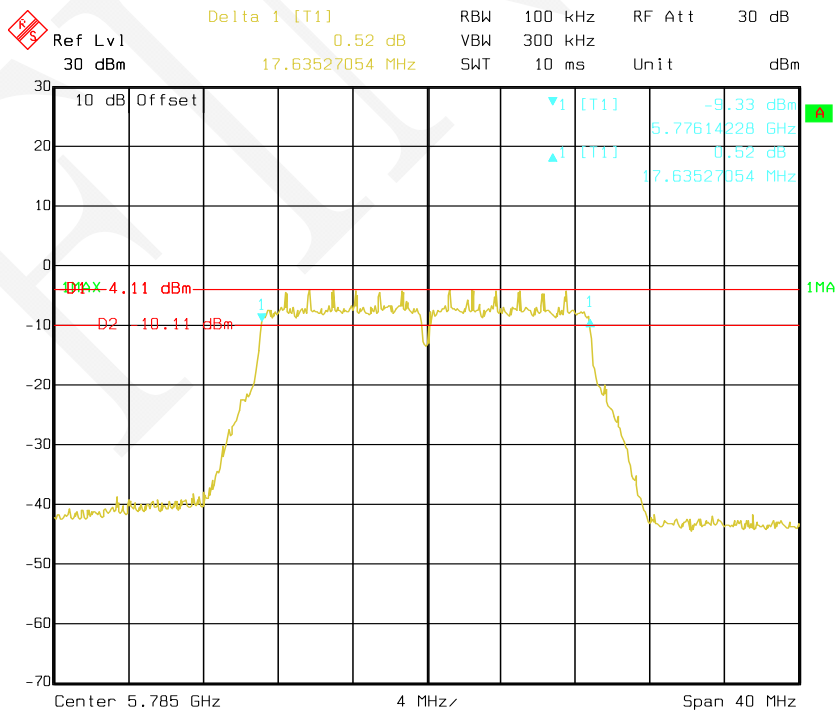


Date: 14.NOV.2019 13:18:09

802.11ac20 mode, 6 dB Bandwidth-5825 MHz, Chain 0

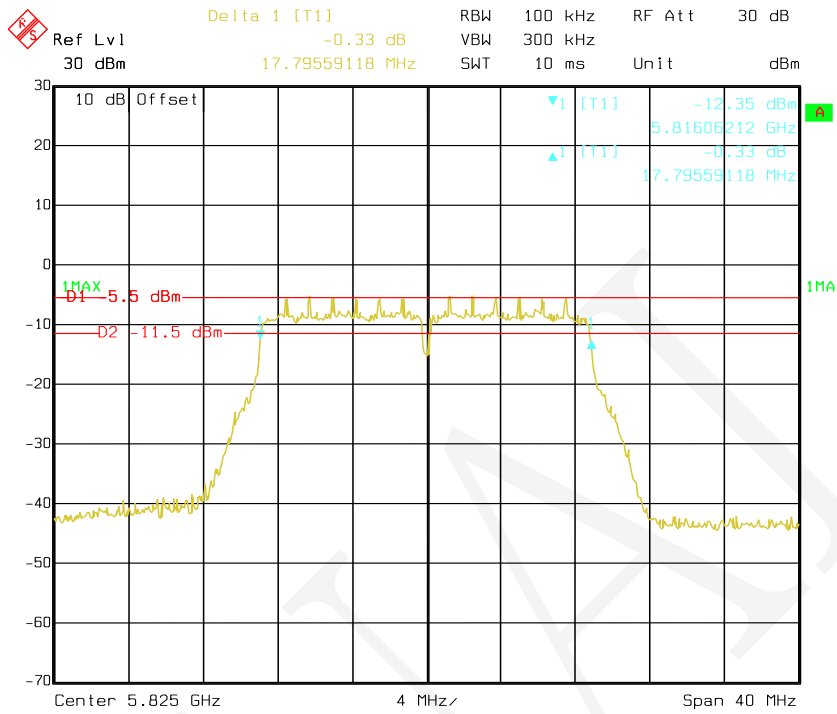


Date: 14.NOV.2019 13:20:13

802.11ac20 mode, 6 dB Bandwidth-5745 MHz, Chain 1

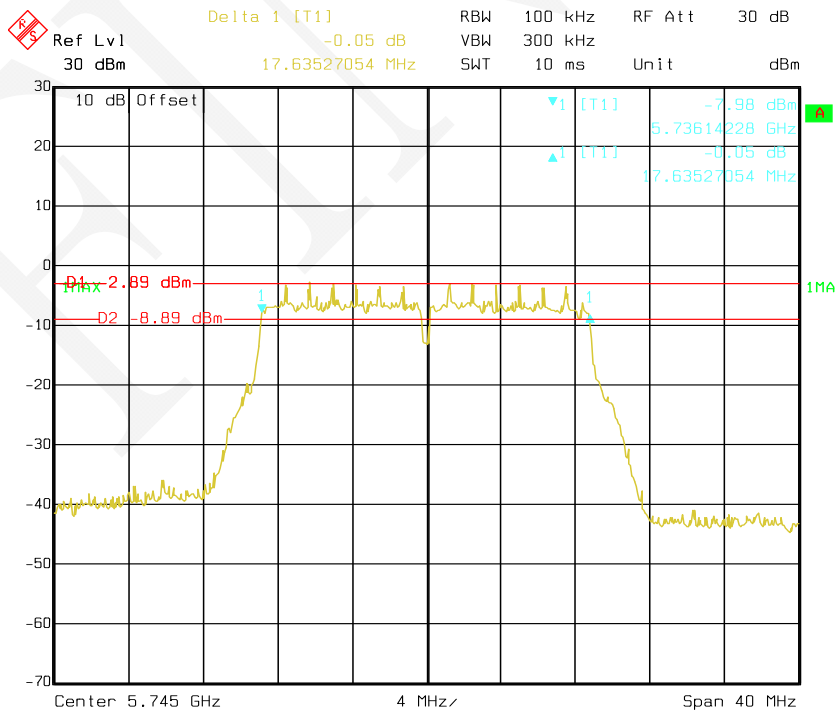


Date: 14.NOV.2019 11:28:07

802.11ac20 mode, 6 dB Bandwidth-5785 MHz, Chain 1

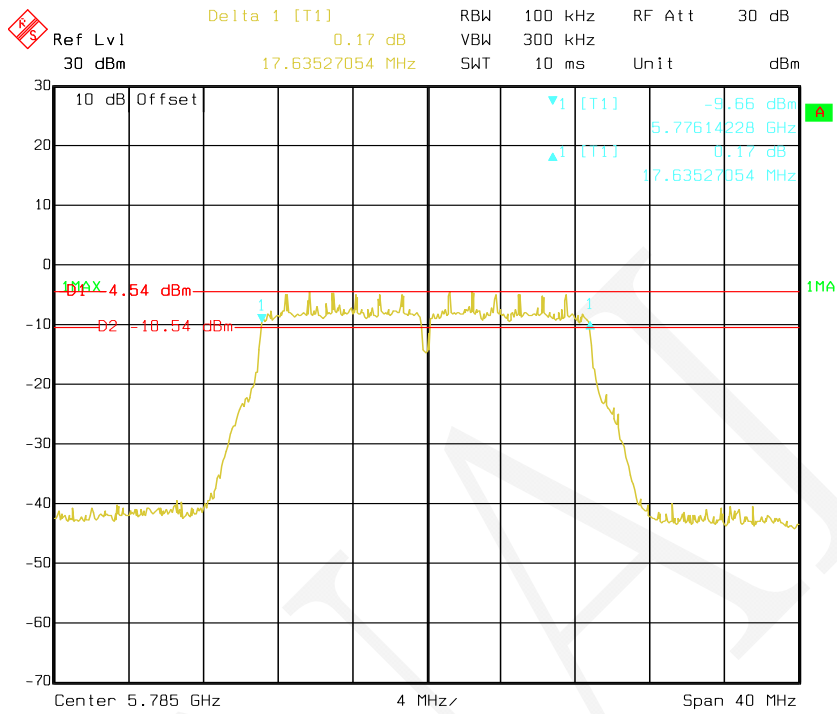


Date: 14.NOV.2019 11:30:18

802.11ac20 mode, 6 dB Bandwidth-5825 MHz, Chain 1

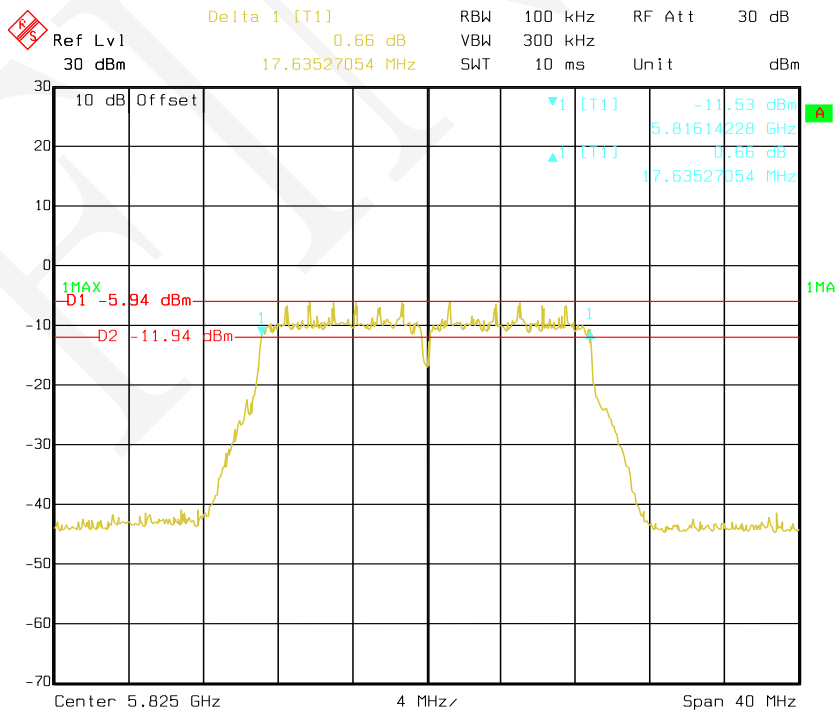


Date: 14.NOV.2019 11:32:03

802.11ac40 mode, 6 dB Bandwidth-5755 MHz, Chain 0

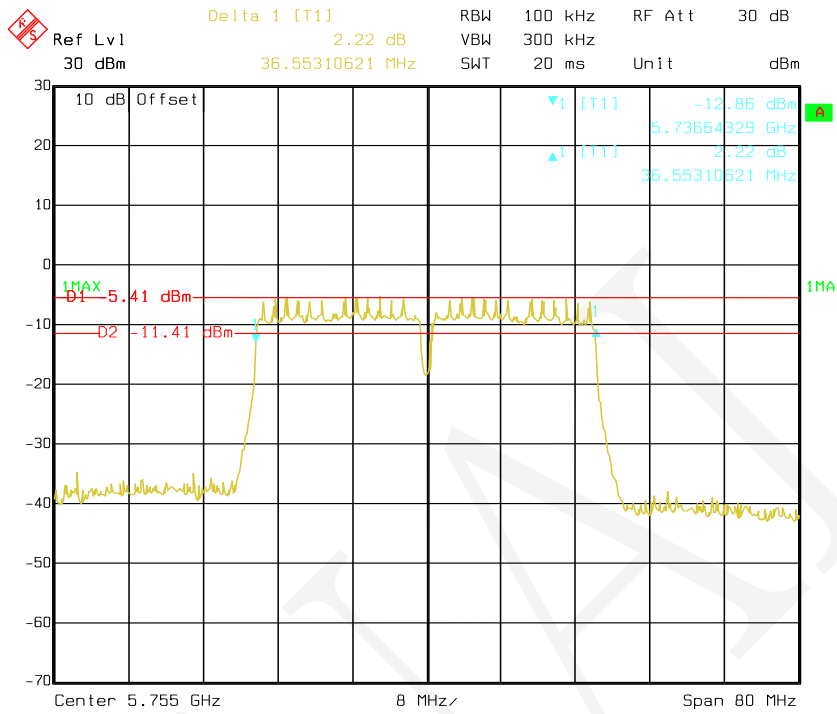


Date: 14.NOV.2019 13:21:43

802.11ac40 mode, 6 dB Bandwidth-5795 MHz, Chain 0

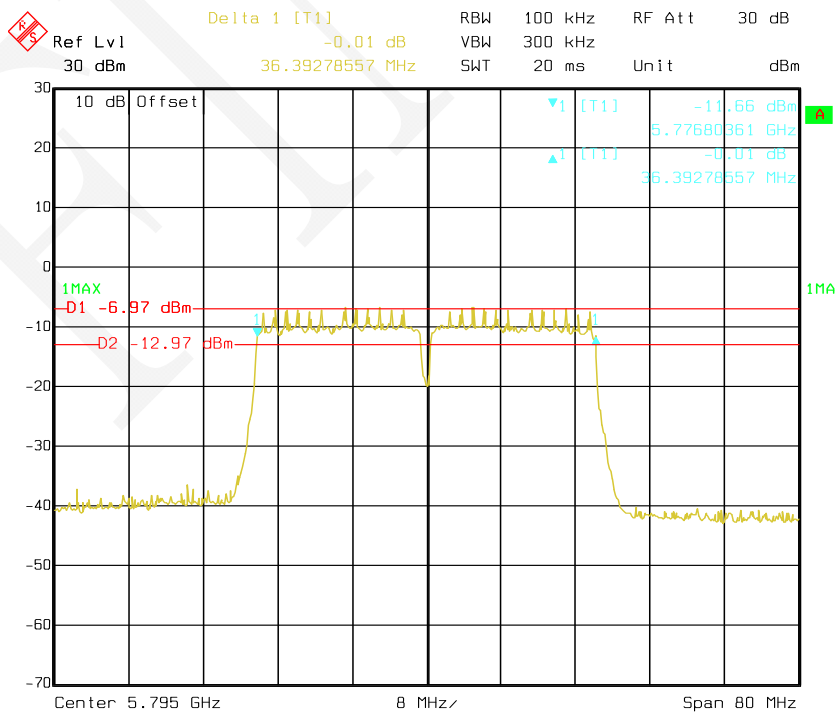


Date: 14.NOV.2019 13:22:47

802.11ac40 mode, 6 dB Bandwidth-5755 MHz, Chain 1

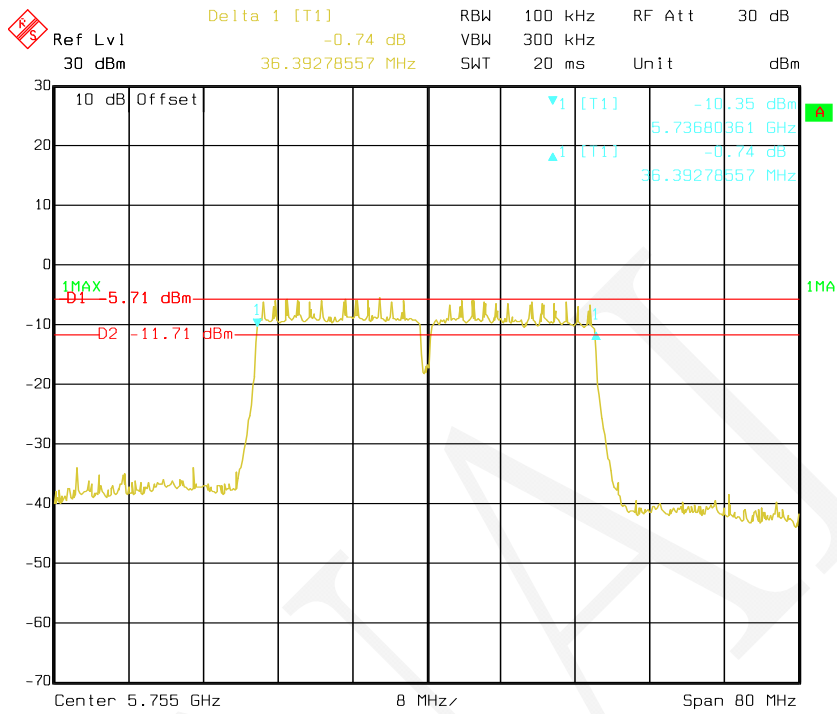


Date: 14.NOV.2019 11:33:18

802.11ac40 mode, 6 dB Bandwidth-5795 MHz, Chain 1

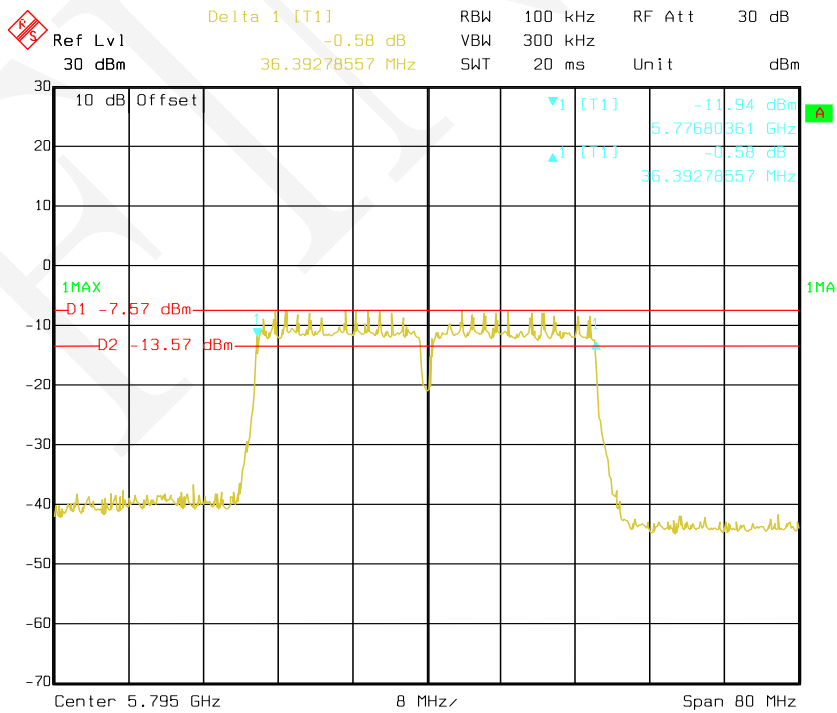


Date: 14.NOV.2019 11:34:33

802.11ac80 mode, 6 dB Bandwidth-5775 MHz, Chain 0

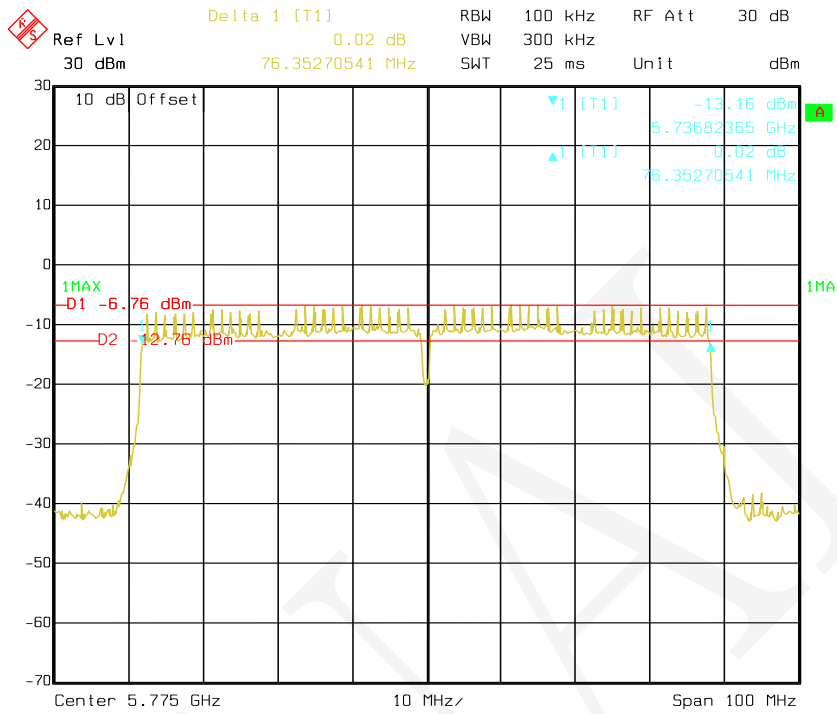


Date: 19.NOV.2019 11:25:19

802.11ac80 mode, 6 dB Bandwidth-5775 MHz, Chain 1

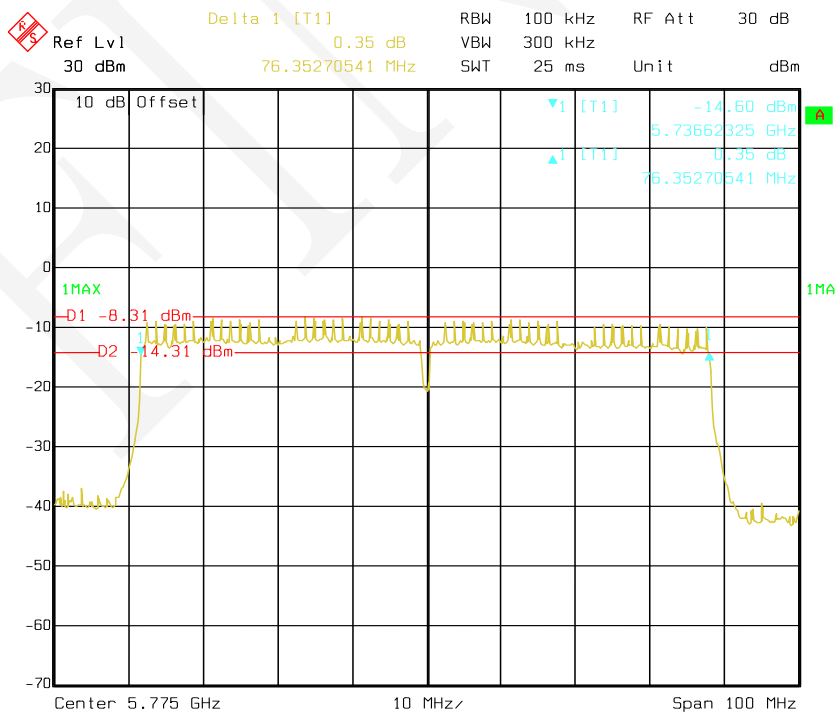


Date: 14.NOV.2019 11:46:27


802.11a mode, 99% Occupied Bandwidth-5745 MHz, Chain 0

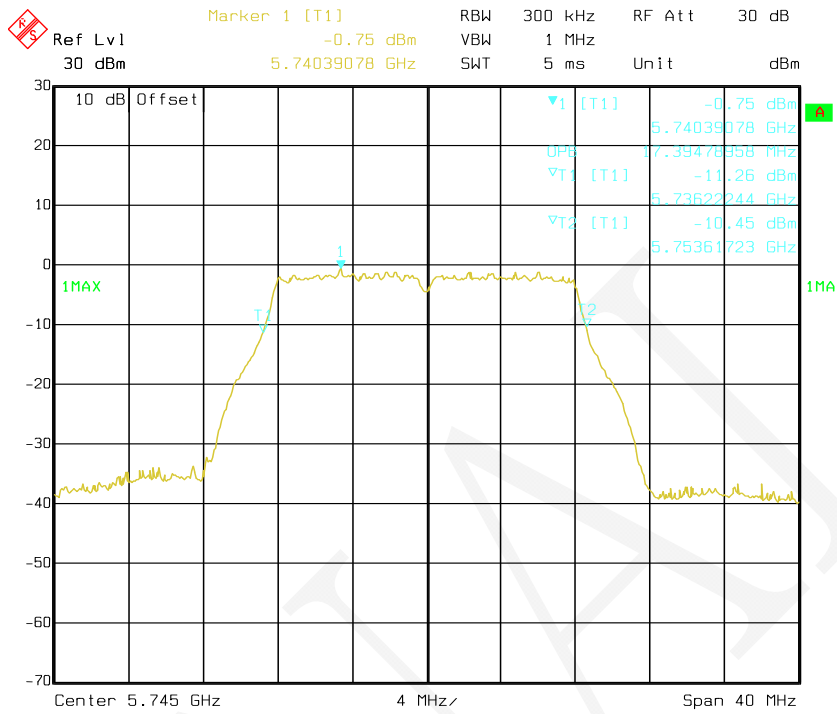

802.11a mode, 99% Occupied Bandwidth -5785 MHz, Chain 0

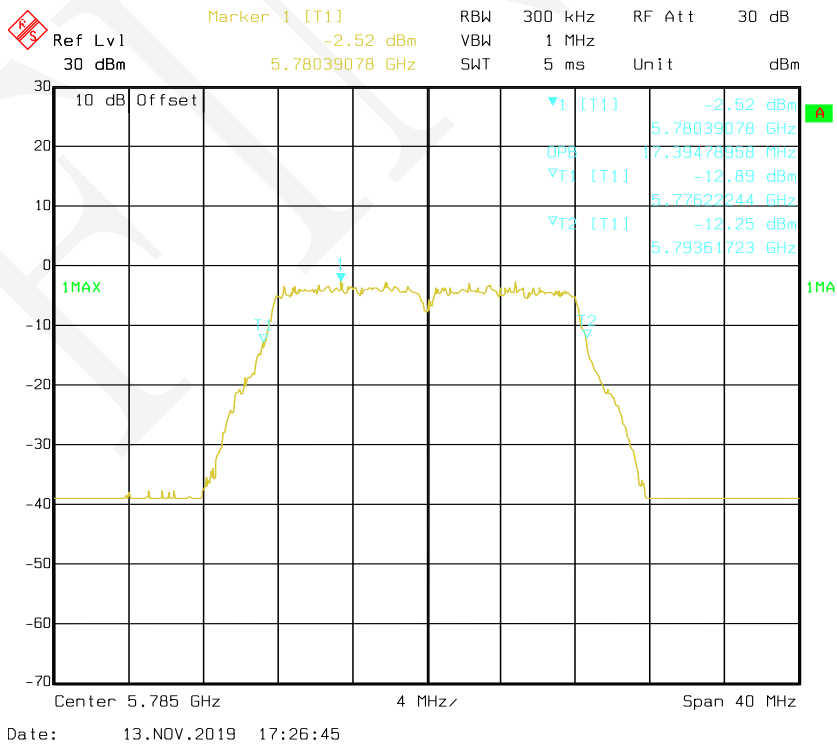


802.11a mode, 99% Occupied Bandwidth -5825 MHz, Chain 0

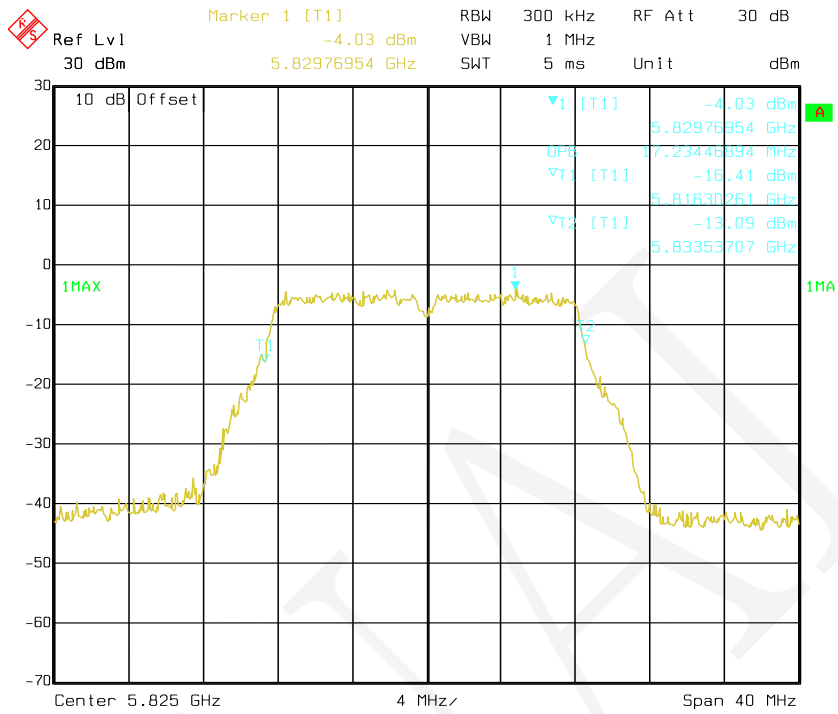


Date: 13.NOV.2019 17:27:11

802.11a mode, 99% Occupied Bandwidth-5745 MHz, Chain 1

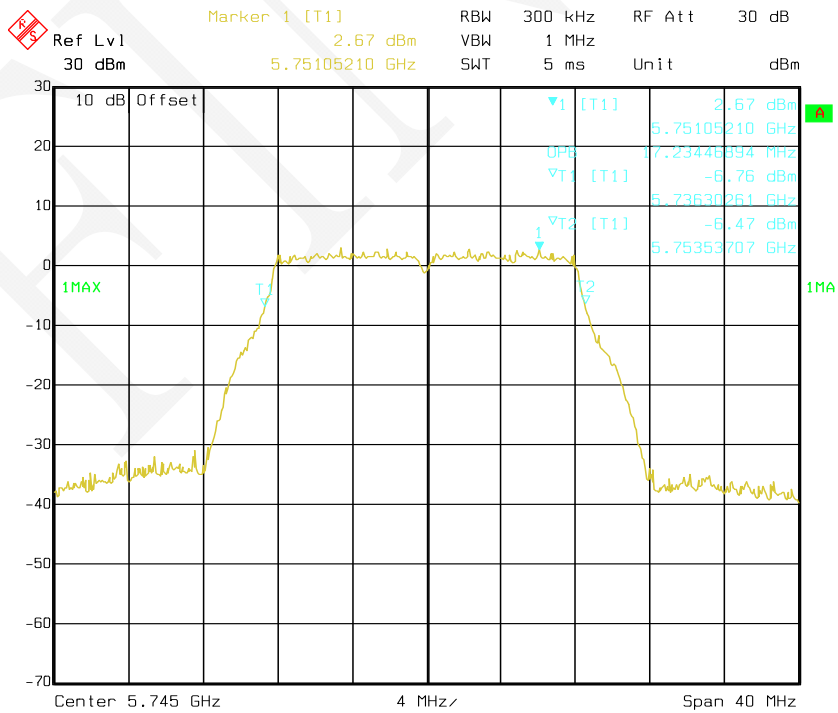


Date: 14.NOV.2019 14:20:51

802.11a mode, 99% Occupied Bandwidth -5785 MHz, Chain 1

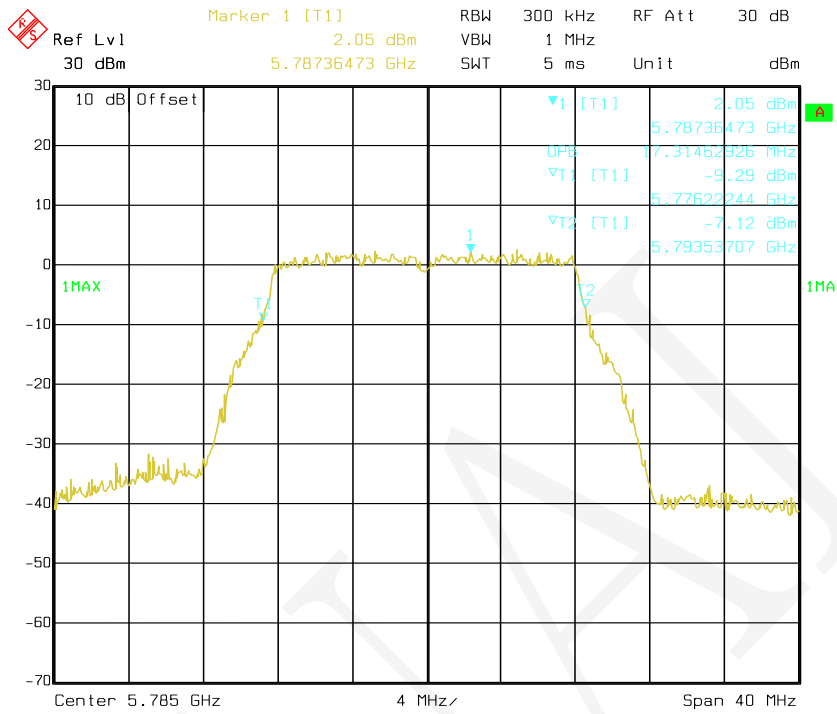


Date: 14.NOV.2019 14:21:16

802.11a mode, 99% Occupied Bandwidth -5825 MHz, Chain 1

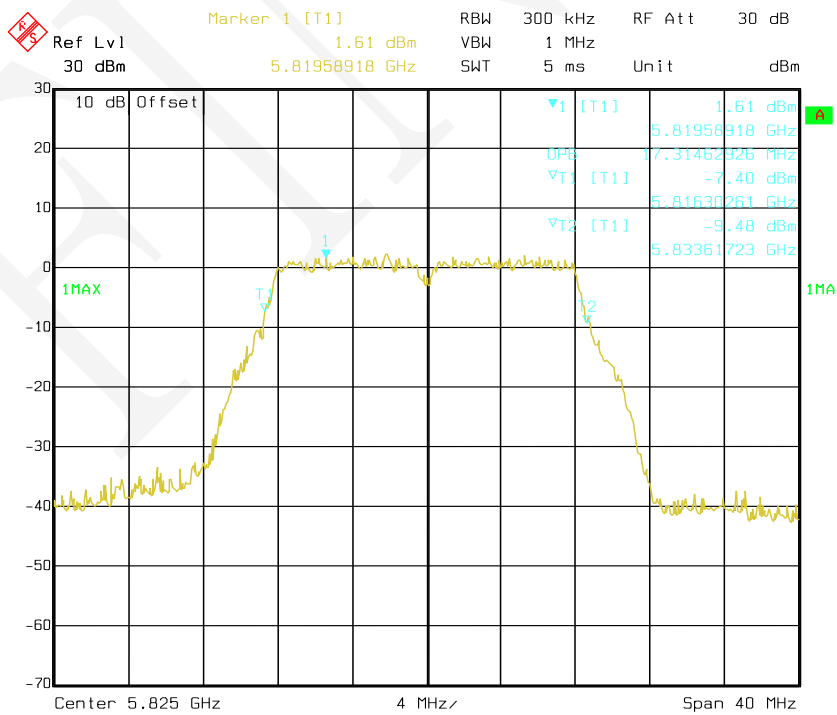


Date: 14.NOV.2019 14:21:41

802.11n-HT20 mode, 99% Occupied Bandwidth-5745 MHz, Chain 0

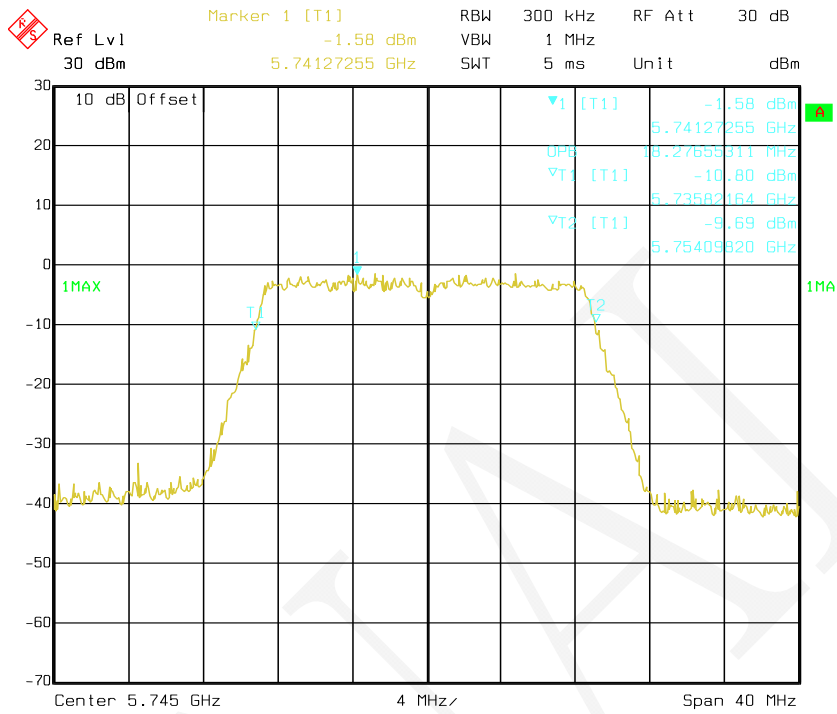


Date: 13.NOV.2019 17:27:59

802.11n-HT20 mode, 99% Occupied Bandwidth-5785 MHz, Chain 0

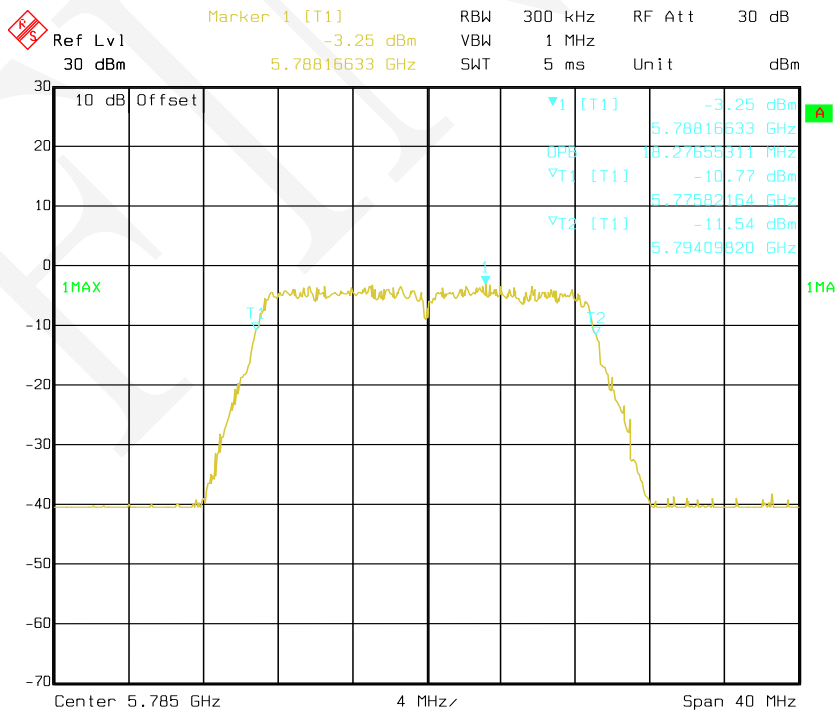


Date: 13.NOV.2019 17:28:17

802.11n-HT20 mode, 99% Occupied Bandwidth-5825 MHz, Chain 0

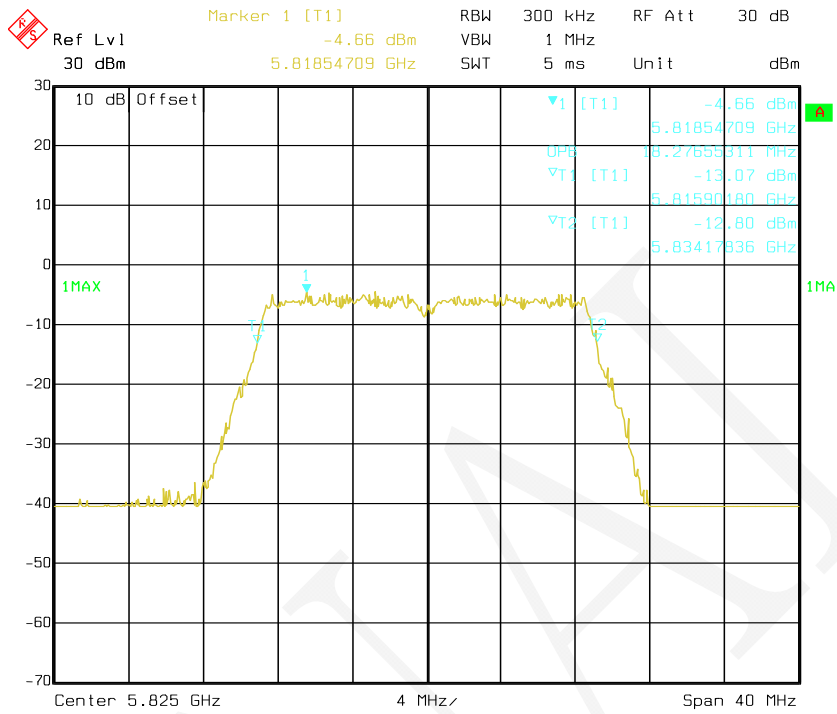


Date: 13.NOV.2019 17:28:41

802.11n-HT20 mode, 99% Occupied Bandwidth-5745 MHz, Chain 1

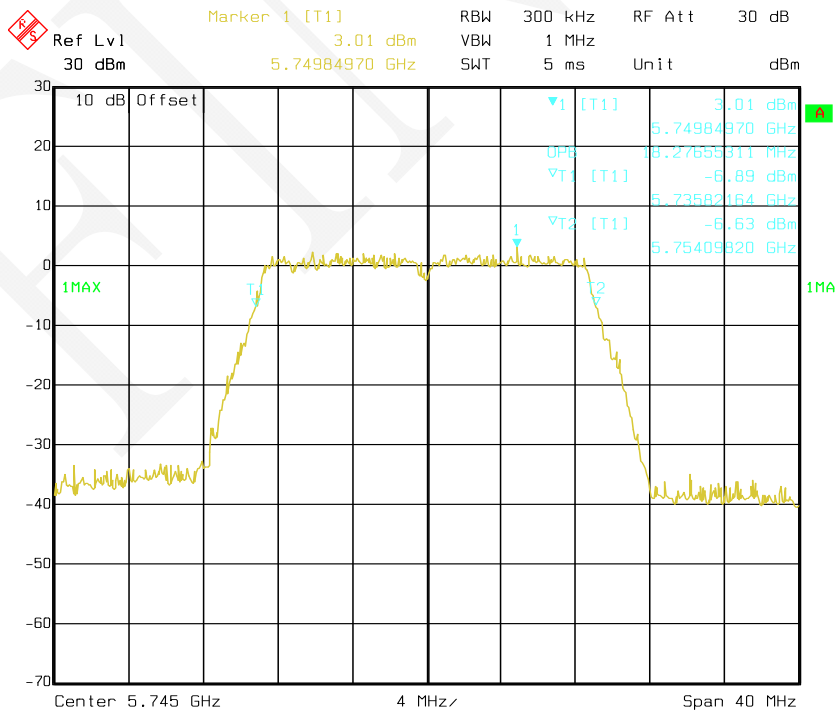


Date: 14.NOV.2019 14:22:40

802.11n-HT20 mode, 99% Occupied Bandwidth-5785 MHz, Chain 1

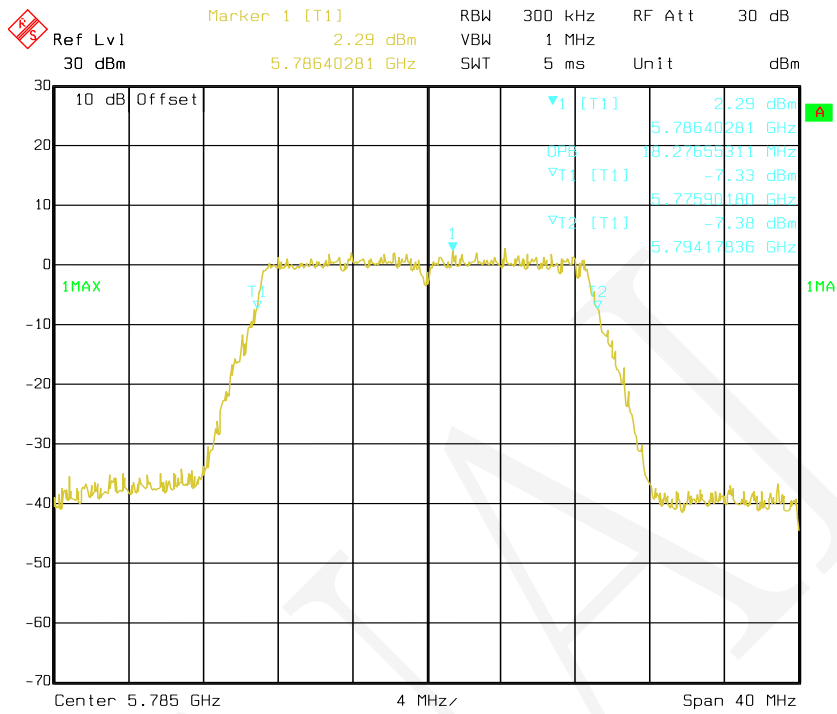


Date: 14.NOV.2019 14:23:15

802.11n-HT20 mode, 99% Occupied Bandwidth-5825 MHz, Chain 1

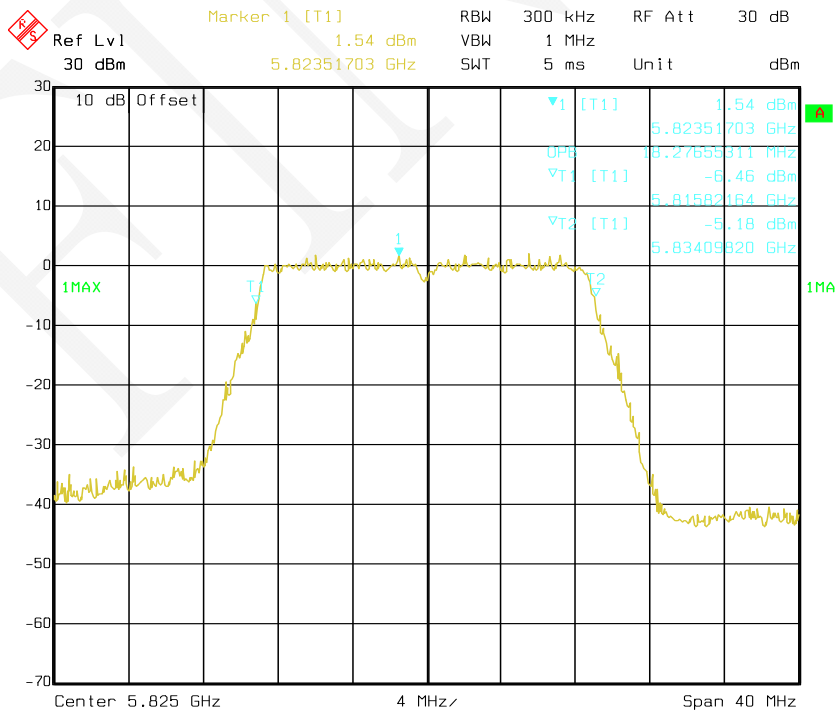


Date: 14.NOV.2019 14:23:37


802.11n-HT40 mode, 99% Occupied Bandwidth-5755 MHz, Chain 0

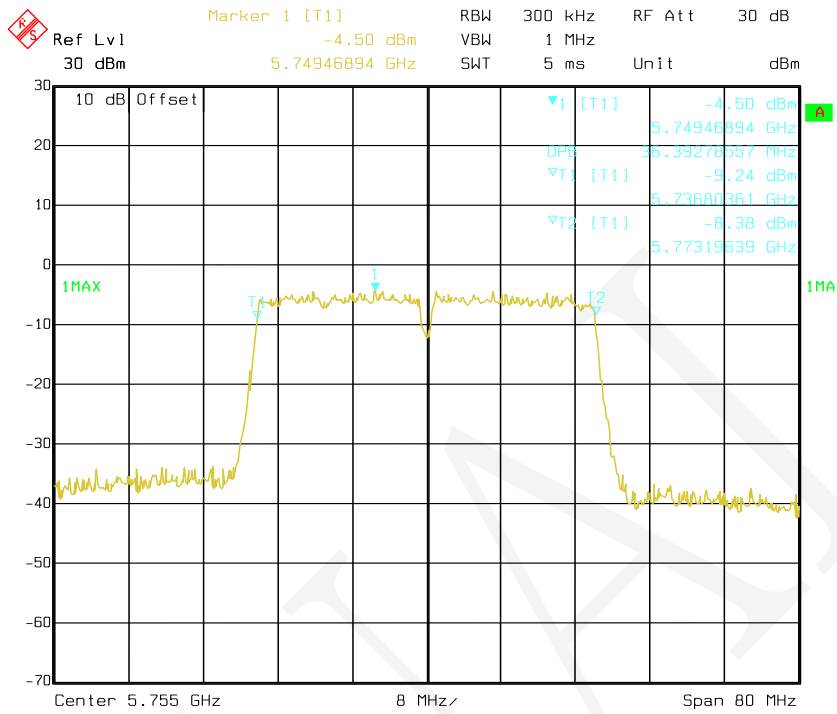

802.11n-HT40 mode, 99% Occupied Bandwidth-5795 MHz, Chain 0

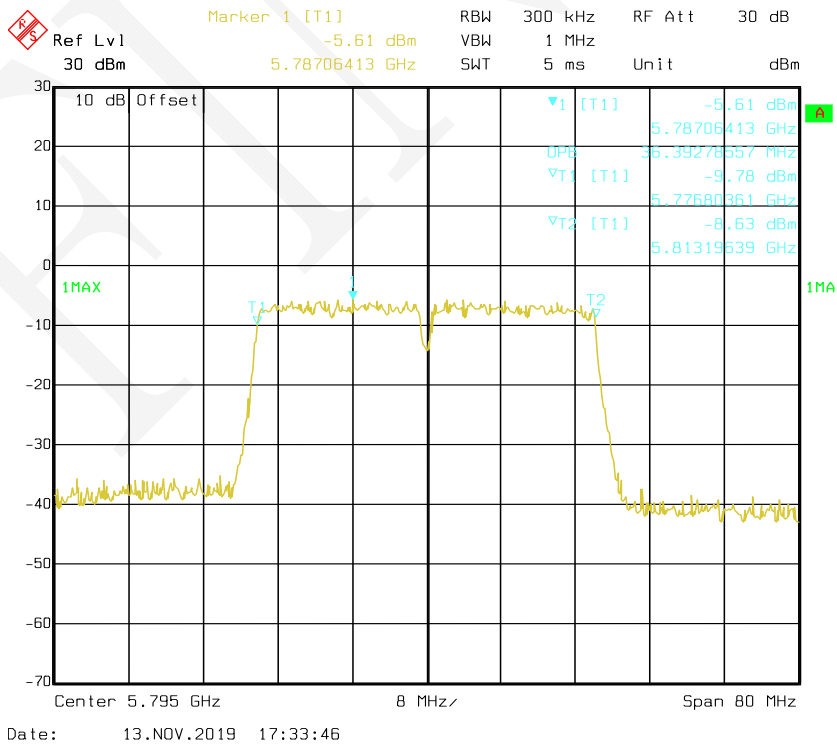


802.11n-HT40 mode, 99% Occupied Bandwidth-5755 MHz, Chain 1

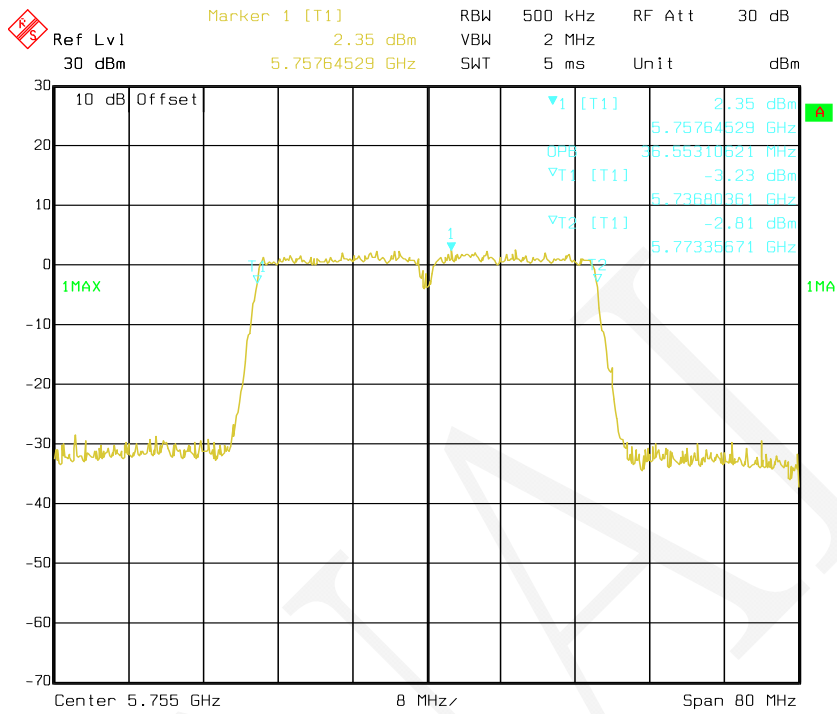


Date: 14.NOV.2019 14:07:23

802.11n-HT40 mode, 99% Occupied Bandwidth-5795 MHz, Chain 1

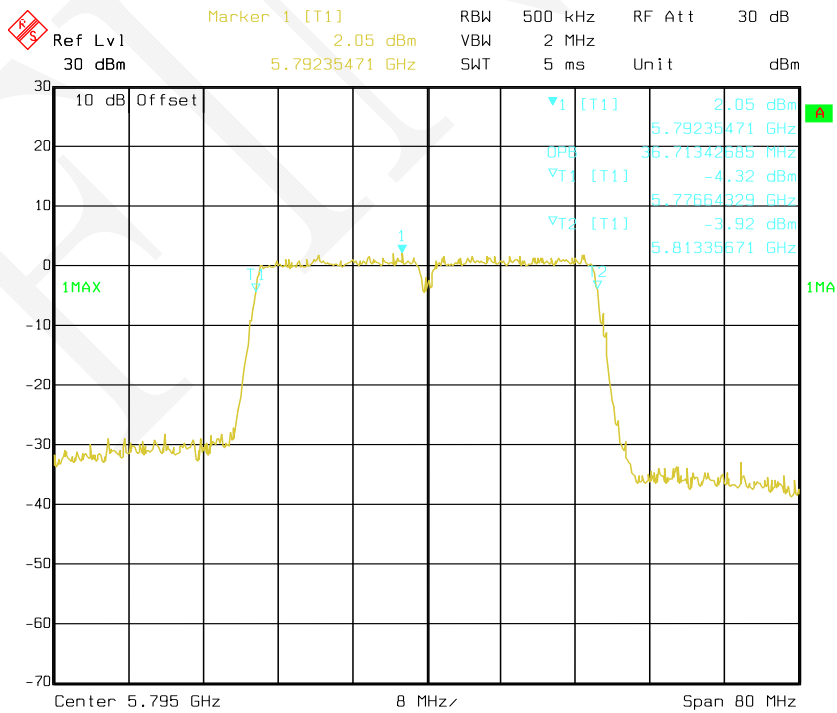


Date: 14.NOV.2019 14:07:43

802.11ac20 mode, 99% Occupied Bandwidth-5745 MHz, Chain 0

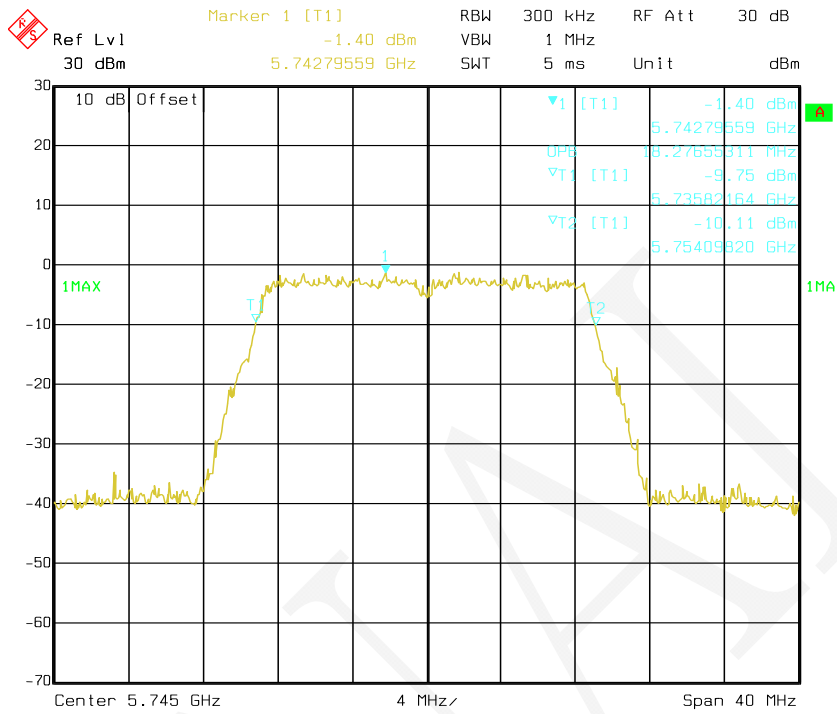


Date: 13.NOV.2019 17:35:39

802.11ac20 mode, 99% Occupied Bandwidth-5785 MHz, Chain 0

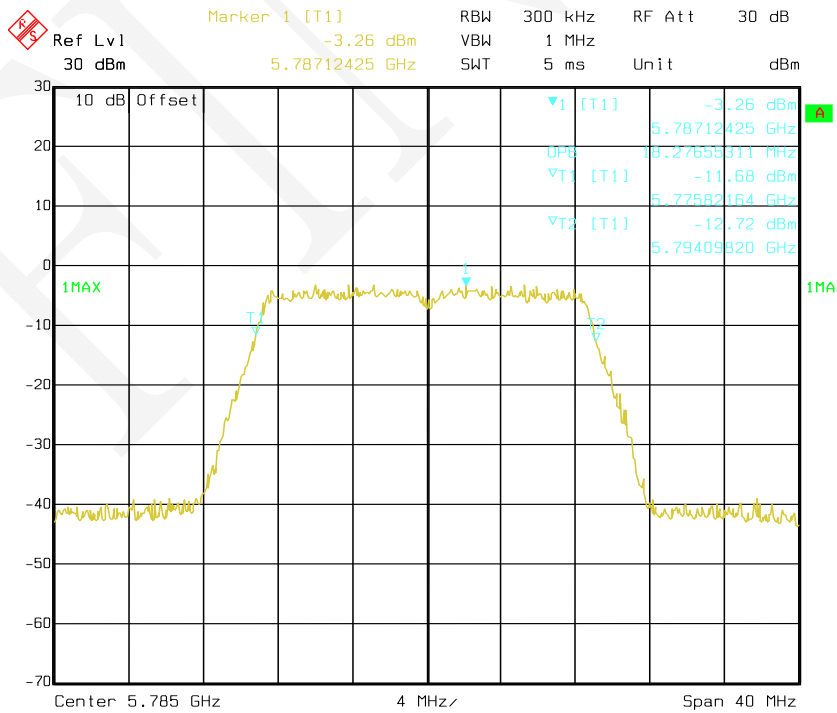


Date: 13.NOV.2019 17:36:01

802.11ac20 mode, 99% Occupied Bandwidth-5825 MHz, Chain 0

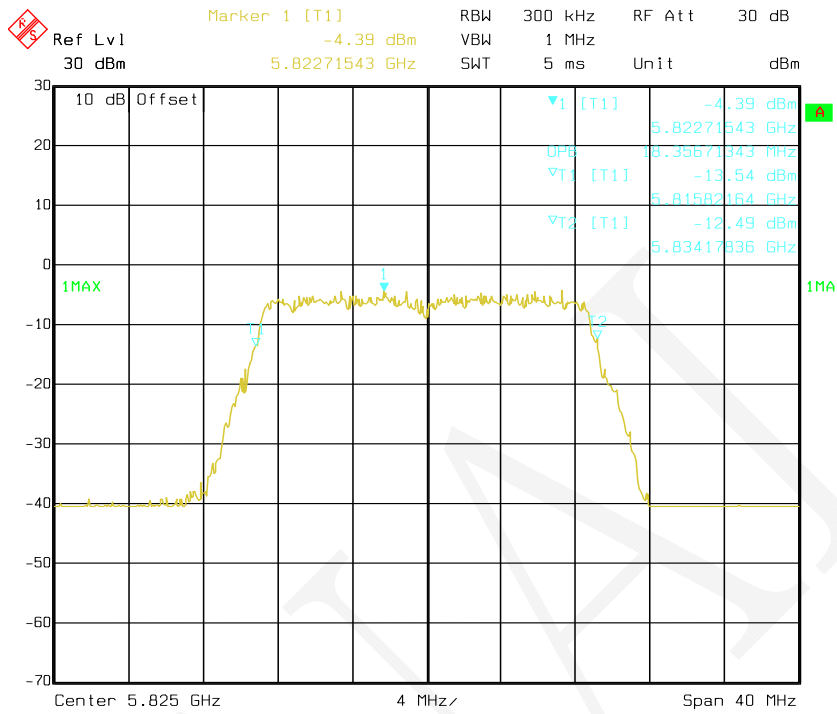


Date: 13.NOV.2019 17:36:31

802.11ac20 mode, 99% Occupied Bandwidth-5745 MHz, Chain 1

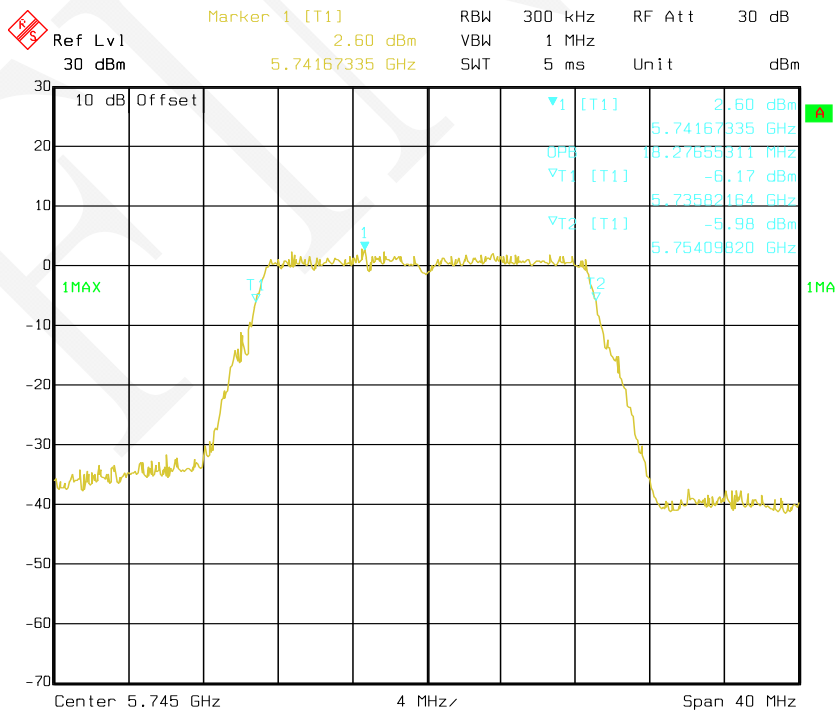


Date: 14.NOV.2019 14:24:22

802.11ac20 mode, 99% Occupied Bandwidth-5785 MHz, Chain 1

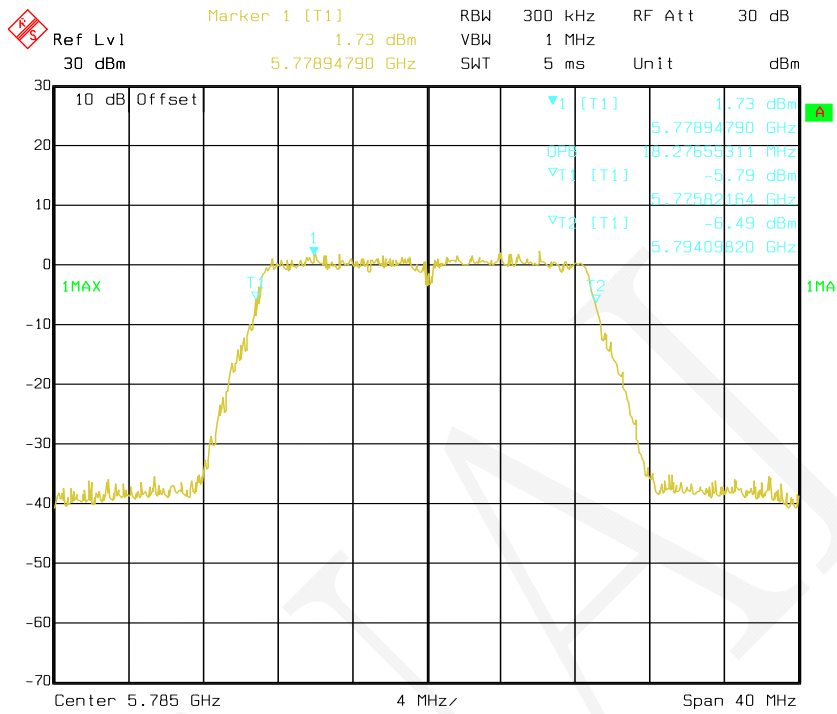


Date: 14.NOV.2019 14:24:45

802.11ac20 mode, 99% Occupied Bandwidth-5825 MHz, Chain 1

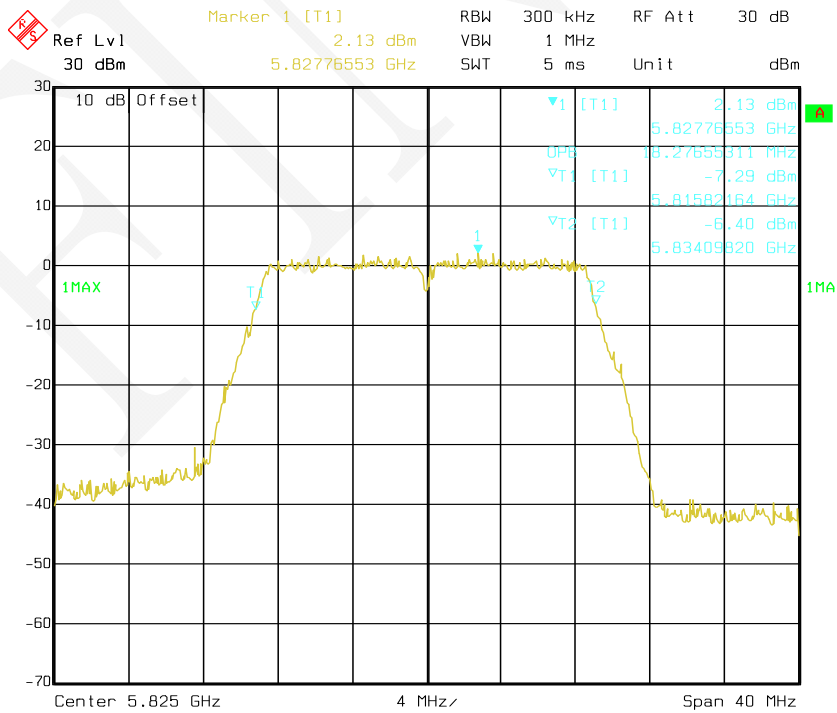


Date: 14.NOV.2019 14:25:24

802.11ac40 mode, 99% Occupied Bandwidth-5755 MHz, Chain 0

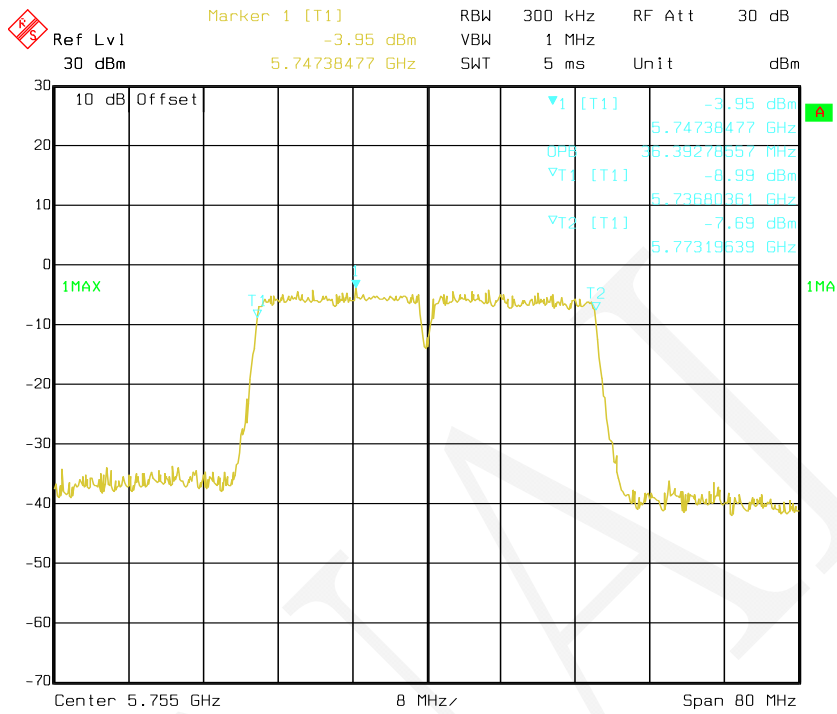


Date: 13.NOV.2019 17:31:53

802.11ac40 mode, 99% Occupied Bandwidth-5795 MHz, Chain 0

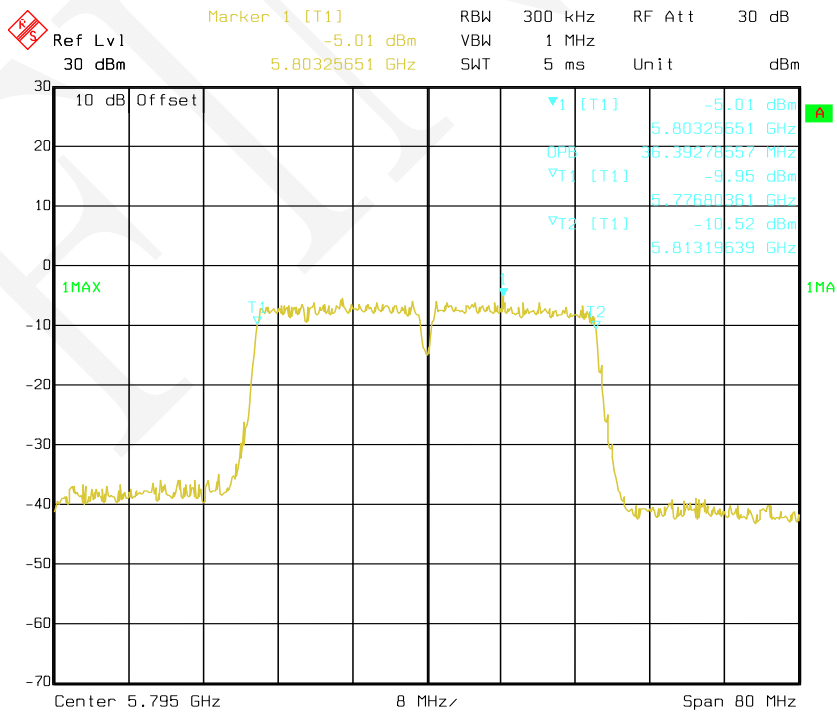


Date: 13.NOV.2019 17:32:26

802.11ac40 mode, 99% Occupied Bandwidth-5755 MHz, Chain 1

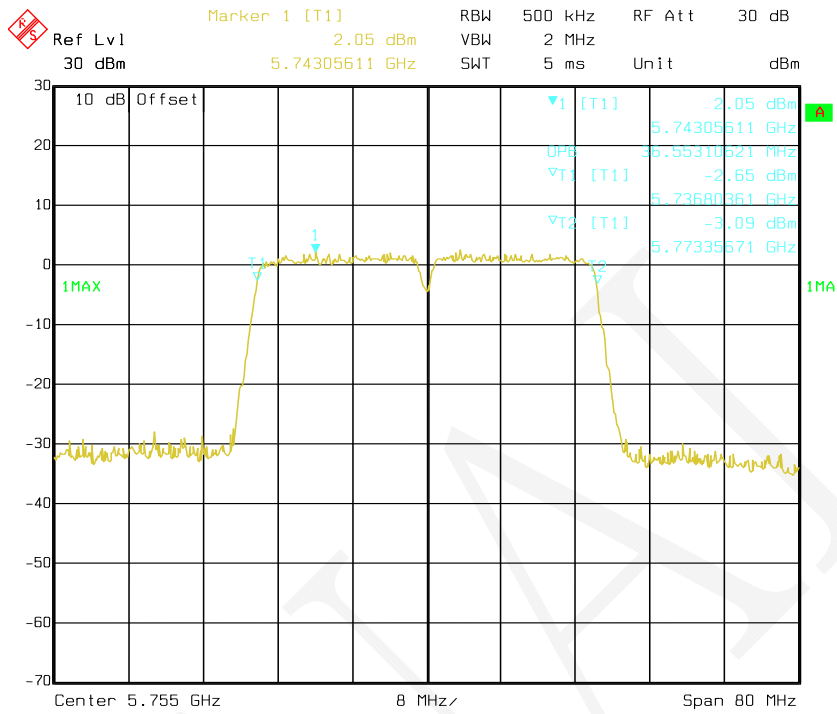


Date: 14.NOV.2019 14:05:34

802.11ac40 mode, 99% Occupied Bandwidth-5795 MHz, Chain 1

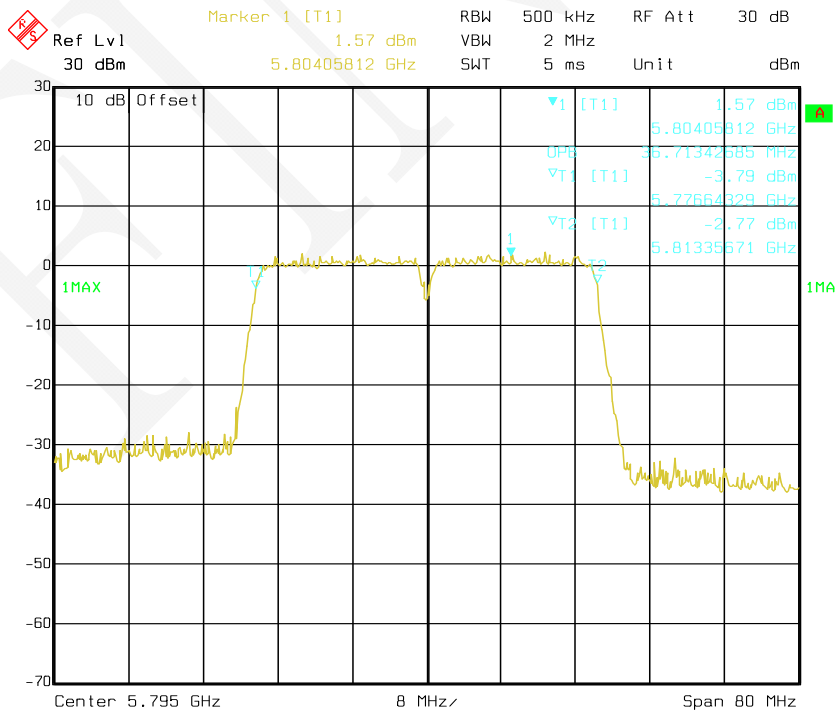


Date: 14.NOV.2019 14:05:56

802.11ac80 mode, 99% Occupied Bandwidth-5775 MHz, Chain 0

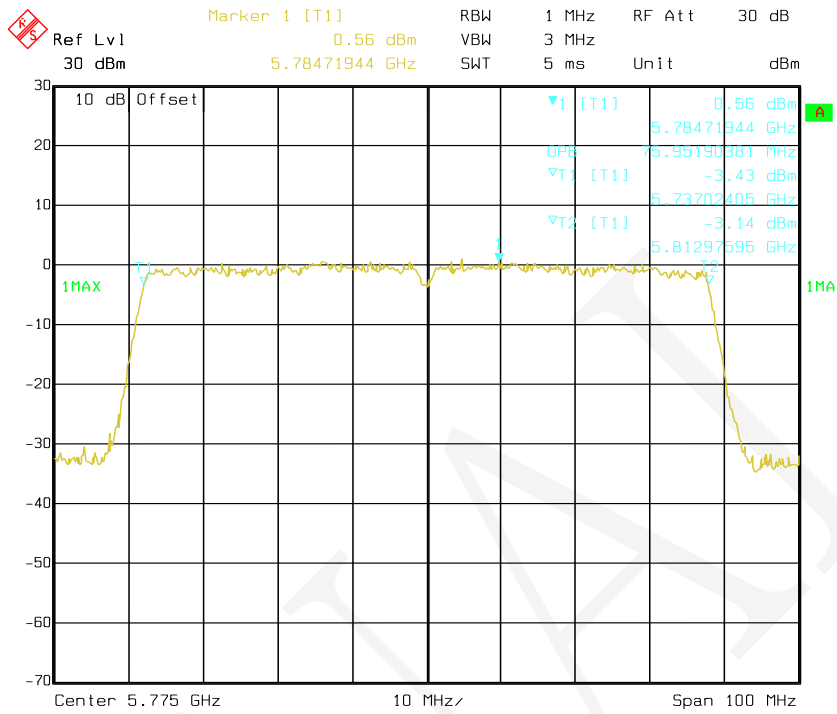

Date: 14.NOV.2019 10:11:11

802.11ac80 mode, 99% Occupied Bandwidth-5775 MHz, Chain 1

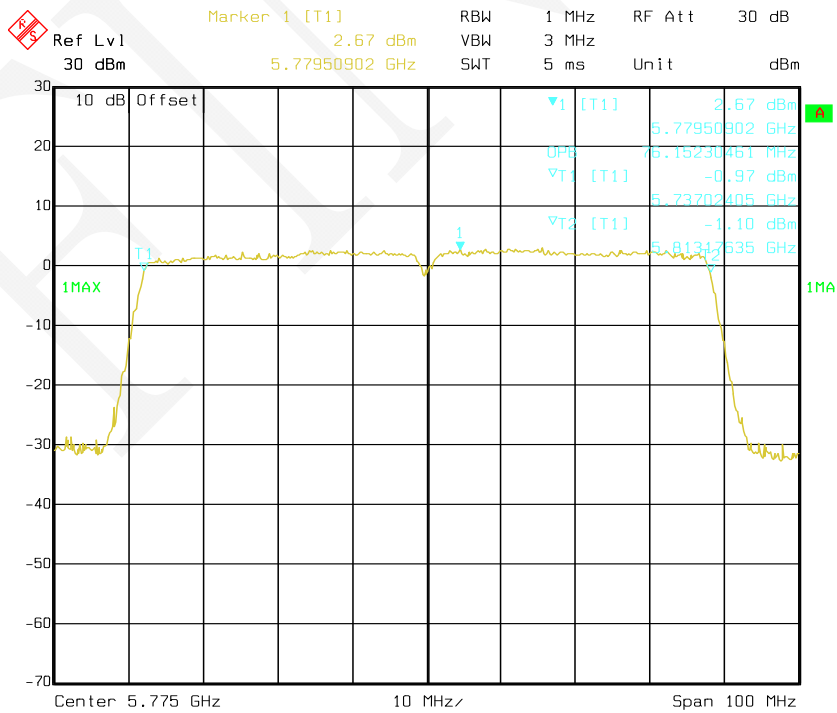

Date: 14.NOV.2019 14:04:14

FCC §15.407(a) (1)(IV), (3), (4) – CONDUCTED TRANSMITTER OUTPUT POWER

Applicable Standard

(a) Power limits:

(1) For the band 5.15-5.25 GHz.

(iv) For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

NOTE TO PARAGRAPH (A)(3): The Commission strongly recommends that parties employing U-NII devices to provide critical communications services should determine if there are any nearby Government radar systems that could affect their operation.

(4) The maximum conducted output power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage.

Test Procedure

According to 789033 D02 General UNII Test Procedures New Rules v02r01

Test Data

Environmental Conditions

Temperature:	21 °C
Relative Humidity:	51 %
ATM Pressure:	95.3 kPa

The testing was performed by Eric Xiao on 2019-11-14.

Test Mode: Transmitting

For 5150-5250 MHz:

Mode	Frequency (MHz)	Conducted Average Power (dBm)		Duty Cycle Factor (dB)	Corrected (dBm)		Limit (dBm)
		Chain 0	Chain 1		Chain 0	Chain 1	
802.11a	5180	5.64	5.97	0.09	5.73	6.06	24.00
	5200	5.66	6.11	0.09	5.73	6.06	24.00
	5240	5.76	6.38	0.09	5.73	6.06	24.00

Mode	Channel	Frequency (MHz)	Conducted Average Power (dBm)		Duty Cycle Factor (dB)	Total (dBm)	Limit (dBm)
			Chain 0	Chain 1			
802.11n-HT20	Low	5180	5.54	5.88	0.10	8.82	24.00
	Middle	5200	5.56	6.02	0.10	8.91	24.00
	High	5240	6.07	6.28	0.10	9.29	24.00
802.11n-HT40	Low	5190	4.38	4.89	0.26	7.91	24.00
	High	5230	4.82	5.21	0.26	8.29	24.00
802.11ac20	Low	5180	5.48	5.85	0.10	8.78	24.00
	Middle	5200	5.62	5.81	0.10	8.83	24.00
	High	5240	6.13	6.37	0.10	9.36	24.00
802.11ac40	Low	5190	5.69	4.89	0.23	8.55	24.00
	High	5230	6.05	5.19	0.23	8.88	24.00
802.11ac 80	/	5210	3.92	4.31	0.48	7.61	24.00

For 5725-5850 MHz:

Mode	Frequency (MHz)	Conducted Average Power (dBm)		Duty Cycle Factor (dB)	Corrected (dBm)		Limit (dBm)
		Chain 0	Chain 1		Chain 0	Chain 1	
802.11a	5745	4.44	4.60	0.09	4.53	4.69	30.00
	5785	2.68	2.81	0.09	2.77	2.9	30.00
	5825	0.99	1.05	0.09	1.08	1.14	30.00

Mode	Channel	Frequency (MHz)	Conducted Average Power (dBm)		Duty Cycle Factor (dB)	Total (dBm)	Limit (dBm)
			Chain 0	Chain 1			
802.11n-HT20	Low	5745	4.19	4.46	0.10	7.44	30.00
	Middle	5785	2.51	2.71	0.10	5.72	30.00
	High	5825	0.89	1.03	0.10	4.07	30.00
802.11n-HT40	Low	5755	4.21	4.43	0.26	7.59	30.00
	High	5795	2.48	2.82	0.26	5.92	30.00
802.11ac20	Low	5745	4.19	4.51	0.10	7.46	30.00
	Middle	5785	2.42	2.64	0.10	5.64	30.00
	High	5825	0.89	1.02	0.10	4.07	30.00
802.11ac40	Low	5755	4.19	4.43	0.23	7.55	30.00
	High	5795	2.41	2.68	0.23	5.79	30.00
802.11ac 80	/	5775	2.58	2.65	0.48	6.11	30.00

Note:

1. The max antenna gain is 4.6 dBi
2. The device employed Cyclic Delay Diversity (CDD) for 802.11 MIMO transmitting, per KDB 662911 D01 Multiple Transmitter Output v02r01, for power measurements on IEEE 802.11 devices:

Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$;

So:

Directional gain = $G_{ANT} + \text{Array Gain} = 4.6 < 6.0\text{dBi}$.

No power limit was reduced in MIMO mode.

FCC §15.407(a) (1) (iv) (3) (5) - POWER SPECTRAL DENSITY

Applicable Standard

(a) Power limits:

(1) For the band 5.15-5.25 GHz.

(iv) For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(5) The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test. If the device cannot be connected directly, alternative techniques acceptable to the Commission may be used. Measurements in the 5.725-5.85 GHz band are made over a reference bandwidth of 500 kHz or the 26 dB emission bandwidth of the device, whichever is less. Measurements in the 5.15-5.25 GHz, 5.25-5.35 GHz, and the 5.47-5.725 GHz bands are made over a bandwidth of 1 MHz or the 26 dB emission bandwidth of the device, whichever is less. A narrower resolution bandwidth can be used, provided that the measured power is integrated over the full reference bandwidth.

Test Procedure

According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01

Test Data

Environmental Conditions

Temperature:	21 °C
Relative Humidity:	48 ~ 51 %
ATM Pressure:	95.3 ~ 95.4 kPa

The testing was performed by Eric Xiao on 2019-11-14 and 2019-11-20.

Test Mode: Transmitting

For 5150-5250 MHz:

Mode	Frequency (MHz)	Power Spectral Density (dBm/MHz)		Duty Cycle Factor (dB)	Corrected (dBm)		Limit (dBm/MHz)
		Chain 0	Chain 1		Chain 0	Chain 1	
802.11a	5180	-3.87	-3.84	0.09	-3.78	-3.75	11
	5200	-3.83	-3.86	0.09	-3.74	-3.77	11
	5240	-3.11	-3.70	0.09	-3.02	-3.61	11

Mode	Channel	Frequency (MHz)	Power Spectral Density (dBm/MHz)		Duty Cycle Factor (dB)	Total (dBm/MHz)	Limit (dBm/MHz)
			Chain 0	Chain 1			
802.11n-HT20	Low	5180	-4.36	-3.60	0.10	-0.85	9.4
	Middle	5200	-3.97	-3.10	0.10	-0.40	9.4
	High	5240	-3.49	-3.22	0.10	-0.24	9.4
802.11n-HT40	Low	5190	-6.81	-6.99	0.26	-3.63	9.4
	High	5230	-7.59	-7.08	0.26	-4.06	9.4
802.11ac20	Low	5180	-4.00	-2.81	0.10	-0.25	9.4
	Middle	5200	-3.55	-3.17	0.10	-0.25	9.4
	High	5240	-3.36	-3.20	0.10	-0.17	9.4
802.11ac40	Low	5190	-8.06	-7.42	0.23	-4.49	9.4
	High	5230	-7.67	-5.95	0.23	-3.49	9.4
802.11ac80	/	5210	-11.16	-10.47	0.48	-7.31	9.4

Note:

1. The max antenna gain is 4.6dBi.
2. The device employed Cyclic Delay Diversity (CDD) for 802.11 MIMO transmitting, per KDB 662911 D01 Multiple Transmitter Output v02r01, for power spectral density measurements on IEEE 802.11 devices:


$$\text{Array Gain} = 10 \cdot \log(N_{\text{ANT}}/N_{\text{SS}}) \text{dB}$$

So:

$$\text{Directional gain} = G_{\text{ANT}} + \text{Array Gain} = 4.6 + 10 \cdot \log(2) = 7.6 > 6 \text{dBi}$$


The power density Limit was reduced 1.6dB in MIMO mode.

802.11a mode, Power Spectral Density-5180 MHz, Chain 0

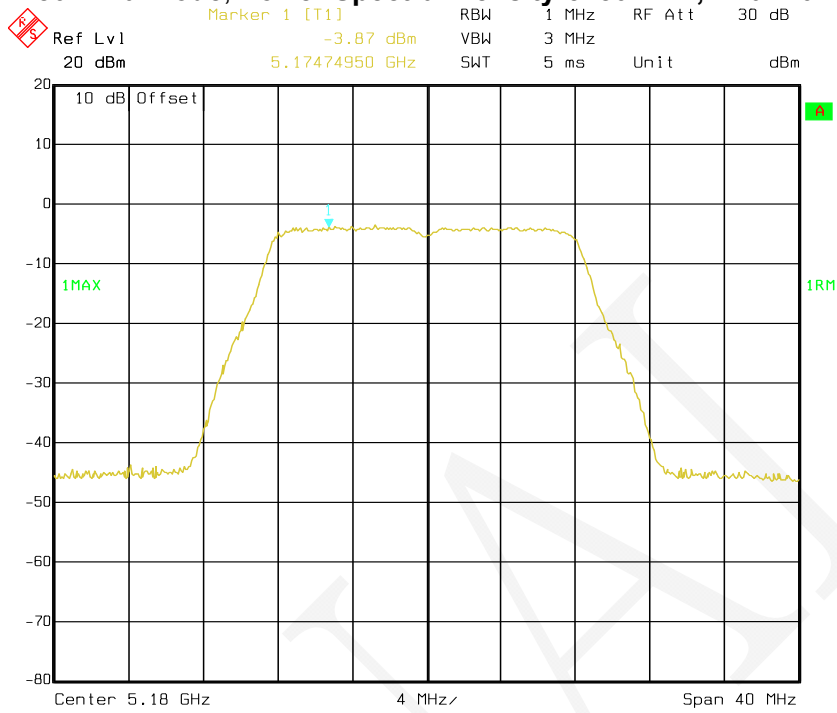


Date: 20.NOV.2019 18:22:55

802.11a mode, Power Spectral Density-5200 MHz, Chain 0

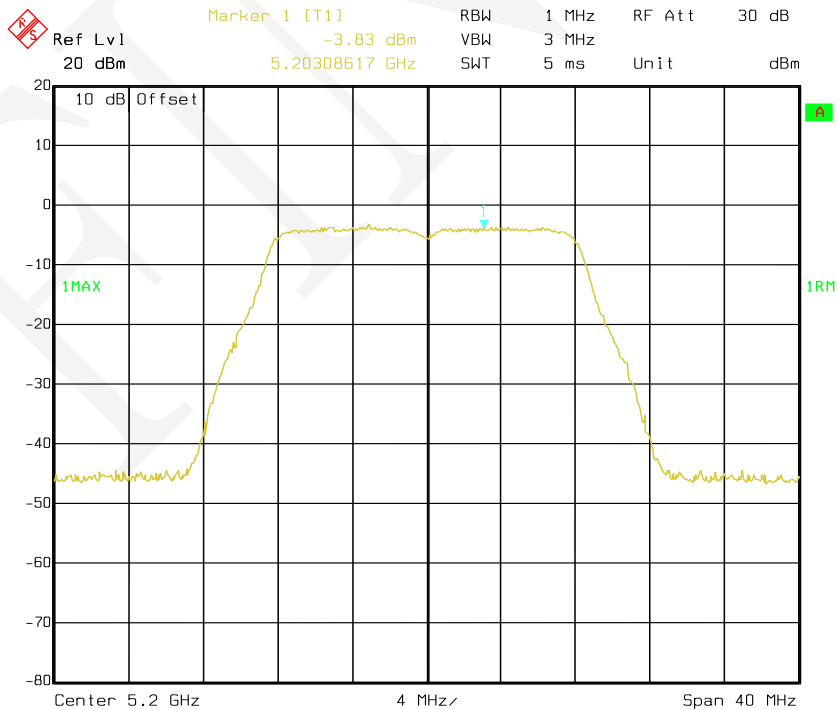


Date: 20.NOV.2019 18:23:40

802.11a mode, Power Spectral Density-5240 MHz, Chain 0

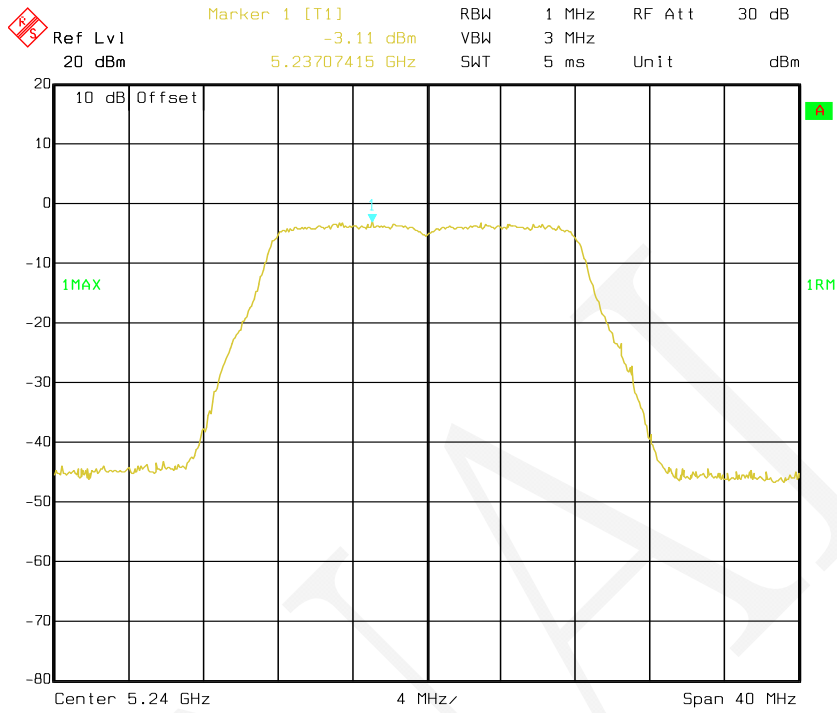


Date: 20.NOV.2019 18:24:07

802.11a mode, Power Spectral Density-5180 MHz, Chain 1

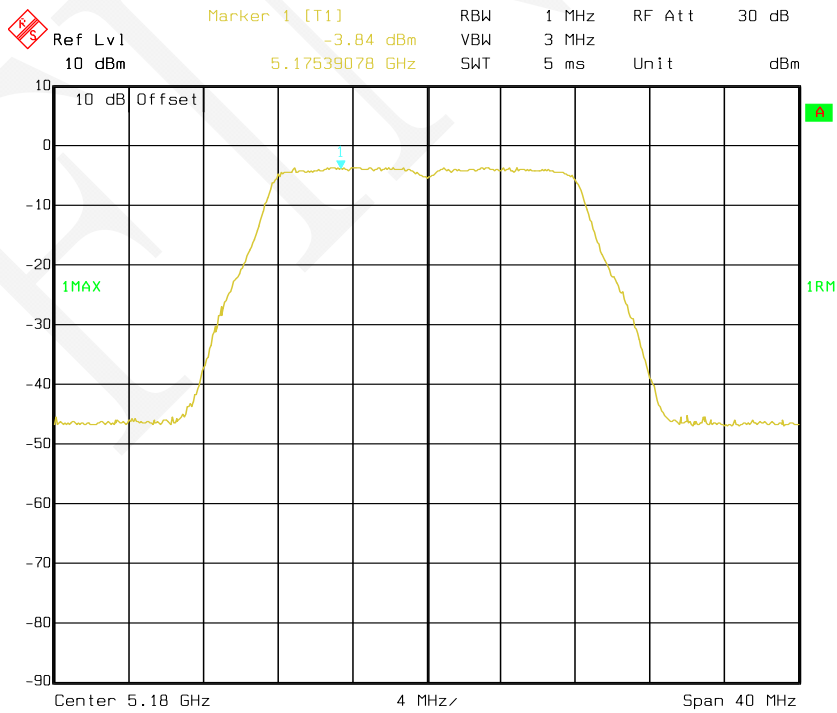


Date: 20.NOV.2019 18:44:31

802.11a mode, Power Spectral Density-5200 MHz, Chain 1

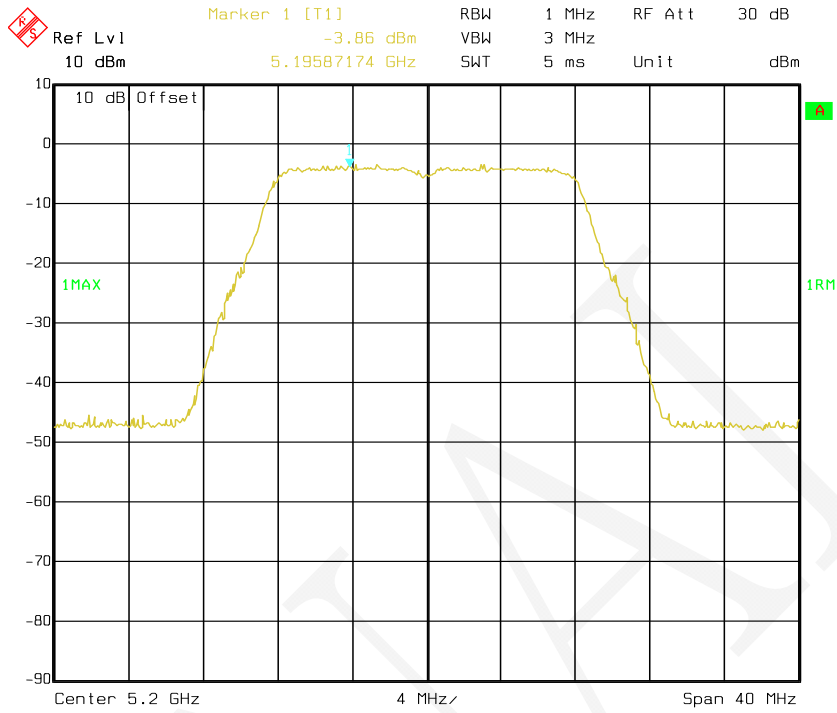


Date: 20.NOV.2019 18:45:46

802.11a mode, Power Spectral Density-5240 MHz, Chain 1

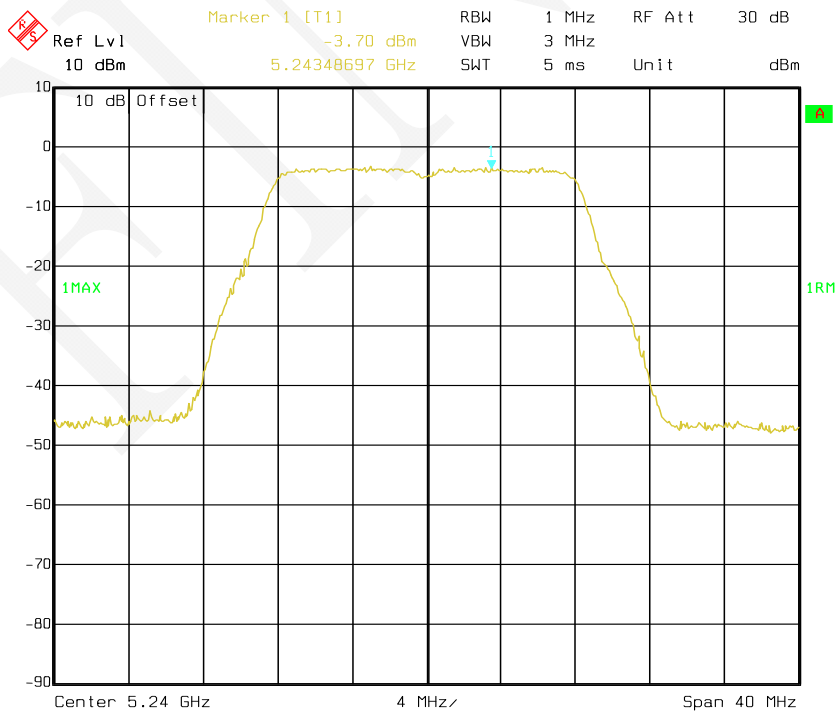


Date: 20.NOV.2019 18:46:06


802.11n-HT20 mode, Power Spectral Density-5180 MHz, Chain 0

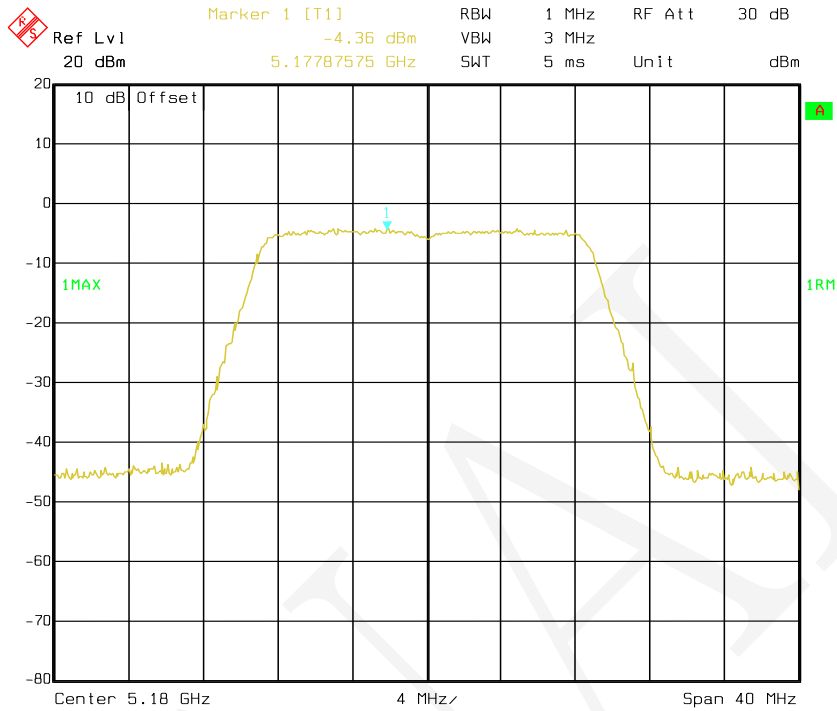

802.11n-HT20 mode, Power Spectral Density-5200 MHz, Chain 0

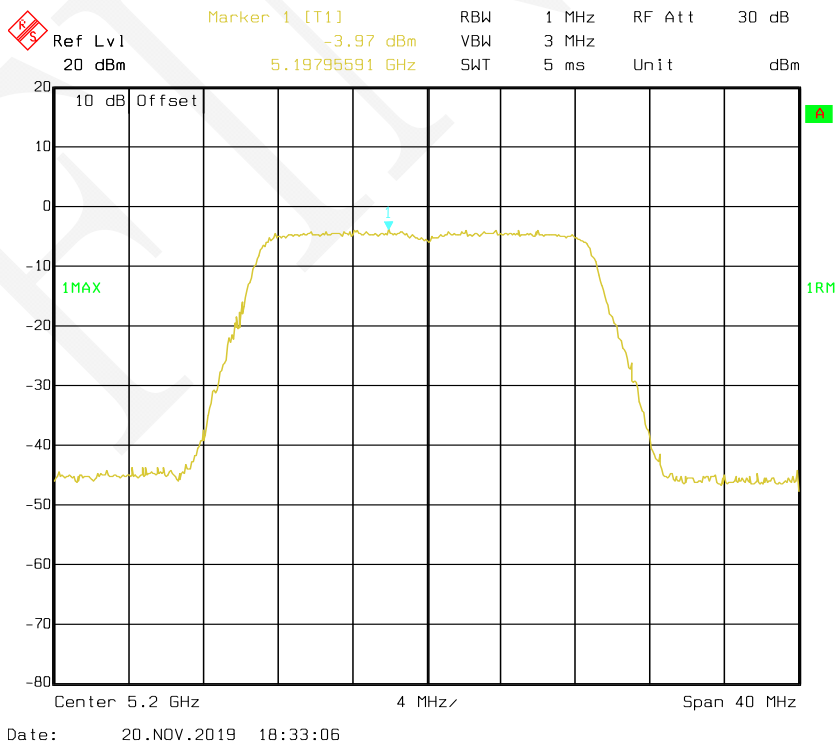


802.11n-HT20 mode, Power Spectral Density-5240 MHz, Chain 0

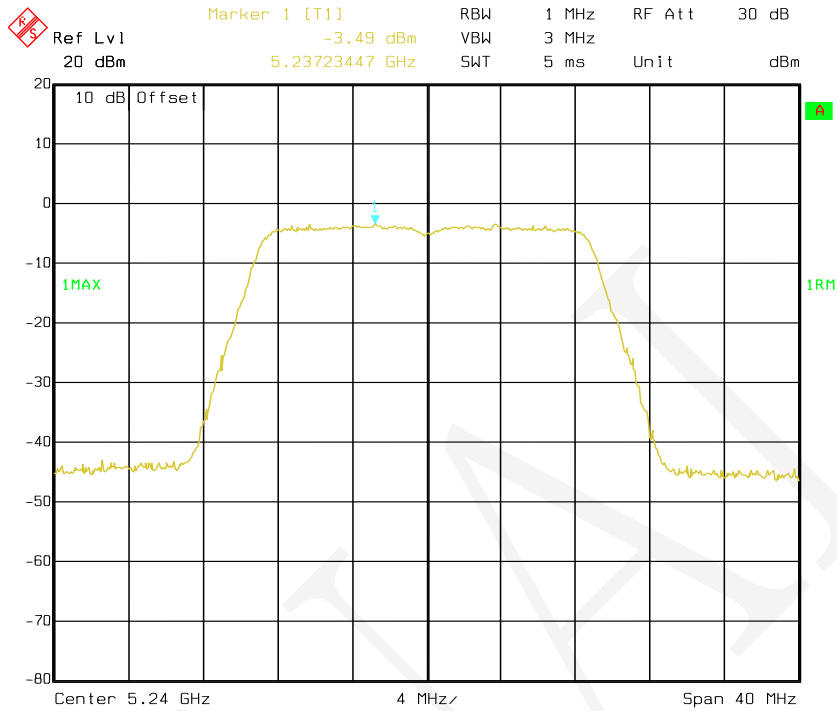


Date: 20.NOV.2019 18:33:32

802.11n-HT20 mode, Power Spectral Density-5180 MHz, Chain 1

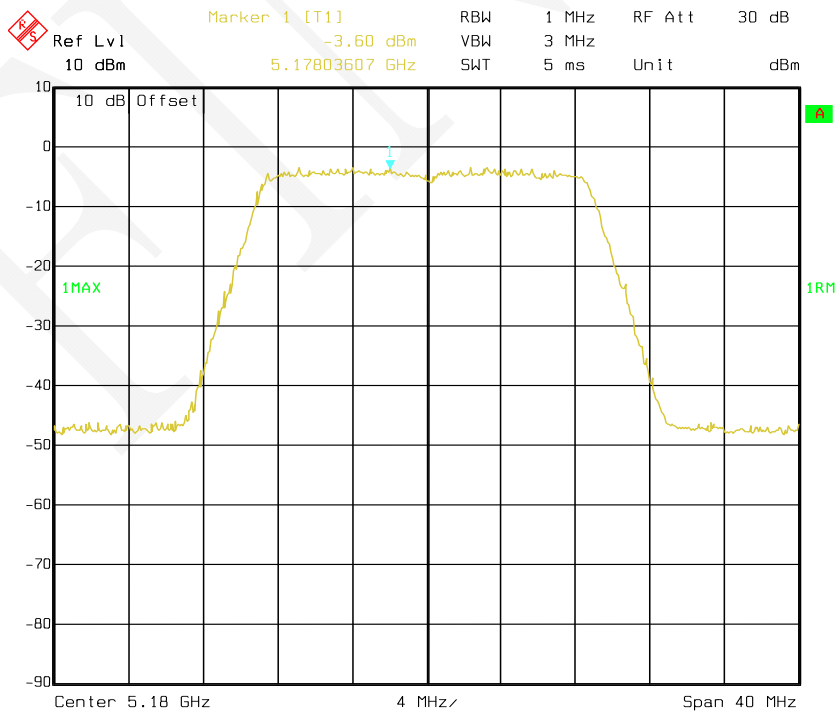


Date: 20.NOV.2019 18:49:39

802.11n-HT20 mode, Power Spectral Density-5200 MHz, Chain 1

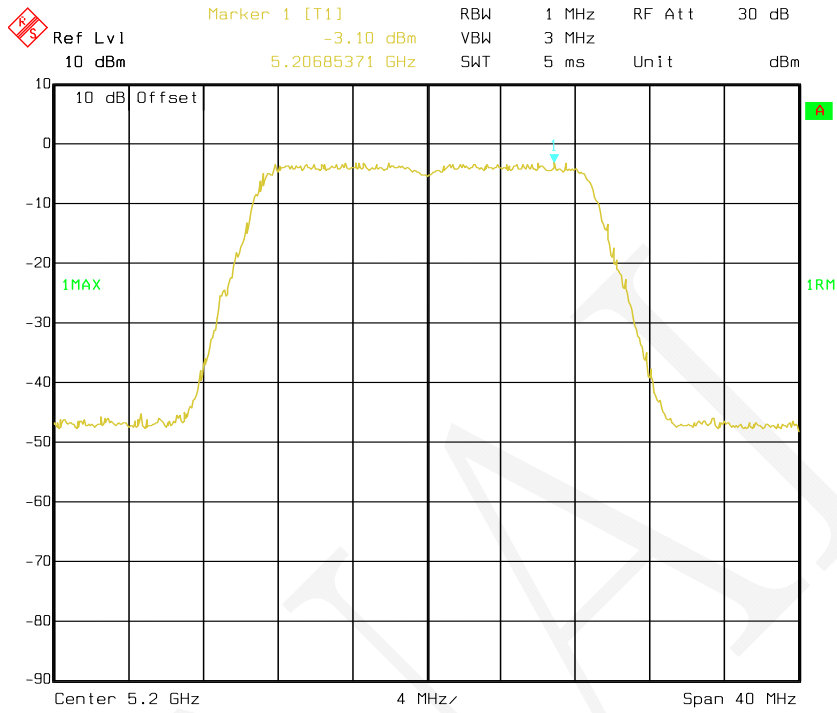


Date: 20.NOV.2019 18:50:12

802.11n-HT20 mode, Power Spectral Density-5240 MHz, Chain 1

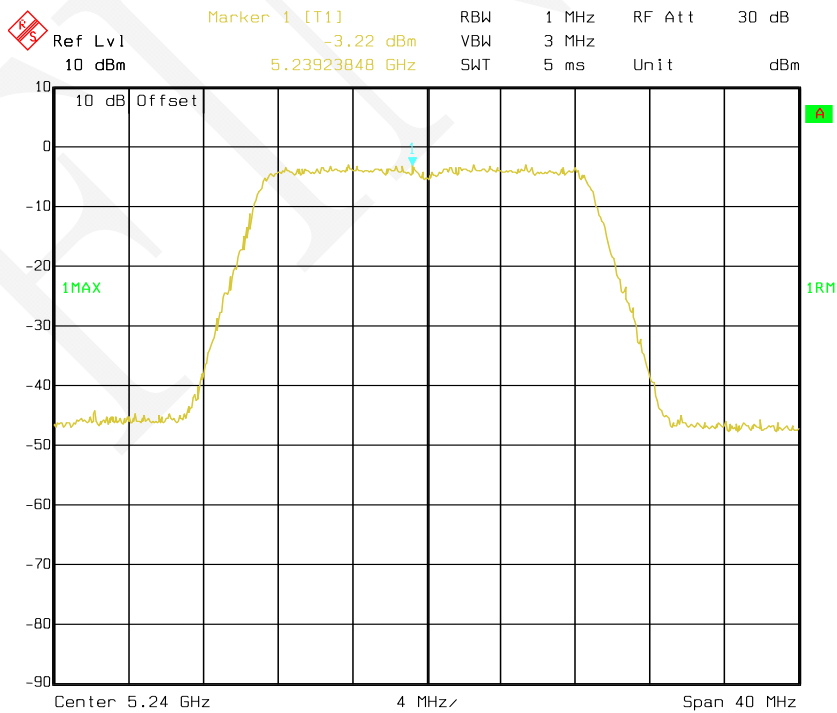


Date: 20.NOV.2019 18:50:36

802.11n-HT40 mode, Power Spectral Density-5190 MHz, Chain 0

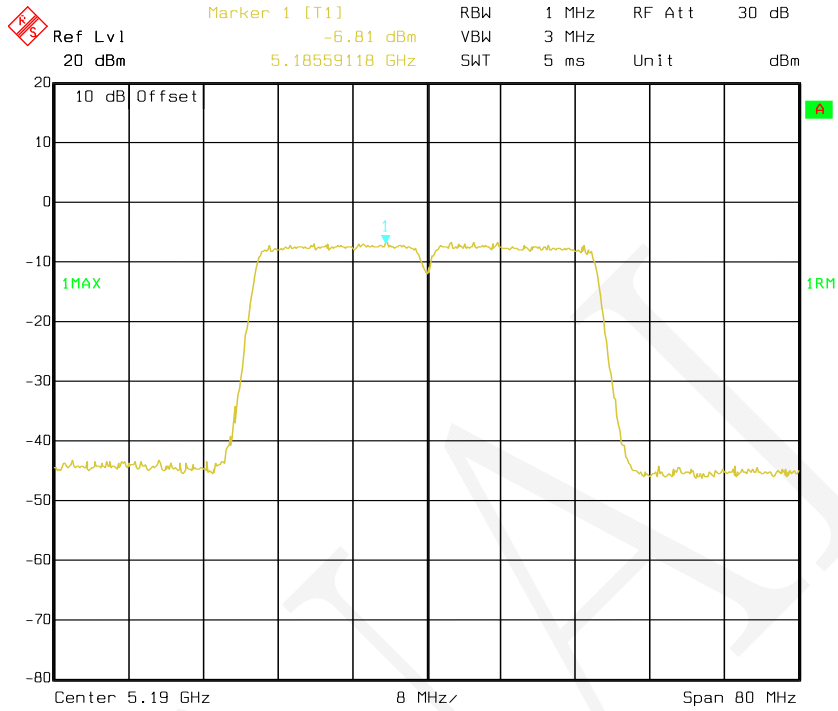


Date: 20.NOV.2019 18:34:03

802.11n-HT40 mode, Power Spectral Density-5230 MHz, Chain 0

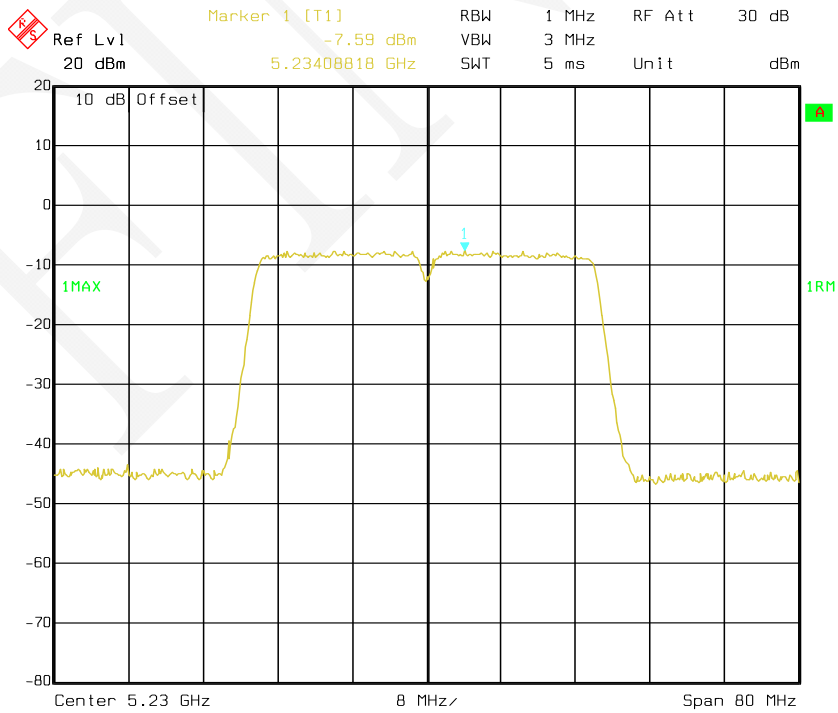


Date: 20.NOV.2019 18:34:27

802.11n-HT40 mode, Power Spectral Density-5190 MHz, Chain 1

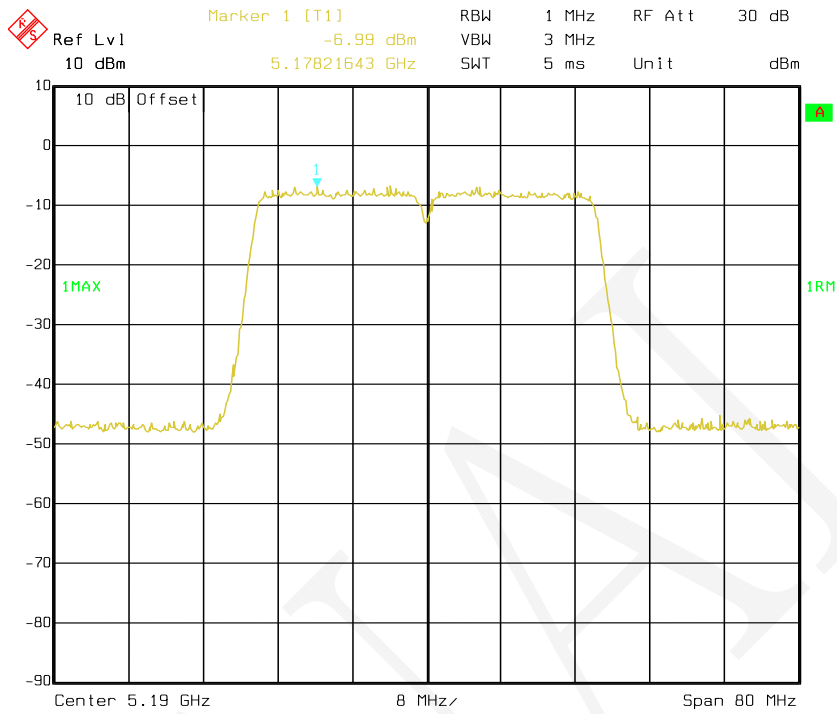


Date: 20.NOV.2019 18:51:10

802.11n-HT40 mode, Power Spectral Density-5230 MHz, Chain 1

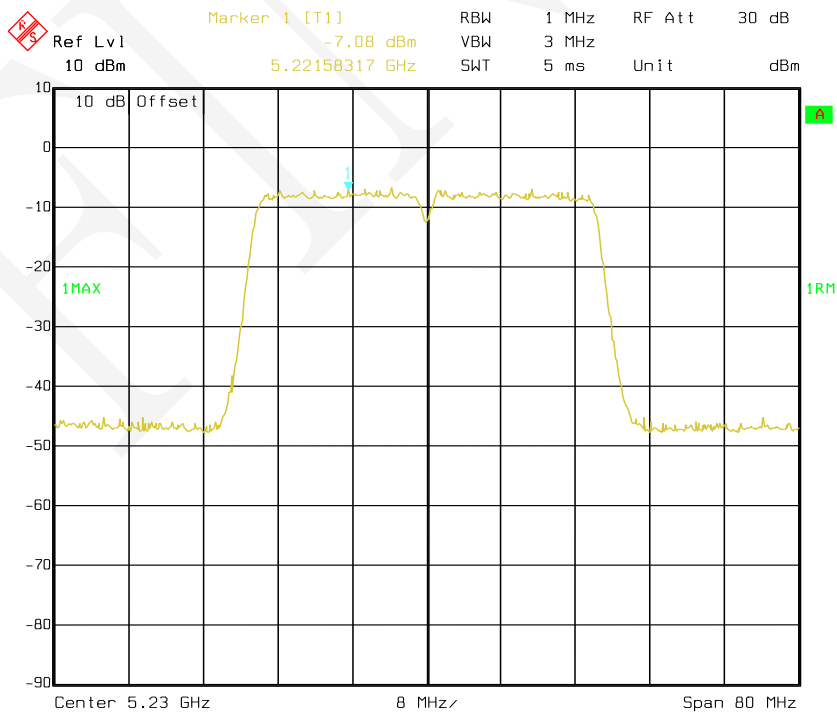


Date: 20.NOV.2019 18:51:33

802.11ac20 mode, Power Spectral Density-5180 MHz, Chain 0

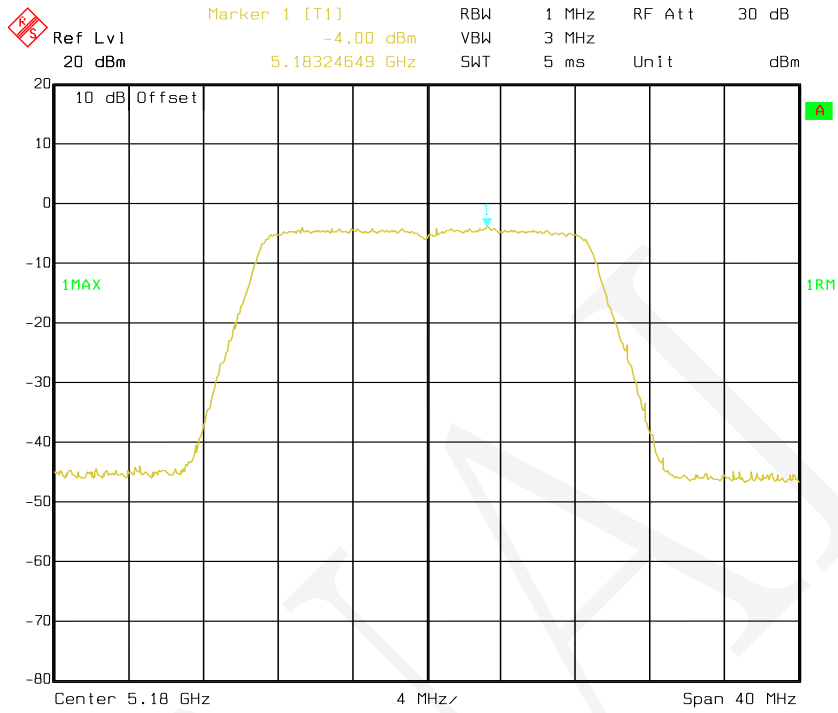


Date: 20.NOV.2019 18:26:23

802.11ac20 mode, Power Spectral Density-5200 MHz, Chain 0

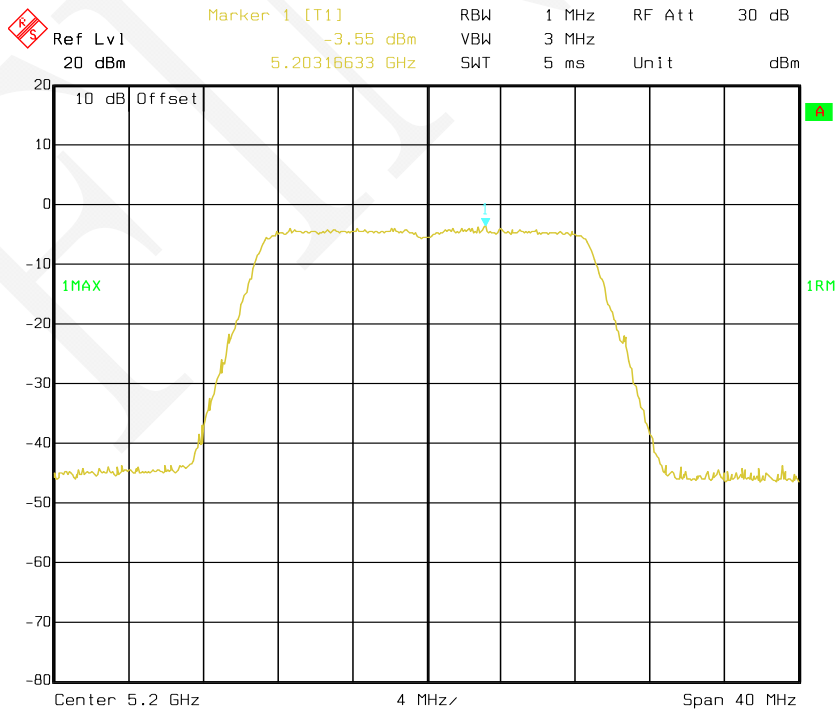


Date: 20.NOV.2019 18:27:14

802.11ac20 mode, Power Spectral Density-5240 MHz, Chain 0

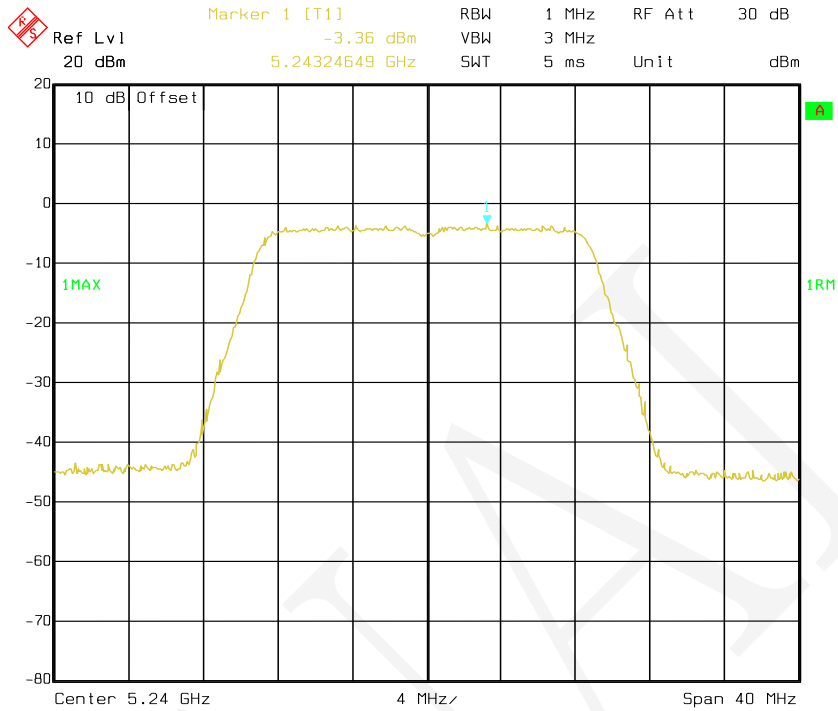


Date: 20.NOV.2019 18:27:42

802.11ac20 mode, Power Spectral Density-5180 MHz, Chain 1

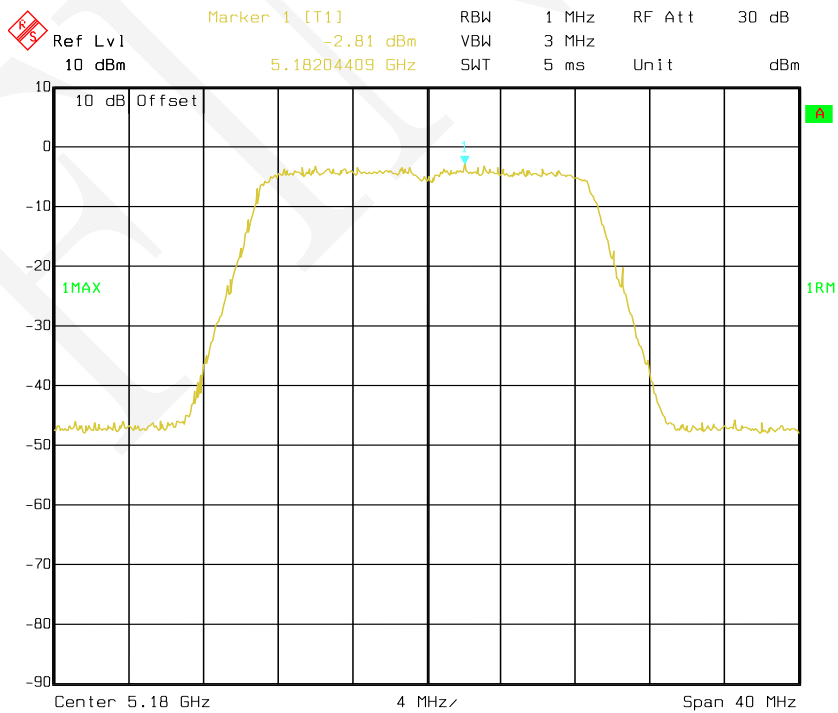


Date: 20.NOV.2019 18:46:41

802.11ac20 mode, Power Spectral Density-5200 MHz, Chain 1

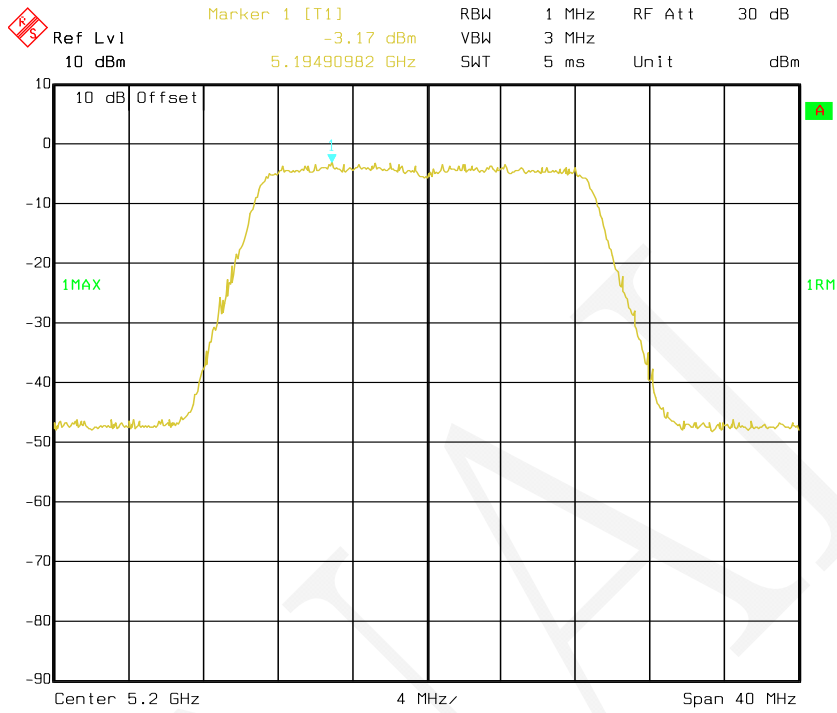

Date: 20.NOV.2019 18:46:59


802.11ac20 mode, Power Spectral Density-5240 MHz, Chain 1

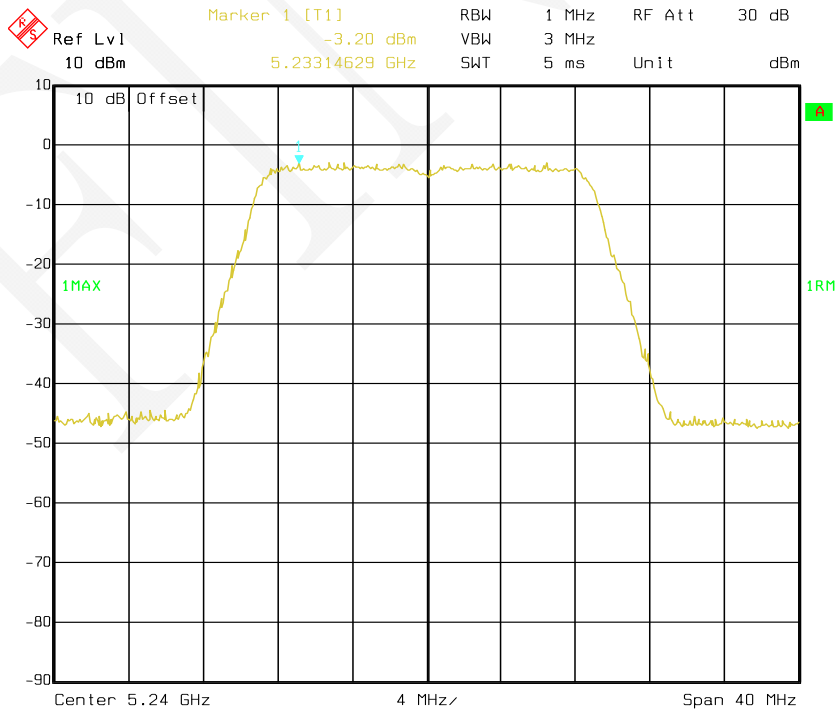

Date: 20.NOV.2019 18:47:24

802.11ac40 mode, Power Spectral Density-5190 MHz, Chain 0


Marker 1 [T1] RBW 1 MHz RF Att 30 dB
Ref Lvl 20 dBm -8.06 dBm VBW 3 MHz
5.19585170 GHz SWT 5 ms Unit dBm

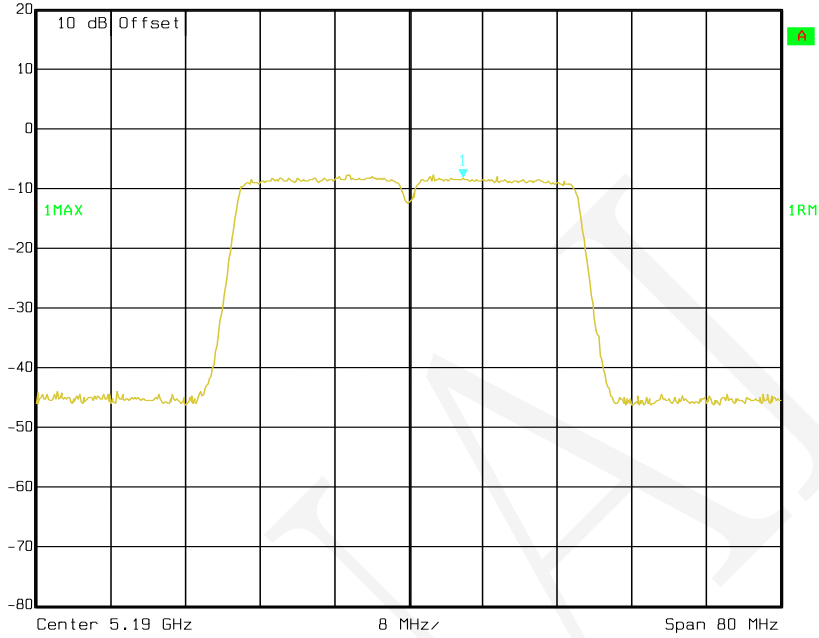

Date: 20.NOV.2019 18:30:43

802.11ac40 mode, Power Spectral Density-5230 MHz, Chain 0


Marker 1 [T1] RBW 1 MHz RF Att 30 dB
Ref Lvl 20 dBm -7.67 dBm VBW 3 MHz
5.22430862 GHz SWT 5 ms Unit dBm

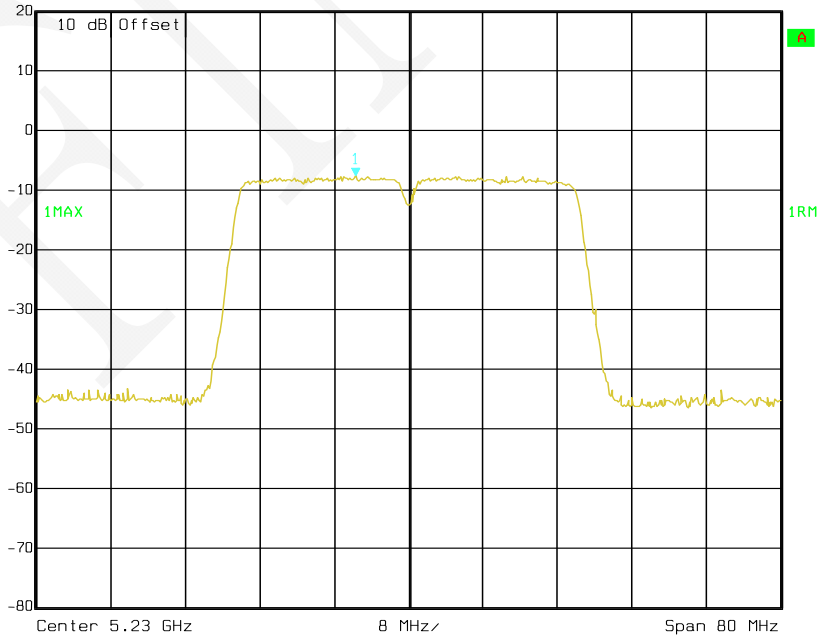

Date: 20.NOV.2019 18:31:09


802.11ac40 mode, Power Spectral Density-5190 MHz, Chain 1

Marker 1 [T1] RBW 1 MHz RF Att 30 dB
Ref Lvl 10 dBm Offset -7.42 dBm VBW 3 MHz
5.19633267 GHz SWT 5 ms Unit dBm

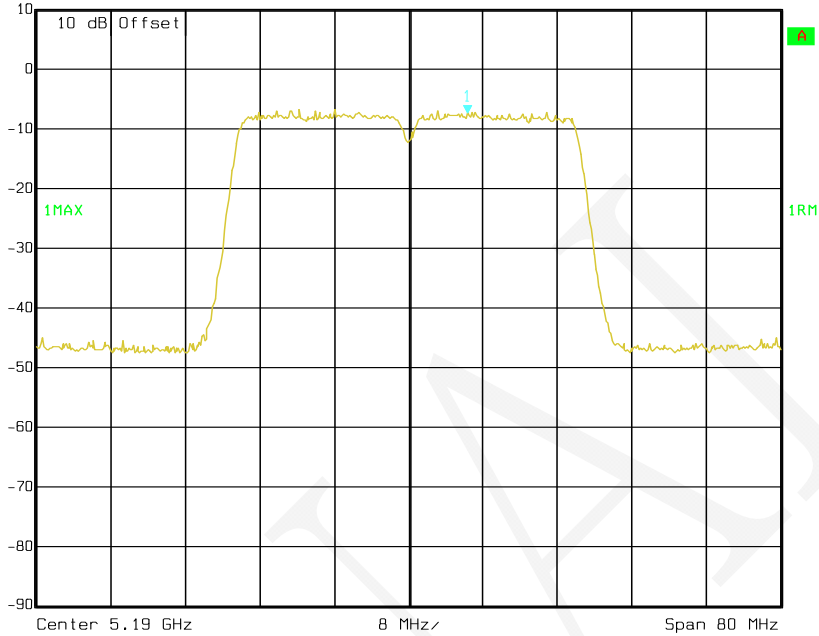


802.11ac40 mode, Power Spectral Density-5230 MHz, Chain 1

Marker 1 [T1] RBW 1 MHz RF Att 30 dB
Ref Lvl 10 dBm Offset -5.95 dBm VBW 3 MHz
5.22302605 GHz SWT 5 ms Unit dBm

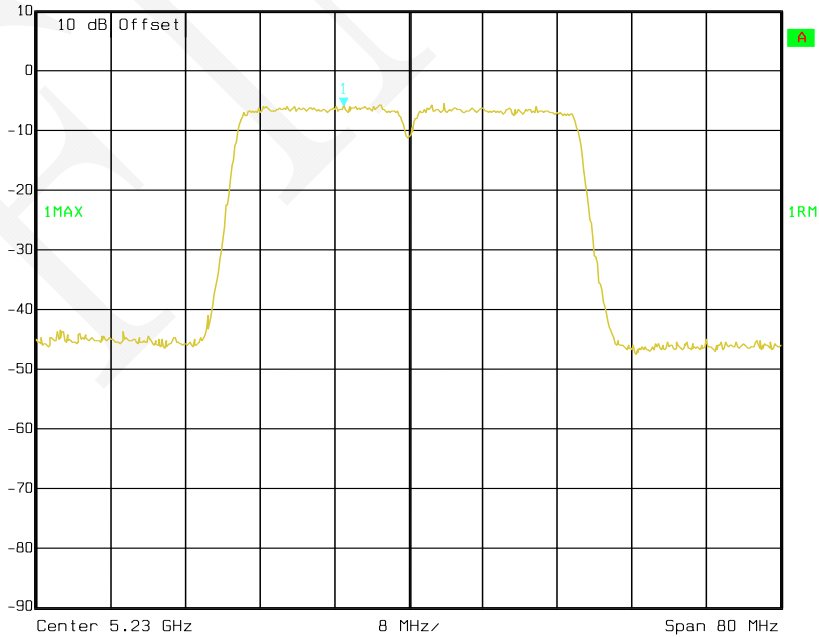


802.11ac 80 mode, Power Spectral Density-5210 MHz, Chain 0

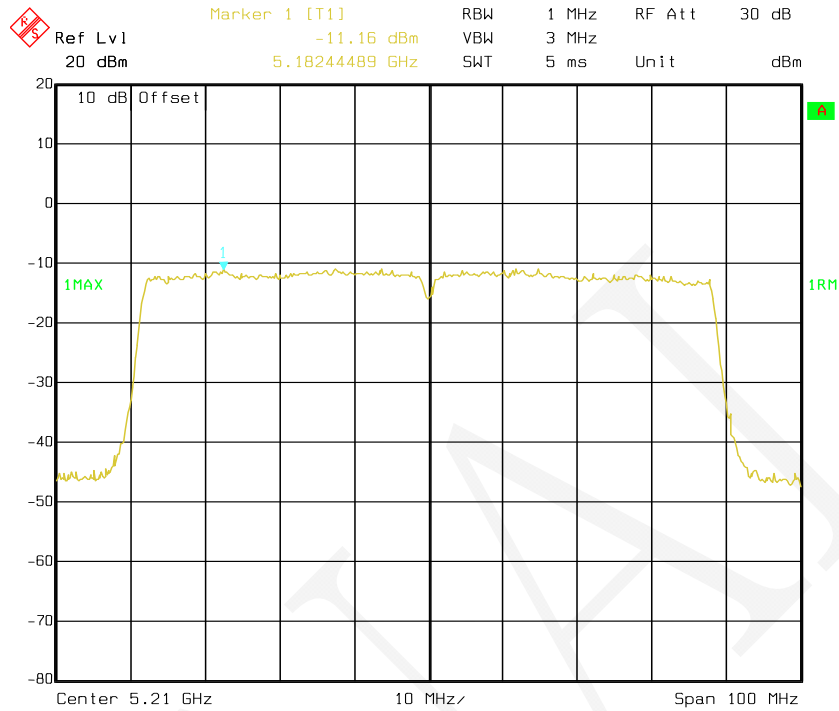

Date: 20.NOV.2019 18:31:54

802.11ac 80 mode, Power Spectral Density-5210 MHz, Chain 1

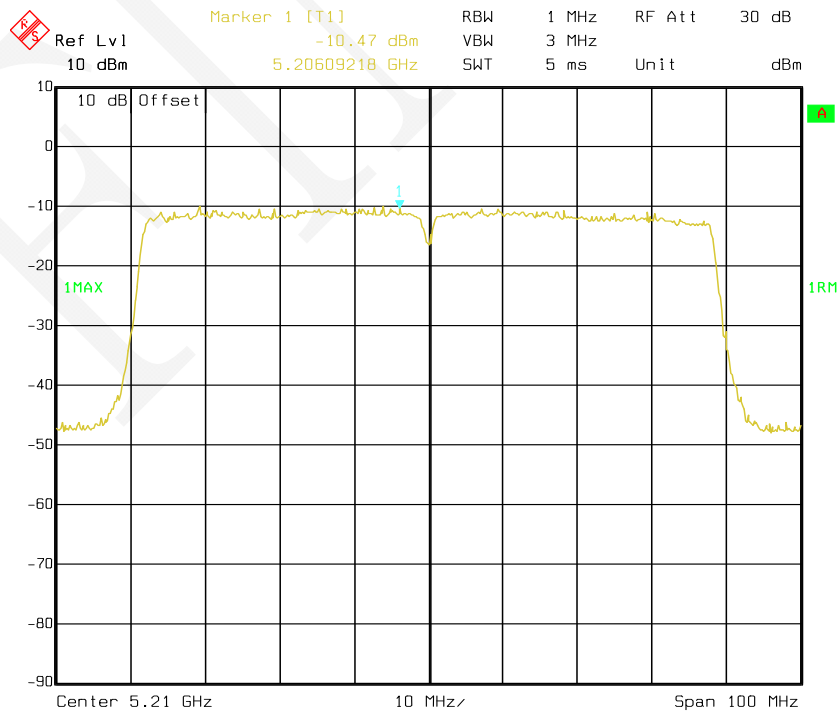

Date: 20.NOV.2019 18:48:57

For 5725-5850 MHz:

Mode	Frequency (MHz)	Power Spectral Density (dBm/500kHz)		Duty Cycle Factor (dB)	Corrected (dBm/500kHz)		Limit (dBm/500kHz)
		Chain 0	Chain 1		Chain 0	Chain 1	
802.11a	5745	-3.72	-3.31	0.09	-3.63	-3.22	30
	5785	-4.15	-5.48	0.09	-4.06	-5.39	30
	5825	-3.72	-6.92	0.09	-3.63	-6.83	30

Mode	Channel	Frequency (MHz)	Power Spectral Density (dBm/500kHz)		Duty Cycle Factor (dB)	Total (dBm/500kHz)	Limit (dBm/500kHz)
			Chain 0	Chain 1			
802.11n-HT20	Low	5745	-4.07	-4.48	0.10	-1.16	28.4
	Middle	5785	-4.48	-5.41	0.10	-1.81	28.4
	High	5825	-3.84	-6.36	0.10	-1.81	28.4
802.11n-HT40	Low	5755	-6.25	-6.70	0.26	-3.20	28.4
	High	5795	-5.98	-7.84	0.26	-3.54	28.4
802.11ac20	Low	5745	-4.07	-4.24	0.10	-1.04	28.4
	Middle	5785	-4.26	-4.99	0.10	-1.50	28.4
	High	5825	-3.91	-3.51	0.10	-0.60	28.4
802.11ac40	Low	5755	-6.37	-6.28	0.23	-3.08	28.4
	High	5795	-6.25	-7.90	0.23	-3.76	28.4
802.11ac80	/	5775	-9.08	-10.59	0.48	-6.28	28.4

Note:

1. The max antenna gain is 4.6dBi.
2. The device employed Cyclic Delay Diversity (CDD) for 802.11 MIMO transmitting, per KDB 662911 D01 Multiple Transmitter Output v02r01, for power spectral density measurements on IEEE 802.11 devices:


$$\text{Array Gain} = 10 \cdot \log(N_{\text{ANT}}/N_{\text{SS}}) \text{dB}$$

So:

$$\text{Directional gain} = \text{GANT} + \text{Array Gain} = 4.6 + 10 \cdot \log(2) = 7.6 > 6 \text{dBi}$$


The power density Limit was reduced 1.6dB in MIMO mode.

802.11a mode, Power Spectral Density-5745 MHz, Chain 0

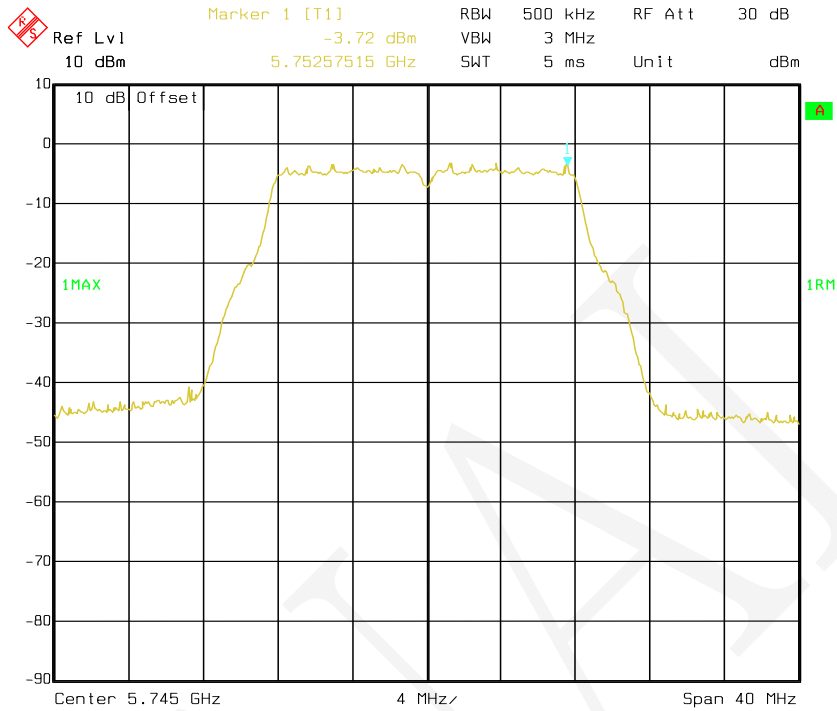


Date: 14.NOV.2019 20:14:06

802.11a mode, Power Spectral Density-5785 MHz, Chain 0

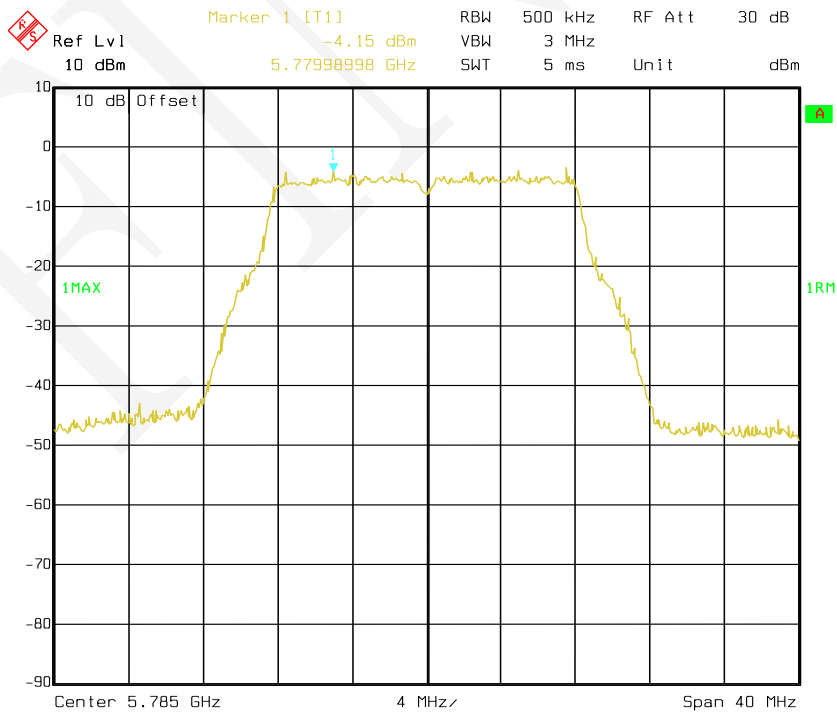


Date: 14.NOV.2019 20:14:40

802.11a mode, Power Spectral Density-5825 MHz, Chain 0

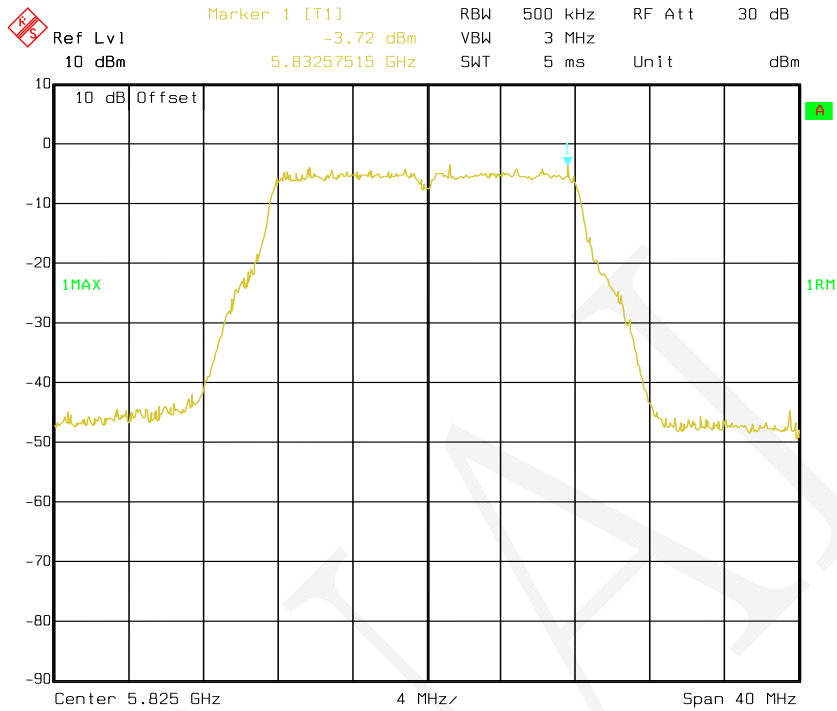


Date: 14.NOV.2019 20:15:02

802.11a mode, Power Spectral Density-5745 MHz, Chain 1

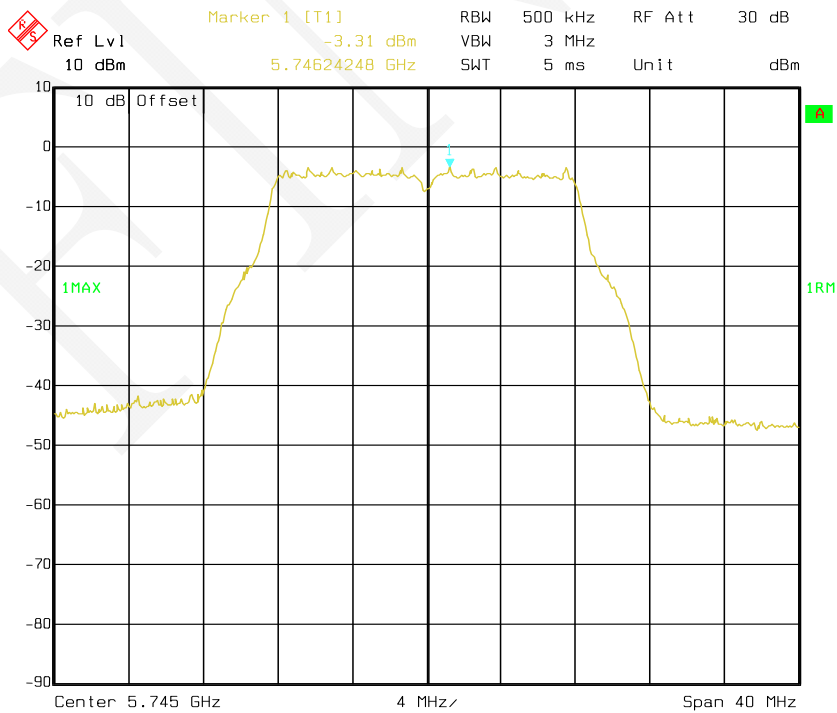


Date: 14.NOV.2019 16:27:28


802.11a mode, Power Spectral Density-5785 MHz, Chain 1

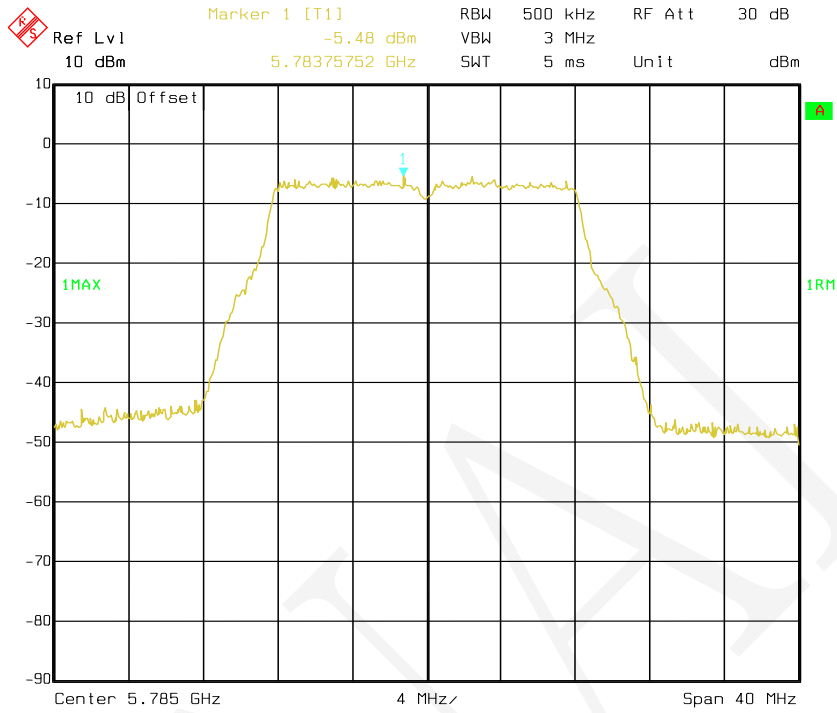

802.11a mode, Power Spectral Density-5825 MHz, Chain 1

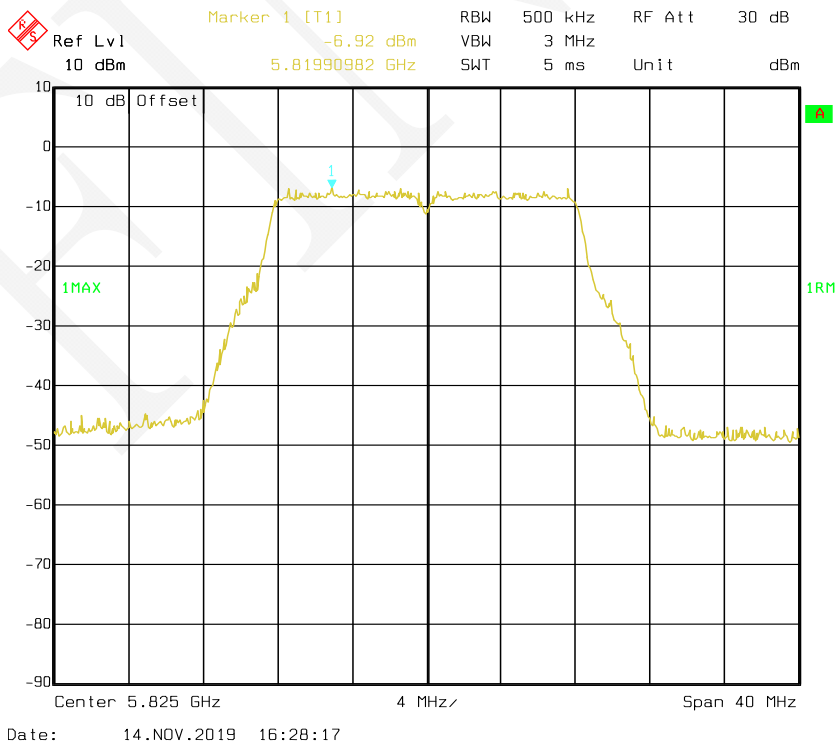


802.11n-HT20 mode, Power Spectral Density-5745 MHz, Chain 0

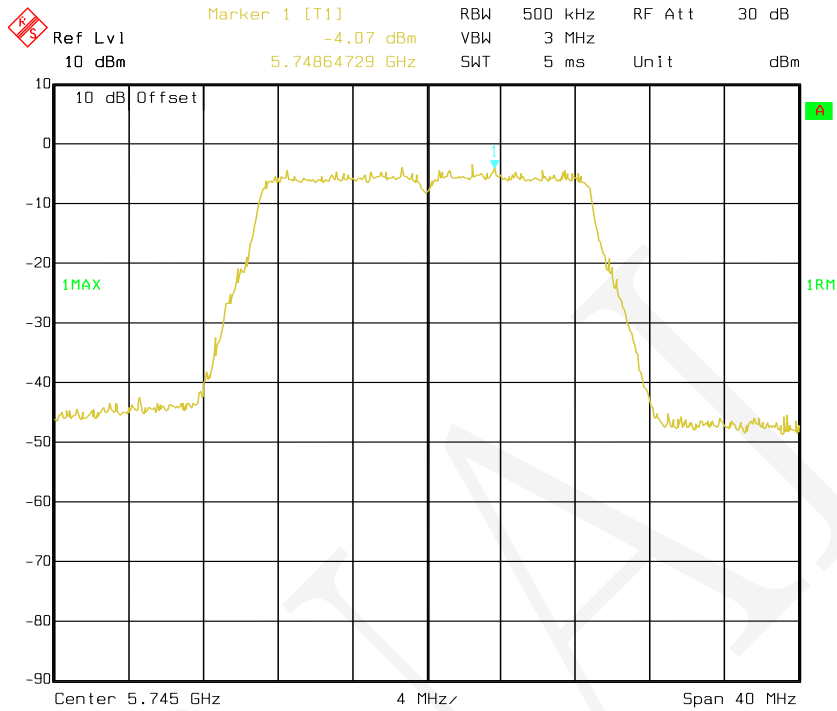


Date: 14.NOV.2019 20:19:15

802.11n-HT20 mode, Power Spectral Density-5785 MHz, Chain 0

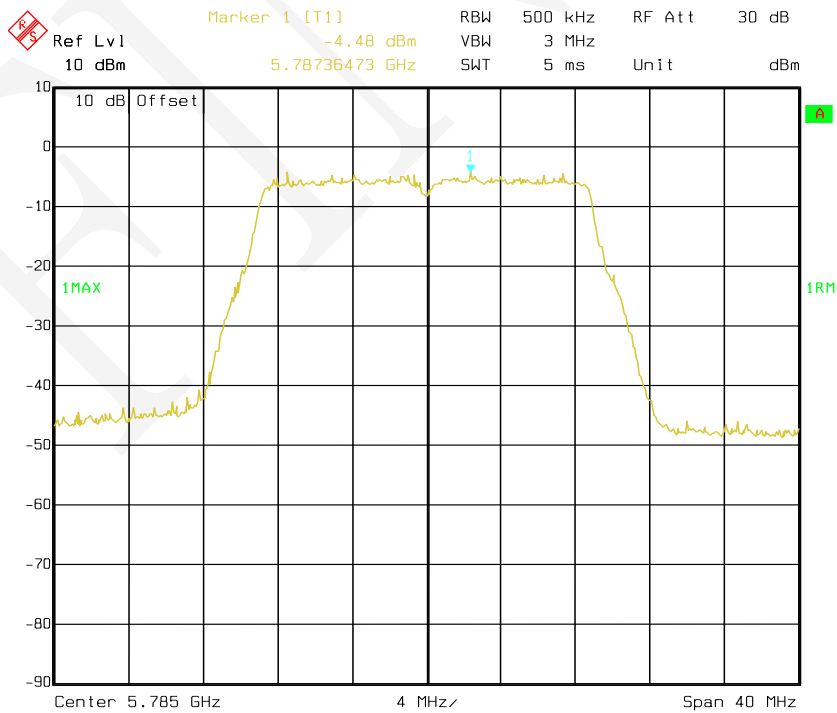


Date: 14.NOV.2019 20:19:45


802.11n-HT20 mode, Power Spectral Density-5825 MHz, Chain 0

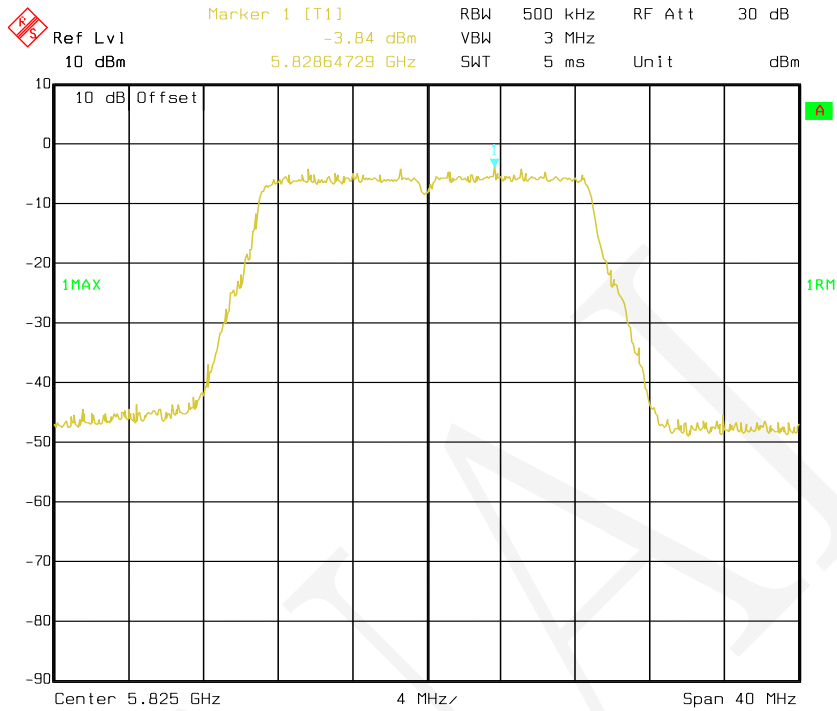

802.11n-HT20 mode, Power Spectral Density-5745 MHz, Chain 1

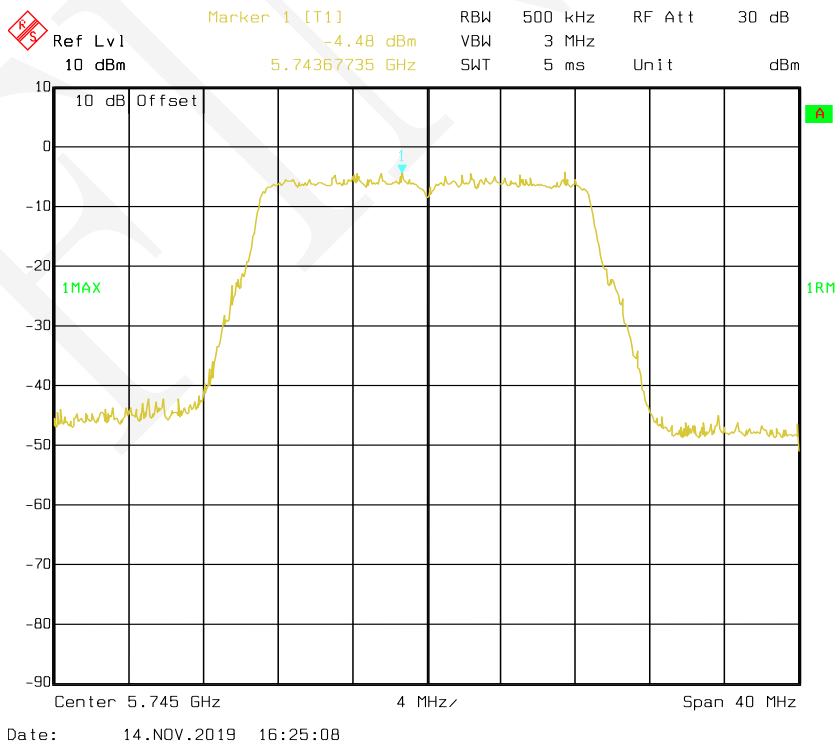


802.11n-HT20 mode, Power Spectral Density-5785 MHz, Chain 1

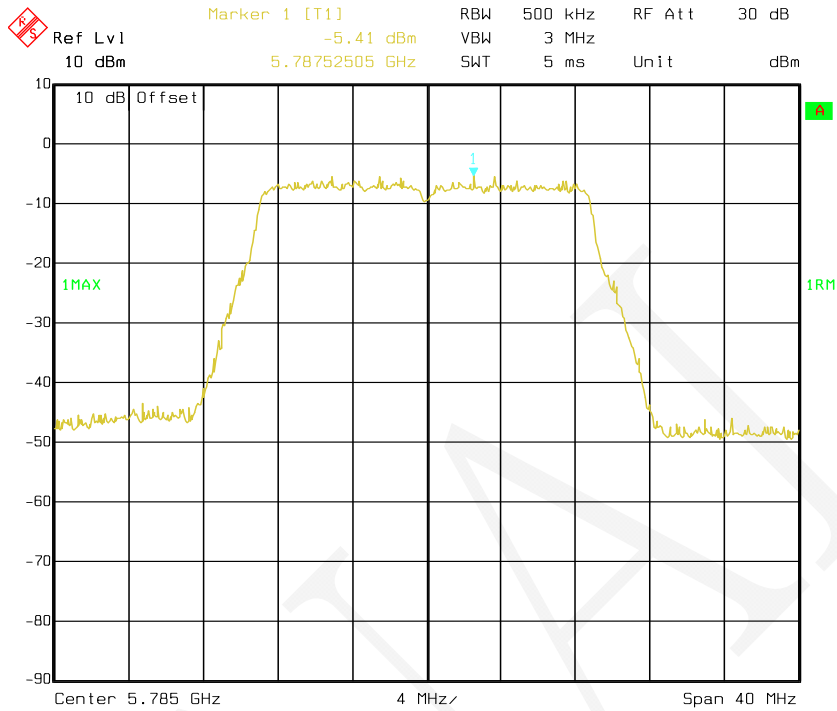


Date: 14.NOV.2019 16:25:26

802.11n-HT20 mode, Power Spectral Density-5825 MHz, Chain 1

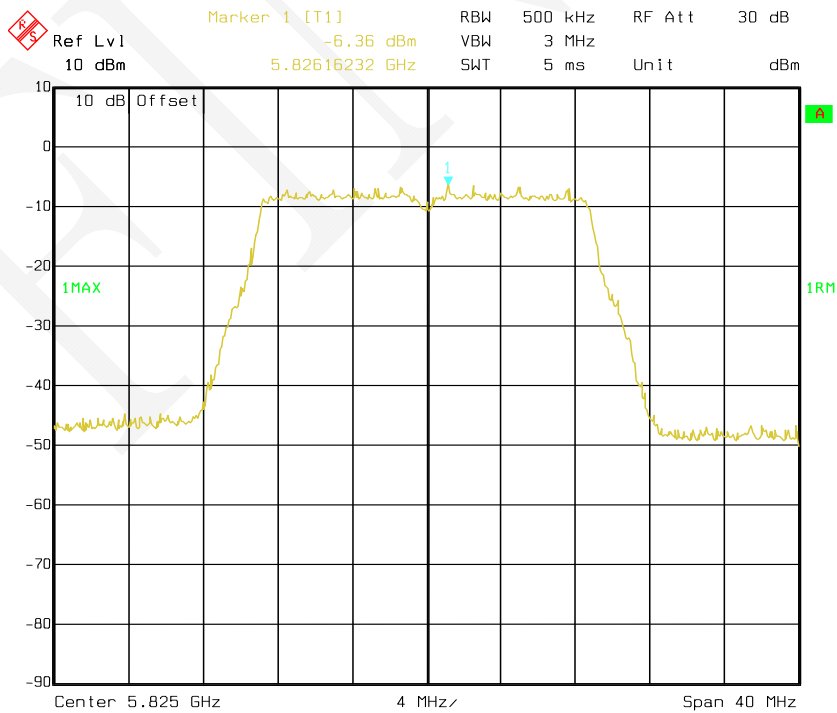


Date: 14.NOV.2019 16:25:43

802.11n-HT40 mode, Power Spectral Density-5755 MHz, Chain 0

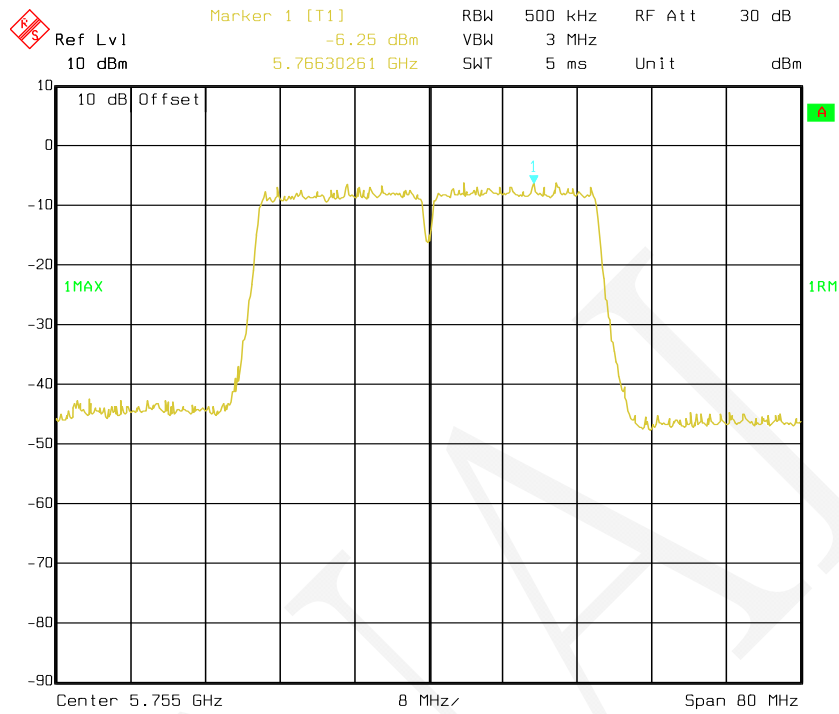


Date: 14.NOV.2019 20:20:31

802.11n-HT40 mode, Power Spectral Density-5795 MHz, Chain 0

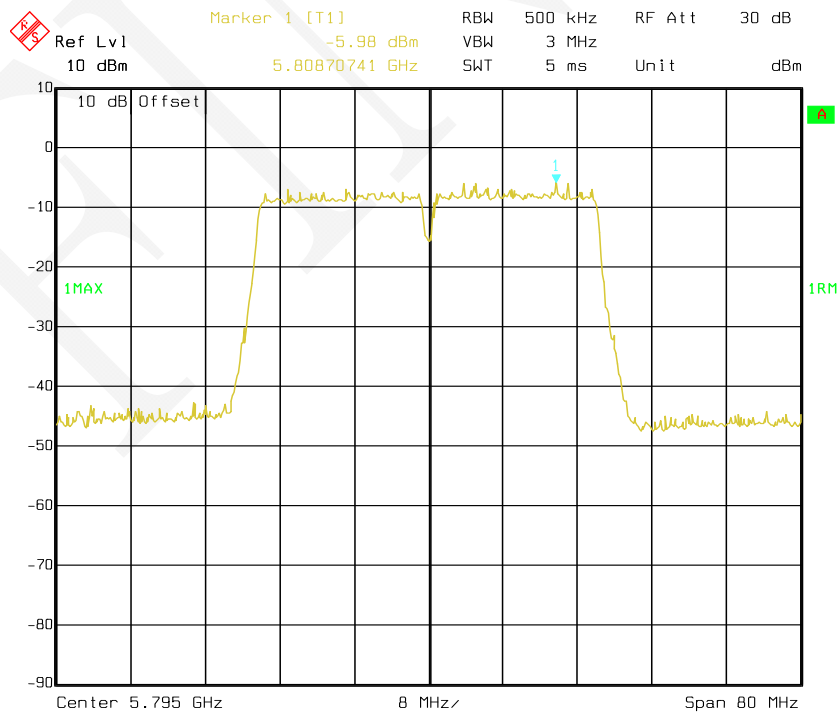


Date: 14.NOV.2019 20:20:52

802.11n-HT40 mode, Power Spectral Density-5755 MHz, Chain 1

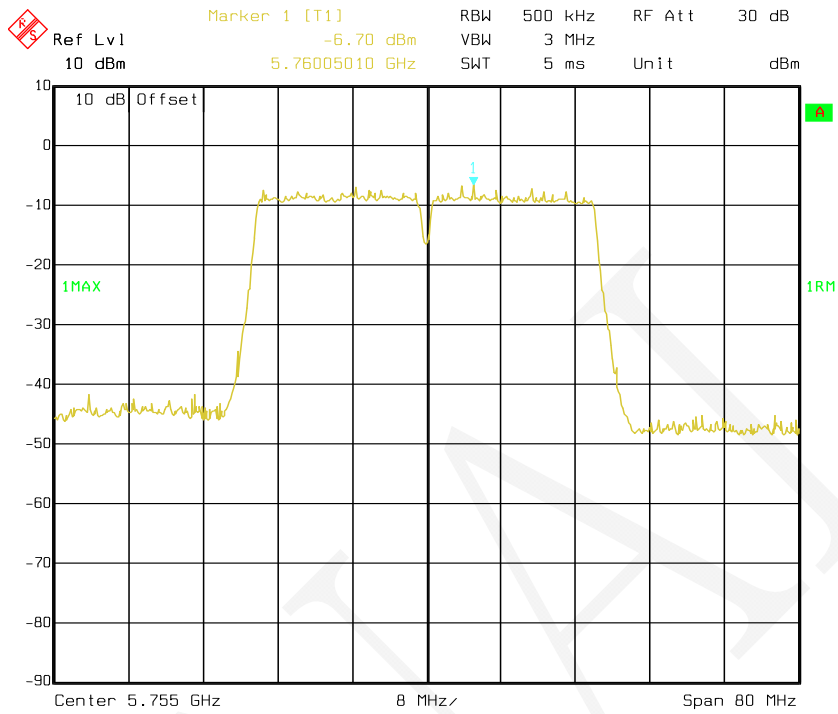


Date: 14.NOV.2019 16:24:19

802.11n-HT40 mode, Power Spectral Density-5795 MHz, Chain 1

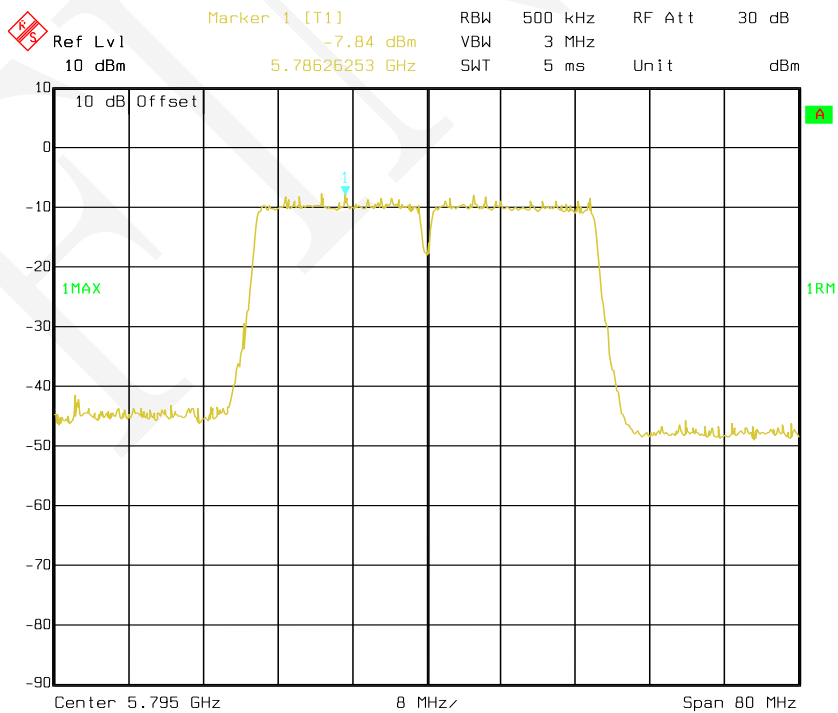


Date: 14.NOV.2019 16:24:44

802.11ac20 mode, Power Spectral Density-5745 MHz, Chain 0

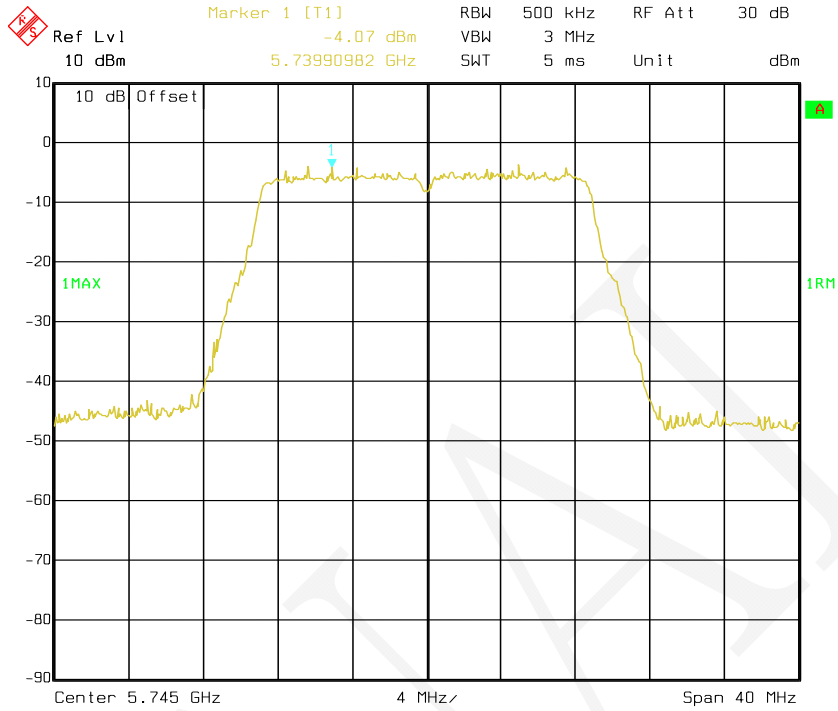


Date: 14.NOV.2019 20:15:34

802.11ac20 mode, Power Spectral Density-5785 MHz, Chain 0

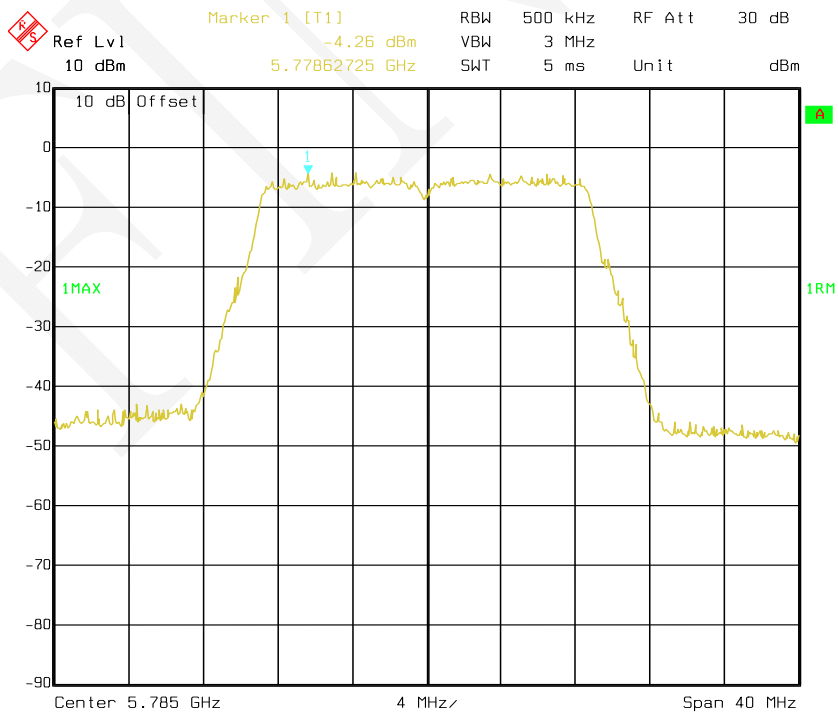


Date: 14.NOV.2019 20:16:09

802.11ac20 mode, Power Spectral Density-5825 MHz, Chain 0

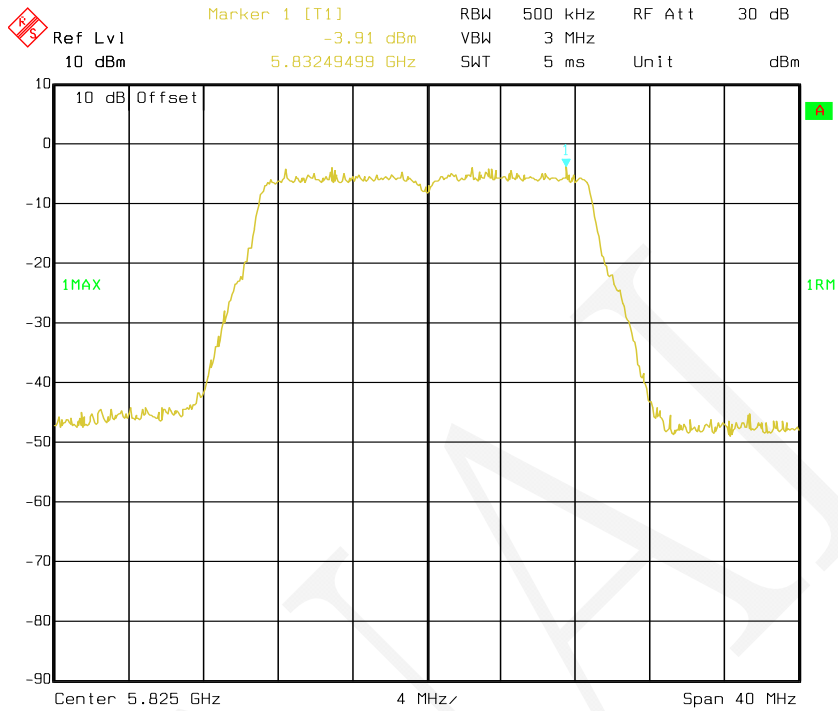


Date: 14.NOV.2019 20:16:29

802.11ac20 mode, Power Spectral Density-5745 MHz, Chain 1

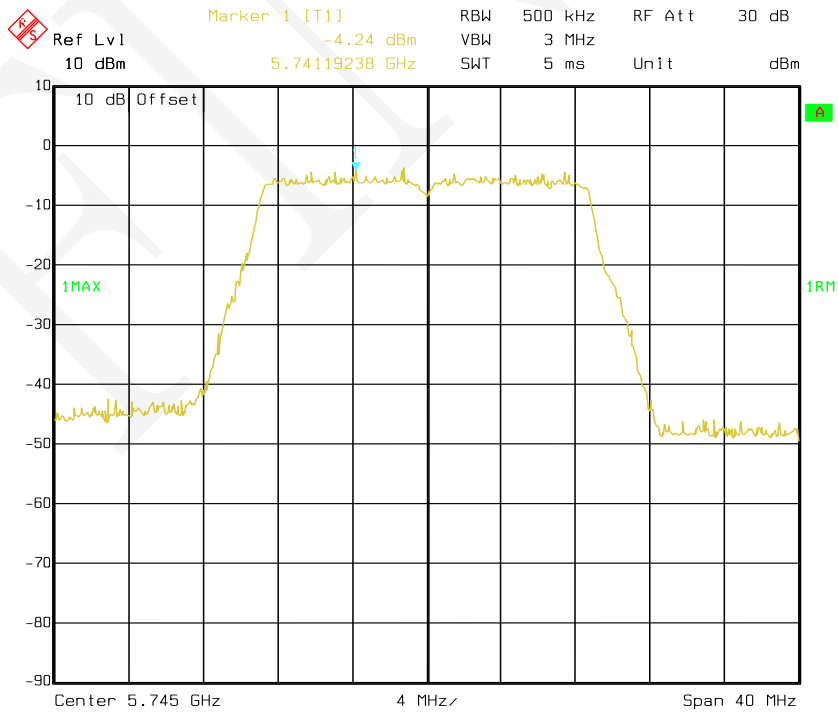


Date: 14.NOV.2019 16:28:44

802.11ac20 mode, Power Spectral Density-5785 MHz, Chain 1

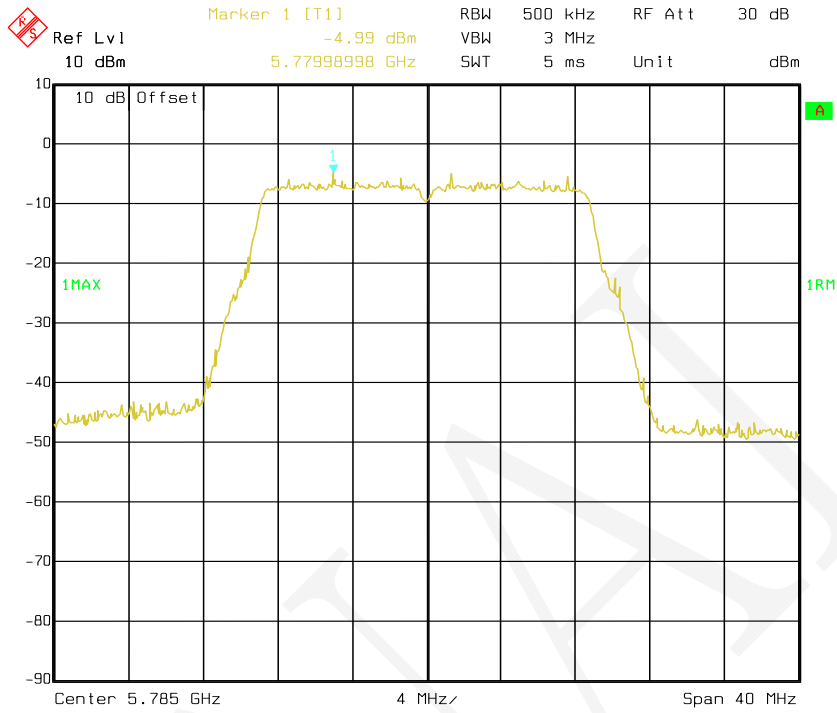


Date: 14.NOV.2019 16:29:07

802.11ac20 mode, Power Spectral Density-5825 MHz, Chain 1

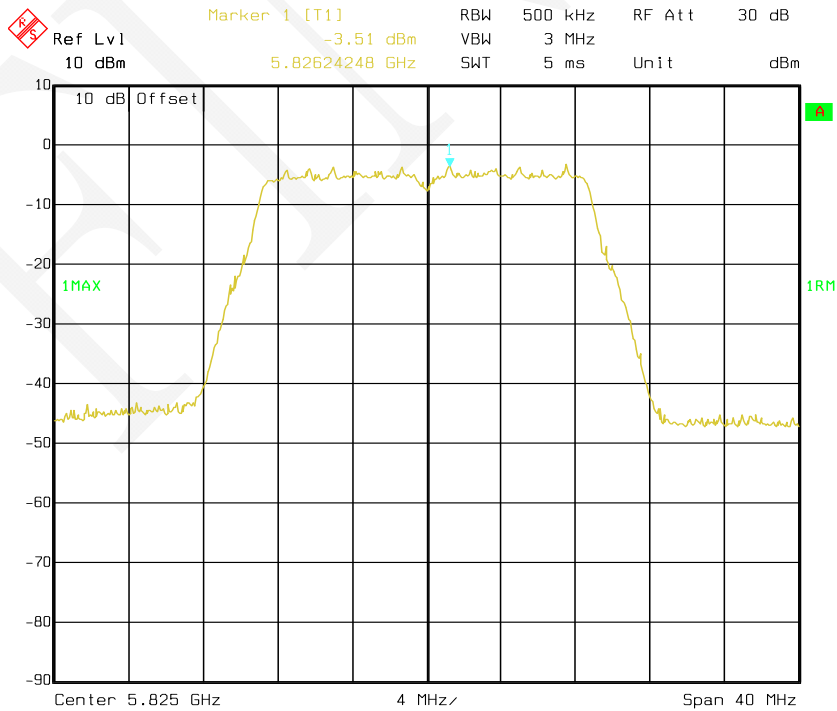


Date: 14.NOV.2019 20:31:06

802.11ac40 mode, Power Spectral Density-5755 MHz, Chain 0

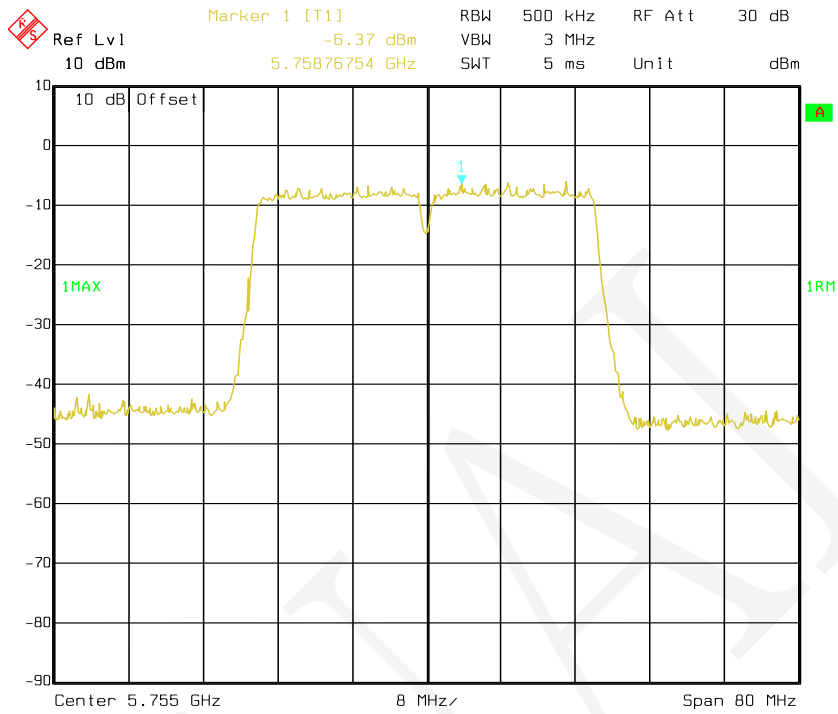


Date: 14.NOV.2019 20:17:08

802.11ac40 mode, Power Spectral Density-5795 MHz, Chain 0

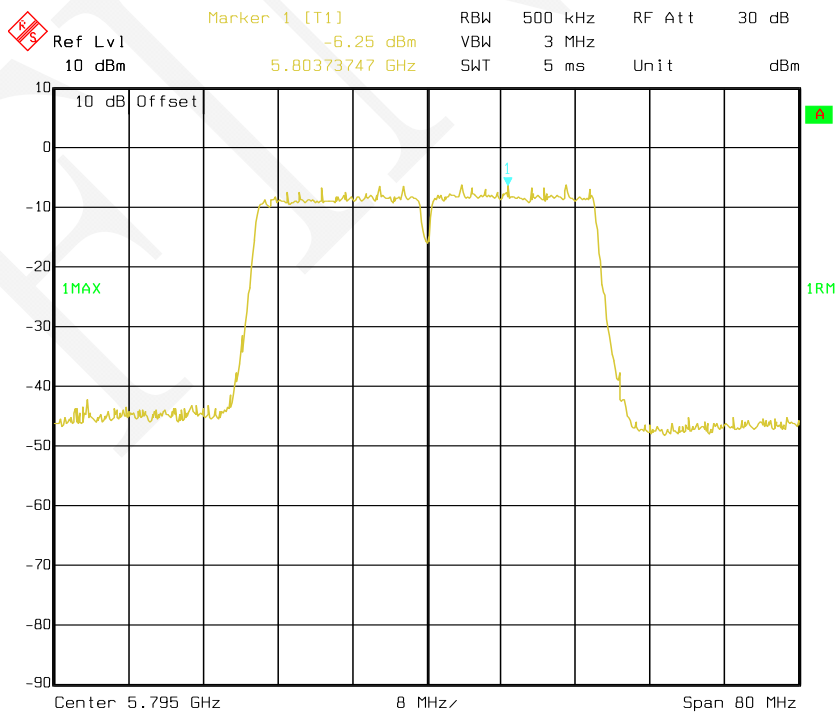


Date: 14.NOV.2019 20:17:30

802.11ac40 mode, Power Spectral Density-5755 MHz, Chain 1

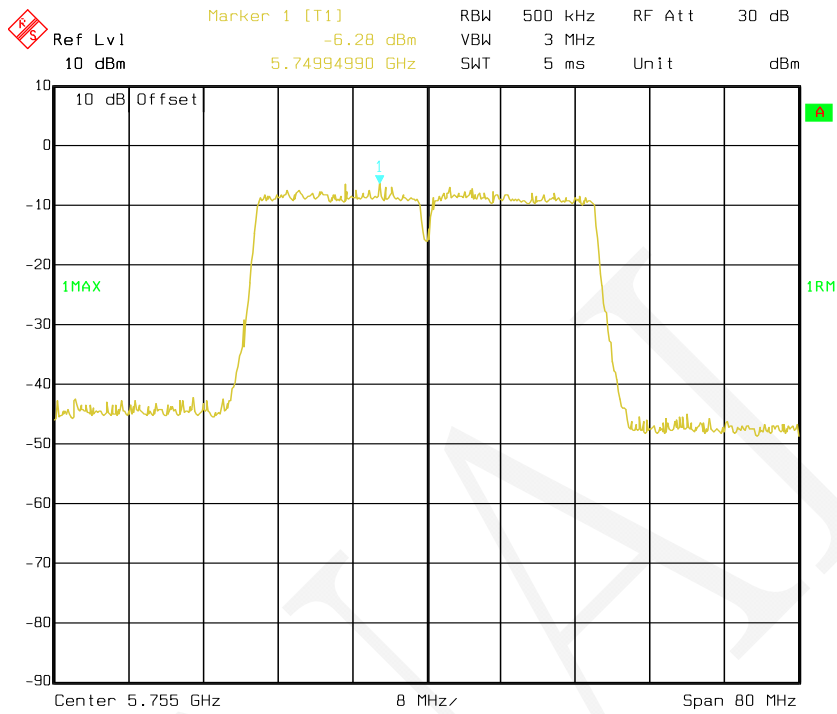


Date: 14.NOV.2019 16:30:00

802.11ac40 mode, Power Spectral Density-5795 MHz, Chain 1

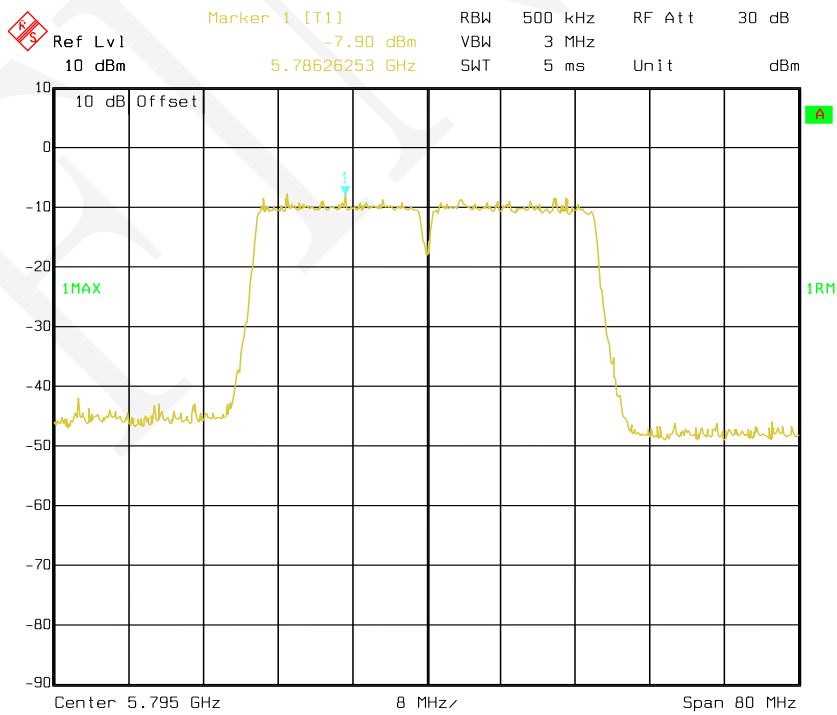


Date: 14.NOV.2019 16:30:23

802.11ac80 mode, Power Spectral Density-5775 MHz, Chain 0

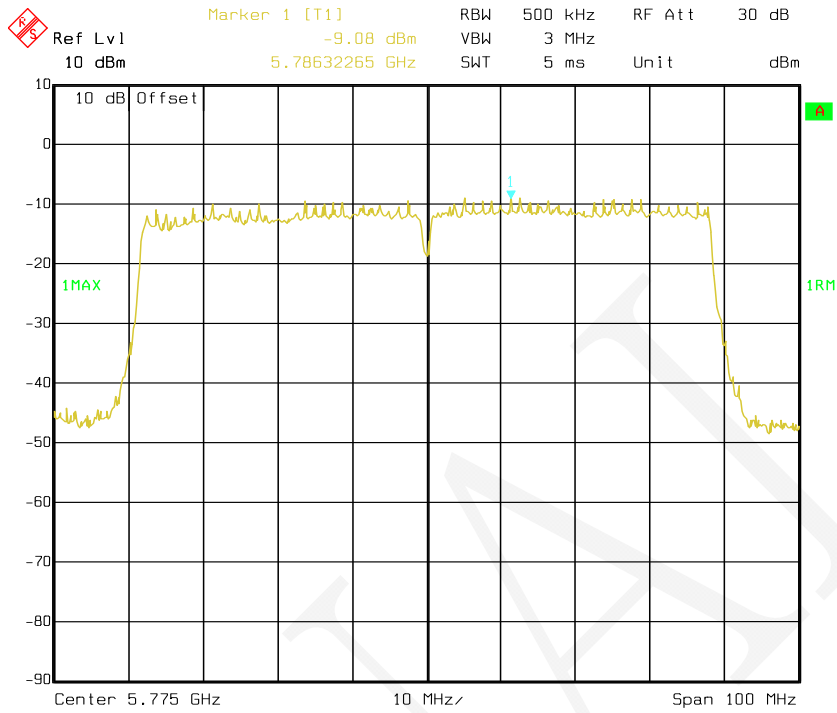

802.11ac80 mode, Power Spectral Density-5775 MHz, Chain 1

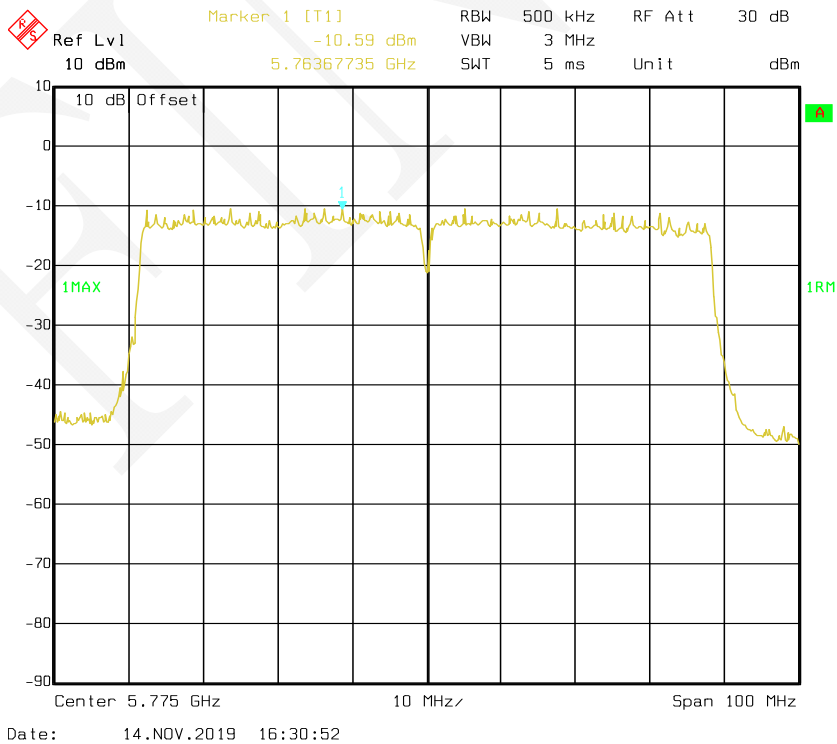

END OF REPORT