

WIFI 2.4G 802.11b 2412_Left Edge 0mm Ant 1

Communication System: UID 0, 2.45GHz Wi-Fi (0); Communication System Band: ISM 2.4GHz; Frequency: 2412 MHz;

Medium parameters used (interpolated): $f = 2412$ MHz; $\sigma = 1.79$ S/m; $\epsilon_r = 39.35$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7383; ConvF(7.65, 7.65, 7.65); Calibrated: 2022/1/12;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -19.0, 31.0$
- Electronics: DAE3 Sn427; Calibrated: 2022/4/12
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (6x14x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 1.09 W/kg


Configuration/Body/Zoom Scan (7x7x4)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 24.56 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 1.48 W/kg

SAR(1 g) = 0.701 W/kg; SAR(10 g) = 0.306 W/kg

Maximum value of SAR (measured) = 1.19 W/kg

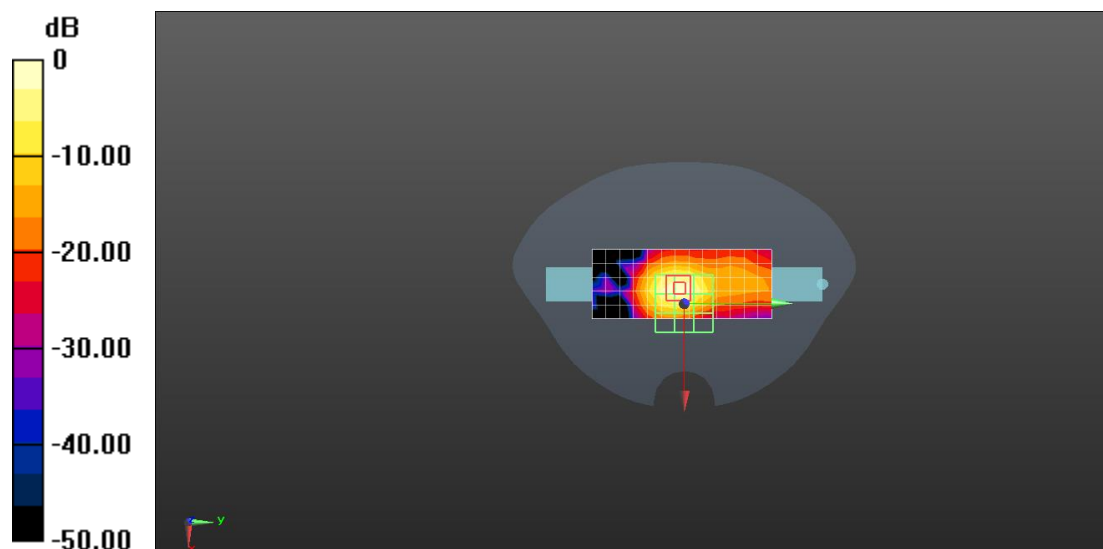

0 dB = 1.09 W/kg = 0.37 dBW/kg

WIFI 2.4G 802.11b 2412_Right Edge 0mm Ant 2

Communication System: UID 0, 2.45GHz Wi-Fi (0); Communication System Band: ISM 2.4GHz; Frequency: 2412 MHz;

Medium parameters used (interpolated): $f = 2412$ MHz; $\sigma = 1.79$ S/m; $\epsilon_r = 39.35$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7383; ConvF(7.65, 7.65, 7.65); Calibrated: 2022/1/12;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -19.0, 31.0$
- Electronics: DAE3 Sn427; Calibrated: 2022/4/12
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (6x14x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 1.43 W/kg


Configuration/Body/Zoom Scan (7x7x4)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 27.39 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 1.96 W/kg

SAR(1 g) = 0.923 W/kg; SAR(10 g) = 0.410 W/kg

Maximum value of SAR (measured) = 1.53 W/kg

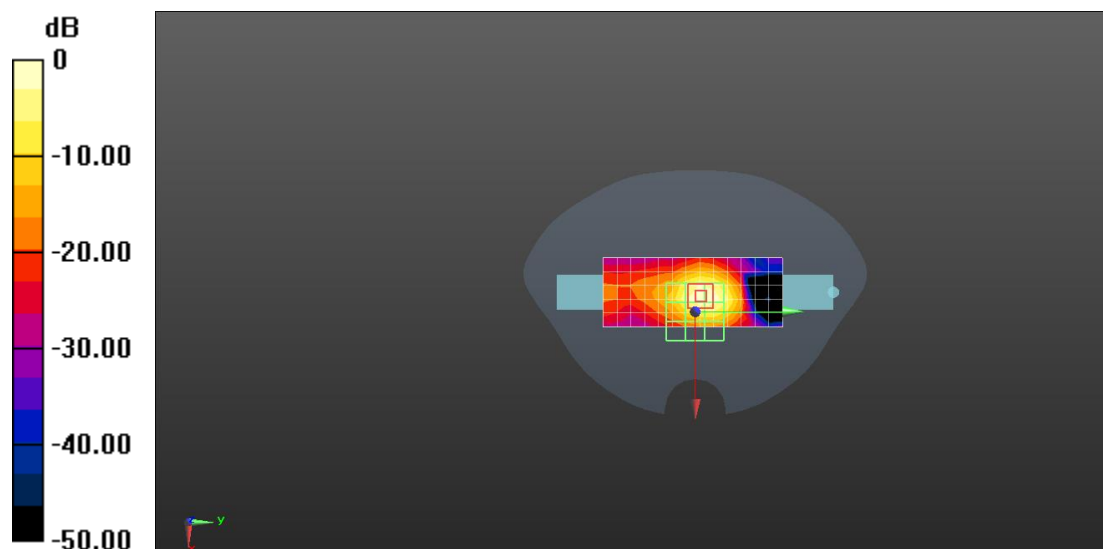

0 dB = 1.43 W/kg = 1.55 dBW/kg

WIFI 5G 802.11a 5180_Left Edge 0mm Ant 1

Communication System: UID 0, 5GHz Wi-Fi (0); Communication System Band: 5G Band(5030.0 - 5825.0 MHz); Frequency: 5180 MHz;
Medium parameters used: $f = 5180$ MHz; $\sigma = 4.65$ S/m; $\epsilon_r = 36.33$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7383; ConvF(5.5, 5.5, 5.5); Calibrated: 2022/1/12;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -19.0, 29.0$
- Electronics: DAE3 Sn427; Calibrated: 2022/4/12
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (7x17x1): Measurement grid: $dx=10$ mm, $dy=10$ mm
Maximum value of SAR (measured) = 1.16 W/kg


Configuration/Body/Zoom Scan (8x8x6)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 11.01 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 2.67 W/kg

SAR(1 g) = 0.714 W/kg; SAR(10 g) = 0.216 W/kg

Maximum value of SAR (measured) = 1.63 W/kg

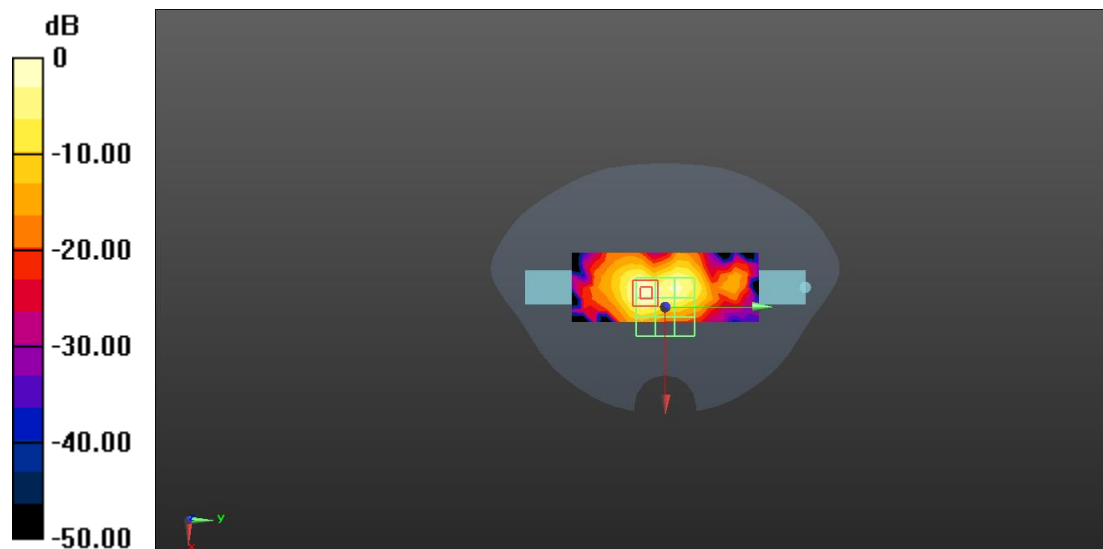

0 dB = 1.16 W/kg = 0.64 dBW/kg

WIFI 5G 802.11a 5825_Left Edge 0mm Ant 1


Communication System: UID 0, 5GHz Wi-Fi (0); Communication System Band: 5G Band(5030.0 - 5825.0 MHz); Frequency: 5825 MHz;
Medium parameters used (interpolated): $f = 5825$ MHz; $\sigma = 5.41$ S/m; $\epsilon_r = 35.34$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7383; ConvF(5.05, 5.05, 5.05); Calibrated: 2022/1/12;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -19.0, 29.0$
- Electronics: DAE3 Sn427; Calibrated: 2022/4/12
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (7x17x1): Measurement grid: $dx=10$ mm, $dy=10$ mm
Maximum value of SAR (measured) = 1.29 W/kg

Configuration/Body/Zoom Scan (8x8x6)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm
Reference Value = 10.11 V/m; Power Drift = -0.03 dB
Peak SAR (extrapolated) = 2.87 W/kg
SAR(1 g) = 0.653 W/kg; SAR(10 g) = 0.187 W/kg
Maximum value of SAR (measured) = 1.60 W/kg

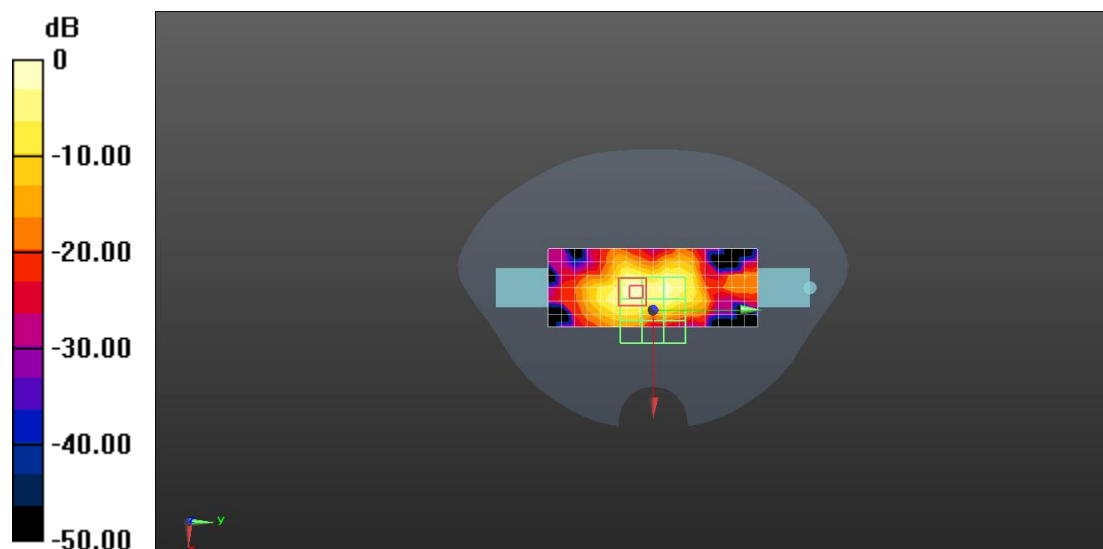

0 dB = 1.29 W/kg = 1.11 dBW/kg

WIFI 5G 802.11a 5200_Right Edge 0mm Ant 2

Communication System: UID 0, 5GHz Wi-Fi (0); Communication System Band: 5G Band(5030.0 - 5825.0 MHz); Frequency: 5200 MHz;
Medium parameters used: $f = 5200$ MHz; $\sigma = 4.67$ S/m; $\epsilon_r = 36.15$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7383; ConvF(5.5, 5.5, 5.5); Calibrated: 2022/1/12;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -19.0, 29.0$
- Electronics: DAE3 Sn427; Calibrated: 2022/4/12
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (7x17x1): Measurement grid: $dx=10$ mm, $dy=10$ mm
Maximum value of SAR (measured) = 1.57 W/kg


Configuration/Body/Zoom Scan (8x8x6)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 11.53 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 2.96 W/kg

SAR(1 g) = 0.776 W/kg; SAR(10 g) = 0.242 W/kg

Maximum value of SAR (measured) = 1.78 W/kg

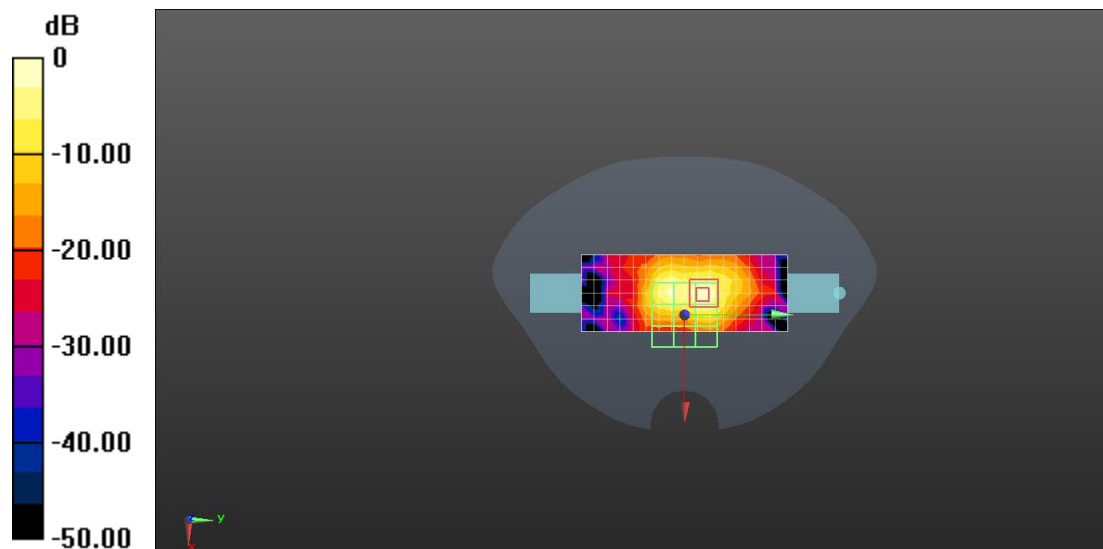

0 dB = 1.57 W/kg = 1.96 dBW/kg

WIFI 5G 802.11a 5825_Right Edge 0mm Ant 2

Communication System: UID 0, 5GHz Wi-Fi (0); Communication System Band: 5G

Band(5030.0 - 5825.0 MHz); Frequency: 5825 MHz;

Medium parameters used (interpolated): $f = 5825$ MHz; $\sigma = 5.41$ S/m; $\epsilon_r = 35.34$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7383; ConvF(5.05, 5.05, 5.05); Calibrated: 2022/1/12;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -19.0, 29.0$
- Electronics: DAE3 Sn427; Calibrated: 2022/4/12
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (7x17x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 1.30 W/kg


Configuration/Body/Zoom Scan (8x8x6)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 17.50 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 2.42 W/kg

SAR(1 g) = 0.559 W/kg; SAR(10 g) = 0.170 W/kg

Maximum value of SAR (measured) = 1.40 W/kg

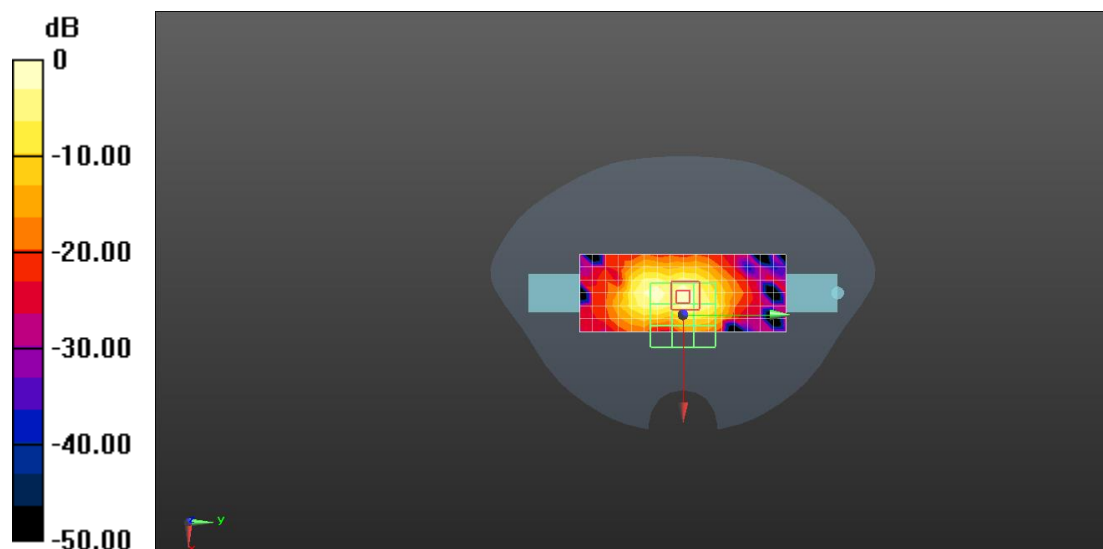

0 dB = 1.30 W/kg = 1.14 dBW/kg

BT 3DH5 2402_Left Edge 0mm

Communication System: UID 0, BT(0) (0); Communication System Band: BT; Frequency: 2402 MHz;

Medium parameters used (interpolated): $f = 2402$ MHz; $\sigma = 1.78$ S/m; $\epsilon_r = 39.31$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7383; ConvF(7.65, 7.65, 7.65); Calibrated: 2022/1/12;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -19.0, 31.0$
- Electronics: DAE3 Sn427; Calibrated: 2022/4/12
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (6x14x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.551 W/kg


Configuration/Body/Zoom Scan (7x7x4)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 16.97 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.734 W/kg

SAR(1 g) = 0.382 W/kg; SAR(10 g) = 0.191 W/kg

Maximum value of SAR (measured) = 0.604 W/kg

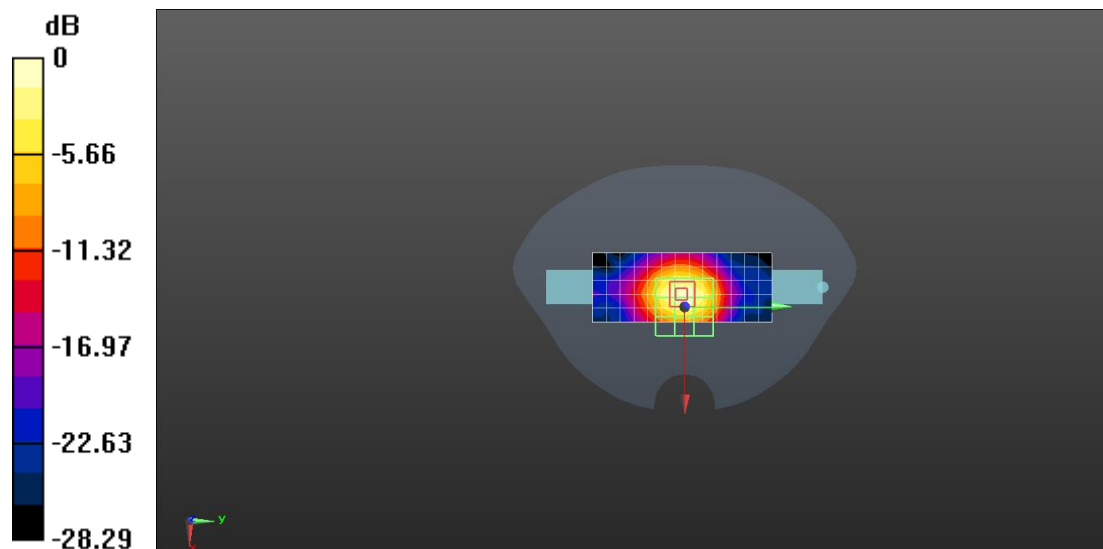

0 dB = 0.551 W/kg = -2.59 dBW/kg