



Test Report No.: RF2106WDG0461-2



# TEST REPORT



Applicant	Zound Industries International AB
Address	Centralplan 15 SE-111 20 Stockholm Sweden

Manufacturer or Supplier	Zound Industries International AB
Address	Centralplan 15 SE-111 20 Stockholm Sweden
Product	True Wireless Headphones
Brand Name	URBANEARS
Model	Urbanears Boo Tip
Additional Model & Model Difference	N/A
Date of tests	Aug. 23, 2021 ~ Nov. 05, 2021

the tests have been carried out according to the requirements of the following standards:

**FCC Part 15, Subpart C, Section 15.247**

**CONCLUSION: The submitted sample was found to COMPLY with the test requirement**

Tested by Lucas Chen Project Engineer / EMC Department	Approved by Glyn He Assistant Manager / EMC Department
	
	Date: Nov. 05, 2021

This report is governed by, and incorporates by reference, CPS Conditions of Service as posted at the date of issuance of this report at <https://www.cps-bureauveritas.com/terms-conditions> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.



## TABLE OF CONTENTS

<b>RELEASE CONTROL RECORD .....</b>	<b>4</b>
<b>1 SUMMARY OF TEST RESULTS.....</b>	<b>5</b>
<b>2 MEASUREMENT UNCERTAINTY .....</b>	<b>5</b>
<b>3 GENERAL INFORMATION .....</b>	<b>6</b>
3.1 GENERAL DESCRIPTION OF EUT.....	6
3.2 DESCRIPTION OF TEST MODES.....	7
3.2.1. CONFIGURATION OF SYSTEM UNDER TEST .....	8
3.2.2. TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL.....	8
3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS.....	10
3.4 DESCRIPTION OF SUPPORT UNITS.....	10
<b>4 TEST TYPES AND RESULTS.....</b>	<b>11</b>
4.1. RADIATED EMISSION AND BANDEDGE MEASUREMENT .....	11
4.1.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT .....	11
4.1.2 TEST INSTRUMENTS.....	12
4.1.3 TEST PROCEDURES .....	13
4.1.4 DEVIATION FROM TEST STANDARD .....	14
4.1.5 TEST SETUP.....	14
4.1.6 EUT OPERATING CONDITIONS .....	15
4.1.7 TEST RESULTS.....	16
4.2 NUMBER OF HOPPING FREQUENCY USED.....	32
4.2.1 LIMIT OF HOPPING FREQUENCY USED .....	32
4.2.2 TEST SETUP.....	32
4.2.3 TEST INSTRUMENTS.....	32
4.2.4 TEST PROCEDURES .....	33
4.2.5 DEVIATION FROM TEST STANDARD .....	33
4.2.6 TEST RESULTS.....	33
4.3 DWELL TIME ON EACH CHANNEL .....	36
4.3.1 LIMIT OF DWELL TIME USED .....	36
4.3.2 TEST SETUP.....	36
4.3.3 TEST INSTRUMENTS.....	36
4.3.4 TEST PROCEDURES .....	36
4.3.5 DEVIATION FROM TEST STANDARD .....	37
4.3.6 TEST RESULTS.....	37



**Test Report No.: RF2106WDG0461-2**

4.4	CHANNEL BANDWIDTH.....	40
4.4.1	LIMITS OF CHANNEL BANDWIDTH .....	40
4.4.2	TEST SETUP.....	40
4.4.3	TEST INSTRUMENTS.....	40
4.4.4	TEST PROCEDURE.....	40
4.4.5	DEVIATION FROM TEST STANDARD .....	40
4.4.6	EUT OPERATING CONDITION.....	40
4.4.7	TEST RESULTS.....	41
4.5	HOPPING CHANNEL SEPARATION .....	45
4.5.1	LIMIT OF HOPPING CHANNEL SEPARATION .....	45
4.5.2	TEST SETUP.....	45
4.5.3	TEST INSTRUMENTS.....	45
4.5.4	TEST PROCEDURES .....	45
4.5.5	DEVIATION FROM TEST STANDARD .....	45
4.5.6	TEST RESULTS.....	46
4.6	CONDUCTED OUTPUT POWER .....	50
4.6.1	LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT.....	50
4.6.2	TEST SETUP.....	50
4.6.3	TEST INSTRUMENTS.....	50
4.6.4	TEST PROCEDURES .....	50
4.6.5	DEVIATION FROM TEST STANDARD .....	50
4.6.6	EUT OPERATING CONDITION.....	51
4.6.7	TEST RESULTS.....	51
4.7	OUT OF BAND EMISSION MEASUREMENT .....	54
4.7.1	LIMITS OF OUT OF BAND EMISSION MEASUREMENT .....	54
4.7.2	TEST INSTRUMENTS.....	54
4.7.3	TEST PROCEDURE.....	54
4.7.4	DEVIATION FROM TEST STANDARD .....	54
4.7.5	EUT OPERATING CONDITION.....	54
4.7.6	TEST RESULTS.....	54
5	<b>PHOTOGRAPHS OF THE TEST CONFIGURATION .....</b>	<b>59</b>
6	<b>APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING</b>	
	<b>CHANGES TO THE EUT BY THE LAB .....</b>	<b>60</b>



Test Report No.: RF2106WDG0461-2

## RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF2106WDG0461-2	Original release	Nov. 05, 2021



# 1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 15, Subpart C			
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT	REMARK
15.207	AC Power Conducted Emission	N/A	Powered by Battery
15.247(a)(1)(iii)	Number of Hopping Frequency Used	PASS	Meet the requirement of limit.
15.247(a)(1)(iii)	Dwell Time on Each Channel	PASS	Meet the requirement of limit.
15.247(a)(1)	1. Hopping Channel Separation 2. Spectrum Bandwidth of a Frequency Hopping Sequence Spread Spectrum System	PASS	Meet the requirement of limit.
15.247(b)	Conducted Output Power	PASS	Meet the requirement of limit.
15.247(d)& 15.209	Transmitter Radiated Emission	PASS	Meet the requirement of limit.
15.247(d)	Out of band Emission Measurement	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	No antenna connector is used.

# 2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Radiated emissions	9KHz ~ 30MHz	2.16dB
	30MHz ~ 1GMHz	3.82dB
	1GHz ~ 18GHz	4.94dB
	18GHz ~ 40GHz	5.07dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.



### 3 GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

<b>PRODUCT</b>	True Wireless Headphones
<b>MODEL NO.</b>	Urbanears Boo Tip
<b>ADDITIONAL MODEL</b>	N/A
<b>FCC ID</b>	2AAGF-BOOTIP
<b>POWER SUPPLY</b>	Earbuds: DC 3.85V from Li-ion Battery or DC 5V from Charging Case; Charging Case: DC 3.7V from Li-ion Battery or DC 5V from USB Host Unit
<b>MODULATION TECHNOLOGY</b>	FHSS
<b>MODULATION TYPE</b>	GFSK, $\pi/4$ DQPSK, 8DPSK
<b>OPERATING FREQUENCY</b>	2402MHz~2480MHz
<b>NUMBER OF CHANNEL</b>	79
<b>PEAK OUTPUT POWER</b>	<b>Left Earbud:</b> 8.77mW (Max. Measured) <b>Right Earbud:</b> 8.222mW (Max. Measured)
<b>ANTENNA TYPE</b>	<b>Left Earbud:</b> FPCB Antenna, -0.75dBi Gain <b>Right Earbud:</b> FPCB Antenna, -0.95dBi Gain
<b>I/O PORTS</b>	Refer to user's manual
<b>CABLE SUPPLIED</b>	Refer to user's manual

**NOTES:**

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
2. For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.
3. Please refer to the EUT photo document (Reference No.: 2106WDG0461-2) for detailed product photo.
4. When the EUT charging that BT function can't working, the charging mode was tested in the FCC Part 15B(sDOC) report.(report no.: FS2106WDG0461).
5. This product has two Bluetooth Chips (distribute left earbud and right earbud), they are identical in RF circuitry except the antenna gain, all test items are carried out on the maximum power "left earbud" except Conducted Output power and Radiated Emission tests.



### 3.2 DESCRIPTION OF TEST MODES

79 channels are provided to this EUT:

CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)
0	2402	20	2422	40	2442	60	2462
1	2403	21	2423	41	2443	61	2463
2	2404	22	2424	42	2444	62	2464
3	2405	23	2425	43	2445	63	2465
4	2406	24	2426	44	2446	64	2466
5	2407	25	2427	45	2447	65	2467
6	2408	26	2428	46	2448	66	2468
7	2409	27	2429	47	2449	67	2469
8	2410	28	2430	48	2450	68	2470
9	2411	29	2431	49	2451	69	2471
10	2412	30	2432	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	78	2480
19	2421	39	2441	59	2461		



### 3.2.1. CONFIGURATION OF SYSTEM UNDER TEST

Please see section 5 photograph of the test configuration for reference.

### 3.2.2. TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports. The worst case was found when positioned on X axis for radiated emission. Following channel(s) was (were) selected for the final test as listed below:

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE<1G	RE≥1G	PLC	APCM	
A	√	√	-	√	Powered by Fully Battery with Bluetooth link

Where **RE<1G**: Radiated Emission below 1GHz      **RE≥1G**: Radiated Emission above 1GHz  
**PLC**: Power Line Conducted Emission      **APCM**: Antenna Port Conducted Measurement

**NOTE:** No need to concern of Conducted Emission due to the EUT is powered by battery.

#### RADIATED EMISSION TEST (BELOW 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, XYZ axis, antenna ports (if EUT with antenna diversity architecture) and packet type.
- Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	PACKET TYPE
0 to 78	39	FHSS	GFSK	DH5

For the test results, only the worst case was shown in test report.

#### RADIATED EMISSION TEST (ABOVE 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, XYZ axis, antenna ports (if EUT with antenna diversity architecture) and packet type.
- Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	PACKET TYPE
0 to 78	0, 39, 78	FHSS	GFSK	DH5
0 to 78	0, 39, 78	FHSS	8DPSK	3DH5





**ANTENNA PORT CONDUCTED MEASUREMENT:**

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, antenna ports (if EUT with antenna diversity architecture), and packet types.
- Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	PACKET TYPE
0 to 78	0, 39, 78	FHSS	GFSK	DH5
0 to 78	0, 39, 78	FHSS	8DPSK	3DH5

**TEST CONDITION:**

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	TEST VOLTAGE (SYSTEM)	TESTED BY
RE<1G	27deg. C, 58%RH	DC 3.85V From Fully Battery	Jelly
RE≥1G	26deg. C, 57%RH	DC 3.85V From Fully Battery	Panda
PLC	N/A	N/A	N/A
APCM	25deg. C, 60%RH	DC 3.85V From Fully Battery	Vincent



**BUREAU  
VERITAS**

Test Report No.: RF2106WDG0461-2

### **3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS**

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**FCC Part 15, Subpart C, Section 15.247**  
**KDB 558074 D01 15.247 Meas Guidance v05r02**  
**ANSI C63.10-2013**

All test items have been performed and recorded as per the above standards.

### **3.4 DESCRIPTION OF SUPPORT UNITS**

The EUT has been tested as an independent unit without any other necessary accessory or support units.



## 4 TEST TYPES AND RESULTS

### 4.1. RADIATED EMISSION AND BANDEDGE MEASUREMENT

#### 4.1.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a). Other emissions shall be at least 20dB below the highest level of the desired power.

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

**NOTES:**

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



**4.1.2 TEST INSTRUMENTS**

<b>Equipment</b>	<b>Manufacturer</b>	<b>Model No.</b>	<b>Serial No.</b>	<b>Next Cal.</b>
EMI Test Receiver	Rohde&Schwarz	ESU40	100449	Mar. 07,22
Signal and Spectrum Analyzer	Rohde&Schwarz	FSV7	102331	May 09, 22
Active Loop Antenna (9KHz -30MHz)	SCHWARZBECK	FMZB 1519B	1519B-045	May 29,22
Amplifier (9KHz -1GHz)	Burgeon	BPA-530	100210	Mar. 13,22
Bilog Antenna (20MHz -2GHz)	Teseq	CBL 6111D	30643	May 29,22
Horn Antenna (1GHz -18GHz)	ETS -Lindgren	3117	00062558	May 29,22
Horn Antenna (18GHz -40GHz)	SCHWARZBECK	BBHA 9170	BBHA9170147	May 09, 22
3m Semi-anechoic Chamber	ETS-LINDGREN	9m*6m*6m	NSEMC003	May 22,22
Test Software	ADT	ADT_Radiated_V 7.6.15.9.2	N/A	N/A
Broadband Preamplifier (1GHz~18GHz)	SCHWARZBECK	BBV9718	305	May 08,22
Pre-Amplifier (18GHz-40GHz)	EMCI	EMC 184045	980102	Mar. 13,22
Test Software	ADT	ADT_Radiated_V 7.6.15.9.2	N/A	N/A
BLUETOOTH TESTER	Rohde&Schwarz	CBT32	100811	N/A

**NOTES:**

1. The test was performed in 966 Chamber.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
3. The horn antenna is used only for the measurement of emission frequency above 1GHz if tested.
4. Test Firm Registration Number: 749762.
5. Designation Number: CN1174



#### 4.1.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 1.5 meters(above 1GHz) and 0.8 meters(below 1GHz) above the ground at a 3 meters semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. For below 1GHz was used bilog antenna, and above 1GHz was used horn antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. For below 30MHz, a loop antenna with its vertical plane is place 3m from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT. And the center of the loop shall be 1m above the ground.
- g. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, For battery operated equipment, the equipment tests shall be perform using fresh batteries. The turntable was rotated to maximize the emission level.

#### NOTES:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is  $\geq 1/T$  (Duty cycle < 98%) or 10Hz(Duty cycle > 98%) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.
5. The testing of the EUT was performed on all 3 orthogonal axes; the worst-case test configuration was reported on the file test setup photo.




#### 4.1.4 DEVIATION FROM TEST STANDARD


No deviation.

#### 4.1.5 TEST SETUP

##### Below 30MHz test setup

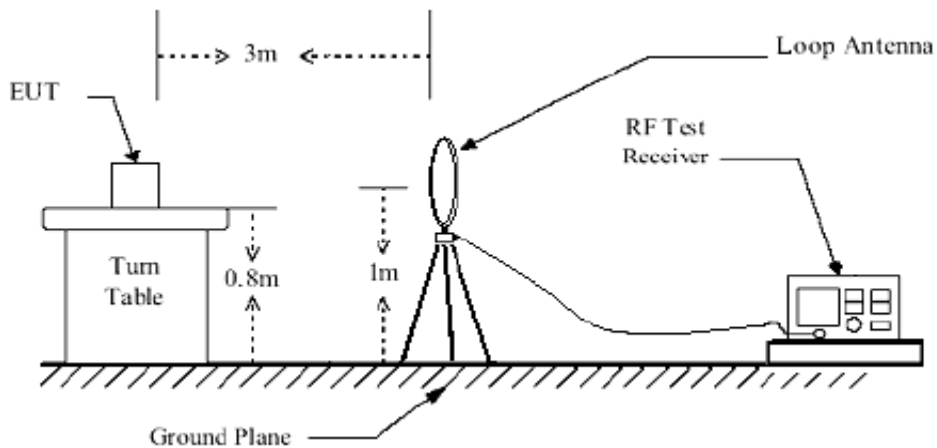


##### Below 1GHz test setup

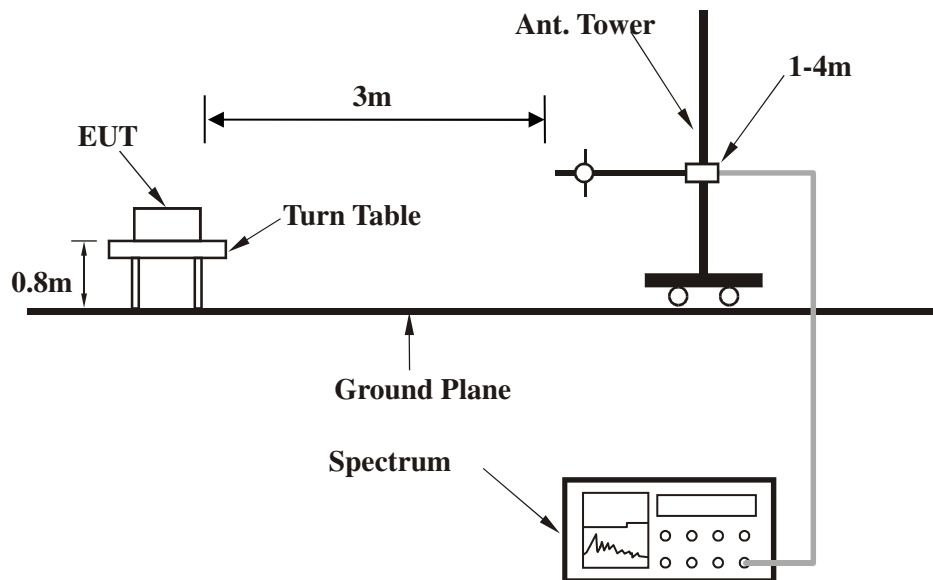

**Note:** For the actual test configuration, please refer to the attached file (Test Setup Photo).



## Above 1GHz test setup

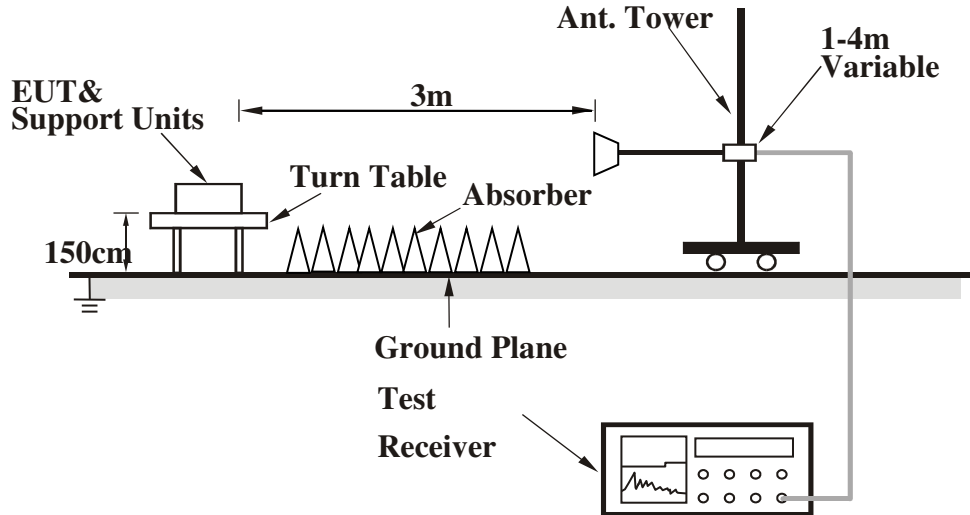

**Note:** For the actual test configuration, please refer to the attached file (Test Setup Photo).

### 4.1.6 EUT OPERATING CONDITIONS

- Set the EUT under full load condition and placed them on a testing table.
- Set the transmitter part of EUT under transmission condition continuously at specific channel frequency.
- The necessary accessories enable the EUT in full functions.



### 4.1.7 TEST RESULTS

#### BELOW 1GHz WORST-CASE DATA:

Left Earbud:


GFSK DH5

<b>CHANNEL</b>	Channel 39	<b>DETECTOR FUNCTION</b>	Quasi-Peak (QP)
<b>FREQUENCY RANGE</b>	9KHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	51.76	13.50 QP	40.00	-26.50	1.00 H	53	28.30	-14.80
2	157.47	13.54 QP	43.50	-29.96	1.00 H	257	27.55	-14.01
3	356.44	16.36 QP	46.00	-29.64	1.00 H	264	28.67	-12.31
4	507.23	19.57 QP	46.00	-26.43	1.00 H	14	29.30	-9.73
5	606.71	22.04 QP	46.00	-23.96	1.00 H	52	29.02	-6.98
6	682.88	22.96 QP	46.00	-23.04	1.00 H	37	28.86	-5.90

#### REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

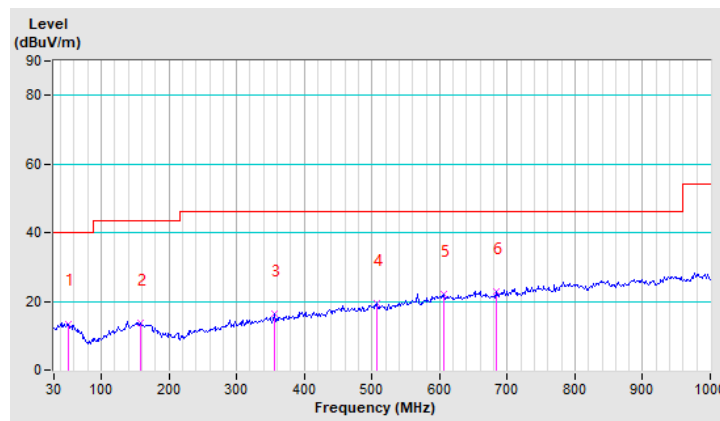






<b>CHANNEL</b>	Channel 39	<b>DETECTOR FUNCTION</b>	Quasi-Peak (QP)
<b>FREQUENCY RANGE</b>	9KHz ~ 1GHz		

<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>								
<b>NO.</b>	<b>FREQ. (MHz)</b>	<b>EMISSION LEVEL (dBuV/m)</b>	<b>LIMIT (dBuV/m)</b>	<b>MARGIN (dB)</b>	<b>ANTENNA HEIGHT (m)</b>	<b>TABLE ANGLE (Degree)</b>	<b>RAW VALUE (dBuV)</b>	<b>CORRECTION FACTOR (dB/m)</b>
1	40.88	13.62 QP	40.00	-26.38	1.00 V	97	28.11	-14.49
2	138.81	14.17 QP	43.50	-29.33	1.00 V	327	29.12	-14.95
3	289.60	14.48 QP	46.00	-31.52	1.00 V	142	28.39	-13.91
4	480.80	17.93 QP	46.00	-28.07	1.00 V	247	28.02	-10.09
5	628.48	21.64 QP	46.00	-24.36	1.00 V	347	28.27	-6.63
<b>6</b>	<b>731.07</b>	<b>23.53 QP</b>	<b>46.00</b>	<b>-22.47</b>	<b>1.00 V</b>	<b>254</b>	<b>28.26</b>	<b>-4.73</b>

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

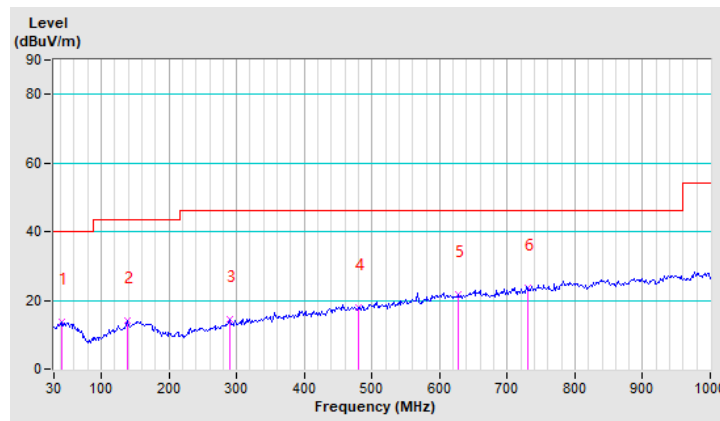



Right Earbud:


GFSK DH5

CHANNEL	Channel 39	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9KHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	37.77	12.77 QP	40.00	-27.23	1.00 H	76	27.65	-14.88
2	138.81	14.17 QP	43.50	-29.33	1.00 H	65	29.12	-14.95
3	289.60	14.48 QP	46.00	-31.52	1.00 H	37	28.39	-13.91
4	455.93	18.66 QP	46.00	-27.34	1.00 H	156	28.98	-10.32
5	567.85	21.94 QP	46.00	-24.06	1.00 H	317	30.05	-8.11
6	628.48	21.64 QP	46.00	-24.36	1.00 H	267	28.27	-6.63

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

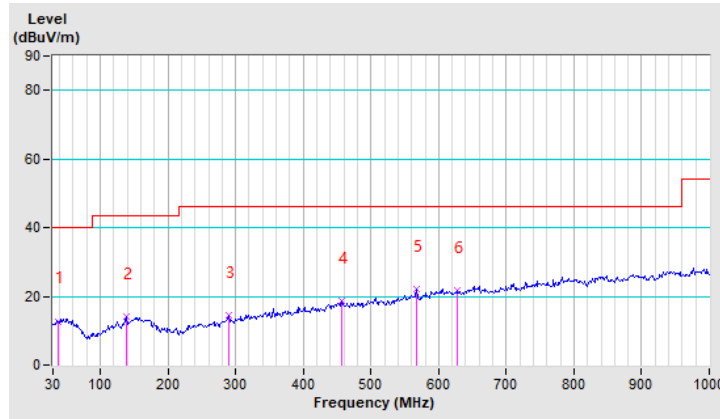




<b>CHANNEL</b>	Channel 39	<b>DETECTOR FUNCTION</b>	Quasi-Peak (QP)
<b>FREQUENCY RANGE</b>	9KHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	40.88	13.26 QP	40.00	-26.74	1.00 V	43	27.75	-14.49
2	138.81	14.17 QP	43.50	-29.33	1.00 V	99	29.12	-14.95
3	289.60	14.48 QP	46.00	-31.52	1.00 V	102	28.39	-13.91
4	455.93	17.87 QP	46.00	-28.13	1.00 V	144	28.19	-10.32
5	588.06	21.28 QP	46.00	-24.72	1.00 V	129	28.75	-7.47
6	670.45	21.88 QP	46.00	-24.12	1.00 V	34	27.93	-6.05

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

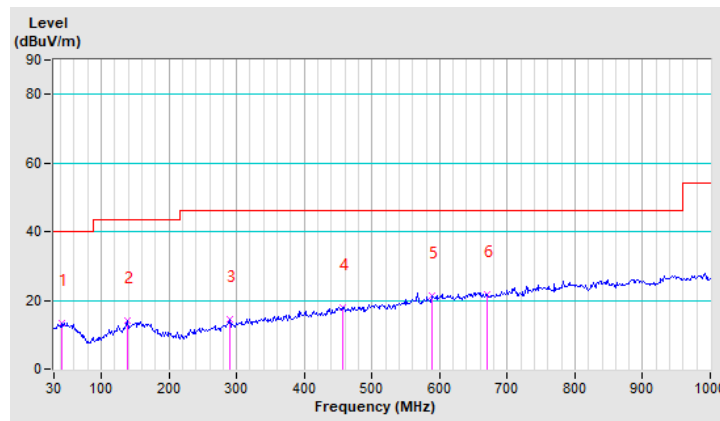



ABOVE 1GHz DATA

Left Earbud:

BT\_GFSK

CHANNEL	TX Channel 0	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	43.69 PK	74.00	-30.31	1.00 H	147	41.72	1.97
2	2390.00	37.15 AV	54.00	-16.85	1.00 H	147	35.18	1.97
3	*2402.00	98.12 PK			1.00 H	147	96.14	1.98
4	*2402.00	97.36 AV			1.00 H	147	95.38	1.98
5	4804.00	52.39 PK	74.00	-21.61	1.00 H	0	47.50	4.89
6	4804.00	42.70 AV	54.00	-11.30	1.00 H	0	37.81	4.89
7	#7206.00	56.00 PK	74.00	-18.00	1.00 H	0	46.44	9.56
8	#7206.00	45.76 AV	54.00	-8.24	1.00 H	0	36.20	9.56

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	44.72 PK	74.00	-29.28	1.00 V	147	42.75	1.97
2	2390.00	36.99 AV	54.00	-17.01	1.00 V	147	35.02	1.97
3	*2402.00	95.78 PK			1.00 V	147	93.80	1.98
4	*2402.00	94.32 AV			1.00 V	147	92.34	1.98
5	4804.00	53.05 PK	74.00	-20.95	1.00 V	0	48.16	4.89
6	4804.00	43.15 AV	54.00	-10.85	1.00 V	0	38.26	4.89
7	#7206.00	56.25 PK	74.00	-17.75	1.00 V	0	46.69	9.56
8	#7206.00	45.77 AV	54.00	-8.23	1.00 V	0	36.21	9.56

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



<b>CHANNEL</b>	TX Channel 39	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2441.00	97.00 PK			1.00 H	145	95.00	2.00
2	*2441.00	96.02 AV			1.00 H	145	94.02	2.00
3	4882.00	53.22 PK	74.00	-20.78	1.00 H	0	48.04	5.18
4	4882.00	42.09 AV	54.00	-11.91	1.00 H	0	36.91	5.18
5	7323.00	55.66 PK	74.00	-18.34	1.00 H	0	45.62	10.04
6	7323.00	43.12 AV	54.00	-10.88	1.00 H	0	33.08	10.04
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2441.00	95.38 PK			1.00 V	145	93.38	2.00
2	*2441.00	94.25 AV			1.00 V	145	92.25	2.00
3	4882.00	53.00 PK	74.00	-21.00	1.00 V	0	47.82	5.18
4	4882.00	42.92 AV	54.00	-11.08	1.00 V	0	37.74	5.18
5	7323.00	54.16 PK	74.00	-19.84	1.00 V	0	44.12	10.04
6	7323.00	43.12 AV	54.00	-10.88	1.00 V	0	33.08	10.04

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " \* ": Fundamental frequency.



<b>CHANNEL</b>	TX Channel 78	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	96.09 PK			1.00 H	125	94.07	2.02
2	*2480.00	95.42 AV			1.00 H	125	93.40	2.02
3	2483.50	54.38 PK	74.00	-19.62	1.00 H	125	52.35	2.03
4	2483.50	45.12 AV	54.00	-8.88	1.00 H	125	43.09	2.03
5	4960.00	54.12 PK	74.00	-19.88	1.00 H	0	48.63	5.49
6	4960.00	43.01 AV	54.00	-10.99	1.00 H	0	37.52	5.49
7	7440.00	56.25 PK	74.00	-17.75	1.00 H	0	45.74	10.51
8	7440.00	43.11 AV	54.00	-10.89	1.00 H	0	32.60	10.51
<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	94.88 PK			1.00 V	125	92.86	2.02
2	*2480.00	93.52 AV			1.00 V	125	91.50	2.02
3	2483.50	54.66 PK	74.00	-19.34	1.00 V	125	52.63	2.03
4	2483.50	45.10 AV	54.00	-8.90	1.00 V	125	43.07	2.03
5	4960.00	54.86 PK	74.00	-19.14	1.00 V	0	49.37	5.49
6	4960.00	43.72 AV	54.00	-10.28	1.00 V	0	38.23	5.49
7	7440.00	56.85 PK	74.00	-17.15	1.00 V	0	46.34	10.51
8	7440.00	46.82 AV	54.00	-7.18	1.00 V	0	36.31	10.51

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " \* " : Fundamental frequency.



BT\_8DPSK

CHANNEL	TX Channel 0	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	45.70 PK	74.00	-28.30	1.00 H	179	43.73	1.97
2	2390.00	36.58 AV	54.00	-17.42	1.00 H	179	34.61	1.97
3	*2402.00	98.10 PK			1.00 H	179	96.12	1.98
4	*2402.00	94.33 AV			1.00 H	179	92.35	1.98
5	4804.00	53.62 PK	74.00	-20.38	1.00 H	0	48.73	4.89
6	4804.00	42.55 AV	54.00	-11.45	1.00 H	0	37.66	4.89
7	#7206.00	56.34 PK	74.00	-17.66	1.00 H	0	46.78	9.56
8	#7206.00	45.74 AV	54.00	-8.26	1.00 H	0	36.18	9.56

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	45.33 PK	74.00	-28.67	1.00 V	179	43.36	1.97
2	2390.00	39.25 AV	54.00	-14.75	1.00 V	179	37.28	1.97
3	*2402.00	96.83 PK			1.00 V	179	94.85	1.98
4	*2402.00	94.75 AV			1.00 V	179	92.77	1.98
5	4804.00	54.12 PK	74.00	-19.88	1.00 V	0	49.23	4.89
6	4804.00	42.36 AV	54.00	-11.64	1.00 V	0	37.47	4.89
7	#7206.00	56.81 PK	74.00	-17.19	1.00 V	0	47.25	9.56
8	#7206.00	45.39 AV	54.00	-8.61	1.00 V	0	35.83	9.56

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



<b>CHANNEL</b>	TX Channel 39	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2441.00	98.10 PK			1.00 H	125	96.10	2.00
2	*2441.00	94.26 AV			1.00 H	125	92.26	2.00
3	4882.00	53.60 PK	74.00	-20.40	1.00 H	0	48.42	5.18
4	4882.00	42.83 AV	54.00	-11.17	1.00 H	0	37.65	5.18
5	7323.00	54.89 PK	74.00	-19.11	1.00 H	0	44.85	10.04
6	7323.00	45.69 AV	54.00	-8.31	1.00 H	0	35.65	10.04
<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2441.00	95.33 PK			1.00 V	125	93.33	2.00
2	*2441.00	91.20 AV			1.00 V	125	89.20	2.00
3	4882.00	52.93 PK	74.00	-21.07	1.00 V	0	47.75	5.18
4	4882.00	42.38 AV	54.00	-11.62	1.00 V	0	37.20	5.18
5	7323.00	55.16 PK	74.00	-18.84	1.00 V	0	45.12	10.04
6	7323.00	46.30 AV	54.00	-7.70	1.00 V	0	36.26	10.04

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " \* ": Fundamental frequency.





<b>CHANNEL</b>	TX Channel 78	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	97.65 PK			1.00 H	166	95.63	2.02
2	*2480.00	93.00 AV			1.00 H	166	90.98	2.02
3	2483.50	54.58 PK	74.00	-19.42	1.00 H	166	52.55	2.03
4	2483.50	45.11 AV	54.00	-8.89	1.00 H	166	43.08	2.03
5	4960.00	53.42 PK	74.00	-20.58	1.00 H	0	47.93	5.49
6	4960.00	42.00 AV	54.00	-12.00	1.00 H	0	36.51	5.49
7	7440.00	56.82 PK	74.00	-17.18	1.00 H	0	46.31	10.51
8	7440.00	45.41 AV	54.00	-8.59	1.00 H	0	34.90	10.51
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	94.82 PK			1.00 V	166	92.80	2.02
2	*2480.00	90.53 AV			1.00 V	166	88.51	2.02
3	2483.50	54.35 PK	74.00	-19.65	1.00 V	166	52.32	2.03
4	2483.50	46.25 AV	54.00	-7.75	1.00 V	166	44.22	2.03
5	4960.00	53.15 PK	74.00	-20.85	1.00 V	0	47.66	5.49
6	4960.00	43.15 AV	54.00	-10.85	1.00 V	0	37.66	5.49
7	7440.00	56.48 PK	74.00	-17.52	1.00 V	0	45.97	10.51
8	7440.00	45.67 AV	54.00	-8.33	1.00 V	0	35.16	10.51

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " \* " : Fundamental frequency.



Right Earbud:

BT\_GFSK

CHANNEL	TX Channel 0	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	42.83 PK	74.00	-31.17	1.00 H	125	40.86	1.97
2	2390.00	32.26 AV	54.00	-21.74	1.00 H	125	30.29	1.97
3	*2402.00	95.11 PK			1.00 H	125	93.13	1.98
4	*2402.00	94.35 AV			1.00 H	125	92.37	1.98
5	4804.00	51.72 PK	74.00	-22.28	1.00 H	0	46.83	4.89
6	4804.00	42.26 AV	54.00	-11.74	1.00 H	0	37.37	4.89
7	#7206.00	56.82 PK	74.00	-17.18	1.00 H	0	47.26	9.56
8	#7206.00	45.75 AV	54.00	-8.25	1.00 H	0	36.19	9.56
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	43.52 PK	74.00	-30.48	1.00 V	125	41.55	1.97
2	2390.00	36.77 AV	54.00	-17.23	1.00 V	125	34.80	1.97
3	*2402.00	97.53 PK			1.00 V	125	95.55	1.98
4	*2402.00	96.48 AV			1.00 V	125	94.50	1.98
5	4804.00	53.21 PK	74.00	-20.79	1.00 V	0	48.32	4.89
6	4804.00	43.15 AV	54.00	-10.85	1.00 V	0	38.26	4.89
7	#7206.00	57.33 PK	74.00	-16.67	1.00 V	0	47.77	9.56
8	#7206.00	45.39 AV	54.00	-8.61	1.00 V	0	35.83	9.56

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



CHANNEL	TX Channel 39	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2441.00	91.85 PK			1.00 H	125	89.85	2.00
2	*2441.00	90.75 AV			1.00 H	125	88.75	2.00
3	4882.00	53.00 PK	74.00	-21.00	1.00 H	0	47.82	5.18
4	4882.00	42.20 AV	54.00	-11.80	1.00 H	0	37.02	5.18
5	7323.00	54.37 PK	74.00	-19.63	1.00 H	0	44.33	10.04
6	7323.00	45.69 AV	54.00	-8.31	1.00 H	0	35.65	10.04
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2441.00	94.59 PK			1.00 V	125	92.59	2.00
2	*2441.00	93.67 AV			1.00 V	125	91.67	2.00
3	4882.00	53.15 PK	74.00	-20.85	1.00 V	0	47.97	5.18
4	4882.00	42.52 AV	54.00	-11.48	1.00 V	0	37.34	5.18
5	7323.00	54.76 PK	74.00	-19.24	1.00 V	0	44.72	10.04
6	7323.00	45.35 AV	54.00	-8.65	1.00 V	0	35.31	10.04

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " \* ": Fundamental frequency.



<b>CHANNEL</b>	TX Channel 78	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	92.28 PK			1.00 H	125	90.26	2.02
2	*2480.00	91.38 AV			1.00 H	125	89.36	2.02
3	2483.50	54.16 PK	74.00	-19.84	1.00 H	125	52.13	2.03
4	2483.50	45.27 AV	54.00	-8.73	1.00 H	125	43.24	2.03
5	4960.00	53.29 PK	74.00	-20.71	1.00 H	0	47.80	5.49
6	4960.00	42.55 AV	54.00	-11.45	1.00 H	0	37.06	5.49
7	7440.00	56.83 PK	74.00	-17.17	1.00 H	0	46.32	10.51
8	7440.00	45.25 AV	54.00	-8.75	1.00 H	0	34.74	10.51
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	93.55 PK			1.00 V	125	91.53	2.02
2	*2480.00	92.28 AV			1.00 V	125	90.26	2.02
3	2483.50	54.32 PK	74.00	-19.68	1.00 V	125	52.29	2.03
4	2483.50	45.33 AV	54.00	-8.67	1.00 V	125	43.30	2.03
5	4960.00	53.47 PK	74.00	-20.53	1.00 V	0	47.98	5.49
6	4960.00	42.57 AV	54.00	-11.43	1.00 V	0	37.08	5.49
7	7440.00	57.35 PK	74.00	-16.65	1.00 V	0	46.84	10.51
8	7440.00	45.32 AV	54.00	-8.68	1.00 V	0	34.81	10.51

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " \* ": Fundamental frequency.



BT\_8DPSK

CHANNEL	TX Channel 0	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	44.75 PK	74.00	-29.25	1.00 H	125	42.78	1.97
2	2390.00	35.97 AV	54.00	-18.03	1.00 H	125	34.00	1.97
3	*2402.00	96.05 PK			1.00 H	125	94.07	1.98
4	*2402.00	93.58 AV			1.00 H	125	91.60	1.98
5	4804.00	52.11 PK	74.00	-21.89	1.00 H	0	47.22	4.89
6	4804.00	42.25 AV	54.00	-11.75	1.00 H	0	37.36	4.89
7	#7206.00	57.42 PK	74.00	-16.58	1.00 H	0	47.86	9.56
8	#7206.00	45.05 AV	54.00	-8.95	1.00 H	0	35.49	9.56

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	45.36 PK	74.00	-28.64	1.00 V	125	43.39	1.97
2	2390.00	36.71 AV	54.00	-17.29	1.00 V	125	34.74	1.97
3	*2402.00	97.10 PK			1.00 V	125	95.12	1.98
4	*2402.00	94.02 AV			1.00 V	125	92.04	1.98
5	4804.00	52.64 PK	74.00	-21.36	1.00 V	0	47.75	4.89
6	4804.00	42.93 AV	54.00	-11.07	1.00 V	0	38.04	4.89
7	#7206.00	57.36 PK	74.00	-16.64	1.00 V	0	47.80	9.56
8	#7206.00	45.39 AV	54.00	-8.61	1.00 V	0	35.83	9.56

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



CHANNEL	TX Channel 39	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2441.00	92.00 PK			1.00 H	125	90.00	2.00
2	*2441.00	88.76 AV			1.00 H	125	86.76	2.00
3	4882.00	52.72 PK	74.00	-21.28	1.00 H	0	47.54	5.18
4	4882.00	42.37 AV	54.00	-11.63	1.00 H	0	37.19	5.18
5	7323.00	54.89 PK	74.00	-19.11	1.00 H	0	44.85	10.04
6	7323.00	46.00 AV	54.00	-8.00	1.00 H	0	35.96	10.04
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2441.00	94.08 PK			1.00 V	125	92.08	2.00
2	*2441.00	90.72 AV			1.00 V	125	88.72	2.00
3	4882.00	53.08 PK	74.00	-20.92	1.00 V	0	47.90	5.18
4	4882.00	42.78 AV	54.00	-11.22	1.00 V	0	37.60	5.18
5	7323.00	54.44 PK	74.00	-19.56	1.00 V	0	44.40	10.04
6	7323.00	46.20 AV	54.00	-7.80	1.00 V	0	36.16	10.04

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " \* ": Fundamental frequency.



<b>CHANNEL</b>	TX Channel 78	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	91.58 PK			1.00 H	144	89.56	2.02
2	*2480.00	87.83 AV			1.00 H	144	85.81	2.02
3	2483.50	52.66 PK	74.00	-21.34	1.00 H	144	50.63	2.03
4	2483.50	43.16 AV	54.00	-10.84	1.00 H	144	41.13	2.03
5	4960.00	54.88 PK	74.00	-19.12	1.00 H	0	49.39	5.49
6	4960.00	41.26 AV	54.00	-12.74	1.00 H	0	35.77	5.49
7	7440.00	55.35 PK	74.00	-18.65	1.00 H	0	44.84	10.51
8	7440.00	45.06 AV	54.00	-8.94	1.00 H	0	34.55	10.51
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	93.77 PK			1.00 V	144	91.75	2.02
2	*2480.00	89.96 AV			1.00 V	144	87.94	2.02
3	2483.50	52.15 PK	74.00	-21.85	1.00 V	144	50.12	2.03
4	2483.50	43.89 AV	54.00	-10.11	1.00 V	144	41.86	2.03
5	4960.00	54.32 PK	74.00	-19.68	1.00 V	0	48.83	5.49
6	4960.00	41.08 AV	54.00	-12.92	1.00 V	0	35.59	5.49
7	7440.00	55.16 PK	74.00	-18.84	1.00 V	0	44.65	10.51
8	7440.00	45.87 AV	54.00	-8.13	1.00 V	0	35.36	10.51

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " \* ": Fundamental frequency.




## 4.2 NUMBER OF HOPPING FREQUENCY USED

### 4.2.1 LIMIT OF HOPPING FREQUENCY USED

At least 15 channels frequencies, and should be equally spaced.

### 4.2.2 TEST SETUP

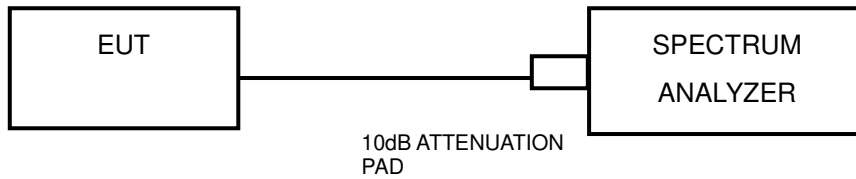

### 4.2.3 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Next Cal.
Power Sensor	Keysight	U2021XA	MY55060016	N/A
Power Sensor	Keysight	U2021XA	MY55060018	May 09, 22
Power Meter	Anritsu	ML2495A	1139001	Feb. 24,22
Power Sensor	Anritsu	MA2411B	1531155	Feb. 24,22
Digital Multimeter	FLUKE	15B	A1220010DG	N/A
Humid & Temp Programmable Tester	Haida	HD-225T	110807201	Nov. 03,22
Oscilloscope	Agilent	DSO9254A	MY51260160	Aug. 10,22
Signal and Spectrum Analyzer	Rohde&Schwarz	FSV40	101094	Feb. 24,22
Signal Generator	Agilent	N5183A	MY50140980	Aug. 10,22
MXG-B RF Vector Signal Generator	Keysight	N5182B	MY56200288	Sep. 04,22
BLUETOOTH TESTER	Rohde&Schwarz	CBT32	100811	N/A
Attenuator	MINI	BW-S10W2+	S130129FGE2	N/A
DC Source	Keysight	E3642A	MY56146098	N/A

#### NOTES:

1. The test was performed in RF Oven room.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.





#### 4.2.4 TEST PROCEDURES

- a. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
- c. Set the SA on Max Hold Mode, and then keep the EUT in hopping mode. Record all the signals from each channel until each one has been recorded.
- d. Set the SA on View mode and then plot the result on SA screen.
- e. Repeat above procedures until all frequencies measured were completed.

#### 4.2.5 DEVIATION FROM TEST STANDARD

No deviation.

#### 4.2.6 TEST RESULTS



There are 79 hopping frequencies in the hopping mode. Please refer to next two pages for the test result. On the plots, it shows that the hopping frequencies are equally spaced.



BUREAU VERITAS

Test Report No.: RF2106WDG0461-2

GFSK

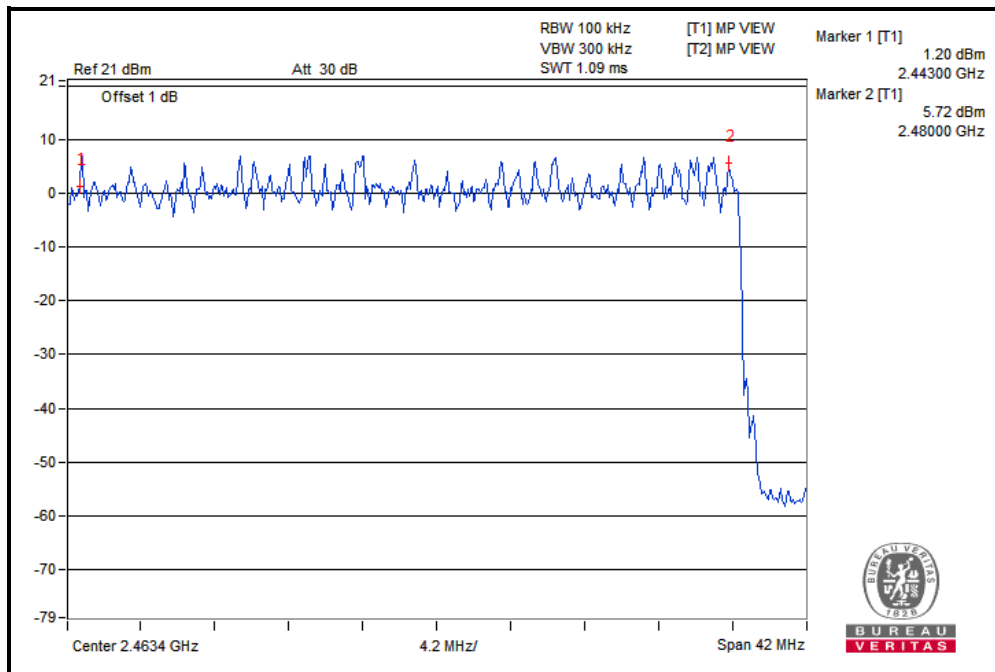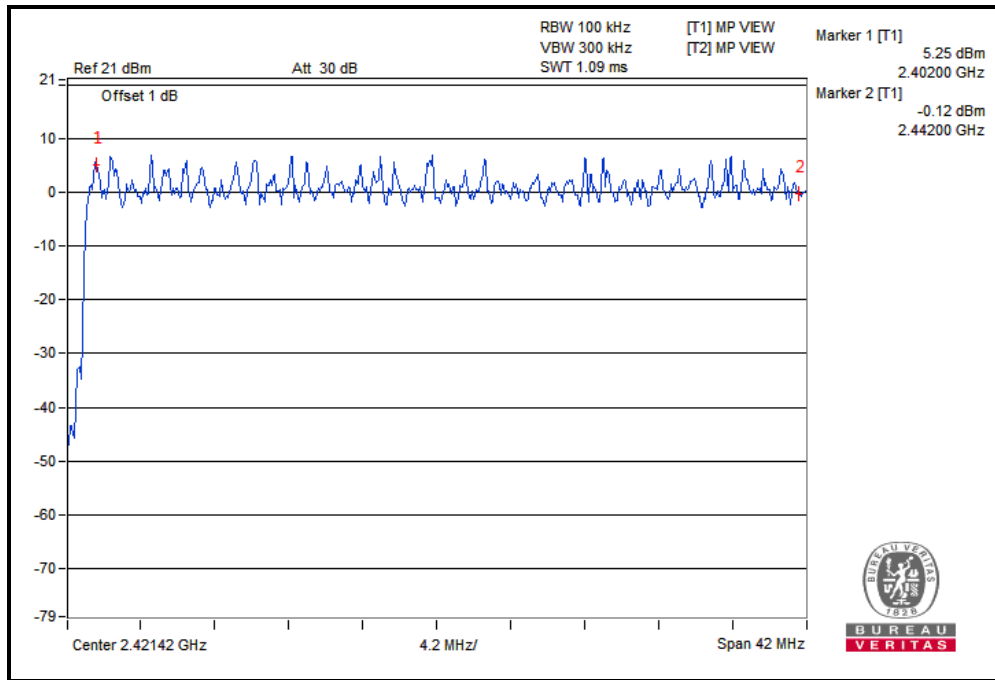

Bureau Veritas Shenzhen Co., Ltd.  
Dongguan Branch

No. 96, Guantai Road (Houjie Section), Houjie  
Town, Dongguan City, Guangdong Province.  
523942. People's Republic of China.



Tel: +86 769 8998 2098  
Fax: +86 769 8593 1080  
Email: [customerservice.dg@bureauveritas.com](mailto:customerservice.dg@bureauveritas.com)



BUREAU VERITAS

Test Report No.: RF2106WDG0461-2

8DPSK

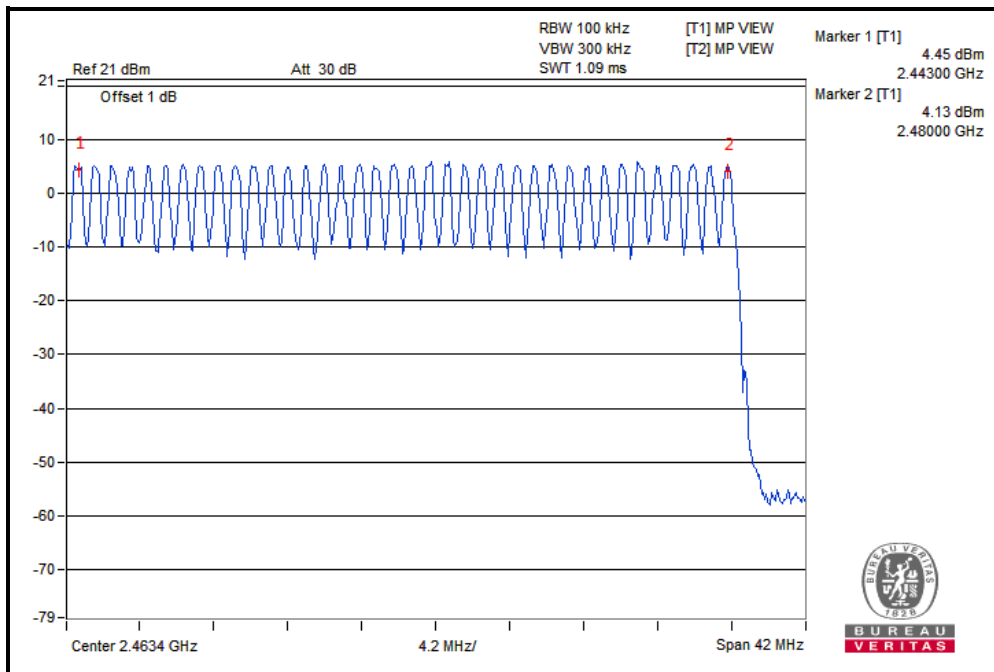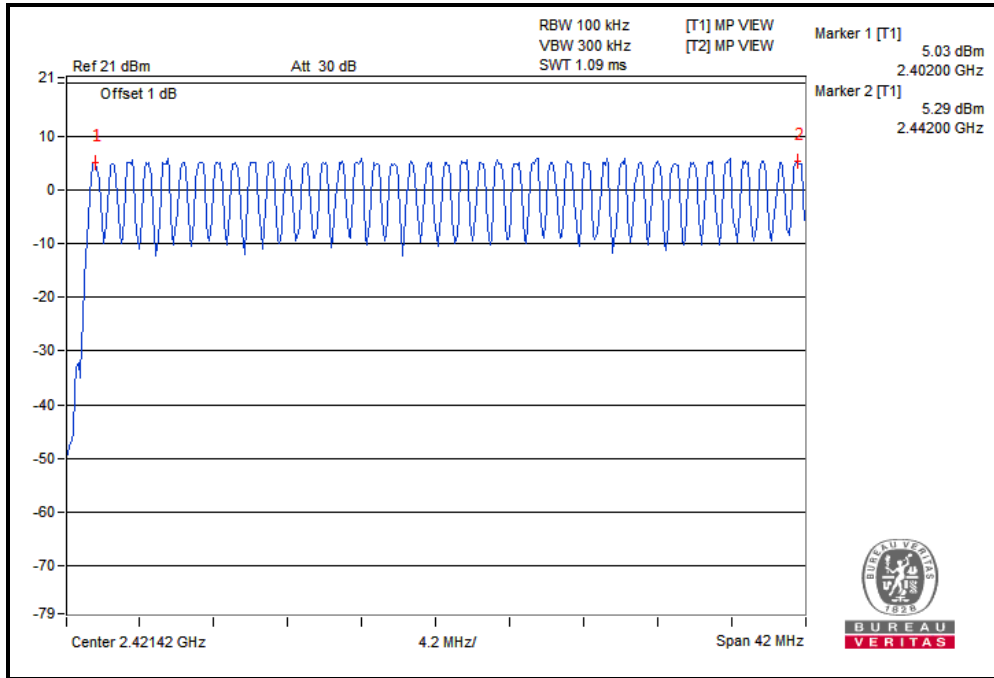

Bureau Veritas Shenzhen Co., Ltd.  
Dongguan Branch

No. 96, Guantai Road (Houjie Section), Houjie  
Town, Dongguan City, Guangdong Province.  
523942. People's Republic of China.

Tel: +86 769 8998 2098  
Fax: +86 769 8593 1080  
Email: [customerservice.dg@bureauveritas.com](mailto:customerservice.dg@bureauveritas.com)




### 4.3 DWELL TIME ON EACH CHANNEL

#### 4.3.1 LIMIT OF DWELL TIME USED

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

#### 4.3.2 TEST SETUP

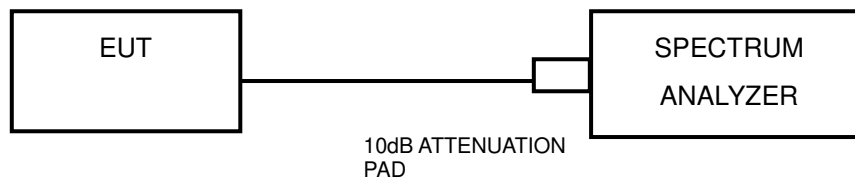

#### 4.3.3 TEST INSTRUMENTS

Refer to section 4.2.3 to get information of above instrument.

#### 4.3.4 TEST PROCEDURES

- a. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
- c. Adjust the center frequency of SA on any frequency be measured and set SA to zero span mode. And then, set RBW and VBW of spectrum analyzer to proper value.
- d. Measure the time duration of one transmission on the measured frequency. And then plot the result with time difference of this time duration.
- e. Repeat above procedures until all different time-slot modes have been completed.



### 4.3.5 DEVIATION FROM TEST STANDARD

No deviation.

### 4.3.6 TEST RESULTS

#### GFSK

Mode	Number of Hopping Channel	Number of transmission in a period(channel number*0.4 sec)				Length of transmission time (msec)	Result (msec)	Limit (msec)	PASS / FAIL
		period (sec)	sweep time (sec)	times in a sweep	times in a period				
DH1	79	31.6	5	51	322.32	0.408	131.51	400	PASS
DH3	79	31.6	5	26	164.32	1.680	276.06	400	PASS
DH5	79	31.6	5	17	107.44	3.056	328.34	400	PASS

#### 8DPSK

Mode	Number of Hopping Channel	Number of transmission in a period(channel number*0.4 sec)				Length of transmission time (msec)	Result (msec)	Limit (msec)	PASS / FAIL
		period (sec)	sweep time (sec)	times in a sweep	times in a period				
3DH1	79	31.6	5	51	322.32	0.422	136.02	400	PASS
3DH3	79	31.6	5	26	164.32	1.666	273.76	400	PASS
3DH5	79	31.6	5	17	107.44	2.980	320.17	400	PASS


**NOTE:** Test plots of the transmitting time slot are shown on next page.



BUREAU VERITAS

Test Report No.: RF2106WDG0461-2

### GFSK

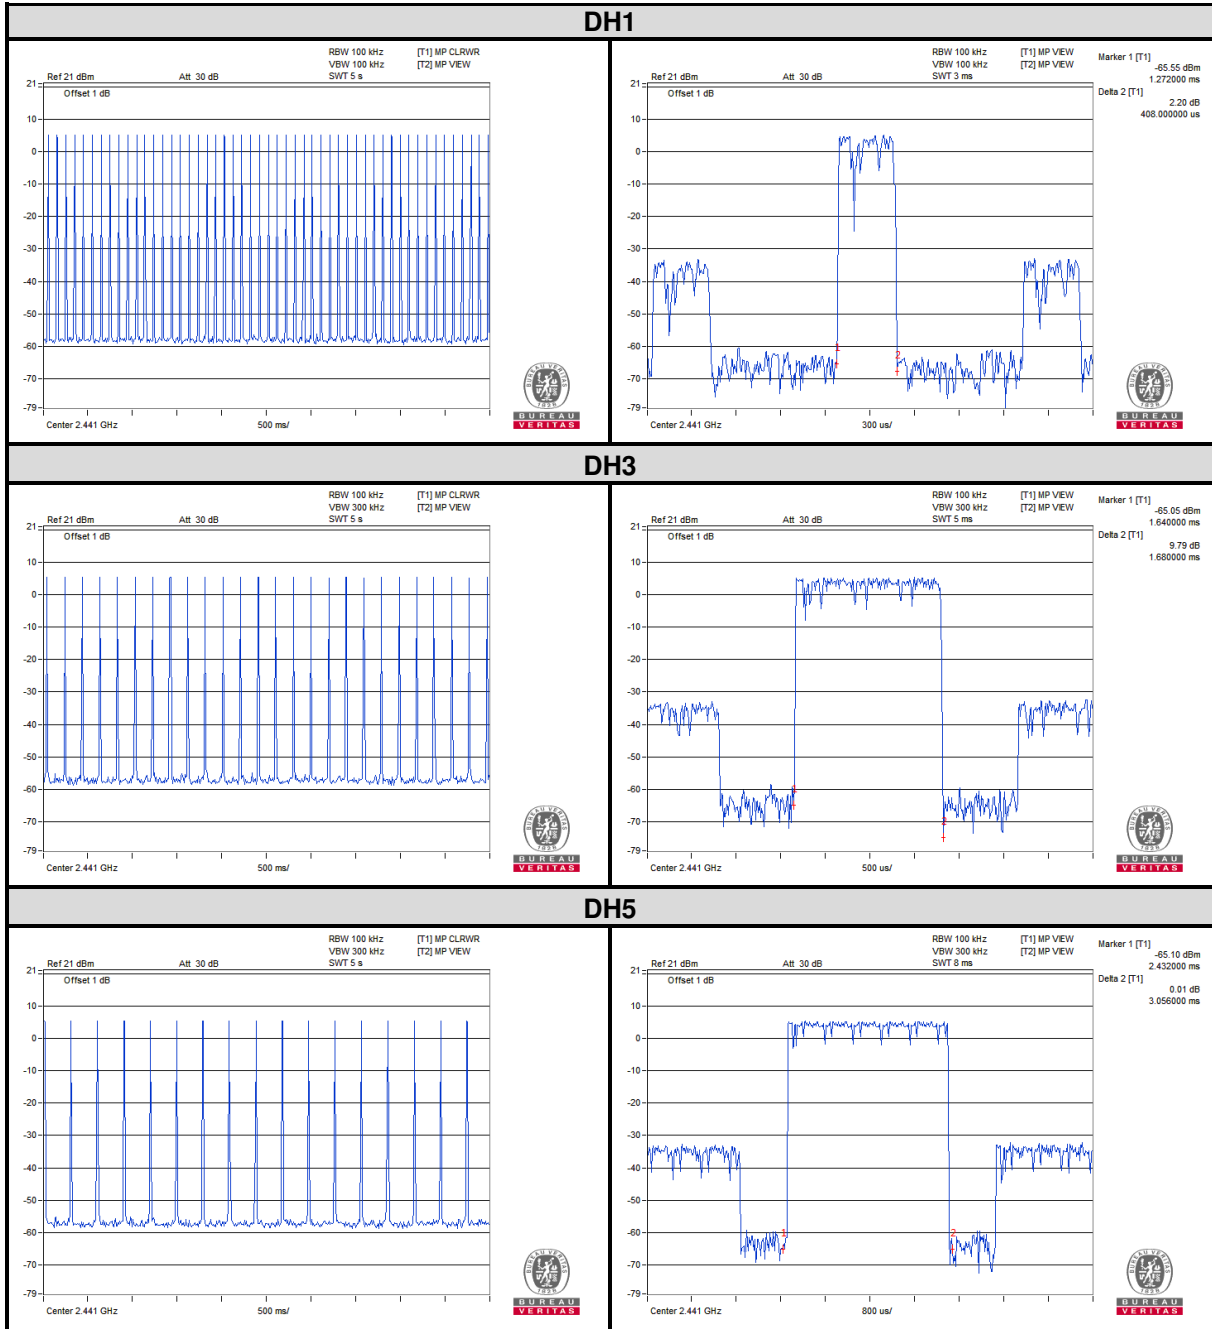

Bureau Veritas Shenzhen Co., Ltd.  
Dongguan Branch

No. 96, Guantai Road (Houjie Section), Houjie  
Town, Dongguan City, Guangdong Province.  
523942. People's Republic of China.


Tel: +86 769 8998 2098  
Fax: +86 769 8593 1080  
Email: [customerservice.dg@bureauveritas.com](mailto:customerservice.dg@bureauveritas.com)



BUREAU VERITAS

Test Report No.: RF2106WDG0461-2

### 8DPSK

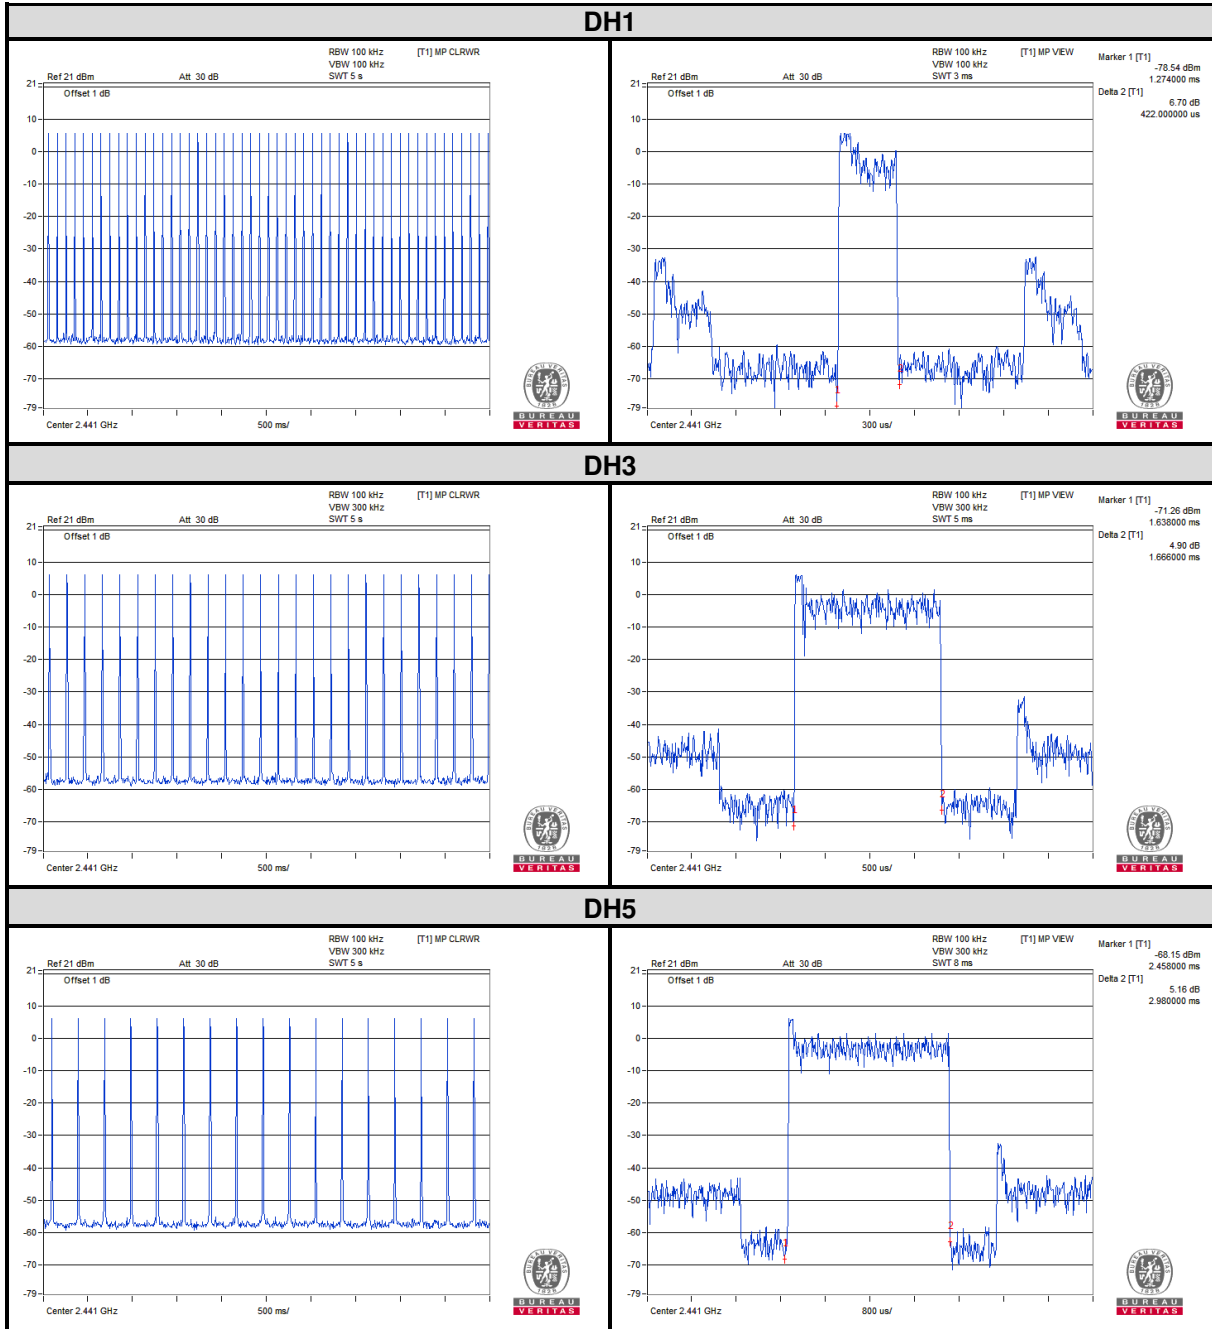

Bureau Veritas Shenzhen Co., Ltd.  
Dongguan Branch

No. 96, Guantai Road (Houjie Section), Houjie  
Town, Dongguan City, Guangdong Province.  
523942. People's Republic of China.


Tel: +86 769 8998 2098  
Fax: +86 769 8593 1080  
Email: [customerservice.dg@bureauveritas.com](mailto:customerservice.dg@bureauveritas.com)

## 4.4 CHANNEL BANDWIDTH

### 4.4.1 LIMITS OF CHANNEL BANDWIDTH

For frequency hopping system operating in the 2400-2483.5MHz, If the 20dB bandwidth of hopping channel is greater than 25kHz, two-thirds 20dB bandwidth of hopping channel shall be a minimum limit for the hopping channel separation.

### 4.4.2 TEST SETUP

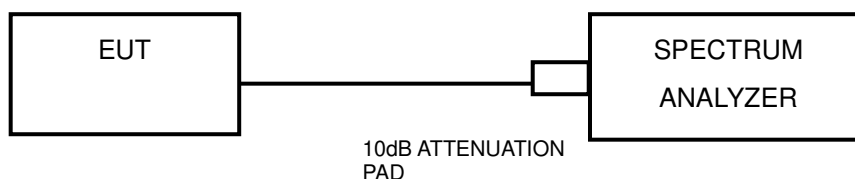

### 4.4.3 TEST INSTRUMENTS

Refer to section 4.2.3 to get information of above instrument.

### 4.4.4 TEST PROCEDURE

- a. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- c. Measure the frequency difference of two frequencies that were attenuated 20dB from the reference level. Record the frequency difference as the emission bandwidth.
- d. Repeat above procedures until all frequencies measured were complete.

### 4.4.5 DEVIATION FROM TEST STANDARD

No deviation.

### 4.4.6 EUT OPERATING CONDITION

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.




#### 4.4.7 TEST RESULTS


##### GFSK

CHANNEL	CHANNEL FREQUENCY (MHz)	20dB BANDWIDTH (MHz)
0	2402	0.962
39	2441	0.965
78	2480	0.966


##### CH 0

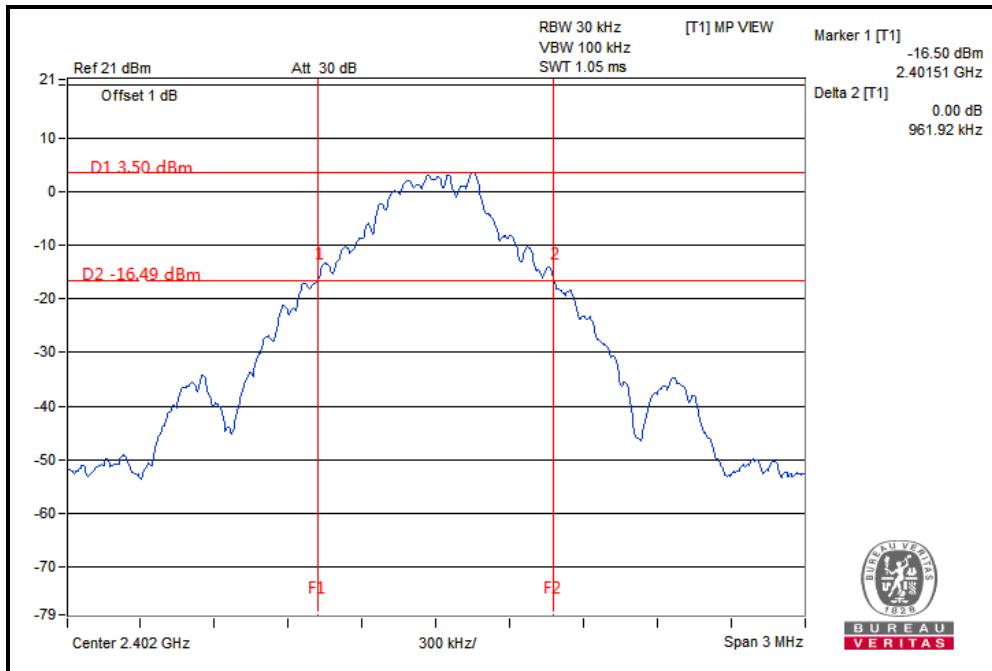

CH 39

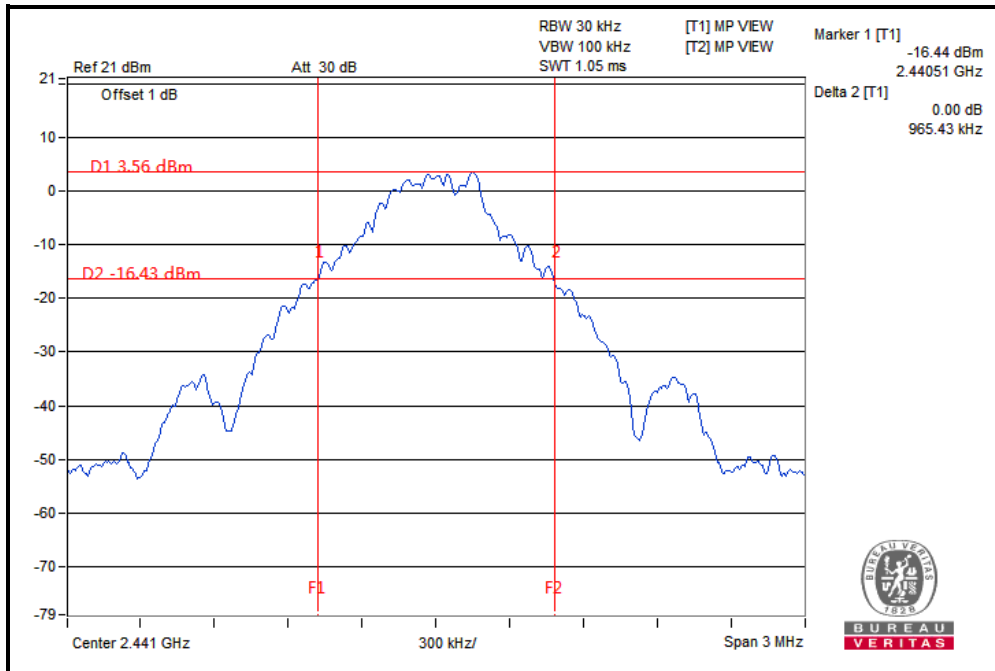


CH 78

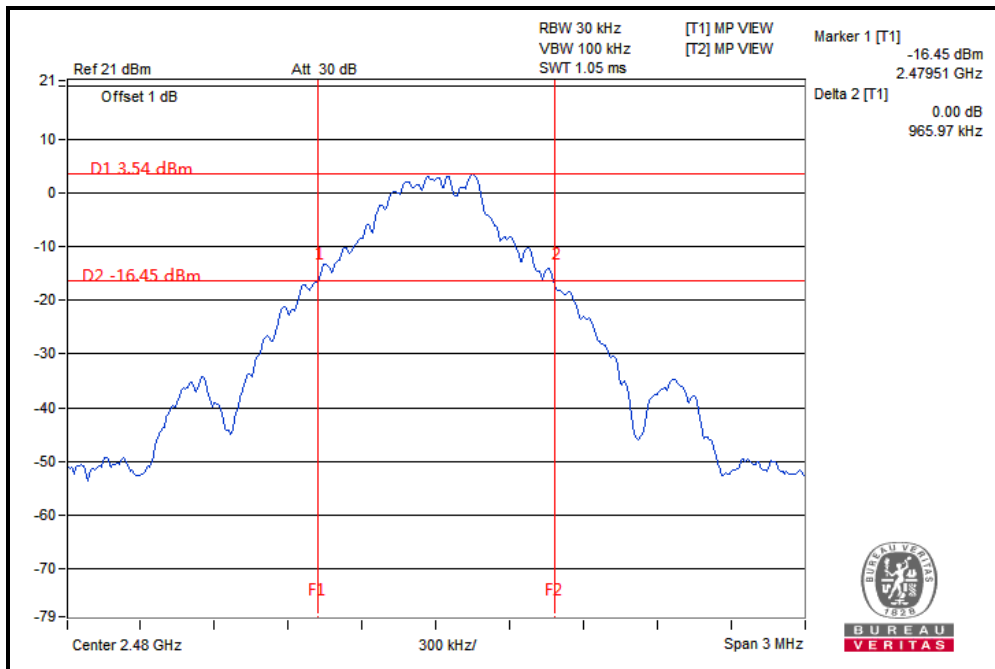


**8DPSK**

CHANNEL	CHANNEL FREQUENCY (MHz)	20dB BANDWIDTH (MHz)
0	2402	1.26
39	2441	1.26
78	2480	1.26


**CH 0**

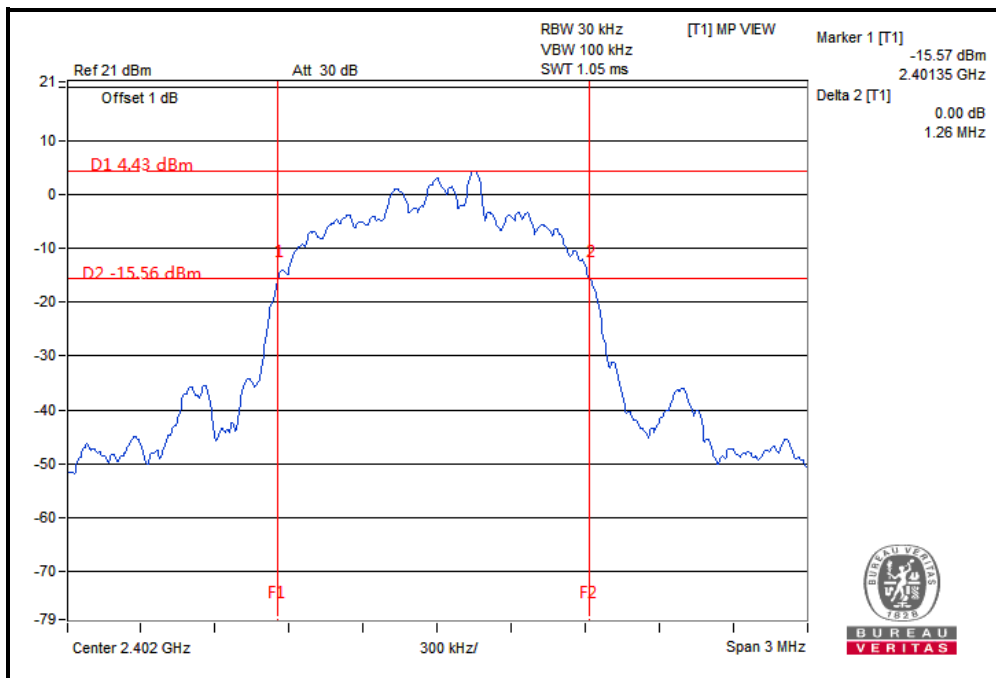

CH 39

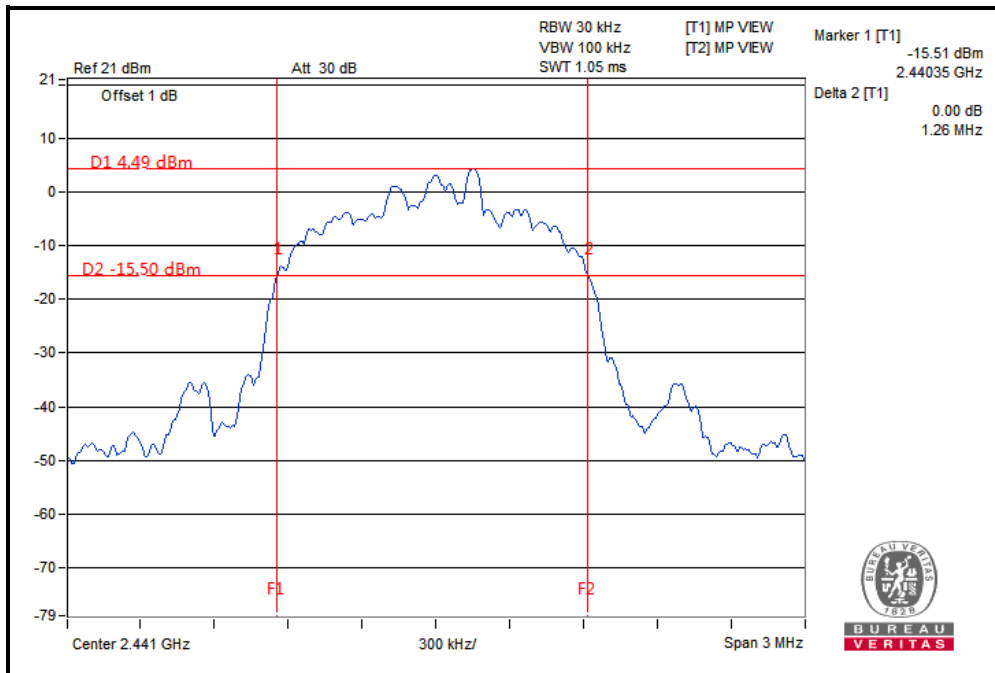

CH 78

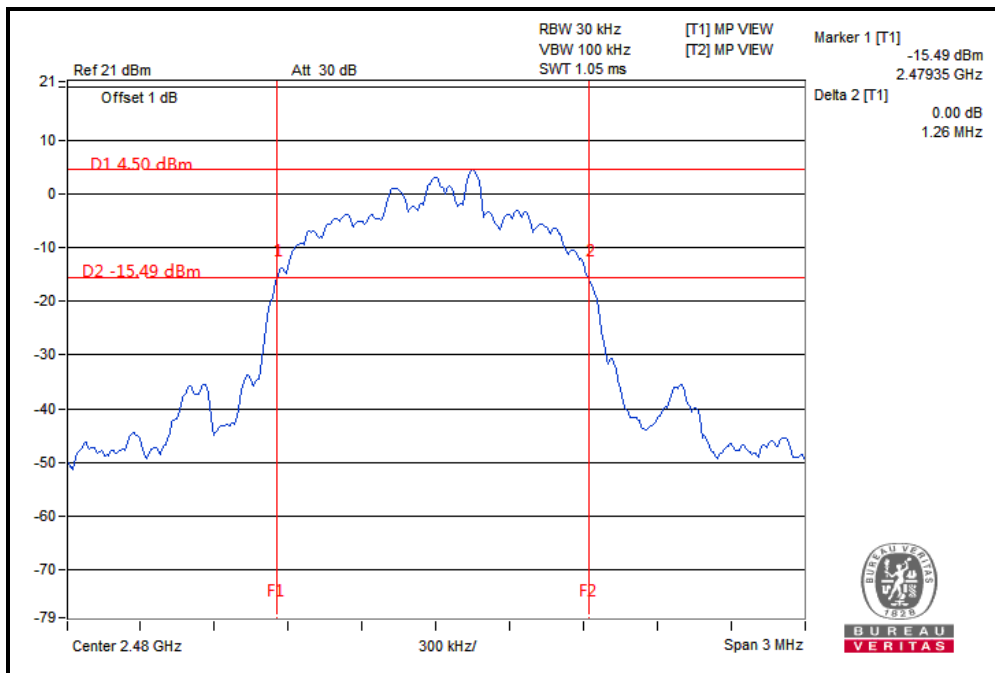


## 4.5 HOPPING CHANNEL SEPARATION

### 4.5.1 LIMIT OF HOPPING CHANNEL SEPARATION

At least 25kHz or two-third of 20dB hopping channel bandwidth (whichever is greater).

### 4.5.2 TEST SETUP

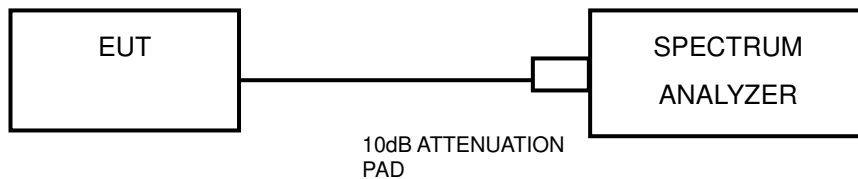

### 4.5.3 TEST INSTRUMENTS

Refer to section 4.2.3 to get information of above instrument.

### 4.5.4 TEST PROCEDURES

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range.
3. By using the MaxHold function record the separation of two adjacent channels.
4. Measure the frequency difference of these two adjacent channels by SA MARK function. And then plot the result on SA screen.
5. Repeat above procedures until all frequencies measured were complete.

### 4.5.5 DEVIATION FROM TEST STANDARD

No deviation.


## 4.5.6 TEST RESULTS

### GFSK


CHANNEL	FREQUENCY (MHz)	ADJACENT CHANNEL SEPARATION (MHz)	20dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
0	2402	1.00	0.962	0.641	PASS
39	2441	1.00	0.965	0.643	PASS
78	2480	1.00	0.966	0.644	PASS

**NOTE:** The minimum limit is two-third 20dB bandwidth.


### CH 0

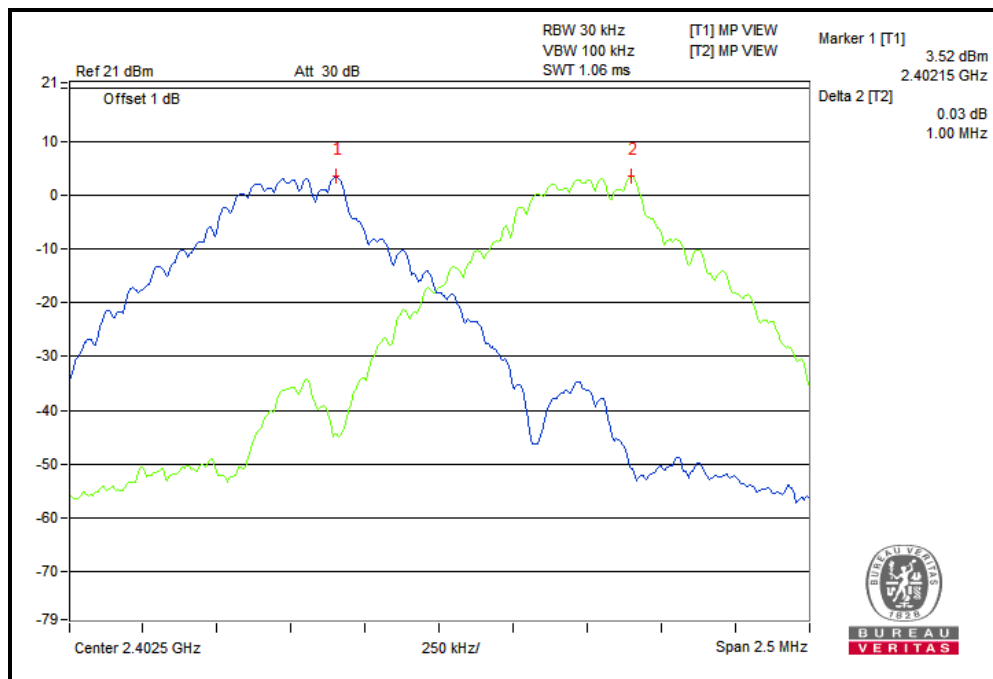

CH 39

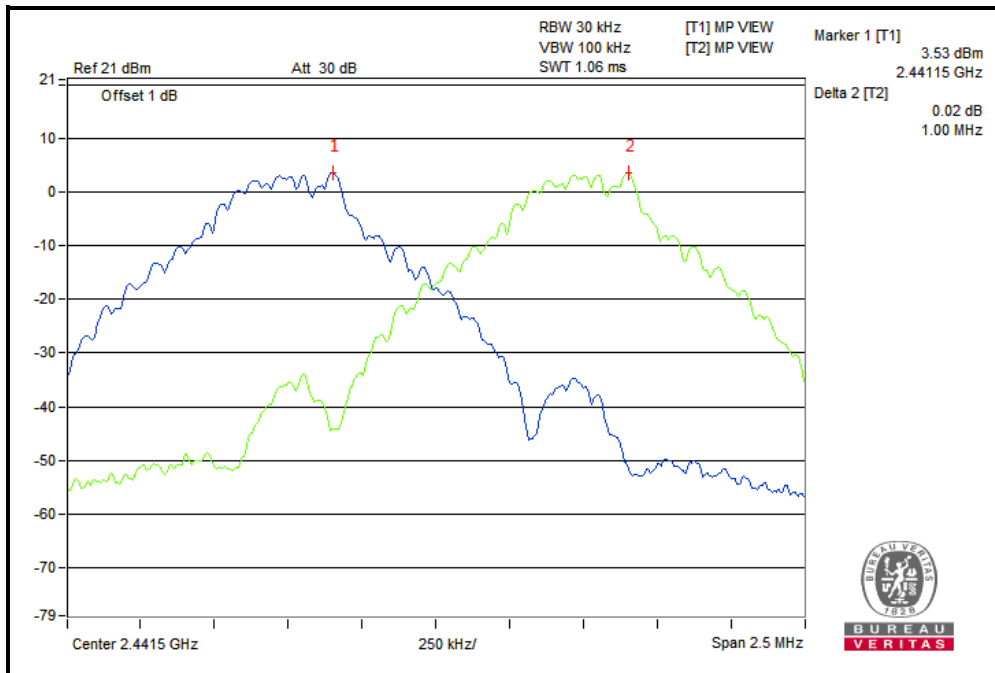

CH 78

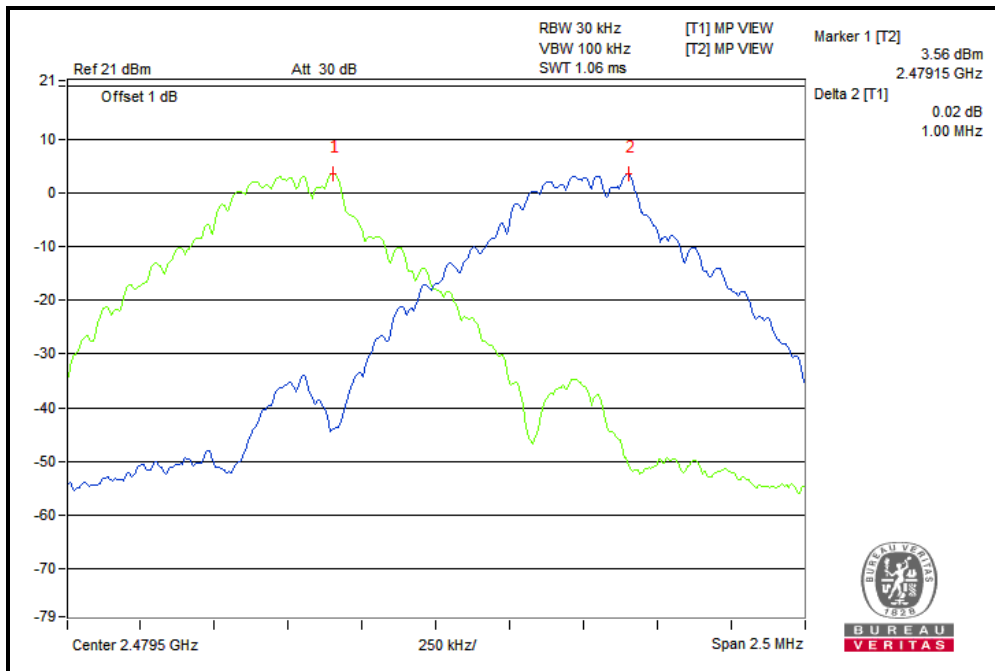


**8DPSK**

CHANNEL	FREQUENCY (MHz)	ADJACENT CHANNEL SEPARATION (MHz)	20dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
0	2402	1.00	1.26	0.840	PASS
39	2441	1.00	1.26	0.840	PASS
78	2480	1.00	1.26	0.840	PASS


**NOTE:** The minimum limit is two-third 20dB bandwidth.

**CH 0**

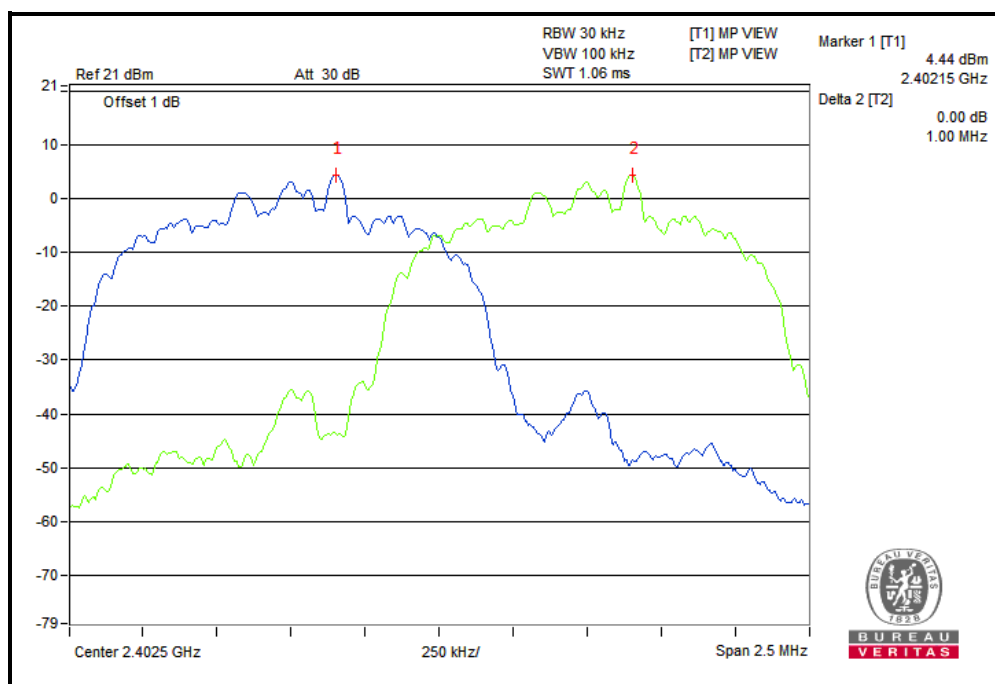




CH 39

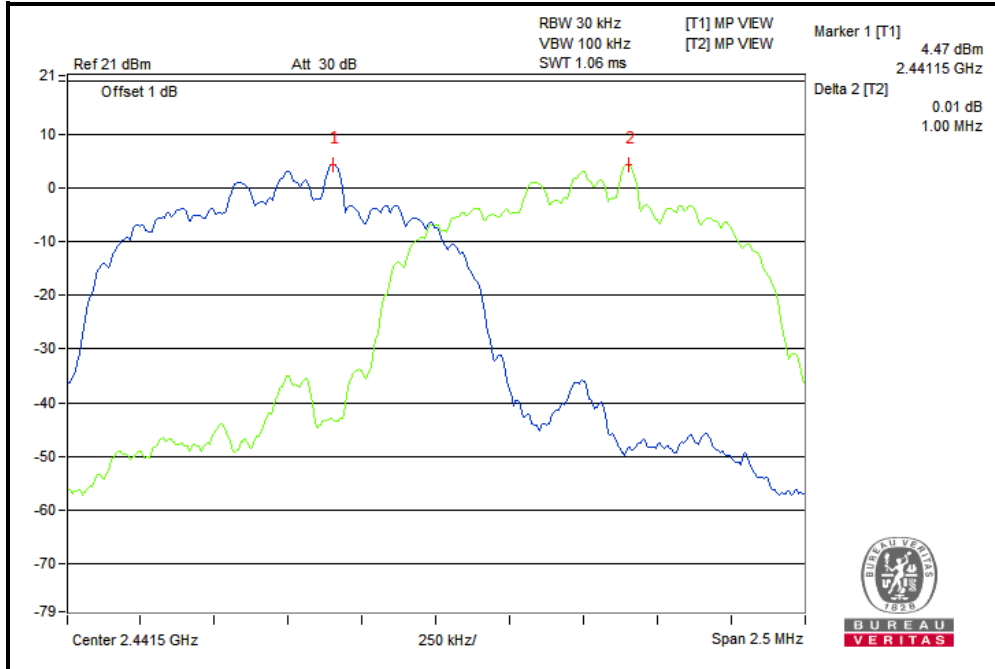

CH 78

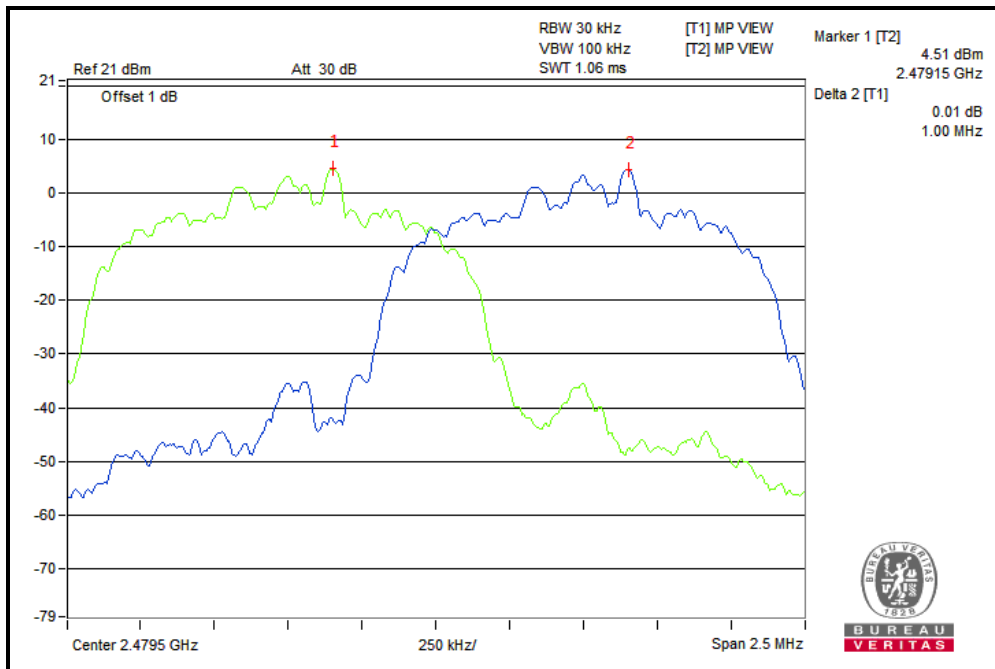


## 4.6 CONDUCTED OUTPUT POWER

### 4.6.1 LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT

The Maximum Output Power Measurement is 0.125W.

### 4.6.2 TEST SETUP

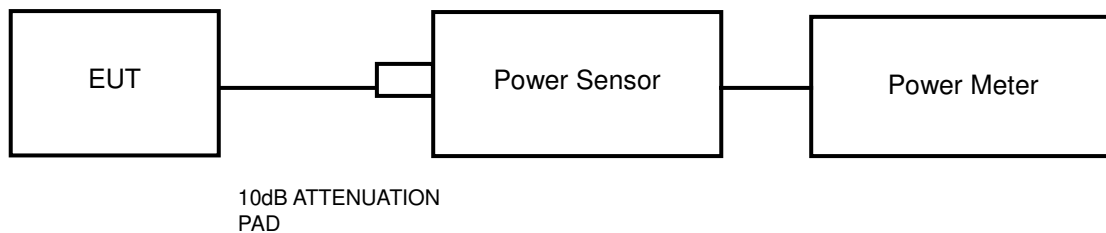

### 4.6.3 TEST INSTRUMENTS

Refer to section 4.2.3 to get information of above instrument.

### 4.6.4 TEST PROCEDURES

A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor and set the detector to PEAK. Record the power level.

An average power sensor was used on the output port of the EUT. A power meter was used to read the response of the average power sensor and set the detector to AVERAGE. Record the power level.

### 4.6.5 DEVIATION FROM TEST STANDARD

No deviation.

#### 4.6.6 EUT OPERATING CONDITION

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

#### 4.6.7 TEST RESULTS

##### MAXIMUM PEAK OUTPUT POWER

Left Earbud:

GFSK

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER (dBm)	PEAK POWER (mW)	PEAK POWER LIMIT (W)	PASS/FAIL
0	2402	8.31	6.776	0.125	PASS
39	2441	8.42	6.950	0.125	PASS
78	2480	8.18	6.577	0.125	PASS

8DPSK

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER (dBm)	PEAK POWER (mW)	PEAK POWER LIMIT (W)	PASS/FAIL
0	2402	9.33	8.57	0.125	PASS
39	2441	9.43	8.77	0.125	PASS
78	2480	9.20	8.318	0.125	PASS



**Right Earbud:**

**GFSK**

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER (dBm)	PEAK POWER (mW)	PEAK POWER LIMIT (W)	PASS/FAIL
0	2402	8.06	6.397	0.125	PASS
39	2441	8.14	6.516	0.125	PASS
78	2480	7.92	6.194	0.125	PASS

**8DPSK**

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER (dBm)	PEAK POWER (mW)	PEAK POWER LIMIT (W)	PASS/FAIL
0	2402	9.04	8.017	0.125	PASS
39	2441	9.15	8.222	0.125	PASS
78	2480	8.88	7.727	0.125	PASS



**AVERAGE OUTPUT POWER(FOR REFERENCE)**

**Left Earbud:**

**GFSK**

CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER (dBm)	AVERAGE POWER (mW)
0	2402	7.06	5.082
39	2441	7.17	5.212
78	2480	6.94	4.943

**8DPSK**

CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER (dBm)	AVERAGE POWER (mW)
0	2402	7.29	5.358
39	2441	7.39	5.483
78	2480	7.18	5.224

**Right Earbud:**

**GFSK**

CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER (dBm)	AVERAGE POWER (mW)
0	2402	6.84	4.831
39	2441	6.92	4.92
78	2480	6.68	4.656

**8DPSK**

CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER (dBm)	AVERAGE POWER (mW)
0	2402	7.05	5.070
39	2441	7.15	5.188
78	2480	6.92	4.920

## 4.7 OUT OF BAND EMISSION MEASUREMENT

### 4.7.1 LIMITS OF OUT OF BAND EMISSION MEASUREMENT

Below  $-20\text{dB}$  of the highest emission level of operating band (in 100KHz RBW).

### 4.7.2 TEST INSTRUMENTS

Refer to section 4.2.3 to get information of above instrument.

### 4.7.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low loss cable. of Spectrum Analyzer was set RBW to 100 kHz and VBW to 300 kHz with suitable frequency span including 100 MHz bandwidth from band edge. Detector = PEAK and Trace mode = Max Hold. The band edges was measured and recorded.

### 4.7.4 DEVIATION FROM TEST STANDARD

No deviation.

### 4.7.5 EUT OPERATING CONDITION


The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

### 4.7.6 TEST RESULTS

The spectrum plots are attached on the following images. D1 line indicates the highest level. D2 line indicates the 20dB offset below D1. It shows compliance to the requirement.



GFSK

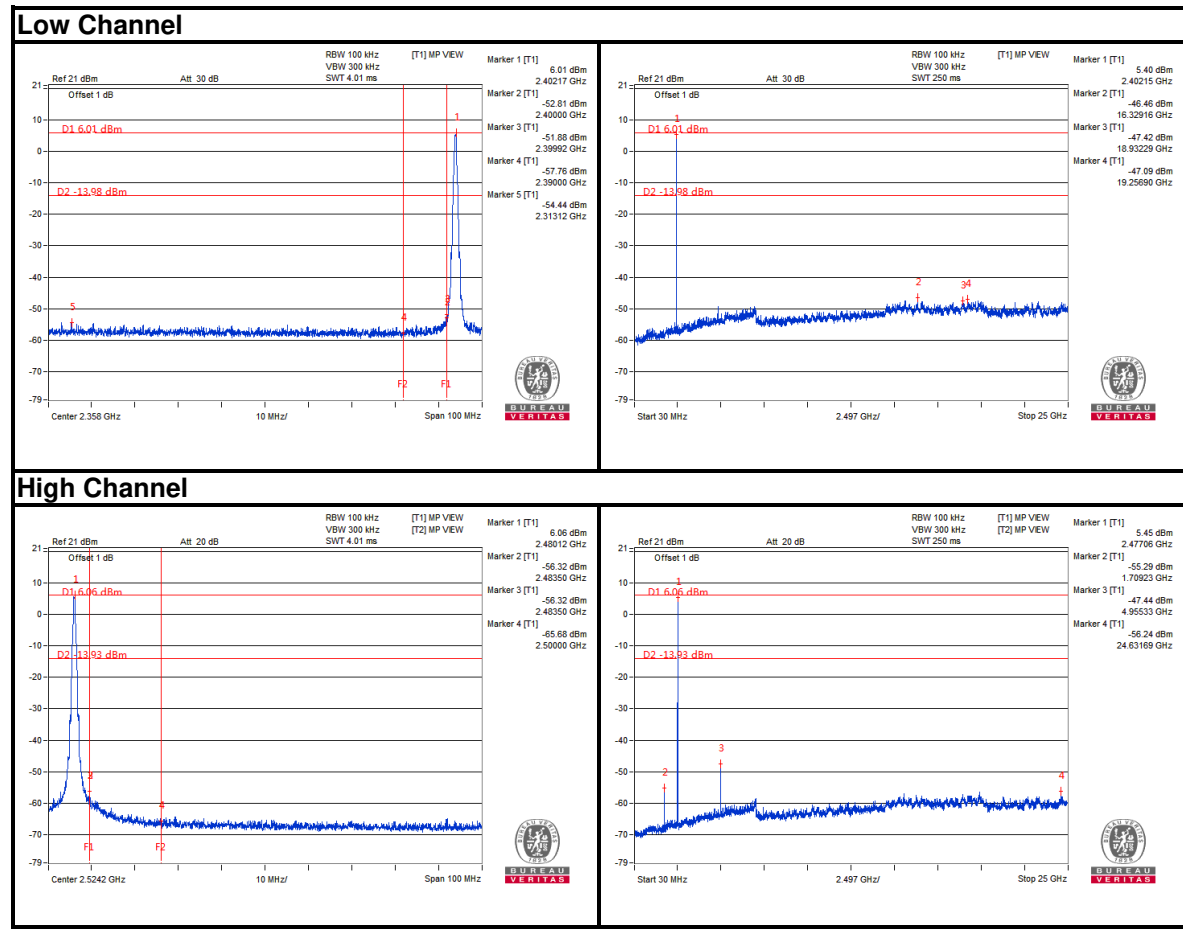

Bureau Veritas Shenzhen Co., Ltd.  
Dongguan Branch

No. 96, Guantai Road (Houjie Section), Houjie Town, Dongguan City, Guangdong Province. 523942. People's Republic of China.


Tel: +86 769 8998 2098  
Fax: +86 769 8593 1080  
Email: [customerservice.de@bureauveritas.com](mailto:customerservice.de@bureauveritas.com)



BUREAU VERITAS

Test Report No.: RF2106WDG0461-2

### 8DPSK

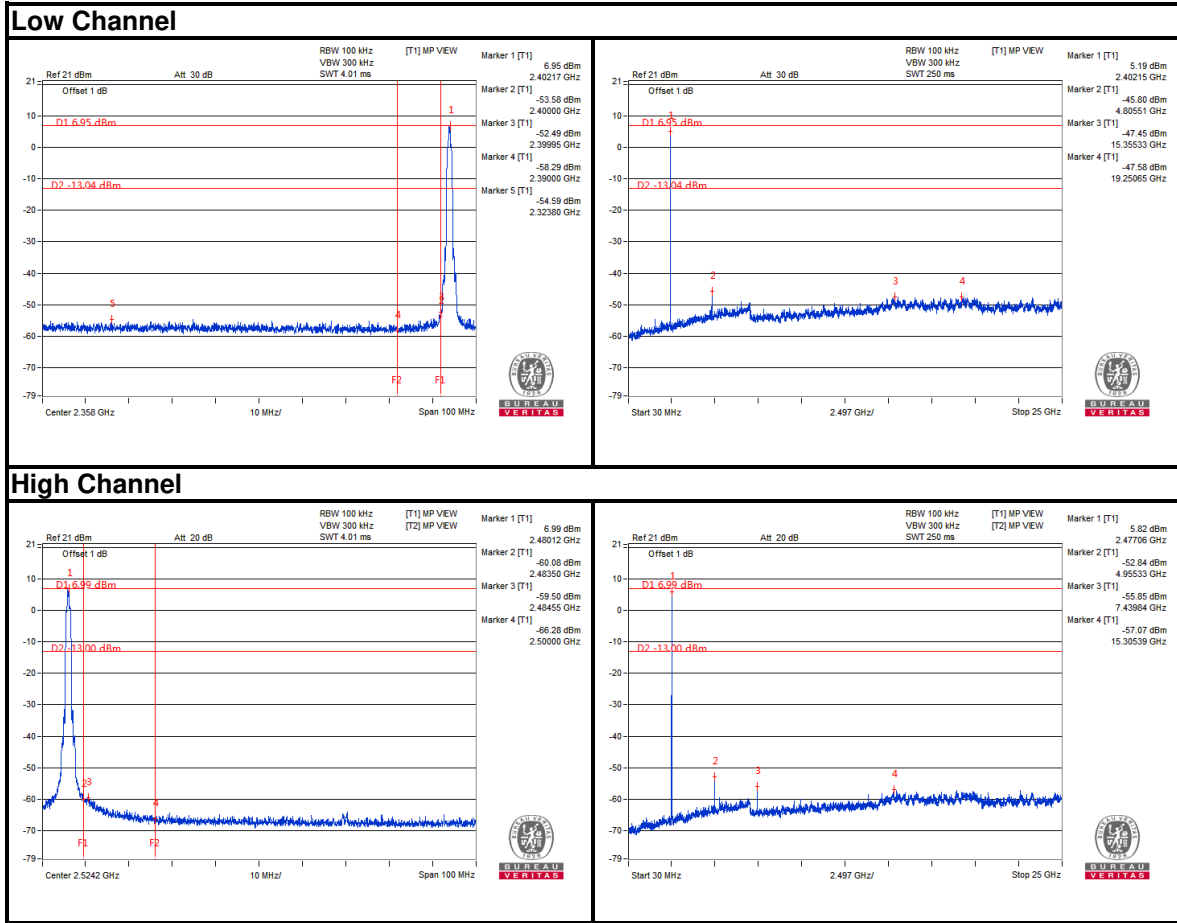

Bureau Veritas Shenzhen Co., Ltd.  
Dongguan Branch

No. 96, Guantai Road (Houjie Section), Houjie  
Town, Dongguan City, Guangdong Province.  
523942. People's Republic of China.

Tel: +86 769 8998 2098  
Fax: +86 769 8593 1080  
Email: [customerservice.de@bureauveritas.com](mailto:customerservice.de@bureauveritas.com)







BUREAU VERITAS



Test Report No.: RF2106WDG0461-2

GFSK

Hopping on Low Channel

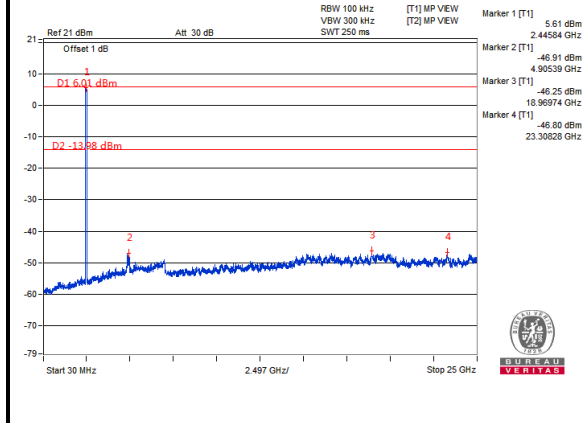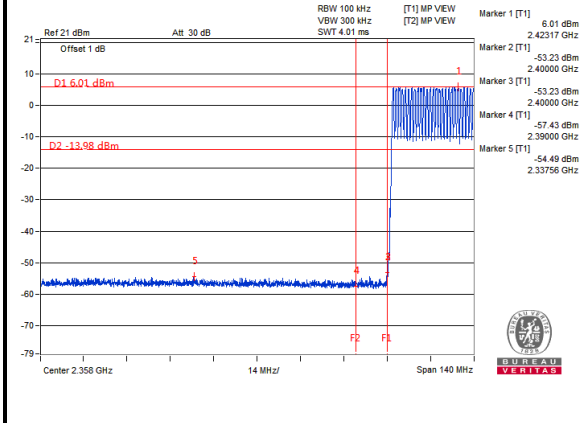

Hopping on High Channel

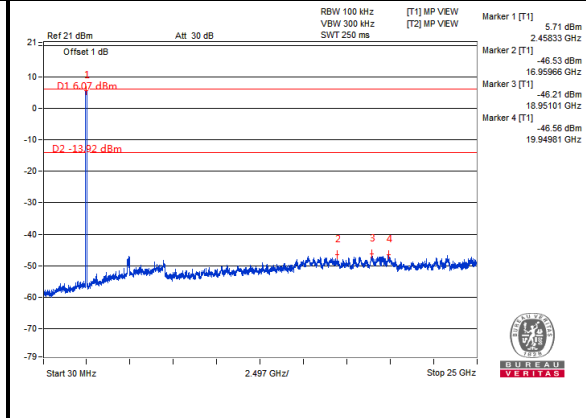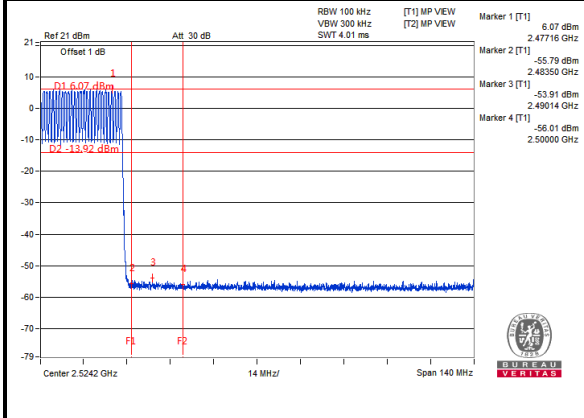

Bureau Veritas Shenzhen Co., Ltd.  
Dongguan Branch

No. 96, Guantai Road (Houjie Section), Houjie  
Town, Dongguan City, Guangdong Province.  
523942. People's Republic of China.

Tel: +86 769 8998 2098  
Fax: +86 769 8593 1080  
Email: [customerservice.de@bureauveritas.com](mailto:customerservice.de@bureauveritas.com)





BUREAU VERITAS



Test Report No.: RF2106WDG0461-2

### 8DPSK

#### Hopping on Low Channel

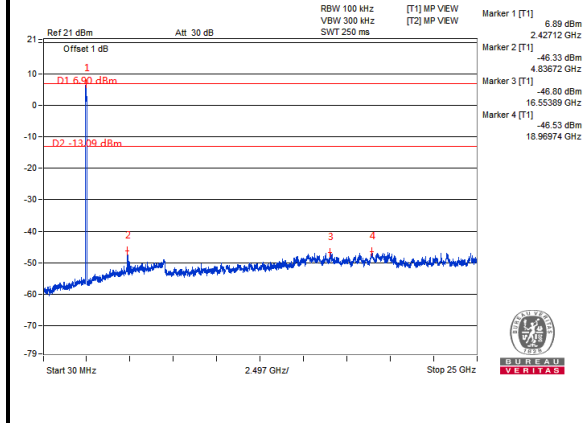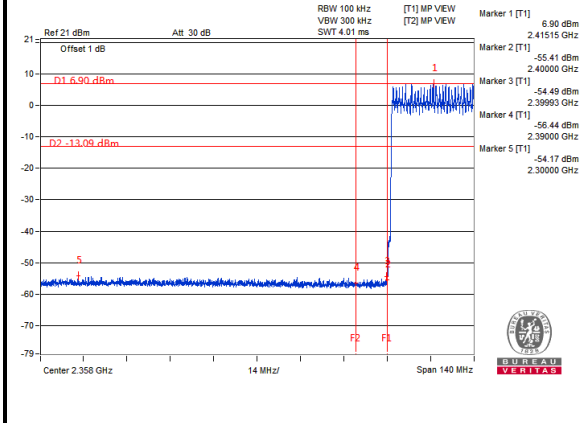

#### Hopping on High Channel

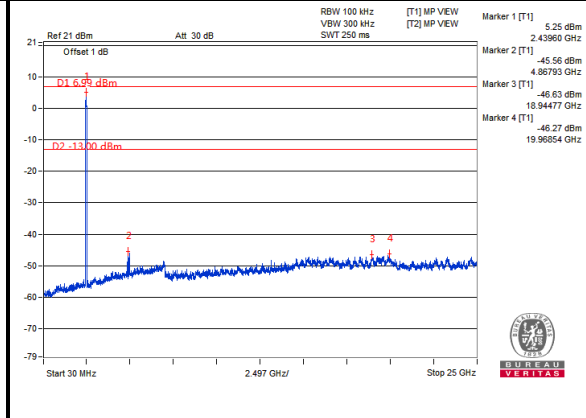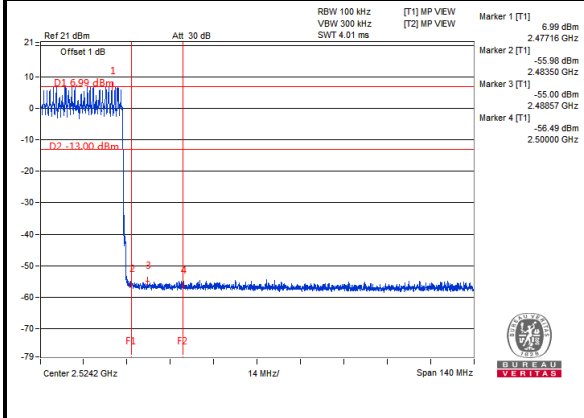

Bureau Veritas Shenzhen Co., Ltd.  
Dongguan Branch

No. 96, Guantai Road (Houjie Section), Houjie  
Town, Dongguan City, Guangdong Province.  
523942. People's Republic of China.

Tel: +86 769 8998 2098  
Fax: +86 769 8593 1080  
Email: [customerservice.de@bureauveritas.com](mailto:customerservice.de@bureauveritas.com)



**BUREAU  
VERITAS**

Test Report No.: RF2106WDG0461-2

## 5 PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



Test Report No.: RF2106WDG0461-2

## 6 APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.

---END---